Panduan Pengembang untuk versi 2.x

# AWS SDK for Java 2.x



Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

# AWS SDK for Java 2.x: Panduan Pengembang untuk versi 2.x

Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Merek dagang dan tampilan dagang Amazon tidak boleh digunakan sehubungan dengan produk atau layanan apa pun yang bukan milik Amazon, dengan cara apa pun yang dapat menyebabkan kebingungan di antara pelanggan, atau dengan cara apa pun yang merendahkan atau mendiskreditkan Amazon. Semua merek dagang lain yang tidak dimiliki oleh Amazon merupakan hak milik masing-masing pemiliknya, yang mungkin atau mungkin tidak terafiliasi, terkait dengan, atau disponsori oleh Amazon.

# Table of Contents

Apa itu AWS SDK for Java 2.x ..... 1
Memulai dengan SDK ..... 1
Kembangkan aplikasi seluler ..... 1
Pemeliharaan dan dukungan untuk versi utama SDK ..... 1
Sumber daya tambahan ..... 2
Berkontribusi pada SDK ..... 2
Memulai ..... 3
Pengaturan ..... 4
Gambaran umum pengaturan ..... 4
Instal prasyarat pengembangan Java ..... 5
Siapkan proyek Apache Maven ..... 6
Siapkan proyek Gradle ..... 12
Siapkan proyek Gambar Asli GraalVM ..... 18
Autentikasi dengan AWS ..... 20
Siapkan untuk otentikasi ..... 20
Opsi otentikasi tambahan ..... 22
Membuat aplikasi sederhana ..... 23
Langkah 1: Siapkan untuk tutorial ini ..... 23
Langkah 2: Buat proyek ..... 23
Langkah 3: Tulis kodenya ..... 28
Langkah 4: Bangun dan jalankan aplikasi ..... 32
Langkah selanjutnya ..... 33
Mengkonfigurasi klien layanan ..... 34
Konfigurasi klien secara eksternal ..... 35
Rantai penyedia konfigurasi untuk konfigurasi klien ..... 35
Buat klien layanan yang dikonfigurasi menggunakan pengaturan eksternal ..... 36
Variabel lingkungan SDK for Java 2.x dan properti sistem JVM ..... 37
Konfigurasi klien dalam kode ..... 38
Konfigurasi dasar dalam kode ..... 38
Konfigurasi lanjutan dalam kode ..... 38
Opsi konfigurasi tidak tersedia dalam kode ..... 40
Singleton melayani klien ..... 42
Manfaat klien layanan tunggal ..... 42
Membuat dan menggunakan klien layanan tunggal ..... 42

Pertimbangan penting ..... 43
Wilayah AWS ..... 43
Konfigurasikan secara eksplisit Wilayah AWS ..... 43
Tentukan Wilayah dari lingkungan ..... 44
Periksa ketersediaan layanan ..... 46
Pilih titik akhir tertentu ..... 46
Penyedia kredensi ..... 47
Pekerjaan pengembangan interaktif ..... 48
Rantai penyedia kredensi default ..... 51
Caching kredensial ..... 56
Tentukan penyedia kredensional tertentu ..... 59
Gunakan profil konfigurasi bersama ..... 60
Gunakan proses eksternal ..... 63
Menyediakan kredensi dalam kode ..... 68
Baca kredensional peran IAM di Amazon EC2 ..... 72
Percobaan ulang ..... 74
Coba lagi strategi ..... 74
Tentukan strategi ..... 78
Sesuaikan strategi ..... 80
Migrasi dari ke `RetryPolicy` `RetryStrategy` ..... 82
Timeout ..... 82
Batas waktu klien layanan ..... 83
Batas waktu klien HTTP ..... 85
Interaksi dan hierarki batas waktu ..... 86
Gunakan default konfigurasi cerdas ..... 87
Ringkasan ..... 88
Observabilitas ..... 88
Metrik-metrik ..... 89
Pemantauan ..... 120
Pencatatan log ..... 120
Titik akhir ..... 132
Opsi konfigurasi titik akhir ..... 132
Konfigurasi titik akhir dalam kode ..... 132
Konfigurasi titik akhir tingkat permintaan ..... 133
Konfigurasi titik akhir eksternal ..... 134
Konfigurasi diutamakan ..... 135

Konfigurasi titik akhir khusus layanan ..... 136
Praktik terbaik ..... 137
Konfigurasikan klien HTTP ..... 138
Klien yang tersedia ..... 138
Rekomendasi klien ..... 139
Default cerdas ..... 144
Konfigurasikan klien HTTP berbasis Apache ..... 145
Konfigurasikan klien HTTP URLConnection berbasis ..... 151
Konfigurasikan klien HTTP berbasis Netty ..... 157
Konfigurasikan AWS klien HTTP berbasis CRT ..... 164
Konfigurasikan proxy HTTP ..... 177
Konfigurasikan klien HTTP berbasis Apache 5.x ..... 183
Pencegat ..... 186
Siklus hidup ..... 186
Daftarkan pencegat ..... 186
Contoh ..... 187
Praktik terbaik ..... 194
Objek konteks ..... 195
Menggunakan SDK ..... 196
Membuat Layanan AWS permintaan ..... 199
Menggunakan klien layanan untuk membuat permintaan ..... 199
Membuat permintaan ..... 201
Menangani tanggapan ..... 203
Pemrograman asinkron ..... 204
Gunakan klien asinkron APIs ..... 204
Menangani streaming dalam metode asinkron ..... 208
Konfigurasikan opsi asinkron lanjutan ..... 211
Praktik terbaik ..... 213
Mencegah permintaan gantung ..... 213
Gunakan kembali klien ..... 214
Sumber daya rilis ..... 214
Mencegah masalah koneksi ..... 214
Pengoptimalan HTTP ..... 215
Optimasi SSL ..... 215
Pantau kinerja ..... 215
Menangani kesalahan ..... 216

Mengapa pengecualian yang tidak dicentang? ..... 216
AwsServiceException (dan subclass) ..... 216
SdkClientException ..... 217
Pengecualian dan perilaku coba lagi ..... 217
Paginasi ..... 218
pagination sinkron ..... 218
pagination asinkron ..... 221
Pelayan ..... 226
Prasyarat ..... 227
Menggunakan pelayan ..... 227
Konfigurasikan pelayan ..... 228
Contoh kode ..... 229
Pemecahan masalah ..... 229
Reset koneksi ..... 230
Batas waktu koneksi ..... 230
Baca waktunya habis ..... 231
Batas waktu kolam koneksi ..... 231
Kesalahan Classpath ..... 235
Kesalahan tanda tangan ..... 236
Kolam koneksi dimatikan ..... 237
Kesalahan rantai penyedia kredensyal ..... 239
Kurangi waktu startup SDK untuk AWS Lambda ..... 242
Gunakan klien HTTP AWS berbasis CRT ..... 242
Hapus dependensi klien HTTP yang tidak digunakan ..... 242
Konfigurasikan klien layanan untuk memintas pencarian ..... 244
Inisialisasi klien SDK di luar penangan fungsi Lambda ..... 245
Minimalkan injeksi ketergantungan ..... 245
Gunakan penargetan Maven Archetype AWS Lambda ..... 246
Lambda SnapStart ..... 246
Perubahan versi 2.x yang memengaruhi waktu startup ..... 246
Sumber daya tambahan ..... 246
Melaksanakan `ContentStreamProvider` ..... 247
Gunakan `mark()` dan `reset()` ..... 247
Gunakan buffering jika `mark()` dan tidak `reset()` tersedia ..... 248
Buat aliran baru ..... 248
Mengatur JVM TTL untuk pencarian nama DNS ..... 249

Cara mengatur JVM TTL ..... 249
Bekerja dengan HTTP/2 ..... 250
Memanggil Layanan AWS ..... 251
CloudWatch ..... 251
Dapatkan metrik dari CloudWatch ..... 252
Publikasikan data metrik kustom ke CloudWatch ..... 254
Bekerja dengan CloudWatch alarm ..... 256
Gunakan CloudWatch Acara Amazon ..... 260
AWS layanan basis data ..... 264
Amazon DynamoDB ..... 264
Amazon RDS ..... 265
Amazon Redshift ..... 265
Amazon Aurora Tanpa Server v1 ..... 265
Amazon DocumentDB ..... 266
DynamoDB ..... 266
Pilih klien DynamoDB Anda ..... 266
Konfigurasikan klien DynamoDB ..... 267
Apa yang dibahas dalam topik ini ..... 268
Bekerja dengan tabel di DynamoDB ..... 268
Bekerja dengan item di DynamoDB ..... 278
Peta objek ke item DynamoDB ..... 285
Amazon EC2 ..... 422
Kelola Amazon EC2 instance ..... 422
Zona Penggunaan Wilayah AWS dan Ketersediaan ..... 429
Bekerja dengan kelompok keamanan di Amazon EC2 ..... 436
Bekerja dengan metadata instans Amazon EC2 ..... 441
IAM ..... 447
Kelola kunci IAM akses ..... 448
Kelola IAM Pengguna ..... 454
Buat kebijakan IAM ..... 458
Bekerja dengan IAM kebijakan ..... 466
Bekerja dengan sertifikat IAM server ..... 473
Kinesis ..... 477
Berlangganan Amazon Kinesis Data Streams ..... 478
Lambda ..... 489
Memanggil fungsi Lambda ..... 489

Daftar fungsi Lambda ..... 490
Hapus fungsi Lambda ..... 491
Amazon S3 ..... 492
Klien S3 di SDK ..... 492
Mengunggah stream ke S3 ..... 496
Pra-ditandatangani URLs ..... 503
Akses Lintas Wilayah ..... 511
Perlindungan integritas data dengan checksum ..... 513
Gunakan klien S3 yang berkinerja ..... 521
Konfigurasikan dukungan transfer paralel ..... 526
Transfer file dan direktori ..... 528
Notifikasi Peristiwa S3 ..... 538
Amazon SNS ..... 548
Buat topik ..... 548
Buat daftar Amazon SNS topik Anda ..... 549
Berlangganan titik akhir ke suatu topik ..... 550
Publikasikan pesan ke suatu topik ..... 551
Berhenti berlangganan titik akhir dari suatu topik ..... 552
Hapus topik ..... 553
Amazon SQS ..... 554
Gunakan batching permintaan otomatis ..... 554
Operasi antrian ..... 560
Operasi pesan ..... 563
Amazon Transcribe ..... 567
Siapkan mikrofon ..... 567
Buat penerbit ..... 568
Buat klien dan mulai streaming ..... 570
Informasi selengkapnya ..... 566
Contoh kode ..... 573
ACM ..... 576
Tindakan ..... 576
API Gateway ..... 594
Tindakan ..... 576
Skenario ..... 598
AWS kontribusi komunitas ..... 599
Penskalaan Otomatis Aplikasi ..... 600

Tindakan ..... 576
Pengontrol Pemulihan Aplikasi ..... 608
Tindakan ..... 576
Aurora ..... 611
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Auto Scaling ..... 647
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
AWS Batch ..... 711
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Amazon Bedrock ..... 760
Tindakan ..... 576
Waktu Jalan Amazon Bedrock ..... 765
Skenario ..... 598
Amazon Nova ..... 783
Kanvas Amazon Nova ..... 803
Generator Gambar Amazon Titan ..... 806
Embeddings Teks Amazon Titan ..... 809
Antropik Claude ..... 812
Perintah Cohere ..... 831
Meta Llama ..... 842
Mistral AI ..... 853
Difusi Stabil ..... 864
CloudFront ..... 867
Tindakan ..... 576
Skenario ..... 598
CloudWatch ..... 897
Memulai ..... 612
Hal-hal mendasar ..... 613

Tindakan ..... 576
Skenario ..... 598
CloudWatch Acara ..... 972
Tindakan ..... 576
CloudWatch Log ..... 978
Tindakan ..... 576
Skenario ..... 598
Identitas Amazon Cognito ..... 997
Tindakan ..... 576
Penyedia Identitas Amazon Cognito ..... 1004
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598
Amazon Comprehend ..... 1031
Tindakan ..... 576
Skenario ..... 598
AWS Control Tower ..... 1044
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Firehouse ..... 1104
Tindakan ..... 576
Skenario ..... 598
Amazon DocumentDB ..... 1114
Contoh nirserver ..... 1114
DynamoDB ..... 1116
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Contoh nirserver ..... 1114
AWS kontribusi komunitas ..... 599
Amazon EC2 ..... 1376
Ayo Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576

Skenario ..... 598
Amazon ECR ..... 1473
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Amazon ECS ..... 1513
Tindakan ..... 576
Elastic Load Balancing - Versi 2 ..... 1527
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598
MediaStore ..... 1571
Tindakan ..... 576
Resolusi Entitas AWS ..... 1586
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
OpenSearch Layanan ..... 1634
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
EventBridge ..... 1664
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
EventBridge Penjadwal ..... 1699
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598
Forecast ..... 1723
Tindakan ..... 576
Amazon Glacier ..... 1736
Tindakan ..... 576
AWS Glue ..... 1752
Memulai ..... 612

Hal-hal mendasar ..... 613
Tindakan ..... 576
HealthImaging ..... 1784
Tindakan ..... 576
Skenario ..... 598
IAM ..... 1815
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Amazon Inspector ..... 1899
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
AWS IoT ..... 1947
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
AWS IoT data ..... 1985
Tindakan ..... 576
AWS IoT FleetWise ..... 1989
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
AWS IoT SiteWise ..... 2042
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Amazon Keyspaces ..... 2080
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Kinesis ..... 2106
Tindakan ..... 576
Contoh nirserver ..... 1114
AWS KMS ..... 2119

Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Lambda ..... 2176
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Contoh nirserver ..... 1114
AWS kontribusi komunitas ..... 599
Amazon Lex ..... 2213
Skenario ..... 598
Amazon Location Service ..... 2214
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Lokasi Service Places ..... 2260
Tindakan ..... 576
AWS Marketplace API Katalog ..... 2266
Produk AMI ..... 2266
Penawaran mitra saluran ..... 2291
Produk kontainer ..... 2308
Entitas ..... 2315
Penawaran ..... 2320
Produk ..... 2381
Otorisasi penjualan kembali ..... 2386
Produk SaaS ..... 2428
Utilitas ..... 2454
AWS Marketplace API Perjanjian ..... 2458
Perjanjian ..... 2458
MediaConvert ..... 2511
Tindakan ..... 576
Migration Hub ..... 2533
Tindakan ..... 576
Amazon MSK ..... 2545
Contoh nirserver ..... 1114

Neptune ..... 2547
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Pusat Partner ..... 2589
Tindakan ..... 576
Skenario ..... 598
Amazon Personalize ..... 2624
Tindakan ..... 576
Kejadian Amazon Personalize ..... 2654
Tindakan ..... 576
Waktu Aktif Amazon Personalize ..... 2657
Tindakan ..... 576
Amazon Pinpoint ..... 2662
Tindakan ..... 576
API SMS dan Suara Amazon Pinpoint ..... 2706
Tindakan ..... 576
Amazon Polly ..... 2709
Tindakan ..... 576
Skenario ..... 598
Amazon RDS ..... 2716
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Contoh nirserver ..... 1114
Layanan Data Amazon RDS ..... 2759
Skenario ..... 598
Amazon Redshift ..... 2760
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Amazon Rekognition ..... 2798
Tindakan ..... 576

Skenario ..... 598
Registrasi domain Route 53 ..... 2870
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Amazon S3 ..... 2893
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
Contoh nirserver ..... 1114
Kontrol Amazon S3 ..... 3080
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Ember Direktori S3 ..... 3123
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
SageMaker AI ..... 3205
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598
Secrets Manager ..... 3234
Tindakan ..... 576
Amazon SES ..... 3236
Tindakan ..... 576
Skenario ..... 598
Amazon SES API v2 ..... 3253
Tindakan ..... 576
Skenario ..... 598
Amazon SNS ..... 3273
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598

Contoh nirserver ..... 1114
Amazon SQS ..... 3342
Memulai ..... 612
Tindakan ..... 576
Skenario ..... 598
Contoh nirserver ..... 1114
Step Functions ..... 3441
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Skenario ..... 598
AWS STS ..... 3465
Tindakan ..... 576
Dukungan ..... 3468
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Systems Manager ..... 3492
Memulai ..... 612
Hal-hal mendasar ..... 613
Tindakan ..... 576
Amazon Textract ..... 3534
Tindakan ..... 576
Skenario ..... 598
Amazon Transcribe ..... 3546
Tindakan ..... 576
Skenario ..... 598
Streaming Amazon Transcribe ..... 3557
Tindakan ..... 576
Skenario ..... 598
Amazon Translate ..... 3576
Skenario ..... 598
Migrasi ke versi 2 ..... 3579
Apa yang baru di versi 2 ..... 3579
Cara bermigrasi ..... 3580
Alat migrasi ..... 3580

Step-by-step instruksi ..... 3591
Apa yang berbeda antara 1.x dan 2.x ..... 3609
Perubahan nama Package ..... 3609
Menambahkan versi 2.x ke proyek Anda ..... 3610
Tidak berubah POJOs ..... 3610
Metode setter dan getter ..... 3611
Nama kelas model ..... 3612
Perpustakaan dan utilitas ..... 3612
Perubahan klien ..... 3614
Perubahan penyedia kredensial ..... 3660
Perubahan wilayah ..... 3668
Operasi, permintaan, dan tanggapan berubah ..... 3670
Perubahan pengecualian ..... 3680
Perubahan khusus layanan ..... 3681
Bekerja dengan Amazon S3 ..... 3687
Perubahan file profil ..... 3736
Konfigurasi eksternal ..... 3737
Pelayan ..... 3740
Utilitas metadata EC2 ..... 3744
CloudFront prepenandatanganan ..... 3752
API Pembuat Kebijakan IAM ..... 3756
Bekerja dengan DynamoDB ..... 3762
SQS permintaan batching otomatis ..... 3802
Gunakan SDK for Java 1.x dan 2.x side-by-side ..... 3810
Temukan aplikasi menggunakan klien 1.x ..... 3811
Gunakan CloudTrail Lake untuk menemukan aplikasi dengan klien 1.x ..... 3811
Keamanan ..... 3814
Perlindungan data ..... 3814
Keamanan Lapisan Pengangkutan (TLS) ..... 3816
Periksa versi TLS ..... 3816
Menegakkan versi TLS ..... 3817
Migrasi ke TLS 1.2 ..... 3817
Identity and Access Management ..... 3817
Audiens ..... 3818
Mengautentikasi dengan identitas ..... 3818
Mengelola akses menggunakan kebijakan ..... 3820

Bagaimana Layanan AWS bekerja dengan IAM ..... 3822
Memecahkan masalah AWS identitas dan akses ..... 3822
Validasi Kepatuhan ..... 3824
Ketahanan ..... 3824
Keamanan Infrastruktur ..... 3825
Kunci OpenPGP ..... 3826
Kunci saat ini ..... 3826
Kunci sebelumnya ..... 3832
Riwayat dokumen ..... 3839
..... mmmdccclii

# Apa itu AWS SDK for Java 2.x

AWS SDK untuk Java Ini menyediakan Java API untuk Layanan AWS. Menggunakan SDK, Anda dapat membangun aplikasi Java yang bekerja dengan Amazon S3,, Amazon EC2 DynamoDB, dan banyak lagi.

AWS SDK for Java 2.x Ini adalah penulisan ulang utama dari basis kode versi 1.x. Ini dibangun di atas Java 8+ dan menambahkan beberapa fitur yang sering diminta. Ini termasuk dukungan untuk I/O non-pemblokiran dan kemampuan untuk mencolokkan implementasi HTTP yang berbeda saat runtime.

Kami secara teratur menambahkan dukungan untuk layanan baru ke AWS SDK untuk Java. Untuk daftar perubahan dan fitur dalam versi tertentu, lihat log perubahan.

## Memulai dengan SDK

Jika Anda siap untuk langsung menggunakan SDK, ikuti tutorialnya. Memulai

Untuk mengatur lingkungan pengembangan Anda, lihatthe section called “Pengaturan”.

Jika saat ini Anda menggunakan versi 1.x SDK untuk Java, lihat Memigrasi ke versi 2 untuk panduan khusus.

Untuk informasi tentang membuat permintaan ke Amazon S3, DynamoDB, Amazon EC2 dan lainnya Layanan AWS, lihat Menggunakan SDK untuk Java dan Bekerja dengan Layanan AWS.

## Kembangkan aplikasi seluler

Jika Anda seorang pengembang aplikasi seluler, Amazon Web Services sediakan AWS Amplifykerangka kerja.

## Pemeliharaan dan dukungan untuk versi utama SDK

Untuk informasi tentang pemeliharaan dan dukungan untuk versi utama SDK dan dependensi yang mendasarinya, lihat topik berikut di Panduan Referensi Alat AWS SDKs dan Alat:

- AWS SDKs dan Kebijakan Pemeliharaan Alat

- AWS SDKs dan Tools Version Support Matrix

## Sumber daya tambahan

Selain panduan ini, berikut ini adalah sumber daya online yang berharga bagi AWS SDK untuk Java pengembang:

- AWS SDK untuk Java 2.x API Referensi
- Blog pengembang Java
- Topik pengembangan Java di AWS re:Post
- Sumber SDK pada GitHub
- AWS Pustaka Contoh Kode SDK
- @awsforjava (Twitter)

## Berkontribusi pada SDK

Pengembang juga dapat menyumbangkan umpan balik melalui saluran berikut:

- Kirim masalah SDK pada GitHub
- Bergabunglah dengan obrolan informal tentang SDK di saluran AWS SDK untuk Java gitter 2.x

# Memulai dengan AWS SDK untuk Java 2.x

Bagian dalam topik ini memandu Anda melalui langkah-langkah penting untuk mulai membangun aplikasi Java yang terhubung ke Layanan AWS. Bagian tersebut mencakup pengaturan lingkungan pengembangan Anda dengan Java dan membangun alat seperti Maven atau Gradle, mengonfigurasi otentikasi aman ke AWS, dan membuat aplikasi kerja pertama Anda melalui tutorial langsung. Topik ramah pemula ini berfungsi sebagai titik masuk Anda untuk AWS pengembangan dengan Java, memberikan fondasi yang Anda perlukan sebelum menjelajahi fitur-fitur yang lebih canggih.

Daftar Isi


- Menyiapkan AWS SDK untuk Java 2.x
  - Gambaran umum pengaturan
  - Instal Java dan alat build untuk bekerja dengan AWS SDK for Java 2.x
  - Siapkan proyek Apache Maven yang menggunakan AWS SDK for Java 2.x
    - Prasyarat
    - Buat proyek Maven
    - Konfigurasikan compiler Java untuk Maven
    - Mendeklarasikan SDK sebagai dependensi
    - Tetapkan dependensi untuk modul SDK
      - Membangun seluruh SDK ke dalam proyek Anda
    - Bangun proyek Anda
  - Siapkan proyek Gradle yang menggunakan AWS SDK for Java 2.x
  - Siapkan proyek Gambar Asli GraalVM yang menggunakan AWS SDK for Java 2.x
    - Prasyarat
    - Buat proyek menggunakan pola dasar
    - Membangun gambar asli
- Mengautentikasi dengan AWS menggunakan AWS SDK for Java 2.x
  - Siapkan untuk otentikasi
    - 1. Pengembangan lokal menggunakan kredensil jangka pendek
    - 2. Pengaturan untuk akses masuk tunggal untuk SDK
    - 3. Masuk menggunakan AWS CLI
  - Opsi otentikasi tambahan

- Membuat aplikasi sederhana menggunakan AWS SDK for Java 2.x
  - Langkah 1: Siapkan untuk tutorial ini
  - Langkah 2: Buat proyek
  - Langkah 3: Tulis kodenya
  - Langkah 4: Bangun dan jalankan aplikasi
    - Berhasil
    - Pembersihan
  - Langkah selanjutnya


# Menyiapkan AWS SDK untuk Java 2.x

Bagian ini memberikan informasi tentang cara mengatur lingkungan pengembangan dan proyek Anda untuk menggunakan AWS SDK for Java 2.x.

## Gambaran umum pengaturan

Untuk berhasil mengembangkan aplikasi yang mengakses Layanan AWS menggunakan AWS SDK untuk Java, kondisi berikut diperlukan:

- Java SDK harus memiliki akses ke kredensional untuk mengautentikasi permintaan atas nama Anda.
- Izin peran IAM yang dikonfigurasi untuk SDK harus mengizinkan akses ke Layanan AWS yang dibutuhkan aplikasi Anda. Izin yang terkait dengan kebijakan PowerUserAccess AWS terkelola cukup untuk sebagian besar kebutuhan pengembangan.
- Lingkungan pengembangan dengan elemen-elemen berikut:
  - File konfigurasi bersama yang diatur setidaknya dalam salah satu cara berikut:
    - `config`File ini berisi pengaturan masuk tunggal Pusat Identitas IAM sehingga SDK bisa mendapatkan kredensi. AWS
    - `credentials`File tersebut berisi kredensial sementara.
  - Instalasi Java 8 atau yang lebih baru.
  - Alat otomatisasi build seperti Maven atau Gradle.
  - Editor teks untuk bekerja dengan kode.
  - (Opsional, tetapi disarankan) IDE (lingkungan pengembangan terintegrasi) seperti IntelliJ IDEA, Eclipse, atau. NetBeans

Jika Anda menggunakan IntelliJ IDEA, Anda juga dapat menambahkan IDEA untuk AWS Toolkit for IntelliJLayanan AWS diintegrasikan langsung ke IDE untuk membantu Anda merampingkan pengembangan.

- Sesi portal AWS akses aktif saat Anda siap menjalankan aplikasi Anda. Anda menggunakan AWS Command Line Interface untuk memulai proses masuk ke portal akses IAM Identity Center. AWS

> **Important**
>
> Petunjuk di bagian penyiapan ini mengasumsikan bahwa Anda atau organisasi menggunakan IAM Identity Center. Jika organisasi Anda menggunakan penyedia identitas eksternal yang bekerja secara independen dari IAM Identity Center, cari tahu bagaimana Anda bisa mendapatkan kredensi sementara untuk SDK for Java untuk digunakan. Ikuti petunjuk ini untuk menambahkan kredensi sementara ke file. `~/.aws/credentials`
> Jika penyedia identitas Anda menambahkan kredensi sementara secara otomatis ke `~/.aws/credentials` file, pastikan bahwa nama profil tersebut `[default]` sehingga Anda tidak perlu memberikan nama profil ke SDK atau. AWS CLI

## Instal Java dan alat build untuk bekerja dengan AWS SDK for Java 2.x

Anda memerlukan persyaratan lingkungan pengembangan Java berikut untuk bekerja dengan SDK for Java 2.x:

- Java 8 atau yang lebih baru. Ini AWS SDK untuk Java bekerja dengan Oracle Java SE Development Kit dan dengan distribusi Open Java Development Kit (OpenJDK) seperti, Red Hat OpenJDK, Amazon Correttodan Adoptium.
- Alat build yang kompatibel dengan Maven seperti Apache Maven, Apache Ant dengan Ivy, Gradle, atau IntelliJ.
  - Untuk informasi tentang cara menginstal dan menggunakan Maven, lihat https://maven.apache.org/.
  - Untuk informasi tentang cara menginstal dan menggunakan Apache Ivy, lihat https://ant.apache.org/ivy/.
  - Untuk informasi tentang cara menginstal dan menggunakan Gradle, lihat https://gradle.org/.

- Untuk informasi tentang cara menginstal dan menggunakan IntelliJ IDEA, lihat. https://www.jetbrains.com/idea/

## Siapkan proyek Apache Maven yang menggunakan AWS SDK for Java 2.x

Anda dapat menggunakan Apache Maven untuk menyiapkan dan membangun AWS SDK for Java 2.x proyek, atau untuk membangun SDK itu sendiri.

### Prasyarat

Untuk menggunakan SDK for Java 2.x dengan Maven, Anda memerlukan yang berikut ini:

- Java 8.0 atau yang lebih baru. Anda dapat mengunduh perangkat lunak Java SE Development Kit terbaru dari http://www.oracle. com/technetwork/java/javase/downloads/. SDK for Java 2.x juga bekerja dengan OpenJDK Amazon Corretto dan, distribusi Open Java Development Kit (OpenJDK). Unduh versi OpenJDK terbaru dari. https://openjdk.java.net/install/index.html Unduh versi Amazon Corretto 8 atau Amazon Corretto 11 terbaru dari Corretto halaman.
- Apache Maven. Jika Anda perlu menginstal Maven, buka http://maven.apache.org/ untuk mengunduh dan menginstalnya.

### Buat proyek Maven

Untuk membuat proyek Maven dari baris perintah, jalankan perintah berikut dari terminal atau jendela prompt perintah.

```
mvn -B archetype:generate \
 -DarchetypeGroupId=software.amazon.awssdk \
 -DarchetypeArtifactId=archetype-lambda -Dservice=s3 -Dregion=US_WEST_2 \
 -DarchetypeVersion=2.X.X \
 -DgroupId=com.example.myapp \
 -DartifactId=myapp
```

> **Note**
>
> Ganti com.example.myapp dengan namespace paket lengkap aplikasi Anda. Juga ganti myapp dengan nama proyek Anda. Ini menjadi nama direktori untuk proyek Anda.

Untuk menggunakan arketipe versi terbaru, ganti *2.X.X* dengan yang terbaru dari Maven central.

Perintah ini membuat proyek Maven menggunakan toolkit templating arketipe. Pola dasar menghasilkan perancah untuk proyek penangan fungsi. AWS Lambda Arketipe proyek ini telah dikonfigurasi sebelumnya untuk dikompilasi dengan Java SE 8 dan menyertakan ketergantungan ke versi SDK for Java 2.x yang ditentukan dengan. `-DarchetypeVersion`

Untuk informasi selengkapnya tentang membuat dan mengonfigurasi proyek Maven, lihat Panduan Memulai Maven.

## Konfigurasikan compiler Java untuk Maven

Jika Anda membuat proyek menggunakan pola dasar AWS Lambda proyek seperti yang dijelaskan sebelumnya, konfigurasi kompiler Java sudah dilakukan untuk Anda.

Untuk memverifikasi bahwa konfigurasi ini ada, mulailah dengan membuka `pom.xml` file dari folder proyek yang Anda buat (misalnya,`myapp`) ketika Anda menjalankan perintah sebelumnya. Lihat pada baris 11 dan 12 untuk melihat pengaturan versi kompiler Java untuk proyek Maven ini, dan penyertaan yang diperlukan dari plugin kompiler Maven pada baris 71-75.

```
<project>
  <properties>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
  </properties>
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <version>${maven.compiler.plugin.version}</version>
      </plugin>
    </plugins>
  </build>
</project>
```

Jika Anda membuat proyek dengan pola dasar yang berbeda atau dengan menggunakan metode lain, Anda harus memastikan bahwa plugin kompiler Maven adalah bagian dari build dan properti sumber dan targetnya disetel ke 1.8 dalam file. `pom.xml`

Lihat cuplikan sebelumnya untuk satu cara mengonfigurasi pengaturan yang diperlukan ini.

Atau, Anda dapat mengkonfigurasi konfigurasi kompiler sebaris dengan deklarasi plugin, sebagai berikut.

```
<project>
  <build>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <configuration>
          <source>1.8</source>
          <target>1.8</target>
        </configuration>
      </plugin>
    </plugins>
  </build>
</project>
```

## Mendeklarasikan SDK sebagai dependensi

Untuk menggunakan AWS SDK untuk Java dalam proyek Anda, Anda perlu mendeklarasikannya sebagai dependensi dalam file proyek Anda. `pom.xml`

Jika Anda membuat proyek menggunakan pola dasar proyek seperti yang dijelaskan sebelumnya, versi terbaru SDK sudah dikonfigurasi sebagai dependensi dalam proyek Anda.

Pola dasar menghasilkan ketergantungan artefak BOM (bill of material) untuk id grup. `software.amazon.awssdk` Dengan BOM, Anda tidak perlu menentukan versi maven untuk dependensi artefak individual yang berbagi id grup yang sama.

Jika Anda membuat proyek Maven dengan cara yang berbeda, konfigurasikan versi terbaru SDK untuk proyek Anda dengan memastikan bahwa `pom.xml` file tersebut berisi yang berikut ini.

```
<project>
  <properties>
    <aws.java.sdk.version>2.X.X</aws.java.sdk.version>
  </properties>
  <dependencyManagement>
    <dependencies>
      <dependency>
```

```
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>${aws.java.sdk.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
    </dependencies>
  </dependencyManagement>
</project>
```

> **Note**
>
> Ganti *2.X.X* dalam `pom.xml` file dengan versi terbaru dari file AWS SDK for Java 2.x.

## Tetapkan dependensi untuk modul SDK

Sekarang setelah Anda mengonfigurasi SDK, Anda dapat menambahkan dependensi untuk satu atau beberapa AWS SDK untuk Java modul yang akan digunakan dalam proyek Anda.

Meskipun Anda dapat menentukan nomor versi untuk setiap komponen, Anda tidak perlu melakukannya karena Anda sudah mendeklarasikan versi SDK di `dependencyManagement` bagian menggunakan artefak tagihan bahan. Untuk memuat versi berbeda dari modul yang diberikan, tentukan nomor versi untuk ketergantungannya.

Jika Anda membuat proyek menggunakan pola dasar proyek seperti yang dijelaskan sebelumnya, proyek Anda sudah dikonfigurasi dengan beberapa dependensi. Ini termasuk dependensi untuk penangan AWS Lambda fungsi dan Amazon S3, sebagai berikut.

```
<project>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
```

```
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>url-connection-client</artifactId>
        </dependency>

        <dependency>
            <groupId>com.amazonaws</groupId>
            <artifactId>aws-lambda-java-core</artifactId>
            <version>${aws.lambda.java.version}</version>
        </dependency>
    </dependencies>
</project>
```

**Note**

Pada `pom.xml` contoh di atas, dependensi berasal dari s yang berbeda`groupId`. `s3`Ketergantungan berasal dari`software.amazon.awssdk`, sedangkan `aws-lambda-java-core` dependensi berasal dari. `com.amazonaws` Konfigurasi manajemen ketergantungan BOM memengaruhi artefak untuk`software.amazon.awssdk`, sehingga diperlukan versi untuk artefak. `aws-lambda-java-core`
Untuk pengembangan penangan fungsi Lambda menggunakan SDK for Java 2.x`aws-lambda-java-core`, adalah dependensi yang benar. Namun, jika aplikasi Anda perlu mengelola sumber daya Lambda, menggunakan operasi seperti`listFunctions`,,, dan `deleteFunction` `invokeFunction``createFunction`, aplikasi Anda memerlukan dependensi berikut.

```
<groupId>software.amazon.awssdk</groupId>
<artifactId>lambda</artifactId>
```

**Note**

`s3`Ketergantungan mengecualikan dependensi `netty-nio-client` dan `apache-client` transitif. Sebagai pengganti salah satu klien HTTP tersebut, arketipe mencakup `url-`

`connection-client` ketergantungan, yang membantu mengurangi latensi startup untuk fungsi. AWS Lambda

Tambahkan modul ke proyek Anda untuk Layanan AWS dan fitur yang Anda butuhkan untuk proyek Anda. Modul (dependensi) yang dikelola oleh AWS SDK untuk Java BOM terdaftar di repositori pusat Maven.

> **Note**
>
> Anda dapat melihat `pom.xml` file dari contoh kode untuk menentukan dependensi mana yang Anda butuhkan untuk proyek Anda. Misalnya, jika Anda tertarik dengan dependensi untuk layanan DynamoDB, lihat contoh ini dari Repositori Contoh Kode di.AWS GitHub (Cari `pom.xml` file di bawah /javav2/example_code/dynamodb.)

Membangun seluruh SDK ke dalam proyek Anda

Untuk mengoptimalkan aplikasi Anda, kami sangat menyarankan agar Anda hanya menarik komponen yang Anda butuhkan, bukan seluruh SDK. Namun, untuk membangun keseluruhan AWS SDK untuk Java ke dalam proyek Anda, nyatakan dalam `pom.xml` file Anda, sebagai berikut.

```
<project>
  <dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-sdk-java</artifactId>
      <version>2.X.X</version>
    </dependency>
  </dependencies>
</project>
```

## Bangun proyek Anda

Setelah Anda mengkonfigurasi `pom.xml` file, Anda dapat menggunakan Maven untuk membangun proyek Anda.

Untuk membangun proyek Maven Anda dari baris perintah, buka jendela terminal atau command prompt, arahkan ke direktori proyek Anda (misalnya,`myapp`), masukkan atau tempel perintah berikut, lalu tekan Enter atau Return.

```
mvn package
```

Ini menciptakan satu `.jar` file (JAR) di `target` direktori (misalnya,`myapp/target`). JAR ini berisi semua modul SDK yang Anda tentukan sebagai dependensi dalam file Anda. `pom.xml`

## Siapkan proyek Gradle yang menggunakan AWS SDK for Java 2.x

Anda dapat menggunakan Gradle untuk menyiapkan dan membangun AWS SDK for Java 2.x proyek.

Langkah awal dalam contoh berikut berasal dari panduan Memulai Gradle untuk versi 8.4. Jika Anda menggunakan versi yang berbeda, hasil Anda mungkin sedikit berbeda.

Untuk membuat aplikasi Java dengan Gradle (baris perintah)

1. Buat direktori untuk menampung proyek Anda. Dalam contoh ini, `demo` adalah nama direktori.
2. Di dalam `demo` direktori, jalankan `gradle init` perintah dan berikan nilai yang disorot dengan warna merah seperti yang ditunjukkan pada output baris perintah berikut. Untuk berjalan-jalan, kami memilih Kotlin sebagai bahasa DSL skrip build, tetapi contoh lengkap untuk Groovy juga ditampilkan di akhir topik ini.

   ```
   > gradle init
   Starting a Gradle Daemon (subsequent builds will be faster)

   Select type of project to generate:
   1: basic
   2: application
   3: library
   4: Gradle plugin
   Enter selection (default: basic) [1..4] 2

   Select implementation language:
   1: C++
   2: Groovy
   3: Java
   4: Kotlin
   5: Scala
   6: Swift
   Enter selection (default: Java) [1..6] 3

   Generate multiple subprojects for application? (default: no) [yes, no] no
   ```

```
Select build script DSL:
1: Kotlin
2: Groovy
Enter selection (default: Kotlin) [1..2] <Enter>

Select test framework:
1: JUnit 4
2: TestNG
3: Spock
4: JUnit Jupiter
Enter selection (default: JUnit Jupiter) [1..4] 4

Project name (default: demo): <Enter>
Source package (default: demo): <Enter>
Enter target version of Java (min. 7) (default: 11): <Enter>
Generate build using new APIs and behavior (some features may change in the next
 minor release)? (default: no) [yes, no] <Enter>

> Task :init
To learn more about Gradle by exploring our Samples at https://docs.gradle.org/8.4/
samples/sample_building_java_applications.html

BUILD SUCCESSFUL in 3m 43s
2 actionable tasks: 2 executed
```

3. Setelah `init` tugas selesai, `demo` direktori berisi struktur pohon berikut. Kami melihat lebih dekat pada file build utama, `build.gradle.kts` (disorot dengan warna merah), di bagian selanjutnya.

```
### app
#   ### build.gradle.kts
#   ### src
#       ### main
#       #   ### java
#       #   #   ### demo
#       #   #       ### App.java
#       #   ### resources
#       ### test
#           ### java
#           #   ### demo
#           #       ### AppTest.java
#           ### resources
### gradle
```

```
#   ### wrapper
#       ### gradle-wrapper.jar
#       ### gradle-wrapper.properties
### gradlew
### gradlew.bat
### settings.gradle.kts
```

`build.gradle.kts`File berisi konten perancah berikut.

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application
 in Java.
    application
}

repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}

dependencies {
    // Use JUnit Jupiter for testing.
    testImplementation("org.junit.jupiter:junit-jupiter:5.9.3")

    testRuntimeOnly("org.junit.platform:junit-platform-launcher")

    // This dependency is used by the application.
    implementation("com.google.guava:guava:33.3.0-jre")
}

// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
```

```
        languageVersion.set(JavaLanguageVersion.of(11))
    }
}

application {
    // Define the main class for the application.
    mainClass.set("demo.App")
}

tasks.named<Test>("test") {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

4. Gunakan file build Gradle scaffolded sebagai dasar untuk proyek Anda. AWS

   a. Untuk mengelola dependensi SDK untuk project Gradle Anda, tambahkan Maven bill of materials (BOM) AWS SDK for Java 2.x untuk bagian file. `dependencies` `build.gradle.kts`

   ```
   ...
   dependencies {
       implementation(platform("software.amazon.awssdk:bom:2.27.21"))
       // With the bom declared, you specify individual SDK dependencies without a
    version.
    ...
   }
   ...
   ```

   > **Note**
   >
   > Dalam contoh file build ini, ganti 2.27.21 dengan versi terbaru SDK for Java 2.x. Temukan versi terbaru yang tersedia di repositori pusat Maven.

   b. Tentukan modul SDK yang dibutuhkan aplikasi Anda di `dependencies` bagian ini. Sebagai contoh, berikut ini menambahkan ketergantungan pada Amazon Simple Storage Service.

   ```
   ...
   dependencies {
       implementation(platform("software.amazon.awssdk:bom:2.27.21"))
       implementation("software.amazon.awssdk:s3")
   ```

```
 ...
}
...
```

Gradle secara otomatis menyelesaikan versi dependensi yang dideklarasikan dengan menggunakan informasi dari BOM.

Contoh berikut menunjukkan file build Gradle lengkap di Kotlin dan Groovy. DSLs File build berisi dependensi untuk Amazon S3, otentikasi, logging, dan pengujian. Versi sumber dan target Java adalah versi 11.

Kotlin DSL (build.gradle.kts)

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application in
 Java.
    application
}

repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}

dependencies {
    implementation(platform("software.amazon.awssdk:bom:2.20.56"))
    implementation("software.amazon.awssdk:s3")
    implementation("software.amazon.awssdk:sso")
    implementation("software.amazon.awssdk:ssooidc")
    implementation(platform("org.apache.logging.log4j:log4j-bom:2.20.0"))
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl")
    implementation("org.apache.logging.log4j:log4j-1.2-api")
```

```
    testImplementation(platform("org.junit:junit-bom:5.10.0"))
    testImplementation("org.junit.jupiter:junit-jupiter")
}

// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
        languageVersion.set(JavaLanguageVersion.of(11))
    }
}

application {
    // Define the main class for the application.
    mainClass.set("demo.App")
}

tasks.named<Test>("test") {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

### Groovy DSL (build.gradle)

```
/*
 * This file was generated by the Gradle 'init' task.
 *
 * This generated file contains a sample Java application project to get you
 started.
 * For more details on building Java & JVM projects, please refer to https://
docs.gradle.org/8.4/userguide/building_java_projects.html in the Gradle
 documentation.
 */

plugins {
    // Apply the application plugin to add support for building a CLI application in
 Java.
    id 'application'
}

repositories {
    // Use Maven Central for resolving dependencies.
    mavenCentral()
}
```

```
dependencies {
    implementation platform('software.amazon.awssdk:bom:2.27.21')
    implementation 'software.amazon.awssdk:s3'
    implementation 'software.amazon.awssdk:sso'
    implementation 'software.amazon.awssdk:ssooidc'
    implementation platform('org.apache.logging.log4j:log4j-bom:2.20.0')
    implementation 'org.apache.logging.log4j:log4j-slf4j2-impl'
    implementation 'org.apache.logging.log4j:log4j-1.2-api'
    testImplementation platform('org.junit:junit-bom:5.10.0')
    testImplementation 'org.junit.jupiter:junit-jupiter'
}

// Apply a specific Java toolchain to ease working on different environments.
java {
    toolchain {
        languageVersion = JavaLanguageVersion.of(11)
    }
}

application {
    // Define the main class for the application.
    mainClass = 'demo_groovy.App'
}

tasks.named('test') {
    // Use JUnit Platform for unit tests.
    useJUnitPlatform()
}
```

Untuk langkah selanjutnya, lihat panduan Memulai di situs web Gradle untuk petunjuk tentang cara membuat dan menjalankan aplikasi Gradle.

## Siapkan proyek Gambar Asli GraalVM yang menggunakan AWS SDK for Java 2.x

Dengan versi 2.16.1 dan yang lebih baru, AWS SDK for Java 2.x menyediakan out-of-the-box dukungan untuk aplikasi GraalVM Native Image. Gunakan pola dasar `archetype-app-quickstart` Maven untuk menyiapkan proyek dengan dukungan gambar asli bawaan.

## Prasyarat

- Selesaikan langkah-langkah dalam Menyiapkan AWS SDK untuk Java 2.x.
- Instal Gambar Asli GraalVM.

## Buat proyek menggunakan pola dasar

Untuk membuat proyek Maven dengan dukungan gambar asli bawaan, di jendela terminal atau command prompt, gunakan perintah berikut.

> **Note**
>
> Ganti `com.example.mynativeimageapp` dengan namespace paket lengkap aplikasi Anda. Ganti juga `mynativeimageapp` dengan nama proyek Anda. Ini menjadi nama direktori untuk proyek Anda.

```
mvn archetype:generate \
    -DarchetypeGroupId=software.amazon.awssdk \
    -DarchetypeArtifactId=archetype-app-quickstart \
    -DarchetypeVersion=2.27.21\
    -DnativeImage=true \
    -DhttpClient=apache-client \
    -Dservice=s3 \
    -DgroupId=com.example.mynativeimageapp \
    -DartifactId=mynativeimageapp \
    -DinteractiveMode=false
```

Perintah ini membuat proyek Maven dikonfigurasi dengan dependensi untuk AWS SDK untuk Java, Amazon S3, dan klien HTTP. `ApacheHttpClient` Ini juga mencakup ketergantungan untuk plugin GraalVM Native Image Maven, sehingga Anda dapat membangun gambar asli menggunakan Maven.

Untuk menyertakan dependensi untuk yang berbeda Amazon Web Services, tetapkan nilai `-Dservice` parameter ke ID artefak layanan tersebut. Contohnya termasuk `dynamodb`, `comprehend`, dan `pinpoint`. Untuk daftar lengkap artefak IDs, lihat daftar dependensi terkelola untuk software.amazon.awssdk di Maven Central.

Untuk menggunakan klien HTTP asinkron, atur parameter ke. `-DhttpClient netty-nio-client` Untuk digunakan `UrlConnectionHttpClient` sebagai klien HTTP sinkron, bukan`apache-client`, atur `-DhttpClient` parameter ke`url-connection-client`.

### Membangun gambar asli

Setelah Anda membuat proyek, jalankan perintah berikut dari direktori proyek Anda, misalnya,`mynativeimageapp`:

```
mvn package -P native-image
```

Ini menciptakan aplikasi gambar asli di `target` direktori, misalnya,`target/mynativeimageapp`.

# Mengautentikasi dengan AWS menggunakan AWS SDK for Java 2.x

Anda harus menetapkan bagaimana AWS SDK for Java 2.x otentikasi dengan AWS ketika Anda mengembangkan dengan AWS layanan. SDK mengelola penemuan kredenal, pembuatan tanda tangan, dan penyegaran kredenal sepenuhnya di belakang layar, memungkinkan Anda fokus pada logika aplikasi Anda.

## Siapkan untuk otentikasi

Topik otentikasi dan akses dalam Panduan Referensi AWS SDKs dan Alat menjelaskan pendekatan otentikasi yang berbeda.

Untuk pengembangan lokal, pendekatan yang disarankan adalah menggunakan kredensil jangka pendek dengan masuk ke AWS CLI dengan kredenal login konsol Anda. Disarankan jika Anda menggunakan root, pengguna IAM, atau federasi dengan IAM untuk akses AWS akun. Ikuti petunjuk di Akses kredensional untuk pekerjaan pengembangan interaktif menggunakan AWS SDK for Java 2.x.

Setelah mengikuti petunjuk dalam AWS SDKs dan Panduan Referensi Alat, sistem Anda harus disiapkan agar SDK dapat menandatangani permintaan:

### 1. Pengembangan lokal menggunakan kredensil jangka pendek

Untuk pengembangan lokal, pendekatan yang disarankan adalah menggunakan kredensil jangka pendek dengan masuk ke AWS CLI dengan kredenal login konsol Anda. Disarankan jika Anda menggunakan root, pengguna IAM, atau federasi dengan IAM untuk akses AWS akun.

Untuk petunjuk, lihat Menggunakan penyedia kredensial di. AWS SDK for Java 2.x

### 2. Pengaturan untuk akses masuk tunggal untuk SDK

Setelah Anda menyelesaikan Langkah 2 di bagian akses terprogram sehingga SDK dapat menggunakan autentikasi IAM Identity Center, sistem Anda harus berisi elemen-elemen berikut.

- Itu AWS CLI, yang Anda gunakan untuk memulai sesi portal AWS akses sebelum Anda menjalankan aplikasi Anda.
- `~/.aws/config`File yang berisi profil default. SDK for Java menggunakan konfigurasi penyedia token SSO profil untuk memperoleh kredensil sebelum mengirim permintaan ke. AWS`sso_role_name`Nilai, yang merupakan peran IAM yang terhubung ke set izin Pusat Identitas IAM, harus memungkinkan akses ke yang Layanan AWS digunakan dalam aplikasi Anda.

  `config`File contoh berikut menunjukkan profil default yang diatur dengan konfigurasi penyedia token SSO. `sso_session`Pengaturan profil mengacu pada `sso-session` bagian bernama. `sso-session`Bagian ini berisi pengaturan untuk memulai sesi portal AWS akses.

```
[default]
sso_session = my-sso
sso_account_id = 111122223333
sso_role_name = SampleRole
region = us-east-1
output = json

[sso-session my-sso]
sso_region = us-east-1
sso_start_url = https://provided-domain.awsapps.com/start
sso_registration_scopes = sso:account:access
```

Untuk detail selengkapnya tentang pengaturan yang digunakan dalam konfigurasi penyedia token SSO, lihat konfigurasi penyedia token SSO di Panduan Referensi Alat AWS SDKs dan Alat.

Jika lingkungan pengembangan Anda tidak diatur untuk akses terprogram seperti yang ditunjukkan sebelumnya, ikuti Langkah 2 di Panduan SDKs Referensi.

### 3. Masuk menggunakan AWS CLI

Sebelum menjalankan aplikasi yang mengakses Layanan AWS, Anda memerlukan sesi portal AWS akses aktif agar SDK dapat menggunakan autentikasi IAM Identity Center untuk menyelesaikan kredensil. Jalankan perintah berikut di AWS CLI untuk masuk ke portal AWS akses.

```
aws sso login
```

Karena Anda memiliki pengaturan profil default, Anda tidak perlu memanggil perintah dengan `--profile` opsi. Jika konfigurasi penyedia token SSO Anda menggunakan profil bernama, perintahnya adalah`aws sso login --profile named-profile`.

Untuk menguji apakah Anda sudah memiliki sesi aktif, jalankan AWS CLI perintah berikut.

```
aws sts get-caller-identity
```

Respons terhadap perintah ini harus melaporkan akun IAM Identity Center dan set izin yang dikonfigurasi dalam `config` file bersama.

> **Note**
>
> Jika Anda sudah memiliki sesi portal AWS akses aktif dan menjalankan`aws sso login`, Anda tidak akan diminta untuk memberikan kredensil.
> Namun, Anda akan melihat dialog yang meminta izin `botocore` untuk mengakses informasi Anda. `botocore`adalah fondasi untuk AWS CLI .
> Pilih Izinkan untuk mengotorisasi akses ke informasi Anda untuk AWS CLI dan SDK for Java.

## Opsi otentikasi tambahan

Untuk opsi lainnya tentang otentikasi SDK, seperti penggunaan profil dan variabel lingkungan, lihat bagian konfigurasi di Panduan Referensi Alat AWS SDKs dan Alat.

# Membuat aplikasi sederhana menggunakan AWS SDK for Java 2.x

Tutorial ini menunjukkan cara menggunakan Apache Maven untuk menentukan dependensi untuk SDK for Java 2.x dan kemudian menulis kode yang terhubung ke untuk mengunggah file. Amazon S3

Ikuti langkah-langkah berikut untuk menyelesaikan tutorial ini:

- Langkah 1: Siapkan untuk tutorial ini
- Langkah 2: Buat proyek
- Langkah 3: Tulis kodenya
- Langkah 4: Bangun dan jalankan aplikasi

## Langkah 1: Siapkan untuk tutorial ini

Sebelum Anda memulai tutorial ini, Anda memerlukan yang berikut:

- Izin untuk mengakses Amazon S3
- Lingkungan pengembangan Java yang dikonfigurasi untuk mengakses Layanan AWS menggunakan sistem masuk tunggal ke AWS IAM Identity Center

Gunakan instruksi ??? untuk mengatur tutorial ini. Setelah Anda mengkonfigurasi lingkungan pengembangan Anda dengan akses masuk tunggal untuk Java SDK dan Anda memiliki sesi portal AWS akses aktif, lanjutkan dengan Langkah 2 dari tutorial ini.

## Langkah 2: Buat proyek

Untuk membuat proyek untuk tutorial ini, Anda menjalankan perintah Maven yang meminta Anda untuk masukan tentang cara mengkonfigurasi proyek. Setelah semua input dimasukkan dan dikonfirmasi, Maven selesai membangun proyek dengan membuat `pom.xml` dan membuat file Java rintisan.

1. Buka terminal atau jendela prompt perintah dan arahkan ke direktori pilihan Anda, misalnya, `Home` folder Anda `Desktop` atau.
2. Masukkan perintah berikut di terminal dan tekan`Enter`.

```
mvn archetype:generate \
```

```
  -DarchetypeGroupId=software.amazon.awssdk \
  -DarchetypeArtifactId=archetype-app-quickstart \
  -DarchetypeVersion=2.27.21
```

3. Masukkan nilai yang tercantum di kolom kedua untuk setiap prompt.

| Prompt | Nilai untuk masuk |
|---|---|
| `Define value for property 'service':` | `s3` |
| `Define value for property 'httpClient' :` | `apache-client` |
| `Define value for property 'nativeImage' :` | `false` |
| `Define value for property 'credentialProvider'` | `identity-center` |
| `Define value for property 'groupId':` | `org.example` |
| `Define value for property 'artifactId':` | `getstarted` |
| `Define value for property 'version' 1.0-SNAPSHOT:` | *<Enter>* |
| `Define value for property 'package' org.example:` | *<Enter>* |

4. Setelah nilai terakhir dimasukkan, Maven mencantumkan pilihan yang Anda buat. Konfirmasikan dengan memasukkan *Y*atau memasukkan kembali nilai dengan memasukkan *N*.

Maven membuat folder proyek bernama `getstarted` berdasarkan `artifactId` nilai yang Anda masukkan. Di dalam `getstarted` folder, temukan `README.md` file yang dapat Anda tinjau, `pom.xml` file, dan `src` direktori.

Maven membangun pohon direktori berikut.

```
getstarted
### README.md
### pom.xml
### src
    ### main
    #   ### java
    #   #   ### org
    #   #       ### example
    #   #           ### App.java
    #   #           ### DependencyFactory.java
    #   #           ### Handler.java
    #   ### resources
    #       ### simplelogger.properties
    ### test
        ### java
            ### org
                ### example
                    ### HandlerTest.java

10 directories, 7 files
```

Berikut ini menunjukkan isi dari file `pom.xml` proyek.

**`pom.xml`**

`dependencyManagement`Bagian ini berisi ketergantungan ke AWS SDK for Java 2.x dan `dependencies` bagian tersebut memiliki ketergantungan untuk Amazon S3. Proyek ini menggunakan Java 1.8 karena `1.8` nilai dalam `maven.compiler.source` dan `maven.compiler.target` properti.

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://
maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>org.example</groupId>
    <artifactId>getstarted</artifactId>
    <version>1.0-SNAPSHOT</version>
    <packaging>jar</packaging>
    <properties>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
```

```
        <maven.compiler.source>1.8</maven.compiler.source>
        <maven.compiler.target>1.8</maven.compiler.target>
        <maven.shade.plugin.version>3.2.1</maven.shade.plugin.version>
        <maven.compiler.plugin.version>3.6.1</maven.compiler.plugin.version>
        <exec-maven-plugin.version>1.6.0</exec-maven-plugin.version>
        <aws.java.sdk.version>2.27.21</aws.java.sdk.version> <-------- SDK version
picked up from archetype version.
        <slf4j.version>1.7.28</slf4j.version>
        <junit5.version>5.8.1</junit5.version>
    </properties>

    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>

    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>  <-------- S3 dependency
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>sso</artifactId> <-------- Required for identity center
authentication.
        </dependency>
```

```
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>ssooidc</artifactId> <-------- Required for identity center
authentication.
        </dependency>

        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>apache-client</artifactId> <-------- HTTP client specified.
            <exclusions>
                <exclusion>
                    <groupId>commons-logging</groupId>
                    <artifactId>commons-logging</artifactId>
                </exclusion>
            </exclusions>
        </dependency>

        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-api</artifactId>
            <version>${slf4j.version}</version>
        </dependency>

        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-simple</artifactId>
            <version>${slf4j.version}</version>
        </dependency>

        <!-- Needed to adapt Apache Commons Logging used by Apache HTTP Client to Slf4j
to avoid
        ClassNotFoundException: org.apache.commons.logging.impl.LogFactoryImpl during
runtime -->
        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>jcl-over-slf4j</artifactId>
            <version>${slf4j.version}</version>
        </dependency>

        <!-- Test Dependencies -->
        <dependency>
            <groupId>org.junit.jupiter</groupId>
            <artifactId>junit-jupiter</artifactId>
```

```
            <version>${junit5.version}</version>
            <scope>test</scope>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>${maven.compiler.plugin.version}</version>
            </plugin>
        </plugins>
    </build>

</project>
```

## Langkah 3: Tulis kodenya

Kode berikut menunjukkan App kelas yang dibuat oleh Maven. `main`Metode ini adalah titik masuk ke dalam aplikasi, yang menciptakan sebuah instance dari `Handler` kelas dan kemudian memanggil `sendRequest` metodenya.

**`App`** kelas

```
package org.example;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class App {
    private static final Logger logger = LoggerFactory.getLogger(App.class);

    public static void main(String... args) {
        logger.info("Application starts");

        Handler handler = new Handler();
        handler.sendRequest();

        logger.info("Application ends");
    }
}
```

`DependencyFactory`Kelas yang dibuat oleh Maven berisi metode `s3Client` pabrik yang membangun dan mengembalikan sebuah instance. `S3Client` `S3Client`Instance menggunakan instance dari klien HTTP berbasis Apache. Ini karena Anda menentukan `apache-client` kapan Maven meminta Anda untuk klien HTTP mana yang akan digunakan.

`DependencyFactory`Hal ini ditunjukkan dalam kode berikut.

**`DependencyFactory`** kelas

```
package org.example;

import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;

/**
 * The module containing all dependencies required by the {@link Handler}.
 */
public class DependencyFactory {

    private DependencyFactory() {}

    /**
     * @return an instance of S3Client
     */
    public static S3Client s3Client() {
        return S3Client.builder()
                       .httpClientBuilder(ApacheHttpClient.builder())
                       .build();
    }
}
```

`Handler`Kelas berisi logika utama program Anda. Ketika sebuah instance `Handler` dibuat di `App` kelas, `DependencyFactory` melengkapi klien `S3Client` layanan. Kode Anda menggunakan `S3Client` instance untuk memanggil layanan Amazon S3.

Maven menghasilkan `Handler` kelas berikut dengan komentar. *`TODO`* Langkah selanjutnya dalam tutorial menggantikan kode *`TODO`*dengan.

**`Handler`**kelas, yang dihasilkan oleh Maven

```
package org.example;
```

```
import software.amazon.awssdk.services.s3.S3Client;


public class Handler {
    private final S3Client s3Client;

    public Handler() {
        s3Client = DependencyFactory.s3Client();
    }

    public void sendRequest() {
        // TODO: invoking the api calls using s3Client.
    }
}
```

Untuk mengisi logika, ganti seluruh isi `Handler` kelas dengan kode berikut. `sendRequest`Metode diisi dan impor yang diperlukan ditambahkan.

**`Handler`**kelas, diimplementasikan

Kode pertama membuat bucket S3 baru dengan bagian terakhir dari nama yang dihasilkan `System.currentTimeMillis()` untuk membuat nama bucket unik.

Setelah membuat bucket dalam `createBucket()` metode, program mengunggah objek menggunakan `putObject`metode. `S3Client` Isi objek adalah string sederhana yang dibuat dengan `RequestBody.fromString` metode ini.

Akhirnya, program menghapus objek diikuti oleh bucket dalam `cleanUp` metode.

```
package org.example;

import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;


public class Handler {
    private final S3Client s3Client;
```

```
    public Handler() {
        s3Client = DependencyFactory.s3Client();
    }

    public void sendRequest() {
        String bucket = "bucket" + System.currentTimeMillis();
        String key = "key";

        createBucket(s3Client, bucket);

        System.out.println("Uploading object...");

        s3Client.putObject(PutObjectRequest.builder().bucket(bucket).key(key)
                        .build(),
                RequestBody.fromString("Testing with the {sdk-java}"));

        System.out.println("Upload complete");
        System.out.printf("%n");

        cleanUp(s3Client, bucket, key);

        System.out.println("Closing the connection to {S3}");
        s3Client.close();
        System.out.println("Connection closed");
        System.out.println("Exiting...");
    }

    public static void createBucket(S3Client s3Client, String bucketName) {
        try {
            s3Client.createBucket(CreateBucketRequest
                    .builder()
                    .bucket(bucketName)
                    .build());
            System.out.println("Creating bucket: " + bucketName);
            s3Client.waiter().waitUntilBucketExists(HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build());
            System.out.println(bucketName + " is ready.");
            System.out.printf("%n");
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }

    public static void cleanUp(S3Client s3Client, String bucketName, String keyName) {
        System.out.println("Cleaning up...");
        try {
            System.out.println("Deleting object: " + keyName);
            DeleteObjectRequest deleteObjectRequest =
 DeleteObjectRequest.builder().bucket(bucketName).key(keyName).build();
            s3Client.deleteObject(deleteObjectRequest);
            System.out.println(keyName + " has been deleted.");
            System.out.println("Deleting bucket: " + bucketName);
            DeleteBucketRequest deleteBucketRequest =
 DeleteBucketRequest.builder().bucket(bucketName).build();
            s3Client.deleteBucket(deleteBucketRequest);
            System.out.println(bucketName + " has been deleted.");
            System.out.printf("%n");
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Cleanup complete");
        System.out.printf("%n");
    }
}
```

## Langkah 4: Bangun dan jalankan aplikasi

Setelah proyek dibuat dan berisi `Handler` kelas lengkap, bangun dan jalankan aplikasi.

1. Pastikan Anda memiliki sesi IAM Identity Center yang aktif. Untuk melakukannya, jalankan AWS Command Line Interface perintah `aws sts get-caller-identity` dan periksa responsnya. Jika Anda tidak memiliki sesi aktif, lihat bagian ini untuk petunjuk.
2. Buka terminal atau jendela prompt perintah dan arahkan ke direktori proyek Anda`getstarted`.
3. Gunakan perintah berikut untuk membangun proyek Anda:

```
mvn clean package
```

4. Gunakan perintah berikut untuk menjalankan aplikasi.

```
mvn exec:java -Dexec.mainClass="org.example.App"
```

Untuk melihat bucket dan objek baru yang dibuat program, lakukan langkah-langkah berikut.

1. Masuk`Handler.java`, komentari baris `cleanUp(s3Client, bucket, key)` dalam `sendRequest` metode dan simpan file.
2. Membangun kembali proyek dengan menjalankan`mvn clean package`.
3. Jalankan kembali `mvn exec:java -Dexec.mainClass="org.example.App"` untuk mengunggah objek teks sekali lagi.
4. Masuk ke konsol S3 untuk melihat objek baru di bucket yang baru dibuat.

Setelah Anda melihat file, hapus objek, dan kemudian hapus ember.

### Berhasil

Jika proyek Maven Anda dibangun dan berjalan tanpa kesalahan, maka selamat! Anda telah berhasil membangun aplikasi Java pertama Anda menggunakan SDK for Java 2.x.

### Pembersihan

Untuk membersihkan sumber daya yang Anda buat selama tutorial ini, lakukan hal berikut:

- Jika Anda belum melakukannya, di konsol S3, hapus objek apa pun dan ember apa pun yang dibuat saat Anda menjalankan aplikasi.
- Hapus folder proyek (`getstarted`).

## Langkah selanjutnya

Sekarang setelah Anda memiliki dasar-dasarnya, Anda dapat mempelajari hal-hal berikut:

- Bekerja dengan Amazon S3
- Bekerja dengan yang lain Amazon Web Services, seperti DynamoDB, Amazon EC2, dan berbagai layanan database
- Gunakan SDK
- Keamanan untuk AWS SDK untuk Java

# Mengkonfigurasi klien layanan di AWS SDK for Java 2.x

Untuk mengakses secara terprogram Layanan AWS, SDK for Java 2.x menggunakan objek klien untuk masing-masing. Layanan AWS Misalnya, jika aplikasi Anda perlu mengakses Amazon EC2, Anda membuat objek klien Amazon EC2 — instance kelas Ec2Client — untuk berinteraksi dengan layanan tersebut. Anda kemudian menggunakan klien layanan untuk membuat permintaan untuk itu Layanan AWS. Untuk sebagian besar aplikasi, Anda dapat menggunakan contoh tunggal dari klien layanan.

Ada banyak cara untuk mengonfigurasi perilaku SDK, tetapi pada akhirnya semuanya berkaitan dengan perilaku klien layanan. Konfigurasi apa pun tidak berpengaruh sampai kode Anda membuat klien layanan yang menggunakan konfigurasi.

Contoh konfigurasi yang Anda berikan adalah:

- Bagaimana kode Anda mengautentikasi AWS ketika Anda memanggil layanan
- Wilayah AWS Anda ingin klien layanan untuk menggunakan
- Coba lagi dan pengaturan batas waktu untuk panggilan layanan
- Konfigurasi proxy HTTP

Lihat Panduan Referensi AWS SDKs and Tools untuk pengaturan, fitur, dan konsep dasar lainnya yang umum untuk banyak. AWS SDKs

Topik


- Mengkonfigurasi klien layanan untuk eksternal AWS SDK for Java 2.x
- Mengkonfigurasi klien layanan dalam kode untuk AWS SDK for Java 2.x
- Gunakan instance klien layanan tunggal dengan AWS SDK for Java 2.x
- Mengatur Wilayah AWS untuk AWS SDK for Java 2.x
- Menggunakan penyedia kredensi di AWS SDK for Java 2.x
- Konfigurasikan perilaku coba lagi di AWS SDK for Java 2.x
- Konfigurasikan batas waktu di AWS SDK for Java 2.x
- Mengkonfigurasi fitur observabilitas di AWS SDK for Java 2.x
- Mengkonfigurasi titik akhir klien di AWS SDK for Java 2.x
- Konfigurasikan klien HTTP di AWS SDK for Java 2.x

- Gunakan pencegat eksekusi di AWS SDK for Java 2.x

# Mengkonfigurasi klien layanan untuk eksternal AWS SDK for Java 2.x

Banyak pengaturan konfigurasi dapat ditangani di luar kode Anda. Ketika Anda menangani konfigurasi eksternal, itu dapat diterapkan ke semua aplikasi Anda dalam proses Java yang sama. Sebagian besar pengaturan konfigurasi dapat diatur sebagai variabel lingkungan, properti sistem JVM, atau dalam file bersama AWS `config` yang terpisah. `config`File bersama dapat mempertahankan set pengaturan terpisah, yang disebut profil, untuk menyediakan konfigurasi yang berbeda untuk lingkungan atau pengujian yang berbeda.

Sebagian besar variabel lingkungan dan pengaturan `config` file bersama distandarisasi dan dibagikan di seluruh AWS SDKs dan alat untuk mendukung fungsionalitas yang konsisten di berbagai bahasa dan aplikasi pemrograman. Dalam kebanyakan kasus, properti sistem JVM yang dapat digunakan SDK for Java mencerminkan variabel lingkungan.

Lihat Panduan Referensi Alat AWS SDKs dan untuk mempelajari tentang mengonfigurasi aplikasi Anda melalui metode ini, ditambah detail pada setiap setelan lintas sdk. Untuk melihat semua pengaturan yang dapat diselesaikan SDK dari variabel lingkungan, properti sistem JVM, atau file konfigurasi, lihat referensi Pengaturan di Panduan Referensi Alat AWS SDKs dan Alat.

## Rantai penyedia konfigurasi untuk konfigurasi klien

SDK memeriksa beberapa tempat (atau sumber) untuk menemukan nilai konfigurasi.

1. Pengaturan eksplisit apa pun yang disetel dalam kode atau pada klien layanan itu sendiri lebih diutamakan daripada yang lain.
2. Properti sistem JVM
   - Untuk detail tentang pengaturan properti sistem JVM, lihat Cara menyetel properti sistem JVM di Panduan Referensi Alat AWS SDKs dan.
3. Variabel-variabel lingkungan
   - Untuk detail tentang pengaturan variabel lingkungan, lihat variabel lingkungan di Panduan Referensi Alat AWS SDKs dan Alat.
   - Perhatikan bahwa Anda dapat mengonfigurasi variabel lingkungan untuk shell pada tingkat cakupan yang berbeda: seluruh sistem, seluruh pengguna, dan untuk sesi terminal tertentu.

4. Berbagi `config` dan `credentials` file
   - Untuk detail tentang pengaturan file-file ini, lihat Dibagikan `config` dan `credentials` file di Panduan Referensi Alat AWS SDKs dan Alat.
5. Setiap nilai default yang disediakan oleh kode sumber SDK itu sendiri digunakan terakhir.
   - Beberapa properti, seperti Region, tidak memiliki default. Anda harus menentukannya secara eksplisit dalam kode, dalam pengaturan lingkungan, atau dalam file bersama`config`. Jika SDK tidak dapat menyelesaikan konfigurasi yang diperlukan, permintaan API dapat gagal saat runtime.

Selain rantai konfigurasi umum ini, SDK for Java 2.x juga menggunakan rantai penyedia khusus termasuk rantai penyedia kredensil dan rantai penyedia.Wilayah AWS Rantai khusus ini menambahkan penyedia tambahan yang memperhitungkan lingkungan tempat SDK berjalan. Misalnya, dalam wadah atau instance EC2.

## Buat klien layanan yang dikonfigurasi menggunakan pengaturan eksternal

Anda perlu membuat klien layanan di aplikasi Anda untuk berbicara dengan Layanan AWS. Pelanggan layanan adalah koneksi penting Anda Layanan AWS, menangani semua detail komunikasi yang kompleks sehingga Anda tidak perlu khawatir tentang mereka. Mereka menangani tugas-tugas penting seperti keamanan, penanganan kesalahan, dan percobaan ulang secara otomatis, memungkinkan Anda fokus pada membangun aplikasi Anda daripada berurusan dengan komplikasi teknis.

### Gunakan **`create()`** metode

Jika semua pengaturan konfigurasi yang Anda butuhkan berasal dari sumber eksternal, Anda dapat membuat klien layanan dengan metode sederhana:

```
S3Client s3Client = S3Client.create();
```

Cuplikan kode sebelumnya membuat sebuah `S3Client` instance. Selama pembuatan, SDK melihat melalui rantai penyedia konfigurasi untuk pengaturan. Setelah SDK menemukan nilai pengaturan, nilai akan digunakan bahkan jika konfigurasi ada yang nantinya dalam rantai.

Misalnya, asumsikan pengguna menetapkan pengaturan JVM untuk Wilayah AWS dengan menyetel properti sistem. `-Daws.region=us-west-2` Jika variabel `AWS_REGION` lingkungan juga diatur, nilainya diabaikan.

Rantai penyedia wilayah default dan rantai penyedia kredensi default juga akan digunakan dalam proses pembuatan. Di suatu tempat dalam rantai, SDK harus menyelesaikan pengaturan yang akan digunakan dan menemukan yang Wilayah AWS memungkinkannya mengambil kredensil untuk permintaan penandatanganan. Jika SDKs file untuk menemukan nilai-nilai tersebut, pembuatan klien gagal.

Meskipun Anda dapat membuat klien dengan menggunakan pola pembangun kosong ini, Anda biasanya menggunakan pola ini ketika Anda ingin menambahkan konfigurasi dalam kode.

## Variabel lingkungan SDK for Java 2.x dan properti sistem JVM

Di luar pengaturan cross-sdk yang didukung oleh sebagian besar AWS SDKs, SDK for Java 2.x menyediakan pengaturan berikut.

> **Note**
>
> Variabel lingkungan dan properti sistem JVM ini terutama ditujukan untuk kasus penggunaan lanjutan, pengujian, atau skenario penerapan tertentu. Di sebagian besar kode aplikasi, lebih baik menggunakan opsi konfigurasi terprogram yang disediakan oleh pembuat klien SDK untuk keamanan tipe dan dukungan IDE yang lebih baik.

### Variabel Lingkungan Penyedia Kredensi Kontainer

Selain variabel lingkungan kredensi kontainer standar yang didokumentasikan dalam panduan referensi, SDK juga mendukung:

`AWS_CONTAINER_SERVICE_ENDPOINT`—Variabel lingkungan ini menentukan titik akhir untuk layanan metadata kontainer saat menggunakan penyedia kredensi kontainer.

Properti sistem Java: `aws.containerServiceEndpoint`

Nilai default: `http://169.254.170.2`

### Variabel Lingkungan Implementasi Klien HTTP

`SYNC_HTTP_SERVICE_IMPL`—Secara eksplisit mengidentifikasi implementasi HTTP sinkron default yang akan digunakan SDK. Ini berguna ketika ada beberapa implementasi pada classpath atau sebagai pengoptimalan kinerja karena penemuan implementasi memerlukan pemindaian classpath.

Properti sistem Java: `software.amazon.awssdk.http.service.impl`

`ASYNC_HTTP_SERVICE_IMPL`—Secara eksplisit mengidentifikasi implementasi HTTP asinkron default yang akan digunakan SDK. Ini berguna ketika ada beberapa implementasi pada classpath atau sebagai pengoptimalan kinerja karena penemuan implementasi memerlukan pemindaian classpath.

Properti sistem Java: `software.amazon.awssdk.http.async.service.impl`

# Mengkonfigurasi klien layanan dalam kode untuk AWS SDK for Java 2.x

Sebagai alternatif untuk—atau selain— mengkonfigurasi klien layanan secara eksternal, Anda dapat mengonfigurasinya secara terprogram dalam kode.

Dengan mengonfigurasi klien layanan dalam kode, Anda mendapatkan kontrol halus dari banyak opsi yang tersedia untuk Anda. Sebagian besar konfigurasi yang dapat Anda atur secara eksternal juga tersedia untuk Anda atur dalam kode.

## Konfigurasi dasar dalam kode

Misalnya, cuplikan berikut menyetel ke Wilayah AWS `EU_SOUTH_2` untuk klien layanan Amazon S3 dalam kode:

```
S3Client s3Client = S3Client.builder()
        .region(Region.EU_SOUTH_2)
        .build();
```

Cuplikan sebelumnya menunjukkan metode pabrik statis,. `builder()` `builder()`Metode mengembalikan `builder` objek yang memungkinkan Anda untuk menyesuaikan klien layanan. Metode penyetel yang lancar mengembalikan `builder` objek—dalam hal ini, sebuah `S3ClientBuilder`instance—sehingga Anda dapat menghubungkan panggilan metode untuk kenyamanan dan kode yang lebih mudah dibaca. Setelah Anda mengkonfigurasi properti yang Anda inginkan, panggil `build()` metode untuk membuat klien.

## Konfigurasi lanjutan dalam kode

Cuplikan berikut menunjukkan opsi konfigurasi tambahan:

```
ClientOverrideConfiguration clientOverrideConfiguration =
        ClientOverrideConfiguration.builder()
```

```
                .apiCallAttemptTimeout(Duration.ofSeconds(1))
                .addMetricPublisher(CloudWatchMetricPublisher.create())
                .build();

S3Client s3Client = S3Client.builder()
        .region(Region.EU_SOUTH_2)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
        .overrideConfiguration(clientOverrideConfiguration)
        .httpClientBuilder(
                ApacheHttpClient.builder()
                        .maxConnections(100)
                        .connectionTimeout(Duration.ofSeconds(5))
                        .proxyConfiguration(ProxyConfiguration.builder()
                                .endpoint(URI.create("http://proxy:8080"))
                                .build())
        ).build();
```

Pada cuplikan sebelumnya, Anda dapat melihat beberapa titik masuk untuk mengonfigurasi klien layanan:

- **`ClientOverrideConfiguration.Builder`**Objek yang menyediakan opsi konfigurasi umum di semua klien layanan. Pengaturan ini adalah perilaku AWS spesifik yang independen dari implementasi HTTP apa pun.
- Konfigurasi klien HTTP melalui implementasi pembuat klien HTTP terpisah. `ApacheHttpClient.Builder`Ini adalah contoh. Klien layanan menyediakan `httpClientBuilder()` metode untuk mengaitkan klien HTTP yang dikonfigurasi ke klien layanan.
- Metode pada pembangun klien itu sendiri, seperti `region()` dan `credentialsProvider()`

Konfigurasi yang sama menggunakan blok konfigurasi

Alih-alih membuat objek terpisah dan kemudian meneruskannya ke metode klien layanan, metode AWS SDK for Java 2.x ini menyediakan metode yang menerima ekspresi lambda untuk membangun objek ini sebaris. Metode konfigurasi pada builder diberi nama yang sama, tetapi memiliki tanda tangan yang berbeda. Contoh:

- `overrideConfiguration(ClientOverrideConfiguration overrideConfiguration)`
- `overrideConfiguration(Consumer<ClientOverrideConfiguration.Builder> overrideConfiguration)`

Konfigurasi klien S3 yang ditunjukkan sebelumnya menggunakan pendekatan ini dapat dilakukan dalam satu blok kode:

```
S3Client s3Client = S3Client.builder()
        .region(Region.EU_SOUTH_2)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
        .overrideConfiguration(b -> b
                .apiCallAttemptTimeout(Duration.ofSeconds(1))
                .addMetricPublisher(CloudWatchMetricPublisher.create()))
        .httpClientBuilder(ApacheHttpClient.builder()
                .maxConnections(100)
                .connectionTimeout(Duration.ofSeconds(5))
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://proxy:8080"))
                        .build()))
        .build();
```

## Opsi konfigurasi tidak tersedia dalam kode

Karena setelan berikut memengaruhi proses inisialisasi mendasar di SDK, Anda dapat mengatur pengaturan konfigurasi berikut hanya secara eksternal dan bukan dalam kode:

### Pengaturan Lokasi File

Pengaturan ini mengontrol lokasi file konfigurasi dan kredensyal bersama dan tidak dapat diganti secara terprogram setelah SDK memuatnya:

- AWS_CONFIG_FILE (variabel lingkungan) /AWS.configFile (properti sistem JVM)
- AWS_SHARED_CREDENTIALS_FILE (variabel lingkungan)/aws. sharedCredentialsFile (Properti sistem JVM)

Pengaturan ini harus diatur sebelum SDK memuat file konfigurasi, karena mereka menentukan di mana SDK mencari konfigurasi. Setelah SDK diinisialisasi, mengubah nilai-nilai ini tidak berpengaruh.

### Penonaktifan Layanan Metadata Instance

- AWS_EC2_METADATA_DISABLED (variabel lingkungan) /AWS.disableEC2Metadata (properti sistem JVM)

Pengaturan ini mengontrol apakah SDK mencoba menggunakan Layanan Metadata Instans EC2 sama sekali. Setelah SDK diinisialisasi, Anda tidak dapat mengubah pengaturan ini secara terprogram.

### Pemilihan Profil

- AWS_PROFILE(variabel lingkungan) /aws.profile (properti sistem JVM)

Setelan ini memberi tahu SDK profil mana yang akan dimuat dari file konfigurasi dan kredensyal bersama. Setelah dimuat, mengubah nilai ini tidak berpengaruh.

### Jalur Kredensyal Kontainer

- AWS_CONTAINER_CREDENTIALS_RELATIVE_URI
- AWS_CONTAINER_KREDENSIALS_FULL_URI
- AWS_CONTAINER_AUTHORIZATION_TOKEN
- AWS_CONTAINER_OTORISASI_TOKEN_FILE

Anda menggunakan variabel lingkungan ini untuk memberi tahu SDK cara mengambil kredensyal dari layanan kontainer. Setelah rantai penyedia kredensyal dibuat selama inisialisasi klien layanan, Anda tidak dapat mengubah pengaturan ini.

### Pilihan Implementasi HTTP Default

- SYNC_HTTP_SERVICE_IMPL (variabel lingkungan) /software.amazon.awssdk.http.service.impl (properti sistem JVM)
- ASYNC_HTTP_SERVICE_IMPL (variabel lingkungan) / software.amazon.awssdk.http.async.service.impl (properti sistem JVM)

Pengaturan global ini menentukan implementasi klien HTTP mana yang digunakan SDK untuk semua klien layanan kecuali diganti dalam kode untuk klien layanan individu. Anda harus mengatur ini sebelum SDK menginisialisasi klien HTTP dan tidak dapat diubah sesudahnya.

# Gunakan instance klien layanan tunggal dengan AWS SDK for Java 2.x

Klien layanan di AWS SDK for Java 2.x thread-safe. Anda dapat membuat satu contoh dari setiap klien layanan dan menggunakannya kembali di seluruh aplikasi Anda. Pendekatan ini meningkatkan kinerja dan mengelola sumber daya secara lebih efisien.

## Manfaat klien layanan tunggal

Pengumpulan koneksi

Klien layanan memelihara kolam koneksi HTTP internal. Membuat dan menghancurkan kolam ini mahal. Saat Anda menggunakan kembali klien, kumpulan ini dibagikan secara efisien di seluruh permintaan.

Mengurangi overhead inisialisasi

Membuat klien melibatkan pemuatan konfigurasi, membangun kredensil, dan menginisialisasi komponen internal. Contoh Singleton menghilangkan overhead ini.

Pemanfaatan sumber daya yang lebih baik

Klien Singleton mencegah kehabisan sumber daya yang dapat terjadi saat Anda membuat banyak instance klien.

## Membuat dan menggunakan klien layanan tunggal

Contoh berikut menunjukkan cara membuat dan menggunakan klien layanan tunggal:

```
// Create one instance and use it throughout the application.
public class ServiceClientSource {
    private static final S3Client s3Client = S3Client.create();

    public static S3Client getS3Client() {
        return s3Client;
    }
}
```

Jangan membuat klien baru untuk setiap operasi:

```
// This approach creates unnecessary overhead.
public void badExample() {
    try (S3Client s3 = S3Client.create()) {
        s3.listBuckets();
    }
}
```

### Pertimbangan penting

- Klien layanan aman untuk benang. Anda dapat membagikannya dengan aman di beberapa utas.
- Tutup klien hanya ketika aplikasi Anda dimatikan atau jika Anda tidak lagi membutuhkan klien. Gunakan `client.close()` atau try-with-resources di tingkat aplikasi.
- Jika Anda memerlukan konfigurasi yang berbeda seperti wilayah atau kredensional, buat instance tunggal terpisah untuk setiap konfigurasi.

Jika Anda menggunakan kerangka kerja injeksi ketergantungan seperti Spring, konfigurasikan klien layanan sebagai kacang tunggal. Ini memastikan manajemen siklus hidup yang tepat.

## Mengatur Wilayah AWS untuk AWS SDK for Java 2.x

Klien SDK terhubung ke Layanan AWS dalam spesifik Wilayah AWS yang Anda tentukan saat Anda membuat klien. Konfigurasi ini memungkinkan aplikasi Anda berinteraksi dengan AWS sumber daya di wilayah geografis tersebut. Saat Anda membuat klien layanan tanpa menyetel Region secara eksplisit, SDK menggunakan Region default dari konfigurasi eksternal Anda.

### Konfigurasikan secara eksplisit Wilayah AWS

Untuk secara eksplisit menetapkan Region, kami sarankan Anda menggunakan konstanta yang didefinisikan dalam kelas Region. Ini adalah enumerasi dari semua wilayah yang tersedia untuk umum.

Untuk membuat klien dengan Region yang disebutkan dari kelas, gunakan metode pembuat klien. `region`

```
Ec2Client ec2 = Ec2Client.builder()
          .region(Region.US_WEST_2)
          .build();
```

Jika Region yang ingin Anda gunakan bukan salah satu enumerasi di `Region` kelas, Anda dapat membuat Region baru dengan menggunakan metode statis. `of` Metode ini memungkinkan Anda mengakses Wilayah baru tanpa memutakhirkan SDK.

```
Region newRegion = Region.of("us-east-42");
Ec2Client ec2 = Ec2Client.builder()
          .region(newRegion)
          .build();
```

> **Note**
>
> Setelah Anda membangun klien dengan pembangun, itu tidak dapat diubah dan Wilayah AWS tidak dapat diubah. Jika Anda perlu bekerja dengan beberapa Wilayah AWS untuk layanan yang sama, Anda harus membuat beberapa klien—satu per Wilayah.

## Biarkan SDK secara otomatis menentukan default Wilayah AWS dari lingkungan

Ketika kode Anda berjalan pada Amazon EC2 atau AWS Lambda, Anda mungkin ingin mengonfigurasi klien untuk menggunakan kode Wilayah AWS yang sama dengan yang dijalankan kode Anda. Ini memisahkan kode Anda dari lingkungan tempat ia berjalan dan membuatnya lebih mudah untuk menerapkan aplikasi Anda ke beberapa Wilayah AWS untuk latensi atau redundansi yang lebih rendah.

Untuk menggunakan rantai Wilayah AWS penyedia default untuk menentukan Wilayah dari lingkungan, gunakan `create` metode pembuat klien.

```
Ec2Client ec2 = Ec2Client.create();
```

Anda juga dapat mengkonfigurasi klien dengan cara lain, tetapi tidak mengatur Wilayah. SDK mengambil Wilayah AWS dengan menggunakan rantai penyedia wilayah default:

```
Ec2Client ec2Client = Ec2Client.builder()
        .credentialsProvider(ProfileCredentialsProvider.builder()
                .profileName("my-profile")
                .build())
        .build();
```

Jika Anda tidak menyetel secara eksplisit menggunakan `region` metode ini, SDK akan berkonsultasi Wilayah AWS dengan rantai penyedia wilayah default untuk menentukan Wilayah yang akan digunakan.

## Memahami rantai Wilayah AWS penyedia default

SDK mengambil langkah-langkah berikut untuk mencari: Wilayah AWS

1. Setiap Region eksplisit yang disetel dengan menggunakan `region` metode pada builder itu sendiri lebih diutamakan daripada yang lainnya.
2. SDK mencari properti sistem JVM `aws.region` dan menggunakan nilainya jika ditemukan.
3. Variabel `AWS_REGION` lingkungan diperiksa. Jika disetel, Wilayah itu digunakan untuk mengkonfigurasi klien.

   > **Note**
   >
   > Lambda Wadah menetapkan variabel lingkungan ini.

4. SDK memeriksa profil aktif di file konfigurasi dan kredensial AWS bersama. Jika `region` properti ada, SDK menggunakannya.

   `default`Profil adalah profil aktif kecuali diganti oleh variabel `AWS_PROFILE` lingkungan atau properti sistem `aws.profile` JVM. Jika SDK menemukan `region` properti di kedua file untuk profil yang sama (termasuk `default` profil), SDK akan menggunakan nilai dalam file kredensial bersama.
5. SDK mencoba menggunakan layanan metadata Amazon EC2 instance (IMDS) untuk menentukan Wilayah instance yang sedang berjalan. Amazon EC2
   - Untuk keamanan yang lebih besar, Anda harus menonaktifkan SDK dari mencoba menggunakan IMDS versi 1. Anda menggunakan pengaturan yang sama untuk menonaktifkan versi 1 yang dijelaskan di the section called “Aman” bagian.
6. Jika SDK masih belum menemukan Wilayah pada titik ini, pembuatan klien gagal dengan pengecualian.

Saat mengembangkan AWS aplikasi, pendekatan umum adalah menggunakan file konfigurasi bersama untuk mengatur Wilayah untuk pengembangan lokal, dan mengandalkan rantai penyedia wilayah default untuk menentukan Wilayah saat aplikasi berjalan pada AWS infrastruktur. Ini sangat menyederhanakan pembuatan klien dan membuat aplikasi Anda tetap portabel.

## Periksa untuk melihat apakah layanan tersedia di suatu Wilayah

Untuk melihat apakah tertentu Layanan AWS tersedia di Wilayah, gunakan `serviceMetadata` metode statis pada klien layanan:

```
DynamoDbClient.serviceMetadata().regions().forEach(System.out::println);
```

Cuplikan sebelumnya mencetak daftar panjang Wilayah AWS kode yang memiliki layanan DynamoDB:

```
af-south-1
ap-east-1
ap-northeast-1
ap-northeast-2
ap-northeast-3
ap-south-1
ap-south-2
ap-southeast-1
...
```

Anda dapat menggunakan kode untuk mencari enumerasi kelas Region untuk Wilayah yang Anda butuhkan untuk digunakan oleh klien layanan Anda.

Misalnya, jika Anda ingin bekerja dengan DynamoDB di Wilayah dengan `ap-northeast-2` kode, buat klien DynamoDB Anda dengan setidaknya konfigurasi berikut:

```
DynamoDbClient ddb = DynamoDbClient.builder()
    .region(Region.AP_NORTHEAST_2)
    .build();
```

## Pilih titik akhir tertentu

Dalam situasi tertentu—seperti untuk menguji fitur pratinjau layanan sebelum fitur lulus ke ketersediaan umum—Anda mungkin perlu menentukan titik akhir tertentu di Wilayah. Dalam situasi ini, klien layanan dapat dikonfigurasi dengan memanggil `endpointOverride` metode.

Misalnya, untuk mengonfigurasi Amazon EC2 klien agar menggunakan Wilayah Eropa (Irlandia) dengan titik akhir tertentu, gunakan kode berikut.

```
Ec2Client ec2 = Ec2Client.builder()
```

```
                .region(Region.EU_WEST_1)
                .endpointOverride(URI.create("https://ec2.eu-west-1.amazonaws.com"))
                .build();
```

Lihat Wilayah dan Titik Akhir untuk daftar wilayah saat ini dan titik akhir yang sesuai untuk semua AWS layanan.

# Menggunakan penyedia kredensi di AWS SDK for Java 2.x

Peran penyedia kredensial di dalamnya AWS SDK for Java 2.x adalah untuk mencari dan memasok kredensil ke klien SDK. Layanan AWS SDK menggunakan kredensil yang disumberkannya untuk mengautentikasi dengan layanan dengan menandatangani setiap permintaan secara kriptografis. Kredenal biasanya terdiri dari kunci akses—ID kunci akses dan kunci akses rahasia bersama-sama.

Saat Anda menggunakan kredensil sementara, yang digunakan saat Anda menyiapkan konfigurasi penyedia token SSO atau mengonfigurasi runtime Anda untuk mengambil peran IAM (AWS Identity and Access Management) sebagai contoh, token sesi ditambahkan ke kunci akses, memberikan akses terbatas waktu ke sumber daya. AWS

Topik ini membahas beberapa cara Anda mengaktifkan SDK untuk mengakses kredensional.

Topik

- Akses kredensional untuk pekerjaan pengembangan interaktif menggunakan AWS SDK for Java 2.x
- Rantai penyedia kredensi default di AWS SDK for Java 2.x
- Caching kredensial di AWS SDK for Java 2.x
- Tentukan penyedia kredensi tertentu di AWS SDK for Java 2.x
- Gunakan profil konfigurasi AWS bersama di AWS SDK for Java 2.x
- Muat kredensi dari proses eksternal menggunakan AWS SDK for Java 2.x
- Menyediakan kredensi dalam kode menggunakan AWS SDK for Java 2.x
- Membaca kredensi peran IAM di Amazon EC2 menggunakan SDK for Java 2.x

# Akses kredensional untuk pekerjaan pengembangan interaktif menggunakan AWS SDK for Java 2.x

Untuk meningkatkan keamanan, Anda AWS merekomendasikan agar Anda mengonfigurasi SDK for Java agar menggunakan kredensil sementara, bukan kredensial yang berumur panjang. Kredensi sementara terdiri dari kunci akses (id kunci akses dan kunci akses rahasia) dan token sesi.

Beberapa pendekatan tersedia bagi Anda untuk bekerja dengan kredensi sementara. Pendekatan yang Anda gunakan, dan oleh karena itu konfigurasi yang Anda berikan ke SDK, bergantung pada kasus penggunaan Anda.

Saat Anda melakukan pekerjaan pengembangan interaktif dengan Java SDK, kami sarankan Anda menggunakan kredensil login AWS Console.

## Menggunakan kredenal login konsol

Anda dapat menggunakan kredenal masuk Konsol AWS Manajemen yang sudah ada untuk akses terprogram ke layanan. AWS Setelah alur otentikasi berbasis browser, AWS menghasilkan kredensil sementara yang bekerja di seluruh alat pengembangan lokal seperti SDK for Java 2.x dan AWS CLI SDK for Java.

Dengan proses ini, Anda dapat mengautentikasi menggunakan kredensi root yang dibuat selama pengaturan akun awal, pengguna IAM, atau identitas federasi dari penyedia identitas Anda, dan AWS CLI secara otomatis mengelola kredensil sementara untuk Anda. Pendekatan ini meningkatkan keamanan dengan menghilangkan kebutuhan untuk menyimpan kredensi jangka panjang secara lokal.

Ketika Anda menjalankan `aws login` perintah, Anda dapat memilih dari sesi konsol aktif Anda, atau masuk melalui alur otentikasi berbasis browser dan ini akan secara otomatis menghasilkan kredensi sementara. SDK for Java 2.x akan secara otomatis me-refresh kredenal ini hingga 12 jam.

**Important**

Selain konfigurasi yang Anda tetapkan dalam file konfigurasi bersama yang berfungsi untuk semua proyek, setiap proyek Java individu memerlukan ketergantungan berikut dalam file `pom.xml` Maven:

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>signin</artifactId>
```

```
</dependency>
```

`signin`Ketergantungan menyediakan kode yang memungkinkan SDK for Java 2.x mengakses dan menggunakan kredensi login konsol.

Untuk informasi selengkapnya tentang prerequsites, masuk dan keluar, lihat Login untuk pengembangan AWS lokal menggunakan kredenal konsol di SDK dan Panduan Refernce Tools.AWS

## Single-sign-on pendekatan

Saat Anda melakukan pekerjaan pengembangan interaktif dengan Java SDK, Anda dapat menggunakan pendekatan masuk tunggal. Pendekatan ini membutuhkan pengaturan berikut:

- Diatur melalui Pusat Identitas IAM
- Konfigurasikan profil di file konfigurasi AWS bersama
- menggunakan AWS CLI dan menjalankan perintah untuk login dan membuat sesi aktif

### Konfigurasi Pusat Identitas IAM

Saat Anda mengonfigurasi SDK untuk menggunakan akses masuk tunggal Pusat Identitas IAM seperti yang dijelaskan ??? dalam panduan ini, SDK menggunakan kredensil sementara.

SDK menggunakan token akses Pusat Identitas IAM untuk mendapatkan akses ke peran IAM yang dikonfigurasi dengan `sso_role_name` pengaturan di file Anda. `config` SDK mengasumsikan peran IAM ini dan mengambil kredenal sementara untuk menandatangani permintaan. Layanan AWS

Untuk detail selengkapnya tentang cara SDK mendapatkan kredensil sementara dari konfigurasi, lihat bagian Memahami autentikasi Pusat Identitas IAM pada Panduan Referensi Alat dan Panduan Referensi Alat. AWS SDKs

**Important**

Selain konfigurasi yang Anda tetapkan dalam `config` file bersama yang berfungsi untuk semua proyek, setiap proyek Java individu memerlukan dependensi berikut dalam file `pom.xml` Maven:

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
```

```
    <artifactId>sso</artifactId>
</dependency>
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>ssooidc</artifactId>
</dependency>
```

`ssooidc`Dependensi `sso` dan menyediakan kode yang memungkinkan SDK for Java 2.x mengakses kredensi sementara.

Ambil kredensi sementara dari portal akses AWS

Sebagai alternatif untuk konfigurasi masuk tunggal Pusat Identitas IAM, Anda dapat menyalin dan menggunakan kredenal sementara yang tersedia di portal akses. AWS Anda dapat menggunakan kredensi sementara di profil atau menggunakannya sebagai nilai untuk properti sistem dan variabel lingkungan.

Siapkan file kredensial lokal untuk kredensil sementara

1. Buat file kredensial bersama
2. Dalam file kredensial, rekatkan teks placeholder berikut hingga Anda menempelkan kredensi sementara yang berfungsi.

```
[default]
aws_access_key_id=<value from AWS access portal>
aws_secret_access_key=<value from AWS access portal>
aws_session_token=<value from AWS access portal>
```

3. Simpan file tersebut. File sekarang `~/.aws/credentials` harus ada di sistem pengembangan lokal Anda. File ini berisi profil [default] yang digunakan SDK for Java jika profil bernama tertentu tidak ditentukan.
4. Masuk ke portal AWS akses
5. Ikuti petunjuk ini di bawah judul penyegaran kredenal manual untuk menyalin kredensi peran IAM dari portal akses. AWS

    a. Untuk langkah 2 dalam petunjuk yang ditautkan, pilih `Access keys` nama peran IAM yang memberikan akses untuk kebutuhan pengembangan Anda. Peran ini biasanya memiliki nama seperti PowerUserAccessatau Pengembang.

b. Di kotak dialog modal, pilih sistem operasi Anda dan salin isinya dari Tambahkan profil ke file AWS kredensil Anda.

6. Tempelkan kredenal yang disalin ke `credentials` file lokal Anda dan hapus nama profil yang dihasilkan. File Anda harus menyerupai yang berikut ini.

```
[default]
aws_access_key_id=AKIAIOSFODNN7EXAMPLE
aws_secret_access_key=wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
aws_session_token=IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZ2luX2IQoJb3JpZVERYLONG
```

7. Simpan file `credentials`.

Ketika SDK for Java membuat klien layanan, itu akan mengakses kredensil sementara ini dan menggunakannya untuk setiap permintaan. Pengaturan untuk peran IAM yang dipilih pada langkah 5a menentukan berapa lama kredensi sementara valid. Durasi maksimum adalah dua belas jam.

Setelah kredensi sementara kedaluwarsa, ulangi langkah 4 hingga 7.

## Rantai penyedia kredensi default di AWS SDK for Java 2.x

Rantai penyedia kredensi default dalam pencarian AWS kredensil AWS SDK for Java 2.x secara otomatis dalam urutan lokasi yang telah ditentukan sebelumnya, memungkinkan aplikasi untuk mengautentikasi dengan tanpa secara eksplisit menentukan sumber kredensi. Layanan AWS

Rantai penyedia kredensi default diimplementasikan oleh kelas. DefaultCredentialsProvider Ini secara berurutan mendelegasikan ke implementasi penyedia kredensional lain yang memeriksa konfigurasi di berbagai lokasi. Penyedia kredensi pertama yang dapat menemukan semua elemen konfigurasi yang diperlukan menyebabkan rantai berakhir.

Untuk menggunakan rantai penyedia kredensi default untuk menyediakan kredensil sementara, buat pembuat klien layanan tetapi jangan tentukan penyedia kredensional. Cuplikan kode berikut membuat `DynamoDbClient` yang menggunakan rantai penyedia kredensial default untuk mencari dan mengambil pengaturan konfigurasi.

```
// Any external Region configuration is overridden.
// The SDK uses the default credentials provider chain because no specific credentials
 provider is specified.
Region region = Region.US_WEST_2;
DynamoDbClient ddb =
```

```
    DynamoDbClient.builder()
                  .region(region)
                  .build();
```

## Urutan pengambilan setelan kredensialnya

Rantai penyedia kredensial default SDK for Java 2.x mencari konfigurasi di lingkungan Anda menggunakan urutan yang telah ditentukan sebelumnya.

1. Properti sistem Java
   - SDK menggunakan SystemPropertyCredentialsProviderkelas untuk memuat kredensi sementara dari properti sistem`aws.accessKeyId`,`aws.secretAccessKey`, dan `aws.sessionToken` Java.

     > **Note**
     >
     > Untuk informasi tentang cara mengatur properti sistem Java, lihat tutorial System Properties di situs web resmi Java Tutorial.

2. Variabel-variabel lingkungan
   - SDK menggunakan EnvironmentVariableCredentialsProviderkelas untuk memuat kredenal sementara dari variabel`AWS_ACCESS_KEY_ID`,`AWS_SECRET_ACCESS_KEY`, dan `AWS_SESSION_TOKEN` lingkungan.
3. Token identitas web dan peran IAM ARN
   - SDK menggunakan WebIdentityTokenFileCredentialsProviderkelas untuk memuat kredensil dengan mengasumsikan peran menggunakan token identitas web.
   - Penyedia kredensial mencari variabel lingkungan berikut atau properti sistem JVM:
     - `AWS_WEB_IDENTITY_TOKEN_FILE or aws.webIdentityTokenFile`
     - `AWS_ROLE_ARN` atau `aws.roleArn`
     - `AWS_ROLE_SESSION_NAME`atau `aws.roleSessionName` (opsional)
   - Setelah SDK memperoleh nilai, ia memanggil AWS Security Token Service (STS) dan menggunakan kredensil sementara yang dikembalikan untuk menandatangani permintaan.
   - Lingkungan runtime seperti Amazon Elastic Kubernetes Service (EKS) secara otomatis membuat token identitas web AWS SDKs tersedia, memungkinkan aplikasi memperoleh kredensi sementara. AWS
4. Yang dibagikan `credentials` dan `config` file

- SDK menggunakan pengaturan masuk tunggal IAM Identity Center atau kredensil sementara dari `[default]` profil di file bersama dan file. ProfileCredentialsProvider`credentialsconfig`

  Panduan Referensi AWS SDKs and Tools memiliki informasi terperinci tentang cara kerja SDK for Java dengan token masuk tunggal IAM Identity Center untuk mendapatkan kredenal sementara yang digunakan SDK untuk memanggil. Layanan AWS

  > **Note**
  >
  > `config`File `credentials` dan dibagikan oleh berbagai AWS SDKs dan Alat. Untuk informasi lebih lanjut, lihat The. aws/credentials and .aws/configfile di Panduan Referensi Alat AWS SDKs dan.

- Karena profil di berbagi `credentials` dan `config` file dapat berisi banyak set pengaturan yang berbeda, `ProfileCredentialsProvider` delegasi ke serangkaian penyedia lain untuk mencari pengaturan di bawah `[default]` profil:
  - Kredensial token identitas web (kelas`WebIdentityTokenCredentialsProvider`): Ketika profil berisi `role_arn` dan. `web_identity_token_file`
  - Kredensial SSO (kelas`SsoCredentialsProvider`): Ketika profil berisi properti terkait SSO seperti,. `sso_role_name` `sso_account_id`
  - Kredensial berbasis peran dengan profil sumber (kelas`StsAssumeRoleCredentialsProvider`): Ketika profil berisi dan. `role_arn` `source_profile`
  - Kredensial berbasis peran dengan sumber kredensi (kelas`StsAssumeRoleWithSourceCredentialsProvider`): Saat profil berisi dan. `role_arn` `credential_source`
    - Kapan`credential_source = Environment`: Menggunakan rantai `SystemPropertyCredentialsProvider` dan `EnvironmentVariableCredentialsProvider`
    - Kapan`credential_source = Ec2InstanceMetadata`: Ini menggunakan `InstanceProfileCredentialsProvider`
    - Kapan`credential_source = EcsContainer`: Ini menggunakan `ContainerCredentialsProvider`
  - Kredensial login konsol (kelas`LoginCredentialsProvider`): Saat profil berisi `login_session`

- Kredensi proses (kelas`ProcessCredentialsProvider`): Ketika profil berisi. `credential_process`
- Kredensial sesi (kelas`StaticSessionCredentialsProvider`): Ketika profil berisi`aws_access_key_id`,`aws_secret_access_key`, dan. `aws_session_token`
- Kredensi dasar (kelas`StaticCredentialsProvider`): Ketika profil berisi `aws_access_key_id` dan. `aws_secret_access_key`

5. Amazon ECS kredensi kontainer
   - SDK menggunakan ContainerCredentialsProviderkelas untuk memuat kredenal sementara menggunakan variabel lingkungan berikut:
     a. `AWS_CONTAINER_CREDENTIALS_RELATIVE_URI` atau `AWS_CONTAINER_CREDENTIALS_FULL_URI`
     b. `AWS_CONTAINER_AUTHORIZATION_TOKEN_FILE` atau `AWS_CONTAINER_AUTHORIZATION_TOKEN`

   Agen kontainer ECS secara otomatis menetapkan variabel `AWS_CONTAINER_CREDENTIALS_RELATIVE_URI` lingkungan, yang menunjuk ke titik akhir kredensi ECS. Variabel lingkungan lainnya biasanya diatur dalam skenario tertentu di mana titik akhir kredensi ECS standar tidak digunakan.
6. Amazon EC2 kredensi yang disediakan peran IAM misalnya
   - SDK menggunakan InstanceProfileCredentialsProviderkelas untuk memuat kredensil sementara dari layanan metadata. Amazon EC2
7. Jika SDK tidak dapat menemukan pengaturan konfigurasi yang diperlukan melalui semua langkah yang tercantum di atas, SDK akan menampilkan pengecualian dengan output yang mirip dengan berikut ini:

```
software.amazon.awssdk.core.exception.SdkClientException: Unable to load credentials
 from any of the providers
in the chain
 AwsCredentialsProviderChain(credentialsProviders=[SystemPropertyCredentialsProvider(),
EnvironmentVariableCredentialsProvider(), WebIdentityTokenCredentialsProvider(),
 ProfileCredentialsProvider(),
ContainerCredentialsProvider(), InstanceProfileCredentialsProvider()])
```

## Gunakan kode **`DefaultCredentialsProvider`** dalam

Anda dapat secara eksplisit menggunakan rantai penyedia kredensi default dalam kode Anda. Ini secara fungsional setara dengan Anda yang tidak menentukan penyedia kredensional sama sekali, karena SDK digunakan secara default. `DefaultCredentialsProvider` Namun, menggunakannya secara eksplisit dapat membuat kode Anda lebih mudah dibaca dan didokumentasikan sendiri. Ini jelas menunjukkan niat Anda untuk menggunakan rantai kredensional default.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

public class ExplicitDefaultCredentialsExample {
    public static void main(String[] args) {
        // Explicitly create the DefaultCredentialsProvider.
        DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider
                                                                .builder().build();

        // Use it with any service client.
        S3Client s3Client = S3Client.builder()
            .region(Region.US_WEST_2)
            .credentialsProvider(defaultCredentialsProvider)
            .build();

        // Now you can use the client with the default credentials chain.
        s3Client.listBuckets();
    }
}
```

Saat Anda membangun penyedia kredensi default, Anda dapat menyediakan lebih banyak konfigurasi:

```
DefaultCredentialsProvider customizedProvider = DefaultCredentialsProvider.builder()
    .profileName("custom-profile")  // Use a specific profile if the chain gets to the
 `ProfileCredentialsProvider` stage.
    .asyncCredentialUpdateEnabled(true)  // Enable async credential updates.
    .build();
```

Pendekatan ini memberi Anda lebih banyak kontrol sambil tetap memberikan kenyamanan rantai kredensil default.

# Caching kredensial di AWS SDK for Java 2.x

AWS SDK for Java 2.x Mengimplementasikan caching kredenal untuk meningkatkan kinerja dan mengurangi panggilan ke sumber kredensional. Bagian ini menjelaskan cara kerja caching kredensil dan bagaimana Anda dapat mengonfigurasinya untuk aplikasi Anda.

## Memahami caching penyedia kredensi

Penyedia kredensi di SDK for Java 2.x menggunakan strategi caching yang berbeda:

- Caching kredenal internal: Banyak penyedia menyimpan kredensi cache yang mereka ambil.
- Penyegaran otomatis: Penyedia dengan kredenal cache menerapkan mekanisme penyegaran.

### Penyedia dengan caching kredensil internal

Penyedia kredensial berikut menyimpan kredensil secara internal, bahkan saat Anda membuat instance baru:

- Penyedia kredensial profil instans: Cache kredensional dari layanan metadata Amazon EC2.
- Penyedia kredensial kontainer: Cache kredensil dari titik akhir metadata kontainer.
- Penyedia berbasis STS: Cache kredensi sementara dari AWS Security Token Service (STS).
- Penyedia token identitas web: Kredensi cache yang diperoleh dari token identitas web.
- Process credentials provider: Cache kredensial dari proses eksternal.

### Penyedia tanpa caching internal

Penyedia berikut tidak menerapkan caching internal:

- Penyedia Kredensial Variabel Lingkungan
- Penyedia Kredensial Properti Sistem
- Penyedia Kredensial Statis

## Mengkonfigurasi caching kredenal

Anda dapat menyesuaikan perilaku caching saat membuat penyedia kredensi:

Waktu Basi

Kontrol saat kredensional dianggap basi dan perlu disegarkan:

```
.staleTime(Duration.ofMinutes(2))  // Consider stale 2 minutes before expiration.
```

Waktu Prefetch

Menentukan kapan harus mulai menyegarkan kredensi sebelum kedaluwarsa:

```
.prefetchTime(Duration.ofMinutes(10))  // Start refresh 10 minutes before expiration.
```

Pembaruan Asinkron

Mengaktifkan penyegaran kredenal latar belakang:

```
.asyncCredentialUpdateEnabled(true)  // Refresh credentials in background thread.
```

Durasi Sesi

Untuk penyedia berbasis STS, mengontrol berapa lama kredensi sementara tetap valid:

```
.refreshRequest(r -> r.durationSeconds(3600))  // 1 hour session.
```

## Contoh konfigurasi kredensial caching

Sebagai contoh mengonfigurasi caching untuk implementasi penyedia kredensional, Anda mungkin ingin SDK menggunakan utas latar belakang untuk mengambil (mengambil terlebih dahulu) kredensil sebelum kedaluwarsa. Dengan begitu Anda dapat menghindari panggilan pemblokiran yang mengambil kredensi baru.

Berikut ini menunjukkan contoh yang membuat thread `StsAssumeRoleCredentialsProvider` yang menggunakan thread latar belakang untuk mengambil kredenal sebelumnya dengan menyetel `asyncCredentialUpdateEnabled` properti ke `true` pada builder:

```
StsAssumeRoleCredentialsProvider provider = StsAssumeRoleCredentialsProvider.builder()
    .refreshRequest(r -> r
        .roleArn("arn:aws:iam::111122223333:role/example-role")
        .roleSessionName("example-session")
```

```
        .durationSeconds(3600))  // 1 hour session
    .staleTime(Duration.ofMinutes(5))  // Consider stale 5 minutes before expiration
    .prefetchTime(Duration.ofMinutes(10))  // Start refresh 10 minutes before
 expiration
    .asyncCredentialUpdateEnabled(true)  // Refresh in background
    .build();

S3Client s3 = S3Client.builder()
    .credentialsProvider(provider)
    .build();
```

Ketika Anda menjalankan operasi `s3Client` untuk pertama kalinya, an `AssumeRoleRequest` dikirim ke AWS Security Token Service (STS). STS mengembalikan kredensi sementara yang berlaku selama 15 menit (900 detik). `s3Client`Instance menggunakan kredensil yang di-cache hingga waktunya untuk menyegarkannya sebelum 15 menit berlalu. Secara default, SDK mencoba mengambil kredensi baru untuk sesi baru antara 5 menit dan 1 menit sebelum waktu kedaluwarsa sesi saat ini. Jendela pre-fetch dapat dikonfigurasi dengan menggunakan properti and. `prefetchTime` `staleTime`

Anda dapat mengonfigurasi penyedia kredensi berbasis sesi berikut dengan cara yang sama:

- `StsWebIdentityTokenFileCredentialsProvider`
- `StsGetSessionTokenCredentialsProvider`
- `StsGetFederationTokenCredentialsProvider`
- `StsAssumeRoleWithWebIdentityCredentialsProvider`
- `StsAssumeRoleWithSamlCredentialsProvider`
- `StsAssumeRoleCredentialsProvider`
- `DefaultCredentialsProvider`(saat mendelegasikan ke penyedia kredensional yang menggunakan sesi)
- `ProcessCredentialsProvider`
- `WebIdentityTokenFileCredentialsProvider`
- `ContainerCredentialsProvider`
- `InstanceProfileCredentialsProvider`

Memahami caching kredenal membantu Anda mengoptimalkan kinerja dan keandalan aplikasi saat bekerja dengannya. Layanan AWS

# Tentukan penyedia kredensi tertentu di AWS SDK for Java 2.x

Meskipun rantai penyedia kredensional default nyaman untuk banyak skenario, menentukan penyedia kredensional secara eksplisit memberi Anda kontrol yang lebih besar atas perilaku otentikasi, kinerja, dan keamanan.

Alasan mengapa Anda mungkin ingin menentukan penyedia kredensional mungkin termasuk:

- Rantai penyedia default memeriksa beberapa sumber secara berurutan, yang dapat menambahkan latensi:

```
// The default provider chain checks might check multiple sources until it finds
// sufficient configuration.
S3Client s3Client = S3Client.builder().build();

// You can specify exactly where to look.
S3Client optimizedClient = S3Client.builder()
    .credentialsProvider(InstanceProfileCredentialsProvider.create())
    .build();
```

- Anda perlu menggunakan lokasi non-standar untuk mengakses konfigurasi kredensional:

```
// Use configuration from a custom file location.
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.builder()
            .profileFile(ProfileFile.builder()
                    .content(Paths.get("/custom/path/to/configuration/file"))
                    .type(ProfileFile.Type.CONFIGURATION) // Expects all non-default
 profiles to be prefixed with "profile".
                    .build())
            .profileName("custom")
            .build())
    .build();
```

- Gunakan kredensi yang berbeda untuk klien layanan yang berbeda. Misalnya, jika aplikasi Anda perlu mengakses beberapa AWS akun atau menggunakan izin yang berbeda untuk layanan yang berbeda:

```
// S3 client using one set of credentials.
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.create("s3-readonly"))
    .build();
```

```
// DynamoDB client using different credentials.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .credentialsProvider(ProfileCredentialsProvider.create("dynamodb-admin"))
    .build();
```

- Kontrol perilaku penyegaran kredenal:

```
// Create a provider with custom refresh behavior.
StsAssumeRoleCredentialsProvider customRefreshProvider =
    StsAssumeRoleCredentialsProvider.builder()
        .refreshRequest(AssumeRoleRequest.builder()
            .roleArn("arn:aws:iam::123456789012:role/my-role")
            .roleSessionName("custom-session")
            .build())
        .stsClient(StsClient.create())
        .asyncCredentialUpdateEnabled(true) // Use a background thread to prefetch
 credentials.
        .build();

S3Client s3Client = S3Client.builder()
    .credentialsProvider(customRefreshProvider)
    .build();
```

## Gunakan profil konfigurasi AWS bersama di AWS SDK for Java 2.x

Menggunakan `credentials` file bersama `config` dan, Anda dapat mengatur beberapa profil. Hal ini memungkinkan aplikasi Anda untuk menggunakan beberapa set konfigurasi kredensional. `[default]`Profil tersebut telah disebutkan sebelumnya. SDK menggunakan ProfileCredentialsProviderkelas untuk memuat pengaturan dari profil yang ditentukan dalam `credentials` file bersama.

Cuplikan kode berikut menunjukkan cara membangun klien layanan yang menggunakan pengaturan yang didefinisikan sebagai bagian dari profil bernama. `my_profile`

```
Region region = Region.US_WEST_2;
DynamoDbClient ddb = DynamoDbClient.builder()
      .region(region)
      .credentialsProvider(ProfileCredentialsProvider.create("my_profile"))
      .build();
```

### Tetapkan profil yang berbeda sebagai default

Untuk menetapkan profil selain `[default]` profil sebagai default untuk aplikasi Anda, atur variabel `AWS_PROFILE` lingkungan ke nama profil kustom Anda.

Untuk mengatur variabel ini di Linux, macOS, atau Unix, gunakan: `export`

```
export AWS_PROFILE="other_profile"
```

Untuk menetapkan variabel ini di Windows, gunakan `set`:

```
set AWS_PROFILE="other_profile"
```

Atau, atur properti sistem `aws.profile` Java ke nama profil.

### Muat ulang kredensi profil

Anda dapat mengonfigurasi penyedia kredensi apa pun yang memiliki `profileFile()` metode pada pembuatnya untuk memuat ulang kredensi profil. Kelas profil kredensional ini adalah:`ProfileCredentialsProvider`,,`DefaultCredentialsProvider`, dan `InstanceProfileCredentialsProvider` `ProfileTokenProvider.`

> **Note**
>
> Pemuatan ulang kredenal profil hanya berfungsi dengan pengaturan berikut di file profil:`aws_access_key_id`,`aws_secret_access_key`, dan. `aws_session_token` Pengaturan seperti`region`,`sso_session`,`sso_account_id`, dan `source_profile` diabaikan.

Untuk mengonfigurasi penyedia kredensi yang didukung untuk memuat ulang setelan profil, berikan instance [ProfileFileSupplier]ke metode `profileFile()` pembangun. Contoh kode berikut menunjukkan `ProfileCredentialsProvider` yang memuat ulang pengaturan kredensi dari profil. `[default]`

```
ProfileCredentialsProvider provider = ProfileCredentialsProvider
    .builder()
    .profileFile(ProfileFileSupplier.defaultSupplier())
```

```
    .build();

// Set up a service client with the provider instance.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .credentialsProvider(provider)
                    .build();

/*
    Before dynamoDbClient makes a request, it reloads the credentials settings
    by calling provider.resolveCredentials().
*/
```

Ketika `ProfileCredentialsProvider.resolveCredentials()` dipanggil, SDK for Java memuat ulang pengaturan. `ProfileFileSupplier.defaultSupplier()`adalah salah satu dari beberapa implementasi kenyamanan yang `ProfileFileSupplier` disediakan oleh SDK. Jika kasus penggunaan Anda membutuhkan, Anda dapat memberikan implementasi Anda sendiri.

Contoh berikut menunjukkan penggunaan metode `ProfileFileSupplier.reloadWhenModified()` kenyamanan. `reloadWhenModified()`mengambil `Path` parameter, yang memberi Anda fleksibilitas dalam menunjuk file sumber untuk konfigurasi daripada lokasi standar `~/.aws/credentials` (atau`config`).

Pengaturan akan dimuat ulang ketika `resolveCredentials()` dipanggil hanya jika SDK menentukan konten file telah dimodifikasi.

```
Path credentialsFilePath = ...

ProfileCredentialsProvider provider = ProfileCredentialsProvider
    .builder()
    .profileFile(ProfileFileSupplier.reloadWhenModified(credentialsFilePath,
 ProfileFile.Type.CREDENTIALS))
    .profileName("my-profile")
    .build();
/*
    A service client configured with the provider instance calls
 provider.resolveCredential()
    before each request.
*/
```

`ProfileFileSupplier.aggregate()`Metode ini menggabungkan isi dari beberapa file konfigurasi. Anda memutuskan apakah file dimuat ulang per panggilan ke `resolveCredentials()` atau pengaturan file diperbaiki pada saat pertama kali dibaca.

Contoh berikut menunjukkan `DefaultCredentialsProvider` yang menggabungkan pengaturan dua file yang berisi pengaturan profil. SDK memuat ulang pengaturan dalam file yang ditunjuk oleh `credentialsFilePath` variabel setiap kali `resolveCredentials()` dipanggil dan pengaturan telah berubah. Pengaturan dari `profileFile` objek tetap sama.

```
Path credentialsFilePath = ...;
ProfileFile profileFile = ...;

DefaultCredentialsProvider provider = DefaultCredentialsProvider
        .builder()
        .profileFile(ProfileFileSupplier.aggregate(
                ProfileFileSupplier.reloadWhenModified(credentialsFilePath,
 ProfileFile.Type.CREDENTIALS),
                ProfileFileSupplier.fixedProfileFile(profileFile)))
        .profileName("my-profile")
        .build();
/*
    A service client configured with the provider instance calls
 provider.resolveCredential()
    before each request.
*/
```

## Muat kredensi dari proses eksternal menggunakan AWS SDK for Java 2.x

> **Warning**
>
> Berikut ini menjelaskan metode sumber kredensi sementara dari proses eksternal.
> Ini berpotensi berbahaya, jadi lanjutkan dengan hati-hati. Kami menyarankan Anda menggunakan penyedia kredensi lain jika memungkinkan. Jika menggunakan opsi ini, kami sarankan Anda memastikan `config` file dikunci sebanyak mungkin menggunakan praktik terbaik keamanan untuk sistem operasi Anda.
> Pastikan alat kredensi kustom Anda tidak menulis informasi rahasia apa pun. `StdErr` SDKs dan AWS CLI dapat menangkap dan mencatat informasi tersebut, berpotensi mengeksposnya kepada pengguna yang tidak sah.

Dengan SDK for Java 2.x, Anda dapat memperoleh kredensi sementara dari proses eksternal untuk kasus penggunaan kustom. Ada dua cara untuk mengkonfigurasi fungsi ini.

## Gunakan **`credential_process`** pengaturan

Jika Anda memiliki metode yang menyediakan kredensil sementara, Anda dapat mengintegrasikannya dengan menambahkan `credential_process` pengaturan sebagai bagian dari definisi profil dalam file. `config` Nilai yang Anda tentukan harus menggunakan path lengkap ke file perintah. Jika jalur file berisi spasi apa pun, Anda harus mengelilinginya dengan tanda kutip.

SDK memanggil perintah persis seperti yang diberikan dan kemudian membaca data JSON dari. `stdout`

Contoh berikut menunjukkan penggunaan pengaturan ini untuk jalur file tanpa spasi dan jalur file dengan spasi.

Linux/macOS

Tidak ada spasi di jalur file

```
[profile process-credential-profile]
credential_process = /path/to/credential/file/credential_file.sh --custom-command
 custom_parameter
```

Spasi di jalur file

```
[profile process-credential-profile]
credential_process = "/path/with/space to/credential/file/credential_file.sh" --
custom-command custom_parameter
```

Windows

Tidak ada spasi di jalur file

```
[profile process-credential-profile]
credential_process = C:\Path\To\credentials.cmd --custom_command custom_parameter
```

Spasi di jalur file

```
[profile process-credential-profile]
```

```
credential_process = "C:\Path\With Space To\credentials.cmd" --custom_command
 custom_parameter
```

Cuplikan kode berikut menunjukkan cara membangun klien layanan yang menggunakan kredenal sementara yang didefinisikan sebagai bagian dari profil bernama. `process-credential-profile`

```
Region region = Region.US_WEST_2;
S3Client s3Client = S3Client.builder()
      .region(region)
      .credentialsProvider(ProfileCredentialsProvider.create("process-credential-
profile"))
      .build();
```

Untuk informasi rinci tentang menggunakan proses eksternal sebagai sumber kredensional sementara, lihat bagian kredensial proses di Panduan Referensi AWS SDKs dan Alat.

## Gunakan **`ProcessCredentialsProvider`**

Sebagai alternatif untuk menggunakan pengaturan dalam `config` file, Anda dapat menggunakan SDK `ProcessCredentialsProvider` untuk memuat kredenal sementara menggunakan Java.

Contoh berikut menunjukkan berbagai versi cara menentukan proses eksternal menggunakan `ProcessCredentialsProvider` dan mengkonfigurasi klien layanan yang menggunakan kredensil sementara.

Linux/macOS

Tidak ada spasi di jalur file

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("/path/to/credentials.sh optional_param1 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

### Spasi di jalur file

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("/path\\ with\\ spaces\\ to/credentials.sh optional_param1
 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

## Windows

### Tidak ada spasi di jalur file

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("C:\\Path\\To\\credentials.exe optional_param1 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
                      .build();
```

### Spasi di jalur file

```
ProcessCredentialsProvider credentials =
    ProcessCredentialsProvider
        .builder()
        .command("\"C:\\Path\\With Spaces To\\credentials.exe\" optional_param1
 optional_param2")
        .build();

S3Client s3 = S3Client.builder()
                      .region(Region.US_WEST_2)
                      .credentialsProvider(credentials)
```

```
                .build();
```

## Gunakan Peran IAM Di Mana Saja untuk otentikasi

IAM Roles Anywhere adalah Layanan AWS yang memungkinkan Anda memperoleh AWS kredensi sementara untuk beban kerja yang berjalan di luar. AWS Ini memungkinkan akses aman ke AWS sumber daya dari lingkungan cloud lokal atau lainnya.

Sebelum Anda dapat mengautentikasi permintaan dengan IAM Roles Anywhere, Anda harus terlebih dahulu mengumpulkan informasi yang diperlukan dan mengunduh alat pembantu kredenal. Dengan mengikuti petunjuk Memulai di Panduan Pengguna IAM Roles Anywhere, Anda dapat membuat artefak yang diperlukan.

SDK for Java tidak memiliki penyedia kredensional khusus untuk mengambil kredensil sementara dari IAM Roles Anywhere, tetapi Anda dapat menggunakan alat bantu kredensi bersama dengan salah satu opsi untuk mengambil kredensil dari proses eksternal.

Gunakan **`credential_process`** pengaturan di profil

Cuplikan berikut dalam file AWS konfigurasi bersama menunjukkan profil bernama `roles_anywhere` yang menggunakan setelan: `credential_process`

```
[profile roles_anywhere]
credential_process = ./aws_signing_helper credential-process \
  --certificate /path/to/certificate \
  --private-key /path/to/private-key \
  --trust-anchor-arn arn:aws:rolesanywhere:region:account:trust-anchor/TA_ID \
  --profile-arn arn:aws:rolesanywhere:region:account:profile/PROFILE_ID \
  --role-arn arn:aws:iam::account:role/role-name-with-path
```

Anda perlu mengganti teks yang ditampilkan dengan warna merah dengan nilai-nilai Anda setelah Anda mengumpulkan semua artefak. Elemen pertama dalam pengaturan,`aws_signing_helper`, adalah executable dari alat pembantu kredenal dan `credential-process` merupakan perintah.

Saat Anda mengonfigurasi klien layanan untuk menggunakan `roles_anywhere` profil—seperti yang ditunjukkan dalam kode berikut—SDK menyimpan kredensi sementara dan menyegarkannya sebelum kedaluwarsa:

```
S3Client s3Client = S3Client.builder()
    .credentialsProvider(ProfileCredentialsProvider.builder()
```

```
        .profileName("roles_anywhere").build())
    .build();
```

Konfigurasikan **`ProcessCredentialsProvider`**

Seperti yang ditunjukkan selanjutnya, Anda dapat menggunakan pendekatan kode saja dengan `ProcessCredentialsProvider` alih-alih menggunakan pengaturan profil:

```
ProcessCredentialsProvider processCredentialsProvider =
 ProcessCredentialsProvider.builder()
    .command("""
            ./aws_signing_helper credential-process \
            --certificate /path/to/certificate \
            --private-key /path/to/private-key \
            --trust-anchor-arn arn:aws:rolesanywhere:region:account:trust-anchor/TA_ID
 \
            --profile-arn arn:aws:rolesanywhere:region:account:profile/PROFILE_ID \
            --role-arn arn:aws:iam::account:role/role-name-with-path
        """).build();

S3Client s3Client = S3Client.builder()
    .credentialsProvider(processCredentialsProvider)
    .build();
```

Ganti teks yang ditampilkan dengan warna merah dengan nilai Anda setelah Anda mengumpulkan semua artefak.

## Menyediakan kredensi dalam kode menggunakan AWS SDK for Java 2.x

Jika rantai kredensi default atau penyedia atau rantai penyedia khusus atau khusus tidak berfungsi untuk aplikasi Anda, Anda dapat memberikan kredensi sementara secara langsung dalam kode. Ini bisa berupa kredensil peran IAM seperti yang dijelaskan di atas atau kredensil sementara yang diambil dari (). AWS Security Token Service AWS STS Jika Anda mengambil kredensi sementara menggunakan AWS STS, berikan kepada Layanan AWS klien seperti yang ditunjukkan dalam contoh kode berikut.

1. Asumsikan peran dengan meneleponStsClient.assumeRole().
2. Buat StaticCredentialsProviderobjek dan suplai dengan `AwsSessionCredentials` objek.
3. Konfigurasikan pembuat klien layanan dengan `StaticCredentialsProvider` dan bangun klien.

Contoh berikut membuat klien layanan Amazon S3 menggunakan kredenal sementara yang dikembalikan oleh AWS STS untuk peran yang diasumsikan IAM.

```
   // The AWS IAM Identity Center identity (user) who executes this method does not
have permission to list buckets.
   // The identity is configured in the [default] profile.
   public static void assumeRole(String roleArn, String roleSessionName) {
       // The IAM role represented by the 'roleArn' parameter can be assumed by
identities in two different accounts
       // and the role permits the user to only list buckets.

       // The SDK's default credentials provider chain will find the single sign-on
settings in the [default] profile.
       // The identity configured with the [default] profile needs permission to call
AssumeRole on the STS service.
       try {
           Credentials tempRoleCredentials;
           try (StsClient stsClient = StsClient.create()) {
               AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                       .roleArn(roleArn)
                       .roleSessionName(roleSessionName)
                       .build();

               AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
               tempRoleCredentials = roleResponse.credentials();
           }
           // Use the following temporary credential items for the S3 client.
           String key = tempRoleCredentials.accessKeyId();
           String secKey = tempRoleCredentials.secretAccessKey();
           String secToken = tempRoleCredentials.sessionToken();

           // List all buckets in the account associated with the assumed role
           // by using the temporary credentials retrieved by invoking
stsClient.assumeRole().
           StaticCredentialsProvider staticCredentialsProvider =
StaticCredentialsProvider.create(
                   AwsSessionCredentials.create(key, secKey, secToken));
           try (S3Client s3 = S3Client.builder()
                   .credentialsProvider(staticCredentialsProvider)
                   .build()) {
               List<Bucket> buckets = s3.listBuckets().buckets();
               for (Bucket bucket : buckets) {
                   System.out.println("bucket name: " + bucket.name());
```

```
                }
            }
        } catch (StsException | S3Exception e) {
            logger.error(e.getMessage());
            System.exit(1);
        }
    }
```

Set izin

Set izin berikut yang didefinisikan dalam AWS IAM Identity Center memungkinkan identitas (pengguna) untuk melakukan dua operasi berikut

1. `GetObject`Pengoperasian Layanan Penyimpanan Sederhana Amazon.
2. `AssumeRole`Pengoperasian AWS Security Token Service.

Tanpa mengasumsikan peran, `s3.listBuckets()` metode yang ditunjukkan dalam contoh akan gagal.

JSON

```
{
 "Version":"2012-10-17",
 "Statement": [
  {
   "Effect": "Allow",
   "Action": [
    "s3:GetObject",
    "sts:AssumeRole"
   ],
   "Resource": [
    "*"
   ]
  }
 ]
}
```

Asumsi peran

Kebijakan izin peran yang diasumsikan

Kebijakan izin berikut dilampirkan pada peran yang diasumsikan dalam contoh sebelumnya. Kebijakan izin ini memungkinkan kemampuan untuk mencantumkan semua bucket di akun yang sama dengan peran.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "s3:ListAllMyBuckets"
            ],
            "Resource": [
                "*"
            ]
        }
    ]
}
```

Kebijakan kepercayaan peran yang diasumsikan

Kebijakan kepercayaan berikut dilampirkan pada peran yang diasumsikan dalam contoh sebelumnya. Kebijakan ini memungkinkan peran diasumsikan oleh identitas (pengguna) dalam dua akun.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Principal": {
                "AWS": [
                    "arn:aws:iam::111122223333:root",
```

```
                    "arn:aws:iam::555555555555:root"
                ]
            },
            "Action": "sts:AssumeRole",
            "Condition": {}
        }
    ]
}
```

# Membaca kredensi peran IAM di Amazon EC2 menggunakan SDK for Java 2.x

Anda dapat menggunakan peran IAM untuk mengelola kredensional sementara untuk aplikasi yang berjalan pada instans EC2 dan membuat AWS CLI atau permintaan API. AWS Cara ini lebih dianjurkan daripada menyimpan kunci akses dalam instans EC2. Untuk menetapkan AWS peran ke instans EC2 dan membuatnya tersedia untuk semua aplikasinya, Anda membuat profil instance yang dilampirkan ke instance. Profil instans berisi peran dan memungkinkan program yang berjalan di instans EC2 mendapatkan kredensial sementara. Untuk informasi selengkapnya, lihat Gunakan peran IAM untuk memberikan izin ke aplikasi yang berjalan di instans Amazon EC2 dalam Panduan Pengguna IAM.

Topik ini memberikan informasi tentang cara mengatur aplikasi Java Anda untuk berjalan pada instans EC2 dan memungkinkan AWS SDK for Java 2.x untuk memperoleh kredensi IAM peran.

## Memperoleh kredensi peran IAM dari lingkungan

Jika aplikasi Anda membuat klien AWS layanan menggunakan metode (atau `create builder().build()` metode), SDK for Java menggunakan rantai penyedia kredensial default. Rantai penyedia kredensial default mencari lingkungan eksekusi untuk elemen konfigurasi yang dapat diperdagangkan SDK untuk kredenal sementara. the section called “Rantai penyedia kredensi default”Bagian ini menjelaskan proses pencarian lengkap.

Langkah terakhir dalam rantai penyedia default hanya tersedia ketika aplikasi Anda berjalan pada sebuah Amazon EC2 instance. Pada langkah ini, SDK menggunakan `InstanceProfileCredentialsProvider` untuk membaca peran IAM yang ditentukan dalam profil instans EC2. SDK kemudian memperoleh kredensi sementara untuk peran IAM tersebut.

Meskipun kredensi ini bersifat sementara dan pada akhirnya akan kedaluwarsa, `InstanceProfileCredentialsProvider` secara berkala menyegarkannya untuk Anda sehingga mereka terus mengizinkan akses ke. AWS

## Memperoleh kredensi peran IAM secara terprogram

Sebagai alternatif dari rantai penyedia kredensial default yang pada akhirnya menggunakan `InstanceProfileCredentialsProvider` on EC2, Anda dapat mengonfigurasi klien layanan secara eksplisit dengan file. `InstanceProfileCredentialsProvider` Pendekatan ini ditunjukkan dalam cuplikan berikut.

```
S3Client s3 = S3Client.builder()
       .credentialsProvider(InstanceProfileCredentialsProvider.create())
       .build();
```

## Dapatkan kredensi peran IAM dengan aman

Secara default, instans EC2 menjalankan IMDS (Layanan Metadata Instans) yang memungkinkan SDK mengakses informasi seperti `InstanceProfileCredentialsProvider` peran IAM yang telah dikonfigurasi. Instans EC2 menjalankan dua versi IMDS secara default:

- Layanan Metadata Instance Versi 1 (IMDSv1) — sebuah metode request/response
- Instance Metadata Service Version 2 (IMDSv2) — metode berorientasi sesi

IMDSv2 adalah pendekatan yang lebih aman daripada IMDSv1.

Secara default, Java SDK pertama kali mencoba IMDSv2 untuk mendapatkan peran IAM, tetapi jika gagal, ia mencoba. IMDSv1 Namun, karena kurang IMDSv1 aman, AWS merekomendasikan penggunaan IMDSv2 hanya dan untuk menonaktifkan SDK agar tidak mencoba IMDSv1.

Untuk menggunakan pendekatan yang lebih aman, nonaktifkan SDK agar tidak digunakan IMDSv1 dengan memberikan salah satu pengaturan berikut dengan nilai. `true`

- Variabel lingkungan: `AWS_EC2_METADATA_V1_DISABLED`
- Properti sistem JVM: aws. `disableEc2MetadataV1`
- Pengaturan file konfigurasi bersama: `ec2_metadata_v1_disabled`

Dengan salah satu pengaturan ini disetel `ketrue`, SDK tidak memuat kredensi peran IMDS dengan menggunakan IMDSv1 jika panggilan awal gagal. IMDSv2

# Konfigurasikan perilaku coba lagi di AWS SDK for Java 2.x

Panggilan ke Layanan AWS terkadang gagal karena alasan yang tidak terduga. Kesalahan tertentu, seperti pelambatan (laju terlampaui) atau kesalahan sementara, mungkin berhasil jika panggilan dicoba ulang. Ini AWS SDK for Java 2.x memiliki mekanisme bawaan untuk mendeteksi kesalahan tersebut dan secara otomatis mencoba kembali panggilan yang diaktifkan secara default untuk semua klien.

Halaman ini menjelaskan cara kerjanya, cara mengonfigurasi mode yang berbeda, dan menyesuaikan perilaku coba lagi.

## Coba lagi strategi

Strategi coba lagi adalah mekanisme yang digunakan dalam SDK untuk mengimplementasikan percobaan ulang. Setiap klien SDK memiliki strategi coba ulang yang dibuat pada waktu pembuatan yang tidak dapat dimodifikasi setelah klien dibuat.

Strategi coba lagi memiliki tanggung jawab sebagai berikut.

- Klasifikasi pengecualian sebagai dapat dicoba kembali atau tidak.
- Hitung penundaan yang disarankan untuk menunggu sebelum upaya berikutnya.
- Pertahankan bucket token yang menyediakan mekanisme untuk menghentikan percobaan ulang ketika sebagian besar permintaan gagal dan percobaan ulang tidak berhasil.

> **Note**
>
> Sebelum rilis strategi coba lagi dengan SDK versi 2.26.0, kebijakan coba lagi menyediakan mekanisme coba lagi di SDK. API kebijakan coba lagi terdiri dari `RetryPolicy`kelas inti dalam `software.amazon.awssdk.core.retry` paket, sedangkan `software.amazon.awssdk.retries` paket berisi elemen API strategi coba lagi.
> API strategi coba lagi diperkenalkan sebagai bagian dari upaya AWS luas untuk menyatukan antarmuka dan perilaku komponen inti dari. SDKs

SDK for Java 2.x memiliki tiga strategi coba ulang bawaan: standar, warisan, dan adaptif. Ketiga strategi coba lagi telah dikonfigurasi sebelumnya untuk mencoba lagi pada serangkaian pengecualian yang dapat dicoba ulang. Contoh kesalahan yang dapat dicoba ulang adalah batas waktu soket, pelambatan sisi layanan, kegagalan kunci konkurensi atau optimis, dan kesalahan layanan sementara.

## Strategi coba lagi standar

Strategi coba lagi standar adalah `RetryStrategy` implementasi yang direkomendasikan untuk kasus penggunaan normal. Berbeda dengan`AdaptiveRetryStrategy`, strategi standar umumnya berguna di semua kasus penggunaan coba lagi.

Secara default, strategi coba lagi standar melakukan hal berikut.

- Mencoba lagi pada kondisi yang dikonfigurasi pada waktu pembuatan. Anda dapat menyesuaikan ini dengan`StandardRetryStrategy.Builder`#`retryOnException`.
- Mencoba lagi 2 kali untuk total 3 upaya. Anda dapat menyesuaikan ini dengan`StandardRetryStrategy.Builder#maxAttempts(int)`.
- Untuk pengecualian non-throttling, ia menggunakan strategi `BackoffStrategy`#`exponentialDelay` backoff, dengan penundaan dasar 100 milidetik dan penundaan maksimal 20 detik. Anda dapat menyesuaikan ini dengan`StandardRetryStrategy.Builder#backoffStrategy`.
- Untuk pengecualian throttling, ia menggunakan strategi `BackoffStrategy#exponentialDelay` backoff, dengan penundaan dasar 1 detik dan penundaan maksimal 20 detik. Anda dapat menyesuaikan ini dengan`StandardRetryStrategy.Builder#throttlingBackoffStrategy`.
- Melakukan pemutusan sirkuit (menonaktifkan percobaan ulang) jika terjadi kegagalan hilir yang tinggi. Upaya pertama selalu dijalankan, hanya percobaan ulang yang dinonaktifkan. Sesuaikan dengan`StandardRetryStrategy.Builder#circuitBreakerEnabled`.

## Strategi coba lagi warisan

Strategi coba lagi warisan adalah `RetryStrategy` untuk kasus penggunaan normal, namun tidak digunakan lagi untuk mendukung. `StandardRetryStrategy` Ini adalah strategi coba ulang default yang digunakan oleh klien ketika Anda tidak menentukan strategi lain.

Hal ini ditandai dengan memperlakukan pengecualian throttling dan non-throttling secara berbeda, untuk pengecualian throttling, penundaan dasar untuk backoff lebih besar (500 ms) daripada

penundaan dasar untuk pengecualian non-throttling (100 md), dan pengecualian throttling tidak memengaruhi status bucket token.

Pengalaman menggunakan strategi ini dalam skala di dalam AWS telah menunjukkan bahwa tidak terlalu baik daripada strategi coba ulang standar. Selain itu, gagal melindungi layanan hilir dari badai coba lagi dan dapat menyebabkan kelaparan sumber daya di sisi klien.

Secara default, strategi coba lagi lawas melakukan hal berikut.

- Mencoba lagi pada kondisi yang dikonfigurasi pada waktu pembuatan. Anda dapat menyesuaikan ini dengan`LegacyRetryStrategy.Builder#retryOnException`.
- Mencoba lagi 3 kali untuk total 4 upaya. Anda dapat menyesuaikan ini dengan`LegacyRetryStrategy.Builder#maxAttempts(int)`.
- Untuk pengecualian non-throttling, ia menggunakan strategi `BackoffStrategy#exponentialDelay` backoff, dengan penundaan dasar 100 milidetik dan penundaan maksimal 20 detik. Anda dapat menyesuaikan ini dengan `LegacyRetryStrategy.Builder#backoffStrategy.`
- Untuk pengecualian throttling, ia menggunakan strategi `BackoffStrategy#exponentialDelay` backoff, dengan penundaan dasar 500 milidetik dan penundaan maksimal 20 detik. Anda dapat menyesuaikan ini dengan`LegacyRetryStrategy.Builder#throttlingBackoffStrategy`.
- Melakukan pemutusan sirkuit (menonaktifkan percobaan ulang) jika terjadi kegagalan hilir yang tinggi. Pemutusan sirkuit tidak pernah mencegah upaya pertama yang berhasil. Anda dapat menyesuaikan perilaku ini dengan`LegacyRetryStrategy.Builder#circuitBreakerEnabled`.
- Keadaan pemutus sirkuit tidak terpengaruh oleh pengecualian pelambatan.

## Strategi coba lagi adaptif

Strategi coba lagi adaptif adalah `RetryStrategy` untuk kasus penggunaan dengan tingkat kendala sumber daya yang tinggi.

Strategi coba ulang adaptif mencakup semua fitur strategi standar dan menambahkan pembatas tingkat sisi klien yang mengukur tingkat permintaan yang dibatasi dibandingkan dengan permintaan yang tidak dibatasi. Strategi ini menggunakan pengukuran ini untuk memperlambat permintaan dalam upaya untuk tetap berada dalam bandwidth yang aman, idealnya menyebabkan kesalahan pelambatan nol.

Secara default, strategi coba ulang adaptif melakukan hal berikut.

- Mencoba lagi pada kondisi yang dikonfigurasi pada waktu pembuatan. Anda dapat menyesuaikan ini dengan`AdaptiveRetryStrategy.Builder#retryOnException`.
- Mencoba lagi 2 kali untuk total 3 upaya. Anda dapat menyesuaikan ini dengan`AdaptiveRetryStrategy.Builder#maxAttempts(int)`.
- Menggunakan penundaan backoff dinamis yang didasarkan pada beban saat ini terhadap sumber daya hilir.
- Melakukan pemutusan sirkuit (menonaktifkan percobaan ulang) ketika ada banyak kegagalan hilir. Pemutusan sirkuit dapat mencegah upaya kedua dalam skenario pemadaman untuk melindungi layanan hilir.

**Warning**

Strategi coba ulang adaptif mengasumsikan bahwa klien bekerja melawan satu sumber daya (misalnya, satu tabel DynamoDB atau satu bucket Amazon S3).
Jika Anda menggunakan satu klien untuk beberapa sumber daya, pembatasan atau pemadaman yang terkait dengan satu sumber daya menghasilkan peningkatan latensi dan kegagalan saat klien mengakses semua sumber daya lainnya. Saat Anda menggunakan strategi coba ulang adaptif, kami sarankan Anda menggunakan satu klien untuk setiap sumber daya.
Kami juga menyarankan Anda menggunakan strategi ini dalam situasi di mana semua klien menggunakan strategi coba ulang adaptif terhadap sumber daya.

**Important**

Rilis strategi coba lagi dengan 2.26.0 dari Java SDK mencakup nilai enumerasi baru. `RetryMode.ADAPTIVE_V2` ADAPTIVE_V2Mode mengoreksi kesalahan yang gagal menunda upaya pertama saat kesalahan pelambatan terdeteksi sebelumnya.
Dengan rilis 2.26.0, pengguna secara otomatis mendapatkan perilaku `ADAPTIVE_V2` mode dengan mengatur mode seperti `adaptive` variabel lingkungan, properti sistem, atau pengaturan profil. Tidak ada `adaptive_v2` nilai untuk pengaturan ini. Lihat the section called “Tentukan strategi” bagian berikut untuk cara mengatur mode.
Pengguna bisa mendapatkan perilaku sebelumnya dengan mengatur mode dalam kode menggunakan`RetryMode.ADAPTIVE`.

### Ringkasan: Perbandingan nilai default strategi coba lagi

Tabel berikut menunjukkan nilai default untuk properti dari setiap strategi coba lagi.

| Strategi | Upaya maksimal | Penundaan dasar untuk kesalahan non-throttling | Penundaan dasar untuk kesalahan pelambatan | Ukuran ember token | Biaya token per percobaan ulang non-throttling | Biaya token per throttling coba lagi |
|---|---|---|---|---|---|---|
| Standar | 3 | 100 ms | 1000 ms | 500 | 5 | 5 |
| Warisan | 4 | 100 ms | 500 ms | 500 | 5 | 0 |
| Adaptif | 3 | 100 ms | 100 ms | 500 | 5 | 5 |

> **Note**
>
> Klien DynamoDB menggunakan hitungan coba ulang maksimum default 8 untuk semua strategi coba lagi, yang lebih tinggi dari nilai yang ditunjukkan pada tabel di atas untuk klien lain. Layanan AWS

## Tentukan strategi

Anda memiliki empat cara untuk menentukan strategi untuk klien layanan Anda.

### Dalam kode

Saat membangun klien, Anda dapat mengonfigurasi ekspresi lambda dengan strategi coba lagi. Cuplikan berikut mengonfigurasi strategi coba ulang standar yang menggunakan nilai default pada klien layanan DynamoDB.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(RetryMode.STANDARD))
        .build();
```

Anda dapat menentukan `RetryMode.LEGACY` atau `RetryMode.ADAPTIVE` menggantikan`RetryMode.STANDARD`.

### Sebagai pengaturan profil

Sertakan `retry_mode` sebagai pengaturan profil dalam file AWS konfigurasi bersama. Tentukan `standard`legacy,, atau `adaptive` sebagai nilai. Saat ditetapkan sebagai pengaturan profil, semua klien layanan yang dibuat saat profil aktif menggunakan strategi coba lagi yang ditentukan dengan nilai default. Anda dapat mengganti pengaturan ini dengan mengonfigurasi strategi coba lagi dalam kode seperti yang ditunjukkan sebelumnya.

Dengan profil berikut, semua klien layanan menggunakan strategi coba ulang standar.

```
[profile dev]
region = us-east-2
retry_mode = standard
```

### Sebagai properti sistem JVM

Anda dapat mengonfigurasi status coba lagi untuk semua klien layanan, kecuali diganti dalam kode, dengan menggunakan properti sistem. `aws.retryMode` Tentukan `standard`legacy,, atau `adaptive` sebagai nilai.

Gunakan `-D` sakelar saat Anda memanggil Java seperti yang ditunjukkan pada perintah berikut.

```
java -Daws.retryMode=standard ...
```

Atau, atur properti sistem dalam kode sebelum membuat klien apa pun seperti yang ditunjukkan pada cuplikan berikut.

```
public void main(String[] args) {
    // Set the property BEFORE any AWS service clients are created.
    System.setProperty("aws.retryMode", "standard");
    ...
}
```

### Dengan variabel lingkungan

Anda juga dapat menggunakan variabel `AWS_RETRY_MODE` lingkungan dengan nilai`standard`,`legacy`, atau`adaptive`. Seperti pengaturan profil atau properti sistem JVM, variabel

lingkungan mengonfigurasi semua klien layanan dengan mode coba lagi yang ditentukan kecuali Anda mengonfigurasi klien dalam kode.

Perintah berikut menetapkan mode coba lagi `standard` untuk sesi shell saat ini.

```
export AWS_RETRY_MODE=standard
```

## Sesuaikan strategi

Anda dapat menyesuaikan strategi coba lagi dengan menetapkan upaya maksimum, strategi backoff, dan pengecualian yang dapat dicoba ulang. Anda dapat menyesuaikan ketika Anda membangun strategi coba lagi atau ketika Anda membangun klien dengan menggunakan pembangun override yang memungkinkan penyempurnaan lebih lanjut dari strategi yang dikonfigurasi.

### Sesuaikan upaya maksimum

Anda dapat mengkonfigurasi jumlah maksimum upaya selama konstruksi klien seperti yang ditunjukkan dalam pernyataan berikut. Pernyataan berikut menyesuaikan strategi coba ulang default untuk klien hingga maksimal 5 percobaan - percobaan pertama ditambah 4 percobaan ulang.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(b -> b.maxAttempts(5)))
        .build();
```

Atau, Anda dapat membangun strategi dan memberikannya kepada klien seperti pada contoh kode berikut. Kode berikut menggantikan upaya maksimum 3 standar dengan 10 dan mengkonfigurasi klien DynamoDB dengan strategi yang disesuaikan.

```
StandardRetryStrategy strategy = AwsRetryStrategy.standardRetryStrategy()
         .toBuilder()
         .maxAttempts(10)
         .build();
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(strategy))
        .build();
```

> **Warning**
>
> Kami menyarankan Anda mengonfigurasi setiap klien dengan `RetryStrategy` instance unik. Jika sebuah `RetryStrategy` instance dibagikan, kegagalan di satu klien dapat memengaruhi perilaku coba lagi di klien lainnya.

Anda juga dapat mengatur jumlah upaya maksimum untuk semua klien dengan menggunakan pengaturan eksternal alih-alih kode. Anda mengonfigurasi pengaturan ini seperti yang dijelaskan di the section called “Tentukan strategi” bagian.

### Sesuaikan pengecualian yang dapat dicoba ulang

Anda dapat mengonfigurasi pengecualian tambahan yang memicu percobaan ulang selama konstruksi klien. Kustomisasi ini disediakan untuk kasus tepi di mana pengecualian dilemparkan yang tidak termasuk dalam kumpulan default pengecualian yang dapat dicoba ulang.

`retryOnExceptionOrCause`Metode `retryOnException` dan menambahkan jenis pengecualian baru ke kumpulan pengecualian yang dapat dicoba ulang; mereka tidak menggantikan set default. Ini memungkinkan Anda untuk memperluas perilaku coba lagi sambil mempertahankan kemampuan coba ulang default SDK.

`retryOnExceptionOrCause`Metode ini menambahkan pengecualian yang dapat dicoba ulang jika SDK melempar pengecualian langsung atau jika pengecualian dibungkus sebagai penyebab dalam pengecualian lain.

Cuplikan kode berikut menunjukkan metode yang Anda gunakan untuk menyesuaikan pengecualian coba lagi-- dan. `retryOnException` `retryOnExceptionOrCause` `retryOnExceptionOrCause`Metode menambahkan pengecualian yang dapat dicoba ulang jika SDK melempar pengecualian langsung atau jika pengecualian dibungkus.

```
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(
                b -> b.retryOnException(EdgeCaseException.class)
                      .retryOnExceptionOrCause(WrappedEdgeCaseException.class)))
        .build();
```

> **Important**
>
> Percobaan ulang dinonaktifkan untuk klien asinkron Kinesis saat Anda memanggil metode, terlepas dari `subscribeToShard`konfigurasi strategi coba ulang.

### Sesuaikan strategi backoff

Anda dapat membangun strategi backoff dan menyediakannya kepada klien.

Kode berikut membangun sebuah `BackoffStrategy` yang menggantikan strategi backoff penundaan eksponensial strategi standar default.

```
BackoffStrategy backoffStrategy =
        BackoffStrategy.exponentialDelay(Duration.ofMillis(150),  // The base delay.
                                         Duration.ofSeconds(15)); // The maximum delay.
DynamoDbClient client = DynamoDbClient.builder()
        .overrideConfiguration(o -> o.retryStrategy(
                b -> b.backoffStrategy(backoffStrategy)))
        .build();
```

## Migrasi dari ke **`RetryPolicy`** **`RetryStrategy`**

`RetryPolicy`(API kebijakan coba lagi) akan didukung untuk masa mendatang. Jika saat ini Anda menggunakan instance `RetryPolicy` untuk mengkonfigurasi klien Anda, semuanya akan berfungsi seperti sebelumnya. Di belakang layar, Java SDK menyesuaikannya dengan file. `RetryStrategy` Antarmuka strategi coba lagi yang baru menyediakan fungsionalitas yang sama seperti `RetryPolicy` tetapi dibuat dan dikonfigurasi secara berbeda.

# Konfigurasikan batas waktu di AWS SDK for Java 2.x

AWS SDK for Java 2.x Ini menyediakan beberapa lapisan konfigurasi batas waktu untuk membantu Anda membangun aplikasi yang tangguh. SDK menawarkan berbagai jenis batas waktu yang bekerja sama untuk mengoptimalkan kinerja dan keandalan aplikasi Anda.

Ada dua kategori utama batas waktu di SDK:

- Batas Waktu Klien Layanan - Batas waktu tingkat tinggi yang mengontrol operasi API
- HTTP Client Timeouts - Batas waktu tingkat rendah yang mengontrol komunikasi jaringan

# Batas waktu klien layanan

Batas waktu klien layanan beroperasi pada tingkat API dan mengontrol keseluruhan perilaku operasi layanan, termasuk percobaan ulang dan beberapa upaya.

## Batas waktu panggilan API

Batas waktu panggilan API menetapkan jumlah waktu maksimum untuk seluruh operasi API, termasuk semua upaya coba lagi. Batas waktu ini memberikan batasan keras pada berapa lama aplikasi Anda menunggu operasi lengkap selesai.

```
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(ClientOverrideConfiguration.builder()
        .apiCallTimeout(Duration.ofMinutes(2))  // Total time for entire operation,
 such as when you call the getObject method.
        .build())
    .build();
```

Karakteristik utama:

- Termasuk semua upaya coba lagi.
- Termasuk waktu yang dihabiskan menunggu di antara percobaan ulang.
- Memberikan waktu tunggu maksimum mutlak.
- Mencegah operasi berjalan tanpa batas waktu.

## Batas waktu percobaan panggilan API

Batas waktu percobaan panggilan API menetapkan waktu maksimum untuk satu upaya operasi API. Jika batas waktu ini terlampaui, SDK akan mencoba ulang operasi (jika percobaan ulang dikonfigurasi) daripada gagal seluruh panggilan.

```
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(ClientOverrideConfiguration.builder()
        .apiCallAttemptTimeout(Duration.ofSeconds(30))  // Time for single attempt.
        .build())
    .build();
```

Karakteristik utama:

- Berlaku untuk upaya individu saja.
- Mengaktifkan kegagalan cepat dan coba lagi untuk permintaan lambat.
- Harus lebih pendek dari batas waktu panggilan API.
- Membantu mengidentifikasi dan memulihkan dari masalah sementara.

## Konfigurasikan batas waktu klien layanan

Anda dapat mengonfigurasi batas waktu klien layanan secara global untuk semua operasi atau per permintaan:

Konfigurasi Global:

```
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(b -> b
        .apiCallTimeout(Duration.ofSeconds(105L))
        .apiCallAttemptTimeout(Duration.ofSeconds(25L)))
    .build();
// When you use the s3Client for an API operation, the SDK uses the configured timeout
 values.
```

Konfigurasi Per-Permintaan:

```
S3Client basicS3Client = S3Client.create();

// The following configuration uses the same settings as shown before, but these
 settings
// apply to only the `putObject` call. When you use `basicS3Client` in another API call
 without
// supplying the override configuration, there are no API timeout limits. No timeout
 limits is the default for the SDK.
AwsRequestOverrideConfiguration overrideConfiguration =
 AwsRequestOverrideConfiguration.builder()
    .apiCallTimeout(Duration.ofSeconds(105L))
    .apiCallAttemptTimeout(Duration.ofSeconds(25L))
    .build();

basicS3Client.putObject(b -> b
        .bucket("amzn-s3-demo-bucket")
        .key("example-key")
        .overrideConfiguration(overrideConfiguration),
```

```
    RequestBody.fromString("test"));
```

### Praktik terbaik untuk batas waktu API

SDK for Java 2.x tidak menetapkan batas waktu panggilan API atau batas waktu percobaan panggilan API individual secara default. Tetapkan batas waktu untuk upaya individu dan seluruh permintaan. Ini membantu aplikasi Anda gagal dengan cepat ketika masalah sementara menyebabkan upaya permintaan memakan waktu lebih lama atau ketika masalah jaringan yang fatal terjadi.

## Batas waktu klien HTTP

Batas waktu klien HTTP beroperasi pada tingkat jaringan dan mengontrol berbagai aspek komunikasi HTTP. Batas waktu ini bervariasi tergantung pada implementasi klien HTTP yang Anda gunakan.

### Batas waktu koneksi

Batas waktu koneksi mengontrol berapa lama menunggu saat membuat koneksi baru ke titik Layanan AWS akhir.

```
// Available with all HTTP clients.
ApacheHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(5L))
    .build();
```

Tujuan:

- Mencegah tergantung pada masalah konektivitas jaringan.
- Gagal cepat ketika layanan tidak dapat dijangkau.
- Penting untuk aplikasi yang membutuhkan penanganan kesalahan responsif.

### Batas waktu soket (Apache dan URLConnection klien)

Batas waktu soket mengontrol berapa lama menunggu data pada koneksi yang sudah ada.

```
ApacheHttpClient.builder()
    .socketTimeout(Duration.ofSeconds(30L))  // Time to wait for response data.
    .build();
```

### Baca dan tulis batas waktu (klien Netty)

Klien Netty menyediakan batas waktu terpisah untuk operasi baca dan tulis:

```
NettyNioAsyncHttpClient.builder()
    .readTimeout(Duration.ofSeconds(30L))   // Reading response data.
    .writeTimeout(Duration.ofSeconds(30L))  // Writing request data.
    .build();
```

### Batas waktu negosiasi TLS (klien Netty)

Mengontrol waktu yang diizinkan untuk TLS/SSL jabat tangan:

```
NettyNioAsyncHttpClient.builder()
    .tlsNegotiationTimeout(Duration.ofSeconds(3L))
    .build();
```

### Batas waktu kolam koneksi

Beberapa klien HTTP menyediakan batas waktu untuk operasi kumpulan koneksi:

```
ApacheHttpClient.builder()
    .connectionAcquisitionTimeout(Duration.ofSeconds(10L))  // Wait for pool
 connection.
    .connectionTimeToLive(Duration.ofMinutes(5L))           // Maximum connection age.
    .connectionMaxIdleTime(Duration.ofSeconds(60L))         // Maximum idle time.
    .build()
```

Konfigurasikan klien HTTPIni berisi informasi lebih lanjut tentang klien HTTP di AWS SDK for Java 2.x

## Interaksi dan hierarki batas waktu

Memahami bagaimana batas waktu yang berbeda berinteraksi sangat penting untuk konfigurasi yang tepat:

### Hirarki batas waktu

```
API Call Timeout (2 minutes)
### Retry Attempt 1
#   ### API Call Attempt Timeout (45 seconds)
```

```
#   ### HTTP Client Timeouts
#       ### Connection Timeout (5 seconds)
#       ### TLS Negotiation Timeout (3 seconds)
#       ### Read/Write Timeout (30 seconds)
### Retry Attempt 2
#   ### [Same structure as Attempt 1]
### Retry Attempt 3
    ### [Same structure as Attempt 1]
```

### Aturan konfigurasi

Batas waktu panggilan API ≥ batas waktu percobaan panggilan API

```
// Correct configuration.
.apiCallTimeout(Duration.ofMinutes(2))         // 120 seconds.
.apiCallAttemptTimeout(Duration.ofSeconds(30)) // 30 seconds.
```

Batas waktu upaya panggilan API ≥ batas waktu klien HTTP

```
// HTTP client timeouts must be less than attempt timeout.
.apiCallAttemptTimeout(Duration.ofSeconds(30L))   // 30 seconds.
// HTTP client configuration.
.connectionTimeout(Duration.ofSeconds(5L))        // 5 seconds.
.readTimeout(Duration.ofSeconds(25L))             // 25 seconds (< 30).
```

Akun untuk beberapa upaya

```
// If you have 3 retry attempts, each taking up to 30 seconds
// API call timeout must be at least 90 seconds plus overhead.
.apiCallTimeout(Duration.ofMinutes(2L))          // 120 seconds.
.apiCallAttemptTimeout(Duration.ofSeconds(30))   // 30 seconds per attempt.
```

## Gunakan default konfigurasi cerdas

SDK menyediakan default cerdas yang secara otomatis mengonfigurasi nilai batas waktu yang sesuai:

```
// Enable smart defaults.
S3Client client = S3Client.builder()
    .defaultsMode(DefaultsMode.AUTO)  // Automatically choose appropriate defaults.
```

```
    .build();

// Available modes:
// - STANDARD: Balanced defaults
// - IN_REGION: Optimized for same-region calls
// - CROSS_REGION: Optimized for cross-region calls
// - MOBILE: Optimized for mobile applications
// - AUTO: Automatically detect and choose appropriate mode
// - LEGACY: Provides settings that were used before smart defaults existed.
```

Smart default secara otomatis mengkonfigurasi:

- Nilai batas waktu koneksi.
- Nilai batas waktu negosiasi TLS.
- Pengaturan klien lainnya.

## Ringkasan

Konfigurasi batas waktu yang efektif AWS SDK for Java 2.x memerlukan pemahaman interaksi antara batas waktu klien layanan dan batas waktu klien HTTP:

1. Batas waktu klien layanan mengontrol perilaku API tingkat tinggi.
2. Batas waktu klien HTTP mengontrol perilaku jaringan tingkat rendah.
3. Hirarki yang tepat memastikan batas waktu bekerja sama secara efektif.
4. Smart default memberikan titik awal yang baik untuk sebagian besar aplikasi.

Konfigurasikan batas waktu dengan tepat untuk kasus penggunaan Anda untuk membangun aplikasi yang tahan terhadap masalah jaringan dan responsif terhadap pengguna.

# Mengkonfigurasi fitur observabilitas di AWS SDK for Java 2.x

Telemetri adalah pengumpulan dan transmisi data otomatis dari sumber jarak jauh yang memungkinkan Anda memantau dan menganalisis perilaku sistem Anda.

Observabilitas dalam SDK for Java 2.x memberi pengembang wawasan komprehensif tentang bagaimana aplikasi Java mereka Layanan AWS berinteraksi melalui data telemetri kaya yang menangkap siklus hidup permintaan lengkap. Kemampuan ini memungkinkan Anda mengumpulkan, menganalisis, dan memvisualisasikan sinyal telemetri seperti metrik, log, dan jejak, memungkinkan

Anda memantau pola permintaan, mengidentifikasi kemacetan, dan mengoptimalkan interaksi aplikasi Anda untuk meningkatkan keandalan dan kinerja. AWS

Topik


- Publikasikan metrik SDK dari AWS SDK for Java 2.x
- AWS SDK for Java 2.x Aplikasi pemantauan
- Logging dengan SDK for Java 2.x


# Publikasikan metrik SDK dari AWS SDK for Java 2.x

Dengan AWS SDK for Java 2.x Anda dapat mengumpulkan metrik tentang klien layanan dan permintaan dalam aplikasi Anda, menganalisis output di Amazon CloudWatch Logs, dan kemudian menindaklanjutinya.

Secara default, koleksi metrik dinonaktifkan di SDK. Topik ini membantu Anda mengaktifkan dan mengonfigurasinya.

## Memulai dengan metrik SDK

Untuk mengaktifkan pengumpulan metrik dalam aplikasi Anda, pilih implementasi `MetricPublisher` antarmuka yang sesuai berdasarkan kasus penggunaan Anda dan ikuti petunjuk penyiapan terperinci:

Untuk aplikasi yang berjalan lama:

- Gunakan `CloudWatchMetricPublisher`
- Lihat Menerbitkan metrik SDK dari aplikasi yang sudah berjalan lama untuk petunjuk penyiapan lengkap, contoh kode, dan opsi konfigurasi.

Untuk AWS Lambda fungsi:

- Gunakan `EmfMetricLoggingPublisher`
- Lihat Menerbitkan metrik SDK untuk AWS Lambda fungsi untuk petunjuk penyiapan lengkap, dependensi, dan konfigurasi khusus Lambda.

Untuk pemecahan masalah dan keluaran konsol:

- Gunakan `LoggingMetricPublisher`

- Lihat Metrik SDK keluaran ke konsol untuk pengembangan dan debugging untuk petunjuk penyiapan, opsi pemformatan, dan contoh untuk pengembangan dan pemecahan masalah lokal.

## Pratinjau implementasi cepat

Inilah yang mengaktifkan metrik untuk setiap kasus penggunaan:

Aplikasi yang berjalan lama:

```
MetricPublisher metricsPub = CloudWatchMetricPublisher.create();
DynamoDbClient ddb = DynamoDbClient.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
    .build();
```

Fungsi Lambda:

```
EmfMetricLoggingPublisher emfPublisher = EmfMetricLoggingPublisher.builder()
    .namespace("MyApp")
    .build();
DynamoDbClient dynamoDb = DynamoDbClient.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(emfPublisher))
    .build();
```

Pengembangan dan debugging:

```
MetricPublisher loggingPublisher = LoggingMetricPublisher.create();
S3Client s3 = S3Client.builder()
    .overrideConfiguration(c -> c.addMetricPublisher(loggingPublisher))
    .build();
```

## Batasan metrik klien S3 AWS berbasis CRT

Klien S3 AWS berbasis CRT saat ini tidak mendukung pengumpulan metrik SDK. Builder untuk instance klien S3 AWS berbasis CRT, `S3CrtAsyncClientBuilder`, tidak menyediakan metode untuk mengonfigurasi penerbit metrik.

## Kapan metrik tersedia?

Metrik umumnya tersedia dalam waktu 5-10 menit setelah SDK for Java memancarkannya. Untuk akurasi dan up-to-date metrik, periksa Cloudwatch setidaknya 10 menit setelah memancarkan metrik dari aplikasi Java Anda.

## Informasi apa yang dikumpulkan?

Koleksi metrik meliputi:

- Jumlah permintaan API, termasuk apakah mereka berhasil atau gagal
- Informasi tentang panggilan Layanan AWS Anda dalam permintaan API, termasuk pengecualian yang dikembalikan
- Durasi untuk berbagai operasi seperti Marshalling, Signing, dan permintaan HTTP
- Metrik klien HTTP, seperti jumlah koneksi terbuka, jumlah permintaan yang tertunda, dan nama klien HTTP yang digunakan

> **Note**
>
> Metrik yang tersedia bervariasi menurut klien HTTP.

Untuk daftar lengkapnya, lihat Metrik klien layanan.

## Bagaimana saya bisa menggunakan informasi ini?

Anda dapat menggunakan metrik yang dikumpulkan SDK untuk memantau klien layanan dalam aplikasi Anda. Anda dapat melihat tren penggunaan secara keseluruhan, mengidentifikasi anomali, meninjau pengecualian klien layanan yang dikembalikan, atau menggali untuk memahami masalah tertentu. Menggunakan Amazon CloudWatch Logs, Anda juga dapat membuat alarm untuk memberi tahu Anda segera setelah aplikasi Anda mencapai kondisi yang Anda tentukan.

Untuk informasi selengkapnya, lihat Menggunakan Metrik CloudWatch Log Amazon dan Menggunakan Alarm CloudWatch Log Amazon di Panduan Pengguna CloudWatch Log Amazon.

## Publikasikan metrik SDK dari aplikasi yang berjalan lama menggunakan AWS SDK for Java 2.x

Karena `CloudWatchMetricPublisher` implementasi menggabungkan dan mengunggah metrik secara berkala ke Amazon CloudWatch dengan penundaan, penggunaannya paling cocok untuk aplikasi yang berjalan lama.

Pengaturan default penerbit metrik dimaksudkan untuk meminimalkan penggunaan dan CloudWatch biaya memori, sambil tetap memberikan sejumlah wawasan yang berguna ke dalam data metrik.

Set-up

Sebelum Anda dapat mengaktifkan dan menggunakan metrik dengan menggunakan`CloudWatchMetricPublisher`, selesaikan langkah-langkah berikut.

Langkah 1: Tambahkan ketergantungan yang diperlukan

Konfigurasikan dependensi proyek Anda (misalnya, di `build.gradle` file `pom.xml` atau Anda) untuk menggunakan versi `2.14.0` atau yang lebih baru. AWS SDK untuk Java

Sertakan `cloudwatch-metric-publisher` ArtifactID dengan `2.14.0` nomor versi atau yang lebih baru dalam dependensi proyek Anda.

Contoh:

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>2.30.11</version>  <!-- Navigate the link to see the latest version.
 -->
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>cloudwatch-metric-publisher</artifactId>
   </dependency>
  </dependencies>
</project>
```

Langkah 2: Konfigurasikan izin yang diperlukan

Aktifkan `cloudwatch:PutMetricData` izin untuk identitas IAM yang digunakan oleh penerbit metrik untuk memungkinkan SDK for Java menulis metrik.

### Aktifkan metrik untuk permintaan tertentu

Kelas berikut menunjukkan cara mengaktifkan penerbit CloudWatch metrik untuk permintaan ke Amazon DynamoDB. Ini menggunakan konfigurasi penerbit metrik default.

```
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.metrics.publishers.cloudwatch.CloudWatchMetricPublisher;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;

public class DefaultConfigForRequest {
    // Use one MetricPublisher for your application. It can be used with requests or
 service clients.
    static MetricPublisher metricsPub = CloudWatchMetricPublisher.create();

    public static void main(String[] args) {
        DynamoDbClient ddb = DynamoDbClient.create();
        // Publish metrics the for ListTables operation.
        ddb.listTables(ListTablesRequest.builder()
            .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
            .build());

        // Perform more work in your application.

        // A MetricsPublisher has its own lifecycle independent of any service client
 or request that uses it.
        // If you no longer need the publisher, close it to free up resources.
        metricsPub.close();  // All metrics stored in memory are flushed to CloudWatch.

        // Perform more work with the DynamoDbClient instance without publishing
 metrics.
        // Close the service client when you no longer need it.
        ddb.close();
    }
}
```

> **Important**
>
> Pastikan aplikasi Anda memanggil `close` `MetricPublisher` instance ketika klien layanan tidak lagi digunakan. Kegagalan untuk melakukannya mengakibatkan kemungkinan kebocoran thread atau deskriptor file.

Aktifkan metrik ringkasan untuk klien layanan tertentu

Cuplikan kode berikut menunjukkan cara mengaktifkan penerbit CloudWatch metrik dengan pengaturan default untuk klien layanan.

```
MetricPublisher metricsPub = CloudWatchMetricPublisher.create();

DynamoDbClient ddb = DynamoDbClient.builder()
          .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
          .build();
```

Kustomisasi CloudWatch penerbit metrik

Kelas berikut menunjukkan cara menyiapkan konfigurasi kustom untuk penerbit metrik untuk klien layanan tertentu. Kustomisasi termasuk memuat profil tertentu, menentukan AWS Wilayah tempat penerbit metrik mengirimkan permintaan, dan menyesuaikan seberapa sering penerbit mengirimkan metrik. CloudWatch

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.metrics.CoreMetric;
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.metrics.publishers.cloudwatch.CloudWatchMetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchAsyncClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;

import java.time.Duration;

public class CustomConfigForDDBClient {
    // Use one MetricPublisher for your application. It can be used with requests or
 service clients.
    static MetricPublisher metricsPub = CloudWatchMetricPublisher.builder()
        .cloudWatchClient(CloudWatchAsyncClient.builder()
            .region(Region.US_WEST_2)
            .credentialsProvider(ProfileCredentialsProvider.create("cloudwatch"))
            .build())
        .uploadFrequency(Duration.ofMinutes(5))
        .maximumCallsPerUpload(100)
        .namespace("ExampleSDKV2Metrics")
        .detailedMetrics(CoreMetric.API_CALL_DURATION)
        .build();
```

```
    public static void main(String[] args) {
        DynamoDbClient ddb = DynamoDbClient.builder()
            .overrideConfiguration(c -> c.addMetricPublisher(metricsPub))
            .build();
        // Publish metrics for DynamoDB operations.
        ddb.listTables();
        ddb.describeEndpoints();
        ddb.describeLimits();
        // Perform more work in your application.

        // A MetricsPublisher has its own lifecycle independent of any service client
 or request that uses it.
        // If you no longer need the publisher, close it to free up resources.
        metricsPub.close();  // All metrics stored in memory are flushed to CloudWatch.


        // Perform more work with the DynamoDbClient instance without publishing
 metrics.
        // Close the service client when you no longer need it.
        ddb.close();
    }
}
```

Kustomisasi yang ditampilkan dalam cuplikan sebelumnya memiliki efek sebagai berikut.

- `cloudWatchClient`Metode ini memungkinkan Anda menyesuaikan CloudWatch klien yang digunakan untuk mengirim metrik. Dalam contoh ini, kami menggunakan wilayah yang berbeda dari default us-east-1 di mana klien mengirimkan metrik. Kami juga menggunakan profil bernama yang berbeda, cloudwatch, yang kredensialnya akan digunakan untuk mengautentikasi permintaan. CloudWatch Kredensyal tersebut harus memiliki izin untuk. `cloudwatch:PutMetricData`
- `uploadFrequency`Metode ini memungkinkan Anda menentukan seberapa sering penayang metrik mengunggah metrik. CloudWatch Defaultnya adalah sekali dalam satu menit.
- `maximumCallsPerUpload`Metode ini membatasi jumlah panggilan yang dilakukan per unggahan. Defaultnya tidak terbatas.
- Secara default, SDK for Java 2.x menerbitkan metrik di bawah namespace. `AwsSdk/JavaSdk2` Anda dapat menggunakan `namespace` metode ini untuk menentukan nilai yang berbeda.
- Secara default, SDK menerbitkan metrik ringkasan. Metrik ringkasan terdiri dari rata-rata, minimum, maksimum, jumlah, dan jumlah sampel. Dengan menentukan satu atau beberapa metrik SDK dalam `detailedMetrics` metode, SDK menerbitkan data tambahan untuk setiap metrik. Data tambahan ini memungkinkan statistik persentil seperti p90 dan p99 yang dapat Anda kueri.

CloudWatch Metrik terperinci sangat berguna untuk metrik latensi sepertiAPICallDuration, yang mengukur end-to-end latensi untuk permintaan klien SDK. Anda dapat menggunakan bidang CoreMetric kelas untuk menentukan metrik SDK umum lainnya.

Langkah selanjutnya: Jika Anda juga bekerja dengan fungsi Lambda, lihat Menerbitkan metrik SDK untuk AWS Lambda fungsi untuk penerbitan metrik berbasis EMF.

## Publikasikan metrik SDK untuk AWS Lambda fungsi menggunakan AWS SDK for Java 2.x

Karena fungsi Lambda biasanya dijalankan selama milidetik hingga menit, setiap penundaan pengiriman metrik, yang terjadi denganCloudWatchMetricPublisher, berisiko kehilangan data.

EmfMetricLoggingPublishermemberikan pendekatan yang lebih cocok dengan segera menulis metrik sebagai entri log terstruktur dalam CloudWatch Embedded Metric Format (EMF). EmfMetricLoggingPublisherbekerja di lingkungan eksekusi yang memiliki integrasi bawaan dengan Amazon CloudWatch Log seperti AWS Lambda dan Amazon Elastic Container Service.

Set-up

Sebelum Anda dapat mengaktifkan dan menggunakan metrik dengan menggunakanEmfMetricLoggingPublisher, selesaikan langkah-langkah berikut.

Langkah 1: Tambahkan ketergantungan yang diperlukan

Konfigurasikan dependensi proyek Anda (misalnya, di build.gradle file pom.xml atau Anda) untuk menggunakan versi 2.30.3 atau yang lebih baru. AWS SDK untuk Java

Sertakan emf-metric-logging-publisher ArtifactID dengan 2.30.3 nomor versi atau yang lebih baru dalam dependensi proyek Anda.

Contoh:

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>2.30.11</version>  <!-- Navigate the link to see the latest version.
 -->
        <type>pom</type>
```

```
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>emf-metric-logging-publisher</artifactId>
   </dependency>
  </dependencies>
</project>
```

Langkah 2: Konfigurasikan izin yang diperlukan

Aktifkan `logs:PutLogEvents` izin untuk identitas IAM yang digunakan oleh penerbit metrik untuk memungkinkan SDK for Java menulis log berformat EMF.

Langkah 3: Pengaturan logging

Untuk memastikan pengumpulan metrik yang tepat, konfigurasikan logging Anda ke output ke konsol di `INFO` level atau lebih rendah (sepertiDEBUG). Dalam `log4j2.xml` file Anda:

```
<Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger
 name="software.amazon.awssdk.metrics.publishers.emf.EmfMetricLoggingPublisher"
 level="INFO" />
</Loggers>
```

Lihat topik logging dalam panduan ini untuk informasi selengkapnya tentang cara menyiapkan `log4j2.xml` file.

Konfigurasikan dan gunakan **`EmfMetricLoggingPublisher`**

Kelas fungsi Lambda berikut pertama kali membuat dan mengonfigurasi `EmfMetricLoggingPublisher` instance dan kemudian menggunakannya dengan klien layanan Amazon DynamoDB:

```
public class GameIdHandler implements RequestHandler<Map<String, String>, String> {
    private final EmfMetricLoggingPublisher emfPublisher;
    private final DynamoDbClient dynamoDb;
```

```
    public GameIdHandler() {
        // Build the publisher.
        this.emfPublisher = EmfMetricLoggingPublisher.builder()
                .namespace("namespace")
                .dimensions(CoreMetric.SERVICE_ID,
                        CoreMetric.OPERATION_NAME)
                .build();
        // Add the publisher to the client.
        this.dynamoDb = DynamoDbClient.builder()
                .overrideConfiguration(c -> c.addMetricPublisher(emfPublisher))
                .region(Region.of(System.getenv("AWS_REGION")))
                .build();
    }

    @Override
    public String handleRequest(Map<String, String> event, Context context) {
        Map<String, AttributeValue> gameItem = new HashMap<>();

        gameItem.put("gameId", AttributeValue.builder().s(event.get("id")).build());

        PutItemRequest putItemRequest = PutItemRequest.builder()
                .tableName("games")
                .item(gameItem)
                .build();

        dynamoDb.putItem(putItemRequest);

        return "Request handled";
    }
}
```

Ketika klien DynamoDB mengeksekusi `putItem` metode, secara otomatis menerbitkan metrik ke CloudWatch aliran log dalam format EMF.

Contoh peristiwa log EMF

Misalnya, jika Anda mengirim acara berikut ke fungsi GameHandler Lambda dengan logging dikonfigurasi seperti yang ditunjukkan sebelumnya:

```
{
  "id": "23456"
}
```

Setelah fungsi memproses acara, Anda menemukan dua peristiwa log yang terlihat mirip dengan contoh berikut. Objek JSON dalam acara kedua berisi data metrik SDK Java untuk `PutItem` operasi ke DynamoDB.

Saat CloudWatch menerima peristiwa log dalam format EMF, secara otomatis mem-parsing JSON terstruktur untuk mengekstrak data metrik. CloudWatch kemudian membuat metrik yang sesuai sambil menyimpan entri log asli di CloudWatch Log.

```
2025-07-11 15:58:30 [main] INFO  org.example.GameIdHandler:39 - Received map:
 {id=23456}

2025-07-11 15:58:34 [main] INFO
 software.amazon.awssdk.metrics.publishers.emf.EmfMetricLoggingPublisher:43 -
{
    "_aws": {
        "Timestamp": 1752249513975,
        "LogGroupName": "/aws/lambda/GameId",
        "CloudWatchMetrics": [
            {
                "Namespace": "namespace",
                "Dimensions": [
                    [
                        "OperationName",
                        "ServiceId"
                    ]
                ],
                "Metrics": [
                    {
                        "Name": "AvailableConcurrency"
                    },
                    {
                        "Name": "PendingConcurrencyAcquires"
                    },
                    {
                        "Name": "ServiceCallDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "EndpointResolveDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "MaxConcurrency"
```

```
                    },
                    {
                        "Name": "BackoffDelayDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "MarshallingDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "LeasedConcurrency"
                    },
                    {
                        "Name": "SigningDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "ConcurrencyAcquireDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "ApiCallSuccessful"
                    },
                    {
                        "Name": "RetryCount"
                    },
                    {
                        "Name": "UnmarshallingDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "ApiCallDuration",
                        "Unit": "Milliseconds"
                    },
                    {
                        "Name": "CredentialsFetchDuration",
                        "Unit": "Milliseconds"
                    }
                ]
            }
        ]
    },
    "AvailableConcurrency": 0,
    "PendingConcurrencyAcquires": 0,
```

```
    "OperationName": "PutItem",
    "ServiceCallDuration": 1339,
    "EndpointResolveDuration": 81,
    "MaxConcurrency": 50,
    "BackoffDelayDuration": 0,
    "ServiceId": "DynamoDB",
    "MarshallingDuration": 181,
    "LeasedConcurrency": 1,
    "SigningDuration": 184,
    "ConcurrencyAcquireDuration": 83,
    "ApiCallSuccessful": 1,
    "RetryCount": 0,
    "UnmarshallingDuration": 85,
    "ApiCallDuration": 1880,
    "CredentialsFetchDuration": 138
}
```

Dokumentasi API untuk `EmfMetricLoggingPublisher.Builder` menampilkan opsi konfigurasi yang dapat Anda gunakan.

Anda juga dapat mengaktifkan pencatatan metrik EMF untuk satu permintaan seperti yang ditunjukkan untuk. CloudWatchMetricPublisher

Langkah selanjutnya: Untuk aplikasi yang berjalan lama, lihat Menerbitkan metrik SDK dari aplikasi yang berjalan lama untuk CloudWatch penerbitan metrik berbasis.

## Keluarkan metrik SDK ke konsol menggunakan AWS SDK for Java 2.x

`LoggingMetricPublisher`Implementasi menampilkan metrik langsung ke konsol aplikasi atau file log. Pendekatan ini sangat ideal untuk pengembangan, debugging, dan memahami metrik apa yang dikumpulkan SDK tanpa memerlukan layanan eksternal seperti Amazon. CloudWatch

Tidak seperti `CloudWatchMetricPublisher` dan`EmfMetricLoggingPublisher`, `LoggingMetricPublisher` menyediakan output langsung tanpa penundaan atau dependensi eksternal. Ini membuatnya sempurna untuk skenario pengembangan dan pemecahan masalah lokal.

Kapan harus menggunakan LoggingMetricPublisher

Gunakan `LoggingMetricPublisher` saat Anda perlu:

- Debug koleksi metrik selama pengembangan

- Memahami metrik apa yang dikumpulkan SDK untuk operasi Anda
- Memecahkan masalah kinerja secara lokal
- Uji pengumpulan metrik tanpa dependensi layanan eksternal
- Lihat metrik segera di konsol atau file log

> **Note**
>
> `LoggingMetricPublisher`tidak direkomendasikan untuk lingkungan produksi di mana Anda memerlukan penyimpanan metrik dan kemampuan analisis yang persisten.

Siapkan pencatatan konsol untuk metrik

Untuk melihat `LoggingMetricPublisher` output, konfigurasikan framework logging Anda untuk menampilkan pesan `INFO` level. `log4j2.xml`Konfigurasi berikut memastikan metrik muncul di konsol Anda:

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{HH:mm:ss.SSS} [%t] %-5level %logger{36} - %msg
%n"/>
        </Console>
    </Appenders>
    <Loggers>
        <Root level="INFO">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <!-- Ensure LoggingMetricPublisher output appears. -->
        <Logger name="software.amazon.awssdk.metrics.LoggingMetricPublisher"
 level="INFO" />
    </Loggers>
</Configuration>
```

Konfigurasi ini mengarahkan SDK ke metrik keluaran ke konsol Anda di level tersebut. `INFO` Konfigurasi `LoggingMetricPublisher` logger memastikan bahwa keluaran metrik muncul bahkan jika root logger Anda menggunakan level yang lebih tinggi seperti `WARN` atau. `ERROR`

Mengaktifkan metrik konsol untuk klien layanan

Contoh berikut menunjukkan cara membuat `LoggingMetricPublisher` dan menggunakannya dengan klien Amazon Simple Storage Service:

```
import software.amazon.awssdk.metrics.LoggingMetricPublisher;
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

// Create a LoggingMetricPublisher with default settings.
MetricPublisher metricPublisher = LoggingMetricPublisher.create();

// Add the publisher to your service client.
S3Client s3Client = S3Client.builder()
    .region(Region.US_EAST_1)
    .overrideConfiguration(config -> config.addMetricPublisher(metricPublisher))
    .build();

// Make requests - metrics will appear in your console.
s3Client.listBuckets();

// Clean up resources.
metricPublisher.close();
s3Client.close();
```

Pilih format keluaran metrik

`LoggingMetricPublisher`mendukung dua format output:

- Format PLAIN (default): Menghasilkan metrik sebagai entri satu baris yang ringkas
- Format PRETTY: Menghasilkan metrik dalam format multi-baris yang dapat dibaca manusia

Contoh berikut menunjukkan cara menggunakan format PRETTY untuk memudahkan pembacaan selama pengembangan:

```
import org.slf4j.event.Level;
import software.amazon.awssdk.metrics.LoggingMetricPublisher;

// Create a LoggingMetricPublisher with PRETTY format.
MetricPublisher prettyMetricPublisher = LoggingMetricPublisher.create(
    Level.INFO,
```

```
    LoggingMetricPublisher.Format.PRETTY
);

// Use with your service client.
S3Client s3Client = S3Client.builder()
    .region(Region.US_EAST_1)
    .overrideConfiguration(config -> config.addMetricPublisher(prettyMetricPublisher))
    .build();
```

### Contoh lengkap

Contoh berikut menunjukkan penggunaan `LoggingMetricPublisher` dalam dua cara:

- Di tingkat klien layanan
- Untuk satu permintaan

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.slf4j.event.Level;
import software.amazon.awssdk.metrics.LoggingMetricPublisher;
import software.amazon.awssdk.metrics.MetricPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;

/**
 * Demonstrates how to use LoggingMetricPublisher with AWS S3 SDK for Java 2.x.
 * <p>
 * This demo focuses on the S3 listBuckets operation to show how metrics are collected
 * and logged to the console for development and debugging purposes.
 * <p>
 * LoggingMetricPublisher is ideal for:
 * - Development and debugging
 * - Console output for troubleshooting
 * - Understanding what metrics are being collected
 * - Testing metric collection without external dependencies
 */
public class S3LoggingMetricPublisherDemo {

    private static final Logger logger =
 LoggerFactory.getLogger(S3LoggingMetricPublisherDemo.class);
```

```
    public static void main(String[] args) {
        S3LoggingMetricPublisherDemo demo = new S3LoggingMetricPublisherDemo();
        demo.demonstrateUsage();
    }

    /**
     * Demonstrates basic usage with S3Client and metrics enabled at the client level.
     */
    private void demonstrateUsage() {

        // Create a LoggingMetricPublisher with default settings. The SDK logs metrics
as text in a single line.
        // The default settings are equivalent to using
`LoggingMetricPublisher.Format.PLAIN`.

        MetricPublisher metricPublisher = LoggingMetricPublisher.create();

        // Create an S3 client with metrics enabled.
        try (S3Client s3Client = S3Client.builder()
                .region(Region.US_EAST_1)
                .overrideConfiguration(config ->
config.addMetricPublisher(metricPublisher))
                .build()) {

            // Make the listBuckets request - metrics will be logged to console.
            ListBucketsResponse response =
s3Client.listBuckets(ListBucketsRequest.builder().build());

            // The next block shows the using a different LoggingMetricPublisher with a
`PRETTY` format.
            // Since the metric publisher is added to the request using the
`overrideConfiguration`, this formatting
            // applies only to the one request.
            try {
                s3Client.listBuckets(ListBucketsRequest.builder()
                        .overrideConfiguration(config -> config
                                .addMetricPublisher(LoggingMetricPublisher.create(
                                        Level.INFO,
LoggingMetricPublisher.Format.PRETTY)))
                        .build());
            } catch (Exception e) {
                logger.info("Request failed with metrics logged: {}", e.getMessage());
            }
```

```
            logger.info("Found {} buckets in your AWS account.",
 response.buckets().size());

        } catch (Exception e) {
            logger.error("Error during S3 operation: {}", e.getMessage());
            logger.info("Note: This is expected if AWS credentials are not
 configured.");
        }

        // Close the metric publisher to flush any remaining metrics.
        metricPublisher.close();
    }
}
```

Kode mencatat yang berikut ini ke konsol:

```
INFO  LoggingMetricPublisher - Metrics published: MetricCollection(name=ApiCall,
 metrics=[MetricRecord(metric=MarshallingDuration, value=PT0.005409792S),
 MetricRecord(metric=RetryCount, value=0), MetricRecord(metric=ApiCallSuccessful,
 value=true), MetricRecord(metric=OperationName, value=ListBuckets),
 MetricRecord(metric=EndpointResolveDuration, value=PT0.000068S),
 MetricRecord(metric=ApiCallDuration, value=PT0.163802958S),
 MetricRecord(metric=CredentialsFetchDuration, value=PT0.145686542S),
 MetricRecord(metric=ServiceEndpoint, value=https://s3.amazonaws.com),
 MetricRecord(metric=ServiceId, value=S3)],
 children=[MetricCollection(name=ApiCallAttempt,
 metrics=[MetricRecord(metric=TimeToFirstByte, value=PT0.138816S),
 MetricRecord(metric=SigningDuration, value=PT0.007803459S),
 MetricRecord(metric=ReadThroughput, value=165153.96002660287),
 MetricRecord(metric=ServiceCallDuration, value=PT0.138816S),
 MetricRecord(metric=AwsExtendedRequestId, value=e13Swj3uwn0qP1Oz
+m7II5OGq7jf8xxT8H18iDfRBCQmDg+gU4ek91Xrsl8XxRLROlIzCAPQtsQF0DAAWOb8ntuKCzX2AJdj),
 MetricRecord(metric=HttpStatusCode, value=200),
 MetricRecord(metric=BackoffDelayDuration, value=PT0S),
 MetricRecord(metric=TimeToLastByte, value=PT0.148915667S),
 MetricRecord(metric=AwsRequestId, value=78AW9BM7SWR6YMGB)],
 children=[MetricCollection(name=HttpClient,
 metrics=[MetricRecord(metric=MaxConcurrency, value=50),
 MetricRecord(metric=AvailableConcurrency, value=0),
 MetricRecord(metric=LeasedConcurrency, value=1),
 MetricRecord(metric=ConcurrencyAcquireDuration, value=PT0.002623S),
 MetricRecord(metric=PendingConcurrencyAcquires, value=0),
 MetricRecord(metric=HttpClientName, value=Apache)], children=[])])])
```

```
INFO  LoggingMetricPublisher - [4e6f2bb5] ApiCall
INFO  LoggingMetricPublisher - [4e6f2bb5] ###############################################
INFO  LoggingMetricPublisher - [4e6f2bb5] # MarshallingDuration=PT0.000063S          #
INFO  LoggingMetricPublisher - [4e6f2bb5] # RetryCount=0                             #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ApiCallSuccessful=true                   #
INFO  LoggingMetricPublisher - [4e6f2bb5] # OperationName=ListBuckets               #
INFO  LoggingMetricPublisher - [4e6f2bb5] # EndpointResolveDuration=PT0.000024375S   #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ApiCallDuration=PT0.018463083S           #
INFO  LoggingMetricPublisher - [4e6f2bb5] # CredentialsFetchDuration=PT0.000022334S  #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ServiceEndpoint=https://s3.amazonaws.com #
INFO  LoggingMetricPublisher - [4e6f2bb5] # ServiceId=S3                            #
INFO  LoggingMetricPublisher - [4e6f2bb5] ###############################################
INFO  LoggingMetricPublisher - [4e6f2bb5]     ApiCallAttempt
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ###########################################################################################
INFO  LoggingMetricPublisher - [4e6f2bb5]     # TimeToFirstByte=PT0.0165575S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # SigningDuration=PT0.000301125S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # ReadThroughput=1195591.792850103
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # ServiceCallDuration=PT0.0165575S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     #
 AwsExtendedRequestId=3QI1eenRuokdszWqZBmBMDUmko6FlSmHkM
+CUMNMeLor7gJml4D4lv6QXUZ1zWoTgG+tHbr6yo2vHdz4h1P8PDovvtMFRCeB #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # HttpStatusCode=200
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # BackoffDelayDuration=PT0S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # TimeToLastByte=PT0.017952625S
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]     # AwsRequestId=78AVFAF795AAWAXH
                                                                          #
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ###########################################################################################
INFO  LoggingMetricPublisher - [4e6f2bb5]         HttpClient
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ########################################
INFO  LoggingMetricPublisher - [4e6f2bb5]         # MaxConcurrency=50
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # AvailableConcurrency=0
   #
```

```
INFO  LoggingMetricPublisher - [4e6f2bb5]         # LeasedConcurrency=1
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         #
 ConcurrencyAcquireDuration=PT0.00004S #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # PendingConcurrencyAcquires=0
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]         # HttpClientName=Apache
   #
INFO  LoggingMetricPublisher - [4e6f2bb5]
 ########################################
INFO  S3LoggingMetricPublisherDemo - Found 6 buckets in your AWS account.
```

### Artefak tambahan untuk contoh

### Berkas Maven `pom.xml`

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>com.example</groupId>
    <artifactId>s3-logging-metric-publisher-demo</artifactId>
    <version>1.0.0</version>
    <packaging>jar</packaging>

    <name>AWS S3 LoggingMetricPublisher Demo</name>
    <description>Demonstrates how to use LoggingMetricPublisher with AWS S3 SDK for
 Java 2.x</description>

    <properties>
        <maven.compiler.source>17</maven.compiler.source>
        <maven.compiler.target>17</maven.compiler.target>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <aws.java.sdk.version>2.31.66</aws.java.sdk.version>
        <log4j.version>2.24.3</log4j.version>
    </properties>

    <dependencyManagement>
        <dependencies>
            <!-- AWS SDK BOM for dependency management -->
            <dependency>
```

```
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>${aws.java.sdk.version}</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>

        <!-- Log4j BOM for logging dependency management -->
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-bom</artifactId>
            <version>${log4j.version}</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <!-- AWS S3 SDK for demonstration -->
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>

    <!-- Log4j2 SLF4J implementation -->
    <dependency>
        <groupId>org.apache.logging.log4j</groupId>
        <artifactId>log4j-slf4j2-impl</artifactId>
    </dependency>

    <!-- Log4j2 Core -->
    <dependency>
        <groupId>org.apache.logging.log4j</groupId>
        <artifactId>log4j-core</artifactId>
    </dependency>
</dependencies>

<build>
    <plugins>
        <plugin>
            <groupId>org.apache.maven.plugins</groupId>
            <artifactId>maven-compiler-plugin</artifactId>
            <version>3.13.0</version>
```

```
                <configuration>
                    <source>17</source>
                    <target>17</target>
                </configuration>
            </plugin>
        </plugins>
    </build>
</project>
```

`Log4j2.xml`berkas konfigurasi

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{HH:mm:ss.SSS} [%t] %-5level %logger{36} - %msg
%n"/>
        </Console>
    </Appenders>
    <Loggers>
        <Root level="INFO">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <!-- Ensure LoggingMetricPublisher output appears. -->
        <Logger name="software.amazon.awssdk.metrics.LoggingMetricPublisher"
 level="INFO"/>
    </Loggers>
</Configuration>
```

Metrik mencakup informasi waktu, detail layanan, nama operasi, dan kode status HTTP yang membantu Anda memahami pola penggunaan AWS API aplikasi Anda.

Langkah selanjutnya

Setelah menggunakan `LoggingMetricPublisher` untuk pengembangan dan debugging, pertimbangkan opsi ini untuk lingkungan produksi:

- Untuk aplikasi yang berjalan lama, gunakan CloudWatchMetricPublisheruntuk mengirim metrik ke Amazon CloudWatch untuk analisis dan peringatan
- Untuk AWS Lambda fungsi, gunakan EmfMetricLoggingPublisheruntuk mempublikasikan metrik dalam Format Metrik CloudWatch Tertanam

# AWS SDK for Java 2.x: Referensi Metrik Komprehensif

Dengan itu AWS SDK for Java 2.x, Anda dapat mengumpulkan metrik dari klien layanan di aplikasi Anda dan kemudian menerbitkan (mengeluarkan) metrik tersebut ke Amazon. CloudWatch

Tabel ini mencantumkan metrik yang dapat Anda kumpulkan dan persyaratan penggunaan klien HTTP apa pun.

Untuk informasi selengkapnya tentang mengaktifkan dan mengonfigurasi metrik untuk SDK, lihat Mengaktifkan metrik SDK.

Metrik dikumpulkan dengan setiap permintaan

| Nama metrik | Deskripsi | Tipe |
|---|---|---|
| ApiCallDuration | Durasi panggilan API. Ini termasuk semua upaya panggilan yang dilakukan. | Durasi* |
| ApiCallSuccessful | Benar jika panggilan API berhasil, false sebaliknya. | Boolean |
| CredentialsFetchDuration | Durasi waktu untuk mengambil kredensyal penandatanganan untuk panggilan API. | Durasi* |
| EndpointResolveDuration | Durasi waktu untuk menyelesaikan titik akhir yang digunakan untuk panggilan API. | Durasi* |
| MarshallingDuration | Durasi waktu untuk mengirim permintaan SDK ke permintaan HTTP. | Durasi* |
| OperationName | Nama operasi layanan yang dipanggil. | String |
| RetryCount | Jumlah percobaan ulang yang dilakukan SDK dalam pelaksanaan permintaan. 0 | Bilangan Bulat |

| Nama metrik | Deskripsi | Tipe |
| --- | --- | --- |
| | menyiratkan bahwa permintaan berfungsi pertama kali dan tidak ada percobaan ulang yang dicoba.<br><br>Untuk informasi selengkapnya tentang mengonfigurasi perilaku coba lagi, lihat. Coba lagi strategi | |
| ServiceId | ID unik untuk layanan ini. | String |
| ServiceEndpoint | Titik akhir untuk layanan. | URI |
| TokenFetchDuration | Durasi waktu untuk mengambil kredensyal penandatanganan untuk panggilan API. | Durasi* |

* java.time.duration.

Metrik dikumpulkan untuk setiap upaya permintaan

Setiap panggilan API mungkin memerlukan beberapa upaya sebelum respons diterima. Metrik ini dikumpulkan untuk setiap upaya.

Metrik inti

| Nama metrik | Deskripsi | Tipe |
| --- | --- | --- |
| AwsExtendedRequestId | ID permintaan yang diperpanjang dari permintaan layanan. | String |
| AwsRequestId | ID permintaan permintaan layanan. | String |
| BackoffDelayDuration | Durasi waktu yang telah ditunggu SDK sebelum | Durasi* |

| Nama metrik | Deskripsi | Tipe |
| --- | --- | --- |
| | upaya panggilan API ini. Nilai didasarkan pada `BackoffStrategy` set pada klien. Lihat Coba lagi strategi bagian dalam panduan ini untuk informasi lebih lanjut. | |
| ErrorType | Jenis kesalahan yang terjadi untuk upaya panggilan.<br><br>Berikut adalah nilai yang mungkin:<br><br>• `Throttling` : Layanan merespons dengan kesalahan pelambatan.<br>• `ServerError` : Layanan merespons dengan kesalahan selain pelambatan.<br>• `ConfiguredTimeout` : Terjadi batas waktu klien, baik pada tingkat panggilan API, atau tingkat upaya panggilan API.<br>• `IO`: I/O Terjadi kesalahan.<br>• `Other`: Tangkap semua untuk kesalahan lain yang tidak termasuk dalam salah satu daftar kategori di atas. | String |

| Nama metrik | Deskripsi | Tipe |
| --- | --- | --- |
| ReadThroughput | Throughput baca klien, didefinisikan sebagai`NumberOfResponseBytesRead / (TTLB - TTFB)`. Nilai ini dalam byte per detik.<br><br>Perhatikan bahwa metrik ini hanya mengukur byte yang dibaca dari dalam `ResponseTransformer` atau`AsyncResponseTransformer` . Data yang dibaca di luar transformator — misalnya ketika aliran respons dikembalikan sebagai hasil transformator — tidak termasuk dalam perhitungan. | Ganda |
| ServiceCallDuration | Durasi waktu untuk terhubung ke layanan (atau memperoleh koneksi dari kumpulan koneksi), mengirim permintaan serial dan menerima respons awal (misalnya kode status HTTP dan header). Ini TIDAK termasuk waktu untuk membaca seluruh tanggapan dari layanan. | Durasi* |
| SigningDuration | Durasi waktu untuk menandatangani permintaan HTTP. | Durasi* |

| Nama metrik | Deskripsi | Tipe |
| --- | --- | --- |
| TimeToFirstByte | Durasi waktu dari mengirim permintaan HTTP (termasuk memperoleh koneksi) ke layanan, dan menerima byte pertama header dalam respons. | Durasi* |
| TimeToLastByte | Durasi waktu dari mengirim permintaan HTTP (termasuk memperoleh koneksi) ke layanan, dan menerima byte terakhir dari respons.<br><br>Perhatikan APIs bahwa untuk respons streaming kembali, metrik ini mencakup waktu hingga `ResponseTransformer` atau `AsyncResponseTransformer` selesai. | Durasi* |
| UnmarshallingDuration | Durasi waktu untuk menghapus respons HTTP terhadap respons SDK.<br><br>Catatan: Untuk operasi streaming, ini tidak termasuk waktu untuk membaca payload respons. | Durasi* |

* java.time.duration.

## Metrik HTTP

| Nama metrik | Deskripsi | Tipe | Klien HTTP diperlukan* |
|---|---|---|---|
| Available Concurrency | Jumlah permintaan bersamaan tambahan yang didukung klien HTTP tanpa membuat koneksi baru ke server target.<br><br>Untuk operasi HTTP/1, ini sama dengan jumlah koneksi TCP idle yang dibuat dengan layanan. Untuk operasi HTTP/2, ini sama dengan jumlah aliran idle.<br><br>Catatan: Nilai ini bervariasi menurut implementasi klien HTTP:<br><br>• Klien Apache: Nilai berlaku untuk seluruh klien HTTP<br>• Klien Netty: Nilai berlaku per titik akhir<br>• AWS Klien berbasis CRT: Nilai berlaku per titik akhir<br><br>Nilai dicakup ke instance klien HTTP individual dan mengecualikan konkurensi dari klien HTTP lain di JVM yang sama. | Bilangan Bulat | Apache, Netty, CRT |
| ConcurrencyAcquire Duration | Durasi waktu untuk memperoleh saluran dari kolam koneksi.<br><br>Untuk operasi HTTP/1, saluran sama dengan koneksi TCP. Untuk operasi HTTP/2, saluran sama dengan saluran aliran HTTP/2.<br><br>Memperoleh saluran baru dapat mencakup waktu untuk:<br><br>1. Menunggu izin konkurensi, sebagaimana dibatasi oleh konfigurasi konkurensi maks klien.<br>2. Membangun koneksi baru, jika tidak ada koneksi yang ada tersedia di kolam renang. | Durasi* | Apache, Netty, CRT |

| Nama metrik | Deskripsi | Tipe | Klien HTTP diperlukan* |
|---|---|---|---|
| | 3. Melakukan jabat tangan dan negosiasi TLS, jika TLS diaktifkan. | | |
| HttpClientName | Nama HTTP yang digunakan untuk permintaan. | String | Apache, Netty, CRT |
| HttpStatusCode | Kode status respon HTTP. | Bilangan Bulat | Setiap |
| LeasedConcurrency | Jumlah permintaan yang saat ini dijalankan oleh klien HTTP.<br><br>Untuk operasi HTTP/1, ini sama dengan jumlah koneksi TCP aktif dengan layanan (tidak termasuk koneksi idle). Untuk operasi HTTP/2, ini sama dengan jumlah aliran HTTP aktif dengan layanan (tidak termasuk kapasitas aliran idle).<br><br>Catatan: Nilai ini bervariasi menurut implementasi klien HTTP:<br><br>• Klien Apache: Nilai berlaku untuk seluruh klien HTTP<br>• Klien Netty: Nilai berlaku per titik akhir<br>• AWS Klien berbasis CRT: Nilai berlaku per titik akhir<br><br>Nilai dicakup ke instance klien HTTP individual dan mengecualikan konkurensi dari klien HTTP lain di JVM yang sama. | Bilangan Bulat | Apache, Netty, CRT |
| LocalStreamWindowSize | Ukuran jendela HTTP/2 lokal dalam byte untuk aliran yang menjalankan permintaan ini. | Bilangan Bulat | Netty |

| Nama metrik | Deskripsi | Tipe | Klien HTTP diperlukan* |
| --- | --- | --- | --- |
| MaxConcurrency | Jumlah maksimum permintaan bersamaan yang didukung klien HTTP.<br><br>Untuk operasi HTTP/1, ini sama dengan jumlah maksimum koneksi TCP yang dapat dikumpulkan oleh klien HTTP. Untuk operasi HTTP/2, ini sama dengan jumlah maksimum aliran yang dapat dikumpulkan oleh klien HTTP.<br><br>Catatan: Nilai ini bervariasi menurut implementasi klien HTTP:<br><br>• Klien Apache: Nilai berlaku untuk seluruh klien HTTP<br>• Klien Netty: Nilai berlaku per titik akhir<br>• AWS Klien berbasis CRT: Nilai berlaku per titik akhir<br><br>Nilai dicakup ke instance klien HTTP individual dan mengecualikan konkurensi dari klien HTTP lain di JVM yang sama. | Bilangan Bulat | Apache, Netty, CRT |

| Nama metrik | Deskripsi | Tipe | Klien HTTP diperlukan* |
|---|---|---|---|
| PendingConcurrencyAcquires | Jumlah permintaan yang menunggu konkurensi dari klien HTTP.<br><br>Untuk operasi HTTP/1, ini sama dengan jumlah permintaan yang menunggu koneksi TCP dibuat atau dikembalikan dari kumpulan koneksi. Untuk operasi HTTP/2, ini sama dengan jumlah permintaan yang menunggu aliran baru (dan mungkin koneksi HTTP/2 baru) dari kumpulan koneksi.<br><br>Catatan: Nilai ini bervariasi menurut implementasi klien HTTP:<br><br>• Klien Apache: Nilai berlaku untuk seluruh klien HTTP<br>• Klien Netty: Nilai berlaku per titik akhir<br>• AWS Klien berbasis CRT: Nilai berlaku per titik akhir<br><br>Nilai dicakup ke instance klien HTTP individual dan mengecualikan konkurensi dari klien HTTP lain di JVM yang sama. | Bilangan Bulat | Apache, Netty, CRT |
| RemoteStreamWindowSize | Ukuran jendela HTTP/2 jarak jauh dalam byte untuk aliran yang menjalankan permintaan ini. | Bilangan Bulat | Netty |

* java.time.duration.

Istilah yang digunakan dalam kolom berarti:

- Apache: klien HTTP berbasis Apache () `ApacheHttpClient`
- Netty: klien HTTP berbasis Netty () `NettyNioAsyncHttpClient`
- CRT: klien HTTP AWS berbasis CRT () `AwsCrtAsyncHttpClient`

- Setiap: pengumpulan data metrik tidak bergantung pada klien HTTP; ini termasuk klien HTTP URLConnection berbasis (`UrlConnectionHttpClient`)

## AWS SDK for Java 2.x Aplikasi pemantauan

Pemantauan merupakan bagian penting dari menjaga keandalan, ketersediaan, dan kinerja aplikasi yang menggunakan AWS SDK for Java 2.x. AWS menyediakan alat pemantauan berikut untuk menonton SDK for Java 2.x, melaporkan ketika ada sesuatu yang salah, dan mengambil tindakan otomatis bila perlu:

- Amazon CloudWatch memantau AWS sumber daya Anda dan dan aplikasi yang Anda jalankan AWS secara real time. Anda dapat mengumpulkan dan melacak metrik, membuat dasbor yang disesuaikan, dan mengatur alarm yang memberi tahu Anda atau mengambil tindakan saat metrik tertentu mencapai ambang batas yang ditentukan. Misalnya, Anda dapat CloudWatch melacak penggunaan CPU atau metrik lain dari EC2 instans Amazon Anda dan secara otomatis meluncurkan instans baru bila diperlukan. Untuk informasi selengkapnya, lihat Panduan CloudWatch Pengguna Amazon.
- Amazon CloudWatch Logs memungkinkan Anda memantau, menyimpan, dan mengakses file log Anda dari EC2 instans Amazon CloudTrail, dan sumber lainnya. CloudWatch Log dapat memantau informasi dalam file log dan memberi tahu Anda ketika ambang batas tertentu terpenuhi. Anda juga dapat mengarsipkan data log dalam penyimpanan yang sangat durabel. Untuk informasi selengkapnya, lihat Panduan Pengguna Amazon CloudWatch Logs.
- AWS CloudTrailmenangkap panggilan API dan peristiwa terkait yang dibuat oleh atau atas nama AWS akun Anda dan mengirimkan file log ke bucket Amazon S3 yang Anda tentukan. Anda dapat mengidentifikasi pengguna dan akun mana yang dipanggil AWS, alamat IP sumber dari mana panggilan dilakukan, dan kapan panggilan terjadi. Untuk informasi selengkapnya, lihat Panduan Pengguna AWS CloudTrail.

## Logging dengan SDK for Java 2.x

AWS SDK for Java 2.x Kegunaan SLF4J, yang merupakan lapisan abstraksi yang memungkinkan penggunaan salah satu dari beberapa sistem logging saat runtime.

Sistem logging yang didukung termasuk Java Logging Framework dan Apache Log4j 2, antara lain. Topik ini menunjukkan cara menggunakan Log4j 2 sebagai sistem logging untuk bekerja dengan SDK.

## File konfigurasi Log4j 2

Anda biasanya menggunakan file konfigurasi, bernama `log4j2.xml` dengan Log4j 2. Contoh file konfigurasi ditunjukkan di bawah ini. Untuk mempelajari lebih lanjut tentang nilai yang digunakan dalam file konfigurasi, lihat manual untuk konfigurasi Log4j.

`log4j2.xml`File harus berada di classpath saat aplikasi Anda dimulai. Untuk proyek Maven, letakkan file di direktori. `<project-dir>/src/main/resources`

File `log4j2.xml` konfigurasi menentukan properti seperti tingkat logging, di mana output logging dikirim (misalnya, ke file atau ke konsol), dan format output. Level logging menentukan tingkat detail yang keluaran Log4j 2. Log4j 2 mendukung konsep beberapa hierarki logging. Level logging diatur secara independen untuk setiap hierarki. Hirarki logging utama yang Anda gunakan dengan AWS SDK for Java 2.x adalah`software.amazon.awssdk`.

## Tambahkan ketergantungan logging

Untuk mengonfigurasi pengikatan Log4j 2 untuk SLF4 J di file build Anda, gunakan yang berikut ini.

Maven

Tambahkan elemen berikut ke `pom.xml` file Anda.

```
...
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-slf4j2-impl</artifactId>
   <version>VERSION</version>
</dependency>
...
```

Gradle–Kotlin DSL

Tambahkan yang berikut ini ke `build.gradle.kts` file Anda.

```
...
dependencies {
    ...
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl:VERSION")
    ...
}
...
```

Gunakan `2.20.0` untuk versi minimum `log4j-slf4j2-impl` artefak. Untuk versi terbaru, gunakan versi yang diterbitkan ke pusat Maven. Ganti *VERSION* dengan versi yang akan Anda gunakan.

## Kesalahan dan peringatan khusus SDK

Sebaiknya Anda selalu membiarkan hirarki logger “software.amazon.awssdk” disetel ke “WARN” untuk menangkap pesan penting apa pun dari pustaka klien SDK. Misalnya, jika klien Amazon S3 mendeteksi bahwa aplikasi Anda belum menutup `InputStream` dan dapat membocorkan sumber daya dengan benar, klien S3 melaporkannya melalui pesan peringatan ke log. Ini juga memastikan bahwa pesan dicatat jika klien memiliki masalah dalam menangani permintaan atau tanggapan.

`log4j2.xml`File berikut menyetel `rootLogger` ke “WARN”, yang menyebabkan pesan peringatan dan tingkat kesalahan dari semua logger dalam aplikasi menjadi output, termasuk yang ada dalam hierarki “software.amazon.awssdk”. Atau, Anda dapat secara eksplisit mengatur hierarki logger “software.amazon.awssdk” ke “WARN” jika digunakan. `<Root level="ERROR">`

Contoh file konfigurasi Log4j2.xml

Konfigurasi ini akan mencatat pesan pada level “ERROR” dan “WARN” ke konsol untuk semua hierarki logger.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
 </Loggers>
</Configuration>
```

## Pencatatan ringkasan permintaan/tanggapan

Setiap permintaan untuk Layanan AWS menghasilkan ID AWS permintaan unik yang berguna jika Anda mengalami masalah dengan Layanan AWS cara menangani permintaan. AWS permintaan dapat diakses IDs secara terprogram melalui `SdkServiceException`objek di SDK untuk

panggilan layanan yang gagal, dan juga dapat dilaporkan melalui level log “DEBUG” dari logger “software.amazon.awssdk.request”.

`log4j2.xml`File berikut memungkinkan ringkasan permintaan dan tanggapan.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="ERROR">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
 </Loggers>
</Configuration>
```

Berikut adalah contoh output log:

```
2022-09-23 16:02:08 [main] DEBUG software.amazon.awssdk.request:85 - Sending Request:
 DefaultSdkHttpFullRequest(httpMethod=POST, protocol=https, host=dynamodb.us-
east-1.amazonaws.com, encodedPath=/, headers=[amz-sdk-invocation-id, Content-Length,
 Content-Type, User-Agent, X-Amz-Target], queryParameters=[])
2022-09-23 16:02:08 [main] DEBUG software.amazon.awssdk.request:85 - Received
 successful response: 200, Request ID:
 QS9DUMME2NHEDH8TGT9N5V53OJVV4KQNSO5AEMVJF66Q9ASUAAJG, Extended Request ID: not
 available
```

Jika Anda tertarik hanya menggunakan ID permintaan`<Logger name="software.amazon.awssdk.requestId" level="DEBUG" />`.

## Pencatatan SDK tingkat debug

Jika Anda memerlukan detail lebih lanjut tentang apa yang dilakukan SDK, Anda dapat mengatur tingkat logging `software.amazon.awssdk` logger ke. `DEBUG` Pada level ini, SDK mengeluarkan sejumlah besar detail, jadi kami sarankan Anda mengatur level ini untuk menyelesaikan kesalahan menggunakan pengujian integrasi.

Pada tingkat logging ini, SDK mencatat informasi tentang konfigurasi, resolusi kredensyal, pencegat eksekusi, aktivitas TLS tingkat tinggi, penandatanganan permintaan, dan banyak lagi.

Berikut ini adalah contoh pernyataan yang dihasilkan oleh SDK pada `DEBUG` tingkat untuk panggilan`S3Client#listBuckets()`.

```
DEBUG s.a.a.r.p.AwsRegionProviderChain:57 - Unable to load region from
 software.amazon.awssdk.regions.providers.SystemSettingsRegionProvider@324dcd31:Unable
 to load region from system settings. Region must be specified either via environment
 variable (AWS_REGION) or  system property (aws.region).
DEBUG s.a.a.c.i.h.l.ClasspathSdkHttpServiceProvider:85 - The HTTP implementation loaded
 is software.amazon.awssdk.http.apache.ApacheSdkHttpService@a23a01d
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Creating an interceptor
 chain that will apply interceptors in the following order:
 [software.amazon.awssdk.core.internal.interceptor.HttpChecksumValidationInterceptor@69b2f8e5,
 software.amazon.awssdk.awscore.interceptor.HelpfulUnknownHostExceptionInterceptor@6331250e,
 software.amazon.awssdk.awscore.eventstream.EventStreamInitialRequestInterceptor@a10c1b5,
 software.amazon.awssdk.awscore.interceptor.TraceIdExecutionInterceptor@644abb8f,
 software.amazon.awssdk.services.s3.auth.scheme.internal.S3AuthSchemeInterceptor@1a411233,
 software.amazon.awssdk.services.s3.endpoints.internal.S3ResolveEndpointInterceptor@70325d20,
 software.amazon.awssdk.services.s3.endpoints.internal.S3RequestSetEndpointInterceptor@7c2327fa
 software.amazon.awssdk.services.s3.internal.handlers.StreamingRequestInterceptor@4d847d32,
 software.amazon.awssdk.services.s3.internal.handlers.CreateBucketInterceptor@5f462e3b,
 software.amazon.awssdk.services.s3.internal.handlers.CreateMultipartUploadRequestInterceptor@3
 software.amazon.awssdk.services.s3.internal.handlers.DecodeUrlEncodedResponseInterceptor@58065
 software.amazon.awssdk.services.s3.internal.handlers.GetBucketPolicyInterceptor@3605c4d3,
 software.amazon.awssdk.services.s3.internal.handlers.S3ExpressChecksumInterceptor@585c13de,
 software.amazon.awssdk.services.s3.internal.handlers.AsyncChecksumValidationInterceptor@187eb9
 software.amazon.awssdk.services.s3.internal.handlers.SyncChecksumValidationInterceptor@726a6b9
 software.amazon.awssdk.services.s3.internal.handlers.EnableTrailingChecksumInterceptor@6ad11a5
 software.amazon.awssdk.services.s3.internal.handlers.ExceptionTranslationInterceptor@522b2631,
 software.amazon.awssdk.services.s3.internal.handlers.GetObjectInterceptor@3ff57625,
 software.amazon.awssdk.services.s3.internal.handlers.CopySourceInterceptor@1ee29c84,
 software.amazon.awssdk.services.s3.internal.handlers.ObjectMetadataInterceptor@7c8326a4]
DEBUG s.a.a.u.c.CachedSupplier:85 - (SsoOidcTokenProvider()) Cached value is stale and
 will be refreshed.
...
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Creating an interceptor
 chain that will apply interceptors in the following order:
 [software.amazon.awssdk.core.internal.interceptor.HttpChecksumValidationInterceptor@51351f28,
 software.amazon.awssdk.awscore.interceptor.HelpfulUnknownHostExceptionInterceptor@21618fa7,
 software.amazon.awssdk.awscore.eventstream.EventStreamInitialRequestInterceptor@15f2eda3,
 software.amazon.awssdk.awscore.interceptor.TraceIdExecutionInterceptor@34cf294c,
```

```
 software.amazon.awssdk.services.sso.auth.scheme.internal.SsoAuthSchemeInterceptor@4d7aaca2,
 software.amazon.awssdk.services.sso.endpoints.internal.SsoResolveEndpointInterceptor@604b1e1d,
 software.amazon.awssdk.services.sso.endpoints.internal.SsoRequestSetEndpointInterceptor@625668
...
DEBUG s.a.a.request:85 - Sending Request: DefaultSdkHttpFullRequest(httpMethod=GET,
 protocol=https, host=portal.sso.us-east-1.amazonaws.com, encodedPath=/federation/
credentials, headers=[amz-sdk-invocation-id, User-Agent, x-amz-sso_bearer_token],
 queryParameters=[role_name, account_id])
DEBUG s.a.a.c.i.h.p.s.SigningStage:85 - Using SelectedAuthScheme: smithy.api#noAuth
DEBUG s.a.a.h.a.i.c.SdkTlsSocketFactory:366 - Connecting socket to portal.sso.us-
east-1.amazonaws.com/18.235.195.183:443 with timeout 2000
...
DEBUG s.a.a.requestId:85 - Received successful response: 200, Request ID: bb4f40f4-
e920-4b5c-8648-58f26e7e08cd, Extended Request ID: not available
DEBUG s.a.a.request:85 - Received successful response: 200, Request ID: bb4f40f4-
e920-4b5c-8648-58f26e7e08cd, Extended Request ID: not available
DEBUG s.a.a.u.c.CachedSupplier:85 -
 (software.amazon.awssdk.services.sso.auth.SsoCredentialsProvider@b965857) Successfully
 refreshed cached value. Next Prefetch Time: 2024-04-25T22:03:10.097Z. Next Stale Time:
 2024-04-25T22:05:30Z
DEBUG s.a.a.c.i.ExecutionInterceptorChain:85 - Interceptor
 'software.amazon.awssdk.services.s3.endpoints.internal.S3RequestSetEndpointInterceptor@7c2327f
 modified the message with its modifyHttpRequest method.
...
DEBUG s.a.a.c.i.h.p.s.SigningStage:85 - Using SelectedAuthScheme: aws.auth#sigv4
...
DEBUG s.a.a.a.s.Aws4Signer:85 - AWS4 Canonical Request: GET
...
DEBUG s.a.a.h.a.a.i.s.DefaultV4RequestSigner:85 - AWS4 String to sign: AWS4-HMAC-SHA256
20240425T210631Z
20240425/us-east-1/s3/aws4_request
aafb7784627fa7a49584256cb746279751c48c2076f813259ef767ecce304d64
DEBUG s.a.a.h.a.i.c.SdkTlsSocketFactory:366 - Connecting socket to s3.us-
east-1.amazonaws.com/52.217.41.86:443 with timeout 2000
...
```

`log4j2.xml`File berikut mengkonfigurasi output sebelumnya.

```
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%-5p %c{1.}:%L - %m%n" />
        </Console>
```

```
    </Appenders>

    <Loggers>
        <Root level="WARN">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <Logger name="software.amazon.awssdk" level="DEBUG" />
    </Loggers>
</Configuration>
```

## Aktifkan pencatatan kawat

Hal ini dapat berguna untuk melihat permintaan dan tanggapan yang tepat bahwa SDK for Java 2.x mengirim dan menerima. Jika Anda memerlukan akses ke informasi ini, Anda dapat mengaktifkannya sementara dengan menambahkan konfigurasi yang diperlukan tergantung pada klien HTTP yang digunakan klien layanan.

Secara default, klien layanan sinkron, seperti S3Client, menggunakan Apache yang mendasari HttpClient, dan klien layanan asinkron, seperti S3 AsyncClient, menggunakan klien HTTP non-blocking Netty.

Berikut adalah rincian klien HTTP yang dapat Anda gunakan untuk dua kategori klien layanan:

| Klien HTTP sinkron | Klien HTTP Asinkron |
| --- | --- |
| ApacheHttpClient (default) | NettyNioAsyncHttpClient (default) |
| UrlConnectionHttpClient | AwsCrtAsyncHttpClient |
| AwsCrtHttpClient | |
| Apache5 HttpClient | |

Lihat tab yang sesuai di bawah ini untuk pengaturan konfigurasi yang perlu Anda tambahkan tergantung pada klien HTTP yang mendasarinya.

> **Warning**
>
> Kami menyarankan Anda hanya menggunakan wire logging untuk tujuan debugging. Nonaktifkan di lingkungan produksi Anda karena dapat mencatat data sensitif. Ini mencatat

permintaan atau respons penuh tanpa enkripsi, bahkan untuk panggilan HTTPS. Untuk permintaan besar (misalnya, untuk mengunggah file ke Amazon S3) atau tanggapan, pencatatan kawat verbose juga dapat memengaruhi kinerja aplikasi Anda secara signifikan.

ApacheHttpClient

Tambahkan logger “org.apache.http.wire” ke file `log4j2.xml` konfigurasi dan atur levelnya ke “DEBUG”.

`log4j2.xml`File berikut menyalakan pencatatan kawat penuh untuk Apache HttpClient.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
  <Logger name="org.apache.http.wire" level="DEBUG" />
 </Loggers>
</Configuration>
```

Ketergantungan Maven tambahan pada `log4j-1.2-api` artefak diperlukan untuk wire logging dengan Apache karena menggunakan 1.2 di bawah tenda.

Set lengkap dependensi Maven untuk log4j 2, termasuk wire logging untuk klien HTTP Apache ditampilkan dalam cuplikan file build berikut.

Maven

```
...
<dependencyManagement>
    ...
    <dependencies>
```

```
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-bom</artifactId>
            <version>VERSION</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
...
<!-- The following is needed for Log4j2 with SLF4J -->
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-slf4j2-impl</artifactId>
</dependency>

<!-- The following is needed for Apache HttpClient wire logging -->
<dependency>
   <groupId>org.apache.logging.log4j</groupId>
   <artifactId>log4j-1.2-api</artifactId>
</dependency>
...
```

Gradle—Kotlin DSL

```
...
dependencies {
    ...
    implementation(platform("org.apache.logging.log4j:log4j-bom:VERSION"))
    implementation("org.apache.logging.log4j:log4j-slf4j2-impl")
    implementation("org.apache.logging.log4j:log4j-1.2-api")
}
...
```

Gunakan `2.20.0` untuk versi minimum `log4j-bom` artefak. Untuk versi terbaru, gunakan versi yang diterbitkan ke pusat Maven. Ganti *VERSION* dengan versi yang akan Anda gunakan.

Apache5HttpClient

Tambahkan logger “org.apache.hc.client5.http.wire” ke file konfigurasi dan atur levelnya ke “DEBUG”. `log4j2.xml`

`log4j2.xml`File berikut mengaktifkan pencatatan kawat penuh untuk HttpClient Apache5.

```
<Configuration status="WARN">
 <Appenders>
  <Console name="ConsoleAppender" target="SYSTEM_OUT">
   <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m%n" />
  </Console>
 </Appenders>

 <Loggers>
  <Root level="WARN">
   <AppenderRef ref="ConsoleAppender"/>
  </Root>
  <Logger name="software.amazon.awssdk" level="WARN" />
  <Logger name="software.amazon.awssdk.request" level="DEBUG" />
  <Logger name="org.apache.hc.client5.http.wire" level="DEBUG" />
 </Loggers>
</Configuration>
```

### UrlConnectionHttpClient

Untuk mencatat detail untuk klien layanan yang menggunakan`UrlConnectionHttpClient`, pertama buat `logging.properties` file dengan konten berikut:

```
handlers=java.util.logging.ConsoleHandler
java.util.logging.ConsoleHandler.level=FINEST
sun.net.www.protocol.http.HttpURLConnection.level=ALL
```

Mengatur properti sistem JVM berikut dengan jalur lengkap dari: `logging.properties`

```
-Djava.util.logging.config.file=/full/path/to/logging.properties
```

Konfigurasi ini akan mencatat satu-satunya header permintaan dan respons, misalnya:

```
<Request>  FINE: sun.net.www.MessageHeader@35a9782c11 pairs: {GET /fileuploadtest
 HTTP/1.1: null}{amz-sdk-invocation-id: 5f7e707e-4ac5-bef5-ba62-00d71034ffdc}
{amz-sdk-request: attempt=1; max=4}{Authorization: AWS4-HMAC-SHA256
 Credential=<deleted>/20220927/us-east-1/s3/aws4_request, SignedHeaders=amz-sdk-
invocation-id;amz-sdk-request;host;x-amz-content-sha256;x-amz-date;x-amz-te,
 Signature=e367fa0bc217a6a65675bb743e1280cf12fbe8d566196a816d948fdf0b42ca1a}{User-
Agent: aws-sdk-java/2.17.230 Mac_OS_X/12.5 OpenJDK_64-Bit_Server_VM/25.332-b08
 Java/1.8.0_332 vendor/Amazon.com_Inc. io/sync http/UrlConnection cfg/retry-mode/
legacy}{x-amz-content-sha256: UNSIGNED-PAYLOAD}{X-Amz-Date: 20220927T133955Z}{x-amz-
```

```
te: append-md5}{Host: tkhill-test1.s3.amazonaws.com}{Accept: text/html, image/gif,
 image/jpeg, *; q=.2, */*; q=.2}{Connection: keep-alive}
<Response> FINE: sun.net.www.MessageHeader@70a36a6611 pairs: {null: HTTP/1.1
 200 OK}{x-amz-id-2: sAFeZDOKdUMsBbkdjyDZw7P0oocb4C9KbiuzfJ6TWKQsGXHM/
dFuOvr2tUb7Y1wEHGdJ3DSIxq0=}{x-amz-request-id: P9QW9SMZ97FKZ9X7}{Date: Tue,
 27 Sep 2022 13:39:57 GMT}{Last-Modified: Tue, 13 Sep 2022 14:38:12 GMT}{ETag:
 "2cbe5ad4a064cedec33b452bebf48032"}{x-amz-transfer-encoding: append-md5}{Accept-
Ranges: bytes}{Content-Type: text/plain}{Server: AmazonS3}{Content-Length: 67}
```

Untuk melihat request/response tubuh, tambahkan `-Djavax.net.debug=all` ke properti JVM. Properti tambahan ini mencatat banyak informasi, termasuk semua informasi SSL.

Di dalam konsol log atau file log, cari `"GET"` atau `"POST"` dengan cepat pergi ke bagian log yang berisi permintaan dan tanggapan aktual. `"Plaintext before ENCRYPTION"`Cari permintaan dan tanggapan `"Plaintext after DECRYPTION"` untuk melihat teks lengkap header dan badan.

NettyNioAsyncHttpClient

Jika klien layanan asinkron Anda menggunakan default`NettyNioAsyncHttpClient`, tambahkan dua logger tambahan ke `log4j2.xml` file Anda untuk mencatat header HTTP dan badan permintaan/respons.

```
<Logger name="io.netty.handler.logging" level="DEBUG" />
<Logger name="io.netty.handler.codec.http2.Http2FrameLogger" level="DEBUG" />
```

Berikut adalah `log4j2.xml` contoh lengkapnya:

```
<Configuration status="WARN">
    <Appenders>
        <Console name="ConsoleAppender" target="SYSTEM_OUT">
            <PatternLayout pattern="%d{YYYY-MM-dd HH:mm:ss} [%t] %-5p %c:%L - %m
%n" />
        </Console>
    </Appenders>

    <Loggers>
        <Root level="WARN">
            <AppenderRef ref="ConsoleAppender"/>
        </Root>
        <Logger name="software.amazon.awssdk" level="WARN" />
        <Logger name="software.amazon.awssdk.request" level="DEBUG" />
```

```
        <Logger name="io.netty.handler.logging" level="DEBUG" />
        <Logger name="io.netty.handler.codec.http2.Http2FrameLogger" level="DEBUG" /
>
    </Loggers>
</Configuration>
```

Pengaturan ini mencatat semua detail header dan request/response badan.

AwsCrtAsyncHttpClient/AwsCrtHttpClient

Jika Anda telah mengonfigurasi klien layanan Anda untuk menggunakan instance klien HTTP AWS berbasis CRT, Anda dapat mencatat detail dengan mengatur properti sistem JVM atau secara terprogram.

Log to a file at "Debug" level

Menggunakan properti sistem:

```
-Daws.crt.log.leve
l=Trace
-Daws.crt.log.des
tination=File
-Daws.crt.log.fil
ename=<path to file>
```

Secara terprogram:

```
import software.amazon.awssdk.crt.Log;

// Execute this statement before constructing the
 SDK service client.
Log.initLoggingToFile(Log.LogLevel.Trace,
 "<path to file>");
```

Log to the console at "Debug" level

Menggunakan properti sistem:

```
-Daws.crt.log.leve
l=Trace
-Daws.crt.log.des
tination=Stdout
```

Secara terprogram:

```
import software.amazon.awssdk.crt.Log;

// Execute this statement before constructing the
 SDK service client.
Log.initLoggingToStdout(Log.LogLevel.Trace);
```

Untuk alasan keamanan, pada level “Trace” klien HTTP AWS berbasis CRT hanya mencatat header respons. Header permintaan, badan permintaan, dan badan respons tidak dicatat.

# Mengkonfigurasi titik akhir klien di AWS SDK for Java 2.x

SDK for Java 2.x menyediakan beberapa cara untuk mengonfigurasi titik akhir layanan. Endpoint adalah URL yang digunakan SDK untuk melakukan panggilan API. Layanan AWS Secara default, SDK secara otomatis menentukan titik akhir yang sesuai untuk setiap layanan berdasarkan konfigurasi yang telah Wilayah AWS Anda konfigurasi. Namun, ada skenario di mana Anda mungkin perlu menyesuaikan atau mengganti titik akhir ini:

- Bekerja dengan implementasi layanan lokal atau pihak ketiga (seperti LocalStack)
- Menghubungkan ke Layanan AWS melalui proxy atau titik akhir VPC
- Pengujian terhadap titik akhir layanan beta atau pra-rilis

## Opsi konfigurasi titik akhir

AWS SDK for Java 2.x Ini menyediakan beberapa cara untuk mengkonfigurasi titik akhir:

- Konfigurasi dalam kode dengan menggunakan pembuat klien layanan
- Konfigurasi eksternal dengan variabel lingkungan
- Konfigurasi eksternal dengan properti sistem JVM
- Konfigurasi eksternal dengan file AWS konfigurasi bersama

## Konfigurasi titik akhir dalam kode

### Menggunakan **`endpointOverride`**

Cara paling langsung untuk mengonfigurasi titik akhir adalah dengan menggunakan `endpointOverride` metode pada pembuat klien layanan. Metode ini menerima `URI` objek yang mewakili URL endpoint kustom.

Example Menyetel titik akhir khusus untuk klien Amazon S3

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import java.net.URI;

S3Client s3 = S3Client.builder()
```

```
        .region(Region.US_WEST_2)
        .endpointOverride(URI.create("https://my-custom-s3-endpoint.example.com"))
        .build();
```

Saat menggunakan`endpointOverride`, Anda masih harus menentukan wilayah untuk klien, meskipun titik akhir disetel secara eksplisit. Wilayah ini digunakan untuk menandatangani permintaan.

### Penemuan titik akhir

Beberapa Layanan AWS mendukung penemuan titik akhir, di mana SDK dapat secara otomatis menemukan titik akhir optimal untuk digunakan. Anda dapat mengaktifkan atau menonaktifkan fitur ini menggunakan `endpointDiscoveryEnabled` metode pada pembuat klien layanan.

Example Mengaktifkan penemuan titik akhir untuk klien DynamoDB

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;

DynamoDbClient dynamoDb = DynamoDbClient.builder()
        .region(Region.US_WEST_2)
        .endpointDiscoveryEnabled(true)
        .build();
```

## Konfigurasi titik akhir tingkat permintaan

Dalam beberapa kasus, Anda mungkin perlu mengganti titik akhir untuk permintaan tertentu saat menggunakan klien yang sama untuk permintaan lain dengan titik akhir default. AWS SDK for Java 2.x Mendukung ini melalui penggantian permintaan.

Example Mengganti titik akhir untuk permintaan tertentu

```
import software.amazon.awssdk.core.SdkRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.http.SdkHttpRequest;
```

```
S3Client s3 = S3Client.builder()
        .region(Region.US_WEST_2)
        .build();

// Create a request
GetObjectRequest getObjectRequest = GetObjectRequest.builder()
        .bucket("amzn-s3-demo-bucket")
        .key("my-key")
        .overrideConfiguration(c -> c.putHeader("Host", "custom-endpoint.example.com"))
        .build();

// Execute the request with the custom endpoint
s3.getObject(getObjectRequest);
```

Perhatikan bahwa penggantian titik akhir tingkat permintaan terbatas dan mungkin tidak berfungsi untuk semua layanan atau skenario. Untuk kebanyakan kasus, disarankan untuk menggunakan konfigurasi titik akhir tingkat klien.

## Konfigurasi titik akhir eksternal

### Menggunakan variabel lingkungan

Anda dapat mengonfigurasi titik akhir menggunakan variabel lingkungan. SDK mendukung konfigurasi titik akhir khusus layanan melalui variabel lingkungan dalam format`AWS_ENDPOINT_URL_[SERVICE]`, di mana `[SERVICE]` adalah pengenal layanan huruf besar.

Example Menyetel titik akhir S3 menggunakan variabel lingkungan

```
# For Linux/macOS
export AWS_ENDPOINT_URL_S3=https://my-custom-s3-endpoint.example.com

# For Windows
set AWS_ENDPOINT_URL_S3=https://my-custom-s3-endpoint.example.com
```

Anda juga dapat mengatur awalan atau akhiran URL endpoint global menggunakan variabel lingkungan berikut:

- `AWS_ENDPOINT_URL`- Menetapkan titik akhir global untuk semua layanan

- `AWS_ENDPOINT_URL_PREFIX`- Menambahkan awalan ke semua titik akhir layanan
- `AWS_ENDPOINT_URL_SUFFIX`- Menambahkan akhiran ke semua titik akhir layanan

### Menggunakan properti sistem JVM

Anda juga dapat mengonfigurasi titik akhir menggunakan properti sistem JVM. Formatnya mirip dengan variabel lingkungan tetapi menggunakan konvensi penamaan yang berbeda.

Example Mengatur titik akhir S3 menggunakan properti sistem JVM

```
java -Daws.endpointUrl.s3=https://my-custom-s3-endpoint.example.com -jar your-
application.jar
```

Konfigurasi endpoint global juga tersedia melalui properti sistem:

- `aws.endpointUrl`- Menetapkan titik akhir global untuk semua layanan
- `aws.endpointUrl.prefix`- Menambahkan awalan ke semua titik akhir layanan
- `aws.endpointUrl.suffix`- Menambahkan akhiran ke semua titik akhir layanan

### Menggunakan file AWS konfigurasi bersama

Ini AWS SDK for Java 2.x juga mendukung konfigurasi titik akhir melalui file AWS konfigurasi bersama, biasanya terletak di `~/.aws/config` (Linux/macOS) atau (Windows). `%USERPROFILE%\.aws\config` Lihat Panduan Referensi Alat AWS SDKs dan untuk informasi dan contoh.

## Konfigurasi diutamakan

Ketika beberapa konfigurasi titik akhir hadir, SDK mengikuti urutan prioritas ini (dari tertinggi ke terendah):

1. Pengesampingan tingkat permintaan (bila berlaku)
2. Konfigurasi tingkat klien melalui `endpointOverride`
3. Variabel lingkungan
4. Properti sistem JVM
5. File AWS konfigurasi bersama

6. Titik akhir default berdasarkan konfigurasi Wilayah AWS

## Konfigurasi titik akhir khusus layanan

Beberapa Layanan AWS memiliki opsi konfigurasi titik akhir tambahan khusus untuk layanan itu. Berikut adalah beberapa contoh:

### Konfigurasi Titik Akhir Amazon S3

Amazon S3 mendukung beberapa konfigurasi titik akhir melalui kelas: `S3Configuration`

- `dualstackEnabled`- Memungkinkan IPv6 dukungan
- `accelerateModeEnabled`- Mengaktifkan Akselerasi Transfer S3
- `pathStyleAccessEnabled`- Menggunakan akses gaya jalur alih-alih gaya yang dihosting virtual
- `useArnRegionEnabled`- Menggunakan wilayah dari ARN untuk permintaan lintas wilayah
- `fipsModeEnabled`- Permintaan rute ke titik akhir yang sesuai dengan FIPS

Example Mengkonfigurasi opsi titik akhir khusus S3

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.S3Configuration;

S3Client s3 = S3Client.builder()
        .region(Region.US_WEST_2)
        .serviceConfiguration(S3Configuration.builder()
                .accelerateModeEnabled(true)
                .dualstackEnabled(true)
                .pathStyleAccessEnabled(false)
                .fipsModeEnabled(true)
                .build())
        .build();
```

### Konfigurasi titik akhir DynamoDB

Untuk DynamoDB, Anda mungkin ingin menggunakan penemuan titik akhir atau terhubung ke DynamoDB lokal untuk pengujian:

Example Menghubungkan ke DynamoDB lokal

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.net.URI;

DynamoDbClient dynamoDb = DynamoDbClient.builder()
        .endpointOverride(URI.create("http://localhost:8000"))
        // The region is meaningless for DynamoDB local but required for the client
 builder.
        .region(Region.US_WEST_2)
        .build();
```

DynamoDB juga mendukung penggunaan endpoint berbasis akun, yang dapat Anda konfigurasi dalam kode atau menggunakan pengaturan eksternal. Contoh berikut menunjukkan cara menonaktifkan penggunaan endpoint berbasis akun dalam kode saat Anda membuat klien (pengaturan default lebih disukai):

```
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .region(Region.US_EAST_1)
    .accountIdEndpointMode(AccountIdEndpointMode.DISABLED)
    .build();
```

## Praktik terbaik

Saat mengonfigurasi titik akhir di AWS SDK for Java 2.x, pertimbangkan praktik terbaik ini:

- Gunakan konfigurasi eksternal untuk titik akhir khusus lingkungan —Gunakan variabel lingkungan, properti sistem, atau file AWS konfigurasi untuk titik akhir yang bervariasi antar lingkungan (pengembangan, pengujian, produksi).
- Gunakan konfigurasi dalam kode untuk titik akhir khusus aplikasi — Gunakan `endpointOverride` metode pembuat klien untuk titik akhir yang spesifik untuk desain aplikasi Anda.
- Selalu tentukan wilayah —Bahkan saat mengganti titik akhir, selalu tentukan wilayah seperti yang digunakan untuk penandatanganan permintaan.
- Berhati-hatilah dengan penggantian titik akhir global —Menggunakan penggantian titik akhir global dapat memengaruhi semua layanan, yang mungkin bukan yang Anda inginkan.

- Pertimbangkan implikasi keamanan —Saat menggunakan titik akhir khusus, pastikan mereka memiliki langkah-langkah keamanan yang tepat, terutama untuk beban kerja produksi.

# Konfigurasikan klien HTTP di AWS SDK for Java 2.x

Anda dapat mengubah klien HTTP untuk digunakan untuk klien layanan Anda serta mengubah konfigurasi default untuk klien HTTP dengan AWS SDK for Java 2.x. Bagian ini membahas klien HTTP dan pengaturan untuk SDK.

## Klien HTTP tersedia di SDK for Java

### Klien sinkron

Klien HTTP sinkron di SDK for Java mengimplementasikan SdkHttpClientantarmuka. Klien layanan sinkron, seperti `S3Client` atau`DynamoDbClient`, memerlukan penggunaan klien HTTP sinkron. Ini AWS SDK untuk Java menawarkan tiga klien HTTP sinkron.

ApacheHttpClient (default)

ApacheHttpClientadalah klien HTTP default untuk klien layanan sinkron. Untuk informasi tentang mengonfigurasi`ApacheHttpClient`, lihatKonfigurasikan klien HTTP berbasis Apache.

AwsCrtHttpClient

AwsCrtHttpClientmenyediakan throughput tinggi dan IO non-pemblokiran. Ini dibangun di atas AWS Common Runtime (CRT) Http Client. Untuk informasi tentang mengkonfigurasi `AwsCrtHttpClient` dan menggunakannya dengan klien layanan, lihatthe section called “Konfigurasikan AWS klien HTTP berbasis CRT”.

UrlConnectionHttpClient

Untuk meminimalkan jumlah toples dan pustaka pihak ketiga yang Anda gunakan aplikasi, Anda dapat menggunakan. UrlConnectionHttpClient Untuk informasi tentang mengonfigurasi`UrlConnectionHttpClient`, lihatKonfigurasikan klien HTTP URLConnection berbasis.

Apache5 HttpClient

Apache5 HttpClient adalah versi terbaru yang dibangun di atas Apache 5.x. *`ApacheHttpClient`* HttpClient Versi 5.x adalah versi yang dikelola secara aktif oleh Apache, dan meningkatkan

versi sebelumnya yang digunakan dengan `ApacheHttpClient` menghadirkan kompatibilitas ekosistem Java modern termasuk dukungan thread virtual untuk Java 21, dan peningkatan fleksibilitas logging melalui SLF4 J. `Apache5HttpClient` akan menggantikan `ApacheHttpClient` sebagai klien sinkron default dalam versi masa depan SDK for AWS Java 2.x. Ini memiliki API dan fitur yang identik, membuatnya ideal sebagai pengganti drop-in. Untuk informasi tentang mengonfigurasi`Apache5HttpClient`, lihatKonfigurasikan klien HTTP berbasis Apache 5.x.

### Klien asinkron

Klien HTTP asinkron di SDK for Java mengimplementasikan antarmuka. SdkAsyncHttpClient Klien layanan asinkron, seperti `S3AsyncClient` atau`DynamoDbAsyncClient`, memerlukan penggunaan klien HTTP asinkron. Ini AWS SDK untuk Java menawarkan dua klien HTTP asinkron.

NettyNioAsyncHttpClient (default)

NettyNioAsyncHttpClientadalah klien HTTP default yang digunakan oleh klien asinkron. Untuk informasi tentang mengonfigurasi`NettyNioAsyncHttpClient`, lihatthe section called “Konfigurasikan klien HTTP berbasis Netty”.

AwsCrtAsyncHttpClient


AwsCrtAsyncHttpClientIni didasarkan pada AWS Common Runtime (CRT) HTTP Client. Untuk informasi tentang mengonfigurasi`AwsCrtAsyncHttpClient`, lihatthe section called “Konfigurasikan AWS klien HTTP berbasis CRT”.

## Rekomendasi klien HTTP

Beberapa faktor ikut bermain ketika Anda memilih implementasi klien HTTP. Gunakan informasi berikut untuk membantu Anda memutuskan.

### Diagram alur rekomendasi

Diagram alur berikut memberikan panduan umum untuk membantu Anda menentukan klien HTTP mana yang akan digunakan.

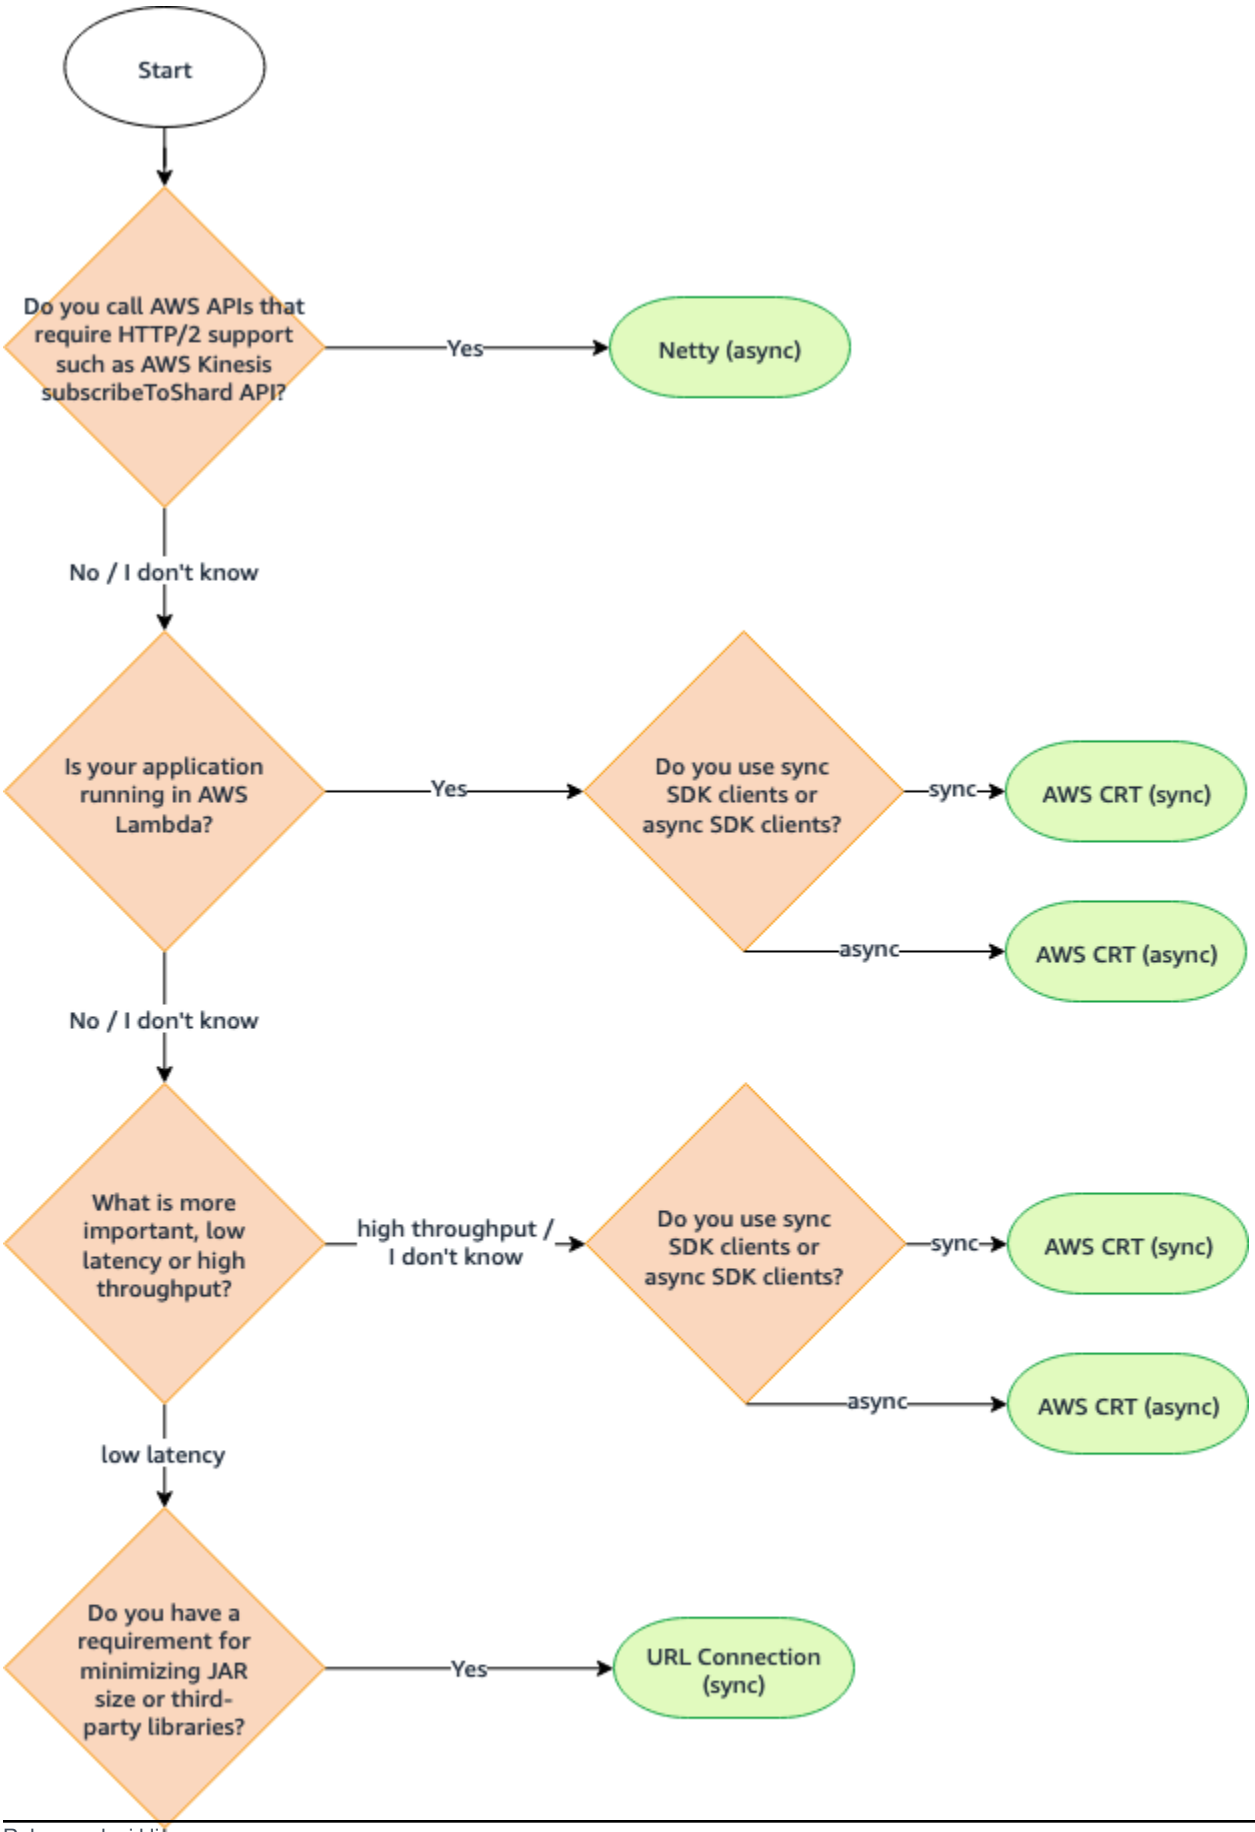
Start
Do you call AWS APIs that require HTTP/2 support such as AWS Kinesis subscribeToShard API?
Yes
Netty (async)
No / I don't know
Is your application running in AWS Lambda?
Yes
Do you use sync SDK clients or async SDK clients?
sync
AWS CRT (sync)
async
AWS CRT (async)
No / I don't know
What is more important, low latency or high throughput?
high throughput / I don't know
Do you use sync SDK clients or async SDK clients?
sync
AWS CRT (sync)
async
AWS CRT (async)
low latency
Do you have a requirement for minimizing JAR size or third-party libraries?
Yes
URL Connection (sync)
No / I don't know

## Perbandingan klien HTTP

Tabel berikut memberikan informasi rinci untuk setiap klien HTTP.

| Klien HTTP | Sinkronisasi atau asinkron | Kapan harus digunakan | Batasan/kelemahan |
|---|---|---|---|
| Klien HTTP berbasis Apache<br><br>(klien HTTP sinkronisasi default) | Sinkronkan | Gunakan jika Anda lebih suka latensi rendah daripada throughput tinggi | Waktu startup lebih lambat dibandingkan dengan klien HTTP lainnya |
| URLConnectionberbasis HTTP klien | Sinkronkan | Gunakan jika Anda memiliki persyaratan sulit untuk membatasi dependensi pihak ketiga | Tidak mendukung metode HTTP PATCH, yang diperlukan oleh beberapa API seperti operasi APIGateway Pembaruan Amazon |
| AWS Klien HTTP sinkronisasi berbasis CRT [1] | Sinkronkan | • Gunakan jika aplikasi Anda berjalan di AWS Lambda<br><br>• Gunakan jika Anda lebih suka throughput tinggi daripada latensi rendah<br><br>• Gunakan jika Anda lebih suka menyinkronkan klien SDK | Properti sistem Java berikut tidak didukung:<br><br>• javax.net.ssl.keystore<br>• javax.net.ssl.keyStorePassword<br>• javax.net.ssl.truststore |

| Klien HTTP | Sinkronisasi atau asinkron | Kapan harus digunakan | Batasan/kelemahan |
|---|---|---|---|
| | | | • javax.net.ssl.trustStorePassword |
| Klien HTTP berbasis Netty<br><br>(klien HTTP asinkron default) | Asinkron | • Gunakan jika aplikasi Anda memanggil APIs yang memerlukan dukungan HTTP/2 seperti Kinesis API SubscribeToShard | Waktu startup lebih lambat dibandingkan dengan klien HTTP lainnya |

| Klien HTTP | Sinkronisasi atau asinkron | Kapan harus digunakan | Batasan/kelemahan |
| --- | --- | --- | --- |
| AWS Klien HTTP async berbasis CRT [1] | Asinkron | • Gunakan jika aplikasi Anda berjalan di AWS Lambda<br>• Gunakan jika Anda lebih suka throughput tinggi daripada latensi rendah<br>• Gunakan jika Anda lebih suka klien SDK async | • Tidak mendukung klien layanan yang memerlukan dukungan HTTP/2 seperti dan `KinesisAsynClient` `TranscribeStreamingAsyncClient`<br>Properti sistem Java berikut tidak didukung:<br>• javax.net.ssl.keystore<br>• javax.net.ssl.keyStorePassword<br>• javax.net.ssl.truststore<br>• javax.net.ssl. trustStorePassword |

[1] Karena manfaat tambahannya, kami sarankan Anda menggunakan klien HTTP AWS berbasis CRT jika memungkinkan.

# Default konfigurasi cerdas

AWS SDK for Java 2.x (versi 2.17.102 atau yang lebih baru) menawarkan fitur default konfigurasi cerdas. Fitur ini mengoptimalkan dua properti klien HTTP bersama dengan properti lain yang tidak mempengaruhi klien HTTP.

Default konfigurasi cerdas menetapkan nilai yang masuk akal untuk `tlsNegotiationTimeoutInMillis` properti `connectTimeoutInMillis` dan berdasarkan nilai mode default yang Anda berikan. Anda memilih nilai mode default berdasarkan karakteristik aplikasi Anda.

Untuk informasi selengkapnya tentang default konfigurasi cerdas dan cara memilih nilai mode default yang paling cocok untuk aplikasi Anda, lihat Panduan Referensi Alat dan Alat.AWS SDKs

Berikut adalah empat cara untuk mengatur mode default untuk aplikasi Anda.

Service client

Gunakan pembuat klien layanan untuk mengonfigurasi mode default langsung pada klien layanan. Contoh berikut menetapkan modus default untuk untuk`auto`. `DynamoDbClient`

```
DynamoDbClient ddbClient = DynamoDbClient.builder()
                            .defaultsMode(DefaultsMode.AUTO)
                            .build();
```

System property

Anda dapat menggunakan properti `aws.defaultsMode` sistem untuk menentukan mode default. Jika Anda mengatur properti sistem di Java, Anda perlu mengatur properti sebelum menginisialisasi klien layanan apa pun.

Contoh berikut menunjukkan kepada Anda cara mengatur mode default untuk `auto` menggunakan properti sistem yang disetel di Java.

```
System.setProperty("aws.defaultsMode", "auto");
```

Contoh berikut menunjukkan bagaimana Anda mengatur mode default untuk `auto` menggunakan `-D` opsi perintah. `java`

```
java -Daws.defaultsMode=auto
```

Environment variable

Tetapkan nilai untuk variabel lingkungan `AWS_DEFAULTS_MODE` untuk memilih mode default untuk aplikasi Anda.

Informasi berikut menunjukkan perintah untuk menjalankan untuk mengatur nilai untuk modus default untuk `auto` menggunakan variabel lingkungan.

| Sistem operasi | Perintah untuk mengatur variabel lingkungan |
| --- | --- |
| Linux, macOS, atau Unix | `export AWS_DEFAULTS_MODE=auto` |
| Windows | `set AWS_DEFAULTS_MODE=auto` |

AWS config file

Anda dapat menambahkan properti `defaults_mode` konfigurasi ke AWS `config` file bersama seperti yang ditunjukkan contoh berikut.

```
[default]
defaults_mode = auto
```

Jika Anda menyetel mode default secara global dengan properti sistem, variabel lingkungan, atau file AWS konfigurasi, Anda dapat mengganti pengaturan saat membuat klien HTTP.

Saat Anda membangun klien HTTP dengan `httpClientBuilder()` metode ini, pengaturan hanya berlaku untuk instance yang sedang Anda bangun. Contohnya ditunjukkan di sini. Klien HTTP berbasis Netty dalam contoh ini mengganti nilai mode default apa pun yang ditetapkan secara global untuk dan. `connectTimeoutInMillis` `tlsNegotiationTimeoutInMillis`

## Konfigurasikan klien HTTP berbasis Apache

Klien layanan sinkron dalam AWS SDK for Java 2.x menggunakan klien HTTP berbasis Apache, secara default. ApacheHttpClient SDK `ApacheHttpClient` didasarkan pada HttpClientApache.

SDK juga menawarkan UrlConnectionHttpClient, yang memuat lebih cepat, tetapi memiliki lebih sedikit fitur. Untuk informasi tentang mengonfigurasi`UrlConnectionHttpClient`, lihatthe section called “Konfigurasikan klien HTTP URLConnection berbasis”.

Untuk melihat set lengkap opsi konfigurasi yang tersedia untuk Anda`ApacheHttpClient`, lihat ApacheHttpClient.Builder dan ProxyConfiguration.Builder.

## Akses **`ApacheHttpClient`**

Dalam kebanyakan situasi, Anda menggunakan `ApacheHttpClient` tanpa konfigurasi eksplisit. Anda mendeklarasikan klien layanan Anda dan SDK akan mengkonfigurasi `ApacheHttpClient` dengan nilai standar untuk Anda.

Jika Anda ingin mengkonfigurasi `ApacheHttpClient` atau menggunakannya secara eksplisit dengan beberapa klien layanan, Anda harus membuatnya tersedia untuk konfigurasi.

Tidak diperlukan konfigurasi

Saat Anda mendeklarasikan dependensi pada klien layanan di Maven, SDK menambahkan dependensi runtime pada artefak. `apache-client` Ini membuat `ApacheHttpClient` kelas tersedia untuk kode Anda saat runtime, tetapi tidak pada waktu kompilasi. Jika Anda tidak mengonfigurasi klien HTTP berbasis Apache, Anda tidak perlu menentukan ketergantungan untuk itu.

Dalam cuplikan XHTML berikut dari `pom.xml` file Maven, dependensi yang dideklarasikan dengan `<artifactId>s3</artifactId>` secara otomatis membawa klien HTTP berbasis Apache. Anda tidak perlu mendeklarasikan ketergantungan khusus untuk itu.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <!-- The s3 dependency automatically adds a runtime dependency on the
 ApacheHttpClient-->
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>
</dependencies>
```

Dengan dependensi ini, Anda tidak dapat membuat perubahan konfigurasi HTTP eksplisit, karena `ApacheHttpClient` pustaka hanya ada di classpath runtime.

Konfigurasi diperlukan

Untuk mengkonfigurasi`ApacheHttpClient`, Anda perlu menambahkan ketergantungan pada `apache-client` perpustakaan pada waktu kompilasi.

Lihat contoh berikut dari file Maven untuk mengkonfigurasi `pom.xml` file. `ApacheHttpClient`

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>
    <!-- By adding the apache-client dependency, ApacheHttpClient will be added to
         the compile classpath so you can configure it. -->
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>apache-client</artifactId>
    </dependency>
</dependencies>
```

## Gunakan dan konfigurasikan **`ApacheHttpClient`**

Anda dapat mengonfigurasi instance `ApacheHttpClient` bersama dengan membangun klien layanan, atau Anda dapat mengonfigurasi satu instance untuk dibagikan di beberapa klien layanan.

Dengan salah satu pendekatan, Anda menggunakan `ApacheHttpClient.Builder` untuk mengkonfigurasi properti untuk klien HTTP berbasis Apache.

Praktik terbaik: mendedikasikan sebuah **`ApacheHttpClient`** instance untuk klien layanan

Jika Anda perlu mengonfigurasi instance`ApacheHttpClient`, kami sarankan Anda membuat `ApacheHttpClient` instance khusus. Anda dapat melakukannya dengan menggunakan `httpClientBuilder` metode pembangun klien layanan. Dengan cara ini, siklus hidup klien HTTP dikelola oleh SDK, yang membantu menghindari potensi kebocoran memori jika `ApacheHttpClient` instance tidak ditutup saat tidak lagi diperlukan.

Contoh berikut membuat `S3Client` dan mengkonfigurasi instance tertanam `ApacheHttpClient` dengan `maxConnections` dan `connectionTimeout` nilai-nilai. Contoh HTTP dibuat menggunakan `httpClientBuilder` metode`S3Client.Builder`.

Impor

```
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Kode

```
S3Client s3Client = S3Client   // Singleton: Use the s3Client for all requests.
    .builder()
    .httpClientBuilder(ApacheHttpClient.builder()
        .maxConnections(100)
        .connectionTimeout(Duration.ofSeconds(5))
    ).build();

// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close all service clients.
```

Pendekatan alternatif: bagikan **`ApacheHttpClient`** contoh

Untuk membantu menjaga penggunaan sumber daya dan memori lebih rendah untuk aplikasi Anda, Anda dapat mengonfigurasi `ApacheHttpClient` dan membagikannya di beberapa klien layanan. Kumpulan koneksi HTTP akan dibagikan, yang menurunkan penggunaan sumber daya.

> **Note**
>
> Ketika sebuah `ApacheHttpClient` instance dibagikan, Anda harus menutupnya ketika sudah siap untuk dibuang. SDK tidak akan menutup instance saat klien layanan ditutup.

Contoh berikut mengkonfigurasi klien HTTP berbasis Apache yang digunakan oleh dua klien layanan. `ApacheHttpClient`Instance yang dikonfigurasi diteruskan ke `httpClient` metode masing-masing builder. Ketika klien layanan dan klien HTTP tidak lagi diperlukan, kode secara eksplisit menutupnya. Kode menutup klien HTTP terakhir.

Impor

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Kode

```
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
        .maxConnections(100).build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(apacheHttpClient).build();

DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(apacheHttpClient).build();

// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
apacheHttpClient.close();  // Explicitly close apacheHttpClient.
```

## Contoh konfigurasi proxy

Cuplikan kode berikut menggunakan pembangun konfigurasi proxy untuk klien HTTP Apache.

```
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://example.com:1234"))
                        .username("username")
                        .password("password")
                        .addNonProxyHost("localhost")
                        .addNonProxyHost("host.example.com")
                        .build())
                .build();
```

Properti sistem Java yang setara untuk konfigurasi proxy ditampilkan dalam cuplikan baris perintah berikut.

```
$ java -Dhttp.proxyHost=example.com -Dhttp.proxyPort=1234 -Dhttp.proxyUser=username \
-Dhttp.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

Pengaturan setara yang menggunakan variabel lingkungan adalah:

```
// Set the following environment variables.
// $ export HTTP_PROXY="http://username:password@example.com:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .useSystemPropertyValues(Boolean.FALSE)
                        .build())
                .build();

// Run the application.
// $ java -cp ... App
```

> **Note**
>
> Klien HTTP Apache saat ini tidak mendukung properti sistem proxy HTTPS atau variabel lingkungan HTTPS_PROXY.

# Konfigurasikan klien HTTP URLConnection berbasis

Ini AWS SDK for Java 2.x menawarkan klien `UrlConnectionHttpClient` HTTP yang lebih ringan dibandingkan dengan default. `ApacheHttpClient` `UrlConnectionHttpClient`Ini didasarkan pada Java`URLConnection`.

`UrlConnectionHttpClient`Beban lebih cepat daripada klien HTTP berbasis Apache, tetapi memiliki lebih sedikit fitur. Karena memuat lebih cepat, ini adalah solusi yang baik untuk AWS Lambda fungsi Java.

Ini `UrlConnectionHttpClient` memiliki beberapa opsi yang dapat dikonfigurasi yang dapat Anda akses.

> **Note**
>
> `UrlConnectionHttpClient`Tidak mendukung metode HTTP PATCH.
> Beberapa operasi AWS API memerlukan permintaan PATCH. Nama-nama operasi itu biasanya dimulai dengan`Update*`. Berikut ini adalah beberapa contoh.
>
> - Beberapa `Update*` operasi di AWS Security Hub CSPM API dan juga BatchUpdateFindingsoperasi
> - Semua `Update*`operasi API Amazon API Gateway
>
> Jika Anda mungkin menggunakan`UrlConnectionHttpClient`, pertama-tama lihat Referensi API untuk Layanan AWS yang Anda gunakan. Periksa untuk melihat apakah operasi yang Anda butuhkan menggunakan operasi PATCH.

## Akses **`UrlConnectionHttpClient`**

Untuk mengkonfigurasi dan menggunakan`UrlConnectionHttpClient`, Anda mendeklarasikan ketergantungan pada artefak `url-connection-client` Maven dalam file Anda. `pom.xml`

Berbeda dengan`ApacheHttpClient`, tidak `UrlConnectionHttpClient` secara otomatis ditambahkan ke proyek Anda, jadi penggunaan harus secara khusus mendeklarasikannya.

Contoh berikut dari `pom.xml` file menunjukkan dependensi yang diperlukan untuk menggunakan dan mengkonfigurasi klien HTTP.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<!-- other dependencies such as s3 or dynamodb -->

<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>url-connection-client</artifactId>
    </dependency>
</dependencies>
```

## Gunakan dan konfigurasikan **`UrlConnectionHttpClient`**

Anda dapat mengonfigurasi instance `UrlConnectionHttpClient` bersama dengan membangun klien layanan, atau Anda dapat mengonfigurasi satu instance untuk dibagikan di beberapa klien layanan.

Dengan salah satu pendekatan, Anda menggunakan UrlConnectionHttpClient.Builder untuk mengonfigurasi properti untuk klien HTTP URLConnection berbasis.

Praktik terbaik: mendedikasikan sebuah **`UrlConnectionHttpClient`** instance untuk klien layanan

Jika Anda perlu mengonfigurasi instance`UrlConnectionHttpClient`, kami sarankan Anda membuat `UrlConnectionHttpClient` instance khusus. Anda dapat melakukannya dengan menggunakan `httpClientBuilder` metode pembangun klien layanan. Dengan cara ini, siklus hidup klien HTTP dikelola oleh SDK, yang membantu menghindari potensi kebocoran memori jika `UrlConnectionHttpClient` instance tidak ditutup saat tidak lagi diperlukan.

Contoh berikut membuat `S3Client` dan mengkonfigurasi instance tertanam `UrlConnectionHttpClient` dengan `socketTimeout` dan `proxyConfiguration`

nilai-nilai. `proxyConfiguration`Metode ini mengambil ekspresi Java lambda tipe `Consumer<`[`ProxyConfiguration.Builder`]`>`.

Impor

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.urlconnection.UrlConnectionHttpClient;
import java.net.URI;
import java.time.Duration;
```

Kode

```
// Singleton: Use the s3Client for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClientBuilder(UrlConnectionHttpClient.builder()
                    .socketTimeout(Duration.ofMinutes(5))
                    .proxyConfiguration(proxy -> proxy.endpoint(URI.create("http://
proxy.mydomain.net:8888"))))
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close the s3client.
```

Pendekatan alternatif: bagikan **`UrlConnectionHttpClient`** contoh

Untuk membantu menjaga penggunaan sumber daya dan memori lebih rendah untuk aplikasi Anda, Anda dapat mengonfigurasi `UrlConnectionHttpClient` dan membagikannya di beberapa klien layanan. Kumpulan koneksi HTTP akan dibagikan, yang menurunkan penggunaan sumber daya.

> **Note**
>
> Ketika sebuah `UrlConnectionHttpClient` instance dibagikan, Anda harus menutupnya ketika sudah siap untuk dibuang. SDK tidak akan menutup instance saat klien layanan ditutup.

Contoh berikut mengkonfigurasi klien HTTP URLConnection berbasis yang digunakan oleh dua klien layanan. `UrlConnectionHttpClient`Instance yang dikonfigurasi diteruskan ke `httpClient`

metode masing-masing builder. Ketika klien layanan dan klien HTTP tidak lagi diperlukan, kode secara eksplisit menutupnya. Kode menutup klien HTTP terakhir.

Impor

```
import software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.urlconnection.ProxyConfiguration;
import software.amazon.awssdk.http.urlconnection.UrlConnectionHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.net.URI;
import java.time.Duration;
```

Kode

```
SdkHttpClient urlHttpClient = UrlConnectionHttpClient.create();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(urlHttpClient)
            .defaultsMode(DefaultsMode.IN_REGION)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(urlHttpClient)
                  .defaultsMode(DefaultsMode.IN_REGION)
                  .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                  .build();

// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
urlHttpClient.close();
```

### Gunakan **`URLConnectionHttpClient`** dan **`ApacheHttpClient`** bersama-sama

Ketika Anda menggunakan `UrlConnectionHttpClient` dalam aplikasi Anda, Anda harus menyediakan setiap klien layanan dengan `URLConnectionHttpClient` instance atau `ApacheHttpClient` instance menggunakan `httpClientBuilder` metode pembuat klien layanan.

Pengecualian terjadi jika program Anda menggunakan beberapa klien layanan dan kedua hal berikut ini benar:

- Satu klien layanan dikonfigurasi untuk menggunakan `UrlConnectionHttpClient` instance
- Klien layanan lain menggunakan default `ApacheHttpClient` tanpa secara eksplisit membangunnya dengan metode or `httpClient()` `httpClientBuilder()`

Pengecualian akan menyatakan bahwa beberapa implementasi HTTP ditemukan di classpath.

Contoh cuplikan kode berikut mengarah ke pengecualian.

```
// The dynamoDbClient uses the UrlConnectionHttpClient
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
        .httpClient(UrlConnectionHttpClient.create())
        .build();

// The s3Client below uses the ApacheHttpClient at runtime, without specifying it.
// An SdkClientException is thrown with the message that multiple HTTP implementations
 were found on the classpath.
S3Client s3Client = S3Client.create();

// Perform work with the s3Client and dynamoDbClient.

dynamoDbClient.close();
s3Client.close();
```

Hindari pengecualian dengan secara eksplisit mengonfigurasi dengan file. `S3Client` `ApacheHttpClient`

```
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
        .httpClient(UrlConnectionHttpClient.create())
        .build();

S3Client s3Client = S3Client.builder()
```

```
        .httpClient(ApacheHttpClient.create())    // Explicitly build the
 ApacheHttpClient.
        .build();

// Perform work with the s3Client and dynamoDbClient.

dynamoDbClient.close();
s3Client.close();
```

> **Note**
>
> Untuk secara eksplisit membuat`ApacheHttpClient`, Anda harus menambahkan ketergantungan pada `apache-client` artefak dalam file proyek Maven Anda.

## Contoh konfigurasi proxy

Cuplikan kode berikut menggunakan pembangun konfigurasi proxy untuk klien HTTP koneksi URL.

```
SdkHttpClient urlHttpClient = UrlConnectionHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .endpoint(URI.create("http://example.com:1234"))
                        .username("username")
                        .password("password")
                        .addNonProxyHost("localhost")
                        .addNonProxyHost("host.example.com")
                        .build())
                .build();
```

Properti sistem Java yang setara untuk konfigurasi proxy ditampilkan dalam cuplikan baris perintah berikut.

```
$ java -Dhttp.proxyHost=example.com -Dhttp.proxyPort=1234 -Dhttp.proxyUser=username \
-Dhttp.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

Pengaturan setara yang menggunakan variabel lingkungan adalah:

```
// Set the following environment variables.
// $ export HTTP_PROXY="http://username:password@example.com:1234"
// $ export NO_PROXY="localhost|host.example.com"
```

```
// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkHttpClient apacheHttpClient = UrlConnectionHttpClient.builder()
                .proxyConfiguration(ProxyConfiguration.builder()
                        .useSystemPropertyValues(Boolean.FALSE)
                        .build())
                .build();

// Run the application.
// $ java -cp ... App
```

> **Note**
>
> Klien HTTP URLConnection berbasis saat ini tidak mendukung properti sistem proxy HTTPS atau variabel lingkungan HTTPS_PROXY.

## Konfigurasikan klien HTTP berbasis Netty

Klien HTTP default untuk operasi asinkron dalam AWS SDK for Java 2.x adalah berbasis Netty. NettyNioAsyncHttpClient Klien berbasis Netty didasarkan pada kerangka kerja jaringan berbasis peristiwa asinkron dari proyek Netty.

Sebagai klien HTTP alternatif, Anda dapat menggunakan klien HTTP AWS berbasis CRT baru. Topik ini menunjukkan kepada Anda cara mengkonfigurasi file`NettyNioAsyncHttpClient`.

### Akses **`NettyNioAsyncHttpClient`**

Dalam kebanyakan situasi, Anda menggunakan `NettyNioAsyncHttpClient` tanpa konfigurasi eksplisit dalam program asinkron. Anda mendeklarasikan klien layanan asinkron Anda dan SDK akan mengkonfigurasi dengan nilai standar untuk `NettyNioAsyncHttpClient` Anda.

Jika Anda ingin mengkonfigurasi `NettyNioAsyncHttpClient` atau menggunakannya secara eksplisit dengan beberapa klien layanan, Anda harus membuatnya tersedia untuk konfigurasi.

Tidak ada konfigurasi yang diperlukan

Saat Anda mendeklarasikan dependensi pada klien layanan di Maven, SDK menambahkan dependensi runtime pada artefak. `netty-nio-client` Ini membuat `NettyNioAsyncHttpClient` kelas tersedia untuk kode Anda saat runtime, tetapi tidak pada waktu kompilasi. Jika Anda tidak mengonfigurasi klien HTTP berbasis Netty, Anda tidak perlu menentukan ketergantungan untuk itu.

Dalam cuplikan XHTML berikut dari `pom.xml` file Maven, dependensi yang dideklarasikan dengan `<artifactId>dynamodb-enhanced</artifactId>` transitif membawa klien HTTP berbasis Netty. Anda tidak perlu mendeklarasikan dependensi khusus untuk itu.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>dynamodb-enhanced</artifactId>
    </dependency>
</dependencies>
```

Dengan dependensi ini, Anda tidak dapat membuat perubahan konfigurasi HTTP apa pun, karena `NettyNioAsyncHttpClient` pustaka hanya ada di classpath runtime.

Konfigurasi diperlukan

Untuk mengkonfigurasi`NettyNioAsyncHttpClient`, Anda perlu menambahkan ketergantungan pada `netty-nio-client` artefak pada waktu kompilasi.

Lihat contoh berikut dari file Maven untuk mengkonfigurasi `pom.xml` file. `NettyNioAsyncHttpClient`

```
    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>2.27.21</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
```

```
        </dependencies>
    </dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>dynamodb-enhanced</artifactId>
        </dependency>
        <!-- By adding the netty-nio-client dependency, NettyNioAsyncHttpClient will
be
             added to the compile classpath so you can configure it. -->
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>netty-nio-client</artifactId>
        </dependency>
    </dependencies>
```

## Gunakan dan konfigurasikan **`NettyNioAsyncHttpClient`**

Anda dapat mengonfigurasi instance `NettyNioAsyncHttpClient` bersama dengan membangun klien layanan, atau Anda dapat mengonfigurasi satu instance untuk dibagikan di beberapa klien layanan.

Dengan salah satu pendekatan, Anda menggunakan NettyNioAsyncHttpClient.Builder untuk mengonfigurasi properti untuk instance klien HTTP berbasis Netty.

Praktik terbaik: mendedikasikan **`NettyNioAsyncHttpClient`** instance untuk klien layanan

Jika Anda perlu mengonfigurasi instance`NettyNioAsyncHttpClient`, kami sarankan Anda membuat `NettyNioAsyncHttpClient` instance khusus. Anda dapat melakukannya dengan menggunakan `httpClientBuilder` metode pembangun klien layanan. Dengan cara ini, siklus hidup klien HTTP dikelola oleh SDK, yang membantu menghindari potensi kebocoran memori jika `NettyNioAsyncHttpClient` instance tidak ditutup saat tidak lagi diperlukan.

Contoh berikut menciptakan sebuah `DynamoDbAsyncClient` instance yang digunakan oleh sebuah `DynamoDbEnhancedAsyncClient` instance. `DynamoDbAsyncClient`Instance berisi `NettyNioAsyncHttpClient` instance dengan `connectionTimeout` dan `maxConcurrency` nilai-nilai. Contoh HTTP dibuat menggunakan `httpClientBuilder` metode`DynamoDbAsyncClient.Builder`.

Impor

```
import software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
```

```
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedAsyncClient;
import
 software.amazon.awssdk.enhanced.dynamodb.extensions.AutoGeneratedTimestampRecordExtension;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import java.time.Duration;
```

Kode

```
// DynamoDbAsyncClient is the lower-level client used by the enhanced client.
DynamoDbAsyncClient dynamoDbAsyncClient =
    DynamoDbAsyncClient
        .builder()
            .httpClientBuilder(NettyNioAsyncHttpClient.builder()
            .connectionTimeout(Duration.ofMillis(5_000))
            .maxConcurrency(100)
            .tlsNegotiationTimeout(Duration.ofMillis(3_500)))
        .defaultsMode(DefaultsMode.IN_REGION)
        .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
        .build();

// Singleton: Use dynamoDbAsyncClient and enhancedClient for all requests.
DynamoDbEnhancedAsyncClient enhancedClient =
    DynamoDbEnhancedAsyncClient
        .builder()
        .dynamoDbClient(dynamoDbAsyncClient)
        .extensions(AutoGeneratedTimestampRecordExtension.create())
        .build();

// Perform work with the dynamoDbAsyncClient and enhancedClient.

// Requests completed: Close dynamoDbAsyncClient.
dynamoDbAsyncClient.close();
```

Pendekatan alternatif: bagikan **`NettyNioAsyncHttpClient`** contoh

Untuk membantu menjaga penggunaan sumber daya dan memori lebih rendah untuk aplikasi Anda, Anda dapat mengonfigurasi `NettyNioAsyncHttpClient` dan membagikannya di beberapa klien layanan. Kumpulan koneksi HTTP akan dibagikan, yang menurunkan penggunaan sumber daya.

> **Note**
>
> Ketika sebuah `NettyNioAsyncHttpClient` instance dibagikan, Anda harus menutupnya ketika sudah siap untuk dibuang. SDK tidak akan menutup instance saat klien layanan ditutup.

Contoh berikut mengkonfigurasi klien HTTP berbasis Netty yang digunakan oleh dua klien layanan. `NettyNioAsyncHttpClient`Instance yang dikonfigurasi diteruskan ke `httpClient` metode masing-masing builder. Ketika klien layanan dan klien HTTP tidak lagi diperlukan, kode secara eksplisit menutupnya. Kode menutup klien HTTP terakhir.

Impor

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Kode

```
// Create a NettyNioAsyncHttpClient shared instance.
SdkAsyncHttpClient nettyHttpClient =
 NettyNioAsyncHttpClient.builder().maxConcurrency(100).build();

// Singletons: Use the s3AsyncClient, dbAsyncClient, and enhancedAsyncClient for all
 requests.
S3AsyncClient s3AsyncClient =
    S3AsyncClient.builder()
                 .httpClient(nettyHttpClient)
                 .build();

DynamoDbAsyncClient dbAsyncClient =
    DynamoDbAsyncClient.builder()
                       .httpClient(nettyHttpClient)
                       .defaultsMode(DefaultsMode.IN_REGION)

 .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                       .build();

DynamoDbEnhancedAsyncClient enhancedAsyncClient =
```

```
    DynamoDbEnhancedAsyncClient.builder()
                                .dynamoDbClient(dbAsyncClient)

 .extensions(AutoGeneratedTimestampRecordExtension.create())
                                .build();

// Perform work with s3AsyncClient, dbAsyncClient, and enhancedAsyncClient.

// Requests completed: Close all service clients.
s3AsyncClient.close();
dbAsyncClient.close()
nettyHttpClient.close();  // Explicitly close nettyHttpClient.
```

## Konfigurasikan negosiasi protokol ALPN

ALPN (Application-Layer Protocol Negotiation) adalah ekstensi TLS yang memungkinkan lapisan aplikasi untuk menegosiasikan protokol mana yang harus dilakukan melalui koneksi aman dengan cara yang menghindari perjalanan pulang pergi tambahan dan memberikan kinerja yang lebih baik.

Untuk mengaktifkan klien HTTP berbasis Netty menggunakan ALPN, panggil metode pembangun seperti yang ditunjukkan pada cuplikan berikut:

```
import software.amazon.awssdk.http.Protocol;
import software.amazon.awssdk.http.ProtocolNegotiation;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import
 software.amazon.awssdk.services.transcribestreaming.TranscribeStreamingAsyncClient;


// Configure the Netty-based HTTP client to use the ALPN protocol.
SdkAsyncHttpClient nettyClient = NettyNioAsyncHttpClient.builder()
                                                        .protocol(Protocol.HTTP2)

 .protocolNegotiation(ProtocolNegotiation.ALPN)
                                                        .build();
// Use the Netty-based HTTP client with a service client.
TranscribeStreamingAsyncClient transcribeClient =
 TranscribeStreamingAsyncClient.builder()

 .httpClient(nettyClient)
```

```
 .build();
```

Negosiasi protokol ALPN saat ini hanya berfungsi dengan protokol HTTP/2 seperti yang ditunjukkan pada cuplikan sebelumnya.

### Contoh konfigurasi proxy

Cuplikan kode berikut menggunakan pembangun konfigurasi proxy untuk klien Netty HTTP.

```
SdkAsyncHttpClient nettyHttpClient = NettyNioAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Properti sistem Java yang setara untuk konfigurasi proxy ditampilkan dalam cuplikan baris perintah berikut.

```
$ java -Dhttps.proxyHost=myproxy -Dhttps.proxyPort=1234 -Dhttps.proxyUser=username \
-Dhttps.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

> **Important**
>
> Untuk menggunakan salah satu properti sistem proxy HTTPS, `scheme` properti harus disetel dalam kode`https`. Jika properti skema tidak disetel dalam kode, skema default ke HTTP dan SDK hanya mencari properti sistem. `http.*`

Pengaturan setara yang menggunakan variabel lingkungan adalah:

```
// Set the following environment variables.
// $ export HTTPS_PROXY="https://username:password@myproxy:1234"
```

```
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkAsyncHttpClient nettyHttpClient = NettyNioAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .useSystemPropertyValues(Boolean.FALSE)
        .build())
    .build();

// Run the application.
// $ java -cp ... App
```

## Konfigurasikan AWS klien HTTP berbasis CRT

Klien HTTP AWS berbasis CRT termasuk sinkron dan asinkron. AwsCrtHttpClientAwsCrtAsyncHttpClient Klien HTTP AWS berbasis CRT memberikan manfaat klien HTTP berikut:

- Waktu startup SDK lebih cepat
- Jejak memori yang lebih kecil
- Mengurangi waktu latensi
- Manajemen kesehatan koneksi
- Penyeimbangan beban DNS

AWS Komponen berbasis CRT di SDK

Klien HTTP AWS berbasis CRT, dijelaskan dalam topik ini, dan klien S3 AWS berbasis CRT adalah komponen yang berbeda dalam SDK.

Klien HTTP AWS berbasis CRT sinkron dan asinkron adalah implementasi antarmuka klien HTTP SDK dan digunakan untuk komunikasi HTTP umum. Mereka adalah alternatif untuk klien HTTP sinkron atau asinkron lainnya di SDK dengan manfaat tambahan.

Klien S3 AWS berbasis CRT adalah implementasi AsyncClient antarmuka S3 dan digunakan untuk bekerja dengan layanan Amazon S3. Ini adalah alternatif untuk implementasi `S3AsyncClient` antarmuka berbasis Java dan menawarkan beberapa keuntungan.

Meskipun kedua komponen menggunakan pustaka dari AWS Common Runtime, klien HTTP AWS berbasis CRT tidak menggunakan pustaka aws-c-s 3 dan tidak mendukung fitur API unggahan

multipart S3. Klien S3 AWS berbasis CRT, sebaliknya, dibuat khusus untuk mendukung fitur API unggahan multibagian S3.

## Akses klien HTTP AWS berbasis CRT

Sebelum Anda dapat menggunakan klien HTTP AWS berbasis CRT, tambahkan `aws-crt-client` artefak dengan versi minimum 2.22.0 ke dependensi proyek Anda.

Gunakan salah satu opsi berikut untuk mengatur file Maven `pom.xml` Anda.

> **Note**
>
> Anda dapat memilih untuk menggunakan opsi jar khusus Platform jika Anda perlu menjaga ukuran dependensi runtime lebih kecil, misalnya jika aplikasi Anda berjalan dalam suatu fungsi. AWS Lambda

Uber-jar option

Secara default, `aws-crt-client` menggunakan uber-jar artefak AWS CRT yang berisi binari untuk beberapa platform, termasuk Linux, Windows, dan macOS.

```
<project>
   <properties>
     <aws.sdk.java.version>2.29.10*</aws.sdk.java.version>
  </properties>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>${aws.sdk.version}</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-crt-client</artifactId>
```

```
    </dependency>
  </dependencies>
</project>
```

* Ganti versi yang ditampilkan dalam warna merah dengan versi Java SDK yang ingin Anda gunakan. Temukan yang terbaru di Maven Central.

Platform-specific jar option

Untuk membatasi runtime Java ke versi khusus platform dari pustaka AWS CRT, buat perubahan berikut pada opsi Uber-jar.

- Tambahkan `exclusions` elemen ke `aws-crt-client` artefak SDK. Pengecualian ini mencegah SDK secara transitif menggunakan uber-jar CRT. AWS
- Tambahkan elemen ketergantungan untuk versi platform AWS CRT tertentu yang Anda butuhkan. Lihat Langkah-langkah untuk menentukan versi artefak AWS CRT di bawah ini untuk mengetahui bagaimana Anda dapat menentukan versi yang benar.

```
<project>
   <properties>
     <aws.sdk.java.version>2.29.10[1]</aws.sdk.java.version>
  </properties>
   <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.sdk.java.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>aws-crt-client</artifactId>
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk.crt</groupId>
                    <artifactId>aws-crt</artifactId>
                </exclusion>
```

```
            </exclusions>
        </dependency>
        <dependency>
            <groupId>software.amazon.awssdk.crt</groupId>
            <artifactId>aws-crt</artifactId>
            <version>0.31.3[2]</version>
            <classifier>linux-x86_64[3]</classifier>
        </dependency>
    </dependencies>
```

[1] Ganti versi yang ditampilkan dalam warna merah dengan versi Java SDK yang ingin Anda gunakan. Temukan yang terbaru di Maven Central.

[2] Ganti versi `software.amazon.awssdk.crt:aws-crt` yang akan disediakan oleh opsi Uber-jar. Lihat Langkah-langkah berikut untuk menentukan versi artefak AWS CRT.

[3] Ganti `classifier` nilainya dengan satu untuk platform Anda. Lihat GitHub halaman AWS CRT untuk Java untuk daftar nilai yang tersedia.

Langkah-langkah untuk menentukan versi artefak AWS CRT

Gunakan langkah-langkah berikut untuk menentukan versi artefak AWS CRT yang kompatibel dengan versi SDK for Java yang Anda gunakan.

1. Siapkan `pom.xml` file Anda seperti yang ditunjukkan pada opsi Uber-jar. Pengaturan ini memungkinkan Anda untuk melihat versi SDK apa `software.amazon.awssdk.crt:aws-crt` yang dibawa secara default.
2. Di root proyek (dalam direktori yang sama dengan `pom.xml` file), jalankan perintah Maven berikut:

   ```
   mvn dependency:tree -Dincludes=software.amazon.awssdk.crt:aws-crt
   ```

   Maven mungkin melakukan tindakan lain, tetapi pada akhirnya Anda akan melihat keluaran konsol dari `software.amazon.awssdk.crt:aws-crt` ketergantungan yang digunakan SDK secara transitif. Cuplikan berikut menunjukkan output sampel berdasarkan versi SDK: `2.29.10`

   ```
   [INFO] org.example:yourProject:jar:1.0-SNAPSHOT
   [INFO] \- software.amazon.awssdk:aws-crt-client:jar:2.29.10:compile
   [INFO]    \- software.amazon.awssdk.crt:aws-crt:jar:0.31.3:compile
   ```

3. Gunakan versi yang ditampilkan konsol untuk `software.amazon.awssdk.crt:aws-crt` artefak. Dalam hal ini, tambahkan `0.31.3` ke `pom.xml` file Anda.

## Gunakan dan konfigurasikan klien AWS HTTP berbasis CRT

Anda dapat mengonfigurasi klien HTTP AWS berbasis CRT bersama dengan membangun klien layanan, atau Anda dapat mengonfigurasi satu instance untuk dibagikan di beberapa klien layanan.

Dengan salah satu pendekatan, Anda menggunakan pembangun untuk mengonfigurasi properti untuk instance klien HTTP AWS berbasis CRT.

Praktik terbaik: mendedikasikan sebuah instance untuk klien layanan

Jika Anda perlu mengonfigurasi instance klien HTTP AWS berbasis CRT, kami sarankan Anda mendedikasikan instance dengan membangunnya bersama dengan klien layanan. Anda dapat melakukannya dengan menggunakan `httpClientBuilder` metode pembangun klien layanan. Dengan cara ini, siklus hidup klien HTTP dikelola oleh SDK, yang membantu menghindari potensi kebocoran memori jika instance klien HTTP AWS berbasis CRT tidak ditutup ketika tidak lagi diperlukan.

Contoh berikut membuat klien layanan S3 dan mengkonfigurasi klien HTTP AWS berbasis CRT dengan dan nilai-nilai. `connectionTimeout` `maxConcurrency`

Synchronous client

Impor

```
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Kode

```
// Singleton: Use s3Client for all requests.
S3Client s3Client = S3Client.builder()
    .httpClientBuilder(AwsCrtHttpClient
        .builder()
        .connectionTimeout(Duration.ofSeconds(3))
        .maxConcurrency(100))
    .build();
```

```
// Perform work with the s3Client.

// Requests completed: Close the s3Client.
s3Client.close();
```

Asynchronous client

Impor

```
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

Kode

```
// Singleton: Use s3AsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClientBuilder(AwsCrtAsyncHttpClient
        .builder()
        .connectionTimeout(Duration.ofSeconds(3))
        .maxConcurrency(100))
    .build();

// Perform work with the s3AsyncClient.

// Requests completed: Close the s3AsyncClient.
s3AsyncClient.close();
```

Pendekatan alternatif: bagikan contoh

Untuk membantu menjaga penggunaan sumber daya dan memori lebih rendah untuk aplikasi Anda, Anda dapat mengonfigurasi klien HTTP AWS berbasis CRT dan membagikannya di beberapa klien layanan. Kumpulan koneksi HTTP akan dibagikan, yang menurunkan penggunaan sumber daya.

> **Note**
>
> Ketika instance klien HTTP AWS berbasis CRT dibagikan, Anda harus menutupnya ketika sudah siap untuk dibuang. SDK tidak akan menutup instance saat klien layanan ditutup.

Contoh berikut mengkonfigurasi instance klien HTTP AWS berbasis CRT dengan `connectionTimeout` dan nilai-nilai. `maxConcurrency` Instance yang dikonfigurasi diteruskan ke `httpClient` metode setiap pembuat klien layanan. Ketika klien layanan dan klien HTTP tidak lagi diperlukan, mereka secara eksplisit ditutup. Klien HTTP ditutup terakhir.

Synchronous client

Impor

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Kode

```
// Create an AwsCrtHttpClient shared instance.
SdkHttpClient crtHttpClient = AwsCrtHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(3))
    .maxConcurrency(100)
    .build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client = S3Client.builder()
    .httpClient(crtHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.crea
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
    .httpClient(crtHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.crea
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

// Requests completed: Close all service clients.
```

```
s3Client.close();
dynamoDbClient.close();
crtHttpClient.close();  // Explicitly close crtHttpClient.
```

### Asynchronous client

#### Impor

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.awscore.defaultsmode.DefaultsMode;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

#### Kode

```
// Create an AwsCrtAsyncHttpClient shared instance.
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(3))
    .maxConcurrency(100)
    .build();

// Singletons: Use the s3AsyncClient and dynamoDbAsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClient(crtAsyncHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

DynamoDbAsyncClient dynamoDbAsyncClient = DynamoDbAsyncClient.builder()
    .httpClient(crtAsyncHttpClient)
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .defaultsMode(DefaultsMode.IN_REGION)
    .region(Region.US_EAST_1)
    .build();

// Requests completed: Close all service clients.
s3AsyncClient.close();
```

```
dynamoDbAsyncClient.close();
crtAsyncHttpClient.close();  // Explicitly close crtAsyncHttpClient.
```

## Tetapkan klien HTTP AWS berbasis CRT sebagai default

Anda dapat mengatur file build Maven agar SDK menggunakan klien HTTP AWS berbasis CRT sebagai klien HTTP default untuk klien layanan.

Anda melakukan ini dengan menambahkan `exclusions` elemen dengan dependensi klien HTTP default ke setiap artefak klien layanan.

Dalam `pom.xml` contoh berikut, SDK menggunakan klien HTTP AWS berbasis CRT untuk layanan S3. Jika klien layanan dalam kode Anda adalah`S3AsyncClient`, SDK akan menggunakan`AwsCrtAsyncHttpClient`. Jika klien layanan adalah S3Client, SDK menggunakan. `AwsCrtHttpClient` Dengan pengaturan ini, klien HTTP asinkron berbasis Netty default dan HTTP sinkron berbasis Apache default tidak tersedia.

```
<project>
   <properties>
     <aws.sdk.version>VERSION</aws.sdk.version>
  </properties>
  <dependencies>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>s3</artifactId>
      <version>${aws.sdk.version}</version>
      <exclusions>
         <exclusion>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>netty-nio-client</artifactId>
         </exclusion>
         <exclusion>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>apache-client</artifactId>
         </exclusion>
      </exclusions>
   </dependency>
   <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>aws-crt-client</artifactId>
   </dependency>
```

```
  </dependencies>
</project>
```

Kunjungi repositori pusat Maven untuk nilai terbaru. *VERSION*

> **Note**
>
> Jika beberapa klien layanan dideklarasikan dalam sebuah `pom.xml` file, semua memerlukan elemen `exclusions` XHTML.

Menggunakan properti sistem Java

Untuk menggunakan klien HTTP AWS berbasis CRT sebagai HTTP default untuk aplikasi Anda, Anda dapat mengatur properti sistem Java `software.amazon.awssdk.http.async.service.impl` ke nilai. `software.amazon.awssdk.http.crt.AwsCrtSdkHttpService`

Untuk mengatur selama startup aplikasi, jalankan perintah yang mirip dengan berikut ini.

```
java app.jar -Dsoftware.amazon.awssdk.http.async.service.impl=\
software.amazon.awssdk.http.crt.AwsCrtSdkHttpService
```

Gunakan cuplikan kode berikut untuk mengatur properti sistem dalam kode aplikasi Anda.

```
System.setProperty("software.amazon.awssdk.http.async.service.impl",
"software.amazon.awssdk.http.crt.AwsCrtSdkHttpService");
```

> **Note**
>
> Anda perlu menambahkan ketergantungan pada `aws-crt-client` artefak dalam `poml.xml` file Anda ketika Anda menggunakan properti sistem untuk mengkonfigurasi penggunaan klien HTTP berbasis AWS CRT.

## Konfigurasi lanjutan dari klien AWS HTTP berbasis CRT

Anda dapat menggunakan berbagai pengaturan konfigurasi klien HTTP AWS berbasis CRT, termasuk konfigurasi kesehatan koneksi dan waktu idle maksimum. Anda dapat meninjau opsi

konfigurasi yang tersedia untuk`AwsCrtAsyncHttpClient`. Anda dapat mengonfigurasi opsi yang sama untuk file`AwsCrtHttpClient`.

Konfigurasi kesehatan koneksi

Anda dapat mengonfigurasi konfigurasi kesehatan koneksi untuk klien HTTP AWS berbasis CRT dengan menggunakan `connectionHealthConfiguration` metode pada pembuat klien HTTP.

Contoh berikut membuat klien layanan S3 yang menggunakan instance klien HTTP AWS berbasis CRT yang dikonfigurasi dengan konfigurasi kesehatan koneksi dan waktu idle maksimum untuk koneksi.

Synchronous client

Impor

```
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Kode

```
// Singleton: Use the s3Client for all requests.
S3Client s3Client = S3Client.builder()
    .httpClientBuilder(AwsCrtHttpClient
        .builder()
        .connectionHealthConfiguration(builder -> builder
            .minimumThroughputInBps(32000L)
            .minimumThroughputTimeout(Duration.ofSeconds(3)))
        .connectionMaxIdleTime(Duration.ofSeconds(5)))
    .build();

// Perform work with s3Client.

// Requests complete: Close the service client.
s3Client.close();
```

Asynchronous client

Impor

```
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
```

```
import software.amazon.awssdk.services.s3.S3AsyncClient;
import java.time.Duration;
```

Kode

```
// Singleton: Use the s3AsyncClient for all requests.
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .httpClientBuilder(AwsCrtAsyncHttpClient
        .builder()
        .connectionHealthConfiguration(builder -> builder
            .minimumThroughputInBps(32000L)
            .minimumThroughputTimeout(Duration.ofSeconds(3)))
        .connectionMaxIdleTime(Duration.ofSeconds(5)))
    .build();

// Perform work with s3AsyncClient.

// Requests complete: Close the service client.
s3AsyncClient.close();
```

## Dukungan HTTP/2

Protokol HTTP/2 belum didukung di klien HTTP AWS berbasis CRT, tetapi direncanakan untuk rilis future.

Sementara itu, jika Anda menggunakan klien layanan yang memerlukan dukungan HTTP/2 seperti KinesisAsyncClientatau TranscribeStreamingAsyncClient, pertimbangkan untuk menggunakan sebagai gantinya. NettyNioAsyncHttpClient

## Contoh konfigurasi proxy

Cuplikan kode berikut menunjukkan penggunaan `ProxyConfiguration.Builder`yang Anda gunakan untuk mengkonfigurasi pengaturan proxy dalam kode.

Synchronous client

Impor

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtHttpClient;
import software.amazon.awssdk.http.crt.ProxyConfiguration;
```

Kode

```
SdkHttpClient crtHttpClient = AwsCrtHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Asynchronous client

Impor

```
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.crt.AwsCrtAsyncHttpClient;
import software.amazon.awssdk.http.crt.ProxyConfiguration;
```

Kode

```
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .host("myproxy")
        .port(1234)
        .username("username")
        .password("password")
        .nonProxyHosts(Set.of("localhost", "host.example.com"))
        .build())
    .build();
```

Properti sistem Java yang setara untuk konfigurasi proxy ditampilkan dalam cuplikan baris perintah berikut.

```
$ java -Dhttps.proxyHost=myproxy -Dhttps.proxyPort=1234 -Dhttps.proxyUser=username \
-Dhttps.proxyPassword=password -Dhttp.nonProxyHosts=localhost|host.example.com -cp ...
 App
```

> **Important**
>
> Untuk menggunakan salah satu properti sistem proxy HTTPS, `scheme` properti harus disetel dalam kode`https`. Jika properti skema tidak disetel dalam kode, skema default ke HTTP dan SDK hanya mencari properti sistem. `http.*`

Pengaturan setara yang menggunakan variabel lingkungan adalah:

```
// Set the following environment variables.
// $ export HTTPS_PROXY="https://username:password@myproxy:1234"
// $ export NO_PROXY="localhost|host.example.com"

// Set the 'useSystemPropertyValues' to false on the proxy configuration.
SdkAsyncHttpClient crtAsyncHttpClient = AwsCrtAsyncHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .useSystemPropertyValues(Boolean.FALSE)
        .build())
    .build();

// Run the application.
// $ java -cp ... App
```

## Konfigurasikan proxy HTTP

Anda dapat mengkonfigurasi proxy HTTP dengan menggunakan kode, dengan mengatur properti sistem Java, atau dengan mengatur variabel lingkungan.

### Konfigurasikan dalam kode

Anda mengonfigurasi proxy dalam kode dengan `ProxyConfiguration` pembuat khusus klien saat Anda membangun klien layanan. Kode berikut menunjukkan contoh konfigurasi proxy untuk klien HTTP berbasis Apache yang digunakan oleh klien layanan Amazon S3.

```
SdkHttpClient httpClient1 = ApacheHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .endpoint(URI.create("http://proxy.example.com"))
        .username("username")
        .password("password")
```

```
        .addNonProxyHost("localhost")
        .build())
    .build();

S3Client s3Client = S3Client.builder()
    .httpClient(httpClient)
    .build();
```

Bagian untuk setiap klien HTTP dalam topik ini menunjukkan contoh konfigurasi proxy.

- Apache HTTP klien
- URLConnectionberbasis HTTP klien
- Klien HTTP berbasis Netty
- AWS Klien HTTP berbasis CRT

## Konfigurasikan proxy HTTP dengan pengaturan eksternal

Bahkan jika Anda tidak secara eksplisit menggunakan `ProxyConfiguration` pembuat dalam kode, SDK mencari pengaturan eksternal untuk mengonfigurasi konfigurasi proxy default.

Secara default, SDK pertama-tama mencari properti sistem JVM. Jika satu properti ditemukan, SDK menggunakan nilai dan nilai properti sistem lainnya. Jika tidak ada properti sistem yang tersedia, SDK mencari variabel lingkungan proxy.

SDK dapat menggunakan properti sistem Java berikut dan variabel lingkungan.

Properti sistem Java

| Properti sistem | Deskripsi | Dukungan klien HTTP |
|---|---|---|
| http.ProxyHost | Nama host dari server proxy HTTP | Semua |
| http.Proxyport | Nomor port server proxy HTTP | Semua |
| http.ProxyUser | Nama pengguna untuk otentikasi proxy HTTP | Semua |
| http.ProxyPassword | Kata sandi untuk otentikasi proxy HTTP | Semua |

| Properti sistem | Deskripsi | Dukungan klien HTTP |
| --- | --- | --- |
| http. nonProxyHosts | Daftar host yang harus dijangkau secara langsung, melewati proxy. Daftar ini juga valid ketika HTTPS digunakan. | Semua |
| https.proxyhost | Nama host dari server proxy HTTPS | Netty, CRT |
| https.proxyport | Nomor port server proxy HTTPS | Netty, CRT |
| https.proxyuser | Nama pengguna untuk otentikasi proxy HTTPS | Netty, CRT |
| https.proxyPassword | Kata sandi untuk otentikasi proxy HTTPS | Netty, CRT |

Variabel-variabel lingkungan

| Variabel lingkungan | Deskripsi | Dukungan klien HTTP |
| --- | --- | --- |
| HTTP_PROXY 1 | URL yang valid dengan skema HTTP | Semua |
| HTTPS_PROXY 1 | URL yang valid dengan skema HTTPS | Netty, CRT |
| TIDAK_PROXY 2 | Daftar host yang harus dijangkau secara langsung, melewati proxy. Daftar ini valid untuk HTTP dan HTTPS. | Semua |

Lihat kunci dan catatan kaki

Semua - Semua klien HTTP yang ditawarkan oleh SDK—`UrlConnectionHttpClient`,, `ApacheHttpClientNettyNioAsyncHttpClient`,`AwsCrtAsyncHttpClient`.

Netty - Klien HTTP berbasis Netty (). `NettyNioAsyncHttpClient`

CRT - Klien HTTP AWS berbasis CRT, (`AwsCrtHttpClient`dan). `AwsCrtAsyncHttpClient`

[1] Variabel lingkungan yang ditanyakan, apakah `HTTP_PROXY` atau`HTTPS_PROXY`, tergantung pada pengaturan skema di klien. `ProxyConfiguration` Skema default adalah HTTP. Cuplikan berikut menunjukkan cara mengubah skema ke HTTPS yang digunakan untuk resolusi variabel lingkungan.

```
SdkHttpClient httpClient = ApacheHttpClient.builder()
    .proxyConfiguration(ProxyConfiguration.builder()
        .scheme("https")
        .build())
    .build();
```

[2] Variabel `NO_PROXY` lingkungan mendukung campuran pemisah “|” dan “,” antara nama host. Nama host mungkin termasuk wildcard “*”.

## Gunakan kombinasi pengaturan

Anda dapat menggunakan kombinasi pengaturan proxy HTTP dalam kode, properti sistem, dan variabel lingkungan.

Example— konfigurasi yang disediakan oleh properti sistem dan oleh kode

```
// Command line with the proxy password set as a system property.
$ java -Dhttp.proxyPassword=SYS_PROP_password -cp ... App

// Since the 'useSystemPropertyValues' setting is 'true' (the default), the SDK will
 supplement
// the proxy configuration in code with the 'http.proxyPassword' value from the system
 property.
SdkHttpClient apacheHttpClient = ApacheHttpClient.builder()
            .proxyConfiguration(ProxyConfiguration.builder()
                    .endpoint(URI.create("http://localhost:1234"))
                    .username("username")
                    .build())
            .build();

// Use the apache HTTP client with proxy configuration.
DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
                    .httpClient(apacheHttpClient)
```

```
                    .build();
```

SDK menyelesaikan pengaturan proxy berikut.

```
Host = localhost
Port = 1234
Password = SYS_PROP_password
UserName = username
Non ProxyHost = null
```

Example— properti sistem dan variabel lingkungan tersedia

Setiap `ProxyConfiguration` pembangun klien HTTP menawarkan pengaturan bernama `useSystemPropertyValues` dan`useEnvironmentVariablesValues`. Secara default, kedua pengaturan adalah`true`. Saat`true`, SDK secara otomatis menggunakan nilai dari properti sistem atau variabel lingkungan untuk opsi yang tidak disediakan oleh `ProxyConfiguration` pembuat.

> **Important**
>
> Properti sistem lebih diutamakan daripada variabel lingkungan. Jika properti sistem proxy HTTP ditemukan, SDK mengambil semua nilai dari properti sistem dan tidak ada dari variabel lingkungan. Jika Anda ingin memprioritaskan variabel lingkungan di atas properti sistem, setel `useSystemPropertyValues` ke. `false`

Untuk contoh ini, pengaturan berikut tersedia runtime:

```
// System properties
http.proxyHost=SYS_PROP_HOST.com
http.proxyPort=2222
http.password=SYS_PROP_PASSWORD
http.user=SYS_PROP_USER

// Environment variables
HTTP_PROXY="http://EnvironmentUser:EnvironmentPassword@ENV_VAR_HOST:3333"
NO_PROXY="environmentnonproxy.host,environmentnonproxy2.host:1234"
```

Klien layanan dibuat dengan salah satu pernyataan berikut. Tak satu pun dari pernyataan secara eksplisit menetapkan pengaturan proxy.

```
DynamoDbClient client = DynamoDbClient.create();
DynamoDbClient client = DynamoDbClient.builder().build();
DynamoDbClient client = DynamoDbClient.builder()
    .httpClient(ApacheHttpClient.builder()
        .proxyConfiguration(ProxyConfiguration.builder()
            .build())
        .build())
    .build();
```

Pengaturan proxy berikut diselesaikan oleh SDK:

```
Host = SYS_PROP_HOST.com
Port = 2222
Password = SYS_PROP_PASSWORD
UserName = SYS_PROP_USER
Non ProxyHost = null
```

Karena klien layanan memiliki pengaturan proxy default, SDK mencari properti sistem dan kemudian variabel lingkungan. Karena pengaturan properti sistem lebih diutamakan daripada variabel lingkungan, SDK hanya menggunakan properti sistem.

Jika penggunaan properti sistem diubah menjadi `false` seperti yang ditunjukkan dalam kode berikut, SDK hanya menyelesaikan variabel lingkungan.

```
DynamoDbClient client = DynamoDbClient.builder()
    .httpClient(ApacheHttpClient.builder()
        .proxyConfiguration(ProxyConfiguration.builder()
            .useSystemPropertyValues(Boolean.FALSE)
            .build())
        .build())
    .build();
```

Pengaturan proxy yang diselesaikan menggunakan HTTP adalah:

```
Host = ENV_VAR_HOST
Port = 3333
Password = EnvironmentPassword
UserName = EnvironmentUser
Non ProxyHost = environmentnonproxy.host, environmentnonproxy2.host:1234
```

# Konfigurasikan klien HTTP berbasis Apache 5.x

## Akses Apache5 HttpClient

Untuk menggunakan `Apache5HttpClient` Anda harus menambahkan ketergantungan pada apache5-client dan secara eksplisit mengkonfigurasi `Apache5HttpClient` pada klien layanan Anda.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.41.0*</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3</artifactId>
    </dependency>

    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>apache5-client</artifactId>
    </dependency>
</dependencies>
```

* Ganti versi yang ditampilkan dalam warna merah dengan versi Java SDK yang ingin Anda gunakan. Temukan yang terbaru di Maven Central.

Gunakan dan konfigurasikan **`Apache5HttpClient`**

Anda dapat mengonfigurasi instance `Apache5HttpClient` bersama dengan membangun klien layanan, atau Anda dapat mengonfigurasi satu instance untuk dibagikan di beberapa klien layanan.

Dengan salah satu pendekatan, Anda menggunakan Apache5 HttpClient .Builder untuk mengkonfigurasi properti untuk klien HTTP berbasis Apache 5.

Praktik terbaik: dedikasikan HttpClient instance Apache5 ke klien layanan

Jika Anda perlu mengonfigurasi instance`Apache5HttpClient`, kami sarankan Anda membuat `Apache5HttpClient` instance khusus. Anda dapat melakukannya dengan menggunakan httpClientBuilder metode pembangun klien layanan. Dengan cara ini, siklus hidup klien HTTP dikelola oleh SDK, yang membantu menghindari potensi kebocoran memori jika `Apache5HttpClient` instance tidak ditutup saat tidak lagi diperlukan.

Contoh berikut membuat S3Client dan mengkonfigurasi instance tertanam `Apache5HttpClient` dengan nilai MaxConnections dan ConnectionTimeout. Contoh HTTP dibuat menggunakan `httpClientBuilder` metode`S3Client.Builder`.

Impor

```
import software.amazon.awssdk.http.apache5.Apache5HttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import java.time.Duration;
```

Kode

```
S3Client s3Client = S3Client   // Singleton: Use the s3Client for all requests.
    .builder()
    .httpClientBuilder(Apache5HttpClient.builder()
        .maxConnections(100)
        .connectionTimeout(Duration.ofSeconds(5))
    )
    .build();

// Perform work with the s3Client.

s3Client.close();   // Requests completed: Close all service clients.
```

Pendekatan alternatif: bagikan **`Apache5HttpClient`** contoh

Untuk membantu menjaga penggunaan sumber daya dan memori lebih rendah untuk aplikasi Anda, Anda dapat mengonfigurasi `Apache5HttpClient` dan membagikannya di beberapa klien layanan. Kumpulan koneksi HTTP akan dibagikan, yang menurunkan penggunaan sumber daya.

> **Note**
>
> Ketika sebuah `Apache5HttpClient` instance dibagikan, Anda harus menutupnya ketika sudah siap untuk dibuang. SDK tidak akan menutup instance saat klien layanan ditutup.

Contoh berikut mengkonfigurasi klien HTTP berbasis Apache yang digunakan oleh dua klien layanan. `ApacheHttpClient`Instance yang dikonfigurasi diteruskan ke metode HttpClient dari setiap pembangun. Ketika klien layanan dan klien HTTP tidak lagi diperlukan, kode secara eksplisit menutupnya. Kode menutup klien HTTP terakhir.

Impor

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache5.Apache5HttpClient;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.s3.S3Client;
```

Kode

```
SdkHttpClient apache5HttpClient = Apache5HttpClient.builder()
        .maxConnections(100).build();

// Singletons: Use the s3Client and dynamoDbClient for all requests.
S3Client s3Client =
    S3Client.builder()
            .httpClient(apache5HttpClient).build();

DynamoDbClient dynamoDbClient =
    DynamoDbClient.builder()
                  .httpClient(apache5HttpClient).build();

// Perform work with the s3Client and dynamoDbClient.

// Requests completed: Close all service clients.
s3Client.close();
dynamoDbClient.close();
apache5HttpClient.close();  // Explicitly close apache5HttpClient.
```

# Gunakan pencegat eksekusi di AWS SDK for Java 2.x

Pencegat eksekusi di AWS SDK for Java 2.x hook ke dalam siklus hidup permintaan dan respons untuk melakukan logika kustom pada berbagai tahap eksekusi panggilan API. Gunakan pencegat untuk menerapkan masalah lintas sektoral seperti pencatatan, pengumpulan metrik, modifikasi permintaan, debugging, dan penanganan kesalahan.

Pencegat mengimplementasikan `ExecutionInterceptor`antarmuka, yang menyediakan kait untuk berbagai fase eksekusi permintaan.

## Siklus hidup pencegat

`ExecutionInterceptor`Antarmuka menyediakan metode yang dipanggil pada titik-titik tertentu selama eksekusi permintaan:

- `beforeExecution`- Dipanggil sebelum permintaan dijalankan
- `modifyRequest`- Memodifikasi objek permintaan SDK
- `beforeMarshalling`- Dipanggil sebelum permintaan marshal ke HTTP
- `afterMarshalling`- Dipanggil setelah permintaan marshal ke HTTP
- `modifyHttpRequest`- Memodifikasi permintaan HTTP
- `beforeTransmission`- Dipanggil sebelum permintaan HTTP dikirim
- `afterTransmission`- Dipanggil setelah respon HTTP diterima
- `modifyHttpResponse`- Memodifikasi respon HTTP
- `beforeUnmarshalling`- Dipanggil sebelum respon HTTP unmarshals
- `afterUnmarshalling`- Dipanggil setelah respon HTTP unmarshals
- `modifyResponse`- Memodifikasi objek respons SDK
- `afterExecution`- Dipanggil setelah eksekusi permintaan berhasil
- `onExecutionFailure`- Dipanggil saat eksekusi permintaan gagal

## Daftarkan pencegat

Daftarkan pencegat saat Anda membangun klien layanan menggunakan metode in`overrideConfiguration`. Anda dapat mendaftarkan beberapa pencegat, dan mereka mengeksekusi dalam urutan Anda mendaftar mereka.

```
// Register a single interceptor.
SqsClient client = SqsClient.builder()
    .overrideConfiguration(c -> c.addExecutionInterceptor(new LoggingInterceptor()))
    .build();

// Register multiple interceptors.
S3Client s3Client = S3Client.builder()
    .overrideConfiguration(config -> config
        .addExecutionInterceptor(new TimingInterceptor())
        .addExecutionInterceptor(new LoggingInterceptor())
        .addExecutionInterceptor(new RequestModificationInterceptor()))
    .build();
```

## Contoh pencegat

Kelas berikut menunjukkan cara menggunakan pencegat eksekusi untuk menambahkan masalah lintas sektoral seperti logging, pemantauan kinerja, dan modifikasi permintaan ke operasi S3 Anda tanpa mengubah logika bisnis inti Anda.

Contoh ini menunjukkan cara mendaftarkan beberapa pencegat pada klien S3 dan melihatnya beraksi selama panggilan API nyata AWS .

Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.core.ApiName;
import software.amazon.awssdk.core.SdkRequest;
import software.amazon.awssdk.core.interceptor.Context;
import software.amazon.awssdk.core.interceptor.ExecutionAttributes;
import software.amazon.awssdk.core.interceptor.ExecutionInterceptor;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.SdkHttpResponse;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;

import java.time.Duration;
import java.time.Instant;
```

```
public class S3InterceptorsDemo {
```

```
    private static final Logger logger =
LoggerFactory.getLogger(S3InterceptorsDemo.class);

    public static void main(String[] args) {
        logger.info("=== AWS SDK for Java v2 - S3 Interceptors Demo ===");

        // Create an S3 client with multiple interceptors.
        S3Client s3Client = S3Client.builder()
            .overrideConfiguration(config -> config
                .addExecutionInterceptor(new TimingInterceptor())
                .addExecutionInterceptor(new LoggingInterceptor())
                .addExecutionInterceptor(new RequestModificationInterceptor()))
            .build();

        try {
            logger.info("Starting S3 operations with interceptors...");

            // Operation 1: List buckets.
            logger.info("Operation 1: Listing S3 buckets");
            logger.info("---------------------------------------");
            ListBucketsResponse listBucketsResponse = s3Client.listBuckets();
            logger.info("Found {} buckets", listBucketsResponse.buckets().size());

            // Operation 2: Try to access a bucket that likely doesn't exist.
            logger.info("Operation 2: Checking non-existent bucket (demonstrating error
interceptor)");
            logger.info("---------------------------------------");
            try {
                s3Client.headBucket(HeadBucketRequest.builder()
                    .bucket("amzn-s3-demo-bucket-that-does-not-exist-1234")
                    .build());
            } catch (Exception e) {
                logger.info("Expected error occurred (interceptor should have logged
it)");
            }

        } catch (Exception e) {
            logger.error(" Error during S3 operations: {}", e.getMessage(), e);
        } finally {
            s3Client.close();
            logger.info("Demo completed - S3 client closed");
        }
    }
```

```
    // Logging interceptor.
    private static class LoggingInterceptor implements ExecutionInterceptor {
        private static final Logger logger =
LoggerFactory.getLogger(LoggingInterceptor.class);

        @Override
        public void beforeExecution(Context.BeforeExecution context,
ExecutionAttributes executionAttributes) {
            logger.info("[LOGGING] Starting request: {}",
context.request().getClass().getSimpleName());
        }

        @Override
        public void afterExecution(Context.AfterExecution context, ExecutionAttributes
executionAttributes) {
            logger.info("[LOGGING] Completed request: {}",
context.request().getClass().getSimpleName());
        }

        @Override
        public void onExecutionFailure(Context.FailedExecution context,
ExecutionAttributes executionAttributes) {
            logger.error("[LOGGING] Request failed: {}",
context.request().getClass().getSimpleName());
            if (context.exception() instanceof AwsServiceException) {
                AwsServiceException ase = (AwsServiceException) context.exception();
                if (ase.awsErrorDetails().errorCode() != null) {
                    SdkHttpResponse httpResponse =
ase.awsErrorDetails().sdkHttpResponse();
                    logger.error("   HTTP Status: {}", httpResponse.statusCode());
                    logger.error("   Error Code: {}",
ase.awsErrorDetails().errorCode());
                    logger.error("   Error Message: {}",
ase.awsErrorDetails().errorMessage());
                }
            }
        }
    }

    // Performance timing interceptor.
    private static class TimingInterceptor implements ExecutionInterceptor {
        private static final Logger logger =
LoggerFactory.getLogger(TimingInterceptor.class);
        private Instant startTime;
```

```
        @Override
        public void beforeExecution(Context.BeforeExecution context,
ExecutionAttributes executionAttributes) {
            startTime = Instant.now();
            logger.info("##  [TIMING] Request started at: {}", startTime);
        }

        @Override
        public void afterExecution(Context.AfterExecution context, ExecutionAttributes
executionAttributes) {
            if (startTime != null) {
                Duration duration = Duration.between(startTime, Instant.now());
                logger.info("##  [TIMING] Request completed in: {}ms",
duration.toMillis());
            }
        }

        @Override
        public void onExecutionFailure(Context.FailedExecution context,
ExecutionAttributes executionAttributes) {
            if (startTime != null) {
                Duration duration = Duration.between(startTime, Instant.now());
                logger.warn("##  [TIMING] Request failed after: {}ms",
duration.toMillis());
            }
        }
    }

    // Request modification interceptor
    private static class RequestModificationInterceptor implements ExecutionInterceptor
{
        private static final Logger logger =
LoggerFactory.getLogger(RequestModificationInterceptor.class);

        @Override
        public SdkRequest modifyRequest(Context.ModifyRequest context,
ExecutionAttributes executionAttributes) {
            SdkRequest originalRequest = context.request();
            logger.info("[MODIFY] Modifying request: {}",
originalRequest.getClass().getSimpleName());

            // For ListBucketsRequest, we can't modify much since it has no settable
properties
```

```
            // For HeadBucketRequest, we can demonstrate modifying the request
            if (originalRequest instanceof HeadBucketRequest) {
                HeadBucketRequest headRequest = (HeadBucketRequest) originalRequest;

                // Create a new request with an API name added.
                return HeadBucketRequest.builder()
                        .bucket(headRequest.bucket())
                        .overrideConfiguration(b -> b.addApiName(ApiName.builder()
                                .name("My-API")
                                .version("1.0")
                                .build()))
                        .build();
            }
            logger.info("Not a HeadBucketRequest, returning original request");
            return originalRequest;
        }

        @Override
        public SdkHttpRequest modifyHttpRequest(Context.ModifyHttpRequest context,
 ExecutionAttributes executionAttributes) {
            logger.info("[MODIFY] Adding custom HTTP headers");
            return context.httpRequest().toBuilder()
                .putHeader("X-Custom-Header", "S3InterceptorDemo")
                .putHeader("X-Request-ID", java.util.UUID.randomUUID().toString())
                .build();
        }
    }
}
```

### Berkas Maven pom

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
         http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>org.example</groupId>
    <artifactId>interceptors-examples</artifactId>
    <version>1.0.0</version>
    <packaging>jar</packaging>
```

```
    <name>interceptors-examples</name>
    <description>Demonstration of execution interceptors in AWS SDK for Java v2</
description>

    <properties>
        <maven.compiler.source>17</maven.compiler.source>
        <maven.compiler.target>17</maven.compiler.target>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <aws.java.sdk.version>2.31.62</aws.java.sdk.version>
        <exec.mainClass>org.example.S3InterceptorsDemo</exec.mainClass>
    </properties>

    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
            <dependency>
                <groupId>org.apache.logging.log4j</groupId>
                <artifactId>log4j-bom</artifactId>
                <version>2.23.1</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>

    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
        </dependency>

        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-core</artifactId>
        </dependency>
        <dependency>
            <groupId>org.slf4j</groupId>
            <artifactId>slf4j-api</artifactId>
```

```
            <version>2.0.13</version>
        </dependency>
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-slf4j2-impl</artifactId>
        </dependency>
        <dependency>
            <groupId>org.apache.logging.log4j</groupId>
            <artifactId>log4j-1.2-api</artifactId>
        </dependency>
        <dependency>
            <groupId>org.junit.jupiter</groupId>
            <artifactId>junit-jupiter</artifactId>
            <version>5.10.1</version>
            <scope>test</scope>
        </dependency>
    </dependencies>

    <build>
        <plugins>
            <!-- Compiler Plugin -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-compiler-plugin</artifactId>
                <version>3.11.0</version>
                <configuration>
                    <source>17</source>
                    <target>17</target>
                </configuration>
            </plugin>

            <!-- Surefire Plugin for running tests -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-surefire-plugin</artifactId>
                <version>3.2.2</version>
            </plugin>

            <!-- Exec Plugin for running the main class -->
            <plugin>
                <groupId>org.codehaus.mojo</groupId>
                <artifactId>exec-maven-plugin</artifactId>
                <version>3.1.0</version>
                <configuration>
```

```
                    <mainClass>${exec.mainClass}</mainClass>
                </configuration>
            </plugin>

            <!-- Shade Plugin to create executable JAR -->
            <plugin>
                <groupId>org.apache.maven.plugins</groupId>
                <artifactId>maven-shade-plugin</artifactId>
                <version>3.4.1</version>
                <executions>
                    <execution>
                        <phase>package</phase>
                        <goals>
                            <goal>shade</goal>
                        </goals>
                        <configuration>
                            <transformers>
                                <transformer
 implementation="org.apache.maven.plugins.shade.resource.ManifestResourceTransformer">
                                    <mainClass>${exec.mainClass}</mainClass>
                                </transformer>
                            </transformers>
                            <createDependencyReducedPom>false</
createDependencyReducedPom>
                        </configuration>
                    </execution>
                </executions>
            </plugin>
        </plugins>
    </build>
</project>
```

## Praktik terbaik

- Jaga agar pencegat tetap ringan - Pencegat dijalankan untuk setiap permintaan, jadi hindari perhitungan berat atau operasi pemblokiran yang dapat memengaruhi kinerja.
- Tangani pengecualian dengan anggun - Jika pencegat Anda melempar pengecualian, itu menyebabkan seluruh permintaan gagal. Selalu gunakan blok try-catch untuk operasi yang berpotensi gagal.
- Urutan penting - Pencegat mengeksekusi dalam urutan Anda mendaftarkannya. Pertimbangkan ketergantungan antara pencegat Anda saat Anda mendaftarkannya.

- Gunakan ExecutionAttributes untuk status - Jika Anda perlu meneruskan data di antara metode pencegat yang berbeda, gunakan `ExecutionAttributes` bukan variabel instance untuk memastikan keamanan utas.
- Perhatikan data sensitif - Saat Anda mencatat permintaan dan tanggapan, berhati-hatilah untuk tidak mencatat informasi sensitif seperti kredensi atau data pribadi.

## Objek konteks

Setiap metode pencegat menerima objek konteks yang menyediakan akses ke informasi permintaan dan respons pada berbagai tahap eksekusi:

- `Context.BeforeExecution`- Menyediakan akses ke permintaan SDK asli
- `Context.ModifyRequest`- Memodifikasi permintaan SDK
- `Context.ModifyHttpRequest`- Memodifikasi permintaan HTTP
- `Context.AfterExecution`- Menyediakan akses ke permintaan dan respons
- `Context.FailedExecution`- Menyediakan akses ke permintaan dan pengecualian yang terjadi

# Menggunakan AWS SDK for Java 2.x

Bab ini menunjukkan kepada Anda bagaimana menggunakan secara AWS SDK for Java 2.x efektif. Belajar membuat klien layanan, membuat permintaan, menangani tanggapan, dan mengelola kesalahan. Bab ini mencakup pemrograman sinkron dan asinkron, hasil paginasi, pelayan untuk pemantauan sumber daya, dan pengoptimalan kinerja.

Anda juga akan menemukan praktik terbaik untuk penggunaan kembali klien, panduan pemecahan masalah, pengoptimalan startup Lambda, dukungan HTTP/2, dan konfigurasi DNS.

Daftar Isi


- Membuat Layanan AWS permintaan menggunakan AWS SDK for Java 2.x
  - Menggunakan klien layanan untuk membuat permintaan
    - Buat klien layanan
    - Konfigurasi klien default
    - Konfigurasikan klien layanan
    - Tutup klien layanan
  - Membuat permintaan
    - Gunakan permintaan untuk mengganti konfigurasi klien
  - Menangani tanggapan
- Pemrograman secara asinkron menggunakan AWS SDK for Java 2.x
  - Gunakan klien asinkron APIs
  - Menangani streaming dalam metode asinkron
  - Konfigurasikan opsi asinkron lanjutan
- Praktik terbaik untuk menggunakan AWS SDK for Java 2.x
  - Mencegah permintaan gantung dengan mengonfigurasi batas waktu API
  - Meningkatkan kinerja dengan menggunakan kembali klien layanan
  - Mencegah kebocoran sumber daya dengan menutup klien layanan yang tidak digunakan
  - Mencegah kelelahan kolam koneksi dengan menutup aliran input
  - Optimalkan kinerja HTTP untuk beban kerja aplikasi Anda
  - Tingkatkan kinerja SSL dengan OpenSSL untuk klien async
  - Pantau kinerja aplikasi dengan metrik SDK

- Menangani kesalahan di AWS SDK for Java 2.x
  - Mengapa pengecualian yang tidak dicentang?
  - AwsServiceException (dan subclass)
  - SdkClientException
  - Pengecualian dan perilaku coba lagi
- Menggunakan hasil paginasi di 2.x AWS SDK untuk Java
  - pagination sinkron
    - Iterasi di atas halaman
    - Iterasi di atas objek
      - Gunakan aliran
      - Gunakan untuk setiap loop
    - Pagination manual
  - pagination asinkron
    - Ulangi halaman nama tabel
      - Gunakan Subscriber
      - Gunakan Consumer
    - Ulangi nama tabel
      - Gunakan Subscriber
      - Gunakan Consumer
    - Gunakan pustaka pihak ketiga
- Menggunakan pelayan di AWS SDK for Java 2.x
  - Prasyarat
  - Menggunakan pelayan
    - Pemrograman sinkron
    - Pemrograman asinkron
  - Konfigurasikan pelayan
    - Konfigurasikan pelayan
    - Ganti konfigurasi untuk permintaan tertentu
  - Contoh kode
- Pemecahan masalah FAQs

- Bagaimana cara memperbaiki kesalahan "java.net.SocketException: Pengaturan ulang koneksi" atau "server gagal menyelesaikan respons"?
- Bagaimana cara memperbaiki "batas waktu koneksi"?
- Bagaimana cara memperbaiki "java.net.SocketTimeoutException: Baca waktunya habis"?
- Bagaimana cara memperbaiki kesalahan "Tidak dapat menjalankan permintaan HTTP: Batas waktu menunggu koneksi dari kumpulan"?
- Bagaimana cara memperbaikiNoClassDefFoundError, NoSuchMethodError atauNoSuchFieldError?
- Bagaimana cara memperbaiki kesalahan "SignatureDoesNotMatch" atau "Tanda tangan permintaan yang kami hitung tidak cocok dengan tanda tangan yang Anda berikan"?
- Bagaimana cara memperbaiki kesalahan "java.lang.IllegalStateException: Connection pool shut down"?
- Bagaimana cara memperbaiki "Tidak dapat memuat kredensyal dari salah satu penyedia dalam rantai "? AwsCredentialsProviderChain
  - Penyebab dan solusi umum
    - Tinjau konfigurasi kredensyal Anda
      - Untuk instans Amazon EC2
      - Untuk lingkungan kontainer
      - Untuk pengembangan lokal
      - Untuk federasi identitas web
    - Masalah konektivitas jaringan atau proxy
- Kurangi waktu startup SDK untuk AWS Lambda
  - Gunakan klien HTTP AWS berbasis CRT
  - Hapus dependensi klien HTTP yang tidak digunakan
  - Konfigurasikan klien layanan untuk memintas pencarian
  - Inisialisasi klien SDK di luar penangan fungsi Lambda
  - Minimalkan injeksi ketergantungan
  - Gunakan penargetan Maven Archetype AWS Lambda
  - Pertimbangkan Lambda SnapStart untuk Java
  - Perubahan versi 2.x yang memengaruhi waktu startup
- Sumber daya tambahan

- Implementasikan ContentStreamProvider di AWS SDK for Java 2.x
  - Gunakan mark() dan reset()
  - Gunakan buffering jika mark() dan tidak reset() tersedia
  - Buat aliran baru
- Mengatur JVM TTL untuk pencarian nama DNS
  - Cara mengatur JVM TTL
- Bekerja dengan HTTP/2 di AWS SDK untuk Java


# Membuat Layanan AWS permintaan menggunakan AWS SDK for Java 2.x

## Menggunakan klien layanan untuk membuat permintaan

Setelah menyelesaikan langkah-langkah dalam Menyiapkan SDK dan memahami cara mengonfigurasi klien layanan, Anda siap mengajukan permintaan ke AWS layanan seperti Amazon S3, Amazon DynamoDB, Amazon EC2 AWS Identity and Access Management, dan lainnya.

### Buat klien layanan

Untuk membuat permintaan ke Layanan AWS, Anda harus terlebih dahulu membuat instance klien layanan untuk layanan tersebut dengan menggunakan metode pabrik statis,. `builder()` `builder()`Metode mengembalikan `builder` objek yang memungkinkan Anda untuk menyesuaikan klien layanan. Metode penyetel yang lancar mengembalikan `builder` objek, sehingga Anda dapat merantai panggilan metode untuk kenyamanan dan kode yang lebih mudah dibaca. Setelah Anda mengkonfigurasi properti yang Anda inginkan, panggil `build()` metode untuk membuat klien.

Sebagai contoh, cuplikan kode berikut membuat instance `Ec2Client` objek sebagai klien layanan untuk Amazon EC2.

```
Region region = Region.US_WEST_2;
Ec2Client ec2Client = Ec2Client.builder()
        .region(region)
        .build();
```

> **Note**
>
> Klien layanan di SDK aman untuk utas. Untuk kinerja terbaik, perlakukan mereka sebagai benda berumur panjang. Setiap klien memiliki sumber daya kolam koneksi sendiri yang dilepaskan saat klien mengumpulkan sampah.
> Objek klien layanan tidak dapat diubah, jadi Anda harus membuat klien baru untuk setiap layanan yang Anda minta, atau jika Anda ingin menggunakan konfigurasi yang berbeda untuk membuat permintaan ke layanan yang sama.
> Menentukan `Region` dalam pembuat klien layanan tidak diperlukan untuk semua AWS layanan; namun, ini adalah praktik terbaik untuk mengatur Wilayah untuk panggilan API yang Anda buat dalam aplikasi Anda. Lihat pemilihan AWS wilayah untuk informasi lebih lanjut.

## Konfigurasi klien default

Pembangun klien memiliki metode pabrik lain bernama`create()`. Metode ini menciptakan klien layanan dengan konfigurasi default. Ini menggunakan rantai penyedia default untuk memuat kredensil dan rantai Wilayah AWS penyedia default. Jika kredensil atau Wilayah tidak dapat ditentukan dari lingkungan tempat aplikasi berjalan, panggilan ke `create` gagal. Lihat Menggunakan kredensil dan pemilihan Wilayah untuk informasi selengkapnya tentang cara SDK menentukan kredensil dan Wilayah yang akan digunakan.

Misalnya, cuplikan kode berikut membuat instance `DynamoDbClient` objek sebagai klien layanan untuk Amazon DynamoDB:

```
DynamoDbClient dynamoDbClient = DynamoDbClient.create();
```

## Konfigurasikan klien layanan

Untuk detail tentang cara mengonfigurasi klien layanan, lihat Konfigurasi klien secara eksternal danKonfigurasi klien dalam kode.

## Tutup klien layanan

Sebagai praktik terbaik, Anda harus menggunakan klien layanan untuk beberapa panggilan layanan API selama masa pakai aplikasi. Namun, jika Anda membutuhkan klien layanan untuk penggunaan satu kali atau tidak lagi membutuhkan klien layanan, tutuplah.

Panggil `close()` metode ketika klien layanan tidak lagi diperlukan untuk membebaskan sumber daya.

```
ec2Client.close();
```

Jika Anda memerlukan klien layanan untuk penggunaan satu kali, Anda dapat membuat instance klien layanan sebagai sumber daya dalam pernyataan -with-resources. `try` Klien layanan mengimplementasikan `Autoclosable` antarmuka, sehingga JDK secara otomatis memanggil `close()` metode di akhir pernyataan.

Contoh berikut menunjukkan cara menggunakan klien layanan untuk panggilan satu kali. `StsClient`Yang memanggil AWS Security Token Service ditutup setelah mengembalikan ID akun.

```
import software.amazon.awssdk.services.sts.StsClient;

String getAccountID() {
    try (StsClient stsClient = StsClient.create()) {
       return stsClient.getCallerIdentity().account();
    }
}
```

## Membuat permintaan

Gunakan klien layanan untuk membuat permintaan ke yang sesuai Layanan AWS.

Misalnya, cuplikan kode ini menunjukkan cara membuat `RunInstancesRequest` objek untuk membuat instance Amazon EC2 baru:

```
// Create the request by using the fluid setter methods of the request builder.
RunInstancesRequest runInstancesRequest = RunInstancesRequest.builder()
        .imageId(amiId)
        .instanceType(InstanceType.T1_MICRO)
        .maxCount(1)
        .minCount(1)
        .build();

// Use the configured request with the service client.
RunInstancesResponse response = ec2Client.runInstances(runInstancesRequest);
```

Alih-alih membuat permintaan dan meneruskan instance, SDK menyediakan API lancar yang dapat Anda gunakan untuk membuat permintaan. Dengan API yang lancar, Anda dapat menggunakan ekspresi lambda Java untuk membuat permintaan 'in-line'.

Contoh berikut menulis ulang contoh sebelumnya dengan menggunakan versi `runInstances` metode yang menggunakan pembangun untuk membuat permintaan.

```
// Create the request by using a lambda expression.
RunInstancesResponse response = ec2.runInstances(r -> r
                .imageId(amiId)
                .instanceType(InstanceType.T1_MICRO)
                .maxCount(1)
                .minCount(1));
```

## Gunakan permintaan untuk mengganti konfigurasi klien

Meskipun klien layanan tidak dapat diubah, Anda dapat mengganti banyak pengaturannya di tingkat permintaan. Saat membuat permintaan, Anda dapat memberikan AwsRequestOverrideConfigurationinstance untuk menyediakan pengaturan yang diganti. Beberapa metode yang dapat Anda gunakan untuk mengganti pengaturan klien adalah:

- `apiCallAttemptTimeout`
- `apiCallTimeout`
- `credentialProvider`
- `compressionConfiguration`
- `putHeader`

Untuk contoh penggantian pengaturan klien dengan permintaan, asumsikan bahwa Anda memiliki klien S3 berikut yang menggunakan pengaturan default.

```
S3Client s3Client = S3Client.create();
```

Anda ingin mengunduh file besar dan ingin memastikan permintaan tidak batas waktu sebelum unduhan selesai. Untuk mencapai hal ini, tingkatkan nilai batas waktu hanya untuk satu `GetObject` permintaan seperti yang ditunjukkan dalam kode berikut.

Standard API

```
AwsRequestOverrideConfiguration overrideConfiguration =
 AwsRequestOverrideConfiguration.builder()
    .apiCallTimeout(Duration.ofSeconds(100L))
    .apiCallAttemptTimeout(Duration.ofSeconds(25L))
    .build();

GetObjectRequest request = GetObjectRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("demo-key")
    .overrideConfiguration(overrideConfiguration)
    .build();

s3Client.getObject(request, myPath);
```

Fluent API

```
s3Client.getObject(b -> b
        .bucket("amzn-s3-demo-bucket")
        .key("demo-key")
        .overrideConfiguration(c -> c
            .apiCallTimeout(Duration.ofSeconds(100L))
            .apiCallAttemptTimeout(Duration.ofSeconds(25L))),
    myPath);
```

## Menangani tanggapan

SDK mengembalikan objek respons untuk sebagian besar operasi layanan. Kode Anda dapat memproses informasi dalam objek respons sesuai dengan kebutuhan Anda.

Misalnya, cuplikan kode berikut mencetak id contoh pertama yang dikembalikan dengan `RunInstancesResponse`objek dari permintaan sebelumnya.

```
RunInstancesResponse runInstancesResponse =
 ec2Client.runInstances(runInstancesRequest);
System.out.println(runInstancesResponse.instances().get(0).instanceId());
```

Namun, tidak semua operasi mengembalikan objek respons dengan data khusus layanan. Dalam situasi ini, Anda dapat menanyakan status respons HTTP untuk mengetahui apakah operasi berhasil.

Misalnya, kode dalam cuplikan berikut memeriksa respons HTTP untuk melihat apakah `DeleteContactList`pengoperasian Amazon Simple Email Service berhasil.

```
SesV2Client sesv2Client = SesV2Client.create();

DeleteContactListRequest request = DeleteContactListRequest.builder()
    .contactListName("ExampleContactListName")
    .build();

DeleteContactListResponse response = sesv2Client.deleteContactList(request);
if (response.sdkHttpResponse().isSuccessful()) {
    System.out.println("Contact list deleted successfully");
} else {
    System.out.println("Failed to delete contact list. Status code: " +
 response.sdkHttpResponse().statusCode());
}
```

# Pemrograman secara asinkron menggunakan AWS SDK for Java 2.x

AWS SDK for Java 2.x Fitur klien asinkron dengan I/O dukungan non-pemblokiran yang menerapkan konkurensi tinggi di beberapa utas. Namun, total non-pemblokiran tidak I/O dijamin. Klien asinkron dapat melakukan pemblokiran panggilan dalam beberapa kasus seperti pengambilan kredensi, penandatanganan permintaan menggunakan AWS Sigv4 (SigV4), atau penemuan titik akhir.

Metode sinkron memblokir eksekusi thread Anda hingga klien menerima respons dari layanan. Metode asinkron segera kembali, memberikan kontrol kembali ke utas panggilan tanpa menunggu respons.

Karena metode asinkron kembali sebelum respons tersedia, Anda memerlukan cara untuk mendapatkan respons saat sudah siap. Metode untuk klien asinkron di 2.x dari CompletableFuture objek AWS SDK untuk Java  kembali yang memungkinkan Anda mengakses respons saat sudah siap.

## Gunakan klien asinkron APIs

Tanda tangan metode klien asinkron sama dengan rekan sinkron mereka, tetapi metode asinkron mengembalikan CompletableFutureobjek yang berisi hasil operasi asinkron di masa depan. Jika

kesalahan dilemparkan saat metode asinkron SDK dijalankan, kesalahan dilemparkan sebagai. `CompletionException`

Salah satu pendekatan yang dapat Anda gunakan untuk mendapatkan hasilnya adalah dengan menghubungkan `whenComplete()` metode ke yang `CompletableFuture` dikembalikan oleh pemanggilan metode SDK. `whenComplete()`Metode menerima hasil atau objek Throwable dari tipe `CompletionException` tergantung pada bagaimana panggilan asinkron selesai. Anda memberikan tindakan `whenComplete()` untuk memproses atau memeriksa hasil sebelum dikembalikan ke kode panggilan.

Jika Anda ingin mengembalikan sesuatu selain objek yang dikembalikan oleh metode SDK, gunakan `handle()` metode sebagai gantinya. `handle()`Metode ini mengambil parameter yang sama sepertiwhenComplete(), tetapi Anda dapat memproses hasilnya dan mengembalikan objek.

Untuk menunggu rantai asinkron selesai dan mengambil hasil penyelesaian, Anda dapat memanggil metode. `join()` Jika `Throwable` objek tidak ditangani dalam rantai, `join()` metode melempar tanda centang `CompletionException` yang membungkus pengecualian asli. Anda mengakses pengecualian asli dengan`CompletionException#getCause()`. Anda juga dapat memanggil `CompletableFuture#get()` metode untuk mendapatkan hasil penyelesaian. `get()`Metode ini, bagaimanapun, dapat membuang pengecualian yang diperiksa.

Contoh berikut menunjukkan dua variasi bagaimana Anda dapat bekerja dengan `listTables()` metode klien asinkron DynamoDB. Tindakan diteruskan untuk `whenComplete()` hanya mencatat respons yang berhasil, sedangkan `handle()` versi mengekstrak daftar nama tabel dan mengembalikan daftar. Dalam kedua kasus jika kesalahan dihasilkan dalam rantai asinkron, kesalahan dilemparkan kembali sehingga kode klien memiliki kesempatan untuk menanganinya.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;

import java.util.List;
import java.util.concurrent.CompletableFuture;
```

Kode

### whenComplete() variation

```
public class DynamoDbAsyncListTables {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        DynamoDbAsyncClient dynamoDbAsyncClient =
 DynamoDbAsyncClient.builder().region(region).build();
        try {
            ListTablesResponse listTablesResponse =
 listTablesWhenComplete(dynamoDbAsyncClient).join();  // The join() method may throw
 a CompletionException.
            if (listTablesResponse.hasTableNames()){
                System.out.println("Table exist in this region: " + region.id());
            }
        } catch (RuntimeException e) {
            // Handle as needed. Here we simply print out the class names.
            System.out.println(e.getClass()); // Prints 'class
 java.util.concurrent.CompletionException'.
            System.out.println(e.getCause().getClass()); // Prints 'class
 software.amazon.awssdk.services.dynamodb.model.DynamoDbException'.
        }
    }

    public static CompletableFuture<ListTablesResponse>
 listTablesWhenComplete(DynamoDbAsyncClient client) {
        return client.listTables(ListTablesRequest.builder().build())
            .whenComplete((listTablesResponse, throwable) -> {
                if (listTablesResponse != null) {  // Consume the response.
                    System.out.println("The SDK's listTables method completed
 successfully.");
                } else {
                    RuntimeException cause = (RuntimeException)
 throwable.getCause(); // If an error was thrown during the SDK's listTables method
 it is wrapped in a CompletionException.

  // The SDK throws only RuntimeExceptions, so this is a safe cast.
                    System.out.println(cause.getMessage());  // Log error here, but
 rethrow so the calling code can handle as needed.
                    throw cause;
                }
            });
    }
```

### handle() variation

```
public class DynamoDbAsyncListTables {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        DynamoDbAsyncClient dynamoDbAsyncClient =
 DynamoDbAsyncClient.builder().region(region).build();
        try {
            List<String> tableNames =
 listTablesHandle(dynamoDbAsyncClient).join(); // The join() method may throw a
 CompletionException.
            tableNames.forEach(System.out::println);
        } catch (RuntimeException e) {
            // Handle as needed. Here we simply print out the class names.
            System.out.println(e.getClass()); // Prints 'class
 java.util.concurrent.CompletionException'.
            System.out.println(e.getCause().getClass()); // Prints 'class
 software.amazon.awssdk.services.dynamodb.model.DynamoDbException'.
        }
    }

    public static CompletableFuture<List<String>>
 listTablesHandle(DynamoDbAsyncClient client) {
        return client.listTables(ListTablesRequest.builder().build())
            .handle((listTablesResponse, throwable) -> {
                if (listTablesResponse != null) {
                    return listTablesResponse.tableNames(); // Return the list of
 table names.
                } else {
                    RuntimeException cause = (RuntimeException)
 throwable.getCause(); // If an error was thrown during the SDK's listTables method
 it is wrapped in a CompletionException.

  // The SDK throws only RuntimeExceptions, so this is a safe cast.
                    System.out.println(cause.getMessage());  // Log error here, but
 rethrow so the calling code can handle as needed.
                    throw cause;
                }
            });
    }
}
```

# Menangani streaming dalam metode asinkron

Untuk metode asinkron dengan konten streaming, Anda harus menyediakan AsyncRequestBodyuntuk menyediakan konten secara bertahap, atau AsyncResponseTransformeruntuk menerima dan memproses respons.

Contoh berikut mengunggah file ke Amazon S3 asinkron dengan menggunakan bentuk operasi asinkron. `PutObject`

Impor

```
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import java.nio.file.Paths;
import java.util.concurrent.CompletableFuture;
```

Kode

```
/**
 * To run this AWS code example, ensure that you have setup your development
 environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class S3AsyncOps {

     public static void main(String[] args) {

         final String USAGE = "\n" +
                 "Usage:\n" +
                 "    S3AsyncOps <bucketName> <key> <path>\n\n" +
                 "Where:\n" +
                 "    bucketName - the name of the Amazon S3 bucket (for example,
 bucket1). \n\n" +
                 "    key - the name of the object (for example, book.pdf). \n" +
                 "    path - the local path to the file (for example, C:/AWS/book.pdf).
 \n" ;
```

```
        if (args.length != 3) {
            System.out.println(USAGE);
             System.exit(1);
        }

        String bucketName = args[0];
        String key = args[1];
        String path = args[2];

        Region region = Region.US_WEST_2;
        S3AsyncClient client = S3AsyncClient.builder()
                .region(region)
                .build();

        PutObjectRequest objectRequest = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        // Put the object into the bucket
        CompletableFuture<PutObjectResponse> future = client.putObject(objectRequest,
                AsyncRequestBody.fromFile(Paths.get(path))
        );
        future.whenComplete((resp, err) -> {
            try {
                if (resp != null) {
                    System.out.println("Object uploaded. Details: " + resp);
                } else {
                    // Handle error
                    err.printStackTrace();
                }
            } finally {
                // Only close the client when you are completely done with it
                client.close();
            }
        });

        future.join();
    }
}
```

Contoh berikut mendapatkan file dari Amazon S3 dengan menggunakan bentuk asinkron operasi. `GetObject`

### Impor

```
import software.amazon.awssdk.core.async.AsyncResponseTransformer;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import java.nio.file.Paths;
import java.util.concurrent.CompletableFuture;
```

### Kode

```
/**
 * To run this AWS code example, ensure that you have setup your development
 environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class S3AsyncStreamOps {

    public static void main(String[] args) {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    S3AsyncStreamOps <bucketName> <objectKey> <path>\n\n" +
                "Where:\n" +
                "    bucketName - the name of the Amazon S3 bucket (for example,
 bucket1). \n\n" +
                "    objectKey - the name of the object (for example, book.pdf). \n" +
                "    path - the local path to the file (for example, C:/AWS/book.pdf).
 \n" ;

        if (args.length != 3) {
            System.out.println(USAGE);
            System.exit(1);
         }
```

```
        String bucketName = args[0];
        String objectKey = args[1];
        String path = args[2];

        Region region = Region.US_WEST_2;
        S3AsyncClient client = S3AsyncClient.builder()
                .region(region)
                .build();

        GetObjectRequest objectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

        CompletableFuture<GetObjectResponse> futureGet =
 client.getObject(objectRequest,
                AsyncResponseTransformer.toFile(Paths.get(path)));

        futureGet.whenComplete((resp, err) -> {
            try {
                if (resp != null) {
                    System.out.println("Object downloaded. Details: "+resp);
                } else {
                    err.printStackTrace();
                }
            } finally {
               // Only close the client when you are completely done with it
                client.close();
            }
        });
        futureGet.join();
    }
}
```

## Konfigurasikan opsi asinkron lanjutan

AWS SDK untuk Java 2.x menggunakan Netty, kerangka kerja aplikasi jaringan berbasis peristiwa asinkron, untuk menangani thread. I/O AWS SDK untuk Java 2.x membuat Netty `ExecutorService` di belakang, untuk menyelesaikan futures yang dikembalikan dari permintaan klien HTTP hingga ke klien Netty. Abstraksi ini mengurangi risiko aplikasi merusak proses asinkron jika pengembang memilih untuk menghentikan atau menidurkan utas. Secara default, setiap klien asinkron membuat

threadpool berdasarkan jumlah prosesor dan mengelola tugas dalam antrian di dalam file. `ExecutorService`

Anda dapat menentukan implementasi JDK tertentu `ExecutorService` ketika Anda membangun klien asinkron Anda. Cuplikan berikut membuat `ExecutorService` dengan jumlah thread tetap.

Kode

```
S3AsyncClient clientThread = S3AsyncClient.builder()
  .asyncConfiguration(
    b -> b.advancedOption(SdkAdvancedAsyncClientOption
      .FUTURE_COMPLETION_EXECUTOR,
      Executors.newFixedThreadPool(10)
    )
  )
  .build();
```

Untuk mengoptimalkan kinerja, Anda dapat mengelola pelaksana kumpulan utas Anda sendiri, dan menyertakannya saat mengonfigurasi klien Anda.

```
ThreadPoolExecutor executor = new ThreadPoolExecutor(50, 50,
    10, TimeUnit.SECONDS,
    new LinkedBlockingQueue<>(<custom_value>),
    new ThreadFactoryBuilder()
      .threadNamePrefix("sdk-async-response").build());

// Allow idle core threads to time out
executor.allowCoreThreadTimeOut(true);

S3AsyncClient clientThread = S3AsyncClient.builder()
  .asyncConfiguration(
    b -> b.advancedOption(SdkAdvancedAsyncClientOption
      .FUTURE_COMPLETION_EXECUTOR,
      executor
    )
  )
  .build();
```

# Praktik terbaik untuk menggunakan AWS SDK for Java 2.x

## Mencegah permintaan gantung dengan mengonfigurasi batas waktu API

SDK memberikan nilai default untuk beberapa opsi batas waktu, seperti batas waktu koneksi dan batas waktu soket, tetapi tidak untuk batas waktu panggilan API atau batas waktu percobaan panggilan API individual. Ini adalah praktik yang baik untuk mengatur batas waktu untuk upaya individu dan seluruh permintaan. Ini akan memastikan aplikasi Anda gagal dengan cepat dengan cara yang optimal ketika ada masalah sementara yang dapat menyebabkan upaya permintaan membutuhkan waktu lebih lama untuk menyelesaikan atau masalah jaringan yang fatal.

Anda dapat mengonfigurasi batas waktu untuk semua permintaan yang dibuat oleh klien layanan menggunakan `ClientOverrideConfiguration#apiCallAttemptTimeout` dan`ClientOverrideConfiguration#apiCallTimeout`.

Contoh berikut menunjukkan konfigurasi klien Amazon S3 dengan nilai batas waktu kustom.

```
S3Client.builder()
        .overrideConfiguration(
             b -> b.apiCallTimeout(Duration.ofSeconds(<custom value>))
                   .apiCallAttemptTimeout(Duration.ofMillis(<custom value>)))
        .build();
```

**`apiCallAttemptTimeout`**

Pengaturan ini menetapkan jumlah waktu untuk satu percobaan HTTP, setelah itu panggilan API dapat dicoba ulang.

**`apiCallTimeout`**

Nilai untuk properti ini mengonfigurasi jumlah waktu untuk seluruh eksekusi, termasuk semua upaya coba lagi.

Sebagai alternatif untuk mengatur nilai batas waktu ini pada klien layanan, Anda dapat menggunakan `RequestOverrideConfiguration#apiCallTimeout()`dan `RequestOverrideConfiguration#apiCallAttemptTimeout()` mengonfigurasi satu permintaan.

Contoh berikut mengkonfigurasi `listBuckets` permintaan tunggal dengan nilai batas waktu kustom.

```
s3Client.listBuckets(lbr -> lbr.overrideConfiguration(
        b -> b.apiCallTimeout(Duration.ofSeconds(<custom value>))
              .apiCallAttemptTimeout(Duration.ofMillis(<custom value>))));
```

Saat Anda menggunakan properti ini bersama-sama, Anda menetapkan batas keras pada total waktu yang dihabiskan untuk semua upaya di seluruh percobaan ulang. Anda juga menetapkan permintaan HTTP individual untuk gagal cepat pada permintaan yang lambat.

## Meningkatkan kinerja dengan menggunakan kembali klien layanan

Setiap klien layanan mempertahankan kumpulan koneksi HTTP sendiri. Koneksi yang sudah ada di kolam dapat digunakan kembali oleh permintaan baru untuk mengurangi waktu untuk membuat koneksi baru. Kami merekomendasikan berbagi satu contoh klien untuk menghindari overhead memiliki terlalu banyak kumpulan koneksi yang tidak digunakan secara efektif. Semua klien layanan aman untuk utas.

Jika Anda tidak ingin berbagi instance klien, panggil `close()` instance untuk melepaskan sumber daya saat klien tidak diperlukan.

## Mencegah kebocoran sumber daya dengan menutup klien layanan yang tidak digunakan

Tutup klien layanan untuk melepaskan sumber daya, seperti utas, jika tidak lagi diperlukan. Jika Anda tidak ingin berbagi instance klien, panggil `close()` instance untuk melepaskan sumber daya saat klien tidak diperlukan.

## Mencegah kelelahan kolam koneksi dengan menutup aliran input

Untuk operasi streaming seperti`S3Client#getObject`, jika Anda bekerja dengan `ResponseInputStream` langsung, kami sarankan Anda melakukan hal berikut:

- Baca semua data dari aliran input sesegera mungkin.
- Tutup aliran input sesegera mungkin.

Kami membuat rekomendasi ini karena aliran input adalah aliran langsung data dari koneksi HTTP dan koneksi HTTP yang mendasarinya tidak dapat digunakan kembali sampai semua data dari aliran telah dibaca dan aliran ditutup. Jika aturan ini tidak diikuti, klien dapat kehabisan sumber daya dengan mengalokasikan terlalu banyak koneksi HTTP yang terbuka, tetapi tidak terpakai.

## Optimalkan kinerja HTTP untuk beban kerja aplikasi Anda

SDK menyediakan satu set konfigurasi http default yang berlaku untuk kasus penggunaan umum. Kami menyarankan agar pelanggan menyetel konfigurasi HTTP untuk aplikasi mereka berdasarkan kasus penggunaan mereka.

Sebagai titik awal yang baik, SDK menawarkan fitur default konfigurasi cerdas. Fitur ini tersedia dimulai dengan versi 2.17.102. Anda memilih mode tergantung pada kasus penggunaan Anda, yang memberikan nilai konfigurasi yang masuk akal.

## Tingkatkan kinerja SSL dengan OpenSSL untuk klien async

Secara default, SDK `NettyNioAsyncHttpClient`menggunakan implementasi SSL default JDK sebagai. `SslProvider` Pengujian kami menemukan bahwa OpenSSL berkinerja lebih baik daripada implementasi default JDK. Komunitas Netty juga merekomendasikan penggunaan OpenSSL.

Untuk menggunakan OpenSSL, `netty-tcnative` tambahkan dependensi Anda. Untuk detail konfigurasi, lihat dokumentasi proyek Netty.

Setelah Anda `netty-tcnative` mengonfigurasi proyek Anda, `NettyNioAsyncHttpClient` instance akan secara otomatis memilih OpenSSL. Atau, Anda dapat mengatur secara `SslProvider` eksplisit menggunakan `NettyNioAsyncHttpClient` builder seperti yang ditunjukkan pada cuplikan berikut.

```
NettyNioAsyncHttpClient.builder()
                       .sslProvider(SslProvider.OPENSSL)
                       .build();
```

## Pantau kinerja aplikasi dengan metrik SDK

SDK for Java dapat mengumpulkan metrik untuk klien layanan di aplikasi Anda. Anda dapat menggunakan metrik ini untuk mengidentifikasi masalah kinerja, meninjau tren penggunaan secara keseluruhan, meninjau pengecualian klien layanan yang dikembalikan, atau menggali untuk memahami masalah tertentu.

Kami menyarankan Anda mengumpulkan metrik, lalu menganalisis CloudWatch Log Amazon, untuk mendapatkan pemahaman yang lebih dalam tentang kinerja aplikasi Anda.

# Menangani kesalahan di AWS SDK for Java 2.x

Memahami bagaimana dan kapan pengecualian AWS SDK for Java 2.x melempar penting untuk membangun aplikasi berkualitas tinggi menggunakan SDK. Bagian berikut menjelaskan berbagai kasus pengecualian yang dilemparkan oleh SDK dan cara menanganinya dengan tepat.

## Mengapa pengecualian yang tidak dicentang?

Pengecualian AWS SDK untuk Java menggunakan runtime (atau tidak dicentang) alih-alih pengecualian yang dicentang karena alasan berikut:

- Untuk memungkinkan pengembang mengontrol kesalahan yang ingin mereka tangani tanpa memaksa mereka untuk menangani kasus luar biasa yang tidak mereka khawatirkan (dan membuat kode mereka terlalu bertele-tele)
- Untuk mencegah masalah skalabilitas yang melekat pada pengecualian yang diperiksa dalam aplikasi besar

Secara umum, pengecualian yang diperiksa bekerja dengan baik pada skala kecil, tetapi dapat menjadi merepotkan karena aplikasi tumbuh dan menjadi lebih kompleks.

## AwsServiceException (dan subclass)

AwsServiceExceptionadalah pengecualian paling umum yang akan Anda alami saat menggunakan AWS SDK untuk Java. `AwsServiceException`adalah subkelas yang lebih umum SdkServiceException. `AwsServiceExceptions` mewakili respons kesalahan dari Layanan AWS. Misalnya, jika Anda mencoba menghentikan Amazon EC2 instance yang tidak ada, Amazon EC2 akan mengembalikan respons kesalahan dan semua detail respons kesalahan itu akan disertakan dalam `AwsServiceException` yang dilemparkan.

Ketika Anda menemukan`AwsServiceException`, Anda tahu bahwa permintaan Anda berhasil dikirim ke Layanan AWS tetapi tidak dapat berhasil diproses. Ini bisa karena kesalahan dalam parameter permintaan atau karena masalah di sisi layanan.

`AwsServiceException`memberi Anda informasi seperti:

- Kode status HTTP yang dikembalikan
- Kode AWS kesalahan yang dikembalikan

- Pesan kesalahan terperinci dari layanan di AwsErrorDetailskelas
- AWS ID permintaan untuk permintaan yang gagal

Dalam kebanyakan kasus, subkelas khusus layanan dilemparkan untuk memungkinkan pengembang mengontrol `AwsServiceException` secara halus atas penanganan kasus kesalahan melalui blok catch. Referensi Java SDK API untuk AwsServiceExceptionmenampilkan sejumlah besar `AwsServiceException` subclass. Gunakan tautan subkelas untuk menelusuri untuk melihat pengecualian granular yang dilemparkan oleh layanan.

Misalnya, tautan berikut ke referensi SDK API menunjukkan hierarki pengecualian untuk beberapa hal umum. Layanan AWS Daftar subclass yang ditampilkan pada setiap halaman menunjukkan pengecualian spesifik yang dapat ditangkap oleh kode Anda.

- Amazon S3
- DynamoDB
- Amazon SQS

Untuk mempelajari lebih lanjut tentang pengecualian, periksa `errorCode` pada AwsErrorDetailsobjek. Anda dapat menggunakan `errorCode` nilai untuk mencari informasi di API panduan layanan. Misalnya jika tertangkap dan `AwsErrorDetails#errorCode()` nilainya`InvalidRequest`, gunakan daftar kode kesalahan di Referensi API Amazon S3 untuk melihat detail selengkapnya. `S3Exception`

## SdkClientException

SdkClientExceptionmenunjukkan bahwa masalah terjadi di dalam kode klien Java, baik saat mencoba mengirim permintaan ke AWS atau saat mencoba mengurai respons dari AWS. An `SdkClientException` umumnya lebih parah daripada`SdkServiceException`, dan menunjukkan masalah besar yang mencegah klien melakukan panggilan layanan ke AWS layanan. Misalnya, AWS SDK untuk Java melempar `SdkClientException` jika tidak ada koneksi jaringan yang tersedia ketika Anda mencoba memanggil operasi pada salah satu klien.

## Pengecualian dan perilaku coba lagi

SDK for Java mencoba ulang permintaan untuk beberapa pengecualian sisi klien dan untuk kode status HTTP yang diterimanya dari tanggapan. Layanan AWS Kesalahan ini ditangani sebagai bagian

dari warisan `RetryMode` yang digunakan klien layanan secara default. Referensi Java API untuk `RetryMode` menjelaskan berbagai cara yang dapat Anda konfigurasi mode.

Untuk menyesuaikan pengecualian dan kode status HTTP yang memicu percobaan ulang otomatis, konfigurasikan klien layanan Anda dengan `RetryPolicy` yang menambahkan `RetryOnExceptionsCondition` dan `RetryOnStatusCodeCondition` instance.

# Menggunakan hasil paginasi di 2.x AWS SDK untuk Java

Banyak AWS operasi mengembalikan hasil paginasi ketika objek respons terlalu besar untuk dikembalikan dalam satu respons. Di AWS SDK untuk Java 1.0, respons berisi token yang Anda gunakan untuk mengambil halaman hasil berikutnya. Sebaliknya, AWS SDK untuk Java 2.x memiliki metode autopagination yang membuat beberapa panggilan layanan untuk mendapatkan halaman hasil berikutnya untuk Anda secara otomatis. Anda hanya perlu menulis kode yang memproses hasilnya. Autopagination tersedia untuk klien sinkron dan asinkron.

> **Note**
>
> Cuplikan kode ini mengasumsikan bahwa Anda memahami dasar-dasar penggunaan SDK, dan telah mengonfigurasi lingkungan Anda dengan akses masuk tunggal.

## pagination sinkron

Contoh berikut menunjukkan metode pagination sinkron untuk mencantumkan objek Amazon S3 dalam bucket.

### Iterasi di atas halaman

Contoh pertama menunjukkan penggunaan objek `listRes` paginator, sebuah `ListObjectsV2Iterable`contoh, untuk iterasi melalui semua halaman respon dengan metode. `stream` Kode mengalir di atas halaman respons, mengubah aliran respons menjadi aliran `S3Object` konten, dan kemudian memproses konten objek. Amazon S3

Impor berikut berlaku untuk semua contoh di bagian pagination sinkron ini.

Impor

```
import java.io.IOException;
import java.nio.ByteBuffer;
import java.util.Random;

import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.paginators.ListObjectsV2Iterable;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Object;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadRequest;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.HeadBucketResponse;
```

```
        ListObjectsV2Request listReq = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .maxKeys(1)
            .build();

        ListObjectsV2Iterable listRes = s3.listObjectsV2Paginator(listReq);
        // Process response pages
        listRes.stream()
            .flatMap(r -> r.contents().stream())
            .forEach(content -> System.out
                .println(" Key: " + content.key() + " size = " + content.size()));
```

Lihat contoh lengkapnya di GitHub.

## Iterasi di atas objek

Contoh berikut menunjukkan cara untuk mengulangi objek yang dikembalikan dalam respons, bukan halaman respons. `contents`Metode `ListObjectsV2Iterable` kelas mengembalikan sebuah `SdkIterable`yang menyediakan beberapa metode untuk memproses elemen konten yang mendasarinya.

Gunakan aliran

Cuplikan berikut menggunakan `stream` metode pada konten respons untuk mengulangi koleksi item paginasi.

```
        // Helper method to work with paginated collection of items directly.
        listRes.contents().stream()
            .forEach(content -> System.out
                .println(" Key: " + content.key() + " size = " + content.size()));
```

Lihat contoh lengkapnya di GitHub.

Gunakan untuk setiap loop

Karena `SdkIterable` memperluas `Iterable` antarmuka, Anda dapat memproses konten seperti apa pun`Iterable`. Cuplikan berikut menggunakan `for-each` loop standar untuk iterasi melalui isi respon.

```
        for (S3Object content : listRes.contents()) {
            System.out.println(" Key: " + content.key() + " size = " + content.size());
        }
```

Lihat contoh lengkapnya di GitHub.

## Pagination manual

Jika kasus penggunaan Anda memerlukannya, pagination manual masih tersedia. Gunakan token berikutnya di objek respons untuk permintaan berikutnya. Contoh berikut menggunakan `while` loop.

```
        ListObjectsV2Request listObjectsReqManual = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .maxKeys(1)
            .build();
```

```
        boolean done = false;
        while (!done) {
            ListObjectsV2Response listObjResponse =
s3.listObjectsV2(listObjectsReqManual);
            for (S3Object content : listObjResponse.contents()) {
                System.out.println(content.key());
            }

            if (listObjResponse.nextContinuationToken() == null) {
                done = true;
            }

            listObjectsReqManual = listObjectsReqManual.toBuilder()
                .continuationToken(listObjResponse.nextContinuationToken())
                .build();
        }
```

Lihat contoh lengkapnya di GitHub.

## pagination asinkron

Contoh berikut menunjukkan metode pagination asinkron untuk daftar tabel. DynamoDB

### Ulangi halaman nama tabel

Dua contoh berikut menggunakan klien DynamoDB asinkron yang memanggil metode dengan permintaan `listTablesPaginator` untuk mendapatkan file. `ListTablesPublisher` `ListTablesPublisher`mengimplementasikan dua antarmuka, yang menyediakan banyak opsi untuk memproses respons. Kita akan melihat metode masing-masing antarmuka.

#### Gunakan **`Subscriber`**

Contoh kode berikut menunjukkan bagaimana memproses hasil paginasi dengan menggunakan `org.reactivestreams.Publisher` antarmuka yang diimplementasikan oleh. `ListTablesPublisher` Untuk mempelajari lebih lanjut tentang model aliran reaktif, lihat repo Reactive Streams. GitHub

Impor berikut berlaku untuk semua contoh di bagian pagination asinkron ini.

Impor

```
import io.reactivex.rxjava3.core.Flowable;
```

```
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import reactor.core.publisher.Flux;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import software.amazon.awssdk.services.dynamodb.paginators.ListTablesPublisher;

import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;
```

Kode berikut memperoleh sebuah `ListTablesPublisher` instance.

```
        // Creates a default client with credentials and region loaded from the
        // environment.
        final DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();

        ListTablesRequest listTablesRequest =
 ListTablesRequest.builder().limit(3).build();
        ListTablesPublisher publisher =
 asyncClient.listTablesPaginator(listTablesRequest);
```

Kode berikut menggunakan implementasi anonim `org.reactivestreams.Subscriber` untuk memproses hasil untuk setiap halaman.

`onSubscribe`Metode ini memanggil `Subscription.request` metode untuk memulai permintaan data dari penerbit. Metode ini harus dipanggil untuk mulai mendapatkan data dari penerbit.

`onNext`Metode pelanggan memproses halaman respons dengan mengakses semua nama tabel dan mencetak masing-masing. Setelah halaman diproses, halaman lain diminta dari penerbit. Metode ini dipanggil berulang kali sampai semua halaman diambil.

`onError`Metode ini dipicu jika terjadi kesalahan saat mengambil data. Akhirnya, `onComplete` metode ini dipanggil ketika semua halaman telah diminta.

```
        // A Subscription represents a one-to-one life-cycle of a Subscriber
 subscribing
        // to a Publisher.
        publisher.subscribe(new Subscriber<ListTablesResponse>() {
```

```
            // Maintain a reference to the subscription object, which is required to
request
            // data from the publisher.
            private Subscription subscription;

            @Override
            public void onSubscribe(Subscription s) {
                subscription = s;
                // Request method should be called to demand data. Here we request a
single
                // page.
                subscription.request(1);
            }

            @Override
            public void onNext(ListTablesResponse response) {
                response.tableNames().forEach(System.out::println);
                // After you process the current page, call the request method to
signal that
                // you are ready for next page.
                subscription.request(1);
            }

            @Override
            public void onError(Throwable t) {
                // Called when an error has occurred while processing the requests.
            }

            @Override
            public void onComplete() {
                // This indicates all the results are delivered and there are no more
pages
                // left.
            }
        });
```

Lihat contoh lengkapnya di GitHub.

### Gunakan **`Consumer`**

`SdkPublisher`Antarmuka yang `ListTablesPublisher` mengimplementasikan memiliki `subscribe` metode yang mengambil `Consumer` dan mengembalikan a`CompletableFuture<Void>`.

`subscribe`Metode dari antarmuka ini dapat digunakan untuk kasus penggunaan sederhana ketika overhead `org.reactivestreams.Subscriber` mungkin terlalu banyak. Karena kode di bawah ini menghabiskan setiap halaman, ia memanggil `tableNames` metode pada masing-masing halaman. `tableNames`Metode mengembalikan nama tabel DynamoDB yang diproses dengan metode. `java.util.List` `forEach`

```
        // Use a Consumer for simple use cases.
        CompletableFuture<Void> future = publisher.subscribe(
                response -> response.tableNames()
                        .forEach(System.out::println));
```

Lihat contoh lengkapnya di GitHub.

## Ulangi nama tabel

Contoh berikut menunjukkan cara untuk mengulangi objek yang dikembalikan dalam respons, bukan halaman respons. Mirip dengan contoh Amazon S3 sinkron yang sebelumnya ditampilkan dengan `contents` metodenya, kelas hasil asinkron DynamoDB`ListTablesPublisher`, memiliki `tableNames` metode kenyamanan untuk berinteraksi dengan koleksi item yang mendasarinya. Jenis pengembalian `tableNames` metode adalah `SdkPublisher`yang dapat digunakan untuk meminta item di semua halaman.

### Gunakan **`Subscriber`**

Kode berikut memperoleh koleksi `SdkPublisher` yang mendasari nama tabel.

```
        // Create a default client with credentials and region loaded from the
        // environment.
        final DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();

        ListTablesRequest listTablesRequest =
ListTablesRequest.builder().limit(3).build();
        ListTablesPublisher listTablesPublisher =
asyncClient.listTablesPaginator(listTablesRequest);
        SdkPublisher<String> publisher = listTablesPublisher.tableNames();
```

Kode berikut menggunakan implementasi anonim `org.reactivestreams.Subscriber` untuk memproses hasil untuk setiap halaman.

onNextMetode pelanggan memproses elemen individual dari koleksi. Dalam hal ini, itu adalah nama tabel. Setelah nama tabel diproses, nama tabel lain diminta dari penerbit. Metode ini dipanggil berulang kali sampai semua nama tabel diambil.

```
        // Use a Subscriber.
        publisher.subscribe(new Subscriber<String>() {
            private Subscription subscription;

            @Override
            public void onSubscribe(Subscription s) {
                subscription = s;
                subscription.request(1);
            }

            @Override
            public void onNext(String tableName) {
                System.out.println(tableName);
                subscription.request(1);
            }

            @Override
            public void onError(Throwable t) {
            }

            @Override
            public void onComplete() {
            }
        });
```

Lihat contoh lengkapnya di GitHub.

Gunakan **`Consumer`**

Contoh berikut menggunakan `subscribe` metode `SdkPublisher` yang membutuhkan a `Consumer` untuk memproses setiap item.

```
        // Use a Consumer.
        CompletableFuture<Void> future = publisher.subscribe(System.out::println);
        future.get();
```

Lihat contoh lengkapnya di GitHub.

### Gunakan pustaka pihak ketiga

Anda dapat menggunakan pustaka pihak ketiga lainnya alih-alih menerapkan pelanggan khusus. Contoh ini menunjukkan penggunaan RxJava, tetapi pustaka apa pun yang mengimplementasikan antarmuka aliran reaktif dapat digunakan. Lihat halaman RxJava wiki GitHub untuk informasi lebih lanjut tentang perpustakaan itu.

Untuk menggunakan perpustakaan, tambahkan sebagai dependensi. Jika menggunakan Maven, contoh menunjukkan cuplikan POM untuk digunakan.

Entri POM

```
<dependency>
      <groupId>io.reactivex.rxjava3</groupId>
      <artifactId>rxjava</artifactId>
      <version>3.1.6</version>
</dependency>
```

Kode

```
        DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create();
        ListTablesPublisher publisher =
 asyncClient.listTablesPaginator(ListTablesRequest.builder()
                .build());

        // The Flowable class has many helper methods that work with
        // an implementation of an org.reactivestreams.Publisher.
        List<String> tables = Flowable.fromPublisher(publisher)
                .flatMapIterable(ListTablesResponse::tableNames)
                .toList()
                .blockingGet();
        System.out.println(tables);
```

Lihat contoh lengkapnya di GitHub.

# Menggunakan pelayan di AWS SDK for Java 2.x

Utilitas pelayan dari AWS SDK untuk Java 2.x memungkinkan Anda untuk memvalidasi bahwa AWS sumber daya berada dalam keadaan tertentu sebelum melakukan operasi pada sumber daya tersebut.

Pelayan adalah abstraksi yang digunakan untuk polling AWS sumber daya, seperti DynamoDB tabel atau Amazon S3 ember, sampai keadaan yang diinginkan tercapai (atau sampai penentuan dibuat bahwa sumber daya tidak akan pernah mencapai keadaan yang diinginkan). Alih-alih menulis logika untuk terus polling AWS sumber daya Anda, yang dapat menjadi rumit dan rawan kesalahan, Anda dapat menggunakan pelayan untuk polling sumber daya dan membuat kode Anda terus berjalan setelah sumber daya siap.

## Prasyarat

Sebelum Anda dapat menggunakan pelayan dalam proyek dengan AWS SDK untuk Java, Anda harus menyelesaikan langkah-langkah dalam Menyiapkan 2.x. AWS SDK untuk Java

Anda juga harus mengonfigurasi dependensi proyek Anda (misalnya, di `build.gradle` file `pom.xml` atau Anda) untuk menggunakan versi `2.15.0` atau versi yang lebih baru. AWS SDK untuk Java

Contoh:

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version>2.27.21</version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
</project>
```

## Menggunakan pelayan

Untuk membuat instance objek pelayan, pertama buat klien layanan. Tetapkan `waiter()` metode klien layanan sebagai nilai objek pelayan. Setelah instance pelayan ada, atur opsi responsnya untuk mengeksekusi kode yang sesuai.

### Pemrograman sinkron

Cuplikan kode berikut menunjukkan cara menunggu DynamoDB tabel ada dan berada dalam status AKTIF.

```
DynamoDbClient dynamo = DynamoDbClient.create();
DynamoDbWaiter waiter = dynamo.waiter();

WaiterResponse<DescribeTableResponse> waiterResponse =
  waiter.waitUntilTableExists(r -> r.tableName("myTable"));

// print out the matched response with a tableStatus of ACTIVE
waiterResponse.matched().response().ifPresent(System.out::println);
```

### Pemrograman asinkron

Cuplikan kode berikut menunjukkan cara menunggu DynamoDB tabel tidak ada lagi.

```
DynamoDbAsyncClient asyncDynamo = DynamoDbAsyncClient.create();
DynamoDbAsyncWaiter asyncWaiter = asyncDynamo.waiter();

CompletableFuture<WaiterResponse<DescribeTableResponse>> waiterResponse =
          asyncWaiter.waitUntilTableNotExists(r -> r.tableName("myTable"));

waiterResponse.whenComplete((r, t) -> {
  if (t == null) {
   // print out the matched ResourceNotFoundException
   r.matched().exception().ifPresent(System.out::println);
  }
}).join();
```

## Konfigurasikan pelayan

Anda dapat menyesuaikan konfigurasi untuk pelayan dengan menggunakan `overrideConfiguration()` pada pembangunnya. Untuk beberapa operasi, Anda dapat menerapkan konfigurasi khusus saat Anda membuat permintaan.

### Konfigurasikan pelayan

Cuplikan kode berikut menunjukkan cara mengganti konfigurasi pada pelayan.

```
// sync
DynamoDbWaiter waiter =
   DynamoDbWaiter.builder()
          .overrideConfiguration(b -> b.maxAttempts(10))
          .client(dynamoDbClient)
          .build();
// async
DynamoDbAsyncWaiter asyncWaiter =
   DynamoDbAsyncWaiter.builder()
          .client(dynamoDbAsyncClient)
          .overrideConfiguration(o -> o.backoffStrategy(
               FixedDelayBackoffStrategy.create(Duration.ofSeconds(2))))
          .scheduledExecutorService(Executors.newScheduledThreadPool(3))
          .build();
```

### Ganti konfigurasi untuk permintaan tertentu

Cuplikan kode berikut menunjukkan cara mengganti konfigurasi untuk pelayan berdasarkan per-permintaan. Perhatikan bahwa hanya beberapa operasi yang memiliki konfigurasi yang dapat disesuaikan.

```
waiter.waitUntilTableNotExists(b -> b.tableName("myTable"),
               o -> o.maxAttempts(10));

asyncWaiter.waitUntilTableExists(b -> b.tableName("myTable"),
                 o -> o.waitTimeout(Duration.ofMinutes(1)));
```

## Contoh kode

Untuk contoh lengkap menggunakan pelayan dengan DynamoDB, lihat CreateTable.java di Repositori Contoh AWS Kode.

Untuk contoh lengkap menggunakan pelayan dengan Amazon S3, lihat S3 BucketOps .java di Repositori Contoh Kode. AWS

# Pemecahan masalah FAQs

Saat Anda menggunakan AWS SDK for Java 2.x dalam aplikasi Anda, Anda mungkin menemukan kesalahan runtime yang tercantum dalam topik ini. Gunakan saran di sini untuk membantu Anda mengungkap akar penyebab dan menyelesaikan kesalahan.

## Bagaimana cara memperbaiki kesalahan "`java.net.SocketException`: Pengaturan ulang koneksi” atau “server gagal menyelesaikan respons”?

Kesalahan penyetelan ulang koneksi menunjukkan bahwa host Anda Layanan AWS, pihak, atau pihak perantara (misalnya, gateway NAT, proxy, penyeimbang beban) menutup koneksi sebelum permintaan selesai. Karena ada banyak penyebab, menemukan solusi mengharuskan Anda tahu mengapa koneksi ditutup. Item berikut biasanya menyebabkan koneksi ditutup.

- Koneksi tidak aktif.Ini umum untuk operasi streaming, di mana data tidak ditulis ke atau dari kawat untuk jangka waktu tertentu, sehingga pihak perantara mendeteksi koneksi sebagai mati dan menutupnya. Untuk mencegah hal ini, pastikan aplikasi Anda secara aktif mengunduh atau mengunggah data.
- Anda telah menutup klien HTTP atau SDK. Pastikan untuk tidak menutup sumber daya saat sedang digunakan.
- Proxy yang salah dikonfigurasi. Cobalah untuk melewati proxy apa pun yang telah Anda konfigurasikan untuk melihat apakah itu memperbaiki masalah. Jika ini memperbaiki masalah, proxy menutup koneksi Anda karena alasan tertentu. Teliti proxy spesifik Anda untuk menentukan mengapa itu menutup koneksi.

Jika Anda tidak dapat mengidentifikasi masalah, coba jalankan dump TCP untuk koneksi yang terpengaruh di tepi klien jaringan Anda (misalnya, setelah proxy apa pun yang Anda kontrol).

Jika Anda melihat bahwa AWS titik akhir mengirim `TCP RST` (reset), hubungi layanan yang terpengaruh untuk melihat apakah mereka dapat menentukan mengapa reset terjadi. Bersiaplah untuk memberikan permintaan IDs dan stempel waktu kapan masalah terjadi. Tim AWS dukungan mungkin juga mendapat manfaat dari log kawat yang menunjukkan dengan tepat byte apa yang dikirim dan diterima aplikasi Anda dan kapan.

## Bagaimana cara memperbaiki “batas waktu koneksi”?

Kesalahan batas waktu koneksi menunjukkan bahwa host Anda, pihak Layanan AWS, atau pihak perantara (misalnya, gateway NAT, proxy, penyeimbang beban) gagal membuat koneksi baru dengan server dalam batas waktu koneksi yang dikonfigurasi. Item berikut menjelaskan penyebab umum masalah ini.

- Batas waktu koneksi yang dikonfigurasi terlalu rendah. Secara default, batas waktu koneksi adalah 2 detik di file. AWS SDK for Java 2.x Jika Anda mengatur batas waktu koneksi terlalu rendah, Anda

mungkin mendapatkan kesalahan ini. Batas waktu koneksi yang disarankan adalah 1 detik jika Anda hanya melakukan panggilan di wilayah dan 3 detik jika Anda membuat permintaan lintas wilayah.

- Proxy yang salah dikonfigurasi. Cobalah untuk melewati proxy apa pun yang Anda konfigurasikan untuk melihat apakah itu memperbaiki masalah. Jika ini memperbaiki masalah, proxy adalah alasan batas waktu koneksi. Teliti proxy spesifik Anda untuk menentukan mengapa hal itu terjadi

Jika Anda tidak dapat mengidentifikasi masalah, coba jalankan dump TCP untuk koneksi yang terpengaruh di tepi klien jaringan Anda (misalnya, setelah proxy apa pun yang Anda kontrol) untuk menyelidiki masalah jaringan apa pun.

## Bagaimana cara memperbaiki "`java.net.SocketTimeoutException`: Baca waktunya habis”?

Kesalahan waktu baca menunjukkan bahwa JVM berusaha membaca data dari sistem operasi yang mendasarinya, tetapi data tidak dikembalikan dalam waktu yang dikonfigurasi melalui SDK. Kesalahan ini dapat terjadi jika sistem operasi, pihak Layanan AWS, atau pihak perantara (misalnya, gateway NAT, proxy, penyeimbang beban) gagal mengirim data dalam waktu yang diharapkan oleh JVM. Karena ada banyak penyebab, menemukan solusi mengharuskan Anda tahu mengapa data tidak dikembalikan.


Coba jalankan dump TCP untuk koneksi yang terpengaruh di tepi klien jaringan Anda (misalnya, setelah proxy apa pun yang Anda kontrol).

Jika Anda melihat bahwa AWS titik akhir mengirim `TCP RST` (reset), hubungi layanan yang terpengaruh. Bersiaplah untuk memberikan permintaan IDs dan stempel waktu kapan masalah terjadi. Tim AWS dukungan mungkin juga mendapat manfaat dari log kawat yang menunjukkan dengan tepat byte apa yang dikirim dan diterima aplikasi Anda dan kapan.


## Bagaimana cara memperbaiki kesalahan “Tidak dapat menjalankan permintaan HTTP: Batas waktu menunggu koneksi dari kumpulan”?

Kesalahan ini menunjukkan bahwa permintaan tidak bisa mendapatkan koneksi dari pool dalam waktu maksimum yang ditentukan. Untuk mengatasi masalah ini, sebaiknya aktifkan metrik sisi klien SDK untuk memublikasikan metrik ke Amazon. CloudWatch Metrik HTTP dapat membantu mempersempit akar penyebabnya. Item berikut menjelaskan penyebab umum kesalahan ini.

- Kebocoran koneksi. Anda dapat menyelidiki ini dengan memeriksa`LeasedConcurrency`,`AvailableConcurrency`, dan `MaxConcurrency` metrik. Jika `LeasedConcurrency` meningkat hingga mencapai `MaxConcurrency` tetapi tidak pernah berkurang, mungkin ada kebocoran koneksi. Penyebab umum kebocoran adalah karena operasi streaming — seperti metode `getObject` S3 — tidak ditutup. Kami menyarankan agar aplikasi Anda membaca semua data dari aliran input sesegera mungkin dan menutup aliran input setelahnya. Bagan berikut menunjukkan seperti apa metrik SDK untuk kebocoran koneksi.

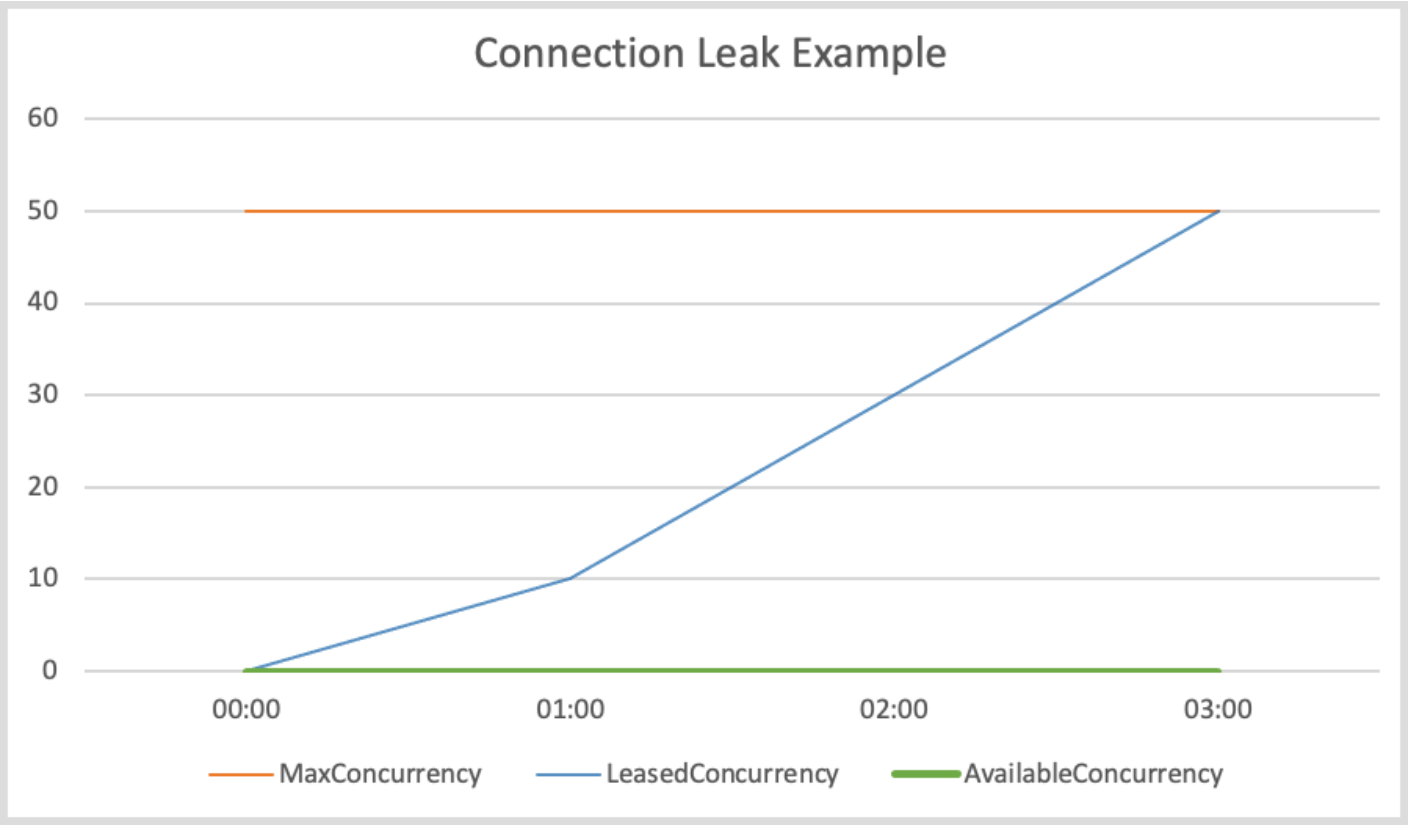


- Kelaparan kolam koneksi.Hal ini dapat terjadi jika tingkat permintaan Anda terlalu tinggi dan ukuran kumpulan koneksi yang telah dikonfigurasi tidak dapat memenuhi permintaan permintaan. Ukuran kumpulan koneksi default adalah 50, dan ketika koneksi di kolam mencapai maksimum, klien HTTP mengantri permintaan masuk hingga koneksi tersedia. Bagan berikut menunjukkan seperti apa metrik SDK untuk kelaparan kumpulan koneksi.

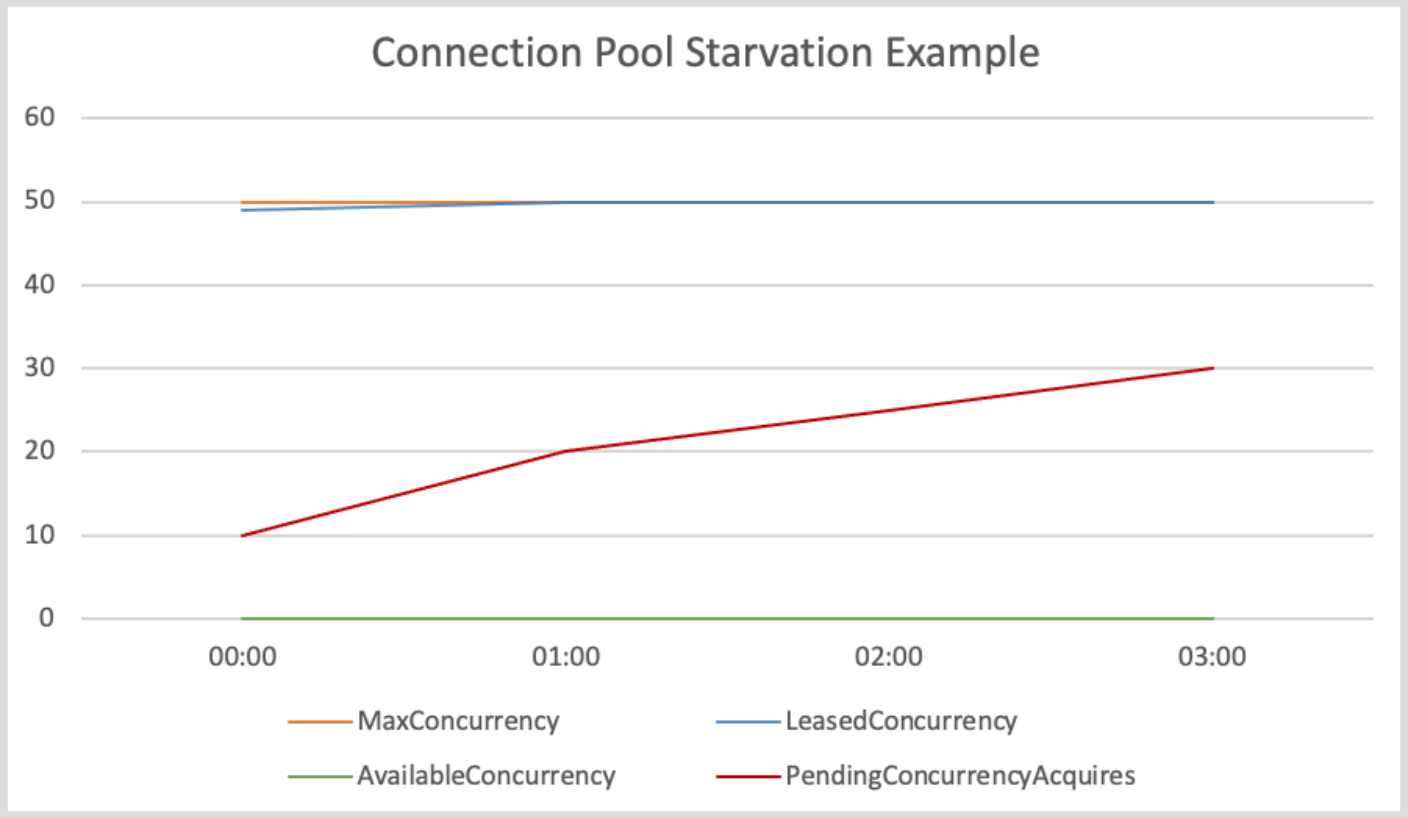


Untuk mengurangi masalah ini, pertimbangkan untuk mengambil salah satu tindakan berikut.


- Tingkatkan ukuran kolam koneksi,
- Tingkatkan batas waktu akuisisi.
- Memperlambat tingkat permintaan.

Dengan meningkatkan jumlah maksimum koneksi, throughput klien dapat meningkat (kecuali antarmuka jaringan sudah sepenuhnya digunakan). Namun, Anda akhirnya dapat menekan batasan sistem operasi pada jumlah deskriptor file yang digunakan oleh proses. Jika Anda sudah sepenuhnya menggunakan antarmuka jaringan Anda atau tidak dapat meningkatkan jumlah koneksi Anda lebih lanjut, coba tingkatkan batas waktu perolehan. Dengan peningkatan ini, Anda mendapatkan waktu ekstra untuk permintaan untuk mendapatkan koneksi sebelum waktu habis. Jika koneksi tidak bebas, permintaan berikutnya akan tetap batas waktu.

Jika Anda tidak dapat memperbaiki masalah dengan menggunakan dua mekanisme pertama, perlambat tingkat permintaan dengan mencoba opsi berikut.

- Menghaluskan permintaan Anda sehingga semburan lalu lintas yang besar tidak membebani klien.
- Lebih efisien dengan panggilan ke Layanan AWS.

  - Tingkatkan jumlah host yang mengirim permintaan.
- I/O Thread terlalu sibuk. Ini hanya berlaku jika Anda menggunakan klien SDK asinkron dengan. `NettyNioAsyncHttpClient` Jika `AvailableConcurrency` metriknya tidak rendah—menunjukkan bahwa koneksi tersedia di kolam—tetapi `ConcurrencyAcquireDuration` tinggi, itu mungkin karena I/O utas tidak dapat menangani permintaan. Pastikan Anda tidak lulus `Runnable:run` sebagai pelaksana penyelesaian masa depan dan melakukan tugas yang memakan waktu dalam rantai penyelesaian masa depan respons karena ini dapat memblokir I/O utas. Jika bukan itu masalahnya, pertimbangkan untuk menambah jumlah I/O utas dengan menggunakan `eventLoopGroupBuilder` metode ini. Sebagai referensi, jumlah default thread I/O untuk sebuah `NettyNioAsyncHttpClient` instance adalah dua kali jumlah core CPU host.
- Latensi jabat tangan TLS tinggi. Jika `AvailableConcurrency` metrik Anda mendekati 0 dan `LeasedConcurrency` lebih rendah dari`MaxConcurrency`, mungkin karena latensi jabat tangan TLS tinggi. Bagan berikut menunjukkan seperti apa metrik SDK untuk latensi jabat tangan TLS yang tinggi.

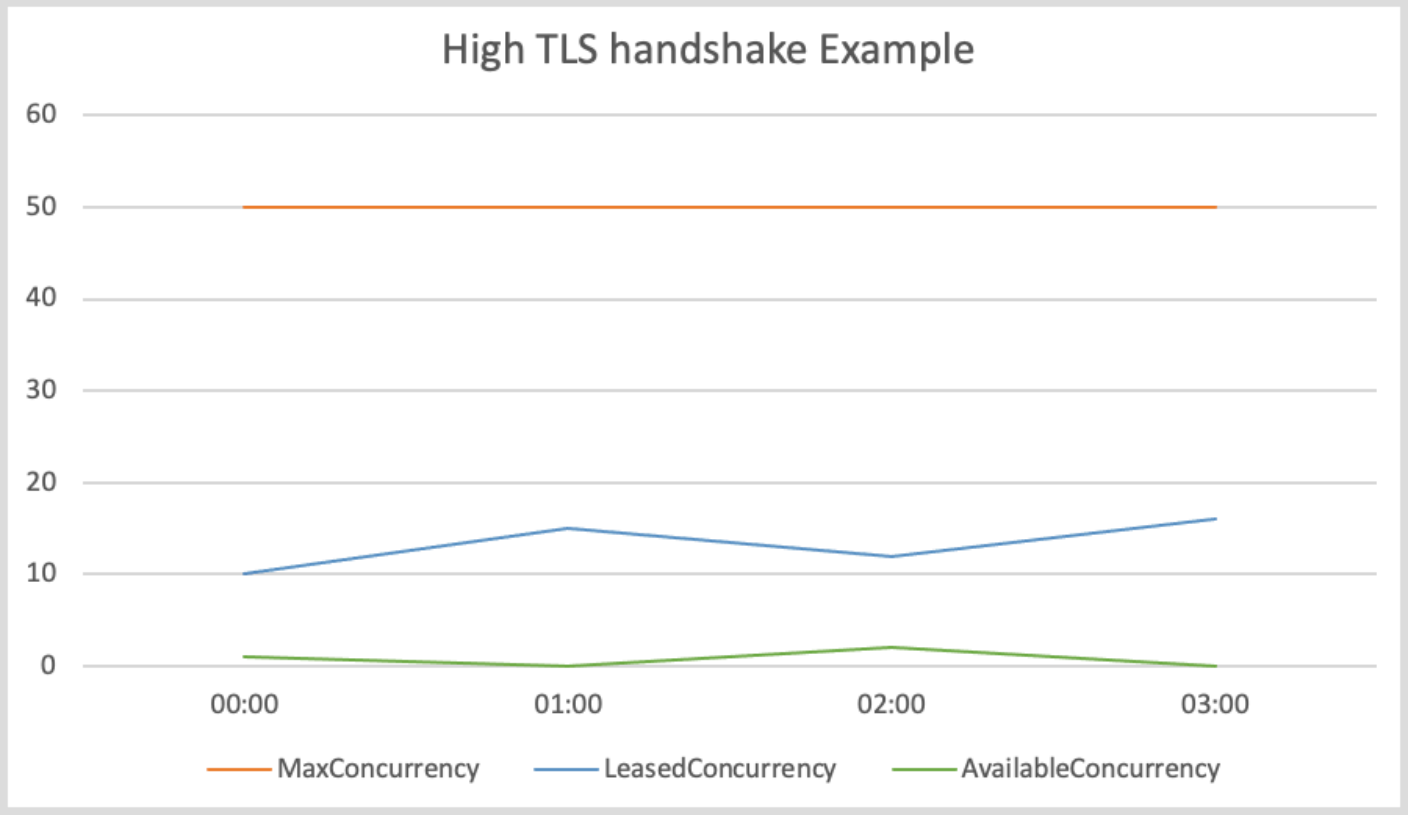


  Untuk klien HTTP yang ditawarkan oleh Java SDK yang tidak didasarkan pada CRT, coba aktifkan log TLS untuk memecahkan masalah TLS. Untuk klien HTTP AWS berbasis CRT, coba aktifkan AWS log CRT. Jika Anda melihat bahwa AWS titik akhir tampaknya membutuhkan waktu lama untuk melakukan jabat tangan TLS, Anda harus menghubungi layanan yang terpengaruh.

## Bagaimana cara memperbaiki`NoClassDefFoundError`, `NoSuchMethodError` atau`NoSuchFieldError`?

A `NoClassDefFoundError` menunjukkan bahwa kelas tidak dapat dimuat saat runtime. Dua penyebab paling umum untuk kesalahan ini adalah:

- kelas tidak ada di classpath karena JAR hilang atau versi JAR yang salah ada di classpath.
- kelas gagal memuat karena penginisialisasi statisnya memberikan pengecualian.

Demikian pula, `NoSuchMethodError` s dan `NoSuchFieldError` s biasanya dihasilkan dari versi JAR yang tidak cocok. Kami menyarankan Anda melakukan langkah-langkah berikut.

1. Periksa dependensi Anda untuk memastikan bahwa Anda menggunakan versi yang sama dari semua stoples SDK. Alasan paling umum bahwa kelas, metode, atau bidang tidak dapat ditemukan adalah ketika Anda meningkatkan ke versi klien baru tetapi Anda terus menggunakan versi ketergantungan SDK 'bersama' lama. Versi klien baru mungkin mencoba menggunakan kelas yang hanya ada di dependensi SDK 'bersama' yang lebih baru. Coba jalankan `mvn dependency:tree` atau `gradle dependencies` (untuk Gradle) untuk memverifikasi bahwa semua versi pustaka SDK cocok. Untuk menghindari masalah ini sepenuhnya di masa mendatang, sebaiknya gunakan BOM (Bill of Materials) untuk mengelola versi modul SDK.

   Contoh berikut menunjukkan contoh versi SDK campuran.

   ```
   [INFO] +- software.amazon.awssdk:dynamodb:jar:2.20.00:compile
   [INFO] |  +- software.amazon.awssdk:aws-core:jar:2.13.19:compile
   [INFO] +- software.amazon.awssdk:netty-nio-client:jar:2.20.00:compile
   ```

   Versi dynamodb adalah 2.20.00 dan versi 2.13.19`aws-core`. Versi `aws-core` artefak juga harus 2.20.00.
2. Periksa pernyataan di awal log Anda untuk melihat apakah kelas gagal dimuat karena kegagalan inisialisasi statis. Pertama kali kelas gagal memuat, mungkin ada pengecualian yang berbeda dan lebih berguna yang menentukan mengapa kelas tidak dapat dimuat. Pengecualian yang berpotensi berguna ini hanya terjadi sekali, jadi pernyataan log selanjutnya hanya akan melaporkan bahwa kelas tidak ditemukan.
3. Periksa proses penyebaran Anda untuk memastikan bahwa itu benar-benar menyebarkan file JAR yang diperlukan bersama dengan aplikasi Anda. Ada kemungkinan bahwa Anda sedang

membangun dengan versi yang benar, tetapi proses yang membuat classpath untuk aplikasi Anda tidak termasuk dependensi yang diperlukan.

## Bagaimana cara memperbaiki kesalahan "**`SignatureDoesNotMatch`**" atau “Tanda tangan permintaan yang kami hitung tidak cocok dengan tanda tangan yang Anda berikan”?

`SignatureDoesNotMatch`Kesalahan menunjukkan bahwa tanda tangan yang dihasilkan oleh AWS SDK untuk Java dan tanda tangan yang dihasilkan oleh Layanan AWS tidak cocok. Item berikut menjelaskan penyebab potensial.

- Pihak proxy atau perantara memodifikasi permintaan. Misalnya, proxy atau penyeimbang beban dapat mengubah header, path, atau string kueri yang ditandatangani oleh SDK.
- Layanan dan SDK berbeda dalam cara mereka menyandikan permintaan ketika masing-masing menghasilkan string untuk ditandatangani.

Untuk men-debug masalah ini, sebaiknya aktifkan logging debug untuk SDK. Cobalah untuk mereproduksi kesalahan dan temukan permintaan kanonik yang dihasilkan SDK. Di log, permintaan kanonik diberi label `AWS4 Canonical Request: ...` dan string yang akan ditandatangani diberi label. `AWS4 String to sign: ...`

Jika Anda tidak dapat mengaktifkan debugging—misalnya, karena hanya dapat direproduksi dalam produksi—tambahkan logika ke aplikasi Anda yang mencatat informasi tentang permintaan saat terjadi kesalahan. Anda kemudian dapat menggunakan informasi tersebut untuk mencoba mereplikasi kesalahan di luar produksi dalam pengujian integrasi dengan logging debug diaktifkan.

Setelah Anda mengumpulkan permintaan kanonik dan string untuk ditandatangani, bandingkan dengan spesifikasi AWS Signature Version 4 untuk menentukan apakah ada masalah dalam cara SDK menghasilkan string untuk ditandatangani. Jika ada yang salah, Anda dapat membuat laporan GitHub bug ke file AWS SDK untuk Java.

Jika tidak ada yang salah, Anda dapat membandingkan string SDK untuk ditandatangani dengan string untuk menandatangani bahwa beberapa Layanan AWS kembali sebagai bagian dari respons kegagalan (Amazon S3, misalnya). Jika ini tidak tersedia, Anda harus menghubungi layanan yang terpengaruh untuk melihat permintaan dan string kanonik apa yang akan ditandatangani yang dihasilkan untuk perbandingan. Perbandingan ini dapat membantu mengidentifikasi pihak perantara

yang mungkin telah memodifikasi permintaan atau menyandikan perbedaan antara layanan dan klien.

Untuk informasi latar belakang selengkapnya tentang permintaan penandatanganan, lihat Menandatangani permintaan AWS API di Panduan AWS Identity and Access Management Pengguna.

Example dari permintaan kanonik

```
PUT
/Example-Bucket/Example-Object
partNumber=19&uploadId=string
amz-sdk-invocation-id:f8c2799d-367c-f024-e8fa-6ad6d0a1afb9
amz-sdk-request:attempt=1; max=4
content-encoding:aws-chunked
content-length:51
content-type:application/octet-stream
host:xxxxx
x-amz-content-sha256:STREAMING-UNSIGNED-PAYLOAD-TRAILER
x-amz-date:20240308T034733Z
x-amz-decoded-content-length:10
x-amz-sdk-checksum-algorithm:CRC32
x-amz-trailer:x-amz-checksum-crc32
```

Example dari string untuk ditandatangani

```
AWS4-HMAC-SHA256
20240308T034435Z
20240308/us-east-1/s3/aws4_request
5f20a7604b1ef65dd89c333fd66736fdef9578d11a4f5d22d289597c387dc713
```

## Bagaimana cara memperbaiki kesalahan "`java.lang.IllegalStateException`: Connection pool shut down”?

Kesalahan ini menunjukkan kumpulan koneksi HTTP Apache yang mendasarinya ditutup. Item berikut menjelaskan penyebab potensial.

- Klien SDK ditutup sebelum waktunya.SDK hanya menutup kumpulan koneksi saat klien terkait ditutup. Pastikan untuk tidak menutup sumber daya saat sedang digunakan.
- A **`java.lang.Error`** dilemparkan. Kesalahan seperti `OutOfMemoryError` menyebabkan kolam koneksi HTTP Apache dimatikan. Periksa log Anda untuk jejak tumpukan kesalahan.

Juga tinjau kode Anda untuk tempat-tempat di mana ia menangkap `Throwable` s atau `Error` s tetapi menelan output yang mencegah kesalahan muncul ke permukaan. Jika kode Anda tidak melaporkan kesalahan, tulis ulang kode sehingga informasi dicatat. Informasi yang dicatat membantu menentukan akar penyebab kesalahan.

- Anda mencoba menggunakan penyedia kredensyal yang dikembalikan **`DefaultCredentialsProvider#create()`** setelah ditutup. `DefaultCredentialsProvider#create`mengembalikan instance tunggal, jadi jika ditutup dan kode Anda memanggil `resolveCredentials` metode, pengecualian dilemparkan setelah kredensi cache (atau token) kedaluwarsa.

  Periksa kode Anda untuk tempat-tempat di mana `DefaultCredentialsProvider` ditutup, seperti yang ditunjukkan pada contoh berikut.

  - Instance singleton ditutup dengan memanggil `DefaultCredentialsProvider#close().`

```
DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create(); // Singleton instance returned.
AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();

// Make calls to Layanan AWS.

defaultCredentialsProvider.close();  // Explicit close.

// Make calls to Layanan AWS.

// After the credentials expire, either of the following calls eventually results
 in a "Connection pool shut down" exception.
credentials = defaultCredentialsProvider.resolveCredentials();
// Or
credentials = DefaultCredentialsProvider.create().resolveCredentials();
```

  - Memanggil `DefaultCredentialsProvider#create()` dalam satu try-with-resources blok.

```
try (DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create()) {
    AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();

    // Make calls to Layanan AWS.

} // After the try-with-resources block exits, the singleton
 DefaultCredentialsProvider is closed.
```

```
// Make calls to Layanan AWS.

DefaultCredentialsProvider defaultCredentialsProvider =
 DefaultCredentialsProvider.create(); // The closed singleton instance is returned.
// If the credentials (or token) has expired, the following call results in the
 error.
AwsCredentials credentials = defaultCredentialsProvider.resolveCredentials();
```

Buat instance baru, non-singleton dengan memanggil `DefaultCredentialsProvider.builder().build()` jika kode Anda telah menutup instance tunggal dan Anda perlu menyelesaikan kredensialnya dengan menggunakan file. `DefaultCredentialsProvider`

## Bagaimana cara memperbaiki “Tidak dapat memuat kredensyal dari salah satu penyedia dalam rantai “? AwsCredentialsProviderChain

Kesalahan ini menunjukkan bahwa tidak AWS SDK for Java 2.x dapat menemukan AWS kredensyal yang valid melalui salah satu penyedia kredensi dalam rantai penyedia kredensyal default. SDK secara otomatis mencari kredensyal dalam urutan tertentu, dan kesalahan ini terjadi ketika semua penyedia dalam rantai gagal memberikan kredensyal yang valid.

Pesan kesalahan lengkap biasanya terlihat seperti ini (akhiran baris dan indentasi ditambahkan untuk meningkatkan keterbacaan):

```
Unable to load credentials from any of the providers in the chain
 AwsCredentialsProviderChain(
    credentialsProviders=[
        SystemPropertyCredentialsProvider(),
        EnvironmentVariableCredentialsProvider(),
        WebIdentityTokenCredentialsProvider(),
        ProfileCredentialsProvider(profileName=default,
 profileFile=ProfileFile(sections=[])),
        ContainerCredentialsProvider(),
        InstanceProfileCredentialsProvider()
    ]) : [
        SystemPropertyCredentialsProvider(): Unable to load credentials from system
 settings.
        Access key must be specified either via environment variable
 (AWS_ACCESS_KEY_ID)
        or system property (aws.accessKeyId).,
```

```
       EnvironmentVariableCredentialsProvider(): Unable to load credentials from
system settings.
       Access key must be specified either via environment variable
(AWS_ACCESS_KEY_ID)
       or system property (aws.accessKeyId).,

       WebIdentityTokenCredentialsProvider(): To use web identity tokens, the 'sts'
service module
       must be on the class path.,

       ProfileCredentialsProvider(profileName=default,
profileFile=ProfileFile(sections=[])):
       Profile file contained no credentials for profile 'default':
ProfileFile(sections=[]),

       ContainerCredentialsProvider(): Cannot fetch credentials from container -
neither
       AWS_CONTAINER_CREDENTIALS_FULL_URI or AWS_CONTAINER_CREDENTIALS_RELATIVE_URI
environment
       variables are set.,

       InstanceProfileCredentialsProvider(): Failed to load credentials from IMDS.]
```

## Penyebab dan solusi umum

Tinjau konfigurasi kredensyal Anda

Saat Anda menggunakan penyedia kredensyal default (dengan menelepon `ServiceClient.create()` tanpa mengonfigurasi kredensyal secara eksplisit), SDK akan mencari kredensyal dalam urutan tertentu. Tinjau cara kerja rantai penyedia kredensyal default untuk memahami sumber kredensyal mana yang diperiksa SDK dan dalam urutan apa.

Pastikan bahwa metode konfigurasi kredensyal yang ingin Anda gunakan diatur dengan benar di lingkungan Anda:

Untuk instans Amazon EC2

- Periksa peran IAM: Verifikasi bahwa peran IAM dilampirkan ke instance Anda.
- Kegagalan IMDS intermiten: Jika Anda mengalami kegagalan intermiten (biasanya berlangsung beberapa ratus milidetik), ini biasanya menunjukkan masalah jaringan sementara yang mencapai Layanan Metadata Instans (IMDS).

Solusi:

- Aktifkan pencatatan debug untuk menganalisis waktu dan frekuensi kegagalan
- Pertimbangkan untuk menerapkan logika coba lagi dalam aplikasi Anda untuk kegagalan terkait kredensyal
- Periksa masalah konektivitas jaringan antara instans Anda dan titik akhir IMDS

Untuk lingkungan kontainer

Konfirmasikan bahwa peran tugas (Amazon ECS) atau akun layanan (Amazon EKS) dikonfigurasi dan variabel lingkungan yang diperlukan disetel.

Untuk pengembangan lokal

Periksa apakah variabel lingkungan, file kredensyal, atau konfigurasi Pusat Identitas IAM sudah ada.

Untuk federasi identitas web

- Verifikasi konfigurasi: Verifikasi bahwa file token identitas web ada dan variabel lingkungan yang diperlukan dikonfigurasi.
- Ketergantungan modul STS yang hilang: Jika Anda melihat kesalahan`To use web identity tokens, the 'sts' service module must be on the class path`, Anda perlu menambahkan modul STS sebagai ketergantungan. Ini biasa terjadi saat menggunakan Amazon EKS Pod Identity atau otentikasi token identitas web lainnya.

  Solusi: Tambahkan modul STS ke dependensi proyek Anda:

  - ```
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>sts</artifactId>
    </dependency>
    ```

    Untuk beberapa layanan, Anda mungkin juga memerlukan `aws-query-protocol` ketergantungan:

    ```
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>aws-query-protocol</artifactId>
    </dependency>
    ```
    ```

Masalah konektivitas jaringan atau proxy

Jika Anda melihat `Connection refused` kesalahan dalam rantai penyedia kredensyal, ini biasanya menunjukkan masalah konektivitas jaringan saat SDK mencoba mencapai AWS titik akhir.

Solusi:

- Verifikasi konfigurasi proxy jika Anda menggunakan server proxy
- Periksa apakah jaringan Anda mengizinkan koneksi HTTPS keluar ke titik akhir AWS
- Aktifkan pencatatan debug untuk melihat upaya koneksi terperinci
- Uji konektivitas menggunakan alat seperti `curl` memverifikasi akses jaringan ke titik AWS akhir

# Kurangi waktu startup SDK untuk AWS Lambda

Salah satu tujuannya AWS SDK for Java 2.x adalah untuk mengurangi latensi startup untuk AWS Lambda fungsi. SDK berisi perubahan yang mengurangi waktu startup, yang dibahas di akhir topik ini.

Pertama, topik ini berfokus pada perubahan yang dapat Anda lakukan untuk mengurangi waktu mulai dingin. Ini termasuk membuat perubahan dalam struktur kode Anda dan dalam konfigurasi klien layanan.

## Gunakan klien HTTP AWS berbasis CRT

Untuk bekerja dengan AWS Lambda, kami merekomendasikan skenario `AwsCrtHttpClient`untuk sinkron dan `AwsCrtAsyncHttpClient`untuk skenario asinkron.

the section called “Konfigurasikan AWS klien HTTP berbasis CRT”Topik dalam panduan ini menjelaskan manfaat menggunakan klien HTTP, cara menambahkan ketergantungan, dan cara mengonfigurasi penggunaannya oleh klien layanan.

## Hapus dependensi klien HTTP yang tidak digunakan

Seiring dengan penggunaan eksplisit klien AWS berbasis CRT, Anda dapat menghapus klien HTTP lain yang dibawa SDK secara default. Waktu startup Lambda berkurang ketika lebih sedikit pustaka yang perlu dimuat, jadi Anda harus menghapus artefak yang tidak terpakai yang perlu dimuat JVM.

Cuplikan berikut dari `pom.xml` file Maven menunjukkan pengecualian klien HTTP berbasis Apache dan klien HTTP berbasis Netty. (Klien ini tidak diperlukan saat Anda menggunakan klien AWS

berbasis CRT.) Contoh ini mengecualikan artefak klien HTTP dari ketergantungan klien S3 dan menambahkan `aws-crt-client` artefak untuk memungkinkan akses ke klien HTTP berbasis CRT. AWS

```
<project>
    <properties>
        <aws.java.sdk.version>2.27.21</aws.java.sdk.version>
    <properties>
    <dependencyManagement>
        <dependencies>
            <dependency>
                <groupId>software.amazon.awssdk</groupId>
                <artifactId>bom</artifactId>
                <version>${aws.java.sdk.version}</version>
                <type>pom</type>
                <scope>import</scope>
            </dependency>
        </dependencies>
    </dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>aws-crt-client</artifactId>
        </dependency>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>s3</artifactId>
            <exclusions>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>netty-nio-client</artifactId>
                </exclusion>
                <exclusion>
                    <groupId>software.amazon.awssdk</groupId>
                    <artifactId>apache-client</artifactId>
                </exclusion>
            </exclusions>
        </dependency>
    </dependencies>
</project>
```

> **Note**
>
> Tambahkan `<exclusions>` elemen ke semua dependensi klien layanan di file Andapom.xml.

## Konfigurasikan klien layanan untuk memintas pencarian

### Tentukan wilayah

Saat Anda membuat klien layanan, panggil `region` metode pada pembuat klien layanan. Ini memintas proses pencarian Wilayah default SDK yang memeriksa beberapa tempat untuk informasi. Wilayah AWS

Untuk menjaga kode Lambda independen dari wilayah, gunakan kode berikut di dalam metode. `region` Kode ini mengakses variabel `AWS_REGION` lingkungan yang ditetapkan oleh wadah Lambda.

```
Region.of(System.getenv(SdkSystemSetting.AWS_REGION.environmentVariable()))
```

### Gunakan **`EnvironmentVariableCredentialProvider`**

Sama seperti perilaku pencarian default untuk informasi Wilayah, SDK mencari kredensional di beberapa tempat. Dengan menentukan `EnvironmentVariableCredentialProvider`kapan Anda membangun klien layanan, Anda menghemat waktu dalam proses pencarian SDK untuk kredensi.

> **Note**
>
> Menggunakan penyedia kredensi ini memungkinkan kode untuk digunakan dalam Lambda fungsi, tetapi mungkin tidak berfungsi pada Amazon EC2 atau sistem lain. Jika Anda berniat menggunakan Lambda SnapStart untuk Java di beberapa titik, Anda harus mengandalkan rantai penyedia kredensi default untuk mencari kredensil. Jika Anda menentukan`EnvironmentVariableCredentialsProvider`, pencarian kredensial awal berfungsi, tetapi ketika SnapStart diaktifkan, runtime Java menetapkan variabel lingkungan kredensi kontainer. Pada aktivasi, variabel lingkungan yang digunakan oleh variabel lingkungan kunci `EnvironmentVariableCredentialsProvider` akses — tidak tersedia untuk Java SDK.

Cuplikan kode berikut menunjukkan klien layanan S3 yang dikonfigurasi dengan tepat untuk digunakan di lingkungan Lambda.

```
S3Client s3Client = S3Client.builder()

 .region(Region.of(System.getenv(SdkSystemSetting.AWS_REGION.environmentVariable())))
    .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
    .httpClient(AwsCrtHttpClient.builder().build())
    .build();
```

## Inisialisasi klien SDK di luar penangan fungsi Lambda

Sebaiknya inisialisasi klien SDK di luar metode penangan Lambda. Dengan cara ini, jika konteks eksekusi digunakan kembali, inisialisasi klien layanan dapat dilewati. Dengan menggunakan kembali instance klien dan koneksinya, pemanggilan berikutnya dari metode handler terjadi lebih cepat.

Dalam contoh berikut, `S3Client` instance diinisialisasi dalam konstruktor menggunakan metode pabrik statis. Jika wadah yang dikelola oleh lingkungan Lambda digunakan kembali, instance yang diinisialisasi `S3Client` akan digunakan kembali.

```
public class App implements RequestHandler<Object, Object> {
    private final S3Client s3Client;

    public App() {
        s3Client = DependencyFactory.s3Client();
    }

    @Override
    public Object handle Request(final Object input, final Context context) {
         ListBucketResponse response = s3Client.listBuckets();
         // Process the response.
    }
}
```

## Minimalkan injeksi ketergantungan

Kerangka kerja injeksi ketergantungan (DI) mungkin membutuhkan waktu tambahan untuk menyelesaikan proses penyiapan. Mereka mungkin juga memerlukan dependensi tambahan, yang membutuhkan waktu untuk memuat.

Jika kerangka kerja DI diperlukan, kami sarankan menggunakan kerangka kerja DI ringan seperti Dagger.

## Gunakan penargetan Maven Archetype AWS Lambda

Tim AWS Java SDK telah mengembangkan template Maven Archetype untuk mem-bootstrap proyek Lambda dengan waktu startup minimal. Anda dapat membangun proyek Maven dari pola dasar dan mengetahui bahwa dependensi dikonfigurasi sesuai untuk lingkungan Lambda.

Untuk mempelajari lebih lanjut tentang arketipe dan bekerja melalui contoh penyebaran, lihat posting blog ini.

## Pertimbangkan Lambda SnapStart untuk Java

Jika persyaratan runtime Anda kompatibel, AWS tawarkan SnapStart Lambda untuk Java. Lambda SnapStart adalah solusi berbasis infrastruktur yang meningkatkan kinerja startup untuk fungsi Java. Saat Anda mempublikasikan versi baru suatu fungsi, Lambda SnapStart menginisialisasinya dan mengambil snapshot memori dan status disk yang tidak dapat diubah dan terenkripsi. SnapStart kemudian menyimpan snapshot untuk digunakan kembali.

## Perubahan versi 2.x yang memengaruhi waktu startup

Selain perubahan yang Anda buat pada kode Anda, SDK for Java versi 2.x mencakup tiga perubahan utama yang mengurangi waktu startup:

- Penggunaan jackson-jr, yang merupakan pustaka serialisasi yang meningkatkan waktu inisialisasi
- Penggunaan pustaka java.time untuk objek tanggal dan waktu, yang merupakan bagian dari JDK
- Penggunaan SLF4j untuk fasad penebangan

## Sumber daya tambahan

Panduan AWS Lambda Pengembang berisi bagian tentang praktik terbaik untuk mengembangkan fungsi Lambda yang tidak spesifik untuk Java.

Untuk contoh membangun aplikasi cloud-native di Java yang menggunakan AWS Lambda, lihat konten lokakarya ini. Optimalisasi kinerja diskusi lokakarya dan praktik terbaik lainnya.

Anda dapat mempertimbangkan untuk menggunakan gambar statis yang dikompilasi sebelumnya untuk mengurangi latensi startup. Misalnya, Anda dapat menggunakan SDK for Java 2.x dan Maven untuk membuat gambar asli GraalVM.

# Implementasikan **`ContentStreamProvider`** di AWS SDK for Java 2.x

`ContentStreamProvider`adalah abstraksi yang digunakan AWS SDK for Java 2.x untuk memungkinkan beberapa pembacaan data input. Topik ini menjelaskan cara menerapkan dengan `ContentStreamProvider` benar untuk aplikasi Anda.

SDK for Java 2.x menggunakan `ContentStreamProvider#newStream()` metode ini setiap kali perlu membaca seluruh aliran. Agar ini berfungsi untuk seluruh aliran, aliran yang dikembalikan harus selalu berada di awal konten dan harus berisi data yang sama.

Pada bagian berikut, kami menyediakan tiga pendekatan untuk bagaimana menerapkan perilaku ini dengan benar.

## Gunakan **`mark()`** dan **`reset()`**

Pada contoh di bawah ini, kita gunakan `mark(int)` dalam konstruktor sebelum membaca mulai untuk memastikan bahwa kita dapat mengatur ulang aliran kembali ke awal. Untuk setiap pemanggilan `newStream()` kami mengatur ulang aliran:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private InputStream contentStream;

    public MyContentStreamProvider(InputStream contentStream) {
        this.contentStream = contentStream;
        this.contentStream.mark(MAX_LEN);
    }

    @Override
    public InputStream newStream() {
        contentStream.reset();
        return contentStream;
    }
}
```

## Gunakan buffering jika **`mark()`** dan tidak **`reset()`** tersedia

Jika streaming Anda tidak mendukung `mark()` dan `reset()` secara langsung, Anda masih dapat menggunakan solusi yang ditunjukkan sebelumnya dengan terlebih dahulu membungkus aliran dalam`BufferedInputStream`:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private BufferedReader contentStream;

    public MyContentStreamProvider(InputStream contentStream) {
        this.contentStream = new BufferedInputStream(contentStream);
        this.contentStream.mark(MAX_LEN);
    }

    @Override
    public InputStream newStream() {
        contentStream.reset();
        return contentStream;
    }
}
```

## Buat aliran baru

Pendekatan yang lebih sederhana adalah dengan hanya mendapatkan aliran baru ke data Anda pada setiap pemanggilan dan menutup yang sebelumnya:

```
public class MyContentStreamProvider implements ContentStreamProvider {
    private InputStream contentStream;

    @Override
    public InputStream newStream() {
        if (contentStream != null) {
            contentStream.close();
        }
        contentStream = openStream();
        return contentStream;
    }
}
```

# Mengatur JVM TTL untuk pencarian nama DNS

Mesin virtual Java (JVM) menyimpan cache pencarian nama DNS. Ketika JVM menyelesaikan nama host ke alamat IP, itu menyimpan alamat IP untuk jangka waktu tertentu, yang dikenal sebagai (TTL). time-to-live

Karena AWS sumber daya menggunakan entri nama DNS yang terkadang berubah, kami sarankan Anda mengonfigurasi JVM Anda dengan nilai TTL 5 detik. Ini memastikan bahwa ketika alamat IP sumber daya berubah, aplikasi Anda akan dapat menerima dan menggunakan alamat IP baru sumber daya dengan meminta DNS.

Pada beberapa konfigurasi Java, TTL default JVM diatur sehingga tidak akan pernah menyegarkan entri DNS sampai JVM dimulai ulang. Jadi, jika alamat IP untuk AWS sumber daya berubah saat aplikasi Anda masih berjalan, itu tidak akan dapat menggunakan sumber daya itu sampai Anda secara manual me-restart JVM dan informasi IP cache di-refresh. Dalam hal ini, sangat penting untuk mengatur TTL JVM sehingga secara berkala akan menyegarkan informasi IP cache.

## Cara mengatur JVM TTL

Untuk memodifikasi TTL JVM, atur nilai properti keamanan networkaddress.cache.ttl, atur `networkaddress.cache.ttl` properti dalam file untuk Java 8 atau file untuk Java 11 atau lebih tinggi. `$JAVA_HOME/jre/lib/security/java.security` `$JAVA_HOME/conf/security/java.security`

Berikut ini adalah cuplikan dari `java.security` file yang menunjukkan cache TTL diatur ke 5 detik.

```
#
# This is the "master security properties file".
#
# An alternate java.security properties file may be specified
...
# The Java-level namelookup cache policy for successful lookups:
#
# any negative value: caching forever
# any positive value: the number of seconds to cache an address for
# zero: do not cache
...
networkaddress.cache.ttl=5
...
```

Semua aplikasi yang berjalan pada JVM diwakili oleh variabel `$JAVA_HOME` lingkungan menggunakan pengaturan ini.

# Bekerja dengan HTTP/2 di AWS SDK untuk Java

HTTP/2 adalah revisi besar dari protokol HTTP. Versi baru ini memiliki beberapa peningkatan untuk meningkatkan kinerja:

- Pengkodean data biner memberikan transfer data yang lebih efisien.
- Kompresi header mengurangi byte overhead yang diunduh oleh klien, membantu mendapatkan konten ke klien lebih cepat. Ini sangat berguna untuk klien seluler yang sudah dibatasi bandwidth.
- Komunikasi asinkron dua arah (multiplexing) memungkinkan beberapa permintaan dan pesan respons antara klien dan AWS berada dalam penerbangan pada saat yang sama melalui satu koneksi, bukan melalui beberapa koneksi, yang meningkatkan kinerja.

Pengembang yang memutakhirkan ke yang terbaru SDKs akan secara otomatis menggunakan HTTP/2 ketika didukung oleh layanan yang mereka kerjakan. Antarmuka pemrograman baru dengan mulus memanfaatkan fitur HTTP/2 dan menyediakan cara baru untuk membangun aplikasi.

Fitur AWS SDK untuk Java 2.x baru APIs untuk streaming acara yang mengimplementasikan protokol HTTP/2. Untuk contoh cara menggunakan yang baru ini APIs, lihat Bekerja dengan Kinesis.

# Menelepon Layanan AWS dari AWS SDK for Java 2.x

Bagian ini memberikan tutorial singkat dan panduan tentang cara bekerja dengan pilih Layanan AWS. Untuk kumpulan contoh lengkap, lihat bagian Contoh Kode.

Topik


- Bekerja dengan CloudWatch
- AWS layanan database dan AWS SDK for Java 2.x
- Bekerja dengan DynamoDB
- Bekerja dengan Amazon EC2
- Bekerja dengan IAM
- Bekerja dengan Kinesis
- Memanggil, membuat daftar, dan menghapus fungsi AWS Lambda
- Bekerja dengan Amazon S3
- Bekerja dengan Amazon Simple Notification Service
- Bekerja dengan Amazon Simple Queue Service
- Bekerja dengan Amazon Transcribe


## Bekerja dengan CloudWatch

Bagian ini memberikan contoh pemrograman Amazon CloudWatch dengan menggunakan AWS SDK untuk Java 2.x.

Amazon CloudWatch memantau sumber daya Amazon Web Services (AWS) Anda dan aplikasi yang Anda jalankan AWS secara real time. Anda dapat menggunakan CloudWatch untuk mengumpulkan dan melacak metrik, yang merupakan variabel yang dapat Anda ukur untuk sumber daya dan aplikasi Anda. CloudWatch alarm mengirim pemberitahuan atau secara otomatis membuat perubahan pada sumber daya yang Anda pantau berdasarkan aturan yang Anda tetapkan.

Contoh berikut hanya mencakup kode yang diperlukan untuk mendemonstrasikan setiap teknik. Kode contoh lengkap tersedia di GitHub. Dari sana, Anda dapat mengunduh satu file sumber atau mengkloning repositori secara lokal untuk mendapatkan semua contoh untuk dibangun dan dijalankan.

Topik

- Dapatkan metrik dari CloudWatch
- Publikasikan data metrik kustom ke CloudWatch
- Bekerja dengan CloudWatch alarm
- Gunakan CloudWatch Acara Amazon

# Dapatkan metrik dari CloudWatch

## Metrik daftar

Untuk membuat daftar CloudWatch metrik, buat ListMetricsRequestdan panggil `listMetrics` metode CloudWatchClient ini. Anda dapat menggunakan `ListMetricsRequest` untuk memfilter metrik yang dikembalikan berdasarkan namespace, nama metrik, atau dimensi.

> **Note**
>
> Daftar metrik dan dimensi yang diposting oleh AWS layanan dapat ditemukan dalam Referensi Amazon CloudWatch Metrik dan Dimensi di Amazon CloudWatch Panduan Pengguna.

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsRequest;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsResponse;
import software.amazon.awssdk.services.cloudwatch.model.Metric;
```

### Kode

```
    public static void listMets( CloudWatchClient cw, String namespace) {

        boolean done = false;
        String nextToken = null;

        try {
            while(!done) {
```

```
                ListMetricsResponse response;

                if (nextToken == null) {
                   ListMetricsRequest request = ListMetricsRequest.builder()
                        .namespace(namespace)
                        .build();

                 response = cw.listMetrics(request);
                } else {
                  ListMetricsRequest request = ListMetricsRequest.builder()
                        .namespace(namespace)
                        .nextToken(nextToken)
                        .build();

                response = cw.listMetrics(request);
            }

            for (Metric metric : response.metrics()) {
                System.out.printf(
                        "Retrieved metric %s", metric.metricName());
                System.out.println();
            }

            if(response.nextToken() == null) {
                done = true;
            } else {
                nextToken = response.nextToken();
            }
        }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Metrik dikembalikan dalam a ListMetricsResponsedengan memanggil `getMetrics` metodenya.

Hasilnya mungkin paged. Untuk mengambil kumpulan hasil berikutnya, panggil `nextToken` objek respons dan gunakan nilai token untuk membangun objek permintaan baru. Kemudian panggil `listMetrics` metode lagi dengan permintaan baru.

Lihat contoh lengkapnya di GitHub.

### Informasi selengkapnya

- ListMetricsdi Referensi Amazon CloudWatch API

## Publikasikan data metrik kustom ke CloudWatch

Sejumlah AWS layanan mempublikasikan metrik mereka sendiri di ruang nama yang dimulai dengan "AWS" Anda juga dapat mempublikasikan data metrik khusus menggunakan namespace Anda sendiri (asalkan tidak dimulai dengan ""). AWS

### Publikasikan data metrik kustom

Untuk mempublikasikan data metrik Anda sendiri, panggil `putMetricData` metode ini dengan file PutMetricDataRequest. CloudWatchClient `PutMetricDataRequest`Harus menyertakan namespace khusus yang akan digunakan untuk data, dan informasi tentang titik data itu sendiri dalam suatu MetricDatumobjek.

> **Note**
>
> Anda tidak dapat menentukan namespace yang dimulai dengan ""AWS. Ruang nama yang dimulai dengan "AWS" dicadangkan untuk digunakan oleh Amazon Web Services produk.

#### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.MetricDatum;
import software.amazon.awssdk.services.cloudwatch.model.StandardUnit;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricDataRequest;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import java.time.Instant;
import java.time.ZoneOffset;
import java.time.ZonedDateTime;
import java.time.format.DateTimeFormatter;
```

#### Kode

```
    public static void putMetData(CloudWatchClient cw, Double dataPoint ) {
```

```
        try {
            Dimension dimension = Dimension.builder()
                    .name("UNIQUE_PAGES")
                    .value("URLS")
                    .build();

            // Set an Instant object
            String time =
ZonedDateTime.now( ZoneOffset.UTC ).format( DateTimeFormatter.ISO_INSTANT );
            Instant instant = Instant.parse(time);

            MetricDatum datum = MetricDatum.builder()
                .metricName("PAGES_VISITED")
                .unit(StandardUnit.NONE)
                .value(dataPoint)
                .timestamp(instant)
                .dimensions(dimension).build();

            PutMetricDataRequest request = PutMetricDataRequest.builder()
                .namespace("SITE/TRAFFIC")
                .metricData(datum).build();

            cw.putMetricData(request);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Successfully put data point %f", dataPoint);
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi selengkapnya

- Gunakan Amazon CloudWatch Metrik di Panduan Amazon CloudWatch Pengguna.
- AWS Ruang nama di Amazon CloudWatch Panduan Pengguna.
- PutMetricDatadi Referensi Amazon CloudWatch API.

# Bekerja dengan CloudWatch alarm

## Membuat alarm

Untuk membuat alarm berdasarkan CloudWatch metrik, panggil `putMetricAlarm` metode dengan PutMetricAlarmRequestdiisi dengan kondisi alarm. CloudWatchClient

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricAlarmRequest;
import software.amazon.awssdk.services.cloudwatch.model.ComparisonOperator;
import software.amazon.awssdk.services.cloudwatch.model.Statistic;
import software.amazon.awssdk.services.cloudwatch.model.StandardUnit;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
```

### Kode

```
   public static void putMetricAlarm(CloudWatchClient cw, String alarmName, String
instanceId) {

       try {
           Dimension dimension = Dimension.builder()
               .name("InstanceId")
               .value(instanceId).build();

           PutMetricAlarmRequest request = PutMetricAlarmRequest.builder()
               .alarmName(alarmName)
               .comparisonOperator(
                       ComparisonOperator.GREATER_THAN_THRESHOLD)
               .evaluationPeriods(1)
               .metricName("CPUUtilization")
               .namespace("AWS/EC2")
               .period(60)
               .statistic(Statistic.AVERAGE)
               .threshold(70.0)
               .actionsEnabled(false)
               .alarmDescription(
                       "Alarm when server CPU utilization exceeds 70%")
               .unit(StandardUnit.SECONDS)
               .dimensions(dimension)
```

```
                .build();

            cw.putMetricAlarm(request);
            System.out.printf(
                    "Successfully created alarm with name %s", alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar alarm

Untuk membuat daftar CloudWatch alarm yang telah Anda buat, panggil `describeAlarms` metode ini dengan DescribeAlarmsRequestyang dapat Anda gunakan untuk mengatur opsi untuk hasilnya. CloudWatchClient

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DescribeAlarmsRequest;
import software.amazon.awssdk.services.cloudwatch.model.DescribeAlarmsResponse;
import software.amazon.awssdk.services.cloudwatch.model.MetricAlarm;
```

Kode

```
    public static void desCWAlarms( CloudWatchClient cw) {

        try {

            boolean done = false;
            String newToken = null;

            while(!done) {
                DescribeAlarmsResponse response;

                if (newToken == null) {
```

```
                    DescribeAlarmsRequest request =
DescribeAlarmsRequest.builder().build();
                    response = cw.describeAlarms(request);
                } else {
                    DescribeAlarmsRequest request = DescribeAlarmsRequest.builder()
                        .nextToken(newToken)
                        .build();
                    response = cw.describeAlarms(request);
                }

                for(MetricAlarm alarm : response.metricAlarms()) {
                    System.out.printf("\n Retrieved alarm %s", alarm.alarmName());
                }

                if(response.nextToken() == null) {
                    done = true;
                } else {
                    newToken = response.nextToken();
                }
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Done");
    }
```

Daftar alarm dapat diperoleh dengan memanggil `MetricAlarms` DescribeAlarmsResponseyang dikembalikan olehdescribeAlarms.

Hasilnya mungkin paged. Untuk mengambil kumpulan hasil berikutnya, panggil `nextToken` objek respons dan gunakan nilai token untuk membangun objek permintaan baru. Kemudian panggil `describeAlarms` metode lagi dengan permintaan baru.

> **Note**
>
> Anda juga dapat mengambil alarm untuk metrik tertentu dengan menggunakan metode ini CloudWatchClient. `describeAlarmsForMetric` Penggunaannya mirip dengandescribeAlarms.

Lihat contoh lengkapnya di GitHub.

## Menghapus alarm

Untuk menghapus CloudWatch alarm, panggil `deleteAlarms` metode dengan DeleteAlarmsRequestberisi satu atau beberapa nama alarm yang ingin Anda hapus. CloudWatchClient

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DeleteAlarmsRequest;
```

Kode

```
    public static void deleteCWAlarm(CloudWatchClient cw, String alarmName) {

        try {
            DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
                    .alarmNames(alarmName)
                    .build();

            cw.deleteAlarms(request);
            System.out.printf("Successfully deleted alarm %s", alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi selengkapnya

- Menggunakan Amazon CloudWatch alarm di Amazon CloudWatch Panduan Pengguna
- PutMetricAlarmdi Referensi Amazon CloudWatch API
- DescribeAlarmsdi Referensi Amazon CloudWatch API

- DeleteAlarmsdi Referensi Amazon CloudWatch API

## Gunakan CloudWatch Acara Amazon

CloudWatch Acara memberikan aliran peristiwa sistem yang mendekati real-time yang menggambarkan perubahan AWS sumber daya ke Amazon EC2 instance, Lambda fungsi, Kinesis aliran, Amazon ECS tugas, mesin Step Functions status, Amazon SNS topik, Amazon SQS antrian, atau target bawaan. Anda dapat mencocokkan acara dan meruteknya ke satu atau beberapa fungsi atau aliran target dengan menggunakan aturan sederhana.

Amazon EventBridge adalah evolusi dari CloudWatch Peristiwa. Kedua layanan menggunakan API yang sama, sehingga Anda dapat terus menggunakan klien CloudWatch Acara yang disediakan oleh SDK atau bermigrasi ke fungsionalitas SDK untuk EventBridge klien Java untuk CloudWatch Acara. CloudWatch Dokumentasi Panduan Pengguna Acara dan referensi API sekarang tersedia melalui situs EventBridge dokumentasi.

### Tambahkan acara

Untuk menambahkan CloudWatch peristiwa khusus, panggil `CloudWatchEventsClient's` `putEvents` metode dengan `PutEventsRequest`objek yang berisi satu atau beberapa `PutEventsRequestEntry`objek yang memberikan detail tentang setiap peristiwa. Anda dapat menentukan beberapa parameter untuk entri seperti sumber dan jenis acara, sumber daya yang terkait dengan acara, dan sebagainya.

> **Note**
>
> Anda dapat menentukan maksimum 10 acara per panggilan ke`putEvents`.

Impor

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequestEntry;
```

Kode

```
    public static void putCWEvents(CloudWatchEventsClient cwe, String resourceArn ) {
```

```
        try {

            final String EVENT_DETAILS =
                "{ \"key1\": \"value1\", \"key2\": \"value2\" }";

            PutEventsRequestEntry requestEntry = PutEventsRequestEntry.builder()
                    .detail(EVENT_DETAILS)
                    .detailType("sampleSubmitted")
                    .resources(resourceArn)
                    .source("aws-sdk-java-cloudwatch-example")
                    .build();

            PutEventsRequest request = PutEventsRequest.builder()
                    .entries(requestEntry)
                    .build();

            cwe.putEvents(request);
            System.out.println("Successfully put CloudWatch event");

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Tambahkan aturan

Untuk membuat atau memperbarui aturan, panggil `CloudWatchEventsClient's putRule` metode `PutRuleRequest`dengan nama aturan dan parameter opsional seperti pola acara, IAM peran untuk dikaitkan dengan aturan, dan ekspresi penjadwalan yang menjelaskan seberapa sering aturan dijalankan.

Impor

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleResponse;
import software.amazon.awssdk.services.cloudwatchevents.model.RuleState;
```

Kode

```
   public static void putCWRule(CloudWatchEventsClient cwe, String ruleName, String
roleArn) {

       try {
           PutRuleRequest request = PutRuleRequest.builder()
               .name(ruleName)
               .roleArn(roleArn)
               .scheduleExpression("rate(5 minutes)")
               .state(RuleState.ENABLED)
               .build();

           PutRuleResponse response = cwe.putRule(request);
           System.out.printf(
                   "Successfully created CloudWatch events rule %s with arn %s",
                   roleArn, response.ruleArn());
       } catch (
           CloudWatchException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Lihat contoh lengkapnya di GitHub.

## Menambahkan target

Target adalah sumber daya yang dipanggil ketika suatu aturan dipicu. Contoh target termasuk Amazon EC2 instance, Lambda fungsi, Kinesis aliran, Amazon ECS tugas, mesin Step Functions status, dan target bawaan.

Untuk menambahkan target ke aturan, panggil `CloudWatchEventsClient’s putTargets` metode dengan `PutTargetsRequest`berisi aturan untuk diperbarui dan daftar target untuk ditambahkan ke aturan.

Impor

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsResponse;
```

```
import software.amazon.awssdk.services.cloudwatchevents.model.Target;
```

Kode

```
   public static void putCWTargets(CloudWatchEventsClient cwe, String ruleName, String
functionArn, String targetId ) {

       try {
           Target target = Target.builder()
               .arn(functionArn)
               .id(targetId)
               .build();

           PutTargetsRequest request = PutTargetsRequest.builder()
               .targets(target)
               .rule(ruleName)
               .build();

           PutTargetsResponse response = cwe.putTargets(request);
           System.out.printf(
               "Successfully created CloudWatch events target for rule %s",
               ruleName);
       } catch (CloudWatchException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Lihat contoh lengkapnya di GitHub.

## Informasi selengkapnya

- Menambahkan Acara dengan PutEvents di Panduan EventBridge Pengguna Amazon
- Ekspresi Jadwal untuk Aturan di Panduan EventBridge Pengguna Amazon
- Jenis Acara untuk CloudWatch Events di Panduan EventBridge Pengguna Amazon
- Pola Acara di Panduan EventBridge Pengguna Amazon
- PutEventsdi Referensi EventBridge API Amazon
- PutTargetsdi Referensi EventBridge API Amazon
- PutRuledi Referensi EventBridge API Amazon

# AWS layanan database dan AWS SDK for Java 2.x

AWS menawarkan beberapa jenis database: relasional, key-value, in-memory, document, dan beberapa lainnya. Dukungan SDK for Java 2.x bervariasi tergantung sifat layanan database di. AWS

Beberapa layanan database, misalnya layanan Amazon DynamoDB, memiliki APIs layanan web untuk mengelola AWS sumber daya (database) serta APIs layanan web untuk berinteraksi dengan data. Dalam SDK for Java 2.x jenis layanan ini memiliki klien layanan khusus, misalnya Dynamo. DBClient

Layanan database lainnya memiliki layanan web APIs yang berinteraksi dengan sumber daya, seperti Amazon DocumentDB API (untuk cluster, instance dan manajemen sumber daya), tetapi tidak memiliki API layanan web untuk bekerja dengan data. SDK for Java 2.x memiliki antarmuka yang DocDbClientsesuai untuk bekerja dengan sumber daya. Namun, Anda memerlukan API Java lain, seperti MongoDB untuk Java untuk bekerja dengan data.

Gunakan contoh di bawah ini untuk mempelajari cara Anda menggunakan klien layanan SDK for Java 2.x dengan berbagai jenis database.

## Contoh Amazon DynamoDB

| Bekerja dengan data | Bekerja dengan database |
| --- | --- |
| Klien layanan SDK: DynamoDbClient | Klien layanan SDK: DynamoDbClient |
| Contoh: Aplikasi React/Spring REST menggunakan DynamoDB | Contoh: CreateTable, ListTables, DeleteTable |
| Contoh: Beberapa contoh DynamoDB | |
| Klien layanan SDK: DynamoDbEnhancedClient | |
| Contoh: Aplikasi React/Spring REST menggunakan DynamoDB | |
| Contoh: Beberapa contoh DynamoDB (nama dimulai dengan 'Enhanced”) | |

Lihat contoh DynamoDB tambahan di bagian contoh kode terpandu dari panduan ini.

## Contoh-contoh Amazon RDS

| Bekerja dengan data | Bekerja dengan database |
| --- | --- |
| API non-SDK: JDBC, ragam SQL khusus database; kode Anda mengelola koneksi database atau kumpulan koneksi. | Klien layanan SDK: RdsClient |
| Contoh: Aplikasi React/Spring REST menggunakan MySQL | Contoh: Beberapa RdsClient contoh |

## Contoh Amazon Redshift

| Bekerja dengan data | Bekerja dengan database |
| --- | --- |
| Klien layanan SDK: RedshiftDataClient | Klien layanan SDK: RedshiftClient |
| Contoh: Beberapa RedshiftDataClient contoh | Contoh: Beberapa RedshiftClient contoh |
| Contoh: Aplikasi React/Spring REST menggunakan RedshiftDataClient | |

## Contoh Amazon Aurora Tanpa Server v2

| Bekerja dengan data | Bekerja dengan database |
| --- | --- |
| Klien layanan SDK: RdsDataClient | Klien layanan SDK: RdsClient |
| Contoh: Aplikasi React/Spring REST menggunakan RdsDataClient | Contoh: Beberapa RdsClient contoh |

## Contoh Amazon DocumentDB

| Bekerja dengan data | Bekerja dengan database |
| --- | --- |
| Non-SDK API: pustaka Java khusus MongoDB (misalnya MongoDB untuk Java); kode Anda mengelola koneksi database atau kumpulan koneksi. | Klien layanan SDK: DocDbClient |
| Contoh: Panduan Pengembang DocumentDB (Mongo) (pilih tab 'Java') | |

# Bekerja dengan DynamoDB

DynamoDB adalah layanan database NoSQL yang dikelola sepenuhnya yang memberikan kinerja yang cepat dan dapat diprediksi dengan skalabilitas yang mulus. Bagian ini menunjukkan cara bekerja dengan DynamoDB menggunakan 2.x. AWS SDK untuk Java

## Pilih klien DynamoDB Anda

SDK menyediakan dua pendekatan utama untuk bekerja dengan DynamoDB:

Klien tingkat rendah () `DynamoDbClient`

> Menyediakan akses langsung ke operasi DynamoDB dengan kontrol penuh atas permintaan dan tanggapan. Gunakan klien ini ketika Anda membutuhkan kontrol halus atau bekerja dengan skema dinamis.

Klien yang disempurnakan (`DynamoDbEnhancedClient`)

> Menawarkan pemrograman berorientasi objek dengan pemetaan otomatis antara objek Java dan item DynamoDB. Juga menyediakan kemampuan berorientasi dokumen untuk bekerja dengan data seperti JSON yang tidak mengikuti skema tetap. Gunakan klien ini saat bekerja dengan model data yang terdefinisi dengan baik atau data tipe dokumen.

# Konfigurasikan klien DynamoDB

Sebelum bekerja dengan DynamoDB, konfigurasikan klien Anda untuk kinerja dan keandalan yang optimal.

## Memahami perilaku coba lagi DynamoDB

Klien DynamoDB menggunakan hitungan coba ulang maksimum default 8, yang lebih tinggi dari klien lain. Layanan AWS Jumlah percobaan ulang yang lebih tinggi ini membantu menangani sifat terdistribusi DynamoDB dan batasan kapasitas sementara. Untuk informasi lebih lanjut tentang strategi coba lagi, lihatthe section called “Percobaan ulang”.

## Optimalkan kinerja dengan titik akhir berbasis akun

DynamoDB AWS menawarkan endpoint berbasis akun yang meningkatkan kinerja dengan menggunakan ID akun AWS Anda untuk merampingkan perutean permintaan.

Untuk menggunakan fitur ini, Anda memerlukan versi 2.28.4 atau yang lebih besar dari. AWS SDK for Java 2.x Anda dapat menemukan versi terbaru di repositori pusat Maven. Versi SDK yang didukung secara otomatis menggunakan titik akhir baru.

Untuk memilih keluar dari perutean berbasis akun, pilih salah satu opsi berikut:

- Konfigurasikan klien `AccountIdEndpointMode` layanan DynamoDB dengan set ke. `DISABLED`
- Tetapkan variabel lingkungan.
- Mengatur properti sistem JVM.
- Perbarui setelan file AWS konfigurasi bersama.

Contoh berikut menunjukkan cara menonaktifkan routing berbasis akun dengan mengkonfigurasi klien layanan DynamoDB:

```
DynamoDbClient.builder()
                .accountIdEndpointMode(AccountIdEndpointMode.DISABLED)
                .build();
```

Untuk informasi selengkapnya tentang opsi konfigurasi lainnya, lihat Titik akhir berbasis akun di Panduan Referensi Alat AWS SDKs dan Alat.

## Apa yang dibahas dalam topik ini

Bagian berikut menunjukkan cara bekerja dengan DynamoDB:

- the section called “Bekerja dengan tabel di DynamoDB”- Buat, jelaskan, perbarui, dan hapus tabel
- the section called “Bekerja dengan item di DynamoDB”- Tambahkan, ambil, dan perbarui item individual
- the section called “ Peta objek ke item DynamoDB”- Gunakan pemetaan objek dan data berorientasi dokumen dengan Klien yang Ditingkatkan

Untuk contoh kode DynamoDB tambahan, lihat contoh kode DynamoDB di Pustaka Contoh Kode. AWS

## Bekerja dengan tabel di DynamoDB

Tabel adalah wadah untuk semua item dalam DynamoDB database. Sebelum Anda dapat menambah atau menghapus data dari DynamoDB, Anda harus membuat tabel.

Untuk setiap tabel, Anda harus mendefinisikan:

- Nama tabel yang unik untuk akun dan Wilayah Anda.
- Kunci utama yang setiap nilainya harus unik; tidak ada dua item dalam tabel Anda yang dapat memiliki nilai kunci primer yang sama.

  Kunci primer bisa sederhana, terdiri dari kunci partisi tunggal (HASH), atau komposit, yang terdiri dari partisi dan kunci sort (RANGE).

  Setiap nilai kunci memiliki tipe data terkait, disebutkan oleh kelas. `ScalarAttributeType` Nilai kunci dapat berupa biner (B), numerik (N), atau string (S). Untuk informasi selengkapnya, lihat Aturan Penamaan dan Jenis Data di Panduan Amazon DynamoDB Pengembang.
- Throughput yang disediakan adalah nilai yang menentukan jumlah unit kapasitas baca/tulis yang dicadangkan untuk tabel.

> **Note**
>
> Amazon DynamoDB Penetapan harga didasarkan pada nilai throughput yang disediakan yang Anda tetapkan pada tabel Anda, jadi cadangkan hanya kapasitas sebanyak yang Anda pikir Anda perlukan untuk tabel Anda.

Throughput yang disediakan untuk tabel dapat dimodifikasi kapan saja, sehingga Anda dapat menyesuaikan kapasitas saat kebutuhan Anda berubah.

## Membuat tabel

Gunakan `DynamoDbClient's createTable` metode ini untuk membuat DynamoDB tabel baru. Anda perlu membangun atribut tabel dan skema tabel, yang keduanya digunakan untuk mengidentifikasi kunci utama tabel Anda. Anda juga harus menyediakan nilai throughput awal yang disediakan dan nama tabel.

> **Note**
>
> Jika tabel dengan nama yang Anda pilih sudah ada, a `DynamoDbException` dilemparkan.

### Buat tabel dengan kunci primer sederhana

Kode ini membuat tabel dengan satu atribut yang merupakan kunci utama sederhana tabel. contoh menggunakan `AttributeDefinition` dan `KeySchemaElement` objek untuk. `CreateTableRequest`

Impor

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;
```

## Kode

```
   public static String createTable(DynamoDbClient ddb, String tableName, String key)
{

       DynamoDbWaiter dbWaiter = ddb.waiter();
       CreateTableRequest request = CreateTableRequest.builder()
               .attributeDefinitions(AttributeDefinition.builder()
                       .attributeName(key)
                       .attributeType(ScalarAttributeType.S)
                       .build())
               .keySchema(KeySchemaElement.builder()
                       .attributeName(key)
                       .keyType(KeyType.HASH)
                       .build())
               .provisionedThroughput(ProvisionedThroughput.builder()
                       .readCapacityUnits(new Long(10))
                       .writeCapacityUnits(new Long(10))
                       .build())
               .tableName(tableName)
               .build();

       String newTable ="";
       try {
           CreateTableResponse response = ddb.createTable(request);
           DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                   .tableName(tableName)
                   .build();

           // Wait until the Amazon DynamoDB table is created
           WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
           waiterResponse.matched().response().ifPresent(System.out::println);

           newTable = response.tableDescription().tableName();
           return newTable;

       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
      return "";
   }
```

Lihat contoh lengkapnya di GitHub.

Buat tabel dengan kunci primer komposit

Contoh berikut membuat tabel dengan dua atribut. Kedua atribut digunakan untuk kunci primer komposit.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
```

Kode

```
    public static String createTableComKey(DynamoDbClient ddb, String tableName) {
        CreateTableRequest request = CreateTableRequest.builder()
                .attributeDefinitions(
                        AttributeDefinition.builder()
                                .attributeName("Language")
                                .attributeType(ScalarAttributeType.S)
                                .build(),
                        AttributeDefinition.builder()
                                .attributeName("Greeting")
                                .attributeType(ScalarAttributeType.S)
                                .build())
                .keySchema(
                        KeySchemaElement.builder()
                                .attributeName("Language")
                                .keyType(KeyType.HASH)
                                .build(),
                        KeySchemaElement.builder()
                                .attributeName("Greeting")
                                .keyType(KeyType.RANGE)
                                .build())
                .provisionedThroughput(
```

```
                        ProvisionedThroughput.builder()
                                .readCapacityUnits(new Long(10))
                                .writeCapacityUnits(new Long(10)).build())
                .tableName(tableName)
                .build();

        String tableId = "";

        try {
             CreateTableResponse result = ddb.createTable(request);
             tableId = result.tableDescription().tableId();
             return tableId;
         } catch (DynamoDbException e) {
             System.err.println(e.getMessage());
             System.exit(1);
         }
        return "";
    }
```

Lihat contoh lengkapnya di GitHub.

## Mencantumkan tabel

Anda dapat membuat daftar tabel di Wilayah tertentu dengan memanggil `DynamoDbClient's listTables` metode.

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan Wilayah Anda, a `ResourceNotFoundException`dilemparkan.

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.List;
```

### Kode

```
    public static void listAllTables(DynamoDbClient ddb){

        boolean moreTables = true;
        String lastName = null;

        while(moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();

                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }
            } catch (DynamoDbException e) {
                System.err.println(e.getMessage());
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
```

Secara default, hingga 100 tabel dikembalikan per panggilan—gunakan `lastEvaluatedTableName` pada [ListTablesResponse](#)objek yang dikembalikan untuk

mendapatkan tabel terakhir yang dievaluasi. Anda dapat menggunakan nilai ini untuk memulai daftar setelah nilai terakhir yang dikembalikan dari daftar sebelumnya.

Lihat contoh lengkapnya di GitHub.

## Jelaskan (dapatkan informasi tentang) tabel

Gunakan `DynamoDbClient's describeTable` metode ini untuk mendapatkan informasi tentang tabel.

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan Wilayah Anda, a `ResourceNotFoundException`dilemparkan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughputDescription;
import software.amazon.awssdk.services.dynamodb.model.TableDescription;
import java.util.List;
```

Kode

```
    public static void describeDymamoDBTable(DynamoDbClient ddb,String tableName ) {

        DescribeTableRequest request = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            TableDescription tableInfo =
                    ddb.describeTable(request).table();

            if (tableInfo != null) {
                System.out.format("Table name  : %s\n",
```

```
                tableInfo.tableName());
            System.out.format("Table ARN   : %s\n",
                tableInfo.tableArn());
            System.out.format("Status      : %s\n",
                tableInfo.tableStatus());
            System.out.format("Item count  : %d\n",
                tableInfo.itemCount().longValue());
            System.out.format("Size (bytes): %d\n",
                tableInfo.tableSizeBytes().longValue());

            ProvisionedThroughputDescription throughputInfo =
                tableInfo.provisionedThroughput();
            System.out.println("Throughput");
            System.out.format("  Read Capacity : %d\n",
                throughputInfo.readCapacityUnits().longValue());
            System.out.format("  Write Capacity: %d\n",
                throughputInfo.writeCapacityUnits().longValue());

            List<AttributeDefinition> attributes =
                tableInfo.attributeDefinitions();
            System.out.println("Attributes");

            for (AttributeDefinition a : attributes) {
                System.out.format("  %s (%s)\n",
                        a.attributeName(), a.attributeType());
            }
        }
    } catch (DynamoDbException e) {
        System.err.println(e.getMessage());
        System.exit(1);
    }
    System.out.println("\nDone!");
}
```

Lihat contoh lengkapnya di GitHub.

## Ubah (perbarui) tabel

Anda dapat memodifikasi nilai throughput yang disediakan tabel kapan saja dengan memanggil metode. `DynamoDbClient's updateTable`

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan Wilayah Anda, a ResourceNotFoundExceptiondilemparkan.

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.UpdateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
```

### Kode

```
    public static void updateDynamoDBTable(DynamoDbClient ddb,
                                           String tableName,
                                           Long readCapacity,
                                           Long writeCapacity) {

        System.out.format(
                "Updating %s with new provisioned throughput values\n",
                tableName);
        System.out.format("Read capacity : %d\n", readCapacity);
        System.out.format("Write capacity : %d\n", writeCapacity);

        ProvisionedThroughput tableThroughput = ProvisionedThroughput.builder()
                .readCapacityUnits(readCapacity)
                .writeCapacityUnits(writeCapacity)
                .build();

        UpdateTableRequest request = UpdateTableRequest.builder()
                .provisionedThroughput(tableThroughput)
                .tableName(tableName)
                .build();

        try {
            ddb.updateTable(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }

        System.out.println("Done!");
    }
```

Lihat contoh lengkapnya di GitHub.

## Menghapus tabel

Untuk menghapus tabel, panggil `DynamoDbClient's` `deleteTable` metode dan berikan nama tabel.

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan Wilayah Anda, a ResourceNotFoundExceptiondilemparkan.

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;
```

### Kode

```
    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {

        DeleteTableRequest request = DeleteTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
        System.out.println(tableName +" was successfully deleted!");
    }
```

Lihat contoh lengkapnya di GitHub.

### Informasi lain

- Pedoman untuk Bekerja dengan Tabel di Panduan Amazon DynamoDB Pengembang
- Bekerja dengan Tabel DynamoDB di Panduan Amazon DynamoDB Pengembang

## Bekerja dengan item di DynamoDB

Dalam DynamoDB, item adalah kumpulan atribut, yang masing-masing memiliki nama dan nilai. Nilai atribut dapat berupa skalar, set, atau jenis dokumen. Untuk informasi selengkapnya, lihat Aturan Penamaan dan Jenis Data di Panduan Amazon DynamoDB Pengembang.

### Ambil (dapatkan) item dari tabel

Panggil `getItem` metode ini dan berikan GetItemRequestobjek dengan nama tabel dan nilai kunci primer dari item yang Anda inginkan. DynamoDbClient Ia mengembalikan GetItemResponseobjek dengan semua atribut untuk item itu. Anda dapat menentukan satu atau lebih ekspresi proyeksi dalam `GetItemRequest` untuk mengambil atribut tertentu.

Anda dapat menggunakan `item()` metode `GetItemResponse` objek yang dikembalikan untuk mengambil Map of key (String) dan value (AttributeValue) pasangan yang terkait dengan item tersebut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import java.util.HashMap;
import java.util.Map;
import java.util.Set;
```

Kode

```
   public static void getDynamoDBItem(DynamoDbClient ddb,String tableName,String
key,String keyVal ) {

       HashMap<String,AttributeValue> keyToGet = new HashMap<String,AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal).build());

       GetItemRequest request = GetItemRequest.builder()
               .key(keyToGet)
               .tableName(tableName)
               .build();

       try {
           Map<String,AttributeValue> returnedItem = ddb.getItem(request).item();

           if (returnedItem != null) {
               Set<String> keys = returnedItem.keySet();
               System.out.println("Amazon DynamoDB table attributes: \n");

               for (String key1 : keys) {
                   System.out.format("%s: %s\n", key1,
returnedItem.get(key1).toString());
               }
           } else {
               System.out.format("No item found with the key %s!\n", key);
           }
       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

Lihat contoh lengkapnya di GitHub.

## Ambil (dapatkan) item dari tabel menggunakan klien asinkron

Memanggil `getItem` metode DynamoDbAsyncClient dan meneruskannya GetItemRequestobjek dengan nama tabel dan nilai kunci utama dari item yang Anda inginkan.

Anda dapat mengembalikan instance Collection dengan semua atribut untuk item tersebut (lihat contoh berikut).

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient;
import java.util.HashMap;
import java.util.Map;
import java.util.Set;
import java.util.stream.Collectors;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
```

### Kode

```
   public static void getItem(DynamoDbAsyncClient client, String tableName, String
key,  String keyVal) {

       HashMap<String, AttributeValue> keyToGet =
               new HashMap<String, AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal).build());

       try {

           // Create a GetItemRequest instance
           GetItemRequest request = GetItemRequest.builder()
                   .key(keyToGet)
                   .tableName(tableName)
                   .build();

           // Invoke the DynamoDbAsyncClient object's getItem
           java.util.Collection<AttributeValue> returnedItem =
client.getItem(request).join().item().values();

           // Convert Set to Map
           Map<String, AttributeValue> map =
returnedItem.stream().collect(Collectors.toMap(AttributeValue::s, s->s));
           Set<String> keys = map.keySet();
           for (String sinKey : keys) {
               System.out.format("%s: %s\n", sinKey, map.get(sinKey).toString());
           }
```

```
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

Lihat contoh lengkapnya di GitHub.

## Tambahkan item baru ke tabel

Buat Peta pasangan kunci-nilai yang mewakili atribut item. Ini harus menyertakan nilai untuk bidang kunci utama tabel. Jika item yang diidentifikasi oleh kunci utama sudah ada, bidangnya diperbarui oleh permintaan.

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan wilayah Anda, a ResourceNotFoundExceptiondilemparkan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import java.util.HashMap;
```

Kode

```
    public static void putItemInTable(DynamoDbClient ddb,
                                      String tableName,
                                      String key,
                                      String keyVal,
                                      String albumTitle,
                                      String albumTitleValue,
                                      String awards,
                                      String awardVal,
                                      String songTitle,
```

```
                                    String songTitleVal){

        HashMap<String,AttributeValue> itemValues = new
 HashMap<String,AttributeValue>();

        // Add all content to the table
        itemValues.put(key, AttributeValue.builder().s(keyVal).build());
        itemValues.put(songTitle, AttributeValue.builder().s(songTitleVal).build());
        itemValues.put(albumTitle,
 AttributeValue.builder().s(albumTitleValue).build());
        itemValues.put(awards, AttributeValue.builder().s(awardVal).build());

        PutItemRequest request = PutItemRequest.builder()
                .tableName(tableName)
                .item(itemValues)
                .build();

        try {
            ddb.putItem(request);
            System.out.println(tableName +" was successfully updated");

        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be found.
\n", tableName);
            System.err.println("Be sure that it exists and that you've typed its name
 correctly!");
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Memperbarui item yang ada dalam tabel

Anda dapat memperbarui atribut untuk item yang sudah ada dalam tabel dengan menggunakan `updateItem` metode, memberikan nama tabel, nilai kunci primer, dan peta bidang yang akan diperbarui. DynamoDbClient

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan wilayah Anda, atau jika item yang diidentifikasi oleh kunci utama yang Anda lewati tidak ada, a akan ResourceNotFoundExceptionditampilkan.

### Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeAction;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.AttributeValueUpdate;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.HashMap;
```

### Kode

```
    public static void updateTableItem(DynamoDbClient ddb,
                                       String tableName,
                                       String key,
                                       String keyVal,
                                       String name,
                                       String updateVal){

        HashMap<String,AttributeValue> itemKey = new HashMap<String,AttributeValue>();

        itemKey.put(key, AttributeValue.builder().s(keyVal).build());

        HashMap<String,AttributeValueUpdate> updatedValues =
                new HashMap<String,AttributeValueUpdate>();

        // Update the column specified by name with updatedVal
        updatedValues.put(name, AttributeValueUpdate.builder()
                .value(AttributeValue.builder().s(updateVal).build())
                .action(AttributeAction.PUT)
                .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
```

```
                .tableName(tableName)
                .key(itemKey)
                .attributeUpdates(updatedValues)
                .build();

        try {
            ddb.updateItem(request);
        } catch (ResourceNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }

        System.out.println("Done!");
    }
```

Lihat contoh lengkapnya di GitHub.

## Menghapus item yang ada dalam tabel

Anda dapat menghapus item yang ada dalam tabel dengan menggunakan `deleteItem` metode dan memberikan nama tabel serta nilai kunci primer. DynamoDbClient

> **Note**
>
> Jika tabel bernama tidak ada untuk akun dan wilayah Anda, atau jika item yang diidentifikasi oleh kunci utama yang Anda lewati tidak ada, a akan ResourceNotFoundExceptionditampilkan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.util.HashMap;
```

Kode

```
 public static void deleteDynamoDBItem(DynamoDbClient ddb, String tableName, String
key, String keyVal) {

       HashMap<String,AttributeValue> keyToGet =
               new HashMap<String,AttributeValue>();

       keyToGet.put(key, AttributeValue.builder()
               .s(keyVal)
               .build());

       DeleteItemRequest deleteReq = DeleteItemRequest.builder()
               .tableName(tableName)
               .key(keyToGet)
               .build();

       try {
           ddb.deleteItem(deleteReq);
       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

Lihat contoh lengkapnya di GitHub.

### Informasi selengkapnya

- Pedoman untuk Bekerja dengan Item di Panduan Amazon DynamoDB Pengembang
- Bekerja dengan Item DynamoDB di Panduan Amazon DynamoDB Pengembang

## Peta objek Java ke item DynamoDB dengan AWS SDK for Java 2.x

DynamoDB Enhanced Client API adalah library tingkat tinggi yang merupakan penerus kelas dalam SDK for `DynamoDBMapper` Java v1.x. Ini menawarkan cara mudah untuk memetakan kelas sisi klien ke tabel DynamoDB. Anda menentukan hubungan antara tabel dan kelas data yang sesuai dalam kode Anda. Setelah menentukan hubungan tersebut, Anda dapat melakukan berbagai operasi buat, baca, perbarui, atau hapus (CRUD) pada tabel atau item di DynamoDB.

DynamoDB Enhanced Client API juga menyertakan API Dokumen yang Ditingkatkan yang memungkinkan Anda bekerja dengan item tipe dokumen yang tidak mengikuti skema yang ditentukan.

DynamoDB Enhanced Client API dibahas dalam topik berikut.

- Memulai menggunakan DynamoDB Enhanced Client API
- Pelajari dasar-dasar DynamoDB Enhanced Client API
- Gunakan fitur pemetaan tingkat lanjut
- Bekerja dengan dokumen JSON dengan Enhanced Document API untuk DynamoDB
- Gunakan ekstensi untuk menyesuaikan operasi DynamoDB Enhanced Client
- Gunakan DynamoDB Enhanced Client API secara asinkron
- Anotasi kelas data

## Memulai menggunakan DynamoDB Enhanced Client API

Tutorial berikut memperkenalkan Anda pada dasar-dasar yang Anda butuhkan untuk bekerja dengan DynamoDB Enhanced Client API.

### Tambahkan dependensi

Untuk mulai bekerja dengan DynamoDB Enhanced Client API di project Anda, tambahkan dependensi pada artefak Maven. `dynamodb-enhanced` Ini ditunjukkan dalam contoh berikut.

Maven

```
<project>
  <dependencyManagement>
   <dependencies>
      <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>bom</artifactId>
        <version><VERSION></version>
        <type>pom</type>
        <scope>import</scope>
      </dependency>
   </dependencies>
  </dependencyManagement>
  <dependencies>
```

```
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb-enhanced</artifactId>
    </dependency>
  </dependencies>
  ...
</project>
```

Lakukan pencarian repositori pusat Maven untuk versi terbaru dan ganti *<VERSION>* dengan nilai ini.

Gradle

```
repositories {
    mavenCentral()
}
dependencies {
    implementation(platform("software.amazon.awssdk:bom:<VERSION>"))
    implementation("software.amazon.awssdk:dynamodb-enhanced")
    ...
}
```

Lakukan pencarian repositori pusat Maven untuk versi terbaru dan ganti *<VERSION>* dengan nilai ini.

### Menghasilkan **`TableSchema`** dari kelas data

A `TableSchema` memungkinkan klien yang disempurnakan untuk memetakan nilai atribut DynamoDB ke dan dari kelas sisi klien Anda. Dalam tutorial ini, Anda belajar tentang `TableSchema` s yang berasal dari kelas data statis dan dihasilkan dari kode dengan menggunakan pembangun.

#### Gunakan kelas data beranotasi

SDK for Java 2.x menyertakan serangkaian anotasi yang dapat Anda gunakan dengan kelas data untuk menghasilkan `TableSchema` cepat untuk memetakan kelas Anda ke tabel.

Mulailah dengan membuat kelas data yang sesuai dengan JavaBean spesifikasi. Spesifikasi mensyaratkan bahwa kelas memiliki konstruktor publik tanpa argumen dan memiliki getter dan setter untuk setiap atribut di kelas. Sertakan anotasi tingkat kelas untuk menunjukkan bahwa kelas data adalah a. `DynamoDbBean` Juga, minimal, sertakan `DynamoDbPartitionKey` anotasi pada pengambil atau penyetel untuk atribut kunci utama.

Anda dapat menerapkan anotasi tingkat atribut ke getter atau setter, tetapi tidak keduanya.

> **Note**
>
> Istilah `property` ini biasanya digunakan untuk nilai yang dienkapsulasi dalam a. JavaBean Namun, panduan ini menggunakan istilah `attribute` sebagai gantinya, agar konsisten dengan terminologi yang digunakan oleh DynamoDB.

`Customer`Kelas berikut menunjukkan anotasi yang menghubungkan definisi kelas ke tabel DynamoDB.

**`Customer`** kelas

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.time.Instant;

@DynamoDbBean
public class Customer {

    private String id;
    private String name;
    private String email;
    private Instant regDate;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }

    public void setId(String id) { this.id = id; }

    public String getCustName() { return this.name; }

    public void setCustName(String name) { this.name = name; }

    @DynamoDbSortKey
    public String getEmail() { return this.email; }
```

```
    public void setEmail(String email) { this.email = email; }

    public Instant getRegistrationDate() { return this.regDate; }

    public void setRegistrationDate(Instant registrationDate) { this.regDate =
 registrationDate; }

    @Override
    public String toString() {
        return "Customer [id=" + id + ", name=" + name + ", email=" + email
                + ", regDate=" + regDate + "]";
    }
}
```

Setelah Anda membuat kelas data beranotasi, gunakan untuk membuat`TableSchema`, seperti yang ditunjukkan pada cuplikan berikut.

```
static final TableSchema<Customer> customerTableSchema =
 TableSchema.fromBean(Customer.class);
```

A `TableSchema` dirancang untuk menjadi statis dan tidak dapat diubah. Anda biasanya dapat membuat instance pada waktu pemuatan kelas.

Metode `TableSchema.fromBean()` pabrik statis mengintrospeksi kacang untuk menghasilkan pemetaan atribut kelas data (properti) ke dan dari atribut DynamoDB.

Untuk contoh bekerja dengan model data yang terdiri dari beberapa kelas data, lihat `Person` kelas di ??? bagian tersebut.

Gunakan pembangun

Anda dapat melewatkan biaya introspeksi kacang jika Anda menentukan skema tabel dalam kode. Jika Anda membuat kode skema, kelas Anda tidak perlu mengikuti standar JavaBean penamaan dan juga tidak perlu dianotasi. Contoh berikut menggunakan pembangun dan setara dengan contoh `Customer` kelas yang menggunakan anotasi.

```
static final TableSchema<Customer> customerTableSchema =
                TableSchema.builder(Customer.class)
                        .newItemSupplier(Customer::new)
                        .addAttribute(String.class, a -> a.name("id")
```

```
                .getter(Customer::getId)
                .setter(Customer::setId)
                .tags(StaticAttributeTags.primaryPartitionKey()))
        .addAttribute(String.class, a -> a.name("email")
                .getter(Customer::getEmail)
                .setter(Customer::setEmail)
                .tags(StaticAttributeTags.primarySortKey()))
        .addAttribute(String.class, a -> a.name("name")
                .getter(Customer::getCustName)
                .setter(Customer::setCustName))
        .addAttribute(Instant.class, a -> a.name("registrationDate")
                .getter(Customer::getRegistrationDate)
                .setter(Customer::setRegistrationDate))
        .build();
```

Buat klien yang disempurnakan dan **`DynamoDbTable`**

Buat klien yang disempurnakan

DynamoDbEnhancedClientKelas atau rekan asinkron, DynamoDbEnhancedAsyncClient, adalah titik masuk untuk bekerja dengan DynamoDB Enhanced Client API.

Klien yang disempurnakan membutuhkan standar `DynamoDbClient` untuk melakukan pekerjaan. API menawarkan dua cara untuk membuat `DynamoDbEnhancedClient` instance. Opsi pertama, yang ditunjukkan dalam cuplikan berikut, membuat standar `DynamoDbClient` dengan pengaturan default diambil dari pengaturan konfigurasi.

```
DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.create();
```

Jika Anda ingin mengonfigurasi klien standar yang mendasarinya, Anda dapat menyediakannya ke metode pembangun klien yang disempurnakan seperti yang ditunjukkan pada cuplikan berikut.

```
// Configure an instance of the standard DynamoDbClient.
DynamoDbClient standardClient = DynamoDbClient.builder()
    .region(Region.US_EAST_1)
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

// Use the configured standard client with the enhanced client.
DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
    .dynamoDbClient(standardClient)
```

```
    .build();
```

Buat sebuah **`DynamoDbTable`** instance

Pikirkan a `DynamoDbTable`sebagai representasi sisi klien dari tabel DynamoDB yang menggunakan fungsionalitas pemetaan yang disediakan oleh file. `TableSchema` `DynamoDbTable`Kelas menyediakan metode untuk operasi CRUD yang memungkinkan Anda berinteraksi dengan tabel DynamoDB tunggal.

`DynamoDbTable<T>`adalah kelas generik yang mengambil argumen tipe tunggal, apakah itu kelas khusus atau `EnhancedDocument` saat bekerja dengan item tipe dokumen. Jenis argumen ini menetapkan hubungan antara kelas yang Anda gunakan dan tabel DynamoDB tunggal.

Gunakan metode `table()` pabrik `DynamoDbEnhancedClient` untuk membuat `DynamoDbTable` instance seperti yang ditunjukkan pada cuplikan berikut.

```
static final DynamoDbTable<Customer> customerTable =
        enhancedClient.table("Customer", TableSchema.fromBean(Customer.class));
```

`DynamoDbTable`contoh adalah kandidat untuk lajang karena mereka tidak dapat diubah dan dapat digunakan di seluruh aplikasi Anda.

Kode Anda sekarang memiliki representasi dalam memori dari tabel DynamoDB yang dapat bekerja dengan instance. `Customer` Tabel DynamoDB yang sebenarnya mungkin atau mungkin tidak ada. Jika tabel bernama `Customer` sudah ada, Anda dapat mulai melakukan operasi CRUD terhadapnya. Jika tidak ada, gunakan `DynamoDbTable` instance untuk membuat tabel seperti yang dibahas di bagian berikutnya.

Buat tabel DynamoDB jika diperlukan

Setelah Anda membuat `DynamoDbTable` instance, gunakan untuk melakukan pembuatan tabel satu kali di DynamoDB.

Buat kode contoh tabel

Contoh berikut membuat tabel DynamoDB berdasarkan `Customer` kelas data.

Contoh ini membuat tabel DynamoDB dengan `Customer` nama —identik dengan nama kelas—tetapi nama tabel bisa menjadi sesuatu yang lain. Apa pun nama Anda tabel, Anda harus menggunakan

nama ini dalam aplikasi tambahan untuk bekerja dengan tabel. Berikan nama ini ke `table()` metode kapan pun Anda membuat `DynamoDbTable` objek lain agar dapat bekerja dengan tabel DynamoDB yang mendasarinya.

Parameter lambda Java`builder`,, diteruskan ke `createTable` metode memungkinkan Anda menyesuaikan tabel. Dalam contoh ini, throughput yang disediakan dikonfigurasi. Jika Anda ingin menggunakan pengaturan default saat membuat tabel, lewati pembangun seperti yang ditunjukkan pada cuplikan berikut.

```
customerTable.createTable();
```

Saat pengaturan default digunakan, nilai untuk throughput yang disediakan tidak disetel. Sebagai gantinya, mode penagihan untuk tabel diatur ke sesuai permintaan.

Contoh ini juga menggunakan `DynamoDbWaiter` sebelum mencoba untuk mencetak nama tabel yang diterima dalam respon. Pembuatan meja membutuhkan waktu. Oleh karena itu, menggunakan pelayan berarti Anda tidak perlu menulis logika yang melakukan polling layanan DynamoDB untuk melihat apakah tabel ada sebelum menggunakan tabel.

Impor

```
import com.example.dynamodb.Customer;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedClient;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbTable;
import software.amazon.awssdk.enhanced.dynamodb.TableSchema;
import software.amazon.awssdk.enhanced.dynamodb.model.CreateTableEnhancedRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;
```

Kode

```
public static void createCustomerTable(DynamoDbTable<Customer> customerTable,
DynamoDbClient standardClient) {
    // Create the DynamoDB table using the 'customerTable' DynamoDbTable instance.
    customerTable.createTable(builder -> builder
            .provisionedThroughput(b -> b
                    .readCapacityUnits(10L)
                    .writeCapacityUnits(10L)
                    .build())
```

```
    );
    // The DynamoDbClient instance (named 'standardClient') passed to the builder for
the DynamoDbWaiter is the same instance
    // that was passed to the builder of the DynamoDbEnhancedClient instance that we
created previously.
    // By using the same instance, it ensures that the same Region that was configured
on the standard DynamoDbClient
    // instance is used for other service clients that accept a DynamoDbClient during
construction.
    try (DynamoDbWaiter waiter =
DynamoDbWaiter.builder().client(standardClient).build()) { // DynamoDbWaiter is
Autocloseable
        ResponseOrException<DescribeTableResponse> response = waiter
                .waitUntilTableExists(builder ->
builder.tableName("Customer").build())
                .matched();
        DescribeTableResponse tableDescription = response.response().orElseThrow(
                () -> new RuntimeException("Customer table was not created."));
        // The actual error can be inspected in response.exception()
        logger.info("Customer table was created.");
    }
}
```

> **Note**
>
> Nama atribut tabel DynamoDB dimulai dengan huruf kecil ketika tabel dihasilkan dari kelas data. Jika Anda ingin nama atribut tabel dimulai dengan huruf besar, gunakan `@DynamoDbAttribute(NAME)`anotasi dan berikan nama yang Anda inginkan sebagai parameter.

Lakukan operasi

Setelah tabel dibuat, gunakan `DynamoDbTable` instance untuk melakukan operasi terhadap tabel DynamoDB.

Dalam contoh berikut, singleton `DynamoDbTable<Customer>` dilewatkan sebagai parameter bersama dengan contoh kelas `Customer` data untuk menambahkan item baru ke tabel.

```
   public static void putItemExample(DynamoDbTable<Customer> customerTable, Customer
customer){
```

```
        logger.info(customer.toString());
        customerTable.putItem(customer);
    }
```

Objek **`Customer`**

```
        Customer customer = new Customer();
        customer.setId("1");
        customer.setCustName("Customer Name");
        customer.setEmail("customer@example.com");
        customer.setRegistrationDate(Instant.parse("2023-07-03T10:15:30.00Z"));
```

Sebelum mengirim `customer` objek ke layanan DynamoDB, catat output dari metode objek untuk membandingkannya dengan apa yang dikirim `toString()` klien yang disempurnakan.

```
Customer [id=1, name=Customer Name, email=customer@example.com,
 regDate=2023-07-03T10:15:30Z]
```

Pencatatan tingkat kabel menunjukkan muatan permintaan yang dihasilkan. Klien yang disempurnakan menghasilkan representasi tingkat rendah dari kelas data. `regDate`Atribut, yang merupakan `Instant` tipe di Java, direpresentasikan sebagai string DynamoDB.

```
{
  "TableName": "Customer",
  "Item": {
    "registrationDate": {
      "S": "2023-07-03T10:15:30Z"
    },
    "id": {
      "S": "1"
    },
    "custName": {
      "S": "Customer Name"
    },
    "email": {
      "S": "customer@example.com"
    }
  }
}
```

### Bekerja dengan tabel yang ada

Bagian sebelumnya menunjukkan cara membuat tabel DynamoDB dimulai dengan kelas data Java. Jika Anda sudah memiliki tabel yang ada dan ingin menggunakan fitur klien yang disempurnakan, Anda dapat membuat kelas data Java untuk bekerja dengan tabel. Anda perlu memeriksa tabel DynamoDB dan menambahkan anotasi yang diperlukan ke kelas data.

Sebelum Anda bekerja dengan tabel yang ada, panggil `DynamoDbEnhanced.table()` metode. Ini dilakukan pada contoh sebelumnya dengan pernyataan berikut.

```
DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer",
 TableSchema.fromBean(Customer.class));
```

Setelah `DynamoDbTable` instance dikembalikan, Anda dapat mulai bekerja segera dengan tabel yang mendasarinya. Anda tidak perlu membuat ulang tabel dengan memanggil `DynamoDbTable.createTable()` metode.

Contoh berikut menunjukkan ini dengan segera mengambil `Customer` contoh dari tabel DynamoDB.

```
DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer",
 TableSchema.fromBean(Customer.class));
// The Customer table exists already and has an item with a primary key value of "1"
 and a sort key value of "customer@example.com".
customerTable.getItem(
        Key.builder().
                partitionValue("1").
                sortValue("customer@example.com").build());
```

> **Important**
>
> Nama tabel yang digunakan dalam `table()` metode harus cocok dengan nama tabel DynamoDB yang ada.

## Pelajari dasar-dasar DynamoDB Enhanced Client API

Topik ini membahas fitur dasar DynamoDB Enhanced Client API dan membandingkannya dengan API klien DynamoDB standar.

Jika Anda baru mengenal DynamoDB Enhanced Client API, kami sarankan Anda melalui tutorial pengantar untuk membiasakan diri dengan kelas fundamental.

item DynamoDB di Java

Tabel DynamoDB menyimpan item. Bergantung pada kasus penggunaan Anda, item di sisi Java dapat berbentuk data atau struktur terstruktur statis yang dibuat secara dinamis.

Jika kasus penggunaan Anda memanggil item dengan kumpulan atribut yang konsisten, gunakan kelas beranotasi atau gunakan pembuat untuk menghasilkan tipe statis yang sesuai. `TableSchema`

Atau, jika Anda perlu menyimpan item yang terdiri dari berbagai struktur, buat`DocumentTableSchema`. `DocumentTableSchema`adalah bagian dari Enhanced Document API dan hanya memerlukan kunci primer yang diketik secara statis dan bekerja dengan `EnhancedDocument` instance untuk menyimpan elemen data. Enhanced Document API dibahas dalam topik lain.

Tipe atribut untuk kelas model data

Meskipun DynamoDB mendukung sejumlah kecil tipe atribut dibandingkan dengan sistem tipe kaya Java, DynamoDB Enhanced Client API menyediakan mekanisme untuk mengonversi anggota kelas Java ke dan dari tipe atribut DynamoDB.

Jenis atribut (properti) kelas data Java Anda harus berupa tipe objek, bukan primitif. Misalnya, selalu gunakan `Long` dan `Integer` objek tipe data, bukan `long` dan `int` primitif.

Secara default, DynamoDB Enhanced Client API mendukung konverter atribut untuk sejumlah besar tipe, seperti Integer, String, dan Instant. BigDecimal Daftar ini muncul di kelas implementasi AttributeConverter antarmuka yang dikenal. Daftar ini mencakup banyak jenis dan koleksi seperti peta, daftar, dan set.

Untuk menyimpan data untuk jenis atribut yang tidak didukung secara default atau tidak sesuai dengan JavaBean konvensi, Anda dapat menulis `AttributeConverter` implementasi khusus untuk melakukan konversi. Lihat bagian konversi atribut untuk contoh.

Untuk menyimpan data untuk tipe atribut yang kelasnya sesuai dengan spesifikasi kacang Java (atau kelas data yang tidak dapat diubah), Anda dapat mengambil dua pendekatan.

- Jika Anda memiliki akses ke file sumber, Anda dapat membuat anotasi kelas dengan `@DynamoDbBean` (atau`@DynamoDbImmutable`). Bagian yang membahas atribut bersarang menunjukkan contoh penggunaan kelas beranotasi.

- Jika tidak memiliki akses ke file sumber dari kelas JavaBean data untuk atribut (atau Anda tidak ingin membubuhi keterangan file sumber kelas yang Anda memiliki akses ke), maka Anda dapat

menggunakan pendekatan builder. Ini menciptakan skema tabel tanpa mendefinisikan kunci. Kemudian, Anda dapat menyusun skema tabel ini di dalam skema tabel lain untuk melakukan pemetaan. Bagian atribut bersarang memiliki contoh yang menunjukkan penggunaan skema bersarang.

Nilai nol

Saat Anda menggunakan `putItem` metode ini, klien yang disempurnakan tidak menyertakan atribut bernilai nol dari objek data yang dipetakan dalam permintaan ke DynamoDB.

Perilaku default SDK untuk `updateItem` permintaan menghapus atribut dari item di DynamoDB yang disetel ke null dalam objek yang Anda kirimkan dalam metode. `updateItem` Jika Anda bermaksud memperbarui beberapa nilai atribut dan menjaga yang lain tidak berubah, Anda memiliki dua opsi.

- Ambil item (dengan menggunakan`getItem`) sebelum Anda membuat perubahan pada nilai. Dengan menggunakan pendekatan ini, SDK mengirimkan semua nilai yang diperbarui dan lama ke DynamoDB.
- Gunakan salah satu `IgnoreNullsMode.SCALAR_ONLY` atau `IgnoreNullsMode.MAPS_ONLY` ketika Anda membuat permintaan untuk memperbarui item. Kedua mode mengabaikan properti bernilai nol dalam objek yang mewakili atribut skalar di DynamoDB. the section called “Perbarui item yang berisi tipe kompleks”Topik dalam panduan ini berisi informasi lebih lanjut tentang `IgnoreNullsMode` nilai-nilai dan cara bekerja dengan tipe yang kompleks.

Contoh berikut menunjukkan `ignoreNullsMode()` untuk `updateItem()` metode ini.

```
    public static void updateItemNullsExample() {
        Customer customer = new Customer();
        customer.setCustName("CustomerName");
        customer.setEmail("email");
        customer.setId("1");
        customer.setRegistrationDate(Instant.now());

        logger.info("Original customer: {}", customer);

        // Put item with values for all attributes.
        try {
            customerAsyncDynamoDbTable.putItem(customer).join();
        } catch (RuntimeException rte) {
```

```
            logger.error("A exception occurred during putItem: {}",
rte.getCause().getMessage(), rte);
            return;
        }

        // Create a Customer instance with the same 'id' and 'email' values, but a
different 'name' value.
        // Do not set the 'registrationDate' attribute.
        Customer customerForUpdate = new Customer();
        customerForUpdate.setCustName("NewName");
        customerForUpdate.setEmail("email");
        customerForUpdate.setId("1");

        // Update item without setting the 'registrationDate' property and set
IgnoreNullsMode to SCALAR_ONLY.
        try {
            Customer updatedWithNullsIgnored = customerAsyncDynamoDbTable.updateItem(b
-> b
                            .item(customerForUpdate)
                            .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY))
                    .join();
            logger.info("Customer updated with nulls ignored: {}",
updatedWithNullsIgnored.toString());
        } catch (RuntimeException rte) {
            logger.error("An exception occurred during updateItem: {}",
rte.getCause().getMessage(), rte);
            return;
        }

        // Update item without setting the registrationDate attribute and not setting
ignoreNulls to true.
        try {
            Customer updatedWithNullsUsed =
customerAsyncDynamoDbTable.updateItem(customerForUpdate)
                    .join();
            logger.info("Customer updated with nulls used: {}",
updatedWithNullsUsed.toString());
        } catch (RuntimeException rte) {
            logger.error("An exception occurred during updateItem: {}",
rte.getCause().getMessage(), rte);
        }
    }
```

```
// Logged lines.
Original customer: Customer [id=1, name=CustomerName, email=email,
 regDate=2024-10-11T14:12:30.222858Z]
Customer updated with nulls ignored: Customer [id=1, name=NewName, email=email,
 regDate=2024-10-11T14:12:30.222858Z]
Customer updated with nulls used: Customer [id=1, name=NewName, email=email,
 regDate=null]
```

### Metode dasar DynamoDB Enhanced Client

Metode dasar peta klien yang disempurnakan ke operasi layanan DynamoDB yang dinamai menurut namanya. Contoh berikut menunjukkan variasi paling sederhana dari setiap metode. Anda dapat menyesuaikan setiap metode dengan meneruskan objek permintaan yang disempurnakan. Objek permintaan yang disempurnakan menawarkan sebagian besar fitur yang tersedia di klien DynamoDB standar. Mereka sepenuhnya didokumentasikan dalam Referensi AWS SDK for Java 2.x API.

Contoh menggunakan yang the section called “`Customer` kelas” ditunjukkan sebelumnya.

```
// CreateTable
customerTable.createTable();

// GetItem
Customer customer =
 customerTable.getItem(Key.builder().partitionValue("a123").build());

// UpdateItem
Customer updatedCustomer = customerTable.updateItem(customer);

// PutItem
customerTable.putItem(customer);

// DeleteItem
Customer deletedCustomer =
 customerTable.deleteItem(Key.builder().partitionValue("a123").sortValue(456).build());

// Query
PageIterable<Customer> customers = customerTable.query(keyEqualTo(k ->
 k.partitionValue("a123")));

// Scan
PageIterable<Customer> customers = customerTable.scan();

// BatchGetItem
```

```
BatchGetResultPageIterable batchResults =
    enhancedClient.batchGetItem(r -> r.addReadBatch(ReadBatch.builder(Customer.class)
                                      .mappedTableResource(customerTable)
                                      .addGetItem(key1)
                                      .addGetItem(key2)
                                      .addGetItem(key3)
                                      .build()));

// BatchWriteItem
batchResults = enhancedClient.batchWriteItem(r ->
 r.addWriteBatch(WriteBatch.builder(Customer.class)
                                                    .mappedTableResource(customerTable)
                                                    .addPutItem(customer)
                                                    .addDeleteItem(key1)
                                                    .addDeleteItem(key1)
                                                    .build()));

// TransactGetItems
transactResults = enhancedClient.transactGetItems(r -> r.addGetItem(customerTable,
 key1)
                                                         .addGetItem(customerTable,
 key2));

// TransactWriteItems
enhancedClient.transactWriteItems(r -> r.addConditionCheck(customerTable,
                                                            i -> i.key(orderKey)

 .conditionExpression(conditionExpression))
                                      .addUpdateItem(customerTable, customer)
                                      .addDeleteItem(customerTable, key));
```

Bandingkan DynamoDB Enhanced Client dengan klien DynamoDB standar

Baik APIs klien DynamoDB - standar dan ditingkatkan - memungkinkan Anda bekerja dengan tabel DynamoDB untuk melakukan operasi tingkat data CRUD (membuat, membaca, memperbarui, dan menghapus). Perbedaan antara klien APIs adalah bagaimana hal itu dicapai. Menggunakan klien standar, Anda bekerja secara langsung dengan atribut data tingkat rendah. API klien yang disempurnakan menggunakan kelas Java yang sudah dikenal dan memetakan ke API tingkat rendah di belakang layar.

Sementara kedua klien APIs mendukung operasi tingkat data, klien DynamoDB standar juga mendukung operasi tingkat sumber daya. Operasi tingkat sumber daya mengelola database, seperti

membuat cadangan, daftar tabel, dan memperbarui tabel. API klien yang disempurnakan mendukung sejumlah operasi tingkat sumber daya tertentu seperti membuat, mendeskripsikan, dan menghapus tabel.

Untuk mengilustrasikan pendekatan berbeda yang digunakan oleh dua klien APIs, contoh kode berikut menunjukkan pembuatan `ProductCatalog` tabel yang sama menggunakan klien standar dan klien yang disempurnakan.

Bandingkan: Buat tabel menggunakan klien DynamoDB standar

```
DependencyFactory.dynamoDbClient().createTable(builder -> builder
        .tableName(TABLE_NAME)
        .attributeDefinitions(
                b -> b.attributeName("id").attributeType(ScalarAttributeType.N),
                b -> b.attributeName("title").attributeType(ScalarAttributeType.S),
                b -> b.attributeName("isbn").attributeType(ScalarAttributeType.S)
        )
        .keySchema(
                builder1 -> builder1.attributeName("id").keyType(KeyType.HASH),
                builder2 -> builder2.attributeName("title").keyType(KeyType.RANGE)
        )
        .globalSecondaryIndexes(builder3 -> builder3
                        .indexName("products_by_isbn")
                        .keySchema(builder2 -> builder2
                                .attributeName("isbn").keyType(KeyType.HASH))
                        .projection(builder2 -> builder2
                                .projectionType(ProjectionType.INCLUDE)
                                .nonKeyAttributes("price", "authors"))
                        .provisionedThroughput(builder4 -> builder4
                                .writeCapacityUnits(5L).readCapacityUnits(5L))
        )
        .provisionedThroughput(builder1 -> builder1
                .readCapacityUnits(5L).writeCapacityUnits(5L))
);
```

Bandingkan: Buat tabel menggunakan DynamoDB Enhanced Client

```
DynamoDbEnhancedClient enhancedClient = DependencyFactory.enhancedClient();
productCatalog = enhancedClient.table(TABLE_NAME,
 TableSchema.fromImmutableClass(ProductCatalog.class));
productCatalog.createTable(b -> b
        .provisionedThroughput(b1 -> b1.readCapacityUnits(5L).writeCapacityUnits(5L))
        .globalSecondaryIndices(b2 -> b2.indexName("products_by_isbn")
```

```
                .projection(b4 -> b4
                        .projectionType(ProjectionType.INCLUDE)
                        .nonKeyAttributes("price", "authors"))
                .provisionedThroughput(b3 ->
 b3.writeCapacityUnits(5L).readCapacityUnits(5L))
        )
);
```

Klien yang disempurnakan menggunakan kelas data beranotasi berikut. DynamoDB Enhanced Client memetakan tipe data Java ke tipe data DynamoDB untuk kode verbose yang lebih sedikit yang lebih mudah diikuti. `ProductCatalog`adalah contoh menggunakan kelas yang tidak dapat diubah dengan DynamoDB Enhanced Client. Penggunaan kelas Immutable untuk kelas data yang dipetakan dibahas nanti dalam topik ini.

**`ProductCatalog`** kelas

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbIgnore;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbImmutable;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.math.BigDecimal;
import java.util.Objects;
import java.util.Set;

@DynamoDbImmutable(builder = ProductCatalog.Builder.class)
public class ProductCatalog implements Comparable<ProductCatalog> {
    private Integer id;
    private String title;
    private String isbn;
    private Set<String> authors;
    private BigDecimal price;


    private ProductCatalog(Builder builder){
        this.authors = builder.authors;
        this.id = builder.id;
        this.isbn = builder.isbn;
```

```
        this.price = builder.price;
        this.title = builder.title;
    }

    public static Builder builder(){ return new Builder(); }

    @DynamoDbPartitionKey
    public Integer id() { return id; }

    @DynamoDbSortKey
    public String title() { return title; }

    @DynamoDbSecondaryPartitionKey(indexNames = "products_by_isbn")
    public String isbn() { return isbn; }
    public Set<String> authors() { return authors; }
    public BigDecimal price() { return price; }


    public static final class Builder {
      private Integer id;
      private String title;
      private String isbn;
      private Set<String> authors;
      private BigDecimal price;
      private Builder(){}

      public Builder id(Integer id) { this.id = id; return this; }
      public Builder title(String title) { this.title = title; return this; }
      public Builder isbn(String ISBN) { this.isbn = ISBN; return this; }
      public Builder authors(Set<String> authors) { this.authors = authors; return
this; }
      public Builder price(BigDecimal price) { this.price = price; return this; }
      public ProductCatalog build() { return new ProductCatalog(this); }
 }

    @Override
    public String toString() {
        final StringBuffer sb = new StringBuffer("ProductCatalog{");
        sb.append("id=").append(id);
        sb.append(", title='").append(title).append('\'');
        sb.append(", isbn='").append(isbn).append('\'');
        sb.append(", authors=").append(authors);
        sb.append(", price=").append(price);
        sb.append('}');
```

```
        return sb.toString();
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        ProductCatalog that = (ProductCatalog) o;
        return id.equals(that.id) && title.equals(that.title) && Objects.equals(isbn,
 that.isbn) && Objects.equals(authors, that.authors) && Objects.equals(price,
 that.price);
    }

    @Override
    public int hashCode() {
        return Objects.hash(id, title, isbn, authors, price);
    }

    @Override
    @DynamoDbIgnore
    public int compareTo(ProductCatalog other) {
        if (this.id.compareTo(other.id) != 0){
            return this.id.compareTo(other.id);
        } else {
            return this.title.compareTo(other.title);
        }
    }
}
```

Dua contoh kode berikut dari penulisan batch menggambarkan verboseness dan kurangnya keamanan tipe saat menggunakan klien standar sebagai lawan dari klien yang ditingkatkan.

Bandingkan: Batch write menggunakan klien DynamoDB standar

```
    public static void batchWriteStandard(DynamoDbClient dynamoDbClient, String
 tableName) {

        Map<String, AttributeValue> catalogItem = Map.of(
                "authors", AttributeValue.builder().ss("a", "b").build(),
                "id", AttributeValue.builder().n("1").build(),
                "isbn", AttributeValue.builder().s("1-565-85698").build(),
                "title", AttributeValue.builder().s("Title 1").build(),
                "price", AttributeValue.builder().n("52.13").build());
```

```
        Map<String, AttributeValue> catalogItem2 = Map.of(
                "authors", AttributeValue.builder().ss("a", "b", "c").build(),
                "id", AttributeValue.builder().n("2").build(),
                "isbn", AttributeValue.builder().s("1-208-98073").build(),
                "title", AttributeValue.builder().s("Title 2").build(),
                "price", AttributeValue.builder().n("21.99").build());

        Map<String, AttributeValue> catalogItem3 = Map.of(
                "authors", AttributeValue.builder().ss("g", "k", "c").build(),
                "id", AttributeValue.builder().n("3").build(),
                "isbn", AttributeValue.builder().s("7-236-98618").build(),
                "title", AttributeValue.builder().s("Title 3").build(),
                "price", AttributeValue.builder().n("42.00").build());

        Set<WriteRequest> writeRequests = Set.of(
                WriteRequest.builder().putRequest(b -> b.item(catalogItem)).build(),
                WriteRequest.builder().putRequest(b -> b.item(catalogItem2)).build(),
                WriteRequest.builder().putRequest(b -> b.item(catalogItem3)).build());

        Map<String, Set<WriteRequest>> productCatalogItems = Map.of(
                "ProductCatalog", writeRequests);

        BatchWriteItemResponse response = dynamoDbClient.batchWriteItem(b ->
b.requestItems(productCatalogItems));

        logger.info("Unprocessed items: " + response.unprocessedItems().size());
    }
```

Bandingkan: Batch write menggunakan DynamoDB Enhanced Client

```
    public static void batchWriteEnhanced(DynamoDbTable<ProductCatalog> productCatalog)
{
        ProductCatalog prod = ProductCatalog.builder()
                .id(1)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(52.13))
                .title("Title 1")
                .build();
        ProductCatalog prod2 = ProductCatalog.builder()
                .id(2)
                .isbn("1-208-98073")
```

```
                .authors(new HashSet<>(Arrays.asList("a", "b", "c")))
                .price(BigDecimal.valueOf(21.99))
                .title("Title 2")
                .build();
        ProductCatalog prod3 = ProductCatalog.builder()
                .id(3)
                .isbn("7-236-98618")
                .authors(new HashSet<>(Arrays.asList("g", "k", "c")))
                .price(BigDecimal.valueOf(42.00))
                .title("Title 3")
                .build();

        BatchWriteResult batchWriteResult = DependencyFactory.enhancedClient()
                .batchWriteItem(b -> b.writeBatches(
                        WriteBatch.builder(ProductCatalog.class)
                                .mappedTableResource(productCatalog)
                                .addPutItem(prod).addPutItem(prod2).addPutItem(prod3)
                                .build()
                ));
        logger.info("Unprocessed items: " +
 batchWriteResult.unprocessedPutItemsForTable(productCatalog).size());
    }
```

Bekerja dengan kelas data yang tidak dapat diubah

Fitur pemetaan DynamoDB Enhanced Client API bekerja dengan kelas data yang tidak dapat diubah. Kelas yang tidak dapat diubah hanya memiliki getter dan memerlukan kelas pembangun yang digunakan SDK untuk membuat instance kelas. Alih-alih menggunakan `@DynamoDbBean` anotasi seperti yang ditunjukkan di kelas Pelanggan, kelas yang tidak dapat diubah menggunakan `@DynamoDbImmutable` anotasi, yang mengambil parameter yang menunjukkan kelas pembuat untuk digunakan.

Kelas berikut adalah versi yang tidak dapat diubah dari. `Customer`

```
package org.example.tests.model.immutable;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbImmutable;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
```

```
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.time.Instant;

@DynamoDbImmutable(builder = CustomerImmutable.Builder.class)
public class CustomerImmutable {
    private final String id;
    private final String name;
    private final String email;
    private final Instant regDate;

    private CustomerImmutable(Builder b) {
        this.id = b.id;
        this.email = b.email;
        this.name = b.name;
        this.regDate = b.regDate;
    }

    // This method will be automatically discovered and used by the TableSchema.
    public static Builder builder() { return new Builder(); }

    @DynamoDbPartitionKey
    public String id() { return this.id; }

    @DynamoDbSortKey
    public String email() { return this.email; }

    @DynamoDbSecondaryPartitionKey(indexNames = "customers_by_name")
    public String name() { return this.name; }

    @DynamoDbSecondarySortKey(indexNames = {"customers_by_date", "customers_by_name"})
    public Instant regDate() { return this.regDate; }

    public static final class Builder {
        private String id;
        private String email;
        private String name;
        private Instant regDate;

        // The private Builder constructor is visible to the enclosing
 CustomerImmutable class.
        private Builder() {}

        public Builder id(String id) { this.id = id; return this; }
```

```
        public Builder email(String email) { this.email = email; return this; }
        public Builder name(String name) { this.name = name; return this; }
        public Builder regDate(Instant regDate) { this.regDate = regDate; return
 this; }

        // This method will be automatically discovered and used by the TableSchema.
        public CustomerImmutable build() { return new CustomerImmutable(this); }
    }
}
```

Anda harus memenuhi persyaratan berikut ketika Anda membuat anotasi kelas data dengan. `@DynamoDbImmutable`

1. Setiap metode yang keduanya bukan penggantian `Object.class` dan belum dianotasi `@DynamoDbIgnore` harus menjadi pengambil untuk atribut tabel DynamoDB.
2. Setiap pengambil harus memiliki penyetel case-sensitive yang sesuai pada kelas builder.
3. Hanya satu dari kondisi konstruksi berikut yang harus dipenuhi.
   - Kelas builder harus memiliki konstruktor default publik.
   - Kelas data harus memiliki metode statis publik bernama `builder()` yang tidak mengambil parameter dan mengembalikan instance dari kelas builder. Opsi ini ditampilkan di kelas yang tidak dapat diubah`Customer`.
4. Kelas builder harus memiliki metode publik bernama `build()` yang tidak mengambil parameter dan mengembalikan instance dari kelas yang tidak dapat diubah.

Untuk membuat `TableSchema` untuk kelas abadi Anda, gunakan `fromImmutableClass()` metode pada `TableSchema` seperti yang ditunjukkan dalam cuplikan berikut.

```
static final TableSchema<CustomerImmutable> customerImmutableTableSchema =
                        TableSchema.fromImmutableClass(CustomerImmutable.class);
```

Sama seperti Anda dapat membuat tabel DynamoDB dari kelas yang bisa berubah, Anda dapat membuatnya dari kelas yang tidak dapat diubah dengan panggilan satu kali ke dari seperti yang ditunjukkan dalam contoh `createTable()` cuplikan berikut`DynamoDbTable`.

```
static void createTableFromImmutable(DynamoDbEnhancedClient enhancedClient, String
 tableName, DynamoDbWaiter waiter){
    // First, create an in-memory representation of the table using the 'table()'
 method of the DynamoDb Enhanced Client.
```

```
    // 'table()' accepts a name for the table and a TableSchema instance that you
 created previously.
    DynamoDbTable<CustomerImmutable> customerDynamoDbTable = enhancedClient
            .table(tableName, TableSchema.fromImmutableClass(CustomerImmutable.class));

    // Second, call the 'createTable()' method on the DynamoDbTable instance.
    customerDynamoDbTable.createTable();
    waiter.waitUntilTableExists(b -> b.tableName(tableName));
}
```

Gunakan perpustakaan pihak ketiga, seperti Lombok

Perpustakaan pihak ketiga, seperti Project Lombok, membantu menghasilkan kode boilerplate yang terkait dengan objek yang tidak dapat diubah. DynamoDB Enhanced Client API bekerja dengan pustaka ini selama kelas data mengikuti konvensi yang dirinci di bagian ini.

Contoh berikut menunjukkan `CustomerImmutable` kelas abadi dengan anotasi Lombok. Perhatikan bagaimana `onMethod` fitur Lombok menyalin anotasi DynamoDB berbasis atribut, seperti, ke kode yang dihasilkan. `@DynamoDbPartitionKey`

```
@Value
@Builder
@DynamoDbImmutable(builder = Customer.CustomerBuilder.class)
public class Customer {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;

    @Getter(onMethod_=@DynamoDbSortKey)
    private String email;

    @Getter(onMethod_=@DynamoDbSecondaryPartitionKey(indexNames = "customers_by_name"))
    private String name;

    @Getter(onMethod_=@DynamoDbSecondarySortKey(indexNames = {"customers_by_date",
 "customers_by_name"}))
    private Instant createdDate;
}
```

Gunakan ekspresi dan kondisi

Ekspresi dalam DynamoDB Enhanced Client API adalah representasi Java dari ekspresi DynamoDB.

DynamoDB Enhanced Client API menggunakan tiga jenis ekspresi:

Ekspresi

`Expression`Kelas digunakan ketika Anda menentukan kondisi dan filter.

`QueryConditional`

Jenis ekspresi ini merupakan kondisi utama untuk operasi kueri.

`UpdateExpression`

Kelas ini membantu Anda menulis ekspresi pembaruan DynamoDB dan saat ini digunakan dalam kerangka ekstensi saat Anda memperbarui item.

Anatomi ekspresi

Ekspresi terdiri dari yang berikut:

- Ekspresi string (wajib). String berisi ekspresi logika DynamoDB dengan nama placeholder untuk nama atribut dan nilai atribut.
- Peta nilai ekspresi (biasanya diperlukan).
- Peta nama ekspresi (opsional).

Gunakan pembangun untuk menghasilkan `Expression` objek yang mengambil bentuk umum berikut.

```
Expression expression = Expression.builder()
                            .expression(<String>)
                            .expressionNames(<Map>)
                            .expressionValues(<Map>)
                           .build()
```

`Expression`S biasanya membutuhkan peta nilai ekspresi. Peta memberikan nilai untuk placeholder dalam ekspresi string. Kunci peta terdiri dari nama placeholder yang didahului dengan titik dua (`:`) dan nilai peta adalah instance dari. AttributeValue AttributeValuesKelas memiliki metode kenyamanan untuk menghasilkan `AttributeValue` instance dari literal. Atau, Anda dapat menggunakan `AttributeValue.Builder` untuk menghasilkan `AttributeValue` instance.

Cuplikan berikut menunjukkan peta dengan dua entri setelah baris komentar 2. String diteruskan ke `expression()` metode, ditampilkan setelah baris komentar 1, berisi placeholder yang DynamoDB

menyelesaikan sebelum melakukan operasi. Cuplikan ini tidak berisi peta nama ekspresi, karena harga adalah nama atribut yang diizinkan.

```
    public static void scanAsync(DynamoDbAsyncTable productCatalog) {
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                .attributesToProject("id", "title", "authors", "price")
                .filterExpression(Expression.builder()
                        // 1. :min_value and :max_value are placeholders for the values
provided by the map
                        .expression("price >= :min_value AND price <= :max_value")
                        // 2. Two values are needed for the expression and each is
supplied as a map entry.
                        .expressionValues(
                                Map.of( ":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();
```

Jika nama atribut dalam tabel DynamoDB adalah kata cadangan, dimulai dengan angka, atau berisi spasi, peta nama ekspresi diperlukan untuk. `Expression`

Misalnya, jika nama atribut *`1price`* bukan *`price`* dalam contoh kode sebelumnya, contoh akan perlu dimodifikasi seperti yang ditunjukkan pada contoh berikut.

```
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .filterExpression(Expression.builder()
                        .expression("#price >= :min_value AND #price <= :max_value")
                        .expressionNames( Map.of("#price", "1price") )
                        .expressionValues(
                                Map.of(":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();
```

Sebuah placeholder untuk nama ekspresi dimulai dengan tanda pound ()#. Entri untuk peta nama ekspresi menggunakan placeholder sebagai kunci dan nama atribut sebagai nilai. Peta ditambahkan ke pembuat ekspresi dengan `expressionNames()` metode. DynamoDB menyelesaikan nama atribut sebelum melakukan operasi.

Nilai ekspresi tidak diperlukan jika fungsi digunakan dalam ekspresi string. Contoh fungsi ekspresi adalah`attribute_exists(`*`<attribute_name>`*`)`.

Contoh berikut membangun sebuah `Expression` yang menggunakan fungsi DynamoDB. String ekspresi dalam contoh ini tidak menggunakan placeholder. Ekspresi ini dapat digunakan pada `putItem` operasi untuk memeriksa apakah item sudah ada dalam database dengan nilai `movie` atribut sama dengan `movie` atribut objek data.

```
Expression exp = Expression.builder().expression("attribute_not_exists
 (movie)").build();
```

Panduan Pengembang DynamoDB berisi informasi lengkap tentang ekspresi tingkat rendah yang digunakan dengan DynamoDB.

Ekspresi kondisi dan kondisional

Ketika Anda menggunakan`putItem()`,`updateItem()`, dan `deleteItem()` metode, dan juga ketika Anda menggunakan transaksi dan operasi batch, Anda menggunakan `Expression` objek untuk menentukan kondisi yang DynamoDB harus memenuhi untuk melanjutkan operasi. Ekspresi ini diberi nama ekspresi kondisi. Sebagai contoh, lihat ekspresi kondisi yang digunakan dalam `addDeleteItem()` metode (setelah baris komentar 1) dari contoh transaksi yang ditunjukkan dalam panduan ini.

Ketika Anda bekerja dengan `query()` metode, suatu kondisi dinyatakan sebagai a `QueryConditional`. `QueryConditional`Kelas memiliki beberapa metode kenyamanan statis yang membantu Anda menulis kriteria yang menentukan item mana yang akan dibaca dari DynamoDB.

Sebagai contoh`QueryConditionals`, lihat contoh kode pertama dari the section called "`Query`contoh metode" bagian panduan ini.

Ekspresi Filter

Ekspresi filter digunakan dalam operasi pemindaian dan kueri untuk memfilter item yang dikembalikan.

Ekspresi filter diterapkan setelah semua data dibaca dari database, sehingga biaya baca sama seperti jika tidak ada filter. Panduan Pengembang Amazon DynamoDB memiliki informasi lebih lanjut tentang penggunaan ekspresi filter untuk operasi kueri dan pemindaian.

Contoh berikut menunjukkan ekspresi filter ditambahkan ke permintaan scan. Kriteria membatasi barang yang dikembalikan ke barang dengan harga antara 8.00 dan 80,00 inklusif.

```
        Map<String, AttributeValue> expressionValues = Map.of(
                ":min_value", numberValue(8.00),
                ":max_value", numberValue(80.00));

        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                // 1. the 'attributesToProject()' method allows you to specify which
values you want returned.
                .attributesToProject("id", "title", "authors", "price")
                // 2. Filter expression limits the items returned that match the
provided criteria.
                .filterExpression(Expression.builder()
                        .expression("price >= :min_value AND price <= :max_value")
                        .expressionValues(expressionValues)
                        .build())
                .build();
```

Ekspresi pembaruan

Metode DynamoDB Enhanced Client `updateItem()` menyediakan cara standar untuk memperbarui item di DynamoDB. Namun, ketika Anda memerlukan lebih banyak fungsionalitas, UpdateExpressionsberikan representasi type-safe dari sintaks ekspresi pembaruan DynamoDB. Misalnya, Anda dapat menggunakan `UpdateExpressions` untuk meningkatkan nilai tanpa terlebih dahulu membaca item dari DynamoDB, atau menambahkan anggota individu ke daftar. Ekspresi pembaruan saat ini tersedia di ekstensi khusus untuk `updateItem()` metode ini.

Untuk contoh yang menggunakan ekspresi pembaruan, lihat contoh ekstensi kustom dalam panduan ini.

Informasi selengkapnya tentang ekspresi pembaruan tersedia di Panduan Pengembang Amazon DynamoDB.

Bekerja dengan hasil paginasi: pemindaian dan kueri

Metode*scan*, *query* dan *batch* metode DynamoDB Enhanced Client API mengembalikan respons dengan satu halaman atau beberapa. Sebuah halaman berisi satu atau lebih item. Kode Anda dapat memproses respons per halaman atau dapat memproses item individual.

Respons paginasi yang dikembalikan oleh `DynamoDbEnhancedClient` klien sinkron mengembalikan PageIterableobjek, sedangkan respons yang dikembalikan oleh `DynamoDbEnhancedAsyncClient` asinkron mengembalikan objek. PagePublisher

Bagian ini melihat pemrosesan hasil paginasi dan memberikan contoh yang menggunakan pemindaian dan kueri APIs.

Memindai tabel

`scan`Metode SDK sesuai dengan operasi DynamoDB dengan nama yang sama. DynamoDB Enhanced Client API menawarkan opsi yang sama tetapi menggunakan model objek yang sudah dikenal dan menangani pagination untuk Anda.

Pertama, kita menjelajahi `PageIterable` antarmuka dengan melihat `scan` metode kelas pemetaan sinkron,. DynamoDbTable

Gunakan API sinkron

Contoh berikut menunjukkan `scan` metode yang menggunakan ekspresi untuk memfilter item yang dikembalikan. ProductCatalogIni adalah objek model yang ditunjukkan sebelumnya.

Ekspresi pemfilteran yang ditampilkan setelah baris komentar 2 membatasi `ProductCatalog` item yang dikembalikan ke item dengan nilai harga antara 8,00 dan 80,00 secara inklusif.

Contoh ini juga mengecualikan `isbn` nilai dengan menggunakan `attributesToProject` metode yang ditampilkan setelah baris komentar 1.

Setelah komentar baris 3, `PageIterable` objek`pagedResults`,, dikembalikan oleh `scan` metode. `stream`Metode `PageIterable` mengembalikan `java.util.Stream`objek, yang dapat Anda gunakan untuk memproses halaman. Dalam contoh ini, jumlah halaman dihitung dan dicatat.

Dimulai dengan baris komentar 4, contoh menunjukkan dua variasi mengakses `ProductCatalog` item. Versi setelah baris komentar 4a mengalir melalui setiap halaman dan mengurutkan dan mencatat item di setiap halaman. Versi setelah baris komentar 4b melewatkan iterasi halaman dan mengakses item secara langsung.

`PageIterable`Antarmuka menawarkan beberapa cara untuk memproses hasil karena dua antarmuka induknya— `java.lang.Iterable`dan `SdkIterable`. `Iterable`membawa`forEach`, `iterator` dan `spliterator` metode, dan `SdkIterable` membawa `stream` metode.

```
    public static void scanSync(DynamoDbTable<ProductCatalog> productCatalog) {

        Map<String, AttributeValue> expressionValues = Map.of(
                ":min_value", numberValue(8.00),
```

```
                ":max_value", numberValue(80.00));

        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                // 1. the 'attributesToProject()' method allows you to specify which
values you want returned.
                .attributesToProject("id", "title", "authors", "price")
                // 2. Filter expression limits the items returned that match the
provided criteria.
                .filterExpression(Expression.builder()
                        .expression("price >= :min_value AND price <= :max_value")
                        .expressionValues(expressionValues)
                        .build())
                .build();

        // 3. A PageIterable object is returned by the scan method.
        PageIterable<ProductCatalog> pagedResults = productCatalog.scan(request);
        logger.info("page count: {}", pagedResults.stream().count());

        // 4. Log the returned ProductCatalog items using two variations.
        // 4a. This version sorts and logs the items of each page.
        pagedResults.stream().forEach(p -> p.items().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(
                        item -> logger.info(item.toString())
                ));
        // 4b. This version sorts and logs all items for all pages.
        pagedResults.items().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(
                        item -> logger.info(item.toString())
                );
    }
```

### Gunakan API asinkron

`scan`Metode asinkron mengembalikan hasil sebagai objek. `PagePublisher` `PagePublisher`Antarmuka memiliki dua `subscribe` metode yang dapat Anda gunakan untuk memproses halaman respons. Salah satu `subscribe` metode berasal dari antarmuka `org.reactivestreams.Publisher` induk. Untuk memproses halaman menggunakan opsi pertama ini, berikan `Subscriber` instance ke `subscribe` metode. Contoh pertama yang berikut menunjukkan penggunaan `subscribe` metode.

`subscribe`Metode kedua berasal dari SdkPublisherantarmuka. Versi ini `subscribe` menerima `Consumer`bukan a`Subscriber`. Variasi `subscribe` metode ini ditunjukkan pada contoh kedua berikut.

Contoh berikut menunjukkan versi asinkron dari `scan` metode yang menggunakan ekspresi filter yang sama yang ditunjukkan pada contoh sebelumnya.

Setelah baris komentar 3, `DynamoDbAsyncTable.scan` mengembalikan `PagePublisher` objek. Pada baris berikutnya, kode membuat instance `org.reactivestreams.Subscriber` antarmuka,`ProductCatalogSubscriber`, yang berlangganan baris `PagePublisher` setelah komentar 4.

`Subscriber`Objek mengumpulkan `ProductCatalog` item dari setiap halaman dalam `onNext` metode setelah baris komentar 8 dalam contoh `ProductCatalogSubscriber` kelas. Item disimpan dalam `List` variabel pribadi dan diakses dalam kode panggilan dengan `ProductCatalogSubscriber.getSubscribedItems()` metode. Ini disebut setelah baris komentar 5.

Setelah daftar diambil, kode mengurutkan semua `ProductCatalog` item berdasarkan harga dan mencatat setiap item.

CountDownLatchDi `ProductCatalogSubscriber` kelas memblokir thread panggilan sampai semua item telah ditambahkan ke daftar sebelum melanjutkan setelah baris komentar 5.

```
    public static void scanAsync(DynamoDbAsyncTable productCatalog) {
        ScanEnhancedRequest request = ScanEnhancedRequest.builder()
                .consistentRead(true)
                .attributesToProject("id", "title", "authors", "price")
                .filterExpression(Expression.builder()
                        // 1. :min_value and :max_value are placeholders for the values
provided by the map
                        .expression("price >= :min_value AND price <= :max_value")
                        // 2. Two values are needed for the expression and each is
supplied as a map entry.
                        .expressionValues(
                                Map.of( ":min_value", numberValue(8.00),
                                        ":max_value", numberValue(400_000.00)))
                        .build())
                .build();

        // 3. A PagePublisher object is returned by the scan method.
```

```
        PagePublisher<ProductCatalog> pagePublisher = productCatalog.scan(request);
        ProductCatalogSubscriber subscriber = new ProductCatalogSubscriber();
        // 4. Subscribe the ProductCatalogSubscriber to the PagePublisher.
        pagePublisher.subscribe(subscriber);
        // 5. Retrieve all collected ProductCatalog items accumulated by the
subscriber.
        subscriber.getSubscribedItems().stream()
                .sorted(Comparator.comparing(ProductCatalog::price))
                .forEach(item ->
                        logger.info(item.toString()));
        // 6. Use a Consumer to work through each page.
        pagePublisher.subscribe(page -> page
                        .items().stream()
                        .sorted(Comparator.comparing(ProductCatalog::price))
                        .forEach(item ->
                                logger.info(item.toString())))
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
        // 7. Use a Consumer to work through each ProductCatalog item.
        pagePublisher.items()
                .subscribe(product -> logger.info(product.toString()))
                .exceptionally(failure -> {
                    logger.error("ERROR  - ", failure);
                    return null;
                })
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
    }
```

```
    private static class ProductCatalogSubscriber implements
Subscriber<Page<ProductCatalog>> {
        private CountDownLatch latch = new CountDownLatch(1);
        private Subscription subscription;
        private List<ProductCatalog> itemsFromAllPages = new ArrayList<>();

        @Override
        public void onSubscribe(Subscription sub) {
            subscription = sub;
            subscription.request(1L);
            try {
                latch.await(); // Called by main thread blocking it until latch is
released.
            } catch (InterruptedException e) {
```

```
                throw new RuntimeException(e);
            }
        }

        @Override
        public void onNext(Page<ProductCatalog> productCatalogPage) {
            // 8. Collect all the ProductCatalog instances in the page, then ask the
publisher for one more page.
            itemsFromAllPages.addAll(productCatalogPage.items());
            subscription.request(1L);
        }

        @Override
        public void onError(Throwable throwable) {
        }

        @Override
        public void onComplete() {
            latch.countDown(); // Call by subscription thread; latch releases.
        }

        List<ProductCatalog> getSubscribedItems() {
            return this.itemsFromAllPages;
        }
    }
```

Contoh cuplikan berikut menggunakan versi `PagePublisher.subscribe` metode yang menerima baris `Consumer` setelah komentar 6. Parameter lambda Java mengkonsumsi halaman, yang selanjutnya memproses setiap item. Dalam contoh ini, setiap halaman diproses dan item pada setiap halaman diurutkan dan kemudian dicatat.

```
        // 6. Use a Consumer to work through each page.
        pagePublisher.subscribe(page -> page
                        .items().stream()
                        .sorted(Comparator.comparing(ProductCatalog::price))
                        .forEach(item ->
                                logger.info(item.toString())))
                .join(); // If needed, blocks the subscribe() method thread until it is
finished processing.
```

`items`Metode `PagePublisher` membuka bungkus contoh model sehingga kode Anda dapat memproses item secara langsung. Pendekatan ini ditunjukkan dalam cuplikan berikut.

```
        // 7. Use a Consumer to work through each ProductCatalog item.
        pagePublisher.items()
                .subscribe(product -> logger.info(product.toString()))
                .exceptionally(failure -> {
                    logger.error("ERROR  - ", failure);
                    return null;
                })
                .join(); // If needed, blocks the subscribe() method thread until it is
 finished processing.
```

Mengkueri Tabel

Anda dapat menggunakan DynamoDB Enhanced Client untuk menanyakan tabel Anda dan mengambil beberapa item yang cocok dengan kriteria tertentu. `query()`Metode ini menemukan item berdasarkan nilai kunci primer menggunakan `@DynamoDbPartitionKey` dan `@DynamoDbSortKey` anotasi opsional yang ditentukan pada kelas data Anda.

`query()`Metode ini memerlukan nilai kunci partisi dan secara opsional menerima kondisi kunci pengurutan untuk lebih menyempurnakan hasil. Seperti `scan` API, kueri mengembalikan a `PageIterable` untuk panggilan sinkron dan a `PagePublisher` untuk panggilan asinkron.

**`Query`**contoh metode

Contoh kode `query()` metode yang mengikuti menggunakan `MovieActor` kelas. Kelas data mendefinisikan kunci primer komposit yang terdiri dari **`movie`**atribut sebagai kunci partisi dan **`actor`**atribut sebagai kunci pengurutan.

**`MovieActor`** kelas

```
package org.example.tests.model;

import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbAttribute;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.util.Objects;
```

```
@DynamoDbBean
public class MovieActor implements Comparable<MovieActor> {

    private String movieName;
    private String actorName;
    private String actingAward;
    private Integer actingYear;
    private String actingSchoolName;

    @DynamoDbPartitionKey
    @DynamoDbAttribute("movie")
    public String getMovieName() {
        return movieName;
    }

    public void setMovieName(String movieName) {
        this.movieName = movieName;
    }

    @DynamoDbSortKey
    @DynamoDbAttribute("actor")
    public String getActorName() {
        return actorName;
    }

    public void setActorName(String actorName) {
        this.actorName = actorName;
    }

    @DynamoDbSecondaryPartitionKey(indexNames = "acting_award_year")
    @DynamoDbAttribute("actingaward")
    public String getActingAward() {
        return actingAward;
    }

    public void setActingAward(String actingAward) {
        this.actingAward = actingAward;
    }

    @DynamoDbSecondarySortKey(indexNames = {"acting_award_year", "movie_year"})
    @DynamoDbAttribute("actingyear")
    public Integer getActingYear() {
        return actingYear;
```

```
    }

    public void setActingYear(Integer actingYear) {
        this.actingYear = actingYear;
    }

    @DynamoDbAttribute("actingschoolname")
    public String getActingSchoolName() {
        return actingSchoolName;
    }

    public void setActingSchoolName(String actingSchoolName) {
        this.actingSchoolName = actingSchoolName;
    }

    @Override
    public String toString() {
        final StringBuffer sb = new StringBuffer("MovieActor{");
        sb.append("movieName='").append(movieName).append('\'');
        sb.append(", actorName='").append(actorName).append('\'');
        sb.append(", actingAward='").append(actingAward).append('\'');
        sb.append(", actingYear=").append(actingYear);
        sb.append(", actingSchoolName='").append(actingSchoolName).append('\'');
        sb.append('}');
        return sb.toString();
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        MovieActor that = (MovieActor) o;
        return Objects.equals(movieName, that.movieName) && Objects.equals(actorName,
that.actorName) && Objects.equals(actingAward, that.actingAward) &&
Objects.equals(actingYear, that.actingYear) && Objects.equals(actingSchoolName,
that.actingSchoolName);
    }

    @Override
    public int hashCode() {
        return Objects.hash(movieName, actorName, actingAward, actingYear,
actingSchoolName);
    }
```

```
    @Override
    public int compareTo(MovieActor o) {
        if (this.movieName.compareTo(o.movieName) != 0){
            return this.movieName.compareTo(o.movieName);
        } else {
            return this.actorName.compareTo(o.actorName);
        }
    }
}
```

Contoh kode yang mengikuti kueri terhadap item berikut.

Item dalam **`MovieActor`** tabel

```
MovieActor{movieName='movie01', actorName='actor0', actingAward='actingaward0',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
MovieActor{movieName='movie02', actorName='actor0', actingAward='actingaward0',
 actingYear=2002, actingSchoolName='null'}
MovieActor{movieName='movie02', actorName='actor1', actingAward='actingaward1',
 actingYear=2002, actingSchoolName='actingschool1'}
MovieActor{movieName='movie02', actorName='actor2', actingAward='actingaward2',
 actingYear=2002, actingSchoolName='actingschool2'}
MovieActor{movieName='movie02', actorName='actor3', actingAward='actingaward3',
 actingYear=2002, actingSchoolName='null'}
MovieActor{movieName='movie02', actorName='actor4', actingAward='actingaward4',
 actingYear=2002, actingSchoolName='actingschool4'}
MovieActor{movieName='movie03', actorName='actor0', actingAward='actingaward0',
 actingYear=2003, actingSchoolName='null'}
MovieActor{movieName='movie03', actorName='actor1', actingAward='actingaward1',
 actingYear=2003, actingSchoolName='actingschool1'}
MovieActor{movieName='movie03', actorName='actor2', actingAward='actingaward2',
 actingYear=2003, actingSchoolName='actingschool2'}
MovieActor{movieName='movie03', actorName='actor3', actingAward='actingaward3',
 actingYear=2003, actingSchoolName='null'}
```

```
MovieActor{movieName='movie03', actorName='actor4', actingAward='actingaward4',
 actingYear=2003, actingSchoolName='actingschool4'}
```

Kode berikut mendefinisikan dua `QueryConditional` contoh: `keyEqual` (setelah baris komentar 1) dan `sortGreaterThanOrEqualTo` (setelah baris komentar 1a).

Item kueri dengan kunci partisi

`keyEqual`Instance mencocokkan item dengan nilai kunci partisi dari **`movie01`**.

Contoh ini juga mendefinisikan ekspresi filter setelah baris komentar 2 yang menyaring item apa pun yang tidak memiliki **`actingschoolname`**nilai.

`QueryEnhancedRequest`Menggabungkan kondisi kunci dan ekspresi filter untuk kueri.

```
    public static void query(DynamoDbTable movieActorTable) {

        // 1. Define a QueryConditional instance to return items matching a partition
value.
        QueryConditional keyEqual = QueryConditional.keyEqualTo(b ->
b.partitionValue("movie01"));
        // 1a. Define a QueryConditional that adds a sort key criteria to the partition
value criteria.
        QueryConditional sortGreaterThanOrEqualTo =
QueryConditional.sortGreaterThanOrEqualTo(b ->
b.partitionValue("movie01").sortValue("actor2"));
        // 2. Define a filter expression that filters out items whose attribute value
is null.
        final Expression filterOutNoActingschoolname =
Expression.builder().expression("attribute_exists(actingschoolname)").build();

        // 3. Build the query request.
        QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder()
                .queryConditional(keyEqual)
                .filterExpression(filterOutNoActingschoolname)
                .build();
        // 4. Perform the query using the "keyEqual" conditional and filter expression.
        PageIterable<MovieActor> pagedResults = movieActorTable.query(tableQuery);
        logger.info("page count: {}", pagedResults.stream().count()); // Log  number of
pages.

        pagedResults.items().stream()
                .sorted()
```

```
                .forEach(
                        item -> logger.info(item.toString()) // Log the sorted list of
 items.
                );
```

Example— Output menggunakan keyEqual query kondisional

Berikut ini adalah output dari menjalankan metode. Output menampilkan item dengan `movieName` nilai movie01 dan tidak menampilkan item yang `actingSchoolName` sama dengan. **`null`**

```
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:46 - page count: 1
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
2023-03-05 13:11:05 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

Item kueri dengan kunci partisi dan kunci sortir

`sortGreaterThanOrEqualToQueryConditional`Menyempurnakan kecocokan kunci partisi (movie01) dengan menambahkan kondisi kunci pengurutan untuk nilai yang lebih besar dari atau sama dengan aktor2.

`QueryConditional`metode yang dimulai dengan `sort` memerlukan nilai kunci partisi untuk mencocokkan dan selanjutnya menyempurnakan kueri dengan perbandingan berdasarkan nilai kunci sortir. `Sort`dalam nama metode tidak berarti hasilnya diurutkan, tetapi nilai kunci sortir akan digunakan untuk perbandingan.

Dalam cuplikan berikut, kami mengubah permintaan kueri yang ditampilkan sebelumnya setelah baris komentar 3. Cuplikan ini menggantikan kueri “KeyEqual” bersyarat dengan syarat kueri "sortGreaterThanOrEqualTo" yang ditentukan setelah baris komentar 1a. Kode berikut juga menghapus ekspresi filter.

```
        QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder()
                .queryConditional(sortGreaterThanOrEqualTo).build();
```

Example— Output menggunakan sortGreaterThanOrEqualTo query kondisional

Output berikut menampilkan hasil dari query. Kueri mengembalikan item yang memiliki **`movieName`** nilai sama dengan movie01 dan hanya item yang memiliki **`actorName`** nilai yang lebih besar dari atau sama dengan actor2. Karena kita menghapus filter, query mengembalikan item yang tidak memiliki nilai untuk `actingSchoolName` atribut.

```
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:46 - page count: 1
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
2023-03-05 13:15:00 [main] INFO  org.example.tests.QueryDemo:51 -
 MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

Lakukan operasi batch

DynamoDB Enhanced Client API menawarkan dua metode batch `batchGetItem`, () dan ()`batchWriteItem`.

Contoh **`batchGetItem()`**

Dengan `DynamoDbEnhancedClient.batchGetItem()`metode ini, Anda dapat mengambil hingga 100 item individual di beberapa tabel dalam satu permintaan keseluruhan. Contoh berikut menggunakan kelas `Customer`dan `MovieActor`data yang ditunjukkan sebelumnya.

Dalam contoh setelah baris 1 dan 2, Anda membangun `ReadBatch` objek yang kemudian Anda tambahkan sebagai parameter ke `batchGetItem()` metode setelah baris komentar 3.

Kode setelah baris komentar 1 membangun batch untuk dibaca dari `Customer` tabel. Kode setelah baris komentar 1a menunjukkan penggunaan `GetItemEnhancedRequest` pembangun yang mengambil nilai kunci primer dan nilai kunci pengurutan untuk menentukan item yang akan dibaca. Jika kelas data memiliki kunci komposit, Anda harus memberikan nilai kunci partisi dan nilai kunci sortir.

Berbeda dengan menentukan nilai kunci untuk meminta item, Anda dapat menggunakan kelas data untuk meminta item seperti yang ditunjukkan setelah baris komentar 1b. SDK mengekstrak nilai kunci di balik layar sebelum mengirimkan permintaan.

Saat Anda menentukan item menggunakan pendekatan berbasis kunci seperti yang ditunjukkan dalam dua pernyataan setelah 2a, Anda juga dapat menentukan bahwa DynamoDB harus melakukan pembacaan yang sangat konsisten. Ketika `consistentRead()` metode ini digunakan, itu harus digunakan pada semua item yang diminta untuk tabel yang sama.

Untuk mengambil item yang DynamoDB temukan, gunakan metode `resultsForTable()` yang ditampilkan setelah baris komentar 4. Panggil metode untuk setiap tabel yang dibaca dalam permintaan. `resultsForTable()`mengembalikan daftar item yang ditemukan yang dapat Anda proses menggunakan `java.util.List` metode apapun. Contoh ini mencatat setiap item.

Untuk menemukan item yang DynamoDB tidak memproses, gunakan pendekatan setelah baris komentar 5. `BatchGetResultPage`Kelas memiliki `unprocessedKeysForTable()` metode yang memberi Anda akses ke setiap kunci yang belum diproses. Referensi BatchGetItem API memiliki informasi lebih lanjut tentang situasi yang menghasilkan item yang tidak diproses.

```
    public static void batchGetItemExample(DynamoDbEnhancedClient enhancedClient,
                                           DynamoDbTable<Customer> customerTable,
                                           DynamoDbTable<MovieActor> movieActorTable) {

        Customer customer2 = new Customer();
        customer2.setId("2");
        customer2.setEmail("cust2@example.org");

        // 1. Build a batch to read from the Customer table.
        ReadBatch customerBatch = ReadBatch.builder(Customer.class)
                .mappedTableResource(customerTable)
                // 1a. Specify the primary key value and sort key value for the item.
                .addGetItem(b -> b.key(k ->
k.partitionValue("1").sortValue("cust1@orgname.org")))
                // 1b. Alternatively, supply a data class instances to provide the
primary key values.
                .addGetItem(customer2)
                .build();

        // 2. Build a batch to read from the MovieActor table.
        ReadBatch moveActorBatch = ReadBatch.builder(MovieActor.class)
                .mappedTableResource(movieActorTable)
                // 2a. Call consistentRead(Boolean.TRUE) for each item for the same
table.
                .addGetItem(b -> b.key(k ->
k.partitionValue("movie01").sortValue("actor1")).consistentRead(Boolean.TRUE))
```

```
                .addGetItem(b -> b.key(k ->
 k.partitionValue("movie01").sortValue("actor4")).consistentRead(Boolean.TRUE))
                .build();

        // 3. Add ReadBatch objects to the request.
        BatchGetResultPageIterable resultPages = enhancedClient.batchGetItem(b ->
 b.readBatches(customerBatch, moveActorBatch));

        // 4. Retrieve the successfully requested items from each table.
        resultPages.resultsForTable(customerTable).forEach(item ->
 logger.info(item.toString()));
        resultPages.resultsForTable(movieActorTable).forEach(item ->
 logger.info(item.toString()));

        // 5. Retrieve the keys of the items requested but not processed by the
 service.
        resultPages.forEach((BatchGetResultPage pageResult) -> {
            pageResult.unprocessedKeysForTable(customerTable).forEach(key ->
 logger.info("Unprocessed item key: " + key.toString()));
            pageResult.unprocessedKeysForTable(movieActorTable).forEach(key ->
 logger.info("Unprocessed item key: " + key.toString()));
        });
    }
```

Asumsikan bahwa item berikut ada di dua tabel sebelum menjalankan kode contoh.

Item dalam tabel

```
Customer [id=1, name=CustName1, email=cust1@example.org,
 regDate=2023-03-31T15:46:27.688Z]
Customer [id=2, name=CustName2, email=cust2@example.org,
 regDate=2023-03-31T15:46:28.688Z]
Customer [id=3, name=CustName3, email=cust3@example.org,
 regDate=2023-03-31T15:46:29.688Z]
Customer [id=4, name=CustName4, email=cust4@example.org,
 regDate=2023-03-31T15:46:30.688Z]
Customer [id=5, name=CustName5, email=cust5@example.org,
 regDate=2023-03-31T15:46:31.689Z]
MovieActor{movieName='movie01', actorName='actor0', actingAward='actingaward0',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
MovieActor{movieName='movie01', actorName='actor2', actingAward='actingaward2',
 actingYear=2001, actingSchoolName='actingschool2'}
```

```
MovieActor{movieName='movie01', actorName='actor3', actingAward='actingaward3',
 actingYear=2001, actingSchoolName='null'}
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
```

Output berikut menunjukkan item yang dikembalikan dan dicatat setelah baris komentar 4.

```
Customer [id=1, name=CustName1, email=cust1@example.org,
 regDate=2023-03-31T15:46:27.688Z]
Customer [id=2, name=CustName2, email=cust2@example.org,
 regDate=2023-03-31T15:46:28.688Z]
MovieActor{movieName='movie01', actorName='actor4', actingAward='actingaward4',
 actingYear=2001, actingSchoolName='actingschool4'}
MovieActor{movieName='movie01', actorName='actor1', actingAward='actingaward1',
 actingYear=2001, actingSchoolName='actingschool1'}
```

### Contoh **batchWriteItem()**

`batchWriteItem()`Metode ini menempatkan atau menghapus beberapa item dalam satu atau lebih tabel. Anda dapat menentukan hingga 25 operasi put atau hapus individu dalam permintaan. Contoh berikut menggunakan kelas `ProductCatalog`dan `MovieActor`model yang ditunjukkan sebelumnya.

`WriteBatch`objek dibangun setelah baris komentar 1 dan 2. Untuk `ProductCatalog` tabel, kode menempatkan satu item dan menghapus satu item. Untuk `MovieActor` tabel setelah baris komentar 2, kode menempatkan dua item dan menghapus satu.

`batchWriteItem`Metode ini disebut setelah baris komentar 3. `builder`Parameter menyediakan permintaan batch untuk setiap tabel.

`BatchWriteResult`Objek yang dikembalikan menyediakan metode terpisah untuk setiap operasi untuk melihat permintaan yang belum diproses. Kode setelah baris komentar 4a menyediakan kunci untuk permintaan penghapusan yang belum diproses dan kode setelah baris komentar 4b menyediakan item put yang belum diproses.

```
    public static void batchWriteItemExample(DynamoDbEnhancedClient enhancedClient,
                                             DynamoDbTable<ProductCatalog>
catalogTable,
                                             DynamoDbTable<MovieActor> movieActorTable)
{

        // 1. Build a batch to write to the ProductCatalog table.
```

```
        WriteBatch products = WriteBatch.builder(ProductCatalog.class)
                .mappedTableResource(catalogTable)
                .addPutItem(b -> b.item(getProductCatItem1()))
                .addDeleteItem(b -> b.key(k -> k
                        .partitionValue(getProductCatItem2().id())
                        .sortValue(getProductCatItem2().title())))
                .build();

        // 2. Build a batch to write to the MovieActor table.
        WriteBatch movies = WriteBatch.builder(MovieActor.class)
                .mappedTableResource(movieActorTable)
                .addPutItem(getMovieActorYeoh())
                .addPutItem(getMovieActorBlanchettPartial())
                .addDeleteItem(b -> b.key(k -> k
                        .partitionValue(getMovieActorStreep().getMovieName())
                        .sortValue(getMovieActorStreep().getActorName())))
                .build();

        // 3. Add WriteBatch objects to the request.
        BatchWriteResult batchWriteResult = enhancedClient.batchWriteItem(b ->
b.writeBatches(products, movies));
        // 4. Retrieve keys for items the service did not process.
        // 4a. 'unprocessedDeleteItemsForTable()' returns keys for delete requests that
did not process.
        if (batchWriteResult.unprocessedDeleteItemsForTable(movieActorTable).size() >
0) {

batchWriteResult.unprocessedDeleteItemsForTable(movieActorTable).forEach(key ->
                    logger.info(key.toString()));
        }
        // 4b. 'unprocessedPutItemsForTable()' returns keys for put requests that did
not process.
        if (batchWriteResult.unprocessedPutItemsForTable(catalogTable).size() > 0) {
            batchWriteResult.unprocessedPutItemsForTable(catalogTable).forEach(key ->
                    logger.info(key.toString()));
        }
    }
```

Metode pembantu berikut menyediakan objek model untuk operasi put dan delete.

Metode pembantu

```
    public static ProductCatalog getProductCatItem1() {
        return ProductCatalog.builder()
```

```
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatItem2() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchettPartial() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Blue Jasmine");
        movieActor.setActingYear(2023);
        movieActor.setActingAward("Best Actress");
        return movieActor;
    }

    public static MovieActor getMovieActorStreep() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Meryl Streep");
        movieActor.setMovieName("Sophie's Choice");
        movieActor.setActingYear(1982);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Yale School of Drama");
        return movieActor;
    }

    public static MovieActor getMovieActorYeoh(){
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Michelle Yeoh");
        movieActor.setMovieName("Everything Everywhere All at Once");
        movieActor.setActingYear(2023);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Royal Academy of Dance");
        return movieActor;
```

```
    }
```

Asumsikan bahwa tabel berisi item berikut sebelum Anda menjalankan kode contoh.

```
MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
```

Setelah kode contoh selesai, tabel berisi item berikut.

```
MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='null'}
MovieActor{movieName='Everything Everywhere All at Once', actorName='Michelle Yeoh',
 actingAward='Best Actress', actingYear=2023, actingSchoolName='Royal Academy of
 Dance'}
ProductCatalog{id=2, title='Title 55', isbn='1-565-85698', authors=[a, b], price=30.22}
```

Perhatikan dalam `MovieActor` tabel bahwa item `Blue Jasmine` film telah diganti dengan item yang digunakan dalam permintaan put yang diperoleh melalui metode `getMovieActorBlanchettPartial()` pembantu. Jika nilai atribut kacang data tidak disediakan, nilai dalam database dihapus. Inilah sebabnya mengapa hasilnya `actingSchoolName` nol untuk item `Blue Jasmine` film.

> **Note**
>
> Meskipun dokumentasi API menunjukkan bahwa ekspresi kondisi dapat digunakan dan bahwa kapasitas yang dikonsumsi serta metrik pengumpulan dapat dikembalikan dengan permintaan put dan delete individual, ini tidak terjadi dalam skenario penulisan batch. Untuk meningkatkan kinerja operasi batch, opsi individual ini diabaikan.

Lakukan operasi transaksi

DynamoDB Enhanced Client API menyediakan dan metode`transactGetItems()`. `transactWriteItems()` Metode transaksi SDK for Java memberikan atomisitas, konsistensi, isolasi, dan daya tahan (ACID) dalam tabel DynamoDB, membantu Anda menjaga kebenaran data dalam aplikasi Anda.

### Contoh **`transactGetItems()`**

`transactGetItems()`Metode ini menerima hingga 100 permintaan individu untuk item. Semua item dibaca dalam satu transaksi atom. Panduan Pengembang Amazon DynamoDB memiliki informasi tentang kondisi yang menyebabkan `transactGetItems()` metode gagal, dan juga tentang tingkat isolasi yang digunakan saat Anda menelepon. `transactGetItem()`

Setelah baris komentar 1 dalam contoh berikut, kode memanggil `transactGetItems()` metode dengan `builder` parameter. Builder `addGetItem()` dipanggil tiga kali dengan objek data yang berisi nilai kunci yang akan digunakan SDK untuk menghasilkan permintaan akhir.

Permintaan mengembalikan daftar `Document` objek setelah baris komentar 2. Daftar dokumen yang dikembalikan berisi contoh dokumen non-null dari data item dalam urutan yang sama seperti yang diminta. `Document.getItem(MappedTableResource<T> mappedTableResource)`Metode mengkonversi objek untyped menjadi `Document` objek Java diketik jika data item dikembalikan, jika tidak metode mengembalikan null.

```
   public static void transactGetItemsExample(DynamoDbEnhancedClient enhancedClient,
                                               DynamoDbTable<ProductCatalog>
catalogTable,
                                               DynamoDbTable<MovieActor>
movieActorTable) {

       // 1. Request three items from two tables using a builder.
       final List<Document> documents = enhancedClient.transactGetItems(b -> b
               .addGetItem(catalogTable,
Key.builder().partitionValue(2).sortValue("Title 55").build())
               .addGetItem(movieActorTable, Key.builder().partitionValue("Sophie's
Choice").sortValue("Meryl Streep").build())
               .addGetItem(movieActorTable, Key.builder().partitionValue("Blue
Jasmine").sortValue("Cate Blanchett").build())
               .build());

       // 2. A list of Document objects is returned in the same order as requested.
       ProductCatalog title55 = documents.get(0).getItem(catalogTable);
       if (title55 != null) {
           logger.info(title55.toString());
       }

       MovieActor sophiesChoice = documents.get(1).getItem(movieActorTable);
       if (sophiesChoice != null) {
           logger.info(sophiesChoice.toString());
```

```
        }

        // 3. The getItem() method returns null if the Document object contains no item
from DynamoDB.
        MovieActor blueJasmine = documents.get(2).getItem(movieActorTable);
        if (blueJasmine != null) {
            logger.info(blueJasmine.toString());
        }
    }
```

Tabel DynamoDB berisi item berikut sebelum contoh kode berjalan.

```
ProductCatalog{id=2, title='Title 55', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

Output berikut dicatat. Jika item diminta tetapi tidak ditemukan, itu tidak dikembalikan seperti halnya permintaan untuk film bernama`Blue Jasmine`.

```
ProductCatalog{id=2, title='Title 55', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

### **`transactWriteItems()`** contoh

`transactWriteItems()`Menerima hingga 100 tindakan put, update, atau delete dalam satu transaksi atom di beberapa tabel. Panduan Pengembang Amazon DynamoDB berisi rincian tentang pembatasan dan kondisi kegagalan operasi layanan DynamoDB yang mendasarinya.

Contoh basic

Dalam contoh berikut, empat operasi diminta untuk dua tabel. Kelas model yang sesuai `ProductCatalog`dan ditunjukkan `MovieActor`sebelumnya.

Masing-masing dari tiga kemungkinan operasi—put, update, dan delete—menggunakan parameter permintaan khusus untuk menentukan detailnya.

Kode setelah baris komentar 1 menunjukkan variasi sederhana dari `addPutItem()` metode ini. Metode ini menerima `MappedTableResource` objek dan contoh objek data untuk dimasukkan. Pernyataan setelah komentar baris 2 menunjukkan variasi yang menerima `TransactPutItemEnhancedRequest` instance. Variasi ini memungkinkan Anda menambahkan

lebih banyak opsi dalam permintaan, seperti ekspresi kondisi. Contoh selanjutnya menunjukkan ekspresi kondisi untuk operasi individu.

Operasi pembaruan diminta setelah baris komentar 3. `TransactUpdateItemEnhancedRequest`memiliki `ignoreNulls()` metode yang memungkinkan Anda mengonfigurasi apa yang dilakukan SDK dengan `null` nilai pada objek model. Jika `ignoreNulls()` metode mengembalikan true, SDK tidak menghapus nilai atribut tabel untuk atribut objek data yang`null`. Jika `ignoreNulls()` metode mengembalikan false, SDK meminta layanan DynamoDB untuk menghapus atribut dari item dalam tabel. Nilai default untuk `ignoreNulls` adalah false.

Pernyataan setelah baris komentar 4 menunjukkan variasi permintaan hapus yang mengambil objek data. Klien yang disempurnakan mengekstrak nilai-nilai kunci sebelum mengirimkan permintaan akhir.

```
    public static void transactWriteItems(DynamoDbEnhancedClient enhancedClient,
                                          DynamoDbTable<ProductCatalog> catalogTable,
                                          DynamoDbTable<MovieActor> movieActorTable) {

        enhancedClient.transactWriteItems(b -> b
                // 1. Simplest variation of put item request.
                .addPutItem(catalogTable, getProductCatId2())
                // 2. Put item request variation that accommodates condition
expressions.
                .addPutItem(movieActorTable,
TransactPutItemEnhancedRequest.builder(MovieActor.class)
                        .item(getMovieActorStreep())

.conditionExpression(Expression.builder().expression("attribute_not_exists
(movie)").build())
                        .build())
                // 3. Update request that does not remove attribute values on the table
if the data object's value is null.
                .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                        .item(getProductCatId4ForUpdate())
                        .ignoreNulls(Boolean.TRUE)
                        .build())
                // 4. Variation of delete request that accepts a data object. The key
values are extracted for the request.
                .addDeleteItem(movieActorTable, getMovieActorBlanchett())
        );
```

```
    }
```

Metode pembantu berikut menyediakan objek data untuk `add*Item` parameter.

Metode pembantu

```
    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Tar");
        movieActor.setActingYear(2022);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }

    public static MovieActor getMovieActorStreep() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Meryl Streep");
        movieActor.setMovieName("Sophie's Choice");
        movieActor.setActingYear(1982);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("Yale School of Drama");
        return movieActor;
    }
```

Tabel DynamoDB berisi item berikut sebelum contoh kode berjalan.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Item berikut ada di tabel setelah kode selesai berjalan.

```
3 | ProductCatalog{id=2, title='Title 55', isbn='1-565-85698', authors=[a, b],
 price=30.22}
4 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=40.0}
5 | MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
```

Item pada baris 2 telah dihapus dan baris 3 dan 5 menunjukkan item yang diletakkan. Baris 4 menunjukkan pembaruan baris 1. `price`Nilai adalah satu-satunya nilai yang berubah pada item. Jika `ignoreNulls()` telah mengembalikan false, baris 4 akan terlihat seperti baris berikut.

```
ProductCatalog{id=4, title='Title 1', isbn='null', authors=null, price=40.0}
```

Contoh pemeriksaan kondisi

Contoh berikut menunjukkan penggunaan pemeriksaan kondisi. Pemeriksaan kondisi digunakan untuk memeriksa apakah ada item atau untuk memeriksa kondisi atribut tertentu dari suatu item dalam database. Item yang dicek dalam pemeriksaan kondisi tidak dapat digunakan dalam operasi lain dalam transaksi.

> **Note**
>
> Anda tidak dapat menargetkan item yang sama dengan beberapa operasi dalam transaksi yang sama. Misalnya, Anda tidak dapat melakukan pemeriksaan kondisi dan juga mencoba memperbarui item yang sama dalam transaksi yang sama.

Contoh menunjukkan salah satu dari setiap jenis operasi dalam permintaan item tulis transaksional. Setelah baris komentar 2, `addConditionCheck()` metode memasok kondisi yang gagal transaksi jika `conditionExpression` parameter mengevaluasi`false`. Ekspresi kondisi yang dikembalikan dari metode yang ditampilkan dalam blok Metode Pembantu memeriksa apakah tahun penghargaan

untuk film `Sophie's Choice` tidak sama dengan. `1982` Jika ya, ekspresi mengevaluasi `false` dan transaksi gagal.

Panduan ini membahas ekspresi secara mendalam dalam topik lain.

```
   public static void conditionCheckFailExample(DynamoDbEnhancedClient enhancedClient,
                                                DynamoDbTable<ProductCatalog>
catalogTable,
                                                DynamoDbTable<MovieActor>
movieActorTable) {

       try {
           enhancedClient.transactWriteItems(b -> b
                   // 1. Perform one of each type of operation with the next three
methods.
                   .addPutItem(catalogTable,
TransactPutItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId2()).build())
                   .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId4ForUpdate())
                           .ignoreNulls(Boolean.TRUE).build())
                   .addDeleteItem(movieActorTable,
TransactDeleteItemEnhancedRequest.builder()
                           .key(b1 -> b1

.partitionValue(getMovieActorBlanchett().getMovieName())

.sortValue(getMovieActorBlanchett().getActorName())).build())
                   // 2. Add a condition check on a table item that is not involved in
another operation in this request.
                   .addConditionCheck(movieActorTable, ConditionCheck.builder()
                           .conditionExpression(buildConditionCheckExpression())
                           .key(k -> k
                                   .partitionValue("Sophie's Choice")
                                   .sortValue("Meryl Streep"))
                          // 3. Specify the request to return existing values from
the item if the condition evaluates to true.

.returnValuesOnConditionCheckFailure(ReturnValuesOnConditionCheckFailure.ALL_OLD)
                           .build())
                   .build());
       // 4. Catch the exception if the transaction fails and log the information.
       } catch (TransactionCanceledException ex) {
```

```
            ex.cancellationReasons().stream().forEach(cancellationReason -> {
                logger.info(cancellationReason.toString());
            });
        }
    }
```

Metode pembantu berikut digunakan dalam contoh kode sebelumnya.

Metode pembantu

```
    private static Expression buildConditionCheckExpression() {
        Map<String, AttributeValue> expressionValue = Map.of(
                ":year", numberValue(1982));

        return Expression.builder()
                .expression("actingyear <> :year")
                .expressionValues(expressionValue)
                .build();
    }

    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }

    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Blue Jasmine");
        movieActor.setActingYear(2013);
        movieActor.setActingAward("Best Actress");
```

```
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }
```

Tabel DynamoDB berisi item berikut sebelum contoh kode berjalan.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
3 | MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Item berikut ada di tabel setelah kode selesai berjalan.

```
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
MovieActor{movieName='Sophie's Choice', actorName='Meryl Streep', actingAward='Best
 Actress', actingYear=1982, actingSchoolName='Yale School of Drama'}
MovieActor{movieName='Tar', actorName='Cate Blanchett', actingAward='Best Actress',
 actingYear=2022, actingSchoolName='National Institute of Dramatic Art'}
```

Item tetap tidak berubah dalam tabel karena transaksi gagal. `actingYear`Nilai untuk film `Sophie's Choice` adalah`1982`, seperti yang ditunjukkan pada baris 2 item dalam tabel sebelum `transactWriteItem()` metode dipanggil.

Untuk menangkap informasi pembatalan untuk transaksi, lampirkan panggilan `transactWriteItems()` metode dalam `try` blok dan`catch`. `TransactionCanceledException` Setelah baris komentar 4 dari contoh, kode mencatat setiap `CancellationReason` objek. Karena kode berikut baris komentar 3 dari contoh menentukan bahwa nilai harus dikembalikan untuk item yang menyebabkan transaksi gagal, log menampilkan nilai database mentah untuk item `Sophie's Choice` film.

```
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Item={actor=AttributeValue(S=Meryl Streep),
 movie=AttributeValue(S=Sophie's Choice), actingaward=AttributeValue(S=Best Actress),
 actingyear=AttributeValue(N=1982), actingschoolname=AttributeValue(S=Yale School of
 Drama)}, ¬
    Code=ConditionalCheckFailed, Message=The conditional request failed.)
```

Contoh kondisi operasi tunggal

Contoh berikut menunjukkan penggunaan kondisi pada operasi tunggal dalam permintaan transaksi. Operasi hapus setelah baris komentar 1 berisi kondisi yang memeriksa nilai item target operasi terhadap database. Dalam contoh ini, ekspresi kondisi yang dibuat dengan metode pembantu setelah baris komentar 2 menentukan bahwa item harus dihapus dari database jika tahun akting film tidak sama dengan 2013.

Ekspresi dibahas nanti dalam panduan ini.

```
   public static void singleOperationConditionFailExample(DynamoDbEnhancedClient
enhancedClient,

DynamoDbTable<ProductCatalog> catalogTable,
                                                              DynamoDbTable<MovieActor>
movieActorTable) {
       try {
           enhancedClient.transactWriteItems(b -> b
                   .addPutItem(catalogTable,
TransactPutItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId2())
                           .build())
                   .addUpdateItem(catalogTable,
TransactUpdateItemEnhancedRequest.builder(ProductCatalog.class)
                           .item(getProductCatId4ForUpdate())
                           .ignoreNulls(Boolean.TRUE).build())
                  // 1. Delete operation that contains a condition expression
                   .addDeleteItem(movieActorTable,
TransactDeleteItemEnhancedRequest.builder()
                           .key((Key.Builder k) -> {
                               MovieActor blanchett = getMovieActorBlanchett();
                               k.partitionValue(blanchett.getMovieName())
                                       .sortValue(blanchett.getActorName());
                           })
                           .conditionExpression(buildDeleteItemExpression())

.returnValuesOnConditionCheckFailure(ReturnValuesOnConditionCheckFailure.ALL_OLD)
                           .build())
                   .build());
       } catch (TransactionCanceledException ex) {
           ex.cancellationReasons().forEach(cancellationReason ->
logger.info(cancellationReason.toString()));
       }
```

```
    }

    // 2. Provide condition expression to check if 'actingyear' is not equal to 2013.
    private static Expression buildDeleteItemExpression() {
        Map<String, AttributeValue> expressionValue = Map.of(
                ":year", numberValue(2013));

        return Expression.builder()
                .expression("actingyear <> :year")
                .expressionValues(expressionValue)
                .build();
    }
```

Metode pembantu berikut digunakan dalam contoh kode sebelumnya.

Metode pembantu

```
    public static ProductCatalog getProductCatId2() {
        return ProductCatalog.builder()
                .id(2)
                .isbn("1-565-85698")
                .authors(new HashSet<>(Arrays.asList("a", "b")))
                .price(BigDecimal.valueOf(30.22))
                .title("Title 55")
                .build();
    }

    public static ProductCatalog getProductCatId4ForUpdate() {
        return ProductCatalog.builder()
                .id(4)
                .price(BigDecimal.valueOf(40.00))
                .title("Title 1")
                .build();
    }
    public static MovieActor getMovieActorBlanchett() {
        MovieActor movieActor = new MovieActor();
        movieActor.setActorName("Cate Blanchett");
        movieActor.setMovieName("Blue Jasmine");
        movieActor.setActingYear(2013);
        movieActor.setActingAward("Best Actress");
        movieActor.setActingSchoolName("National Institute of Dramatic Art");
        return movieActor;
    }
```

Tabel DynamoDB berisi item berikut sebelum contoh kode berjalan.

```
1 | ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2 | MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
```

Item berikut ada di tabel setelah kode selesai berjalan.

```
ProductCatalog{id=4, title='Title 1', isbn='orig_isbn', authors=[b, g], price=10}
2023-03-15 11:29:07 [main] INFO  org.example.tests.TransactDemoTest:168 -
 MovieActor{movieName='Blue Jasmine', actorName='Cate Blanchett', actingAward='Best
 Actress', actingYear=2013, actingSchoolName='National Institute of Dramatic Art'}
```

Item tetap tidak berubah dalam tabel karena transaksi gagal. `actingYear`Nilai untuk film `Blue Jasmine` adalah `2013` seperti yang ditunjukkan pada baris 2 dalam daftar item sebelum contoh kode berjalan.

Baris berikut dicatat ke konsol.

```
CancellationReason(Code=None)
CancellationReason(Code=None)
CancellationReason(Item={actor=AttributeValue(S=Cate Blanchett),
 movie=AttributeValue(S=Blue Jasmine), actingaward=AttributeValue(S=Best Actress),
 actingyear=AttributeValue(N=2013), actingschoolname=AttributeValue(S=National
 Institute of Dramatic Art)},
    Code=ConditionalCheckFailed, Message=The conditional request failed)
```

Gunakan indeks sekunder

Indeks sekunder meningkatkan akses data dengan mendefinisikan kunci alternatif yang Anda gunakan dalam operasi kueri dan pemindaian. Indeks sekunder global (GSI) memiliki kunci partisi dan kunci pengurutan yang dapat berbeda dari yang ada di tabel dasar. Sebaliknya, indeks sekunder lokal (LSI) menggunakan kunci partisi dari indeks primer.

Anotasi kelas data dengan anotasi indeks sekunder

Atribut yang berpartisipasi dalam indeks sekunder memerlukan `@DynamoDbSecondarySortKey` anotasi `@DynamoDbSecondaryPartitionKey` atau anotasi.

Kelas berikut menunjukkan anotasi untuk dua indeks. GSI bernama SubjectLastPostedDateIndexmenggunakan `Subject` atribut untuk kunci partisi dan

`LastPostedDateTime` untuk kunci sortir. LSI bernama ForumLastPostedDateIndexmenggunakan `ForumName` sebagai kunci partisi dan `LastPostedDateTime` sebagai kunci sortir.

Perhatikan bahwa `Subject` atribut tersebut memiliki peran ganda. Ini adalah kunci sortir kunci primer dan kunci partisi dari GSI bernama SubjectLastPostedDateIndex.

**`MessageThread`** kelas

`MessageThread`Kelas ini cocok untuk digunakan sebagai kelas data untuk tabel Thread contoh di Amazon DynamoDB Developer Guide.

Impor

```
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbBean;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondaryPartitionKey;
import
 software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSecondarySortKey;
import software.amazon.awssdk.enhanced.dynamodb.mapper.annotations.DynamoDbSortKey;

import java.util.List;
```

```
@DynamoDbBean
public class MessageThread {
    private String ForumName;
    private String Subject;
    private String Message;
    private String LastPostedBy;
    private String LastPostedDateTime;
    private Integer Views;
    private Integer Replies;
    private Integer Answered;
    private List<String> Tags;

    @DynamoDbPartitionKey
    public String getForumName() {
        return ForumName;
    }

    public void setForumName(String forumName) {
        ForumName = forumName;
```

```
    }

    // Sort key for primary index and partition key for GSI
"SubjectLastPostedDateIndex".
    @DynamoDbSortKey
    @DynamoDbSecondaryPartitionKey(indexNames = "SubjectLastPostedDateIndex")
    public String getSubject() {
        return Subject;
    }

    public void setSubject(String subject) {
        Subject = subject;
    }

    // Sort key for GSI "SubjectLastPostedDateIndex" and sort key for LSI
"ForumLastPostedDateIndex".
    @DynamoDbSecondarySortKey(indexNames = {"SubjectLastPostedDateIndex",
"ForumLastPostedDateIndex"})
    public String getLastPostedDateTime() {
        return LastPostedDateTime;
    }

    public void setLastPostedDateTime(String lastPostedDateTime) {
        LastPostedDateTime = lastPostedDateTime;
    }
    public String getMessage() {
        return Message;
    }

    public void setMessage(String message) {
        Message = message;
    }

    public String getLastPostedBy() {
        return LastPostedBy;
    }

    public void setLastPostedBy(String lastPostedBy) {
        LastPostedBy = lastPostedBy;
    }

    public Integer getViews() {
        return Views;
    }
```

```
    public void setViews(Integer views) {
        Views = views;
    }

    @DynamoDbSecondaryPartitionKey(indexNames = "ForumRepliesIndex")
    public Integer getReplies() {
        return Replies;
    }

    public void setReplies(Integer replies) {
        Replies = replies;
    }

    public Integer getAnswered() {
        return Answered;
    }

    public void setAnswered(Integer answered) {
        Answered = answered;
    }

    public List<String> getTags() {
        return Tags;
    }

    public void setTags(List<String> tags) {
        Tags = tags;
    }

    public MessageThread() {
        this.Answered = 0;
        this.LastPostedBy = "";
        this.ForumName = "";
        this.Message = "";
        this.LastPostedDateTime = "";
        this.Replies = 0;
        this.Views = 0;
        this.Subject = "";
    }

    @Override
    public String toString() {
        return "MessageThread{" +
```

```
                "ForumName='" + ForumName + '\'' +
                ", Subject='" + Subject + '\'' +
                ", Message='" + Message + '\'' +
                ", LastPostedBy='" + LastPostedBy + '\'' +
                ", LastPostedDateTime='" + LastPostedDateTime + '\'' +
                ", Views=" + Views +
                ", Replies=" + Replies +
                ", Answered=" + Answered +
                ", Tags=" + Tags +
                '}';
    }
}
```

Buat indeks

Dimulai dengan versi 2.20.86 SDK for Java, `createTable()` metode ini secara otomatis menghasilkan indeks sekunder dari anotasi kelas data. Secara default, semua atribut dari tabel dasar disalin ke indeks dan nilai throughput yang disediakan adalah 20 unit kapasitas baca dan 20 unit kapasitas tulis.

Namun, jika Anda menggunakan versi SDK sebelum 2.20.86, Anda perlu membuat indeks bersama dengan tabel seperti yang ditunjukkan pada contoh berikut. Contoh ini membangun dua indeks untuk tabel. `Thread` Parameter builder memiliki metode untuk mengkonfigurasi kedua jenis indeks seperti yang ditunjukkan setelah baris komentar 1 dan 2. Anda menggunakan `indexName()` metode pembuat indeks untuk mengaitkan nama indeks yang ditentukan dalam anotasi kelas data dengan jenis indeks yang dimaksud.

Kode ini mengkonfigurasi semua atribut tabel untuk berakhir di kedua indeks setelah baris komentar 3 dan 4. Informasi selengkapnya tentang proyeksi atribut tersedia di Panduan Pengembang Amazon DynamoDB.

```
   public static void createMessageThreadTable(DynamoDbTable<MessageThread>
messageThreadDynamoDbTable, DynamoDbClient dynamoDbClient) {
       messageThreadDynamoDbTable.createTable(b -> b
               // 1. Generate the GSI.
               .globalSecondaryIndices(gsi ->
gsi.indexName("SubjectLastPostedDateIndex")
                       // 3. Populate the GSI with all attributes.
                       .projection(p -> p
                               .projectionType(ProjectionType.ALL))
               )
               // 2. Generate the LSI.
```

```
                .localSecondaryIndices(lsi -> lsi.indexName("ForumLastPostedDateIndex")
                        // 4. Populate the LSI with all attributes.
                        .projection(p -> p
                                .projectionType(ProjectionType.ALL))
                )
        );
```

Kueri dengan menggunakan indeks

Contoh berikut query indeks ForumLastPostedDateIndexsekunder lokal.

Mengikuti baris komentar 2, Anda membuat QueryConditionalobjek yang diperlukan saat memanggil DynamoDbIndexmetode.query ().

Anda mendapatkan referensi ke indeks yang ingin Anda kueri setelah baris komentar 3 dengan meneruskan nama indeks. Mengikuti baris komentar 4, Anda memanggil `query()` metode pada indeks yang lewat di `QueryConditional` objek.

Anda juga mengonfigurasi kueri untuk mengembalikan tiga nilai atribut seperti yang ditunjukkan setelah baris komentar 5. Jika tidak `attributesToProject()` dipanggil, query mengembalikan semua nilai atribut. Perhatikan bahwa nama atribut yang ditentukan dimulai dengan huruf kecil. Nama atribut ini cocok dengan yang digunakan dalam tabel, belum tentu nama atribut dari kelas data.

Mengikuti baris komentar 6, ulangi hasil dan log setiap item yang dikembalikan oleh kueri dan juga menyimpannya dalam daftar untuk kembali ke pemanggil.

```
public class IndexScanExamples {
    private static Logger logger = LoggerFactory.getLogger(IndexScanExamples.class);

    public static List<MessageThread> queryUsingSecondaryIndices(String lastPostedDate,

 DynamoDbTable<MessageThread> threadTable) {
        // 1. Log the parameter value.
        logger.info("lastPostedDate value: {}", lastPostedDate);

        // 2. Create a QueryConditional whose sort key value must be greater than or
 equal to the parameter value.
        QueryConditional queryConditional =
 QueryConditional.sortGreaterThanOrEqualTo(qc ->
                qc.partitionValue("Forum02").sortValue(lastPostedDate));

        // 3. Specify the index name to query.
```

```
        final DynamoDbIndex<MessageThread> forumLastPostedDateIndex =
 threadTable.index("ForumLastPostedDateIndex");

        // 4. Perform the query using the QueryConditional object.
        final SdkIterable<Page<MessageThread>> pagedResult =
 forumLastPostedDateIndex.query(q -> q
                .queryConditional(queryConditional)
                // 5. Request three attribute in the results.
                .attributesToProject("forumName", "subject", "lastPostedDateTime"));

        List<MessageThread> collectedItems = new ArrayList<>();
        // 6. Iterate through pages response and sort the items.
        pagedResult.stream().forEach(page -> page.items().stream()
                .sorted(Comparator.comparing(MessageThread::getLastPostedDateTime))
                .forEach(mt -> {
                    // 7. Log the returned items and add the collection to return to
 the caller.
                    logger.info(mt.toString());
                    collectedItems.add(mt);
                }));
        return collectedItems;
    }
```

Item berikut ada dalam database sebelum query dijalankan.

```
MessageThread{ForumName='Forum01', Subject='Subject01', Message='Message01',
 LastPostedBy='', LastPostedDateTime='2023.03.28', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject02', Message='Message02',
 LastPostedBy='', LastPostedDateTime='2023.03.29', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject04', Message='Message04',
 LastPostedBy='', LastPostedDateTime='2023.03.31', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject08', Message='Message08',
 LastPostedBy='', LastPostedDateTime='2023.04.04', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject10', Message='Message10',
 LastPostedBy='', LastPostedDateTime='2023.04.06', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum03', Subject='Subject03', Message='Message03',
 LastPostedBy='', LastPostedDateTime='2023.03.30', Views=0, Replies=0, Answered=0,
 Tags=null}
```

```
MessageThread{ForumName='Forum03', Subject='Subject06', Message='Message06',
 LastPostedBy='', LastPostedDateTime='2023.04.02', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum03', Subject='Subject09', Message='Message09',
 LastPostedBy='', LastPostedDateTime='2023.04.05', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum05', Subject='Subject05', Message='Message05',
 LastPostedBy='', LastPostedDateTime='2023.04.01', Views=0, Replies=0, Answered=0,
 Tags=null}
MessageThread{ForumName='Forum07', Subject='Subject07', Message='Message07',
 LastPostedBy='', LastPostedDateTime='2023.04.03', Views=0, Replies=0, Answered=0,
 Tags=null}
```

Pernyataan logging pada baris 1 dan 6 menghasilkan output konsol berikut.

```
lastPostedDate value: 2023.03.31
MessageThread{ForumName='Forum02', Subject='Subject04', Message='', LastPostedBy='',
 LastPostedDateTime='2023.03.31', Views=0, Replies=0, Answered=0, Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject08', Message='', LastPostedBy='',
 LastPostedDateTime='2023.04.04', Views=0, Replies=0, Answered=0, Tags=null}
MessageThread{ForumName='Forum02', Subject='Subject10', Message='', LastPostedBy='',
 LastPostedDateTime='2023.04.06', Views=0, Replies=0, Answered=0, Tags=null}
```

Kueri mengembalikan item dengan *`forumName`* nilai Forum02 dan *`lastPostedDateTime`* nilai lebih besar dari atau sama dengan 2023.03.31. Hasilnya menunjukkan `message` nilai dengan string kosong meskipun `message` atribut memiliki nilai dalam indeks. Ini karena atribut pesan tidak diproyeksikan oleh kode setelah baris komentar 5.

## Gunakan fitur pemetaan tingkat lanjut

Pelajari tentang fitur skema tabel lanjutan di DynamoDB Enhanced Client API.

### Memahami jenis skema tabel

`TableSchema`adalah antarmuka ke fungsionalitas pemetaan DynamoDB Enhanced Client API. Hal ini dapat memetakan objek data ke dan dari peta AttributeValues. Sebuah `TableSchema` objek perlu tahu tentang struktur tabel yang dipetakannya. Informasi struktur ini disimpan dalam suatu `TableMetadata`objek.

API klien yang disempurnakan memiliki beberapa implementasi`TableSchema`, yang mengikuti.

Skema tabel yang dihasilkan dari kelas beranotasi

Ini adalah operasi yang cukup mahal untuk membangun `TableSchema` dari kelas beranotasi, jadi kami sarankan melakukan ini sekali, saat startup aplikasi.

BeanTableSchema

Implementasi ini dibangun berdasarkan atribut dan anotasi kelas kacang. Contoh pendekatan ini ditunjukkan di bagian Memulai.

> **Note**
>
> Jika a `BeanTableSchema` tidak berperilaku seperti yang Anda harapkan, aktifkan pencatatan debug untuk. `software.amazon.awssdk.enhanced.dynamodb.beans`

ImmutableTableSchema

Implementasi ini dibangun dari kelas data yang tidak dapat diubah. Pendekatan ini dijelaskan di ??? bagian ini.

Skema tabel yang dihasilkan dengan pembangun

Berikut `TableSchema` s dibangun dari kode dengan menggunakan pembangun. Pendekatan ini lebih murah daripada pendekatan yang menggunakan kelas data beranotasi. Pendekatan builder menghindari penggunaan anotasi dan tidak memerlukan standar JavaBean penamaan.

StaticTableSchema

Implementasi ini dibangun untuk kelas data yang bisa berubah. Bagian memulai dari panduan ini menunjukkan cara membuat `StaticTableSchema` menggunakan pembangun.

StaticImmutableTableSchema

Demikian pula dengan cara Anda membangun`StaticTableSchema`, Anda menghasilkan implementasi jenis ini `TableSchema` menggunakan pembangun untuk digunakan dengan kelas data yang tidak dapat diubah.

Skema tabel untuk data tanpa skema tetap

DocumentTableSchema

Tidak seperti implementasi lain dari`TableSchema`, Anda tidak mendefinisikan atribut untuk sebuah `DocumentTableSchema` instance. Biasanya, Anda hanya menentukan kunci utama dan penyedia konverter atribut. Sebuah `EnhancedDocument` instance menyediakan atribut yang Anda bangun dari elemen individual atau dari string JSON.

Sertakan atau kecualikan atribut secara eksplisit

DynamoDB Enhanced Client API menawarkan anotasi untuk mengecualikan atribut kelas data agar tidak menjadi atribut pada tabel. Dengan API, Anda juga dapat menggunakan nama atribut yang berbeda dari nama atribut kelas data.

Kecualikan atribut

Untuk mengabaikan atribut yang seharusnya tidak dipetakan ke tabel DynamoDB, tandai atribut dengan anotasi. `@DynamoDbIgnore`

```
private String internalKey;

@DynamoDbIgnore
public String getInternalKey() { return this.internalKey; }
public void setInternalKey(String internalKey) { this.internalKey = internalKey;}
```

Sertakan atribut

Untuk mengubah nama atribut yang digunakan dalam tabel DynamoDB, tandai dengan anotasi dan berikan nama `@DynamoDbAttribute` yang berbeda.

```
private String internalKey;

@DynamoDbAttribute("renamedInternalKey")
public String getInternalKey() { return this.internalKey; }
public void setInternalKey(String internalKey) { this.internalKey = internalKey;}
```

Konversi atribut kontrol

Secara default, skema tabel menyediakan konverter untuk banyak jenis Java umum melalui implementasi default antarmuka. `AttributeConverterProvider` Anda dapat mengubah

keseluruhan perilaku default dengan `AttributeConverterProvider` implementasi kustom. Anda juga dapat mengubah konverter untuk satu atribut.

Untuk daftar konverter yang tersedia, lihat AttributeConverterantarmuka Java doc.

Menyediakan penyedia konverter atribut khusus

Anda dapat memberikan satu `AttributeConverterProvider` atau satu rantai `AttributeConverterProvider` s yang dipesan melalui `@DynamoDbBean (converterProviders = {…})` anotasi. Setiap kustom `AttributeConverterProvider` harus memperluas `AttributeConverterProvider` antarmuka.

Perhatikan bahwa jika Anda menyediakan rantai penyedia konverter atribut Anda sendiri, Anda akan mengganti penyedia konverter default,`DefaultAttributeConverterProvider`. Jika Anda ingin menggunakan fungsionalitas`DefaultAttributeConverterProvider`, Anda harus memasukkannya ke dalam rantai.

Dimungkinkan juga untuk membubuhi keterangan kacang dengan array kosong. `{}` Ini menonaktifkan penggunaan penyedia konverter atribut apa pun, termasuk default. Dalam hal ini semua atribut yang akan dipetakan harus memiliki konverter atribut mereka sendiri.

Cuplikan berikut menunjukkan penyedia konverter tunggal.

```
@DynamoDbBean(converterProviders = ConverterProvider1.class)
public class Customer {

}
```

Cuplikan berikut menunjukkan penggunaan rantai penyedia konverter. Karena default SDK disediakan terakhir, ia memiliki prioritas terendah.

```
@DynamoDbBean(converterProviders = {
   ConverterProvider1.class,
   ConverterProvider2.class,
   DefaultAttributeConverterProvider.class})
public class Customer {

}
```

Pembangun skema tabel statis memiliki `attributeConverterProviders()` metode yang bekerja dengan cara yang sama. Ini ditunjukkan dalam cuplikan berikut.

```
private static final StaticTableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
  StaticTableSchema.builder(Customer.class)
    .newItemSupplier(Customer::new)
    .addAttribute(String.class, a -> a.name("name")
                                      a.getter(Customer::getName)
                                      a.setter(Customer::setName))
    .attributeConverterProviders(converterProvider1, converterProvider2)
    .build();
```

Ganti pemetaan atribut tunggal

Untuk mengganti cara atribut tunggal dipetakan, berikan atribut `AttributeConverter` untuk atribut. Penambahan ini mengesampingkan konverter apa pun yang disediakan oleh skema `AttributeConverterProviders` tabel. Ini menambahkan konverter khusus hanya untuk atribut itu. Atribut lain, bahkan yang dari tipe yang sama, tidak akan menggunakan konverter itu kecuali jika secara eksplisit ditentukan untuk atribut lainnya.

`@DynamoDbConvertedBy`Anotasi ini digunakan untuk menentukan `AttributeConverter` kelas kustom seperti yang ditunjukkan dalam cuplikan berikut.

```
@DynamoDbBean
public class Customer {
    private String name;

    @DynamoDbConvertedBy(CustomAttributeConverter.class)
    public String getName() { return this.name; }
    public void setName(String name) { this.name = name;}
}
```

Pembangun untuk skema statis memiliki `attributeConverter()` metode pembangun atribut yang setara. Metode ini mengambil contoh dari `AttributeConverter` sebagai berikut menunjukkan.

```
private static final StaticTableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
  StaticTableSchema.builder(Customer.class)
    .newItemSupplier(Customer::new)
    .addAttribute(String.class, a -> a.name("name")
                                      a.getter(Customer::getName)
                                      a.setter(Customer::setName)
                                      a.attributeConverter(customAttributeConverter))
    .build();
```

Contoh

Contoh ini menunjukkan `AttributeConverterProvider` implementasi yang menyediakan konverter atribut untuk `java.net.HttpCookie`objek.

`SimpleUser`Kelas berikut berisi atribut bernama `lastUsedCookie` yang merupakan instance dari`HttpCookie`.

Parameter untuk `@DynamoDbBean` anotasi mencantumkan dua `AttributeConverterProvider` kelas yang menyediakan konverter.

Class with annotations

```
   @DynamoDbBean(converterProviders = {CookieConverterProvider.class,
DefaultAttributeConverterProvider.class})
   public static final class SimpleUser {
       private String name;
       private HttpCookie lastUsedCookie;

       @DynamoDbPartitionKey
       public String getName() {
           return name;
       }

       public void setName(String name) {
           this.name = name;
       }

       public HttpCookie getLastUsedCookie() {
           return lastUsedCookie;
       }

       public void setLastUsedCookie(HttpCookie lastUsedCookie) {
           this.lastUsedCookie = lastUsedCookie;
       }
```

Static table schema

```
   private static final TableSchema<SimpleUser> SIMPLE_USER_TABLE_SCHEMA =
           TableSchema.builder(SimpleUser.class)
                   .newItemSupplier(SimpleUser::new)
                   .attributeConverterProviders(CookieConverterProvider.create(),
AttributeConverterProvider.defaultProvider())
```

```
                    .addAttribute(String.class, a -> a.name("name")
                            .setter(SimpleUser::setName)
                            .getter(SimpleUser::getName)
                            .tags(StaticAttributeTags.primaryPartitionKey()))
                    .addAttribute(HttpCookie.class, a -> a.name("lastUsedCookie")
                            .setter(SimpleUser::setLastUsedCookie)
                            .getter(SimpleUser::getLastUsedCookie))
                    .build();
```

`CookieConverterProvider`Dalam contoh berikut memberikan contoh dari sebuah`HttpCookeConverter`.

```
   public static final class CookieConverterProvider implements
AttributeConverterProvider {
       private final Map<EnhancedType<?>, AttributeConverter<?>> converterCache =
ImmutableMap.of(
               // 1. Add HttpCookieConverter to the internal cache.
               EnhancedType.of(HttpCookie.class), new HttpCookieConverter());

       public static CookieConverterProvider create() {
           return new CookieConverterProvider();
       }

       // The SDK calls this method to find out if the provider contains a
AttributeConverter instance
       // for the EnhancedType<T> argument.
       @SuppressWarnings("unchecked")
       @Override
       public <T> AttributeConverter<T> converterFor(EnhancedType<T> enhancedType) {
           return (AttributeConverter<T>) converterCache.get(enhancedType);
       }
   }
```

Kode konversi

Dalam `transformFrom()` metode `HttpCookieConverter` kelas berikut, kode menerima `HttpCookie` instance dan mengubahnya menjadi peta DynamoDB yang disimpan sebagai atribut.

`transformTo()`Metode menerima parameter peta DynamoDB, kemudian memanggil konstruktor `HttpCookie` yang membutuhkan nama dan nilai.

```
   public static final class HttpCookieConverter implements
AttributeConverter<HttpCookie> {

       @Override
       public AttributeValue transformFrom(HttpCookie httpCookie) {

           return AttributeValue.fromM(
           Map.of ("cookieName", AttributeValue.fromS(httpCookie.getName()),
                   "cookieValue", AttributeValue.fromS(httpCookie.getValue()))
           );
       }

       @Override
       public HttpCookie transformTo(AttributeValue attributeValue) {
           Map<String, AttributeValue> map = attributeValue.m();
           return new HttpCookie(
                   map.get("cookieName").s(),
                   map.get("cookieValue").s());
       }

       @Override
       public EnhancedType<HttpCookie> type() {
           return EnhancedType.of(HttpCookie.class);
       }

       @Override
       public AttributeValueType attributeValueType() {
           return AttributeValueType.M;
       }
   }
```

Ubah perilaku pembaruan atribut

Anda dapat menyesuaikan perilaku pembaruan atribut individual saat Anda melakukan operasi pembaruan. Beberapa contoh operasi pembaruan di DynamoDB Enhanced Client API adalah updateItem () dan (). transactWriteItems

Misalnya, bayangkan Anda ingin menyimpan stempel waktu yang dibuat pada catatan Anda. Namun, Anda ingin nilainya ditulis hanya jika tidak ada nilai yang ada untuk atribut yang sudah ada dalam database. Dalam hal ini, Anda menggunakan perilaku `WRITE_IF_NOT_EXISTS` pembaruan.

Contoh berikut menunjukkan anotasi yang menambahkan perilaku ke `createdOn` atribut.

```
@DynamoDbBean
public class Customer extends GenericRecord {
    private String id;
    private Instant createdOn;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }
    public void setId(String id) { this.name = id; }

    @DynamoDbUpdateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)
    public Instant getCreatedOn() { return this.createdOn; }
    public void setCreatedOn(Instant createdOn) { this.createdOn = createdOn; }
}
```

Anda dapat mendeklarasikan perilaku pembaruan yang sama ketika Anda membangun skema tabel statis seperti yang ditunjukkan pada contoh berikut setelah baris komentar 1.

```
static final TableSchema<Customer> CUSTOMER_TABLE_SCHEMA =
     TableSchema.builder(Customer.class)
       .newItemSupplier(Customer::new)
       .addAttribute(String.class, a -> a.name("id")
                                         .getter(Customer::getId)
                                         .setter(Customer::setId)

 .tags(StaticAttributeTags.primaryPartitionKey()))
       .addAttribute(Instant.class, a -> a.name("createdOn")
                                          .getter(Customer::getCreatedOn)
                                          .setter(Customer::setCreatedOn)
                                          // 1. Add an UpdateBehavior.

 .tags(StaticAttributeTags.updateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)))
       .build();
```

Ratakan atribut dari kelas lain

Jika atribut untuk tabel Anda tersebar di beberapa kelas Java yang berbeda, baik melalui pewarisan atau komposisi, DynamoDB Enhanced Client API menyediakan dukungan untuk meratakan atribut menjadi satu kelas.

Gunakan warisan

Jika kelas Anda menggunakan pewarisan, gunakan pendekatan berikut untuk meratakan hierarki.

### Gunakan kacang beranotasi

Untuk pendekatan anotasi, kedua kelas harus membawa `@DynamoDbBean` anotasi dan kelas harus membawa satu atau lebih anotasi kunci primer.

Berikut ini menunjukkan contoh kelas data yang memiliki hubungan warisan.

Standard data class

```
@DynamoDbBean
public class Customer extends GenericRecord {
    private String name;

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }
}

@DynamoDbBean
public abstract class GenericRecord {
    private String id;
    private String createdDate;

    @DynamoDbPartitionKey
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

onMethodOpsi Lombok menyalin anotasi DynamoDB berbasis atribut, seperti, ke kode yang dihasilkan. `@DynamoDbPartitionKey`

```
@DynamoDbBean
@Data
@ToString(callSuper = true)
public class Customer extends GenericRecord {
    private String name;
}
```

```
@Data
@DynamoDbBean
public abstract class GenericRecord {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;
    private String createdDate;
}
```

### Gunakan skema statis

Untuk pendekatan skema statis, gunakan `extend()` metode pembangun untuk menciutkan atribut kelas induk ke kelas anak. Ini ditampilkan setelah komentar baris 1 dalam contoh berikut.

```
       StaticTableSchema<org.example.tests.model.inheritance.stat.GenericRecord>
GENERIC_RECORD_SCHEMA =

StaticTableSchema.builder(org.example.tests.model.inheritance.stat.GenericRecord.class)
                      // The partition key will be inherited by the top level mapper.
                      .addAttribute(String.class, a -> a.name("id")

.getter(org.example.tests.model.inheritance.stat.GenericRecord::getId)

.setter(org.example.tests.model.inheritance.stat.GenericRecord::setId)
                              .tags(primaryPartitionKey()))
                      .addAttribute(String.class, a -> a.name("created_date")

.getter(org.example.tests.model.inheritance.stat.GenericRecord::getCreatedDate)

.setter(org.example.tests.model.inheritance.stat.GenericRecord::setCreatedDate))
                      .build();

       StaticTableSchema<org.example.tests.model.inheritance.stat.Customer>
CUSTOMER_SCHEMA =

StaticTableSchema.builder(org.example.tests.model.inheritance.stat.Customer.class)

.newItemSupplier(org.example.tests.model.inheritance.stat.Customer::new)
                      .addAttribute(String.class, a -> a.name("name")

.getter(org.example.tests.model.inheritance.stat.Customer::getName)

.setter(org.example.tests.model.inheritance.stat.Customer::setName))
```

```
                        // 1. Use the extend() method to collapse the parent attributes
onto the child class.
                        .extend(GENERIC_RECORD_SCHEMA)     // All the attributes of the
GenericRecord schema are added to Customer.
                        .build();
```

Contoh skema statis sebelumnya menggunakan kelas data berikut. Karena pemetaan didefinisikan ketika Anda membangun skema tabel statis, kelas data tidak memerlukan anotasi.

Kelas data

Standard data class

```
public class Customer extends GenericRecord {
    private String name;

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }
}


public abstract class GenericRecord {
    private String id;
    private String createdDate;

    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
```

Lombok

```
@Data
@ToString(callSuper = true)
public class Customer extends GenericRecord{
    private String name;
}

@Data
public abstract class GenericRecord {
    private String id;
```

```
    private String createdDate;
}
```

### Gunakan komposisi

Jika kelas Anda menggunakan komposisi, gunakan pendekatan berikut untuk meratakan hierarki.

#### Gunakan kacang beranotasi

`@DynamoDbFlatten`Anotasi meratakan kelas yang terkandung.

Contoh kelas data berikut menggunakan `@DynamoDbFlatten` anotasi untuk secara efektif menambahkan semua atribut kelas yang terkandung ke `GenericRecord` `Customer` kelas.

Standard data class

```
@DynamoDbBean
public class Customer {
    private String name;
    private GenericRecord record;

    public String getName() { return this.name; }
    public void setName(String name) { this.name = name; }

    @DynamoDbFlatten
    public GenericRecord getRecord() { return this.record; }
    public void setRecord(GenericRecord record) { this.record = record; }

@DynamoDbBean
public class GenericRecord {
    private String id;
    private String createdDate;

    @DynamoDbPartitionKey
    public String getId() { return this.id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return this.createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

```
@Data
@DynamoDbBean
public class Customer {
    private String name;
    @Getter(onMethod_=@DynamoDbFlatten)
    private GenericRecord record;
}

@Data
@DynamoDbBean
public class GenericRecord {
    @Getter(onMethod_=@DynamoDbPartitionKey)
    private String id;
    private String createdDate;
}
```

Anda dapat menggunakan anotasi rata untuk meratakan sebanyak mungkin kelas yang memenuhi syarat yang Anda butuhkan. Batasan berikut berlaku:

- Semua nama atribut harus unik setelah diratakan.
- Tidak boleh ada lebih dari satu kunci partisi, kunci sortir, atau nama tabel.

Gunakan skema statis

Saat Anda membuat skema tabel statis, gunakan `flatten()` metode pembangun. Anda juga menyediakan metode pengambil dan penyetel yang mengidentifikasi kelas yang terkandung.

```
       StaticTableSchema<GenericRecord> GENERIC_RECORD_SCHEMA =
               StaticTableSchema.builder(GenericRecord.class)
                       .newItemSupplier(GenericRecord::new)
                       .addAttribute(String.class, a -> a.name("id")
                               .getter(GenericRecord::getId)
                               .setter(GenericRecord::setId)
                               .tags(primaryPartitionKey()))
                       .addAttribute(String.class, a -> a.name("created_date")
                               .getter(GenericRecord::getCreatedDate)
                               .setter(GenericRecord::setCreatedDate))
                       .build();
```

```
        StaticTableSchema<Customer> CUSTOMER_SCHEMA =
                StaticTableSchema.builder(Customer.class)
                        .newItemSupplier(Customer::new)
                        .addAttribute(String.class, a -> a.name("name")
                                .getter(Customer::getName)
                                .setter(Customer::setName))
                        // Because we are flattening a component object, we supply a
getter and setter so the
                        // mapper knows how to access it.
                        .flatten(GENERIC_RECORD_SCHEMA, Customer::getRecord,
Customer::setRecord)
                        .build();
```

Contoh skema statis sebelumnya menggunakan kelas data berikut.

Kelas data

Standard data class

```
public class Customer {
    private String name;
    private GenericRecord record;

    public String getName() { return this.name; }
    public void setName(String name) { this.name = name; }

    public GenericRecord getRecord() { return this.record; }
    public void setRecord(GenericRecord record) { this.record = record; }

public class GenericRecord {
    private String id;
    private String createdDate;

    public String getId() { return this.id; }
    public void setId(String id) { this.id = id; }

    public String getCreatedDate() { return this.createdDate; }
    public void setCreatedDate(String createdDate) { this.createdDate =
 createdDate; }
}
```

Lombok

```
@Data
public class Customer {
    private String name;
    private GenericRecord record;
}

@Data
public class GenericRecord {
    private String id;
    private String createdDate;
}
```

Anda dapat menggunakan pola pembangun untuk meratakan sebanyak mungkin kelas yang memenuhi syarat yang Anda butuhkan.

Implikasi untuk kode lain

Bila Anda menggunakan `@DynamoDbFlatten` atribut (atau metode `flatten()` builder), item di DynamoDB berisi atribut untuk setiap atribut dari objek yang disusun. Ini juga mencakup atribut dari objek penulisan.

Sebaliknya, jika Anda membuat anotasi kelas data dengan kelas tersusun dan tidak menggunakan`@DynamoDbFlatten`, item disimpan dengan objek tersusun sebagai atribut tunggal.

Misalnya, bandingkan `Customer` kelas yang ditunjukkan dalam perataan dengan contoh komposisi dengan dan tanpa perataan atribut. `record` Anda dapat memvisualisasikan perbedaannya dengan JSON seperti yang ditunjukkan pada tabel berikut.

| Dengan perataan | Tanpa perataan |
| --- | --- |
| 3 atribut | 2 atribut |
| <pre>{<br>  "id": "1",<br>  "createdDate": "today",<br>  "name": "my name"<br>}</pre> | <pre>{<br>  "id": "1",<br>  "record": {<br>  "createdDate": "today",<br>  "name": "my name"<br>  }</pre> |

| Dengan perataan | Tanpa perataan |
| --- | --- |
| | `}` |

Perbedaannya menjadi penting jika Anda memiliki kode lain yang mengakses tabel DynamoDB yang mengharapkan untuk menemukan atribut tertentu.

Bekerja dengan atribut yang kacang, peta, daftar, dan set

Definisi kacang, seperti `Person` kelas yang ditunjukkan di bawah ini, mungkin mendefinisikan properti (atau atribut) yang merujuk ke tipe dengan atribut tambahan. Misalnya, di `Person` kelas, `mainAddress` adalah properti yang mengacu pada `Address` kacang yang mendefinisikan atribut nilai tambahan. `addresses`mengacu pada Peta Jawa, yang unsur-unsurnya mengacu pada `Address` kacang. Tipe kompleks ini dapat dianggap sebagai wadah atribut sederhana yang Anda gunakan untuk nilai datanya dalam konteks DynamoDB.

DynamoDB mengacu pada properti nilai elemen bersarang, seperti peta, daftar, atau kacang, sebagai atribut bersarang. Panduan Pengembang Amazon DynamoDB mengacu pada bentuk yang disimpan dari peta Java, daftar atau kacang sebagai jenis dokumen. Atribut sederhana yang Anda gunakan untuk nilai data mereka di Java disebut sebagai tipe skalar di DynamoDB. Set, yang berisi beberapa elemen skalar dari jenis yang sama, dan disebut sebagai tipe set.

Penting untuk diketahui bahwa DynamoDB Enhanced Client API mengonversi properti yang bean ke jenis dokumen peta DynamoDB saat disimpan.

**`Person`** kelas

```
@DynamoDbBean
public class Person {
    private Integer id;
    private String firstName;
    private String lastName;
    private Integer age;
    private Address mainAddress;
    private Map<String, Address> addresses;
    private List<PhoneNumber> phoneNumbers;
    private Set<String> hobbies;

    @DynamoDbPartitionKey
    public Integer getId() {
        return id;
```

```
    }

    public void setId(Integer id) {
        this.id = id;
    }

    public String getFirstName() {
        return firstName;
    }

    public void setFirstName(String firstName) {
        this.firstName = firstName;
    }

    public String getLastName() {
        return lastName;
    }

    public void setLastName(String lastName) {
        this.lastName = lastName;
    }

    public Integer getAge() {
        return age;
    }

    public void setAge(Integer age) {
        this.age = age;
    }

    public Address getMainAddress() {
        return mainAddress;
    }

    public void setMainAddress(Address mainAddress) {
        this.mainAddress = mainAddress;
    }

    public Map<String, Address> getAddresses() {
        return addresses;
    }

    public void setAddresses(Map<String, Address> addresses) {
        this.addresses = addresses;
```

```
    }

    public List<PhoneNumber> getPhoneNumbers() {
        return phoneNumbers;
    }

    public void setPhoneNumbers(List<PhoneNumber> phoneNumbers) {
        this.phoneNumbers = phoneNumbers;
    }

    public Set<String> getHobbies() {
        return hobbies;
    }

    public void setHobbies(Set<String> hobbies) {
        this.hobbies = hobbies;
    }

    @Override
    public String toString() {
        return "Person{" +
               "addresses=" + addresses +
               ", id=" + id +
               ", firstName='" + firstName + '\'' +
               ", lastName='" + lastName + '\'' +
               ", age=" + age +
               ", mainAddress=" + mainAddress +
               ", phoneNumbers=" + phoneNumbers +
               ", hobbies=" + hobbies +
               '}';
    }
}
```

### **`Address`** kelas

```
@DynamoDbBean
public class Address {
    private String street;
    private String city;
    private String state;
    private String zipCode;

    public Address() {
```

```
    }

    public String getStreet() {
        return this.street;
    }

    public String getCity() {
        return this.city;
    }

    public String getState() {
        return this.state;
    }

    public String getZipCode() {
        return this.zipCode;
    }

    public void setStreet(String street) {
        this.street = street;
    }

    public void setCity(String city) {
        this.city = city;
    }

    public void setState(String state) {
        this.state = state;
    }

    public void setZipCode(String zipCode) {
        this.zipCode = zipCode;
    }

    @Override
    public boolean equals(Object o) {
        if (this == o) return true;
        if (o == null || getClass() != o.getClass()) return false;
        Address address = (Address) o;
        return Objects.equals(street, address.street) && Objects.equals(city,
address.city) && Objects.equals(state, address.state) && Objects.equals(zipCode,
address.zipCode);
    }
```

```
    @Override
    public int hashCode() {
        return Objects.hash(street, city, state, zipCode);
    }

    @Override
    public String toString() {
        return "Address{" +
                "street='" + street + '\'' +
                ", city='" + city + '\'' +
                ", state='" + state + '\'' +
                ", zipCode='" + zipCode + '\'' +
                '}';
    }
}
```

### **`PhoneNumber`** kelas

```
@DynamoDbBean
public class PhoneNumber {
    String type;
    String number;

    public String getType() {
        return type;
    }

    public void setType(String type) {
        this.type = type;
    }

    public String getNumber() {
        return number;
    }

    public void setNumber(String number) {
        this.number = number;
    }

    @Override
    public String toString() {
        return "PhoneNumber{" +
                "type='" + type + '\'' +
```

```
                ", number='" + number + '\'' +
                '}';
    }
}
```

Simpan tipe kompleks

Gunakan kelas data beranotasi

Anda menyimpan atribut bersarang untuk kelas khusus hanya dengan membuat anotasi. `Address`Kelas dan `PhoneNumber` kelas yang ditampilkan sebelumnya dianotasi hanya dengan anotasi. `@DynamoDbBean` Saat DynamoDB Enhanced Client API membangun skema tabel untuk `Person` kelas dengan cuplikan berikut, API akan menemukan penggunaan class `PhoneNumber` dan dan membangun pemetaan yang sesuai agar berfungsi dengan DynamoDB. `Address`

```
TableSchema<Person> personTableSchema = TableSchema.fromBean(Person.class);
```

Gunakan skema abstrak dengan pembangun

Pendekatan alternatifnya adalah dengan menggunakan pembangun skema tabel statis untuk setiap kelas kacang bersarang seperti yang ditunjukkan pada kode berikut.

Skema tabel untuk `PhoneNumber` kelas `Address` dan abstrak dalam arti bahwa mereka tidak dapat digunakan dengan tabel DynamoDB. Ini karena mereka tidak memiliki definisi untuk kunci utama. Mereka digunakan, bagaimanapun, sebagai skema bersarang dalam skema tabel untuk kelas. `Person`

Setelah baris komentar 1 dan 2 dalam definisi`PERSON_TABLE_SCHEMA`, Anda melihat kode yang menggunakan skema tabel abstrak. Penggunaan `documentOf` dalam `EnhanceType.documentOf(...)` metode tidak menunjukkan bahwa metode mengembalikan `EnhancedDocument` jenis API Dokumen yang Ditingkatkan. `documentOf(...)`Metode dalam konteks ini mengembalikan objek yang tahu bagaimana memetakan argumen kelasnya ke dan dari DynamoDB atribut tabel dengan menggunakan argumen skema tabel.

Kode skema statis

```
    // Abstract table schema that cannot be used to work with a DynamoDB table,
    // but can be used as a nested schema.
    public static final TableSchema<Address> TABLE_SCHEMA_ADDRESS =
TableSchema.builder(Address.class)
        .newItemSupplier(Address::new)
```

```
        .addAttribute(String.class, a -> a.name("street")
            .getter(Address::getStreet)
            .setter(Address::setStreet))
        .addAttribute(String.class, a -> a.name("city")
            .getter(Address::getCity)
            .setter(Address::setCity))
        .addAttribute(String.class, a -> a.name("zipcode")
            .getter(Address::getZipCode)
            .setter(Address::setZipCode))
        .addAttribute(String.class, a -> a.name("state")
            .getter(Address::getState)
            .setter(Address::setState))
        .build();

   // Abstract table schema that cannot be used to work with a DynamoDB table,
   // but can be used as a nested schema.
   public static final TableSchema<PhoneNumber> TABLE_SCHEMA_PHONENUMBER =
TableSchema.builder(PhoneNumber.class)
        .newItemSupplier(PhoneNumber::new)
        .addAttribute(String.class, a -> a.name("type")
            .getter(PhoneNumber::getType)
            .setter(PhoneNumber::setType))
        .addAttribute(String.class, a -> a.name("number")
            .getter(PhoneNumber::getNumber)
            .setter(PhoneNumber::setNumber))
        .build();

   // A static table schema that can be used with a DynamoDB table.
   // The table schema contains two nested schemas that are used to perform mapping
to/from DynamoDB.
   public static final TableSchema<Person> PERSON_TABLE_SCHEMA =
        TableSchema.builder(Person.class)
            .newItemSupplier(Person::new)
            .addAttribute(Integer.class, a -> a.name("id")
                .getter(Person::getId)
                .setter(Person::setId)
                .addTag(StaticAttributeTags.primaryPartitionKey()))
            .addAttribute(String.class, a -> a.name("firstName")
                .getter(Person::getFirstName)
                .setter(Person::setFirstName))
            .addAttribute(String.class, a -> a.name("lastName")
                .getter(Person::getLastName)
                .setter(Person::setLastName))
            .addAttribute(Integer.class, a -> a.name("age")
```

```
                .getter(Person::getAge)
                .setter(Person::setAge))
            .addAttribute(EnhancedType.documentOf(Address.class, TABLE_SCHEMA_ADDRESS),
a -> a.name("mainAddress")
                .getter(Person::getMainAddress)
                .setter(Person::setMainAddress))
            .addAttribute(EnhancedType.listOf(String.class), a -> a.name("hobbies")
                .getter(Person::getHobbies)
                .setter(Person::setHobbies))
            .addAttribute(EnhancedType.mapOf(
                EnhancedType.of(String.class),
                // 1. Use mapping functionality of the Address table schema.
                EnhancedType.documentOf(Address.class, TABLE_SCHEMA_ADDRESS)), a ->
a.name("addresses")
                .getter(Person::getAddresses)
                .setter(Person::setAddresses))
            .addAttribute(EnhancedType.listOf(
                // 2. Use mapping functionality of the PhoneNumber table schema.
                EnhancedType.documentOf(PhoneNumber.class, TABLE_SCHEMA_PHONENUMBER)),
a -> a.name("phoneNumbers")
                .getter(Person::getPhoneNumbers)
                .setter(Person::setPhoneNumbers))
            .build();
```

Atribut proyek dari tipe kompleks

Untuk `query()` dan `scan()` metode, Anda dapat menentukan atribut mana yang ingin Anda kembalikan dalam hasil dengan menggunakan panggilan metode seperti `addNestedAttributeToProject()` dan`attributesToProject()`. DynamoDB Enhanced Client API mengubah parameter panggilan metode Java menjadi ekspresi proyeksi sebelum permintaan dikirim.

Contoh berikut mengisi `Person` tabel dengan dua item, kemudian melakukan tiga operasi pemindaian.

Pemindaian pertama mengakses semua item dalam tabel untuk membandingkan hasilnya dengan operasi pemindaian lainnya.

Pemindaian kedua menggunakan metode `addNestedAttributeToProject()`builder untuk mengembalikan hanya nilai `street` atribut.

Operasi pemindaian ketiga menggunakan metode `attributesToProject()`builder untuk mengembalikan data untuk atribut tingkat pertama,`hobbies`. Jenis atribut `hobbies` adalah daftar. Untuk mengakses item daftar individual, lakukan `get()` operasi pada daftar.

```
        personDynamoDbTable = getDynamoDbEnhancedClient().table("Person",
PERSON_TABLE_SCHEMA);
        PersonUtils.createPersonTable(personDynamoDbTable, getDynamoDbClient());
        // Use a utility class to add items to the Person table.
        List<Person> personList = PersonUtils.getItemsForCount(2);
        // This utility method performs a put against DynamoDB to save the instances in
the list argument.
        PersonUtils.putCollection(getDynamoDbEnhancedClient(), personList,
personDynamoDbTable);

        // The first scan logs all items in the table to compare to the results of the
subsequent scans.
        final PageIterable<Person> allItems = personDynamoDbTable.scan();
        allItems.items().forEach(p ->
                // 1. Log what is in the table.
                logger.info(p.toString()));

        // Scan for nested attributes.
        PageIterable<Person> streetScanResult = personDynamoDbTable.scan(b -> b
                // Use the 'addNestedAttributeToProject()' or
'addNestedAttributesToProject()' to access data nested in maps in DynamoDB.
                .addNestedAttributeToProject(
                        NestedAttributeName.create("addresses", "work", "street")
                ));

        streetScanResult.items().forEach(p ->
                //2. Log the results of requesting nested attributes.
                logger.info(p.toString()));

        // Scan for a top-level list attribute.
        PageIterable<Person> hobbiesScanResult = personDynamoDbTable.scan(b -> b
                // Use the 'attributesToProject()' method to access first-level
attributes.
                .attributesToProject("hobbies"));

        hobbiesScanResult.items().forEach((p) -> {
            // 3. Log the results of the request for the 'hobbies' attribute.
            logger.info(p.toString());
```

```
            // To access an item in a list, first get the parent attribute, 'hobbies',
 then access items in the list.
            String hobby = p.getHobbies().get(1);
            // 4. Log an item in the list.
            logger.info(hobby);
        });
```

```
// Logged results from comment line 1.
Person{id=2, firstName='first name 2', lastName='last name 2', age=11,
 addresses={work=Address{street='street 21', city='city 21', state='state 21',
 zipCode='33333'}, home=Address{street='street 2', city='city 2', state='state 2',
 zipCode='22222'}}, phoneNumbers=[PhoneNumber{type='home', number='222-222-2222'},
 PhoneNumber{type='work', number='333-333-3333'}], hobbies=[hobby 2, hobby 21]}
Person{id=1, firstName='first name 1', lastName='last name 1', age=11,
 addresses={work=Address{street='street 11', city='city 11', state='state 11',
 zipCode='22222'}, home=Address{street='street 1', city='city 1', state='state 1',
 zipCode='11111'}}, phoneNumbers=[PhoneNumber{type='home', number='111-111-1111'},
 PhoneNumber{type='work', number='222-222-2222'}], hobbies=[hobby 1, hobby 11]}

// Logged results from comment line 2.
Person{id=null, firstName='null', lastName='null', age=null,
 addresses={work=Address{street='street 21', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=null}
Person{id=null, firstName='null', lastName='null', age=null,
 addresses={work=Address{street='street 11', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=null}

// Logged results from comment lines 3 and 4.
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
hobby 21
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
hobby 11
```

**Note**

Jika `attributesToProject()` metode mengikuti metode pembangun lain yang menambahkan atribut yang ingin Anda proyeksikan, daftar nama atribut yang diberikan ke `attributesToProject()` menggantikan semua nama atribut lainnya.
Pemindaian yang dilakukan dengan `ScanEnhancedRequest` instance dalam cuplikan berikut hanya mengembalikan data hobi.

```
ScanEnhancedRequest lastOverwrites = ScanEnhancedRequest.builder()
        .addNestedAttributeToProject(
                NestedAttributeName.create("addresses", "work", "street"))
        .addAttributeToProject("firstName")
        // If the 'attributesToProject()' method follows other builder methods
 that add attributes for projection,
        // its list of attributes replace all previous attributes.
        .attributesToProject("hobbies")
        .build();
PageIterable<Person> hobbiesOnlyResult =
 personDynamoDbTable.scan(lastOverwrites);
hobbiesOnlyResult.items().forEach(p ->
        logger.info(p.toString()));

// Logged results.
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
Person{id=null, firstName='null', lastName='null', age=null, addresses=null,
 phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
```

Cuplikan kode berikut menggunakan `attributesToProject()` metode terlebih dahulu. Urutan ini mempertahankan semua atribut lain yang diminta.

```
ScanEnhancedRequest attributesPreserved = ScanEnhancedRequest.builder()
        // Use 'attributesToProject()' first so that the method call does not
 replace all other attributes
        // that you want to project.
        .attributesToProject("firstName")
        .addNestedAttributeToProject(
                NestedAttributeName.create("addresses", "work", "street"))
        .addAttributeToProject("hobbies")
        .build();
PageIterable<Person> allAttributesResult =
 personDynamoDbTable.scan(attributesPreserved);
allAttributesResult.items().forEach(p ->
        logger.info(p.toString()));

// Logged results.
Person{id=null, firstName='first name 2', lastName='null', age=null,
 addresses={work=Address{street='street 21', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=[hobby 2, hobby 21]}
```

```
Person{id=null, firstName='first name 1', lastName='null', age=null,
 addresses={work=Address{street='street 11', city='null', state='null',
 zipCode='null'}}, phoneNumbers=null, hobbies=[hobby 1, hobby 11]}
```

### Gunakan tipe kompleks dalam ekspresi

Anda dapat menggunakan tipe kompleks dalam ekspresi, seperti ekspresi filter dan ekspresi kondisi, dengan menggunakan operator dereferencing untuk menavigasi struktur tipe kompleks. Untuk objek dan peta, gunakan `.` (dot) dan untuk elemen daftar gunakan `[n]` (tanda kurung siku di sekitar nomor urut elemen). Anda tidak dapat merujuk ke elemen individual dari satu set, tetapi Anda dapat menggunakan `contains` fungsi tersebut.

Contoh berikut menunjukkan dua ekspresi filter yang digunakan dalam operasi scan. Ekspresi filter menentukan kondisi kecocokan untuk item yang Anda inginkan dalam hasil. Contoh menggunakan `Person`, `Address`, dan `PhoneNumber` kelas yang ditampilkan sebelumnya.

```
   public void scanUsingFilterOfNestedAttr() {
       // The following is a filter expression for an attribute that is a map of
Address objects.
       // By using this filter expression, the SDK returns Person objects that have an
address
       // with 'mailing' as a key and 'MS2' for a state value.
       Expression addressFilter = Expression.builder()
               .expression("addresses.#type.#field = :value")
               .putExpressionName("#type", "mailing")
               .putExpressionName("#field", "state")
               .putExpressionValue(":value",
AttributeValue.builder().s("MS2").build())
               .build();

       PageIterable<Person> addressFilterResults = personDynamoDbTable.scan(rb -> rb.
               filterExpression(addressFilter));
       addressFilterResults.items().stream().forEach(p -> logger.info("Person: {}",
p));

       assert addressFilterResults.items().stream().count() == 1;


       // The following is a filter expression for an attribute that is a list of
phone numbers.
```

```
        // By using this filter expression, the SDK returns Person objects whose second
phone number
        // in the list has a type equal to 'cell'.
        Expression phoneFilter = Expression.builder()
                .expression("phoneNumbers[1].#type = :type")
                .putExpressionName("#type", "type")
                .putExpressionValue(":type",
AttributeValue.builder().s("cell").build())
                .build();

        PageIterable<Person> phoneFilterResults = personDynamoDbTable.scan(rb -> rb
                .filterExpression(phoneFilter)
                .attributesToProject("id", "firstName", "lastName", "phoneNumbers")
        );

        phoneFilterResults.items().stream().forEach(p -> logger.info("Person: {}", p));

        assert phoneFilterResults.items().stream().count() == 1;
        assert
phoneFilterResults.items().stream().findFirst().get().getPhoneNumbers().get(1).getType().equal
    }
```

Metode pembantu yang mengisi tabel

```
    public static void populateDatabase() {
        Person person1 = new Person();
        person1.setId(1);
        person1.setFirstName("FirstName1");
        person1.setLastName("LastName1");

        Address billingAddr1 = new Address();
        billingAddr1.setState("BS1");
        billingAddr1.setCity("BillingTown1");

        Address mailing1 = new Address();
        mailing1.setState("MS1");
        mailing1.setCity("MailingTown1");

        person1.setAddresses(Map.of("billing", billingAddr1, "mailing", mailing1));

        PhoneNumber pn1_1 = new PhoneNumber();
        pn1_1.setType("work");
        pn1_1.setNumber("111-111-1111");
```

```
        PhoneNumber pn1_2 = new PhoneNumber();
        pn1_2.setType("home");
        pn1_2.setNumber("222-222-2222");

        List<PhoneNumber> phoneNumbers1 = List.of(pn1_1, pn1_2);
        person1.setPhoneNumbers(phoneNumbers1);

        personDynamoDbTable.putItem(person1);

        Person person2 = person1;
        person2.setId(2);
        person2.setFirstName("FirstName2");
        person2.setLastName("LastName2");

        Address billingAddress2 = billingAddr1;
        billingAddress2.setCity("BillingTown2");
        billingAddress2.setState("BS2");

        Address mailing2 = mailing1;
        mailing2.setCity("MailingTown2");
        mailing2.setState("MS2");

        person2.setAddresses(Map.of("billing", billingAddress2, "mailing", mailing2));

        PhoneNumber pn2_1 = new PhoneNumber();
        pn2_1.setType("work");
        pn2_1.setNumber("333-333-3333");

        PhoneNumber pn2_2 = new PhoneNumber();
        pn2_2.setType("cell");
        pn2_2.setNumber("444-444-4444");

        List<PhoneNumber> phoneNumbers2 = List.of(pn2_1, pn2_2);
        person2.setPhoneNumbers(phoneNumbers2);

        personDynamoDbTable.putItem(person2);
    }
```

## Representasi JSON item dalam database

```
{
 "id": 1,
```

```
 "addresses": {
  "billing": {
   "city": "BillingTown1",
   "state": "BS1",
   "street": null,
   "zipCode": null
  },
  "mailing": {
   "city": "MailingTown1",
   "state": "MS1",
   "street": null,
   "zipCode": null
  }
 },
 "firstName": "FirstName1",
 "lastName": "LastName1",
 "phoneNumbers": [
  {
   "number": "111-111-1111",
   "type": "work"
  },
  {
   "number": "222-222-2222",
   "type": "home"
  }
 ]
}

{
 "id": 2,
 "addresses": {
  "billing": {
   "city": "BillingTown2",
   "state": "BS2",
   "street": null,
   "zipCode": null
  },
  "mailing": {
   "city": "MailingTown2",
   "state": "MS2",
   "street": null,
   "zipCode": null
  }
 },
```

```
 "firstName": "FirstName2",
 "lastName": "LastName2",
 "phoneNumbers": [
  {
   "number": "333-333-3333",
   "type": "work"
  },
  {
   "number": "444-444-4444",
   "type": "cell"
  }
 ]
}
```

Perbarui item yang berisi tipe kompleks

Untuk memperbarui item yang berisi tipe kompleks, Anda memiliki dua pendekatan dasar:

- Pendekatan 1: Pertama ambil item (dengan menggunakan`getItem`), perbarui objek, lalu panggil`DynamoDbTable#updateItem`.
- Pendekatan 2: Jangan mengambil item, tetapi buat instance baru, atur properti yang ingin Anda perbarui, dan kirimkan instance `DynamoDbTable#updateItem` dengan menyetel nilai yang sesuai dari. `IgnoreNullsMode` Pendekatan ini tidak mengharuskan Anda mengambil item sebelum memperbaruinya.

Contoh yang ditunjukkan di bagian ini menggunakan`Person`,`Address`, dan `PhoneNumber` kelas yang ditunjukkan sebelumnya.

Perbarui pendekatan 1: ambil, lalu perbarui

Dengan menggunakan pendekatan ini, Anda memastikan bahwa tidak ada data yang hilang pada pembaruan. DynamoDB Enhanced Client API membuat ulang bean dengan atribut dari item yang disimpan di DynamoDB termasuk nilai tipe kompleks. Anda kemudian perlu menggunakan getter dan setter untuk memperbarui kacang. Kelemahan dari pendekatan ini adalah biaya yang Anda keluarkan untuk mengambil item terlebih dahulu.

Contoh berikut menunjukkan bahwa tidak ada data yang hilang jika Anda pertama kali mengambil item sebelum memperbaruinya.

```
    public void retrieveThenUpdateExample()  {
        // Assume that we ran this code yesterday.
```

```
        Person person = new Person();
        person.setId(1);
        person.setFirstName("FirstName");
        person.setLastName("LastName");

        Address mainAddress = new Address();
        mainAddress.setStreet("123 MyStreet");
        mainAddress.setCity("MyCity");
        mainAddress.setState("MyState");
        mainAddress.setZipCode("MyZipCode");
        person.setMainAddress(mainAddress);

        PhoneNumber homePhone = new PhoneNumber();
        homePhone.setNumber("1111111");
        homePhone.setType("HOME");
        person.setPhoneNumbers(List.of(homePhone));

        personDynamoDbTable.putItem(person);

        // Assume that we are running this code now.
        // First, retrieve the item
        Person retrievedPerson =
personDynamoDbTable.getItem(Key.builder().partitionValue(1).build());

        // Make any updates.
        retrievedPerson.getMainAddress().setCity("YourCity");

        // Save the updated bean. 'updateItem' returns the bean as it appears after the
update.
        Person updatedPerson = personDynamoDbTable.updateItem(retrievedPerson);

        // Verify for this example.
        Address updatedMainAddress = updatedPerson.getMainAddress();
        assert updatedMainAddress.getCity().equals("YourCity");
        assert updatedMainAddress.getState().equals("MyState"); // Unchanged.
        // The list of phone numbers remains; it was not set to null;
        assert updatedPerson.getPhoneNumbers().size() == 1;
    }
```

Pendekatan pembaruan 2: Gunakan **`IgnoreNullsMode`** enum tanpa mengambil item terlebih dahulu

Untuk memperbarui item di DynamoDB, Anda dapat memberikan objek baru yang hanya memiliki properti yang ingin diperbarui dan membiarkan nilai lainnya sebagai null. Dengan pendekatan ini, Anda perlu mengetahui bagaimana nilai nol dalam objek diperlakukan oleh SDK dan bagaimana Anda dapat mengontrol perilaku.

Untuk menentukan properti bernilai nol mana yang ingin diabaikan oleh SDK, berikan `IgnoreNullsMode` enum saat Anda membuat. `UpdateItemEnhancedRequest` Sebagai contoh menggunakan salah satu nilai yang disebutkan, cuplikan berikut menggunakan mode. `IgnoreNullsMode.SCALAR_ONLY`

```
// Create a new Person object to update the existing item in DynamoDB.
Person personForUpdate = new Person();
personForUpdate.setId(1);
personForUpdate.setFirstName("updatedFirstName");  // 'firstName' is a top scalar
 property.

Address addressForUpdate = new Address();
addressForUpdate.setCity("updatedCity");
personForUpdate.setMainAddress(addressForUpdate);

personDynamoDbTable.updateItem(r -> r
                .item(personForUpdate)
                .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY));

/* With IgnoreNullsMode.SCALAR_ONLY provided, The SDK ignores all null properties. The
 SDK adds or replaces
the 'firstName' property with the provided value, "updatedFirstName". The SDK updates
 the 'city' value of
'mainAddress', as long as the 'mainAddress' attribute already exists in DynamoDB.

In the background, the SDK generates an update expression that it sends in the request
 to DynamoDB.
The following JSON object is a simplified version of what it sends. Notice that the SDK
 includes the paths
to 'mainAddress.city' and 'firstName' in the SET clause of the update expression. No
 null values in
'personForUpdate' are included.

{
```

```
  "TableName": "PersonTable",
  "Key": {
    "id": {
      "N": "1"
    }
  },
  "ReturnValues": "ALL_NEW",
  "UpdateExpression": "SET #mainAddress.#city = :mainAddress_city, #firstName
 = :firstName",
  "ExpressionAttributeNames": {
    "#city": "city",
    "#firstName": "firstName",
    "#mainAddress": "mainAddress"
  },
  "ExpressionAttributeValues": {
    ":firstName": {
      "S": "updatedFirstName"
    },
    ":mainAddress_city": {
      "S": "updatedCity"
    }
  }
}

Had we chosen 'IgnoreNullsMode.DEFAULT' instead of 'IgnoreNullsMode.SCALAR_ONLY', the
 SDK would have included
null values in the "ExpressionAttributeValues" section of the request as shown in the
 following snippet.

  "ExpressionAttributeValues": {
    ":mainAddress": {
      "M": {
        "zipCode": {
          "NULL": true
        },
        "city": {
          "S": "updatedCity"
        },
        "street": {
          "NULL": true
        },
        "state": {
          "NULL": true
        }
```

```
      }
    },
    ":firstName": {
      "S": "updatedFirstName"
    }
  }
*/
```

Panduan Pengembang Amazon DynamoDB berisi informasi lebih lanjut tentang ekspresi pembaruan.

Deskripsi opsi **`IgnoreNullsMode`**

- `IgnoreNullsMode.SCALAR_ONLY`- Gunakan pengaturan ini untuk memperbarui atribut skalar di tingkat manapun. SDK membuat pernyataan pembaruan yang hanya mengirimkan atribut skalar non-null ke DynamoDB. SDK mengabaikan atribut skalar bernilai nol dari kacang atau peta, mempertahankan nilai yang disimpan di DynamoDB.

  Saat Anda memperbarui atribut skalar map atau bean, peta harus sudah ada di DynamoDB. Jika Anda menambahkan peta atau kacang ke objek yang belum ada untuk objek di DynamoDB, Anda mendapatkan dengan pesan Jalur dokumen *`DynamoDbException`* yang disediakan dalam ekspresi pembaruan tidak valid untuk pembaruan. Anda harus menggunakan `MAPS_ONLY` mode untuk menambahkan kacang atau peta ke DynamoDB sebelum Anda memperbarui salah satu atributnya.
- `IgnoreNullsMode.MAPS_ONLY`- Gunakan pengaturan ini untuk menambah atau mengganti properti yang merupakan kacang atau peta. SDK menggantikan atau menambahkan peta atau kacang apa pun yang disediakan dalam objek. Setiap kacang atau peta yang null dalam objek diabaikan, mempertahankan peta yang ada di DynamoDB.
- `IgnoreNullsMode.DEFAULT`- Dengan pengaturan ini, SDK tidak pernah mengabaikan nilai null. Atribut skalar pada tingkat manapun yang null diperbarui ke null. SDK memperbarui properti bean, map, list, atau set bernilai nol dalam objek ke null di DynamoDB. Saat Anda menggunakan mode ini—atau tidak menyediakan mode karena ini adalah mode default—Anda harus mengambil item terlebih dahulu sehingga nilai di DynamoDB tidak disetel ke null yang disediakan dalam objek untuk diperbarui, kecuali niat Anda adalah untuk mengatur nilai ke null.

Dalam semua mode, jika Anda memberikan objek `updateItem` yang memiliki daftar atau set non-null, daftar atau set disimpan ke DynamoDB.

Mengapa mode?

Saat Anda memberikan objek dengan kacang atau peta ke `updateItem` metode, SDK tidak dapat mengetahui apakah objek tersebut harus menggunakan nilai properti dalam kacang (atau nilai entri di peta) untuk memperbarui item, atau apakah keseluruhan bean/map harus menggantikan apa yang telah disimpan ke DynamoDB.

Bekerja dari contoh sebelumnya yang menunjukkan pengambilan item terlebih dahulu, mari kita coba memperbarui `city` atribut `mainAddress` tanpa pengambilan.

```
/* The retrieval example saved the Person object with a 'mainAddress' property whose
 'city' property value is "MyCity".
/* Note that we create a new Person with only the necessary information to update the
 city value
of the mainAddress. */
Person personForUpdate = new Person();
personForUpdate.setId(1);
// The update we want to make changes the city.
Address mainAddressForUpdate = new Address();
mainAddressForUpdate.setCity("YourCity");
personForUpdate.setMainAddress(mainAddressForUpdate);

// Lets' try the following:
Person updatedPerson = personDynamoDbTable.updateItem(personForUpdate);
/*
 Since we haven't retrieved the item, we don't know if the 'mainAddress' property
 already exists, so what update expression should the SDK generate?

A) Should it replace or add the 'mainAddress' with the provided object (setting all
 attributes to null other than city)
   as shown in the following simplified JSON?

      {
        "TableName": "PersonTable",
        "Key": {
          "id": {
            "N": "1"
          }
        },
        "ReturnValues": "ALL_NEW",
        "UpdateExpression": "SET #mainAddress = :mainAddress",
        "ExpressionAttributeNames": {
          "#mainAddress": "mainAddress"
```

```
        },
        "ExpressionAttributeValues": {
          ":mainAddress": {
            "M": {
              "zipCode": {
                "NULL": true
              },
              "city": {
                "S": "YourCity"
              },
              "street": {
                "NULL": true
              },
              "state": {
                "NULL": true
              }
            }
          }
        }
      }

B) Or should it update only the 'city' attribute of an existing 'mainAddress' as shown
 in the following simplified JSON?

      {
        "TableName": "PersonTable",
        "Key": {
          "id": {
            "N": "1"
          }
        },
        "ReturnValues": "ALL_NEW",
        "UpdateExpression": "SET #mainAddress.#city = :mainAddress_city",
        "ExpressionAttributeNames": {
          "#city": "city",
          "#mainAddress": "mainAddress"
        },
        "ExpressionAttributeValues": {
          ":mainAddress_city": {
            "S": "YourCity"
          }
        }
      }
```

```
However, assume that we don't know if the 'mainAddress' already exists. If it doesn't
 exist, the SDK would try to update
an attribute of a non-existent map, which results in an exception.

In this particular case, we would likely select option B (SCALAR_ONLY) to retain the
 other values of the 'mainAddress'.
*/
```

Dua contoh berikut menunjukkan penggunaan nilai `MAPS_ONLY` dan `SCALAR_ONLY` enumerasi. `MAPS_ONLY`menambahkan peta dan `SCALAR_ONLY` memperbarui peta.

### Contoh **`IgnoreNullsMode.MAPS_ONLY`**

```
    public void mapsOnlyModeExample() {
        // Assume that we ran this code yesterday.
        Person person = new Person();
        person.setId(1);
        person.setFirstName("FirstName");

        personDynamoDbTable.putItem(person);

        // Assume that we are running this code now.

        /* Note that we create a new Person with only the necessary information to
 update the city value
        of the mainAddress. */
        Person personForUpdate = new Person();
        personForUpdate.setId(1);
        // The update we want to make changes the city.
        Address mainAddressForUpdate = new Address();
        mainAddressForUpdate.setCity("YourCity");
        personForUpdate.setMainAddress(mainAddressForUpdate);


        Person updatedPerson = personDynamoDbTable.updateItem(r -> r
                .item(personForUpdate)
                .ignoreNullsMode(IgnoreNullsMode.MAPS_ONLY)); // Since the mainAddress
 property does not exist, use MAPS_ONLY mode.
        assert updatedPerson.getMainAddress().getCity().equals("YourCity");
        assert updatedPerson.getMainAddress().getState() == null;
    }
```

### IgnoreNullsMode.SCALAR_ONLY example

```
   public void scalarOnlyExample() {
       // Assume that we ran this code yesterday.
       Person person = new Person();
       person.setId(1);
       Address mainAddress = new Address();
       mainAddress.setCity("MyCity");
       mainAddress.setState("MyState");
       person.setMainAddress(mainAddress);

       personDynamoDbTable.putItem(person);

       // Assume that we are running this code now.

       /* Note that we create a new Person with only the necessary information to
update the city value
       of the mainAddress. */
       Person personForUpdate = new Person();
       personForUpdate.setId(1);
       // The update we want to make changes the city.
       Address mainAddressForUpdate = new Address();
       mainAddressForUpdate.setCity("YourCity");
       personForUpdate.setMainAddress(mainAddressForUpdate);

       Person updatedPerson = personDynamoDbTable.updateItem(r -> r
               .item(personForUpdate)
               .ignoreNullsMode(IgnoreNullsMode.SCALAR_ONLY)); // SCALAR_ONLY mode
ignores null properties in the in mainAddress.
       assert updatedPerson.getMainAddress().getCity().equals("YourCity");
       assert updatedPerson.getMainAddress().getState().equals("MyState"); // The
state property remains the same.
   }
```

Lihat tabel berikut untuk melihat nilai null mana yang diabaikan untuk setiap mode. Anda sering dapat bekerja dengan salah satu `SCALAR_ONLY` dan `MAPS_ONLY` kecuali ketika Anda bekerja dengan kacang atau peta.

Properti bernilai nol mana dalam objek yang dikirimkan yang diabaikan SDK untuk **`updateItem`** setiap mode?

| Jenis properti | dalam mode SCALAR_ONLY | dalam mode MAPS_ONLY | dalam mode DEFAULT |
|---|---|---|---|
| Skalar teratas | Ya | Ya | Tidak |
| Kacang atau peta | Ya | Ya | Tidak |
| Nilai skalar entri kacang atau peta | Ya[1] | Tidak [2] | Tidak |
| Daftar atau set | Ya | Ya | Tidak |

[1] Ini mengasumsikan peta sudah ada di DynamoDB. Nilai skalar apa pun—null atau bukan null—dari kacang atau peta yang Anda berikan di objek untuk pembaruan mengharuskan jalur ke nilai ada di DynamoDB. SDK membuat jalur ke atribut dengan menggunakan operator `. (dot)` dereference sebelum mengirimkan permintaan.

[2] Karena Anda menggunakan `MAPS_ONLY` mode untuk sepenuhnya mengganti atau menambahkan kacang atau peta, semua nilai nol dalam kacang atau peta dipertahankan di peta yang disimpan ke DynamoDB.

Pertahankan benda kosong dengan **`@DynamoDbPreserveEmptyObject`**

Jika Anda menyimpan kacang ke Amazon DynamoDB dengan objek kosong dan Anda ingin SDK membuat ulang objek kosong saat pengambilan, beri anotasi pengambil kacang bagian dalam dengan. `@DynamoDbPreserveEmptyObject`

Untuk mengilustrasikan cara kerja anotasi, contoh kode menggunakan dua kacang berikut.

Contoh kacang

Kelas data berikut berisi dua `InnerBean` bidang. Metode getter,`getInnerBeanWithoutAnno()`, tidak dijelaskan dengan. `@DynamoDbPreserveEmptyObject` `getInnerBeanWithAnno()`Metode ini dijelaskan.

```
@DynamoDbBean
public class MyBean {
```

```
    private String id;
    private String name;
    private InnerBean innerBeanWithoutAnno;
    private InnerBean innerBeanWithAnno;

    @DynamoDbPartitionKey
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }

    public InnerBean getInnerBeanWithoutAnno() { return innerBeanWithoutAnno; }
    public void setInnerBeanWithoutAnno(InnerBean innerBeanWithoutAnno)
 { this.innerBeanWithoutAnno = innerBeanWithoutAnno; }

    @DynamoDbPreserveEmptyObject
    public InnerBean getInnerBeanWithAnno() { return innerBeanWithAnno; }
    public void setInnerBeanWithAnno(InnerBean innerBeanWithAnno)
 { this.innerBeanWithAnno = innerBeanWithAnno; }

    @Override
    public String toString() {
        return new StringJoiner(", ", MyBean.class.getSimpleName() + "[", "]")
                .add("innerBeanWithoutAnno=" + innerBeanWithoutAnno)
                .add("innerBeanWithAnno=" + innerBeanWithAnno)
                .add("id='" + id + "'")
                .add("name='" + name + "'")
                .toString();
    }
}
```

Contoh dari `InnerBean` kelas berikut adalah bidang `MyBean` dan diinisialisasi sebagai objek kosong dalam kode contoh.

```
@DynamoDbBean
public class InnerBean {

    private String innerBeanField;

    public String getInnerBeanField() {
        return innerBeanField;
```

```
    }

    public void setInnerBeanField(String innerBeanField) {
        this.innerBeanField = innerBeanField;
    }

    @Override
    public String toString() {
        return "InnerBean{" +
                "innerBeanField='" + innerBeanField + '\'' +
                '}';
    }
}
```

Contoh kode berikut menyimpan `MyBean` objek dengan kacang dalam yang diinisialisasi ke DynamoDB dan kemudian mengambil item tersebut. Output yang dicatat menunjukkan bahwa tidak `innerBeanWithoutAnno` diinisialisasi, tetapi `innerBeanWithAnno` telah dibuat.

```
    public MyBean preserveEmptyObjectAnnoUsingGetItemExample(DynamoDbTable<MyBean>
 myBeanTable) {
        // Save an item to DynamoDB.
        MyBean bean = new MyBean();
        bean.setId("1");
        bean.setInnerBeanWithoutAnno(new InnerBean());   // Instantiate the inner bean.
        bean.setInnerBeanWithAnno(new InnerBean());      // Instantiate the inner bean.
        myBeanTable.putItem(bean);

        GetItemEnhancedRequest request = GetItemEnhancedRequest.builder()
                .key(Key.builder().partitionValue("1").build())
                .build();
        MyBean myBean = myBeanTable.getItem(request);

        logger.info(myBean.toString());
        // Output 'MyBean[innerBeanWithoutAnno=null,
 innerBeanWithAnno=InnerBean{innerBeanField='null'}, id='1', name='null']'.

        return myBean;
    }
```

Skema statis alternatif

Anda dapat menggunakan `StaticTableSchema` versi skema tabel berikut sebagai pengganti anotasi pada kacang.

```
    public static TableSchema<MyBean> buildStaticSchemas() {

        StaticTableSchema<InnerBean> innerBeanStaticTableSchema =
                StaticTableSchema.builder(InnerBean.class)
                        .newItemSupplier(InnerBean::new)
                        .addAttribute(String.class, a -> a.name("innerBeanField")
                                .getter(InnerBean::getInnerBeanField)
                                .setter(InnerBean::setInnerBeanField))
                        .build();

        return StaticTableSchema.builder(MyBean.class)
                .newItemSupplier(MyBean::new)
                .addAttribute(String.class, a -> a.name("id")
                        .getter(MyBean::getId)
                        .setter(MyBean::setId)
                        .addTag(primaryPartitionKey()))
                .addAttribute(String.class, a -> a.name("name")
                        .getter(MyBean::getName)
                        .setter(MyBean::setName))
                .addAttribute(EnhancedType.documentOf(InnerBean.class,
                                innerBeanStaticTableSchema),
                        a -> a.name("innerBean1")
                                .getter(MyBean::getInnerBeanWithoutAnno)
                                .setter(MyBean::setInnerBeanWithoutAnno))
                .addAttribute(EnhancedType.documentOf(InnerBean.class,
                                innerBeanStaticTableSchema,
                                b -> b.preserveEmptyObject(true)),
                        a -> a.name("innerBean2")
                                .getter(MyBean::getInnerBeanWithAnno)
                                .setter(MyBean::setInnerBeanWithAnno))
                .build();
    }
```

Hindari menyimpan atribut null dari objek bersarang

Anda dapat melewati atribut null dari objek bersarang saat menyimpan objek kelas data ke DynamoDB dengan menerapkan anotasi. `@DynamoDbIgnoreNulls` Sebaliknya, atribut tingkat atas dengan nilai null tidak pernah disimpan ke database.

Untuk mengilustrasikan cara kerja anotasi, contoh kode menggunakan dua kacang berikut.

### Contoh kacang

Kelas data berikut berisi dua `InnerBean` bidang. Metode getter,`getInnerBeanWithoutAnno()`, tidak dijelaskan. `getInnerBeanWithIgnoreNullsAnno()`Metode ini dianotasi dengan. `@DynamoDbIgnoreNulls`

```
@DynamoDbBean
public class MyBean {

    private String id;
    private String name;
    private InnerBean innerBeanWithoutAnno;
    private InnerBean innerBeanWithIgnoreNullsAnno;

    @DynamoDbPartitionKey
    public String getId() { return id; }
    public void setId(String id) { this.id = id; }

    public String getName() { return name; }
    public void setName(String name) { this.name = name; }

    public InnerBean getInnerBeanWithoutAnno() { return innerBeanWithoutAnno; }
    public void setInnerBeanWithoutAnno(InnerBean innerBeanWithoutAnno)
 { this.innerBeanWithoutAnno = innerBeanWithoutAnno; }

    @DynamoDbIgnoreNulls
    public InnerBean getInnerBeanWithIgnoreNullsAnno() { return
 innerBeanWithIgnoreNullsAnno; }
    public void setInnerBeanWithIgnoreNullsAnno(InnerBean innerBeanWithAnno)
 { this.innerBeanWithIgnoreNullsAnno = innerBeanWithAnno; }

    @Override
    public String toString() {
        return new StringJoiner(", ", MyBean.class.getSimpleName() + "[", "]")
                .add("innerBeanWithoutAnno=" + innerBeanWithoutAnno)
                .add("innerBeanWithIgnoreNullsAnno=" + innerBeanWithIgnoreNullsAnno)
                .add("id='" + id + "'")
                .add("name='" + name + "'")
                .toString();
    }
}
```

Contoh dari `InnerBean` kelas berikut adalah bidang `MyBean` dan digunakan dalam kode contoh berikut.

```
@DynamoDbBean
public class InnerBean {

    private String innerBeanFieldString;
    private Integer innerBeanFieldInteger;

    public String getInnerBeanFieldString() { return innerBeanFieldString; }
    public void setInnerBeanFieldString(String innerBeanFieldString)
 { this.innerBeanFieldString = innerBeanFieldString; }

    public Integer getInnerBeanFieldInteger() { return innerBeanFieldInteger; }
    public void setInnerBeanFieldInteger(Integer innerBeanFieldInteger)
 { this.innerBeanFieldInteger = innerBeanFieldInteger; }

    @Override
    public String toString() {
        return new StringJoiner(", ", InnerBean.class.getSimpleName() + "[", "]")
                .add("innerBeanFieldString='" + innerBeanFieldString + "'")
                .add("innerBeanFieldInteger=" + innerBeanFieldInteger)
                .toString();
    }
}
```

Contoh kode berikut menciptakan `InnerBean` objek dan menetapkan hanya satu dari dua atribut dengan nilai.

```
    public void ignoreNullsAnnoUsingPutItemExample(DynamoDbTable<MyBean> myBeanTable) {
        // Create an InnerBean object and give only one attribute a value.
        InnerBean innerBeanOneAttributeSet = new InnerBean();
        innerBeanOneAttributeSet.setInnerBeanFieldInteger(200);

        // Create a MyBean instance and use the same InnerBean instance both for
 attributes.
        MyBean bean = new MyBean();
        bean.setId("1");
        bean.setInnerBeanWithoutAnno(innerBeanOneAttributeSet);
        bean.setInnerBeanWithIgnoreNullsAnno(innerBeanOneAttributeSet);

        Map<String, AttributeValue> itemMap = myBeanTable.tableSchema().itemToMap(bean,
 true);
```

```
        logger.info(itemMap.toString());
        // Log the map that is sent to the database.
        //
{innerBeanWithIgnoreNullsAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200)}),
id=AttributeValue(S=1),
innerBeanWithoutAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200),
innerBeanFieldString=AttributeValue(NUL=true)})}

        // Save the MyBean object to the table.
        myBeanTable.putItem(bean);
    }
```

Untuk memvisualisasikan data tingkat rendah yang dikirim ke DynamoDB, kode mencatat peta atribut sebelum menyimpan objek. `MyBean`

Output yang dicatat menunjukkan bahwa `innerBeanWithIgnoreNullsAnno` output satu atribut,

```
innerBeanWithIgnoreNullsAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200)})
```

`innerBeanWithoutAnno`Instance menghasilkan dua atribut. Satu atribut memiliki nilai 200 dan yang lainnya adalah atribut bernilai nol.

```
innerBeanWithoutAnno=AttributeValue(M={innerBeanFieldInteger=AttributeValue(N=200),
 innerBeanFieldString=AttributeValue(NUL=true)})
```

Representasi JSON dari peta atribut

Representasi JSON berikut membuatnya lebih mudah untuk melihat data yang disimpan ke DynamoDB.

```
{
  "id": {
    "S": "1"
  },
  "innerBeanWithIgnoreNullsAnno": {
    "M": {
      "innerBeanFieldInteger": {
        "N": "200"
      }
    }
  },
  "innerBeanWithoutAnno": {
```

```
    "M": {
      "innerBeanFieldInteger": {
        "N": "200"
      },
      "innerBeanFieldString": {
        "NULL": true
      }
    }
  }
}
```

Skema statis alternatif

Anda dapat menggunakan `StaticTableSchema` versi berikut dari skema tabel di tempat anotasi kelas data.

```
public static TableSchema<MyBean> buildStaticSchemas() {

    StaticTableSchema<InnerBean> innerBeanStaticTableSchema =
        StaticTableSchema.builder(InnerBean.class)
            .newItemSupplier(InnerBean::new)
            .addAttribute(String.class, a -> a.name("innerBeanFieldString")
                .getter(InnerBean::getInnerBeanFieldString)
                .setter(InnerBean::setInnerBeanFieldString))
            .addAttribute(Integer.class, a -> a.name("innerBeanFieldInteger")
                .getter(InnerBean::getInnerBeanFieldInteger)
                .setter(InnerBean::setInnerBeanFieldInteger))
            .build();

    return StaticTableSchema.builder(MyBean.class)
        .newItemSupplier(MyBean::new)
        .addAttribute(String.class, a -> a.name("id")
            .getter(MyBean::getId)
            .setter(MyBean::setId)
            .addTag(primaryPartitionKey()))
        .addAttribute(String.class, a -> a.name("name")
            .getter(MyBean::getName)
            .setter(MyBean::setName))
        .addAttribute(EnhancedType.documentOf(InnerBean.class,
                innerBeanStaticTableSchema),
            a -> a.name("innerBeanWithoutAnno")
                .getter(MyBean::getInnerBeanWithoutAnno)
                .setter(MyBean::setInnerBeanWithoutAnno))
```

```
        .addAttribute(EnhancedType.documentOf(InnerBean.class,
                innerBeanStaticTableSchema,
                b -> b.ignoreNulls(true)),
            a -> a.name("innerBeanWithIgnoreNullsAnno")
                .getter(MyBean::getInnerBeanWithIgnoreNullsAnno)
                .setter(MyBean::setInnerBeanWithIgnoreNullsAnno))
        .build();
}
```

## Bekerja dengan dokumen JSON dengan Enhanced Document API untuk DynamoDB

Enhanced Document API for AWS SDK for Java 2.x dirancang untuk bekerja dengan data berorientasi dokumen yang tidak memiliki skema tetap. Namun, ini juga memungkinkan Anda menggunakan kelas khusus untuk memetakan atribut individual.

Enhanced Document API adalah penerus Document API dari AWS SDK untuk Java v1.x.

Daftar Isi


- Mulai menggunakan Enhanced Document API
  - Buat DocumentTableSchema dan a DynamoDbTable
- Membangun dokumen yang disempurnakan
  - Membangun dari string JSON
  - Membangun dari elemen individu
- Lakukan operasi CRUD
- Akses atribut dokumen yang disempurnakan sebagai objek khusus
- Gunakan EnhancedDocument tanpa DynamoDB


### Mulai menggunakan Enhanced Document API

Enhanced Document API memerlukan dependensi yang sama yang diperlukan untuk DynamoDB Enhanced Client API. Ini juga membutuhkan `DynamoDbEnhancedClient`contoh seperti yang ditunjukkan di awal topik ini.

Karena API Dokumen yang Ditingkatkan dirilis dengan versi 2.20.3 AWS SDK for Java 2.x, Anda memerlukan versi itu atau lebih tinggi.

Buat **`DocumentTableSchema`** dan a **`DynamoDbTable`**

Untuk menjalankan perintah terhadap tabel DynamoDB menggunakan Enhanced Document API, kaitkan tabel dengan objek resource **<** **>** sisi DynamoDbTableklien EnhancedDocument.

`table()`Metode klien yang disempurnakan membuat `DynamoDbTable<EnhancedDocument>` instance dan membutuhkan parameter untuk nama tabel DynamoDB dan a. `DocumentTableSchema`

Pembangun untuk a DocumentTableSchemamemerlukan kunci indeks utama dan satu atau lebih penyedia konverter atribut. `AttributeConverterProvider.defaultProvider()`Metode ini menyediakan konverter untuk tipe default. Itu harus ditentukan bahkan jika Anda menyediakan penyedia konverter atribut khusus. Anda dapat menambahkan kunci indeks sekunder opsional ke pembangun.

Cuplikan kode berikut menunjukkan kode yang menghasilkan representasi sisi klien dari tabel DynamoDB yang menyimpan objek tanpa skema. `person` `EnhancedDocument`

```
DynamoDbTable<EnhancedDocument> documentDynamoDbTable =
                enhancedClient.table("person",
                        TableSchema.documentSchemaBuilder()
                            // Specify the primary key attributes.

 .addIndexPartitionKey(TableMetadata.primaryIndexName(),"id", AttributeValueType.S)
                            .addIndexSortKey(TableMetadata.primaryIndexName(),
 "lastName", AttributeValueType.S)
                            // Specify attribute converter providers. Minimally add the
 default one.

 .attributeConverterProviders(AttributeConverterProvider.defaultProvider())
                            .build());

// Call documentTable.createTable() if "person" does not exist in DynamoDB.
// createTable() should be called only one time.
```

Berikut ini menunjukkan representasi JSON dari `person` objek yang digunakan di seluruh bagian ini.

Objek JSON **`person`**

```
{
  "id": 1,
  "firstName": "Richard",
```

```
  "lastName": "Roe",
  "age": 25,
  "addresses":
    {
      "home": {
        "zipCode": "00000",
        "city": "Any Town",
        "state": "FL",
        "street": "123 Any Street"
      },
      "work": {
        "zipCode": "00001",
        "city": "Anywhere",
        "state": "FL",
        "street": "100 Main Street"
      }
    },
  "hobbies": [
    "Hobby 1",
    "Hobby 2"
  ],
  "phoneNumbers": [
    {
      "type": "Home",
      "number": "555-0100"
    },
    {
      "type": "Work",
      "number": "555-0119"
    }
  ]
}
```

Membangun dokumen yang disempurnakan

An `EnhancedDocument` merupakan objek tipe dokumen yang memiliki struktur kompleks dengan atribut bersarang. Sebuah `EnhancedDocument` membutuhkan atribut tingkat atas yang cocok dengan atribut kunci utama yang ditentukan untuk atribut. `DocumentTableSchema` Konten yang tersisa bersifat arbitrer dan dapat terdiri dari atribut tingkat atas dan juga atribut yang sangat bersarang.

Anda membuat `EnhancedDocument` instance dengan menggunakan builder yang menyediakan beberapa cara untuk menambahkan elemen.

Membangun dari string JSON

Dengan string JSON, Anda dapat membangun panggilan `EnhancedDocument` dalam satu metode. Cuplikan berikut membuat `EnhancedDocument` dari string JSON dikembalikan oleh metode helper. `jsonPerson()` `jsonPerson()`Metode mengembalikan versi string JSON dari objek orang yang ditunjukkan sebelumnya.

```
EnhancedDocument document =
        EnhancedDocument.builder()
                        .json( jsonPerson() )
                        .build());
```

Membangun dari elemen individu

Atau, Anda dapat membangun sebuah `EnhancedDocument` instance dari komponen individual menggunakan metode type-safe dari builder.

Contoh berikut membangun dokumen yang `person` disempurnakan mirip dengan dokumen yang disempurnakan yang dibangun dari string JSON pada contoh sebelumnya.

```
       /* Define the shape of an address map whose JSON representation looks like the
following.
          Use 'addressMapEnhancedType' in the following EnhancedDocument.builder() to
simplify the code.
          "home": {
            "zipCode": "00000",
            "city": "Any Town",
            "state": "FL",
            "street": "123 Any Street"
          }*/
       EnhancedType<Map<String, String>> addressMapEnhancedType =
               EnhancedType.mapOf(EnhancedType.of(String.class),
EnhancedType.of(String.class));


       //  Use the builder's typesafe methods to add elements to the enhanced
document.
       EnhancedDocument personDocument = EnhancedDocument.builder()
               .putNumber("id", 50)
               .putString("firstName", "Shirley")
               .putString("lastName", "Rodriguez")
               .putNumber("age", 53)
```

```
                .putNull("nullAttribute")
                .putJson("phoneNumbers", phoneNumbersJSONString())
                /* Add the map of addresses whose JSON representation looks like the
following.
                        {
                          "home": {
                            "zipCode": "00000",
                            "city": "Any Town",
                            "state": "FL",
                            "street": "123 Any Street"
                          }
                        } */
                .putMap("addresses", getAddresses(), EnhancedType.of(String.class),
addressMapEnhancedType)
                .putList("hobbies", List.of("Theater", "Golf"),
EnhancedType.of(String.class))
                .build();
```

### Metode pembantu

```
   private static String phoneNumbersJSONString() {
       return "  [" +
               "    {" +
               "      \"type\": \"Home\"," +
               "      \"number\": \"555-0140\"" +
               "    }," +
               "    {" +
               "      \"type\": \"Work\"," +
               "      \"number\": \"555-0155\"" +
               "    }" +
               "  ]";
   }

   private static Map<String, Map<String, String>> getAddresses() {
       return Map.of(
               "home", Map.of(
                       "zipCode", "00002",
                       "city", "Any Town",
                       "state", "ME",
                       "street", "123 Any Street"));

   }
```

Lakukan operasi CRUD

Setelah Anda mendefinisikan sebuah `EnhancedDocument` instance, Anda dapat menyimpannya ke tabel DynamoDB. Cuplikan kode berikut menggunakan personDocument yang dibuat dari elemen individual.

```
documentDynamoDbTable.putItem(personDocument);
```

Setelah Anda membaca instance dokumen yang disempurnakan dari DynamoDB, Anda dapat mengekstrak nilai atribut individual menggunakan getter seperti yang ditunjukkan dalam cuplikan kode berikut yang mengakses data yang disimpan dari. `personDocument` Atau, Anda dapat mengekstrak konten lengkap ke string JSON seperti yang ditunjukkan pada bagian terakhir dari kode contoh.

```
        // Read the item.
        EnhancedDocument personDocFromDb =
documentDynamoDbTable.getItem(Key.builder().partitionValue(50).build());

        // Access top-level attributes.
        logger.info("Name: {} {}", personDocFromDb.getString("firstName"),
personDocFromDb.getString("lastName"));
        // Name: Shirley Rodriguez

        // Typesafe access of a deeply nested attribute. The addressMapEnhancedType
shown previously defines the shape of an addresses map.
        Map<String, Map<String, String>> addresses =
personDocFromDb.getMap("addresses", EnhancedType.of(String.class),
addressMapEnhancedType);
        addresses.keySet().forEach(k -> logger.info(addresses.get(k).toString()));
        // {zipCode=00002, city=Any Town, street=123 Any Street, state=ME}

        // Alternatively, work with AttributeValue types checking along the way for
deeply nested attributes.
        Map<String, AttributeValue> addressesMap =
personDocFromDb.getMapOfUnknownType("addresses");
        addressesMap.keySet().forEach((String k) -> {
            logger.info("Looking at data for [{}] address", k);
            // Looking at data for [home] address
            AttributeValue value = addressesMap.get(k);
            AttributeValue cityValue = value.m().get("city");
            if (cityValue != null) {
                logger.info(cityValue.s());
```

```
                // Any Town
            }
        });

        List<AttributeValue> phoneNumbers =
 personDocFromDb.getListOfUnknownType("phoneNumbers");
        phoneNumbers.forEach((AttributeValue av) -> {
            if (av.hasM()) {
                AttributeValue type = av.m().get("type");
                if (type.s() != null) {
                    logger.info("Type of phone: {}", type.s());
                    // Type of phone: Home
                    // Type of phone: Work
                }
            }
        });

        String jsonPerson = personDocFromDb.toJson();
        logger.info(jsonPerson);
        // {"firstName":"Shirley","lastName":"Rodriguez","addresses":
{"home":{"zipCode":"00002","city":"Any Town","street":"123 Any
 Street","state":"ME"}},"hobbies":["Theater","Golf"],
        //     "id":50,"nullAttribute":null,"age":53,"phoneNumbers":
[{"number":"555-0140","type":"Home"},{"number":"555-0155","type":"Work"}]}
```

`EnhancedDocument`instance dapat digunakan dengan metode apa pun dari `DynamoDbTable` atau DynamoDbEnhancedClientdi tempat kelas data yang dipetakan.

Akses atribut dokumen yang disempurnakan sebagai objek khusus

Selain menyediakan API untuk membaca dan menulis atribut dengan struktur tanpa skema, API Dokumen yang Ditingkatkan memungkinkan Anda mengonversi atribut ke dan dari instance kelas khusus.

Enhanced Document API menggunakan `AttributeConverterProvider` s dan `AttributeConverter` s yang ditampilkan di bagian konversi atribut kontrol sebagai bagian dari DynamoDB Enhanced Client API.

Dalam contoh berikut, kita menggunakan a `CustomAttributeConverterProvider` dengan `AddressConverter` kelas bersarang untuk mengkonversi `Address` objek.

Contoh ini menunjukkan bahwa Anda dapat mencampur data dari kelas dan juga data dari struktur yang dibangun sesuai kebutuhan. Contoh ini juga menunjukkan bahwa kelas kustom dapat

digunakan pada setiap tingkat struktur bersarang. `Address`Objek dalam contoh ini adalah nilai yang digunakan dalam peta.

```
   public static void attributeToAddressClassMappingExample(DynamoDbEnhancedClient
enhancedClient, DynamoDbClient standardClient) {
       String tableName = "customer";

       // Define the DynamoDbTable for an enhanced document.
       // The schema builder provides methods for attribute converter providers and
keys.
       DynamoDbTable<EnhancedDocument> documentDynamoDbTable =
enhancedClient.table(tableName,
               DocumentTableSchema.builder()
                       // Add the CustomAttributeConverterProvider along with the
default when you build the table schema.
                       .attributeConverterProviders(
                               List.of(
                                       new CustomAttributeConverterProvider(),
                                       AttributeConverterProvider.defaultProvider()))
                       .addIndexPartitionKey(TableMetadata.primaryIndexName(), "id",
AttributeValueType.N)
                       .addIndexSortKey(TableMetadata.primaryIndexName(), "lastName",
AttributeValueType.S)
                       .build());
       // Create the DynamoDB table if needed.
       documentDynamoDbTable.createTable();
       waitForTableCreation(tableName, standardClient);


       // The getAddressesForCustomMappingExample() helper method that provides
'addresses' shows the use of a custom Address class
       // rather than using a Map<String, Map<String, String> to hold the address
data.
       Map<String, Address> addresses = getAddressesForCustomMappingExample();

       // Build an EnhancedDocument instance to save an item with a mix of structures
defined as needed and static classes.
       EnhancedDocument personDocument = EnhancedDocument.builder()
               .putNumber("id", 50)
               .putString("firstName", "Shirley")
               .putString("lastName", "Rodriguez")
               .putNumber("age", 53)
               .putNull("nullAttribute")
```

```
                .putJson("phoneNumbers", phoneNumbersJSONString())
                // Note the use of 'EnhancedType.of(Address.class)' instead of the more
 generic
                // 'EnhancedType.mapOf(EnhancedType.of(String.class),
 EnhancedType.of(String.class))' that was used in a previous example.
                .putMap("addresses", addresses, EnhancedType.of(String.class),
 EnhancedType.of(Address.class))
                .putList("hobbies", List.of("Hobby 1", "Hobby 2"),
 EnhancedType.of(String.class))
                .build();
        // Save the item to DynamoDB.
        documentDynamoDbTable.putItem(personDocument);

        // Retrieve the item just saved.
        EnhancedDocument srPerson =
 documentDynamoDbTable.getItem(Key.builder().partitionValue(50).sortValue("Rodriguez").build())

        // Access the addresses attribute.
        Map<String, Address> srAddresses = srPerson.get("addresses",
                EnhancedType.mapOf(EnhancedType.of(String.class),
 EnhancedType.of(Address.class)));

        srAddresses.keySet().forEach(k -> logger.info(addresses.get(k).toString()));

        documentDynamoDbTable.deleteTable();

// The content logged to the console shows that the saved maps were converted to
 Address instances.
Address{street='123 Main Street', city='Any Town', state='NC', zipCode='00000'}
Address{street='100 Any Street', city='Any Town', state='NC', zipCode='00000'}
```

### **CustomAttributeConverterProvider**kode

```
public class CustomAttributeConverterProvider implements AttributeConverterProvider {

    private final Map<EnhancedType<?>, AttributeConverter<?>> converterCache =
 ImmutableMap.of(
            // 1. Add AddressConverter to the internal cache.
            EnhancedType.of(Address.class), new AddressConverter());

    public static CustomAttributeConverterProvider create() {
        return new CustomAttributeConverterProvider();
    }
```

```
    // 2. The enhanced client queries the provider for attribute converters if it
    //    encounters a type that it does not know how to convert.
    @SuppressWarnings("unchecked")
    @Override
    public <T> AttributeConverter<T> converterFor(EnhancedType<T> enhancedType) {
        return (AttributeConverter<T>) converterCache.get(enhancedType);
    }

    // 3. Custom attribute converter
    private class AddressConverter implements AttributeConverter<Address> {
        // 4. Transform an Address object into a DynamoDB map.
        @Override
        public AttributeValue transformFrom(Address address) {

            Map<String, AttributeValue> attributeValueMap = Map.of(
                    "street", AttributeValue.fromS(address.getStreet()),
                    "city", AttributeValue.fromS(address.getCity()),
                    "state", AttributeValue.fromS(address.getState()),
                    "zipCode", AttributeValue.fromS(address.getZipCode()));

            return AttributeValue.fromM(attributeValueMap);
        }

        // 5. Transform the DynamoDB map attribute to an Address oject.
        @Override
        public Address transformTo(AttributeValue attributeValue) {
            Map<String, AttributeValue> m = attributeValue.m();
            Address address = new Address();
            address.setStreet(m.get("street").s());
            address.setCity(m.get("city").s());
            address.setState(m.get("state").s());
            address.setZipCode(m.get("zipCode").s());

            return address;
        }

        @Override
        public EnhancedType<Address> type() {
            return EnhancedType.of(Address.class);
        }

        @Override
        public AttributeValueType attributeValueType() {
```

```
            return AttributeValueType.M;
        }
    }
}
```

### **Address** kelas

```
public class Address {
                  private String street;
                  private String city;
                  private String state;
                  private String zipCode;

                  public Address() {
                  }

                  public String getStreet() {
                  return this.street;
                  }

                  public String getCity() {
                  return this.city;
                  }

                  public String getState() {
                  return this.state;
                  }

                  public String getZipCode() {
                  return this.zipCode;
                  }

                  public void setStreet(String street) {
                  this.street = street;
                  }

                  public void setCity(String city) {
                  this.city = city;
                  }

                  public void setState(String state) {
                  this.state = state;
                  }
```

```
    public void setZipCode(String zipCode) {
    this.zipCode = zipCode;
    }
    }
```

Metode pembantu yang menyediakan alamat

Metode pembantu berikut menyediakan peta yang menggunakan `Address` instance kustom untuk nilai daripada `Map<String, String>` contoh generik untuk nilai.

```
private static Map<String, Address> getAddressesForCustomMappingExample() {
    Address homeAddress = new Address();
    homeAddress.setStreet("100 Any Street");
    homeAddress.setCity("Any Town");
    homeAddress.setState("NC");
    homeAddress.setZipCode("00000");

    Address workAddress = new Address();
    workAddress.setStreet("123 Main Street");
    workAddress.setCity("Any Town");
    workAddress.setState("NC");
    workAddress.setZipCode("00000");

    return Map.of("home", homeAddress,
            "work", workAddress);
}
```

Gunakan **`EnhancedDocument`** tanpa DynamoDB

Meskipun Anda biasanya menggunakan instance `EnhancedDocument` untuk membaca dan menulis item DynamoDB tipe dokumen, itu juga dapat digunakan secara independen dari DynamoDB.

Anda dapat menggunakan kemampuan mereka `EnhancedDocuments` untuk mengkonversi antara string JSON atau objek kustom ke peta tingkat rendah `AttributeValues` seperti yang ditunjukkan dalam contoh berikut.

```
public static void conversionWithoutDynamoDbExample() {
    Address address = new Address();
    address.setCity("my city");
    address.setState("my state");
```

```
        address.setStreet("my street");
        address.setZipCode("00000");

        // Build an EnhancedDocument instance for its conversion functionality alone.
        EnhancedDocument addressEnhancedDoc = EnhancedDocument.builder()
                // Important: You must specify attribute converter providers when you
build an EnhancedDocument instance not used with a DynamoDB table.
                .attributeConverterProviders(new CustomAttributeConverterProvider(),
DefaultAttributeConverterProvider.create())
                .put("addressDoc", address, Address.class)
                .build();

        // Convert address to a low-level item representation.
        final Map<String, AttributeValue> addressAsAttributeMap =
addressEnhancedDoc.getMapOfUnknownType("addressDoc");
        logger.info("addressAsAttributeMap: {}", addressAsAttributeMap.toString());

        // Convert address to a JSON string.
        String addressAsJsonString = addressEnhancedDoc.getJson("addressDoc");
        logger.info("addressAsJsonString: {}", addressAsJsonString);
        // Convert addressEnhancedDoc back to an Address instance.
        Address addressConverted =  addressEnhancedDoc.get("addressDoc",
Address.class);
        logger.info("addressConverted: {}", addressConverted.toString());
    }

  /* Console output:
          addressAsAttributeMap: {zipCode=AttributeValue(S=00000),
state=AttributeValue(S=my state), street=AttributeValue(S=my street),
city=AttributeValue(S=my city)}
          addressAsJsonString: {"zipCode":"00000","state":"my state","street":"my
street","city":"my city"}
          addressConverted: Address{street='my street', city='my city', state='my
state', zipCode='00000'}
  */
```

> **Note**
>
> Bila Anda menggunakan dokumen yang disempurnakan independen dari tabel DynamoDB, pastikan Anda secara eksplisit menetapkan penyedia konverter atribut pada pembangun. Sebaliknya, skema tabel dokumen memasok penyedia konverter ketika dokumen yang disempurnakan digunakan dengan tabel DynamoDB.

## Gunakan ekstensi untuk menyesuaikan operasi DynamoDB Enhanced Client

DynamoDB Enhanced Client API mendukung ekstensi plugin yang menyediakan fungsionalitas di luar operasi pemetaan. Ekstensi menggunakan dua metode hook untuk memodifikasi data selama operasi baca dan tulis:

- `beforeWrite()`- Memodifikasi operasi tulis sebelum itu terjadi
- `afterRead()`- Memodifikasi hasil operasi baca setelah itu terjadi

Beberapa operasi (seperti pembaruan item) melakukan penulisan dan kemudian membaca, sehingga kedua metode kait dipanggil.

Bagaimana ekstensi dimuat

Ekstensi dimuat dalam urutan yang Anda tentukan di pembuat klien yang disempurnakan. Urutan pemuatan dapat menjadi penting karena satu ekstensi dapat bertindak berdasarkan nilai yang telah diubah oleh ekstensi sebelumnya.

Secara default, klien yang disempurnakan memuat dua ekstensi:

- `VersionedRecordExtension`- Memberikan penguncian optimis
- `AtomicCounterExtension`- Secara otomatis menambah atribut penghitung

Anda dapat mengganti perilaku default dengan pembuat klien yang disempurnakan dan memuat ekstensi apa pun. Anda juga dapat menentukan none jika Anda tidak ingin ekstensi default.

> **Important**
>
> Jika Anda memuat ekstensi Anda sendiri, klien yang disempurnakan tidak memuat ekstensi default apa pun. Jika Anda menginginkan perilaku yang disediakan oleh salah satu ekstensi default, Anda perlu menambahkannya secara eksplisit ke daftar ekstensi.

Contoh berikut menunjukkan cara memuat ekstensi kustom yang `verifyChecksumExtension` dinamai`VersionedRecordExtension`. `AtomicCounterExtension`Tidak dimuat dalam contoh ini.

```
DynamoDbEnhancedClientExtension versionedRecordExtension =
 VersionedRecordExtension.builder().build();
```

```
DynamoDbEnhancedClient enhancedClient =
    DynamoDbEnhancedClient.builder()
                          .dynamoDbClient(dynamoDbClient)
                          .extensions(versionedRecordExtension,
 verifyChecksumExtension)
                          .build();
```

Detail dan konfigurasi ekstensi yang tersedia

Bagian berikut memberikan informasi rinci tentang setiap ekstensi yang tersedia di SDK.

Terapkan penguncian optimis dengan **`VersionedRecordExtension`**

`VersionedRecordExtension`Ekstensi ini memberikan penguncian optimis dengan menambah dan melacak nomor versi item saat item ditulis ke database. Kondisi ditambahkan ke setiap penulisan yang menyebabkan penulisan gagal jika nomor versi item tetap yang sebenarnya tidak cocok dengan nilai yang terakhir dibaca aplikasi.

Konfigurasi

Untuk menentukan atribut mana yang akan digunakan untuk melacak nomor versi item, beri tag atribut numerik dalam skema tabel.

Cuplikan berikut menentukan bahwa `version` atribut harus menyimpan nomor versi item.

```
    @DynamoDbVersionAttribute
    public Integer getVersion() {...};
    public void setVersion(Integer version) {...};
```

Pendekatan skema tabel statis setara ditunjukkan dalam cuplikan berikut.

```
    .addAttribute(Integer.class, a -> a.name("version")
                                       .getter(Customer::getVersion)
                                       .setter(Customer::setVersion)
                                        // Apply the 'version' tag to the attribute.

 .tags(VersionedRecordExtension.AttributeTags.versionAttribute())
```

Cara kerjanya

Penguncian optimis dengan `VersionedRecordExtension` memiliki dampak berikut pada ini `DynamoDbEnhancedClient` dan `DynamoDbTable` metode:

**`putItem`**

Item baru diberi nilai versi awal 0. Ini dapat dikonfigurasi dengan`@DynamoDbVersionAttribute(startAt = X)`.

**`updateItem`**

Jika Anda mengambil item, memperbarui satu atau beberapa propertinya, dan mencoba menyimpan perubahan, operasi hanya berhasil jika nomor versi di sisi klien dan sisi server cocok.

Jika berhasil, nomor versi secara otomatis bertambah 1. Ini dapat dikonfigurasi dengan`@DynamoDbVersionAttribute(incrementBy = X)`.

**`deleteItem`**

`DynamoDbVersionAttribute`Anotasi tidak berpengaruh. Anda harus menambahkan ekspresi kondisi secara manual saat menghapus item.

Contoh berikut menambahkan ekspresi bersyarat untuk memastikan bahwa item yang dihapus adalah item yang telah dibaca. Dalam contoh berikut `recordVersion` adalah atribut kacang yang dianotasi dengan. `@DynamoDbVersionAttribute`

```
// 1. Read the item and get its current version.
Customer item =
 customerTable.getItem(Key.builder().partitionValue("someId").build());
// `recordVersion` is the bean's attribute that is annotated with
 `@DynamoDbVersionAttribute`.
AttributeValue currentVersion = item.getRecordVersion();

// 2. Create conditional delete with the `currentVersion` value.
DeleteItemEnhancedRequest deleteItemRequest =
    DeleteItemEnhancedRequest.builder()
       .key(KEY)
       .conditionExpression(Expression.builder()
           .expression("recordVersion = :current_version_value")
           .putExpressionValue(":current_version_value", currentVersion)
           .build()).build();

customerTable.deleteItem(deleteItemRequest);
```

**`transactWriteItems`**

- `addPutItem`: Metode ini memiliki perilaku yang sama dengan`putItem`.
- `addUpdateItem`: Metode ini memiliki perilaku yang sama dengan`updateItem`.

- `addDeleteItem`: Metode ini memiliki perilaku yang sama dengan`deleteItem`.

**`batchWriteItem`**

- `addPutItem`: Metode ini memiliki perilaku yang sama dengan`putItem`.
- `addDeleteItem`: Metode ini memiliki perilaku yang sama dengan`deleteItem`.

> **Note**
>
> Tabel global DynamoDB menggunakan rekonsiliasi 'penulis terakhir menang' antara pembaruan bersamaan, di mana DynamoDB melakukan upaya terbaik untuk menentukan penulis terakhir. Jika Anda menggunakan tabel global, kebijakan 'penulis terakhir menang' ini berarti bahwa strategi penguncian mungkin tidak berfungsi seperti yang diharapkan, karena semua replika pada akhirnya akan bertemu berdasarkan penulisan terakhir yang ditentukan oleh DynamoDB.

Cara menonaktifkan

Untuk menonaktifkan penguncian optimis, jangan gunakan `@DynamoDbVersionAttribute` anotasi.

Menerapkan penghitung dengan **`AtomicCounterExtension`**

`AtomicCounterExtension`Ekstensi menambah atribut numerik yang ditandai setiap kali catatan ditulis ke database. Anda dapat menentukan nilai awal dan kenaikan. Jika tidak ada nilai yang ditentukan, nilai awal diatur ke 0 dan nilai atribut meningkat sebesar 1.

Konfigurasi

Untuk menentukan atribut mana yang merupakan penghitung, beri tag atribut tipe `Long` dalam skema tabel.

Cuplikan berikut menunjukkan penggunaan nilai awal dan kenaikan default untuk atribut. `counter`

```
@DynamoDbAtomicCounter
public Long getCounter() {...};
public void setCounter(Long counter) {...};
```

Pendekatan skema tabel statis ditunjukkan dalam cuplikan berikut. Ekstensi penghitung atom menggunakan nilai awal 10 dan menambah nilai sebesar 5 setiap kali catatan ditulis.

```
    .addAttribute(Integer.class, a -> a.name("counter")
                                      .getter(Customer::getCounter)
                                      .setter(Customer::setCounter)
                                       // Apply the 'atomicCounter' tag to the
attribute with start and increment values.
                                      .tags(StaticAttributeTags.atomicCounter(10L,
5L))
```

Tambahkan stempel waktu dengan **`AutoGeneratedTimestampRecordExtension`**

`AutoGeneratedTimestampRecordExtension`Ekstensi secara otomatis memperbarui atribut tipe yang ditandai `Instant` dengan stempel waktu saat ini setiap kali item berhasil ditulis ke database. Ekstensi ini tidak dimuat secara default.

Konfigurasi

Untuk menentukan atribut mana yang akan diperbarui dengan stempel waktu saat ini, beri tag `Instant` atribut dalam skema tabel.

`lastUpdate`Atribut adalah target perilaku ekstensi dalam cuplikan berikut. Perhatikan persyaratan bahwa atribut harus berupa `Instant` tipe.

```
    @DynamoDbAutoGeneratedTimestampAttribute
    public Instant getLastUpdate() {...}
    public void setLastUpdate(Instant lastUpdate) {...}
```

Pendekatan skema tabel statis setara ditunjukkan dalam cuplikan berikut.

```
     .addAttribute(Instant.class, a -> a.name("lastUpdate")
                                       .getter(Customer::getLastUpdate)
                                       .setter(Customer::setLastUpdate)
                                       // Applying the 'autoGeneratedTimestamp' tag to
the attribute.

.tags(AutoGeneratedTimestampRecordExtension.AttributeTags.autoGeneratedTimestampAttribute())
```

Hasilkan UUID dengan AutoGeneratedUuidExtension

`AutoGeneratedUuidExtension`Ekstensi menghasilkan UUID unik (Universally Unique Identifier) untuk atribut ketika catatan baru ditulis ke database. Menggunakan metode Java JDK

UUID.randomUUId () dan berlaku untuk atribut tipe. `java.lang.String` Ekstensi ini tidak dimuat secara default.

Konfigurasi

`uniqueId`Atribut adalah target perilaku ekstensi dalam cuplikan berikut.

```
    @AutoGeneratedUuidExtension
    public String getUniqueId() {...}
    public void setUniqueId(String uniqueId) {...}
```

Pendekatan skema tabel statis setara ditunjukkan dalam cuplikan berikut.

```
     .addAttribute(String.class, a -> a.name("uniqueId")
                                       .getter(Customer::getUniqueId)
                                       .setter(Customer::setUniqueId)
                                       // Applying the 'autoGeneratedUuid' tag to the
attribute.

.tags(AutoGeneratedUuidExtension.AttributeTags.autoGeneratedUuidAttribute())
```

Jika Anda ingin ekstensi mengisi UUID hanya untuk `putItem` metode dan bukan untuk `updateItem` metode, tambahkan anotasi perilaku pembaruan seperti yang ditunjukkan pada cuplikan berikut.

```
    @AutoGeneratedUuidExtension
    @DynamoDbUpdateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS)
    public String getUniqueId() {...}
    public void setUniqueId(String uniqueId) {...}
```

Jika Anda menggunakan pendekatan skema tabel statis, gunakan kode setara berikut.

```
     .addAttribute(String.class, a -> a.name("uniqueId")
                                       .getter(Customer::getUniqueId)
                                       .setter(Customer::setUniqueId)
                                       // Applying the 'autoGeneratedUuid' tag to the
attribute.

.tags(AutoGeneratedUuidExtension.AttributeTags.autoGeneratedUuidAttribute(),

StaticAttributeTags.updateBehavior(UpdateBehavior.WRITE_IF_NOT_EXISTS))
```

### Contoh ekstensi kustom

Anda dapat membuat ekstensi khusus dengan mengimplementasikan `DynamoDbEnhancedClientExtension` antarmuka. Kelas ekstensi kustom berikut menunjukkan `beforeWrite()` metode yang menggunakan ekspresi pembaruan untuk mengatur `registrationDate` atribut jika item dalam database belum memilikinya.

```
public final class CustomExtension implements DynamoDbEnhancedClientExtension {

   // 1. In a custom extension, use an UpdateExpression to define what action to take
 before
   //    an item is updated.
   @Override
   public WriteModification beforeWrite(DynamoDbExtensionContext.BeforeWrite context)
 {
       if ( context.operationContext().tableName().equals("Customer")
               && context.operationName().equals(OperationName.UPDATE_ITEM)) {
           return WriteModification.builder()
                   .updateExpression(createUpdateExpression())
                   .build();
       }
       return WriteModification.builder().build();  // Return an "empty"
 WriteModification instance if the extension should not be applied.
                                                    // In this case, if the code is
 not updating an item on the Customer table.
   }

   private static UpdateExpression createUpdateExpression() {

       // 2. Use a SetAction, a subclass of UpdateAction, to provide the values in the
 update.
       SetAction setAction =
               SetAction.builder()
                       .path("registrationDate")
                       .value("if_not_exists(registrationDate, :regValue)")
                       .putExpressionValue(":regValue",
 AttributeValue.fromS(Instant.now().toString()))
                       .build();
       // 3. Build the UpdateExpression with one or more UpdateAction.
       return UpdateExpression.builder()
               .addAction(setAction)
               .build();
   }
```

```
}
```

## Gunakan DynamoDB Enhanced Client API secara asinkron

Jika aplikasi Anda memerlukan panggilan asinkron non-pemblokiran ke DynamoDB, Anda dapat menggunakan file. DynamoDbEnhancedAsyncClient Ini mirip dengan implementasi sinkron tetapi dengan perbedaan utama berikut:

1. Ketika Anda membangunDynamoDbEnhancedAsyncClient, Anda harus menyediakan versi asinkron dari klien standar,DynamoDbAsyncClient, seperti yang ditunjukkan dalam cuplikan berikut.

   ```
   DynamoDbEnhancedAsyncClient enhancedClient =
       DynamoDbEnhancedAsyncClient.builder()
                                  .dynamoDbClient(dynamoDbAsyncClient)
                                  .build();
   ```

2. Metode yang mengembalikan objek data tunggal CompletableFuture mengembalikan hasil bukan hanya hasilnya. Aplikasi Anda kemudian dapat melakukan pekerjaan lain tanpa harus memblokir hasilnya. Cuplikan berikut menunjukkan metode getItem() asinkron.

   ```
   CompletableFuture<Customer> result = customerDynamoDbTable.getItem(customer);
   // Perform other work here.
   return result.join();   // Now block and wait for the result.
   ```

3. Metode yang mengembalikan daftar hasil paginasi mengembalikan sebuah SdkPublisheralih-alih SdkIterableyang dikembalikan sinkron DynamoDbEnhanceClient untuk metode yang sama. Aplikasi Anda kemudian dapat berlangganan handler ke penerbit itu untuk menangani hasil secara asinkron tanpa harus memblokir.

   ```
   PagePublisher<Customer> results = customerDynamoDbTable.query(r ->
    r.queryConditional(keyEqualTo(k -> k.partitionValue("Smith"))));
   results.subscribe(myCustomerResultsProcessor);
   // Perform other work and let the processor handle the results asynchronously.
   ```

   Untuk contoh yang lebih lengkap tentang bekerja denganSdkPublisher API, lihat contoh di bagian yang membahas scan() metode asinkron dari panduan ini.

## Anotasi kelas data

Tabel berikut mencantumkan anotasi yang dapat digunakan pada kelas data dan menyediakan tautan ke informasi dan contoh dalam panduan ini. Tabel diurutkan dalam urutan abjad menaik dengan nama anotasi.

Anotasi kelas data yang digunakan dalam panduan ini

| Nama anotasi | Anotasi berlaku untuk [1] | Apa yang dilakukan nya | Dimana itu ditampilkan dalam panduan ini |
|---|---|---|---|
| DynamoDbAtomicCounter | atribut [2] | Menambah atribut numerik yang ditandai setiap kali catatan ditulis ke database. | Pengantar dan diskusi. |
| DynamoDbAttribute | atribut | Mendefinisikan atau mengganti nama properti kacang yang dipetakan ke atribut tabel DynamoDB. | • Diskusi awal.<br>• Memulai bagian—lihat Catatan.<br>• Di MovieActor kelas Dalam contoh metode Query. |
| DynamoDbAutoGeneratedTimestampAttribute | atribut | Memperbarui atribut yang ditandai dengan stempel waktu saat ini setiap kali item berhasil ditulis ke database | Pengantar dan diskusi. |
| DynamoDbAutoGeneratedUuid | atribut | Menghasilkan UUID unik (Universally Unique Identifier) untuk atribut ketika catatan baru ditulis ke database. | Pengantar dan diskusi. |
| DynamoDbBean | class | Menandai kelas data sebagai dapat | Pertama gunakan pada kelas Pelanggan |

| Nama anotasi | Anotasi berlaku untuk 1 | Apa yang dilakukan nya | Dimana itu ditampilk an dalam panduan ini |
|---|---|---|---|
| | | dipetakan ke skema tabel. | di bagian Memulai. Beberapa penggunaa n muncul di seluruh panduan. |
| DynamoDbC onvertedBy | atribut | Mengaitkan kustom `Attribute Converter` dengan atribut beranotasi. | Diskusi awal dan contoh. |
| DynamoDbFlatten | atribut | Meratakan semua atribut dari kelas data DynamoDB terpisah dan menambahk annya sebagai atribut tingkat atas ke catatan yang dibaca dan ditulis ke database. | • Diskusi awal.<br>• Implikasi untuk kode lainnya. |
| DynamoDbIgnore | atribut | Menghasilkan atribut yang tersisa tidak dipetakan. | • Diskusi awal.<br>• Gunakan di ProductCatalog kelas. |
| DynamoDbIgnoreNull s | atribut | Mencegah menyimpan atribut null dari objek bersarang DynamoDb . | Diskusi dan contoh. |

| Nama anotasi | Anotasi berlaku untuk 1 | Apa yang dilakukan nya | Dimana itu ditampilk an dalam panduan ini |
|---|---|---|---|
| DynamoDbImmutable | class | Menandai kelas data yang tidak dapat diubah sebagai dapat dipetakan ke skema tabel. | • Pengantar anotasi.<br>• Gunakan di ProductCatalog kelas.<br>• Gunakan dengan Lombok. |
| DynamoDbPartitionK ey | atribut | Menandai atribut sebagai kunci partisi primer (kunci hash) dari DynamoDb tabel. | • Penggunaan awal pada kelas Pelanggan di bagian Memulai.<br>• Dengan Lombok. |
| DynamoDbP reserveEmptyObject | atribut | Menentukan bahwa jika tidak ada data hadir untuk objek dipetakan ke atribut beranotasi, objek harus diinisialisasi dengan semua bidang null. | Diskusi dan contoh. |
| DynamoDbS econdaryPartitionKey | atribut | Menandai atribut sebagai kunci partisi untuk indeks sekunder global. | • Gunakan dalam indeks sekunder dan contoh.<br>• Dalam contoh metode Query.<br>• Dalam contoh Lombok<br>• Dengan kelas yang tidak dapat diubah. |

| Nama anotasi | Anotasi berlaku untuk 1 | Apa yang dilakukan nya | Dimana itu ditampilk an dalam panduan ini |
|---|---|---|---|
| DynamoDbS econdarySortKey | atribut | Menandai atribut sebagai kunci pengurutan opsional untuk indeks sekunder global atau lokal. | • Gunakan dalam indeks sekunder dan contoh.<br>• Dalam contoh metode Query.<br>• Dalam contoh Lombok.<br>• Dengan kelas yang tidak dapat diubah. |
| DynamoDbSortKey | atribut | Menandai atribut sebagai kunci sortir primer opsional (range key). | • Memulai bagian di kelas Pelanggan.<br>• Dengan kelas yang tidak dapat diubah.<br>• Dalam contoh Lombok.<br>• Dalam contoh metode Query. |
| DynamoDbU pdateBehavior | atribut | Menentukan perilaku ketika atribut ini diperbarui sebagai bagian dari operasi 'update' seperti UpdateItem. | Pendahuluan dan contoh. |
| DynamoDbVersionAtt ribute | atribut | Menambah nomor versi item. | Pengantar dan diskusi. |

[1] Anda dapat menerapkan anotasi tingkat atribut ke pengambil atau penyetel, tetapi tidak keduanya. Panduan ini menunjukkan anotasi tentang getter.

[2] Istilah `property` ini biasanya digunakan untuk nilai yang dienkapsulasi dalam kelas data. JavaBean Namun, panduan ini menggunakan istilah `attribute` sebagai gantinya, agar konsisten dengan terminologi yang digunakan oleh DynamoDB.

# Bekerja dengan Amazon EC2

Bagian ini memberikan contoh pemrograman Amazon EC2yang menggunakan AWS SDK untuk Java 2.x.

Topik

- Kelola Amazon EC2 instance
- Zona Penggunaan Wilayah AWS dan Ketersediaan
- Bekerja dengan kelompok keamanan di Amazon EC2
- Bekerja dengan metadata instans Amazon EC2

## Kelola Amazon EC2 instance

### Buatlah sebuah instans

Buat Amazon EC2 instance baru dengan memanggil `runInstances`metode Ec2Client, sediakan dengan RunInstancesRequestberisi Amazon Machine Image (AMI) untuk digunakan dan jenis instance.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.InstanceType;
import software.amazon.awssdk.services.ec2.model.RunInstancesRequest;
import software.amazon.awssdk.services.ec2.model.RunInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Tag;
import software.amazon.awssdk.services.ec2.model.CreateTagsRequest;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Kode

```
   public static String createEC2Instance(Ec2Client ec2,String name, String amiId ) {

        RunInstancesRequest runRequest = RunInstancesRequest.builder()
```

```
                .imageId(amiId)
                .instanceType(InstanceType.T1_MICRO)
                .maxCount(1)
                .minCount(1)
                .build();

        RunInstancesResponse response = ec2.runInstances(runRequest);
        String instanceId = response.instances().get(0).instanceId();

        Tag tag = Tag.builder()
                .key("Name")
                .value(name)
                .build();

        CreateTagsRequest tagRequest = CreateTagsRequest.builder()
                .resources(instanceId)
                .tags(tag)
                .build();

        try {
            ec2.createTags(tagRequest);
            System.out.printf(
                    "Successfully started EC2 Instance %s based on AMI %s",
                    instanceId, amiId);

          return instanceId;

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
```

Lihat contoh lengkapnya di GitHub.

## Memulai instans

Untuk memulai sebuah Amazon EC2 instance, panggil `startInstances`metode Ec2Client, sediakan dengan ID StartInstancesRequestyang berisi instance untuk memulai.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
```

Kode

```
    public static void startInstance(Ec2Client ec2, String instanceId) {

        StartInstancesRequest request = StartInstancesRequest.builder()
                .instanceIds(instanceId)
                .build();

        ec2.startInstances(request);
        System.out.printf("Successfully started instance %s", instanceId);
    }
```

Lihat contoh lengkapnya di GitHub.

## Menghentikan instans

Untuk menghentikan Amazon EC2 instance, panggil `stopInstances`metode Ec2Client, berikan ID yang StopInstancesRequestberisi instance untuk berhenti.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
```

Kode

```
    public static void stopInstance(Ec2Client ec2, String instanceId) {

        StopInstancesRequest request = StopInstancesRequest.builder()
                .instanceIds(instanceId)
                .build();

        ec2.stopInstances(request);
        System.out.printf("Successfully stopped instance %s", instanceId);
```

```
    }
```

Lihat contoh lengkapnya di GitHub.

## Menyalakan ulang instans

Untuk me-reboot sebuah Amazon EC2 instance, panggil `rebootInstances`metode Ec2Client, berikan ID yang RebootInstancesRequestberisi instance untuk reboot.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.RebootInstancesRequest;
```

Kode

```
    public static void rebootEC2Instance(Ec2Client ec2, String instanceId) {

      try {
            RebootInstancesRequest request = RebootInstancesRequest.builder()
                .instanceIds(instanceId)
                    .build();

            ec2.rebootInstances(request);
            System.out.printf(
                "Successfully rebooted instance %s", instanceId);
    } catch (Ec2Exception e) {
          System.err.println(e.awsErrorDetails().errorMessage());
          System.exit(1);
     }
  }
```

Lihat contoh lengkapnya di GitHub.

## Menjelaskan instans

Untuk membuat daftar instance Anda, buat DescribeInstancesRequestdan panggil metode Ec2Client. `describeInstances` Ini akan mengembalikan DescribeInstancesResponseobjek yang dapat Anda gunakan untuk daftar Amazon EC2 instance untuk akun dan wilayah Anda.

Instans dikelompokkan berdasarkan reservasi. Setiap reservasi sesuai dengan panggilan `startInstances` yang meluncurkan instance. Untuk membuat daftar instance Anda, Anda harus terlebih dahulu memanggil `reservations` metode `DescribeInstancesResponse` kelas, dan kemudian memanggil `instances` setiap objek Reservasi yang dikembalikan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.Reservation;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Kode

```
    public static void describeEC2Instances( Ec2Client ec2){

        String nextToken = null;

        try {

            do {
                DescribeInstancesRequest request =
DescribeInstancesRequest.builder().maxResults(6).nextToken(nextToken).build();
                DescribeInstancesResponse response = ec2.describeInstances(request);

                for (Reservation reservation : response.reservations()) {
                    for (Instance instance : reservation.instances()) {
                        System.out.println("Instance Id is " + instance.instanceId());
                        System.out.println("Image id is "+  instance.imageId());
                        System.out.println("Instance type is "+
instance.instanceType());
                        System.out.println("Instance state name is "+
instance.state().name());
                        System.out.println("monitoring information is "+
instance.monitoring().state());

                }
            }
                nextToken = response.nextToken();
            } while (nextToken != null);
```

```
        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Hasil paged; Anda bisa mendapatkan hasil lebih lanjut dengan meneruskan nilai yang dikembalikan dari `nextToken` metode objek hasil ke `nextToken` metode objek permintaan baru, kemudian menggunakan objek permintaan baru dalam panggilan berikutnya. `describeInstances`

Lihat contoh lengkapnya di GitHub.

## Memantau sebuah instance

Anda dapat memantau berbagai aspek Amazon EC2 instance Anda, seperti CPU dan pemanfaatan jaringan, memori yang tersedia, dan ruang disk yang tersisa. Untuk mempelajari lebih lanjut tentang pemantauan instans, lihat Pemantauan Amazon EC2 di Panduan Amazon EC2 Pengguna untuk Instans Linux.

Untuk mulai memantau instance, Anda harus membuat MonitorInstancesRequestdengan ID instance untuk dipantau, dan meneruskannya ke metode `monitorInstances`Ec2Client.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.MonitorInstancesRequest;
import software.amazon.awssdk.services.ec2.model.UnmonitorInstancesRequest;
```

Kode

```
    public static void monitorInstance( Ec2Client ec2, String instanceId) {

        MonitorInstancesRequest request = MonitorInstancesRequest.builder()
                .instanceIds(instanceId).build();

        ec2.monitorInstances(request);
        System.out.printf(
                "Successfully enabled monitoring for instance %s",
                instanceId);
```

```
    }
```

Lihat contoh lengkapnya di GitHub.

## Hentikan pemantauan instans

Untuk menghentikan pemantauan instance, buat UnmonitorInstancesRequestdengan ID instance untuk menghentikan pemantauan, dan teruskan ke metode Ec2Client. `unmonitorInstances`

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.MonitorInstancesRequest;
import software.amazon.awssdk.services.ec2.model.UnmonitorInstancesRequest;
```

Kode

```
    public static void unmonitorInstance(Ec2Client ec2, String instanceId) {
        UnmonitorInstancesRequest request = UnmonitorInstancesRequest.builder()
                .instanceIds(instanceId).build();

        ec2.unmonitorInstances(request);

        System.out.printf(
                "Successfully disabled monitoring for instance %s",
                instanceId);
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi selengkapnya

- RunInstancesdi Referensi Amazon EC2 API
- DescribeInstancesdi Referensi Amazon EC2 API
- StartInstancesdi Referensi Amazon EC2 API
- StopInstancesdi Referensi Amazon EC2 API
- RebootInstancesdi Referensi Amazon EC2 API
- MonitorInstancesdi Referensi Amazon EC2 API
- UnmonitorInstancesdi Referensi Amazon EC2 API

# Zona Penggunaan Wilayah AWS dan Ketersediaan

## Menjelaskan Wilayah

Untuk mencantumkan Wilayah yang tersedia untuk akun Anda, hubungi metode Ec2Client. `describeRegions` Ini mengembalikan a DescribeRegionsResponse. Panggil `regions` metode objek yang dikembalikan untuk mendapatkan daftar objek Region yang mewakili setiap Region.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;
```

Kode

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeRegionsAndZones {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future =
 describeEC2RegionsAndZonesAsync(ec2AsyncClient);
            future.join(); // Wait for both async operations to complete.
        } catch (RuntimeException rte) {
```

```
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Asynchronously describes the EC2 regions and availability zones.
     *
     * @param ec2AsyncClient the EC2 async client used to make the API calls
     * @return a {@link CompletableFuture} that completes when both the region and
availability zone descriptions are complete
     */
    public static CompletableFuture<Void>
describeEC2RegionsAndZonesAsync(Ec2AsyncClient ec2AsyncClient) {
        // Initiate the asynchronous request to describe regions
        CompletableFuture<DescribeRegionsResponse> regionsResponse =
ec2AsyncClient.describeRegions();

        // Handle the response or exception for regions
        CompletableFuture<DescribeRegionsResponse> regionsFuture =
regionsResponse.whenComplete((regionsResp, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException
                throw new RuntimeException("Failed to describe EC2 regions.", ex);
            } else if (regionsResp == null || regionsResp.regions().isEmpty()) {
                // Throw an exception if the response is null or the result is empty
                throw new RuntimeException("No EC2 regions found.");
            } else {
                // Process the response if no exception occurred and the result is not
empty
                regionsResp.regions().forEach(region -> {
                    System.out.printf(
                        "Found Region %s with endpoint %s%n",
                        region.regionName(),
                        region.endpoint());
                });
            }
        });

        CompletableFuture<DescribeAvailabilityZonesResponse> zonesResponse =
ec2AsyncClient.describeAvailabilityZones();
        CompletableFuture<DescribeAvailabilityZonesResponse> zonesFuture =
zonesResponse.whenComplete((zonesResp, ex) -> {
            if (ex != null) {
```

```
                throw new RuntimeException("Failed to describe EC2 availability
 zones.", ex);
            } else if (zonesResp == null || zonesResp.availabilityZones().isEmpty()) {
                throw new RuntimeException("No EC2 availability zones found.");
            } else {
                zonesResp.availabilityZones().forEach(zone -> {
                    System.out.printf(
                        "Found Availability Zone %s with status %s in region %s%n",
                        zone.zoneName(),
                        zone.state(),
                        zone.regionName()
                    );
                });
            }
        });

        return CompletableFuture.allOf(regionsFuture, zonesFuture);
    }
}
```

Lihat contoh lengkapnya di GitHub.

## Jelaskan zona ketersediaan

Untuk mencantumkan setiap Availability Zone yang tersedia untuk akun Anda, hubungi metode Ec2Client. `describeAvailabilityZones` Ini mengembalikan a DescribeAvailabilityZonesResponse. Panggil `availabilityZones` metodenya untuk mendapatkan daftar AvailabilityZoneobjek yang mewakili setiap Availability Zone.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;
```

Kode

Buat Ec2Client.

```
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
```

```
            .build();
```

Kemudian panggil describeAvailabilityZones () dan ambil hasilnya.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeRegionsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeRegionsAndZones {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future =
 describeEC2RegionsAndZonesAsync(ec2AsyncClient);
            future.join(); // Wait for both async operations to complete.
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Asynchronously describes the EC2 regions and availability zones.
     *
     * @param ec2AsyncClient the EC2 async client used to make the API calls
     * @return a {@link CompletableFuture} that completes when both the region and
 availability zone descriptions are complete
     */
    public static CompletableFuture<Void>
 describeEC2RegionsAndZonesAsync(Ec2AsyncClient ec2AsyncClient) {
```

```
        // Initiate the asynchronous request to describe regions
        CompletableFuture<DescribeRegionsResponse> regionsResponse =
ec2AsyncClient.describeRegions();

        // Handle the response or exception for regions
        CompletableFuture<DescribeRegionsResponse> regionsFuture =
regionsResponse.whenComplete((regionsResp, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException
                throw new RuntimeException("Failed to describe EC2 regions.", ex);
            } else if (regionsResp == null || regionsResp.regions().isEmpty()) {
                // Throw an exception if the response is null or the result is empty
                throw new RuntimeException("No EC2 regions found.");
            } else {
                // Process the response if no exception occurred and the result is not
empty
                regionsResp.regions().forEach(region -> {
                    System.out.printf(
                        "Found Region %s with endpoint %s%n",
                        region.regionName(),
                        region.endpoint());
                });
            }
        });

        CompletableFuture<DescribeAvailabilityZonesResponse> zonesResponse =
ec2AsyncClient.describeAvailabilityZones();
        CompletableFuture<DescribeAvailabilityZonesResponse> zonesFuture =
zonesResponse.whenComplete((zonesResp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to describe EC2 availability
zones.", ex);
            } else if (zonesResp == null || zonesResp.availabilityZones().isEmpty()) {
                throw new RuntimeException("No EC2 availability zones found.");
            } else {
                zonesResp.availabilityZones().forEach(zone -> {
                    System.out.printf(
                        "Found Availability Zone %s with status %s in region %s%n",
                        zone.zoneName(),
                        zone.state(),
                        zone.regionName()
                    );
                });
            }
```

```
        });

        return CompletableFuture.allOf(regionsFuture, zonesFuture);
    }
}
```

Lihat contoh lengkapnya di GitHub.

## Jelaskan akun

Untuk membuat daftar informasi EC2 terkait tentang akun Anda, hubungi metode Ec2Client. `describeAccountAttributes` Metode ini mengembalikan DescribeAccountAttributesResponseobjek. Memanggil `accountAttributes` metode objek ini untuk mendapatkan daftar AccountAttributeobjek. Anda dapat mengulangi melalui daftar untuk mengambil objek`AccountAttribute`.

Anda bisa mendapatkan nilai atribut akun Anda dengan menjalankan `attributeValues` metode `AccountAttribute` objek. Metode ini mengembalikan daftar AccountAttributeValueobjek. Anda dapat mengulangi melalui daftar kedua ini untuk menampilkan nilai atribut (lihat contoh kode berikut).

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeAccountAttributesResponse;
import java.util.concurrent.CompletableFuture;
```

Kode

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeAccountAttributesResponse;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class DescribeAccount {
    public static void main(String[] args) {
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<DescribeAccountAttributesResponse> future =
 describeEC2AccountAsync(ec2AsyncClient);
            future.join();
            System.out.println("EC2 Account attributes described successfully.");
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Describes the EC2 account attributes asynchronously.
     *
     * @param ec2AsyncClient the EC2 asynchronous client to use for the operation
     * @return a {@link CompletableFuture} containing the {@link
 DescribeAccountAttributesResponse} with the account attributes
     */
    public static CompletableFuture<DescribeAccountAttributesResponse>
 describeEC2AccountAsync(Ec2AsyncClient ec2AsyncClient) {
        CompletableFuture<DescribeAccountAttributesResponse> response =
 ec2AsyncClient.describeAccountAttributes();
        return response.whenComplete((accountResults, ex) -> {
            if (ex != null) {
                // Handle the exception by throwing a RuntimeException.
                throw new RuntimeException("Failed to describe EC2 account
 attributes.", ex);
            } else if (accountResults == null ||
 accountResults.accountAttributes().isEmpty()) {
                // Throw an exception if the response is null or no account attributes
 are found.
                throw new RuntimeException("No account attributes found.");
            } else {
                // Process the response if no exception occurred.
                accountResults.accountAttributes().forEach(attribute -> {
                    System.out.println("\nThe name of the attribute is " +
 attribute.attributeName());
                    attribute.attributeValues().forEach(
```

```
                        myValue -> System.out.println("The value of the attribute is "
 + myValue.attributeValue()));
                });
            }
        });
    }
}
```

Lihat contoh lengkapnya di GitHub.

### Informasi selengkapnya

- Wilayah dan Availability Zone di Panduan Amazon EC2 Pengguna untuk Instans Linux
- DescribeRegionsdi Referensi Amazon EC2 API
- DescribeAvailabilityZonesdi Referensi Amazon EC2 API

## Bekerja dengan kelompok keamanan di Amazon EC2

### Membuat grup keamanan

Untuk membuat grup keamanan, panggil `createSecurityGroup` metode Ec2Client dengan CreateSecurityGroupRequestyang berisi nama kunci.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.IpRange;
```

Kode

```
            CreateSecurityGroupRequest createRequest =
 CreateSecurityGroupRequest.builder()
```

```
                .groupName(groupName)
                .description(groupDesc)
                .vpcId(vpcId)
                .build();

            CreateSecurityGroupResponse resp= ec2.createSecurityGroup(createRequest);
```

Lihat contoh lengkapnya di GitHub.

## Konfigurasikan grup keamanan

Grup keamanan dapat mengontrol lalu lintas masuk (masuk) dan keluar (keluar) ke instans Anda. Amazon EC2

Untuk menambahkan aturan ingress ke grup keamanan Anda, gunakan `authorizeSecurityGroupIngress` metode Ec2Client, dengan memberikan nama grup keamanan dan aturan akses (IpPermission) yang ingin Anda tetapkan di dalam objek. AuthorizeSecurityGroupIngressRequest Contoh berikut menunjukkan cara menambahkan izin IP ke grup keamanan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.IpRange;
```

Kode

Pertama, buat Ec2Client

```
        Region region = Region.US_WEST_2;
        Ec2Client ec2 = Ec2Client.builder()
                .region(region)
                .build();
```

Kemudian gunakan metode Ec2Client, `authorizeSecurityGroupIngress`

```
            IpRange ipRange = IpRange.builder()
                .cidrIp("0.0.0.0/0").build();

            IpPermission ipPerm = IpPermission.builder()
                .ipProtocol("tcp")
                .toPort(80)
                .fromPort(80)
                .ipRanges(ipRange)
                .build();

            IpPermission ipPerm2 = IpPermission.builder()
                .ipProtocol("tcp")
                .toPort(22)
                .fromPort(22)
                .ipRanges(ipRange)
                .build();

            AuthorizeSecurityGroupIngressRequest authRequest =
                AuthorizeSecurityGroupIngressRequest.builder()
                        .groupName(groupName)
                        .ipPermissions(ipPerm, ipPerm2)
                        .build();

            AuthorizeSecurityGroupIngressResponse authResponse =
            ec2.authorizeSecurityGroupIngress(authRequest);

            System.out.printf(
                "Successfully added ingress policy to Security Group %s",
                groupName);

            return resp.groupId();

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Untuk menambahkan aturan keluar ke grup keamanan, berikan data serupa dalam metode Ec2Client. [AuthorizeSecurityGroupEgressRequest](#)`authorizeSecurityGroupEgress`

Lihat contoh lengkapnya di GitHub.

## Jelaskan kelompok keamanan

Untuk mendeskripsikan grup keamanan Anda atau mendapatkan informasi tentang mereka, hubungi metode Ec2Client. `describeSecurityGroups` Ia mengembalikan DescribeSecurityGroupsResponseyang dapat Anda gunakan untuk mengakses daftar grup keamanan dengan memanggil `securityGroups` metodenya, yang mengembalikan daftar SecurityGroupobjek.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.SecurityGroup;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Kode

```
    public static void describeEC2SecurityGroups(Ec2Client ec2, String groupId) {

       try {
           DescribeSecurityGroupsRequest request =
               DescribeSecurityGroupsRequest.builder()
                       .groupIds(groupId).build();

           DescribeSecurityGroupsResponse response =
               ec2.describeSecurityGroups(request);

            for(SecurityGroup group : response.securityGroups()) {
               System.out.printf(
                   "Found Security Group with id %s, " +
                           "vpc id %s " +
                           "and description %s",
                   group.groupId(),
                   group.vpcId(),
                   group.description());
           }
       } catch (Ec2Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Menghapus grup keamanan

Untuk menghapus grup keamanan, panggil `deleteSecurityGroup` metode Ec2Client, berikan DeleteSecurityGroupRequestyang berisi ID grup keamanan untuk dihapus.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
```

Kode

```
    public static void deleteEC2SecGroup(Ec2Client ec2,String groupId) {

        try {
            DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
                .groupId(groupId)
                .build();

            ec2.deleteSecurityGroup(request);
            System.out.printf(
                "Successfully deleted Security Group with id %s", groupId);

        } catch (Ec2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
     }
```

Lihat contoh lengkapnya di GitHub.

## Informasi lain

- Amazon EC2 Grup Keamanan dalam Panduan Amazon EC2 Pengguna untuk Instans Linux

- Otorisasi lalu lintas masuk untuk Instans Linux Anda di Panduan Amazon EC2 Pengguna untuk Instans Linux
- CreateSecurityGroupdi Referensi Amazon EC2 API
- DescribeSecurityGroupsdi Referensi Amazon EC2 API
- DeleteSecurityGroupdi Referensi Amazon EC2 API
- AuthorizeSecurityGroupIngressdi Referensi Amazon EC2 API

## Bekerja dengan metadata instans Amazon EC2

Klien Java SDK untuk Layanan Metadata Instans Amazon EC2 (klien metadata) memungkinkan aplikasi Anda mengakses metadata pada instans EC2 lokal mereka. Klien metadata bekerja dengan instance lokal IMDSv2(Instance Metadata Service v2) dan menggunakan permintaan berorientasi sesi.

Dua kelas klien tersedia di SDK. Sinkron `Ec2MetadataClient` adalah untuk memblokir operasi, dan untuk kasus penggunaan asinkron, non-pemblokiran. `Ec2MetadataAsyncClient`

### Memulai

Untuk menggunakan klien metadata, tambahkan artefak `imds` Maven ke proyek Anda. Anda juga memerlukan kelas untuk `SdkHttpClient` (atau `SdkAsyncHttpClient` untuk varian asinkron) pada classpath.

Berikut Maven XMLmenunjukkan cuplikan dependensi untuk menggunakan sinkron UrlConnectionHttpClientbersama dengan ketergantungan untuk klien metadata.

```
<dependencyManagement>
   <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>VERSION</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
```

```
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>imds</artifactId>
    </dependency>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>url-connection-client</artifactId>
    </dependency>
    <!-- other dependencies -->
</dependencies>
```

Cari repositori pusat Maven untuk versi artefak terbaru. `bom`

Untuk menggunakan klien HTTP asinkron, ganti cuplikan ketergantungan untuk artefak. `url-connection-client` Misalnya, cuplikan berikut membawa implementasi. NettyNioAsyncHttpClient

```
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>netty-nio-client</artifactId>
    </dependency>
```

## Gunakan klien metadata

### Membuat instance klien metadata

Anda dapat membuat instance sinkron `Ec2MetadataClient` ketika hanya satu implementasi `SdkHttpClient` antarmuka yang ada di classpath. Untuk melakukannya, panggil `Ec2MetadataClient#create()` metode statis seperti yang ditunjukkan pada cuplikan berikut.

```
Ec2MetadataClient client = Ec2MetadataClient.create(); //
 'Ec2MetadataAsyncClient#create' is the asynchronous version.
```

Jika aplikasi Anda memiliki beberapa implementasi `SdkHttpAsyncClient` antarmuka `SdkHttpClient` atau, Anda harus menentukan implementasi untuk klien metadata untuk digunakan seperti yang ditunjukkan di bagian. the section called “Klien HTTP yang dapat dikonfigurasi”

> **Note**
>
> Untuk sebagian besar klien layanan, seperti Amazon S3, SDK for Java secara otomatis menambahkan implementasi antarmuka atau. `SdkHttpClient` `SdkHttpAsyncClient` Jika klien metadata Anda menggunakan implementasi yang sama, maka

`Ec2MetadataClient#create()` akan berfungsi. Jika Anda memerlukan implementasi yang berbeda, Anda harus menentukannya saat Anda membuat klien metadata.

Kirim permintaan

Untuk mengambil metadata instance, buat instance `EC2MetadataClient` class dan panggil `get` method dengan parameter path yang menentukan kategori metadata instance.

Contoh berikut mencetak nilai yang terkait dengan `ami-id` kunci ke konsol.

```
Ec2MetadataClient client = Ec2MetadataClient.create();
Ec2MetadataResponse response = client.get("/latest/meta-data/ami-id");
System.out.println(response.asString());
client.close(); // Closes the internal resources used by the Ec2MetadataClient class.
```

Jika jalur tidak valid, `get` metode melempar pengecualian.

Gunakan kembali instance klien yang sama untuk beberapa permintaan, tetapi panggil `close` klien ketika tidak lagi diperlukan untuk melepaskan sumber daya. Setelah metode close dipanggil, instance klien tidak dapat digunakan lagi.

Mengurai tanggapan

Metadata instans EC2 dapat menjadi output dalam format yang berbeda. Teks biasa dan JSON adalah format yang paling umum digunakan. Klien metadata menawarkan cara untuk bekerja dengan format tersebut.

Seperti contoh berikut menunjukkan, menggunakan `asString` metode untuk mendapatkan data sebagai string Java. Anda juga dapat menggunakan `asList` metode ini untuk memisahkan respons teks biasa yang mengembalikan beberapa baris.

```
Ec2MetadataClient client = Ec2MetadataClient.create();
Ec2MetadataResponse response = client.get("/latest/meta-data/");
String fullResponse = response.asString();
List<String> splits = response.asList();
```

Jika respon dalam JSON, gunakan `Ec2MetadataResponse#asDocument` metode untuk mengurai respon JSON ke dalam contoh Dokumen seperti yang ditunjukkan dalam cuplikan kode berikut.

```
Document fullResponse = response.asDocument();
```

Pengecualian akan dilemparkan jika format metadata tidak ada di JSON. Jika respons berhasil diuraikan, Anda dapat menggunakan API dokumen untuk memeriksa respons secara lebih rinci. Lihat bagan kategori metadata instance untuk mempelajari kategori metadata mana yang memberikan respons berformat JSON.

## Konfigurasikan klien metadata

### Percobaan ulang

Anda dapat mengonfigurasi klien metadata dengan mekanisme coba lagi. Jika Anda melakukannya, maka klien dapat secara otomatis mencoba kembali permintaan yang gagal karena alasan yang tidak terduga. Secara default, klien mencoba ulang tiga kali pada permintaan yang gagal dengan waktu backoff eksponensial di antara upaya.

Jika kasus penggunaan Anda memerlukan mekanisme coba lagi yang berbeda, Anda dapat menyesuaikan klien menggunakan `retryPolicy` metode pada pembuatnya. Misalnya, contoh berikut menunjukkan klien sinkron yang dikonfigurasi dengan penundaan tetap dua detik antara upaya dan lima upaya coba lagi.

```
BackoffStrategy fixedBackoffStrategy =
 FixedDelayBackoffStrategy.create(Duration.ofSeconds(2));
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .retryPolicy(retryPolicyBuilder ->
 retryPolicyBuilder.numRetries(5)

 .backoffStrategy(fixedBackoffStrategy))
                     .build();
```

Ada beberapa BackoffStrategiesyang dapat Anda gunakan dengan klien metadata.

Anda juga dapat menonaktifkan mekanisme coba lagi sepenuhnya, seperti yang ditunjukkan cuplikan berikut.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                    .retryPolicy(Ec2MetadataRetryPolicy.none())
                    .build();
```

Menggunakan `Ec2MetadataRetryPolicy#none()` menonaktifkan kebijakan coba ulang default sehingga klien metadata tidak mencoba lagi.

### Versi IP

Secara default, klien metadata menggunakan titik IPV4 akhir di. `http://169.254.169.254` Untuk mengubah klien untuk menggunakan IPV6 versi, gunakan salah satu `endpointMode` atau `endpoint` metode pembangun. Hasil pengecualian jika kedua metode dipanggil pada pembangun.

Contoh berikut menunjukkan kedua IPV6 opsi.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .endpointMode(EndpointMode.IPV6)
                     .build();
```

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .endpoint(URI.create("http://[fd00:ec2::254]"))
                     .build();
```

## Fitur utama

### Klien asinkron

Untuk menggunakan versi klien yang tidak memblokir, buat instance kelas. `Ec2MetadataAsyncClient` Kode dalam contoh berikut membuat klien asinkron dengan pengaturan default dan menggunakan `get` metode untuk mengambil nilai untuk kunci. `ami-id`

```
Ec2MetadataAsyncClient asyncClient = Ec2MetadataAsyncClient.create();
CompletableFuture<Ec2MetadataResponse> response = asyncClient.get("/latest/meta-data/
ami-id");
```

Yang `java.util.concurrent.CompletableFuture` dikembalikan oleh `get` metode selesai ketika respon kembali. Contoh berikut mencetak `ami-id` metadata ke konsol.

```
response.thenAccept(metadata -> System.out.println(metadata.asString()));
```

### Klien HTTP yang dapat dikonfigurasi

Builder untuk setiap klien metadata memiliki `httpClient` metode yang dapat Anda gunakan untuk menyediakan klien HTTP yang disesuaikan.

Contoh berikut menunjukkan kode untuk `UrlConnectionHttpClient` contoh kustom.

```
SdkHttpClient httpClient =
    UrlConnectionHttpClient.builder()
                           .socketTimeout(Duration.ofMinutes(5))
                           .proxyConfiguration(proxy ->
 proxy.endpoint(URI.create("http://proxy.example.net:8888"))))
                           .build();
Ec2MetadataClient metaDataClient =
    Ec2MetadataClient.builder()
                     .httpClient(httpClient)
                     .build();
// Use the metaDataClient instance.
metaDataClient.close();   // Close the instance when no longer needed.
```

Contoh berikut menunjukkan kode untuk `NettyNioAsyncHttpClient` instance kustom dengan klien metadata asinkron.

```
SdkAsyncHttpClient httpAsyncClient =
    NettyNioAsyncHttpClient.builder()
                           .connectionTimeout(Duration.ofMinutes(5))
                           .maxConcurrency(100)
                           .build();
Ec2MetadataAsyncClient asyncMetaDataClient =
    Ec2MetadataAsyncClient.builder()
                          .httpClient(httpAsyncClient)
                          .build();
// Use the asyncMetaDataClient instance.
asyncMetaDataClient.close();   // Close the instance when no longer needed.
```

the section called “Konfigurasikan klien HTTP”Topik dalam panduan ini memberikan rincian tentang cara mengkonfigurasi klien HTTP yang tersedia di SDK for Java.

Caching token

Karena klien metadata menggunakan IMDSv2, semua permintaan dikaitkan dengan sesi. Sesi ditentukan oleh token yang memiliki kedaluwarsa, yang dikelola klien metadata untuk Anda. Setiap permintaan metadata secara otomatis menggunakan kembali token hingga kedaluwarsa.

Secara default, token berlangsung selama enam jam (21.600 detik). Kami menyarankan Anda untuk mempertahankan time-to-live nilai default, kecuali kasus penggunaan khusus Anda memerlukan konfigurasi lanjutan.

Jika diperlukan, konfigurasikan durasinya dengan menggunakan metode `tokenTtl` builder. Misalnya, kode dalam cuplikan berikut membuat klien dengan durasi sesi lima menit.

```
Ec2MetadataClient client =
    Ec2MetadataClient.builder()
                     .tokenTtl(Duration.ofMinutes(5))
                     .build();
```

Jika Anda menghilangkan pemanggilan `tokenTtl` metode pada builder, durasi default 21.600 digunakan sebagai gantinya.

# Bekerja dengan IAM

Bagian ini memberikan contoh pemrograman AWS Identity and Access Management (IAM) dengan menggunakan AWS SDK untuk Java 2.x.

AWS Identity and Access Management (IAM) memungkinkan Anda untuk mengontrol akses ke AWS layanan dan sumber daya untuk pengguna Anda dengan aman. Dengan menggunakan IAM, Anda dapat membuat dan mengelola AWS pengguna dan grup, serta menggunakan izin untuk mengizinkan dan menolak akses mereka ke AWS sumber daya. Untuk panduan lengkap IAM, kunjungi Panduan IAM Pengguna.

Contoh berikut hanya mencakup kode yang diperlukan untuk mendemonstrasikan setiap teknik. Kode contoh lengkap tersedia di GitHub. Dari sana, Anda dapat mengunduh satu file sumber atau mengkloning repositori secara lokal untuk mendapatkan semua contoh untuk dibangun dan dijalankan.

Topik

- Kelola kunci IAM akses
- Kelola IAM Pengguna
- Buat kebijakan IAM dengan AWS SDK for Java 2.x
- Bekerja dengan IAM kebijakan
- Bekerja dengan sertifikat IAM server

# Kelola kunci IAM akses

## Buat kunci akses

Untuk membuat kunci IAM akses, panggil `IamClient's createAccessKey` metode dengan `CreateAccessKeyRequest`objek.

> **Note**
>
> Anda harus mengatur wilayah AWS_GLOBALagar `IamClient` panggilan berfungsi karena IAM merupakan layanan global.

Impor

```
import software.amazon.awssdk.services.iam.model.CreateAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.CreateAccessKeyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static String createIAMAccessKey(IamClient iam,String user) {

        try {
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                .userName(user).build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
           String keyId = response.accessKey().accessKeyId();
           return keyId;

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar kunci akses

Untuk membuat daftar kunci akses untuk pengguna tertentu, buat `ListAccessKeysRequest`objek yang berisi nama pengguna untuk mencantumkan kunci, dan meneruskannya ke `IamClient's listAccessKeys` metode.

> **Note**
>
> Jika Anda tidak memberikan nama pengguna ke`listAccessKeys`, itu akan mencoba untuk daftar kunci akses yang terkait dengan Akun AWS yang menandatangani permintaan.

### Impor

```
import software.amazon.awssdk.services.iam.model.AccessKeyMetadata;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccessKeysRequest;
import software.amazon.awssdk.services.iam.model.ListAccessKeysResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

### Kode

```
    public static void listKeys( IamClient iam,String userName ){

        try {
            boolean done = false;
            String newMarker = null;

            while (!done) {
                ListAccessKeysResponse response;

            if(newMarker == null) {
                ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                        .userName(userName).build();
                response = iam.listAccessKeys(request);
            } else {
                ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                        .userName(userName)
                        .marker(newMarker).build();
                response = iam.listAccessKeys(request);
```

```
            }

            for (AccessKeyMetadata metadata :
                    response.accessKeyMetadata()) {
                System.out.format("Retrieved access key %s",
                        metadata.accessKeyId());
            }

            if (!response.isTruncated()) {
                done = true;
            } else {
                newMarker = response.marker();
            }
        }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Hasil `listAccessKeys` paged (dengan maksimum default 100 record per panggilan). Anda dapat memanggil `isTruncated` `ListAccessKeysResponse`objek yang dikembalikan untuk melihat apakah kueri mengembalikan hasil yang lebih sedikit kemudian tersedia. Jika demikian, maka panggil `marker` `ListAccessKeysResponse` dan gunakan saat membuat permintaan baru. Gunakan permintaan baru itu dalam pemanggilan berikutnya. `listAccessKeys`

Lihat contoh lengkapnya di GitHub.

## Mengambil waktu terakhir yang digunakan kunci akses

Untuk mendapatkan waktu kunci akses terakhir digunakan, panggil `IamClient’s` `getAccessKeyLastUsed` metode dengan ID kunci akses (yang dapat diteruskan menggunakan `GetAccessKeyLastUsedRequest`objek.

Anda kemudian dapat menggunakan `GetAccessKeyLastUsedResponse`objek yang dikembalikan untuk mengambil waktu terakhir kunci yang digunakan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

```
import software.amazon.awssdk.services.iam.model.GetAccessKeyLastUsedRequest;
import software.amazon.awssdk.services.iam.model.GetAccessKeyLastUsedResponse;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void getAccessKeyLastUsed(IamClient iam, String accessId ){

        try {
            GetAccessKeyLastUsedRequest request = GetAccessKeyLastUsedRequest.builder()
                    .accessKeyId(accessId).build();

            GetAccessKeyLastUsedResponse response = iam.getAccessKeyLastUsed(request);

            System.out.println("Access key was last used at: " +
                    response.accessKeyLastUsed().lastUsedDate());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
```

Lihat contoh lengkapnya di GitHub.

## Aktifkan atau nonaktifkan tombol akses

Anda dapat mengaktifkan atau menonaktifkan kunci akses dengan membuat `UpdateAccessKeyRequest`objek, memberikan ID kunci akses, opsional nama pengguna, dan yang diinginkan `status`, lalu meneruskan objek permintaan ke metode. `IamClient's updateAccessKey`

Impor

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.StatusType;
import software.amazon.awssdk.services.iam.model.UpdateAccessKeyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Kode

```
      public static void updateKey(IamClient iam, String username, String accessId,
String status ) {

         try {
             if (status.toLowerCase().equalsIgnoreCase("active")) {
                 statusType = StatusType.ACTIVE;
             } else if (status.toLowerCase().equalsIgnoreCase("inactive")) {
                 statusType = StatusType.INACTIVE;
             } else {
                 statusType = StatusType.UNKNOWN_TO_SDK_VERSION;
             }
             UpdateAccessKeyRequest request = UpdateAccessKeyRequest.builder()
               .accessKeyId(accessId)
               .userName(username)
               .status(statusType)
               .build();

             iam.updateAccessKey(request);

             System.out.printf(
               "Successfully updated the status of access key %s to" +
                       "status %s for user %s", accessId, status, username);

       } catch (IamException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

Lihat contoh lengkapnya di GitHub.

## Hapus kunci akses

Untuk menghapus kunci akses secara permanen, panggil `IamClient's deleteKey` metode, berikan dengan ID dan nama pengguna kunci akses yang `DeleteAccessKeyRequest`berisi.

> **Note**
>
> Setelah dihapus, kunci tidak dapat lagi diambil atau digunakan. Untuk menonaktifkan sementara kunci sehingga dapat diaktifkan lagi nanti, gunakan `updateAccessKey`metode sebagai gantinya.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void deleteKey(IamClient iam ,String username, String accessKey ) {

        try {
            DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                    .accessKeyId(accessKey)
                    .userName(username)
                    .build();

            iam.deleteAccessKey(request);
            System.out.println("Successfully deleted access key " + accessKey +
                " from user " + username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi lain

- CreateAccessKeydi Referensi IAM API
- ListAccessKeysdi Referensi IAM API
- GetAccessKeyLastUseddi Referensi IAM API
- UpdateAccessKeydi Referensi IAM API
- DeleteAccessKeydi Referensi IAM API

# Kelola IAM Pengguna

## Buat Pengguna

Buat IAM pengguna baru dengan memberikan nama pengguna ke IamClient `createUser` metode menggunakan CreateUserRequestobjek yang berisi nama pengguna.

### Impor

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreateUserRequest;
import software.amazon.awssdk.services.iam.model.CreateUserResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
import software.amazon.awssdk.services.iam.model.GetUserRequest;
import software.amazon.awssdk.services.iam.model.GetUserResponse;
```

### Kode

```
    public static String createIAMUser(IamClient iam, String username ) {

        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();

            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();

            CreateUserResponse response = iam.createUser(request);

            // Wait until the user is created
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
 iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user().userName();
```

```
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
       return "";
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar Pengguna

Untuk membuat daftar IAM pengguna untuk akun Anda, buat yang baru ListUsersRequestdan teruskan ke IamClient `listUsers` metode ini. Anda dapat mengambil daftar pengguna dengan memanggil ListUsersResponseobjek `users` yang dikembalikan.

Daftar pengguna yang dikembalikan `listUsers` oleh halaman. Anda dapat memeriksa untuk melihat ada lebih banyak hasil untuk diambil dengan memanggil `isTruncated` metode objek respons. Jika kembali`true`, maka panggil `marker()` metode objek respon. Gunakan nilai penanda untuk membuat objek permintaan baru. Kemudian panggil `listUsers` metode lagi dengan permintaan baru.

Impor

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListUsersRequest;
import software.amazon.awssdk.services.iam.model.ListUsersResponse;
import software.amazon.awssdk.services.iam.model.User;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Kode

```
    public static void listAllUsers(IamClient iam ) {

        try {

             boolean done = false;
             String newMarker = null;

             while(!done) {
```

```
                ListUsersResponse response;

                if (newMarker == null) {
                    ListUsersRequest request = ListUsersRequest.builder().build();
                    response = iam.listUsers(request);
                } else {
                    ListUsersRequest request = ListUsersRequest.builder()
                        .marker(newMarker).build();
                    response = iam.listUsers(request);
                }

                for(User user : response.users()) {
                 System.out.format("\n Retrieved user %s", user.userName());
                }

                if(!response.isTruncated()) {
                  done = true;
                } else {
                    newMarker = response.marker();
                }
            }
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Memperbarui Pengguna

Untuk memperbarui pengguna, panggil `updateUser` metode IamClient objek, yang mengambil UpdateUserRequestobjek yang dapat Anda gunakan untuk mengubah nama atau jalur pengguna.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateUserRequest;
```

Kode

```
    public static void updateIAMUser(IamClient iam, String curName,String newName ) {

        try {
            UpdateUserRequest request = UpdateUserRequest.builder()
                    .userName(curName)
                    .newUserName(newName)
                    .build();

            iam.updateUser(request);
            System.out.printf("Successfully updated user to username %s",
                newName);
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
      }
```

Lihat contoh lengkapnya di GitHub.

## Menghapus Pengguna

Untuk menghapus pengguna, panggil IamClient `deleteUser` permintaan dengan UpdateUserRequestobjek yang ditetapkan dengan nama pengguna untuk dihapus.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteUserRequest;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void deleteIAMUser(IamClient iam, String userName) {

        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("Successfully deleted IAM user " + userName);
```

```
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

### Informasi Selengkapnya

- IAM Pengguna di Panduan IAM Pengguna
- Mengelola IAM Pengguna di Panduan IAM Pengguna
- CreateUserdi Referensi IAM API
- ListUsersdi Referensi IAM API
- UpdateUserdi Referensi IAM API
- DeleteUserdi Referensi IAM API

## Buat kebijakan IAM dengan AWS SDK for Java 2.x

API Pembuat Kebijakan IAM adalah pustaka yang dapat Anda gunakan untuk membangun kebijakan IAM di Java dan mengunggahnya ke AWS Identity and Access Management (IAM).

Alih-alih membangun kebijakan IAM dengan merakit string JSON secara manual atau dengan membaca file, API menyediakan pendekatan berorientasi objek sisi klien untuk menghasilkan string JSON. Saat Anda membaca kebijakan IAM yang ada dalam format JSON, API mengonversinya menjadi IamPolicyinstance untuk ditangani.

API Pembuat Kebijakan IAM tersedia dengan SDK versi 2.20.105, jadi gunakan versi tersebut atau yang lebih baru di file build Maven Anda. Nomor versi terbaru SDK terdaftar di pusat Maven.

Cuplikan berikut menunjukkan contoh blok ketergantungan untuk file Maven. `pom.xml` Ini memungkinkan Anda untuk menggunakan IAM Policy Builder API dalam proyek Anda.

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>iam-policy-builder</artifactId>
    <version>2.27.21</version>
</dependency>
```

## Buat `IamPolicy`

Bagian ini menunjukkan beberapa contoh cara membuat kebijakan dengan menggunakan IAM Policy Builder API.

Dalam setiap contoh berikut, mulailah dengan `IamPolicy.Builder` dan tambahkan satu atau lebih pernyataan dengan menggunakan `addStatement` metode. Mengikuti pola ini, IamStatement.Builder memiliki metode untuk menambahkan efek, tindakan, sumber daya, dan kondisi ke pernyataan.

Contoh: Membuat kebijakan berbasis waktu

Contoh berikut membuat kebijakan berbasis identitas yang mengizinkan tindakan Amazon DynamoDB antara dua titik waktu`GetItem`.

```
    public String timeBasedPolicyExample() {
        IamPolicy policy = IamPolicy.builder()
                .addStatement(b -> b
                        .effect(IamEffect.ALLOW)
                        .addAction("dynamodb:GetItem")
                        .addResource(IamResource.ALL)
                        .addCondition(b1 -> b1
                                .operator(IamConditionOperator.DATE_GREATER_THAN)
                                .key("aws:CurrentTime")
                                .value("2020-04-01T00:00:00Z"))
                        .addCondition(b1 -> b1
                                .operator(IamConditionOperator.DATE_LESS_THAN)
                                .key("aws:CurrentTime")
                                .value("2020-06-30T23:59:59Z")))
                .build();

        // Use an IamPolicyWriter to write out the JSON string to a more readable
format.
        return policy.toJson(IamPolicyWriter.builder()
                        .prettyPrint(true)
                        .build());
    }
```

Keluaran JSON

Pernyataan terakhir dalam contoh sebelumnya mengembalikan string JSON berikut.

Baca lebih lanjut tentang contoh ini di Panduan AWS Identity and Access Management Pengguna.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": {
        "Effect": "Allow",
        "Action": "dynamodb:GetItem",
        "Resource": "*",
        "Condition": {
            "DateGreaterThan": {
                "aws:CurrentTime": "2020-04-01T00:00:00Z"
            },
            "DateLessThan": {
                "aws:CurrentTime": "2020-06-30T23:59:59Z"
            }
        }
    }
}
```

Contoh: Tentukan beberapa kondisi

Contoh berikut menunjukkan bagaimana Anda dapat membuat kebijakan berbasis identitas yang memungkinkan akses ke atribut DynamoDB tertentu. Kebijakan tersebut berisi dua syarat.

```
    public String multipleConditionsExample() {
        IamPolicy policy = IamPolicy.builder()
                .addStatement(b -> b
                        .effect(IamEffect.ALLOW)
                        .addAction("dynamodb:GetItem")
                        .addAction("dynamodb:BatchGetItem")
                        .addAction("dynamodb:Query")
                        .addAction("dynamodb:PutItem")
                        .addAction("dynamodb:UpdateItem")
                        .addAction("dynamodb:DeleteItem")
                        .addAction("dynamodb:BatchWriteItem")
                        .addResource("arn:aws:dynamodb:*:*:table/table-name")

  .addConditions(IamConditionOperator.STRING_EQUALS.addPrefix("ForAllValues:"),
                                "dynamodb:Attributes",
                                List.of("column-name1", "column-name2", "column-
name3"))
```

```
                        .addCondition(b1 ->
b1.operator(IamConditionOperator.STRING_EQUALS.addSuffix("IfExists"))
                                .key("dynamodb:Select")
                                .value("SPECIFIC_ATTRIBUTES")))
                .build();

        return policy.toJson(IamPolicyWriter.builder()
                .prettyPrint(true).build());
    }
```

Keluaran JSON

Pernyataan terakhir dalam contoh sebelumnya mengembalikan string JSON berikut.

Baca lebih lanjut tentang contoh ini di Panduan AWS Identity and Access Management Pengguna.

JSON

```
{
    "Version":"2012-10-17",
    "Statement": {
        "Effect": "Allow",
        "Action": [
            "dynamodb:GetItem",
            "dynamodb:BatchGetItem",
            "dynamodb:Query",
            "dynamodb:PutItem",
            "dynamodb:UpdateItem",
            "dynamodb:DeleteItem",
            "dynamodb:BatchWriteItem"
        ],
        "Resource": "arn:aws:dynamodb:*:*:table/table-name",
        "Condition": {
            "ForAllValues:StringEquals": {
                "dynamodb:Attributes": [
                    "column-name1",
                    "column-name2",
                    "column-name3"
                ]
            },
            "StringEqualsIfExists": {
                "dynamodb:Select": "SPECIFIC_ATTRIBUTES"
            }
```

```
        }
    }
}
```

Contoh: Tentukan prinsipal

Contoh berikut menunjukkan cara membuat kebijakan berbasis sumber daya yang menolak akses ke bucket untuk semua prinsipal kecuali yang ditentukan dalam kondisi.

```
public String specifyPrincipalsExample() {
    IamPolicy policy = IamPolicy.builder()
            .addStatement(b -> b
                    .effect(IamEffect.DENY)
                    .addAction("s3:*")
                    .addPrincipal(IamPrincipal.ALL)
                    .addResource("arn:aws:s3:::BUCKETNAME/*")
                    .addResource("arn:aws:s3:::BUCKETNAME")
                    .addCondition(b1 -> b1
                            .operator(IamConditionOperator.ARN_NOT_EQUALS)
                            .key("aws:PrincipalArn")
                            .value("arn:aws:iam::444455556666:user/user-name")))
            .build();
    return policy.toJson(IamPolicyWriter.builder()
            .prettyPrint(true).build());
}
```

Keluaran JSON

Pernyataan terakhir dalam contoh sebelumnya mengembalikan string JSON berikut.

Baca lebih lanjut tentang contoh ini di Panduan AWS Identity and Access Management Pengguna.

JSON

```
{
  "Version":"2012-10-17",
  "Statement" : {
    "Effect" : "Deny",
    "Principal" : "*",
    "Action" : "s3:*",
    "Resource" : [ "arn:aws:s3:::BUCKETNAME/*", "arn:aws:s3:::BUCKETNAME" ],
```

```
    "Condition" : {
      "ArnNotEquals" : {
        "aws:PrincipalArn" : "arn:aws:iam::444455556666:user/user-name"
      }
    }
  }
}
```

Contoh: Izinkan akses lintas akun

Contoh berikut menunjukkan cara mengizinkan orang lain Akun AWS mengunggah objek ke bucket Anda sambil mempertahankan kontrol pemilik penuh atas objek yang diunggah.

```
public String allowCrossAccountAccessExample() {
    IamPolicy policy = IamPolicy.builder()
            .addStatement(b -> b
                    .effect(IamEffect.ALLOW)
                    .addPrincipal(IamPrincipalType.AWS, "111122223333")
                    .addAction("s3:PutObject")
                    .addResource("arn:aws:s3:::amzn-s3-demo-bucket/*")
                    .addCondition(b1 -> b1
                            .operator(IamConditionOperator.STRING_EQUALS)
                            .key("s3:x-amz-acl")
                            .value("bucket-owner-full-control")))
            .build();
    return policy.toJson(IamPolicyWriter.builder()
            .prettyPrint(true).build());
}
```

Keluaran JSON

Pernyataan terakhir dalam contoh sebelumnya mengembalikan string JSON berikut.

Baca lebih lanjut tentang contoh ini di Panduan Pengguna Layanan Penyimpanan Sederhana Amazon.

JSON

```
{
  "Version":"2012-10-17",
```

```
  "Statement" : {
    "Effect" : "Allow",
    "Principal" : {
      "AWS" : "111122223333"
    },
    "Action" : "s3:PutObject",
    "Resource" : "arn:aws:s3:::amzn-s3-demo-bucket/*",
    "Condition" : {
      "StringEquals" : {
        "s3:x-amz-acl" : "bucket-owner-full-control"
      }
    }
  }
}
```

## Gunakan **`IamPolicy`** dengan IAM

Setelah Anda membuat `IamPolicy` instance, Anda menggunakan `IamClient`untuk bekerja dengan layanan IAM.

Contoh berikut membangun kebijakan yang memungkinkan identitas IAM untuk menulis item ke tabel DynamoDB di akun yang ditentukan dengan parameter. `accountID` Kebijakan tersebut kemudian diunggah ke IAM sebagai string JSON.

```
   public String createAndUploadPolicyExample(IamClient iam, String accountID, String
policyName) {
       // Build the policy.
       IamPolicy policy =
               IamPolicy.builder() // 'version' defaults to "2012-10-17".
                       .addStatement(IamStatement.builder()
                               .effect(IamEffect.ALLOW)
                               .addAction("dynamodb:PutItem")
                               .addResource("arn:aws:dynamodb:us-east-1:" + accountID
+ ":table/exampleTableName")
                               .build())
                       .build();
       // Upload the policy.
       iam.createPolicy(r ->
r.policyName(policyName).policyDocument(policy.toJson()));
       return policy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
   }
```

Contoh berikutnya dibangun di atas contoh sebelumnya. Kode mengunduh kebijakan dan menggunakannya sebagai dasar untuk kebijakan baru dengan menyalin dan mengubah pernyataan. Kebijakan baru kemudian diunggah.

```
   public String createNewBasedOnExistingPolicyExample(IamClient iam, String
accountID, String policyName, String newPolicyName) {

       String policyArn = "arn:aws:iam::" + accountID + ":policy/" + policyName;
       GetPolicyResponse getPolicyResponse = iam.getPolicy(r ->
r.policyArn(policyArn));

       String policyVersion = getPolicyResponse.policy().defaultVersionId();
       GetPolicyVersionResponse getPolicyVersionResponse =
               iam.getPolicyVersion(r ->
r.policyArn(policyArn).versionId(policyVersion));

       // Create an IamPolicy instance from the JSON string returned from IAM.
       String decodedPolicy =
URLDecoder.decode(getPolicyVersionResponse.policyVersion().document(),
StandardCharsets.UTF_8);
       IamPolicy policy = IamPolicy.fromJson(decodedPolicy);

           /*
            All IamPolicy components are immutable, so use the copy method that
creates a new instance that
            can be altered in the same method call.

            Add the ability to get an item from DynamoDB as an additional action.
           */
       IamStatement newStatement = policy.statements().get(0).copy(s ->
s.addAction("dynamodb:GetItem"));

       // Create a new statement that replaces the original statement.
       IamPolicy newPolicy = policy.copy(p ->
p.statements(Arrays.asList(newStatement)));

       // Upload the new policy. IAM now has both policies.
       iam.createPolicy(r -> r.policyName(newPolicyName)
               .policyDocument(newPolicy.toJson()));

       return newPolicy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
   }
```

IamClient

Contoh sebelumnya menggunakan `IamClient` argumen yang dibuat seperti yang ditunjukkan pada cuplikan berikut.

```
IamClient iam = IamClient.builder().region(Region.AWS_GLOBAL).build();
```

Kebijakan di JSON

Contoh mengembalikan string JSON berikut.

```
First example
{
  "Version": "2012-10-17",
  "Statement" : {
    "Effect" : "Allow",
    "Action" : "dynamodb:PutItem",
    "Resource" : "arn:aws:dynamodb:us-east-1:111122223333:table/exampleTableName"
  }
}

Second example
{
  "Version": "2012-10-17",
  "Statement" : {
    "Effect" : "Allow",
    "Action" : [ "dynamodb:PutItem", "dynamodb:GetItem" ],
    "Resource" : "arn:aws:dynamodb:us-east-1:111122223333:table/exampleTableName"
  }
}
```

# Bekerja dengan IAM kebijakan

## Buat kebijakan

Untuk membuat kebijakan baru, berikan nama kebijakan dan dokumen kebijakan berformat JSON dalam metode CreatePolicyRequestto the's. IamClient `createPolicy`

Impor

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
```

```
import software.amazon.awssdk.services.iam.model.CreatePolicyRequest;
import software.amazon.awssdk.services.iam.model.CreatePolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
```

Kode

```
    public static String createIAMPolicy(IamClient iam, String policyName ) {

        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();

            CreatePolicyRequest request = CreatePolicyRequest.builder()
                .policyName(policyName)
                .policyDocument(PolicyDocument).build();

            CreatePolicyResponse response = iam.createPolicy(request);

            // Wait until the policy is created
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
iamWaiter.waitUntilPolicyExists(polRequest);
            waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();

         } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "" ;
    }
```

Lihat contoh lengkapnya di GitHub.

## Dapatkan kebijakan

Untuk mengambil kebijakan yang ada, panggil `getPolicy` metode, yang menyediakan ARN kebijakan dalam GetPolicyRequestobjek. IamClient

Impor

```
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void getIAMPolicy(IamClient iam, String policyArn) {

        try {
            GetPolicyRequest request = GetPolicyRequest.builder()
                .policyArn(policyArn).build();

            GetPolicyResponse response = iam.getPolicy(request);
            System.out.format("Successfully retrieved policy %s",
                response.policy().policyName());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Lampirkan kebijakan peran

Anda dapat melampirkan kebijakan ke IAM peran dengan memanggil `attachRolePolicy` metode, memberikannya nama peran dan kebijakan ARN di. IamClient AttachRolePolicyRequest

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;
```

## Kode

```
   public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn ) {

       try {

            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                  .roleName(roleName)
                  .build();

           ListAttachedRolePoliciesResponse  response =
iam.listAttachedRolePolicies(request);
           List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

           // Ensure that the policy is not attached to this role
           String polArn = "";
           for (AttachedPolicy policy: attachedPolicies) {
               polArn = policy.policyArn();
               if (polArn.compareTo(policyArn)==0) {
                  System.out.println(roleName +
                           " policy is already attached to this role.");
                   return;
               }
         }

           AttachRolePolicyRequest attachRequest =
               AttachRolePolicyRequest.builder()
                       .roleName(roleName)
                       .policyArn(policyArn)
                       .build();

           iam.attachRolePolicy(attachRequest);

           System.out.println("Successfully attached policy " + policyArn +
```

```
                " to role " + roleName);

        } catch (IamException e) {
                System.err.println(e.awsErrorDetails().errorMessage());
                System.exit(1);
         }

     System.out.println("Done");
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar kebijakan peran terlampir

Buat daftar kebijakan terlampir pada peran dengan memanggil `listAttachedRolePolicies` metode ini. IamClient Dibutuhkan ListAttachedRolePoliciesRequestobjek yang berisi nama peran untuk mencantumkan kebijakan.

Panggil `getAttachedPolicies` ListAttachedRolePoliciesResponseobjek yang dikembalikan untuk mendapatkan daftar kebijakan terlampir. Hasil dapat terpotong; jika `isTruncated` metode `ListAttachedRolePoliciesResponse` objek kembali`true`, panggil metode `ListAttachedRolePoliciesResponse` objek. `marker` Gunakan penanda yang dikembalikan untuk membuat permintaan baru dan menggunakannya untuk memanggil `listAttachedRolePolicies` lagi untuk mendapatkan kumpulan hasil berikutnya.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;
```

Kode

```
    public static void attachIAMRolePolicy(IamClient iam, String roleName, String
 policyArn ) {
```

```
       try {

            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                  .roleName(roleName)
                  .build();

           ListAttachedRolePoliciesResponse  response =
iam.listAttachedRolePolicies(request);
           List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

           // Ensure that the policy is not attached to this role
           String polArn = "";
           for (AttachedPolicy policy: attachedPolicies) {
               polArn = policy.policyArn();
               if (polArn.compareTo(policyArn)==0) {
                  System.out.println(roleName +
                           " policy is already attached to this role.");
                   return;
               }
         }

           AttachRolePolicyRequest attachRequest =
               AttachRolePolicyRequest.builder()
                       .roleName(roleName)
                       .policyArn(policyArn)
                       .build();

           iam.attachRolePolicy(attachRequest);

           System.out.println("Successfully attached policy " + policyArn +
               " to role " + roleName);

        } catch (IamException e) {
               System.err.println(e.awsErrorDetails().errorMessage());
               System.exit(1);
         }

    System.out.println("Done");
   }
```

Lihat contoh lengkapnya di GitHub.

## Lepaskan kebijakan peran

Untuk melepaskan kebijakan dari peran, panggil `detachRolePolicy` metode IamClient ini, berikan nama peran dan kebijakan ARN dalam file. DetachRolePolicyRequest

Impor

```
import software.amazon.awssdk.services.iam.model.DetachRolePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void detachPolicy(IamClient iam, String roleName, String policyArn )
{

        try {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.detachRolePolicy(request);
            System.out.println("Successfully detached policy " + policyArn +
                " from role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi lain

- Ikhtisar IAM Kebijakan dalam Panduan IAM Pengguna.
- AWS Referensi Kebijakan IAM dalam Panduan IAM Pengguna.
- CreatePolicydi Referensi IAM API
- GetPolicydi Referensi IAM API

- AttachRolePolicydi Referensi IAM API
- ListAttachedRolePoliciesdi Referensi IAM API
- DetachRolePolicydi Referensi IAM API

## Bekerja dengan sertifikat IAM server

Untuk mengaktifkan koneksi HTTPS ke situs web atau aplikasi Anda AWS, Anda memerlukan sertifikat SSL/TLS server. Anda dapat menggunakan sertifikat server yang disediakan oleh AWS Certificate Manager atau yang Anda peroleh dari penyedia eksternal.

Sebaiknya gunakan ACM untuk menyediakan, mengelola, dan menyebarkan sertifikat server Anda. Dengan ACM Anda dapat meminta sertifikat, menyebarkannya ke AWS sumber daya Anda, dan membiarkan ACM menangani perpanjangan sertifikat untuk Anda. Sertifikat yang ACM disediakan oleh gratis. Untuk informasi selengkapnya ACM, lihat Panduan AWS Certificate Manager Pengguna.

### Dapatkan sertifikat server

Anda dapat mengambil sertifikat server dengan memanggil `getServerCertificate` metode, meneruskannya GetServerCertificateRequestdengan nama sertifikat. IamClient

Impor

```
import software.amazon.awssdk.services.iam.model.GetServerCertificateRequest;
import software.amazon.awssdk.services.iam.model.GetServerCertificateResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void getCertificate(IamClient iam,String certName ) {

        try {
            GetServerCertificateRequest request = GetServerCertificateRequest.builder()
                    .serverCertificateName(certName)
                    .build();

            GetServerCertificateResponse response = iam.getServerCertificate(request);
            System.out.format("Successfully retrieved certificate with body %s",
                response.serverCertificate().certificateBody());
```

```
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar sertifikat server

Untuk mencantumkan sertifikat server Anda, panggil `listServerCertificates` metode ini dengan file ListServerCertificatesRequest. IamClient Ini mengembalikan a ListServerCertificatesResponse.

Panggil `serverCertificateMetadataList` metode `ListServerCertificateResponse` objek yang dikembalikan untuk mendapatkan daftar ServerCertificateMetadataobjek yang dapat Anda gunakan untuk mendapatkan informasi tentang setiap sertifikat.

Hasil dapat terpotong; jika `isTruncated` metode `ListServerCertificateResponse` objek kembali`true`, panggil `marker` metode `ListServerCertificatesResponse` objek dan gunakan penanda untuk membuat permintaan baru. Gunakan permintaan baru untuk menelepon `listServerCertificates` lagi untuk mendapatkan kumpulan hasil berikutnya.

Impor

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListServerCertificatesRequest;
import software.amazon.awssdk.services.iam.model.ListServerCertificatesResponse;
import software.amazon.awssdk.services.iam.model.ServerCertificateMetadata;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
```

Kode

```
    public static void listCertificates(IamClient iam) {

        try {
            boolean done = false;
            String newMarker = null;
```

```
            while(!done) {
              ListServerCertificatesResponse response;

            if (newMarker == null) {
                ListServerCertificatesRequest request =
                        ListServerCertificatesRequest.builder().build();
                response = iam.listServerCertificates(request);
            } else {
                ListServerCertificatesRequest request =
                        ListServerCertificatesRequest.builder()
                                .marker(newMarker).build();
                response = iam.listServerCertificates(request);
            }

            for(ServerCertificateMetadata metadata :
                    response.serverCertificateMetadataList()) {
                System.out.printf("Retrieved server certificate %s",
                        metadata.serverCertificateName());
            }

            if(!response.isTruncated()) {
                done = true;
            } else {
                newMarker = response.marker();
            }
        }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Memperbarui sertifikat server

Anda dapat memperbarui nama atau jalur sertifikat server dengan memanggil `updateServerCertificate` metode ini. IamClient Dibutuhkan UpdateServerCertificateRequestobjek yang ditetapkan dengan nama sertifikat server saat ini dan baik nama baru atau jalur baru untuk digunakan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateServerCertificateRequest;
import software.amazon.awssdk.services.iam.model.UpdateServerCertificateResponse;
```

Kode

```
   public static void updateCertificate(IamClient iam, String curName, String newName)
{

       try {
           UpdateServerCertificateRequest request =
               UpdateServerCertificateRequest.builder()
                       .serverCertificateName(curName)
                       .newServerCertificateName(newName)
                       .build();

           UpdateServerCertificateResponse response =
               iam.updateServerCertificate(request);


           System.out.printf("Successfully updated server certificate to name %s",
               newName);

       } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
       }
    }
```

Lihat contoh lengkapnya di GitHub.

## Hapus sertifikat server

Untuk menghapus sertifikat server, panggil `deleteServerCertificate` metode dengan DeleteServerCertificateRequestberisi nama sertifikat. IamClient

Impor

```
import software.amazon.awssdk.services.iam.model.DeleteServerCertificateRequest;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
```

Kode

```
    public static void deleteCert(IamClient iam,String certName ) {

        try {
            DeleteServerCertificateRequest request =
                DeleteServerCertificateRequest.builder()
                        .serverCertificateName(certName)
                        .build();

            iam.deleteServerCertificate(request);
            System.out.println("Successfully deleted server certificate " +
                    certName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

### Informasi selengkapnya

- Bekerja dengan Sertifikat Server di Panduan IAM Pengguna
- GetServerCertificatedi Referensi IAM API
- ListServerCertificatesdi Referensi IAM API
- UpdateServerCertificatedi Referensi IAM API
- DeleteServerCertificatedi Referensi IAM API
- AWS Certificate Manager Panduan Pengguna

## Bekerja dengan Kinesis

Bagian ini memberikan contoh pemrograman Amazon Kinesismenggunakan AWS SDK untuk Java 2.x.

Untuk informasi selengkapnya Kinesis, lihat Panduan Amazon Kinesis Pengembang.

Contoh berikut hanya mencakup kode yang diperlukan untuk mendemonstrasikan setiap teknik. Kode contoh lengkap tersedia di GitHub. Dari sana, Anda dapat mengunduh satu file sumber atau mengkloning repositori secara lokal untuk mendapatkan semua contoh untuk dibangun dan dijalankan.

Topik

- Berlangganan Amazon Kinesis Data Streams

## Berlangganan Amazon Kinesis Data Streams

Contoh berikut menunjukkan cara mengambil dan memproses data dari Amazon Kinesis Data Streams menggunakan metode ini`subscribeToShard`. Kinesis Data Streams sekarang menggunakan fitur fanout yang disempurnakan dan API pengambilan data HTTP/2 latensi rendah, sehingga memudahkan pengembang untuk menjalankan beberapa aplikasi latensi rendah dan berkinerja tinggi pada Data Stream yang sama. Kinesis

### Penyiapan

Pertama, buat Kinesis klien asinkron dan objek. SubscribeToShardRequest Objek-objek ini digunakan dalam masing-masing contoh berikut untuk berlangganan Kinesis acara.

Impor

```
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.atomic.AtomicInteger;
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisAsyncClient;
import software.amazon.awssdk.services.kinesis.model.ShardIteratorType;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEvent;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEventStream;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardRequest;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponse;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponseHandler;
```

Kode

```
        Region region = Region.US_EAST_1;
        KinesisAsyncClient client = KinesisAsyncClient.builder()
        .region(region)
        .build();

        SubscribeToShardRequest request = SubscribeToShardRequest.builder()
                .consumerARN(CONSUMER_ARN)
                .shardId("arn:aws:kinesis:us-east-1:111122223333:stream/
StockTradeStream")
                .startingPosition(s -> s.type(ShardIteratorType.LATEST)).build();
```

### Gunakan antarmuka pembangun

Anda dapat menggunakan `builder` metode ini untuk menyederhanakan pembuatan. SubscribeToShardResponseHandler

Dengan menggunakan builder, Anda dapat mengatur setiap panggilan balik siklus hidup dengan panggilan metode alih-alih mengimplementasikan antarmuka lengkap.

Kode

```
   private static CompletableFuture<Void> responseHandlerBuilder(KinesisAsyncClient
 client, SubscribeToShardRequest request) {
        SubscribeToShardResponseHandler responseHandler =
 SubscribeToShardResponseHandler
                .builder()
                .onError(t -> System.err.println("Error during stream - " +
 t.getMessage()))
                .onComplete(() -> System.out.println("All records stream
 successfully"))
                // Must supply some type of subscriber
                .subscriber(e -> System.out.println("Received event - " + e))
                .build();
        return client.subscribeToShard(request, responseHandler);
    }
```

Untuk kontrol lebih lanjut dari penerbit, Anda dapat menggunakan `publisherTransformer` metode untuk menyesuaikan penerbit.

Kode

```
   private static CompletableFuture<Void>
responseHandlerBuilderPublisherTransformer(KinesisAsyncClient client,
SubscribeToShardRequest request) {
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
               .builder()
               .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
               .publisherTransformer(p -> p.filter(e -> e instanceof
SubscribeToShardEvent).limit(100))
               .subscriber(e -> System.out.println("Received event - " + e))
               .build();
       return client.subscribeToShard(request, responseHandler);
   }
```

Lihat contoh lengkapnya di GitHub.

## Gunakan handler respon kustom

Untuk kontrol penuh pelanggan dan penerbit, terapkan antarmuka. `SubscribeToShardResponseHandler`

Dalam contoh ini, Anda menerapkan `onEventStream` metode, yang memungkinkan Anda akses penuh ke penerbit. Ini menunjukkan bagaimana mengubah penerbit menjadi catatan peristiwa untuk dicetak oleh pelanggan.

Kode

```
   private static CompletableFuture<Void>
responseHandlerBuilderClassic(KinesisAsyncClient client, SubscribeToShardRequest
request) {
       SubscribeToShardResponseHandler responseHandler = new
SubscribeToShardResponseHandler() {

           @Override
           public void responseReceived(SubscribeToShardResponse response) {
               System.out.println("Receieved initial response");
           }

           @Override
           public void onEventStream(SdkPublisher<SubscribeToShardEventStream>
publisher) {
               publisher
```

```
                        // Filter to only SubscribeToShardEvents
                        .filter(SubscribeToShardEvent.class)
                        // Flat map into a publisher of just records
                        .flatMapIterable(SubscribeToShardEvent::records)
                        // Limit to 1000 total records
                        .limit(1000)
                        // Batch records into lists of 25
                        .buffer(25)
                        // Print out each record batch
                        .subscribe(batch -> System.out.println("Record Batch - " +
batch));
            }

            @Override
            public void complete() {
                System.out.println("All records stream successfully");
            }

            @Override
            public void exceptionOccurred(Throwable throwable) {
                System.err.println("Error during stream - " + throwable.getMessage());
            }
        };
        return client.subscribeToShard(request, responseHandler);
    }
```

Lihat contoh lengkapnya di GitHub.

## Gunakan antarmuka pengunjung

Anda dapat menggunakan objek Pengunjung untuk berlangganan acara tertentu yang ingin Anda tonton.

Kode

```
    private static CompletableFuture<Void>
responseHandlerBuilderVisitorBuilder(KinesisAsyncClient client,
SubscribeToShardRequest request) {
        SubscribeToShardResponseHandler.Visitor visitor =
SubscribeToShardResponseHandler.Visitor
                .builder()
                .onSubscribeToShardEvent(e -> System.out.println("Received subscribe to
shard event " + e))
```

```
                .build();
        SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
                .builder()
                .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
                .subscriber(visitor)
                .build();
        return client.subscribeToShard(request, responseHandler);
    }
```

Lihat contoh lengkapnya di GitHub.

## Gunakan pelanggan khusus

Anda juga dapat menerapkan pelanggan khusus Anda sendiri untuk berlangganan streaming.

Cuplikan kode ini menunjukkan contoh pelanggan.

Kode

```
    private static class MySubscriber implements
Subscriber<SubscribeToShardEventStream> {

        private Subscription subscription;
        private AtomicInteger eventCount = new AtomicInteger(0);

        @Override
        public void onSubscribe(Subscription subscription) {
            this.subscription = subscription;
            this.subscription.request(1);
        }

        @Override
        public void onNext(SubscribeToShardEventStream shardSubscriptionEventStream) {
            System.out.println("Received event " + shardSubscriptionEventStream);
            if (eventCount.incrementAndGet() >= 100) {
                // You can cancel the subscription at any time if you wish to stop
receiving events.
                subscription.cancel();
            }
            subscription.request(1);
        }
```

```
        @Override
        public void onError(Throwable throwable) {
            System.err.println("Error occurred while stream - " +
throwable.getMessage());
        }

        @Override
        public void onComplete() {
            System.out.println("Finished streaming all events");
        }
    }
```

Anda dapat meneruskan pelanggan kustom ke `subscribe` metode seperti yang ditunjukkan pada cuplikan kode berikut.

Kode

```
    private static CompletableFuture<Void>
responseHandlerBuilderSubscriber(KinesisAsyncClient client, SubscribeToShardRequest
request) {
        SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
                .builder()
                .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
                .subscriber(MySubscriber::new)
                .build();
        return client.subscribeToShard(request, responseHandler);
    }
```

Lihat contoh lengkapnya di GitHub.

## Menulis catatan data ke dalam aliran Kinesis data

Anda dapat menggunakan KinesisClientobjek untuk menulis catatan data ke dalam aliran Kinesis data dengan menggunakan `putRecords` metode ini. Untuk berhasil memanggil metode ini, buat PutRecordsRequestobjek. Anda meneruskan nama aliran data ke `streamName` metode. Anda juga harus meneruskan data dengan menggunakan `putRecords` metode (seperti yang ditunjukkan pada contoh kode berikut).

Impor

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;
```

Dalam contoh kode Java berikut, perhatikan bahwa StockTradeobjek digunakan sebagai data untuk menulis ke aliran Kinesis data. Sebelum menjalankan contoh ini, pastikan Anda telah membuat aliran data.

Kode

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StockTradesWriter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream to which records are
 written (for example, StockTradeStream)
                """;

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        // Ensure that the Kinesis Stream is valid.
        validateStream(kinesisClient, streamName);
        setStockData(kinesisClient, streamName);
        kinesisClient.close();
    }

    public static void setStockData(KinesisClient kinesisClient, String streamName) {
        try {
            // Repeatedly send stock trades with a 100 milliseconds wait in between.
            StockTradeGenerator stockTradeGenerator = new StockTradeGenerator();

            // Put in 50 Records for this example.
            int index = 50;
            for (int x = 0; x < index; x++) {
                StockTrade trade = stockTradeGenerator.getRandomTrade();
                sendStockTrade(trade, kinesisClient, streamName);
                Thread.sleep(100);
            }

        } catch (KinesisException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }

    private static void sendStockTrade(StockTrade trade, KinesisClient kinesisClient,
            String streamName) {
        byte[] bytes = trade.toJsonAsBytes();

        // The bytes could be null if there is an issue with the JSON serialization by
        // the Jackson JSON library.
        if (bytes == null) {
            System.out.println("Could not get JSON bytes for stock trade");
```

```
            return;
        }

        System.out.println("Putting trade: " + trade);
        PutRecordRequest request = PutRecordRequest.builder()
                .partitionKey(trade.getTickerSymbol()) // We use the ticker symbol as
 the partition key, explained in
                                                       // the Supplemental Information
 section below.
                .streamName(streamName)
                .data(SdkBytes.fromByteArray(bytes))
                .build();

        try {
            kinesisClient.putRecord(request);
        } catch (KinesisException e) {
            System.err.println(e.getMessage());
        }
    }

    private static void validateStream(KinesisClient kinesisClient, String streamName)
 {
        try {
            DescribeStreamRequest describeStreamRequest =
 DescribeStreamRequest.builder()
                    .streamName(streamName)
                    .build();

            DescribeStreamResponse describeStreamResponse =
 kinesisClient.describeStream(describeStreamRequest);

            if (!
describeStreamResponse.streamDescription().streamStatus().toString().equals("ACTIVE"))
 {
                System.err.println("Stream " + streamName + " is not active. Please
 wait a few moments and try again.");
                System.exit(1);
            }

        } catch (KinesisException e) {
            System.err.println("Error found while describing the stream " +
 streamName);
            System.err.println(e);
            System.exit(1);
```

```
        }
    }
}
```

Lihat contoh lengkapnya di GitHub.

## Gunakan pustaka pihak ketiga

Anda dapat menggunakan pustaka pihak ketiga lainnya alih-alih menerapkan pelanggan khusus. Contoh ini menunjukkan penggunaan RxJava implementasi, tetapi Anda dapat menggunakan pustaka apa pun yang mengimplementasikan antarmuka Reactive Streams. Lihat halaman RxJava wiki di Github untuk informasi lebih lanjut tentang perpustakaan itu.

Untuk menggunakan perpustakaan, tambahkan sebagai dependensi. Jika Anda menggunakan Maven, contoh menunjukkan cuplikan POM untuk digunakan.

Entri POM

```
<dependency>
 <groupId>io.reactivex.rxjava2</groupId>
 <artifactId>rxjava</artifactId>
 <version>2.2.21</version>
</dependency>
```

Impor

```
import java.net.URI;
import java.util.concurrent.CompletableFuture;

import io.reactivex.Flowable;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.async.SdkPublisher;
import software.amazon.awssdk.http.Protocol;
import software.amazon.awssdk.http.SdkHttpConfigurationOption;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisAsyncClient;
import software.amazon.awssdk.services.kinesis.model.ShardIteratorType;
import software.amazon.awssdk.services.kinesis.model.StartingPosition;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardEvent;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardRequest;
import software.amazon.awssdk.services.kinesis.model.SubscribeToShardResponseHandler;
```

```
import software.amazon.awssdk.utils.AttributeMap;
```

Contoh ini digunakan RxJava dalam metode onEventStream siklus hidup. Ini memberi Anda akses penuh ke penerbit, yang dapat digunakan untuk membuat Rx Flowable.

Kode

```
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
           .builder()
           .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
           .onEventStream(p -> Flowable.fromPublisher(p)
                                       .ofType(SubscribeToShardEvent.class)

.flatMapIterable(SubscribeToShardEvent::records)
                                       .limit(1000)
                                       .buffer(25)
                                       .subscribe(e -> System.out.println("Record
batch = " + e)))
           .build();
```

Anda juga dapat menggunakan publisherTransformer metode ini dengan Flowable penerbit. Anda harus menyesuaikan Flowable penerbit dengan SdkPublisher, seperti yang ditunjukkan pada contoh berikut.

Kode

```
       SubscribeToShardResponseHandler responseHandler =
SubscribeToShardResponseHandler
           .builder()
           .onError(t -> System.err.println("Error during stream - " +
t.getMessage()))
           .publisherTransformer(p ->
SdkPublisher.adapt(Flowable.fromPublisher(p).limit(100)))
           .build();
```

Lihat contoh lengkapnya di GitHub.

## Informasi lain

- SubscribeToShardEventdi Referensi Amazon Kinesis API

- SubscribeToShardd di Referensi Amazon Kinesis API

# Memanggil, membuat daftar, dan menghapus fungsi AWS Lambda

Bagian ini memberikan contoh pemrograman dengan klien Lambda layanan dengan menggunakan AWS SDK untuk Java 2.x.

Topik

- Memanggil fungsi Lambda
- Daftar fungsi Lambda
- Hapus fungsi Lambda

## Memanggil fungsi Lambda

Anda dapat memanggil Lambda fungsi dengan membuat `LambdaClient`objek dan menjalankan metodenya`invoke`. Buat `InvokeRequest`objek untuk menentukan informasi tambahan seperti nama fungsi dan payload untuk diteruskan ke Lambda fungsi. Nama fungsi muncul sebagai arn:aws:lambda:us-east - 1:123456789012: function:. HelloFunction Anda dapat mengambil nilai dengan melihat fungsi di. Konsol Manajemen AWS

Untuk meneruskan data payload ke suatu fungsi, buat `SdkBytes`objek yang berisi informasi. Misalnya, dalam contoh kode berikut, perhatikan data JSON diteruskan ke Lambda fungsi.

Impor

```
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.model.InvokeRequest;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.lambda.model.InvokeResponse;
import software.amazon.awssdk.services.lambda.model.LambdaException;
```

Kode

Contoh kode berikut menunjukkan bagaimana untuk memanggil fungsi. Lambda

```
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {
```

```
         InvokeResponse res = null ;
        try {
            //Need a SdkBytes instance for the payload
            String json = "{\"Hello \":\"Paris\"}";
            SdkBytes payload = SdkBytes.fromUtf8String(json) ;

            //Setup an InvokeRequest
            InvokeRequest request = InvokeRequest.builder()
                    .functionName(functionName)
                    .payload(payload)
                    .build();

            res = awsLambda.invoke(request);
            String value = res.payload().asUtf8String() ;
            System.out.println(value);

        } catch(LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Daftar fungsi Lambda

Bangun `Lambda Client` objek dan panggil `listFunctions` metodenya. Metode ini mengembalikan `ListFunctionsResponse`objek. Anda dapat memanggil `functions` metode objek ini untuk mengembalikan daftar `FunctionConfiguration`objek. Anda dapat mengulangi melalui daftar untuk mengambil informasi tentang fungsi. Misalnya, contoh kode Java berikut menunjukkan cara mendapatkan setiap nama fungsi.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.services.lambda.model.LambdaException;
import software.amazon.awssdk.services.lambda.model.ListFunctionsResponse;
import software.amazon.awssdk.services.lambda.model.FunctionConfiguration;
import java.util.List;
```

Kode

Contoh kode Java berikut menunjukkan bagaimana untuk mengambil daftar nama fungsi.

```
    public static void listFunctions(LambdaClient awsLambda) {

        try {
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();

            for (FunctionConfiguration config: list) {
                System.out.println("The function name is "+config.functionName());
            }

        } catch(LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Hapus fungsi Lambda

Bangun `LambdaClient`objek dan panggil `deleteFunction` metodenya. Buat `DeleteFunctionRequest`objek dan berikan ke `deleteFunction` metode. Objek ini berisi informasi seperti nama fungsi yang akan dihapus. Nama fungsi muncul sebagai arn:aws:lambda:us-east - 1:123456789012: function:. HelloFunction Anda dapat mengambil nilai dengan melihat fungsi di. Konsol Manajemen AWS

Impor

```
import software.amazon.awssdk.services.lambda.LambdaClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.lambda.model.DeleteFunctionRequest;
import software.amazon.awssdk.services.lambda.model.LambdaException;
```

Kode

Kode Java berikut menunjukkan cara menghapus Lambda fungsi.

```
    public static void deleteLambdaFunction(LambdaClient awsLambda, String
 functionName ) {
        try {
```

```
            DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                    .functionName(functionName)
                    .build();

            awsLambda.deleteFunction(request);
            System.out.println("The "+functionName +" function was deleted");

        } catch(LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

# Bekerja dengan Amazon S3

Bagian ini memberikan informasi latar belakang untuk bekerja dengan Amazon S3 dengan menggunakan file. AWS SDK for Java 2.x Bagian ini melengkapi contoh Amazon S3 Java v2 yang disajikan di bagian Contoh kode panduan ini.

## Klien S3 di AWS SDK for Java 2.x

AWS SDK for Java 2.x Menyediakan berbagai jenis klien S3. Tabel berikut menunjukkan perbedaan dan dapat membantu Anda memutuskan apa yang terbaik untuk kasus penggunaan Anda.

Rasa yang berbeda dari klien Amazon S3

| Klien S3 | Deskripsi singkat | Kapan harus digunakan | Batasan/kelemahan |
|---|---|---|---|
| AWS Klien S3 berbasis CRT<br><br>Antarmuka: S3 AsyncClient<br><br>Pembangun: S3 CrtAsyncClientBuilder | • Menyediakan operasi API asinkron yang sama dengan klien asinkron S3 berbasis Java tetapi dengan kinerja yang lebih baik. | • Aplikasi Anda mentransfer objek besar (> 8MB) dan Anda ingin memaksimalkan kinerja.<br>• Anda ingin mengunggah objek dengan panjang | • Mendukung pengaturan konfigurasi yang lebih sedikit daripada klien S3 berbasis Java.<br>• Membutuhkan ketergantungan tambahan. |

| Klien S3 | Deskripsi singkat | Kapan harus digunakan | Batasan/kelemahan |
| --- | --- | --- | --- |
| | • Membutuhkan `aws-crt` ketergantungan.<br>• Mendukung transfer paralel otomatis (multipart).<br><br>Lihat the section called “Gunakan klien S3 yang berkinerja”. | konten yang tidak diketahui.<br>• Anda ingin meningkatkan penyatuan koneksi dan penyeimbangan beban DNS, yang meningkatkan throughput dan kinerja.<br>• Anda ingin meningkatkan keandalan transfer jika terjadi kegagalan jaringan. Masing-masing bagian yang gagal dicoba ulang tanpa memulai ulang transfer dari awal. | |

| Klien S3 | Deskripsi singkat | Kapan harus digunakan | Batasan/kelemahan |
| --- | --- | --- | --- |
| Klien asinkron S3 berbasis Java dengan multipart diaktifkan<br><br>Antarmuka: S3 AsyncClient<br><br>Pembangun: S3 AsyncClientBuilder | • Menyediakan API asinkron.<br>• Mendukung transfer paralel otomatis (multipart) saat Anda mengaktif kan multipart pada waktu pembuatan.<br><br>Lihat the section called “Konfigurasikan dukungan transfer paralel”. | • Aplikasi Anda mentransfer objek besar dan Anda ingin meningkatkan kinerja.<br>• Anda ingin mengunggah objek dengan panjang konten yang tidak diketahui.<br>• Anda ingin meningkat kan keandalan transfer jika terjadi kegagalan jaringan. Masing-masing bagian yang gagal dicoba ulang tanpa memulai ulang transfer dari awal.<br>• Anda memerluka n opsi konfigurasi yang tidak tersedia dengan klien S3 AWS berbasis CRT. | Kinerja kurang dari klien S3 AWS berbasis CRT. |

| Klien S3 | Deskripsi singkat | Kapan harus digunakan | Batasan/kelemahan |
| --- | --- | --- | --- |
| Klien asinkron S3 berbasis Java tanpa multipart diaktifkan<br><br>Antarmuka: S3 AsyncClient<br><br>Pembangun: S3 AsyncClientBuilder | • Menyediakan API asinkron. | • Anda mentransfer objek yang kurang dari 8MB.<br>• Anda menginginkan API asinkron. | Tidak ada optimasi kinerja. |
| Klien sinkronisasi S3 berbasis Java<br><br>Antarmuka: S3Client<br><br>Pembangun: S3 ClientBuilder | • Menyediakan API sinkron. | • Anda mentransfer objek yang kurang dari 8MB.<br>• Anda menginginkan API sinkron. | Tidak ada optimasi kinerja. |

**Note**

Dari versi 2.18.x dan seterusnya, AWS SDK for Java 2.x menggunakan pengalamatan bergaya host virtual saat menyertakan penggantian titik akhir. Ini berlaku selama nama bucket adalah label DNS yang valid.
Panggil `forcePathStyle`metode dengan `true` pembuat klien Anda untuk memaksa klien menggunakan pengalamatan gaya jalur untuk bucket.
Contoh berikut menunjukkan klien layanan yang dikonfigurasi dengan penggantian titik akhir dan menggunakan pengalamatan gaya jalur.

```
S3Client client = S3Client.builder()
                          .region(Region.US_WEST_2)
                          .endpointOverride(URI.create("https://s3.us-
west-2.amazonaws.com"))
                          .forcePathStyle(true)
                          .build();
```

Topik


- Mengunggah streaming ke Amazon S3 menggunakan AWS SDK for Java 2.x
- Bekerja dengan Amazon S3 pra-ditandatangani URLs
- Akses Lintas Wilayah untuk Amazon S3
- Perlindungan integritas data dengan checksum
- Gunakan klien S3 berkinerja: klien S3 berbasis AWS CRT
- Konfigurasikan klien async S3 berbasis Java untuk menggunakan transfer paralel
- Transfer file dan direktori dengan Amazon S3 Transfer Manager
- Bekerja dengan Pemberitahuan Acara S3


# Mengunggah streaming ke Amazon S3 menggunakan AWS SDK for Java 2.x

Saat Anda menggunakan streaming untuk mengunggah konten ke S3 menggunakan `putObject`atau `uploadPart`, Anda menggunakan kelas `RequestBody` pabrik untuk API sinkron untuk memasok aliran. Untuk API asinkron, `AsyncRequestBody` ini adalah kelas pabrik yang setara.

## Metode mana yang mengunggah aliran?

Untuk API sinkron, Anda dapat menggunakan metode pabrik berikut `RequestBody` untuk memasok aliran:

- `fromInputStream(InputStream inputStream, long contentLength)`

  `fromContentProvider(ContentStreamProvider provider, long contentLength, String mimeType)`

  - `ContentStreamProvider`Memiliki metode `fromInputStream(InputStream inputStream)` pabrik
- `fromContentProvider(ContentStreamProvider provider, String mimeType)`

Untuk API asinkron, Anda dapat menggunakan metode pabrik berikut: `AsyncRequestBody`

- `fromInputStream(InputStream inputStream, Long contentLength, ExecutorService executor)`

- `fromInputStream(AsyncRequestBodyFromInputStreamConfiguration configuration)`
  - Anda menggunakan AsyncRequestBodyFromInputStreamConfiguration .Builder untuk memasok aliran
- `fromInputStream(Consumer<AsyncRequestBodyFromInputStreamConfiguration.Builder> configuration)`
- `forBlockingInputStream(Long contentLength)`
  - Hasilnya `BlockingInputStreamAsyncRequestBody` berisi metode `writeInputStream(InputStream inputStream)` yang dapat Anda gunakan untuk menyediakan aliran

## Melakukan upload

Jika Anda tahu panjang aliran

Seperti yang Anda lihat dari tanda tangan metode yang ditunjukkan sebelumnya, sebagian besar metode menerima parameter panjang konten.

Jika Anda mengetahui panjang konten dalam byte, berikan nilai yang tepat:

```
// Always provide the exact content length when it's available.
long contentLength = 1024; // Exact size in bytes.
s3Client.putObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"),
RequestBody.fromInputStream(inputStream, contentLength));
```

> **Warning**
>
> Saat mengunggah dari aliran input, jika panjang konten yang ditentukan tidak sesuai dengan jumlah byte yang sebenarnya, Anda mungkin mengalami:
>
> - Objek terpotong jika panjang yang Anda tentukan terlalu kecil
> - Gagal mengunggah atau menggantung koneksi jika panjang yang Anda tentukan terlalu besar

Jika Anda tidak tahu panjang aliran

Menggunakan API sinkron

Gunakan`fromContentProvider(ContentStreamProvider provider, String mimeType)`:

```
public PutObjectResponse syncClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3Client s3Client = S3Client.create();

    RequestBody body =
 RequestBody.fromContentProvider(ContentStreamProvider.fromInputStream(inputStream),
 "text/plain");
    PutObjectResponse putObjectResponse = s3Client.putObject(b ->
 b.bucket(BUCKET_NAME).key(KEY_NAME), body);
    return putObjectResponse;
}
```

Karena SDK menyangga seluruh aliran dalam memori untuk menghitung panjang konten, Anda dapat mengalami masalah memori dengan aliran besar. Jika Anda perlu mengunggah aliran besar dengan klien sinkron, pertimbangkan untuk menggunakan API multibagian:

Unggah aliran menggunakan API klien sinkron dan API multibagian

```
public static void uploadStreamToS3(String bucketName, String key, InputStream
 inputStream) {
    // Create S3 client
    S3Client s3Client = S3Client.create();
    try {
        // Step 1: Initiate the multipart upload
        CreateMultipartUploadRequest createMultipartUploadRequest =
 CreateMultipartUploadRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        CreateMultipartUploadResponse createResponse =
 s3Client.createMultipartUpload(createMultipartUploadRequest);
        String uploadId = createResponse.uploadId();
        System.out.println("Started multipart upload with ID: " + uploadId);
```

```
        // Step 2: Upload parts
        List<CompletedPart> completedParts = new ArrayList<>();
        int partNumber = 1;
        byte[] buffer = new byte[PART_SIZE];
        int bytesRead;

        try {
            while ((bytesRead = readFullyOrToEnd(inputStream, buffer)) > 0) {
                // Create request to upload a part
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                        .bucket(bucketName)
                        .key(key)
                        .uploadId(uploadId)
                        .partNumber(partNumber)
                        .build();

                // If we didn't read a full buffer, create a properly sized byte array
                RequestBody requestBody;
                if (bytesRead < PART_SIZE) {
                    byte[] lastPartBuffer = new byte[bytesRead];
                    System.arraycopy(buffer, 0, lastPartBuffer, 0, bytesRead);
                    requestBody = RequestBody.fromBytes(lastPartBuffer);
                } else {
                    requestBody = RequestBody.fromBytes(buffer);
                }

                // Upload the part and save the response's ETag
                UploadPartResponse uploadPartResponse =
s3Client.uploadPart(uploadPartRequest, requestBody);
                CompletedPart part = CompletedPart.builder()
                        .partNumber(partNumber)
                        .eTag(uploadPartResponse.eTag())
                        .build();
                completedParts.add(part);

                System.out.println("Uploaded part " + partNumber + " with size " +
bytesRead + " bytes");
                partNumber++;
            }

            // Step 3: Complete the multipart upload
            CompletedMultipartUpload completedMultipartUpload =
CompletedMultipartUpload.builder()
                    .parts(completedParts)
```

```
                    .build();

            CompleteMultipartUploadRequest completeRequest =
 CompleteMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .multipartUpload(completedMultipartUpload)
                    .build();

            CompleteMultipartUploadResponse completeResponse =
 s3Client.completeMultipartUpload(completeRequest);
            System.out.println("Multipart upload completed. Object URL: " +
 completeResponse.location());

        } catch (Exception e) {
            // If an error occurs, abort the multipart upload
            System.err.println("Error during multipart upload: " + e.getMessage());
            AbortMultipartUploadRequest abortRequest =
 AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .build();
            s3Client.abortMultipartUpload(abortRequest);
            System.err.println("Multipart upload aborted");
        } finally {
            try {
                inputStream.close();
            } catch (IOException e) {
                System.err.println("Error closing input stream: " + e.getMessage());
            }
        }
    } finally {
        s3Client.close();
    }
}

/**
 * Reads from the input stream into the buffer, attempting to fill the buffer
 completely
 * or until the end of the stream is reached.
 *
 * @param inputStream the input stream to read from
```

```
 * @param buffer      the buffer to fill
 * @return the number of bytes read, or -1 if the end of the stream is reached before
 any bytes are read
 * @throws IOException if an I/O error occurs
 */
private static int readFullyOrToEnd(InputStream inputStream, byte[] buffer) throws
 IOException {
    int totalBytesRead = 0;
    int bytesRead;

    while (totalBytesRead < buffer.length) {
        bytesRead = inputStream.read(buffer, totalBytesRead, buffer.length -
 totalBytesRead);
        if (bytesRead == -1) {
            break; // End of stream
        }
        totalBytesRead += bytesRead;
    }

    return totalBytesRead > 0 ? totalBytesRead : -1;
}
```

> **Note**
>
> Untuk sebagian besar kasus penggunaan, sebaiknya gunakan API klien asinkron untuk aliran dengan ukuran yang tidak diketahui. Pendekatan ini memungkinkan transfer paralel dan menawarkan antarmuka pemrograman yang lebih sederhana, karena SDK menangani segmentasi aliran menjadi potongan multibagian jika alirannya besar.
> Baik klien asinkron S3 standar dengan multipart diaktifkan dan klien S3 berbasis AWS CRT menerapkan pendekatan ini. Kami menunjukkan contoh pendekatan ini di bagian berikut.

### Menggunakan API asinkron

Anda dapat memberikan `null` `contentLength` argumen untuk `fromInputStream(InputStream inputStream, Long contentLength, ExecutorService executor)`

Example menggunakan klien AWS asinkron berbasis CRT:

```
public PutObjectResponse crtClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);  // 'null' indicates that the

     // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null){
                            logger.error(e.getMessage(), e);
                        }
                        return null;
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Example menggunakan klien asinkron standar dengan multipart diaktifkan:

```
public PutObjectResponse asyncClient_multipart_stream_unknown_size(String bucketName,
 String key, InputStream inputStream) {

    S3AsyncClient s3AsyncClient =
 S3AsyncClient.builder().multipartEnabled(true).build();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor); // 'null' indicates that the

    // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null) {
                            logger.error(e.getMessage(), e);
                        }
```

```
                        return null;
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

## Bekerja dengan Amazon S3 pra-ditandatangani URLs

Pra-ditandatangani URLs menyediakan akses sementara ke objek S3 pribadi tanpa mengharuskan pengguna memiliki AWS kredensi atau izin.

Misalnya, asumsikan Alice memiliki akses ke objek S3, dan dia ingin sementara berbagi akses ke objek itu dengan Bob. Alice dapat membuat permintaan GET yang telah ditandatangani sebelumnya untuk dibagikan dengan Bob sehingga ia dapat mengunduh objek tanpa memerlukan akses ke kredensi Alice. Anda dapat membuat pra-ditandatangani URLs untuk HTTP GET dan untuk permintaan HTTP PUT.

### Buat URL yang telah ditandatangani sebelumnya untuk suatu objek, lalu unduh (GET request)

Contoh berikut terdiri dari dua bagian.

- Bagian 1: Alice menghasilkan URL yang telah ditandatangani sebelumnya untuk suatu objek.
- Bagian 2: Bob mengunduh objek dengan menggunakan URL yang telah ditandatangani sebelumnya.

Bagian 1: Menghasilkan URL

Alice sudah memiliki objek di ember S3. Dia menggunakan kode berikut untuk menghasilkan string URL yang dapat digunakan Bob dalam permintaan GET berikutnya.

Impor

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
```

```
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.utils.IoUtils;

import java.io.ByteArrayOutputStream;
import java.io.File;
import java.io.IOException;
import java.io.InputStream;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.UUID;
```

```
    /* Create a pre-signed URL to download an object in a subsequent GET request. */
    public String createPresignedGetUrl(String bucketName, String keyName) {
        try (S3Presigner presigner = S3Presigner.create()) {

            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .bucket(bucketName)
                    .key(keyName)
                    .build();

            GetObjectPresignRequest presignRequest = GetObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL will expire
in 10 minutes.
                    .getObjectRequest(objectRequest)
                    .build();

            PresignedGetObjectRequest presignedRequest =
presigner.presignGetObject(presignRequest);
            logger.info("Presigned URL: [{}]", presignedRequest.url().toString());
```

```
            logger.info("HTTP method: [{}]", presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Bagian 2: Unduh objek

Bob menggunakan salah satu dari tiga opsi kode berikut untuk mengunduh objek. Atau, dia bisa menggunakan browser untuk melakukan permintaan GET.

Gunakan JDK **`HttpURLConnection`** (sejak v1.1)

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the download. */
    public byte[] useHttpUrlConnectionToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.

        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setRequestMethod("GET");
            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                IoUtils.copy(content, byteArrayOutputStream);
            }
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Gunakan JDK **`HttpClient`** (sejak v11)

```
    /* Use the JDK HttpClient (since v11) class to do the download. */
    public byte[] useHttpClientToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
```

```
        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpResponse<InputStream> response = httpClient.send(requestBuilder
                            .uri(presignedUrl.toURI())
                            .GET()
                            .build(),
                    HttpResponse.BodyHandlers.ofInputStream());

            IoUtils.copy(response.body(), byteArrayOutputStream);

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Gunakan **`SdkHttpClient`** dari SDK for Java

```
    /* Use the AWS SDK for Java SdkHttpClient class to do the download. */
    public byte[] useSdkHttpClientToGet(String presignedUrlString) {

        ByteArrayOutputStream byteArrayOutputStream = new ByteArrayOutputStream(); //
Capture the response body to a byte array.
        try {
            URL presignedUrl = new URL(presignedUrlString);
            SdkHttpRequest request = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.GET)
                    .uri(presignedUrl.toURI())
                    .build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                response.responseBody().ifPresentOrElse(
                        abortableInputStream -> {
                            try {
```

```
                                IoUtils.copy(abortableInputStream,
byteArrayOutputStream);
                            } catch (IOException e) {
                                throw new RuntimeException(e);
                            }
                        },
                        () -> logger.error("No response body."));

                logger.info("HTTP Response code is {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Lihat contoh lengkapnya dan uji GitHub.

## Buat URL yang telah ditandatangani sebelumnya untuk unggahan, lalu unggah file (permintaan PUT)

Contoh berikut terdiri dari dua bagian.

- Bagian 1: Alice menghasilkan URL yang telah ditandatangani sebelumnya untuk mengunggah objek.
- Bagian 2: Bob mengunggah file dengan menggunakan URL yang telah ditandatangani sebelumnya.

### Bagian 1: Menghasilkan URL

Alice sudah memiliki ember S3. Dia menggunakan kode berikut untuk menghasilkan string URL yang dapat digunakan Bob dalam permintaan PUT berikutnya.

Impor

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
```

```
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
import java.io.OutputStream;
import java.io.RandomAccessFile;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.ByteBuffer;
import java.nio.channels.FileChannel;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

```
   /* Create a presigned URL to use in a subsequent PUT request */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> metadata) {
       try (S3Presigner presigner = S3Presigner.create()) {

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
                   .metadata(metadata)
                   .build();

           PutObjectPresignRequest presignRequest = PutObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10))  // The URL expires in
10 minutes.
```

```
                    .putObjectRequest(objectRequest)
                    .build();


            PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
            String myURL = presignedRequest.url().toString();
            logger.info("Presigned URL to upload a file to: [{}]", myURL);
            logger.info("HTTP method: [{}]", presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Bagian 2: Unggah objek file

Bob menggunakan salah satu dari tiga opsi kode berikut untuk mengunggah file.

Gunakan JDK **`HttpURLConnection`** (sejak v1.1)

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the upload. */
    public void useHttpUrlConnectionToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setDoOutput(true);
            metadata.forEach((k, v) -> connection.setRequestProperty("x-amz-meta-" + k,
v));
            connection.setRequestMethod("PUT");
            OutputStream out = connection.getOutputStream();

            try (RandomAccessFile file = new RandomAccessFile(fileToPut, "r");
                 FileChannel inChannel = file.getChannel()) {
                ByteBuffer buffer = ByteBuffer.allocate(8192); //Buffer size is 8k

                while (inChannel.read(buffer) > 0) {
                    buffer.flip();
                    for (int i = 0; i < buffer.limit(); i++) {
                        out.write(buffer.get());
                    }
                    buffer.clear();
```

```
            }
        } catch (IOException e) {
            logger.error(e.getMessage(), e);
        }

        out.close();
        connection.getResponseCode();
        logger.info("HTTP response code is " + connection.getResponseCode());

    } catch (S3Exception | IOException e) {
        logger.error(e.getMessage(), e);
    }
}
```

### Gunakan JDK **`HttpClient`** (sejak v11)

```
   /* Use the JDK HttpClient (since v11) class to do the upload. */
   public void useHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
       logger.info("Begin [{}] upload", fileToPut.toString());

       HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
       metadata.forEach((k, v) -> requestBuilder.header("x-amz-meta-" + k, v));

       HttpClient httpClient = HttpClient.newHttpClient();
       try {
           final HttpResponse<Void> response = httpClient.send(requestBuilder
                           .uri(new URL(presignedUrlString).toURI())

.PUT(HttpRequest.BodyPublishers.ofFile(Path.of(fileToPut.toURI())))
                           .build(),
                   HttpResponse.BodyHandlers.discarding());

           logger.info("HTTP response code is " + response.statusCode());

       } catch (URISyntaxException | InterruptedException | IOException e) {
           logger.error(e.getMessage(), e);
       }
   }
```

### Gunakan **`SdkHttpClient`** dari SDK for Java

```
   /* Use the AWS SDK for Java V2 SdkHttpClient class to do the upload. */
```

```
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        try {
            URL presignedUrl = new URL(presignedUrlString);

            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.PUT)
                    .uri(presignedUrl.toURI());
            // Add headers
            metadata.forEach((k, v) -> requestBuilder.putHeader("x-amz-meta-" + k, v));
            // Finish building the request.
            SdkHttpRequest request = requestBuilder.build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}", response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Lihat contoh lengkapnya dan uji GitHub.

## Akses Lintas Wilayah untuk Amazon S3

Saat Anda bekerja dengan bucket Amazon Simple Storage Service (Amazon S3), Anda biasanya tahu Wilayah AWS bucket tersebut. Wilayah tempat Anda bekerja ditentukan saat Anda membuat klien S3.

Namun, terkadang Anda mungkin perlu bekerja dengan bucket tertentu, tetapi Anda tidak tahu apakah itu terletak di Wilayah yang sama yang ditetapkan untuk klien S3.

Alih-alih melakukan lebih banyak panggilan untuk menentukan Wilayah bucket, Anda dapat menggunakan SDK untuk mengaktifkan akses ke bucket S3 di berbagai Wilayah.

## Pengaturan

Support untuk akses lintas wilayah tersedia dengan `2.20.111` versi SDK. Gunakan versi ini atau yang lebih baru di file build Maven Anda untuk `s3` ketergantungan seperti yang ditunjukkan pada cuplikan berikut.

```
<dependency>
  <groupId>software.amazon.awssdk</groupId>
  <artifactId>s3</artifactId>
  <version>2.27.21</version>
</dependency>
```

Selanjutnya, saat Anda membuat klien S3, aktifkan akses lintas wilayah seperti yang ditunjukkan pada cuplikan. Secara default, akses tidak diaktifkan.

```
S3AsyncClient client = S3AsyncClient.builder()
                                    .crossRegionAccessEnabled(true)
                                    .build();
```

## Bagaimana SDK menyediakan akses Lintas wilayah

Saat Anda mereferensikan bucket yang ada dalam permintaan, seperti saat Anda menggunakan `putObject` metode, SDK akan memulai permintaan ke Wilayah yang dikonfigurasi untuk klien.

Jika bucket tidak ada di Region tertentu, respons kesalahan menyertakan Region sebenarnya tempat bucket berada. SDK kemudian menggunakan Region yang benar dalam permintaan kedua.

Untuk mengoptimalkan permintaan future ke bucket yang sama, SDK menyimpan pemetaan Region ini di klien.

## Pertimbangan

Saat Anda mengaktifkan akses bucket lintas wilayah, ketahuilah bahwa panggilan API pertama dapat meningkatkan latensi jika bucket tidak berada di Region yang dikonfigurasi klien. Namun, panggilan berikutnya mendapat manfaat dari informasi Wilayah yang di-cache, menghasilkan peningkatan kinerja.

Saat Anda mengaktifkan akses lintas wilayah, akses ke bucket tidak terpengaruh. Pengguna harus diberi wewenang untuk mengakses bucket di Wilayah mana pun tempat tinggalnya.

## Perlindungan integritas data dengan checksum

Amazon Simple Storage Service (Amazon S3) menyediakan kemampuan untuk menentukan checksum saat Anda mengunggah objek. Ketika Anda menentukan checksum, itu disimpan dengan objek dan dapat divalidasi ketika objek diunduh.

Checksum menyediakan lapisan integritas data tambahan saat Anda mentransfer file. Dengan checksum, Anda dapat memverifikasi konsistensi data dengan mengonfirmasi bahwa file yang diterima cocok dengan file asli. Untuk informasi selengkapnya tentang checksum dengan Amazon S3, lihat Panduan Pengguna Layanan Penyimpanan Sederhana Amazon termasuk algoritme yang didukung.

Anda memiliki fleksibilitas untuk memilih algoritma yang paling sesuai dengan kebutuhan Anda dan membiarkan SDK menghitung checksum. Atau, Anda dapat memberikan nilai checksum yang telah dihitung sebelumnya dengan menggunakan salah satu algoritme yang didukung.

> **Note**
>
> Dimulai dengan versi 2.30.0 AWS SDK for Java 2.x, SDK menyediakan perlindungan integritas default dengan menghitung checksum secara otomatis untuk unggahan. `CRC32` SDK menghitung checksum ini jika Anda tidak memberikan nilai checksum yang telah dihitung sebelumnya atau jika Anda tidak menentukan algoritme yang harus digunakan SDK untuk menghitung checksum.
>
> SDK juga menyediakan pengaturan global untuk perlindungan integritas data yang dapat Anda atur secara eksternal, yang dapat Anda baca di Panduan Referensi Alat AWS SDKs dan Alat.

Kami membahas checksum dalam dua fase permintaan: mengunggah objek dan mengunduh objek.

### Mengunggah objek

Saat Anda mengunggah objek dengan `putObject` metode dan menyediakan algoritma checksum, SDK menghitung checksum untuk algoritme yang ditentukan.

Cuplikan kode berikut menunjukkan permintaan untuk mengunggah objek dengan checksum. `SHA256` Ketika SDK mengirim permintaan, ia menghitung `SHA256` checksum dan mengunggah

objek. Amazon S3 memvalidasi integritas konten dengan menghitung checksum dan membandingkannya dengan checksum yang disediakan oleh SDK. Amazon S3 kemudian menyimpan checksum dengan objek.

```
public void putObjectWithChecksum() {
        s3Client.putObject(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.SHA256),
            RequestBody.fromString("This is a test"));
}
```

Jika Anda tidak menyediakan algoritma checksum dengan permintaan, perilaku checksum bervariasi tergantung pada versi SDK yang Anda gunakan seperti yang ditunjukkan pada tabel berikut.

Perilaku checksum ketika tidak ada algoritma checksum yang disediakan

| Versi Java SDK | Perilaku checksum |
| --- | --- |
| lebih awal dari 2.30.0 | SDK tidak secara otomatis menghitung checksum berbasis CRC dan menyediakannya dalam permintaan. |
| 2.30.0 atau yang lebih baru | SDK menggunakan `CRC32` algoritma untuk menghitung checksum dan menyediakannya dalam permintaan. Amazon S3 memvalida si integritas transfer dengan menghitung checksumnya sendiri dan membandingkannya dengan `CRC32` checksum yang disediakan oleh SDK. Jika checksum cocok, checksum disimpan dengan objek. |

Gunakan nilai checksum yang telah dihitung sebelumnya

Nilai checksum yang telah dihitung sebelumnya yang disertakan dengan permintaan menonaktifkan komputasi otomatis oleh SDK dan menggunakan nilai yang disediakan sebagai gantinya.

Contoh berikut menunjukkan permintaan dengan SHA256 checksum yang telah dihitung sebelumnya.

```
    public void putObjectWithPrecalculatedChecksum(String filePath) {
        String checksum = calculateChecksum(filePath, "SHA-256");

        s3Client.putObject((b -> b
                .bucket(bucketName)
                .key(key)
                .checksumSHA256(checksum)),
            RequestBody.fromFile(Paths.get(filePath)));
    }
```

Jika Amazon S3 menentukan nilai checksum salah untuk algoritme yang ditentukan, layanan akan mengembalikan respons kesalahan.

Unggahan multipart

Anda juga dapat menggunakan checksum dengan unggahan multipart.

SDK for Java 2.x menyediakan dua opsi untuk menggunakan checksum dengan unggahan multipart. Opsi pertama menggunakan`S3TransferManager`.

Contoh manajer transfer berikut menentukan SHA1 algoritma untuk upload.

```
    public void multipartUploadWithChecksumTm(String filePath) {
        S3TransferManager transferManager = S3TransferManager.create();
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.SHA1))
            .source(Paths.get(filePath))
            .build();
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
        fileUpload.completionFuture().join();
        transferManager.close();
    }
```

Jika Anda tidak menyediakan algoritma checksum saat menggunakan manajer transfer untuk upload, SDK secara otomatis menghitung dan checksum berdasarkan algoritma. `CRC32` SDK melakukan perhitungan ini untuk semua versi SDK.

Opsi kedua menggunakan [`S3ClientAPI (atau S3AsyncClientAPI`]) untuk melakukan pengunggahan multibagian. Jika Anda menentukan checksum dengan pendekatan ini, Anda harus

menentukan algoritma yang akan digunakan pada inisiasi unggahan. Anda juga harus menentukan algoritma untuk setiap permintaan bagian dan memberikan checksum yang dihitung untuk setiap bagian setelah diunggah.

```
    public void multipartUploadWithChecksumS3Client(String filePath) {
        ChecksumAlgorithm algorithm = ChecksumAlgorithm.CRC32;

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumAlgorithm(algorithm)); // Checksum specified on initiation.
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .checksumAlgorithm(algorithm) // Checksum specified on each part.
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
```

```
                    .checksumCRC32(partResponse.checksumCRC32()) // Provide the
calculated checksum.
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            System.err.println(e.getMessage());
        }

        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

Kode untuk contoh dan tes lengkap ada di repositori contoh GitHub kode.

## Unduh objek

Saat Anda menggunakan metode getObject untuk mengunduh objek, SDK secara otomatis memvalidasi checksum nilai kuncinya. `ChecksumMode enabled` ketika `checksumMode` metode pembangun untuk `GetObjectRequest` diatur ke`ChecksumMode.ENABLED`.

Permintaan dalam cuplikan berikut mengarahkan SDK untuk memvalidasi checksum dalam respons dengan menghitung checksum dan membandingkan nilainya.

```
    public GetObjectResponse getObjectWithChecksum() {
        return s3Client.getObject(b -> b
                        .bucket(bucketName)
                        .key(key)
                        .checksumMode(ChecksumMode.ENABLED))
                .response();
    }
```

> **Note**
>
> Jika objek tidak diunggah dengan checksum, tidak ada validasi yang terjadi.

## Opsi perhitungan checksum lainnya

> **Note**
>
> Untuk memverifikasi integritas data data yang ditransmisikan dan untuk mengidentifikasi kesalahan transmisi, kami mendorong pengguna untuk menjaga pengaturan default SDK untuk opsi perhitungan checksum. Secara default, SDK menambahkan pemeriksaan penting ini untuk banyak operasi S3 termasuk `PutObject` dan. `GetObject`

Namun, jika penggunaan Amazon S3 memerlukan validasi checksum minimal, Anda dapat menonaktifkan banyak pemeriksaan dengan mengubah pengaturan konfigurasi default.

Nonaktifkan perhitungan checksum otomatis kecuali diperlukan

Anda dapat menonaktifkan perhitungan checksum otomatis oleh SDK untuk operasi yang mendukungnya, misalnya `PutObject` dan. `GetObject` Beberapa operasi S3, bagaimanapun, memerlukan perhitungan checksum; Anda tidak dapat menonaktifkan perhitungan checksum untuk operasi ini.

SDK menyediakan pengaturan terpisah untuk perhitungan checksum untuk muatan permintaan dan untuk muatan respons.

Daftar berikut menjelaskan pengaturan yang dapat Anda gunakan untuk meminimalkan perhitungan checksum pada cakupan yang berbeda.

- Semua ruang lingkup aplikasi —Dengan mengubah pengaturan dalam variabel lingkungan atau dalam profil di bersama AWS `config` dan `credentials` file, semua aplikasi dapat menggunakan pengaturan ini. Pengaturan ini memengaruhi semua klien layanan di semua aplikasi AWS SDK kecuali diganti pada cakupan klien aplikasi atau layanan.
  - Tambahkan pengaturan di profil:

```
[default]
request_checksum_calculation = WHEN_REQUIRED
```

```
response_checksum_validation = WHEN_REQUIRED
```

- Tambahkan variabel lingkungan:

```
AWS_REQUEST_CHECKSUM_CALCULATION=WHEN_REQUIRED
AWS_RESPONSE_CHECKSUM_VALIDATION=WHEN_REQUIRED
```

- Lingkup aplikasi saat ini —Anda dapat mengatur properti sistem Java `aws.requestChecksumCalculation` `WHEN_REQUIRED` untuk membatasi perhitungan checksum. Properti sistem yang sesuai untuk tanggapan adalah`aws.responseChecksumValidation`.

  Pengaturan ini memengaruhi semua klien layanan SDK dalam aplikasi kecuali diganti selama pembuatan klien layanan.

  Mengatur properti sistem di awal aplikasi Anda:

```
import software.amazon.awssdk.core.SdkSystemSetting;
import software.amazon.awssdk.core.checksums.RequestChecksumCalculation;
import software.amazon.awssdk.core.checksums.ResponseChecksumValidation;
import software.amazon.awssdk.services.s3.S3Client;

class DemoClass {
    public static void main(String[] args) {


 System.setProperty(SdkSystemSetting.AWS_REQUEST_CHECKSUM_CALCULATION.property(), //
 Resolves to "aws.requestChecksumCalculation".
               "WHEN_REQUIRED");

 System.setProperty(SdkSystemSetting.AWS_RESPONSE_CHECKSUM_VALIDATION.property(), //
 Resolves to "aws.responseChecksumValidation".
               "WHEN_REQUIRED");

        S3Client s3Client = S3Client.builder().build();

        // Use s3Client.
    }
}
```

- Lingkup klien layanan S3 tunggal —Anda dapat mengonfigurasi satu klien layanan S3 untuk menghitung jumlah minimum checksum menggunakan metode pembangun:

```
import software.amazon.awssdk.core.checksums.RequestChecksumCalculation;
import software.amazon.awssdk.services.s3.S3Client;

public class RequiredChecksums {
    public static void main(String[] args) {
        S3Client s3 = S3Client.builder()
                .requestChecksumCalculation(RequestChecksumCalculation.WHEN_REQUIRED)
                .responseChecksumValidation(ResponseChecksumValidation.WHEN_REQUIRED)
                .build();

        // Use s3Client.
    }
// ...
}
```

Gunakan **`LegacyMd5Plugin`** untuk MD5 kompatibilitas yang disederhanakan

Seiring dengan rilis perilaku CRC32 checksum dengan versi 2.30.0, SDK berhenti menghitung MD5 checksum pada operasi yang diperlukan.

Jika Anda memerlukan perilaku MD5 checksum lama untuk operasi S3, Anda dapat menggunakan`LegacyMd5Plugin`, yang dirilis dengan SDK versi 2.31.32.

`LegacyMd5Plugin`Ini sangat berguna ketika Anda perlu mempertahankan kompatibilitas dengan aplikasi yang bergantung pada perilaku MD5 checksum lama, terutama ketika bekerja dengan penyedia penyimpanan pihak ketiga yang kompatibel dengan S3 seperti yang digunakan dengan konektor sistem file S3A (Apache Spark, Iceberg).

Untuk menggunakan`LegacyMd5Plugin`, tambahkan ke pembuat klien S3 Anda:

```
// For synchronous S3 client.
S3Client s3Client = S3Client.builder()
                            .addPlugin(LegacyMd5Plugin.create())
                            .build();

// For asynchronous S3 client.
S3AsyncClient asyncClient = S3AsyncClient.builder()
                                         .addPlugin(LegacyMd5Plugin.create())
                                         .build();
```

Jika Anda ingin menambahkan MD5 checksum ke operasi yang memerlukan checksum dan ingin melewatkan penambahan checksum default SDK untuk operasi yang mendukung checksum tetapi tidak diperlukan, Anda dapat mengaktifkan opsi dan as. `ClientBuilder` `requestChecksumCalculation` `responseChecksumValidation` `WHEN_REQUIRED` Ini akan menambahkan checksum default SDK hanya untuk operasi yang memerlukan checksum:

```
// Use the `LegacyMd5Plugin` with `requestChecksumCalculation` and
 `responseChecksumValidation` set to WHEN_REQUIRED.
S3AsyncClient asyncClient = S3AsyncClient.builder()
                                        .addPlugin(LegacyMd5Plugin.create())

 .requestChecksumCalculation(RequestChecksumCalculation.WHEN_REQUIRED)

 .responseChecksumValidation(ResponseChecksumValidation.WHEN_REQUIRED)
                                        .build();
```

Konfigurasi ini sangat berguna ketika bekerja dengan sistem penyimpanan pihak ketiga yang kompatibel dengan S3 yang mungkin tidak sepenuhnya mendukung algoritma checksum yang lebih baru tetapi masih memerlukan MD5 checksum untuk operasi tertentu.

## Gunakan klien S3 berkinerja: klien S3 berbasis AWS CRT

Klien S3 AWS berbasis CRT — dibangun di atas AWS Common Runtime (CRT) — adalah klien asinkron S3 alternatif. Ini mentransfer objek ke dan dari Amazon Simple Storage Service (Amazon S3) Simple Storage Service (Amazon S3) dengan peningkatan kinerja dan keandalan dengan secara otomatis menggunakan API unggahan multipart Amazon S3 dan pengambilan rentang byte.

Klien S3 AWS berbasis CRT meningkatkan keandalan transfer jika ada kegagalan jaringan. Keandalan ditingkatkan dengan mencoba kembali bagian-bagian individual yang gagal dari transfer file tanpa memulai ulang transfer dari awal.

Selain itu, klien S3 AWS berbasis CRT menawarkan penyatuan koneksi yang ditingkatkan dan penyeimbangan beban Sistem Nama Domain (DNS), yang juga meningkatkan throughput.

Anda dapat menggunakan klien S3 AWS berbasis CRT sebagai pengganti klien asinkron S3 standar SDK dan segera memanfaatkan throughputnya yang ditingkatkan.

> **Important**
>
> Klien S3 AWS berbasis CRT saat ini tidak mendukung pengumpulan metrik SDK di tingkat klien maupun di tingkat permintaan.

AWS Komponen berbasis CRT di SDK

Klien S3 AWS berbasis CRT, dijelaskan dalam topik ini, dan klien HTTP AWS berbasis CRT adalah komponen yang berbeda dalam SDK.

Klien S3 AWS berbasis CRT adalah implementasi AsyncClient antarmuka S3 dan digunakan untuk bekerja dengan layanan Amazon S3. Ini adalah alternatif untuk implementasi `S3AsyncClient` antarmuka berbasis Java dan menawarkan beberapa manfaat.

Client HTTP AWS berbasis CRT adalah implementasi SdkAsyncHttpClientantarmuka dan digunakan untuk komunikasi HTTP umum. Ini adalah alternatif untuk implementasi `SdkAsyncHttpClient` antarmuka Netty dan menawarkan beberapa keuntungan.

Meskipun kedua komponen menggunakan pustaka dari AWS Common Runtime, klien S3 AWS berbasis CRT menggunakan pustaka aws-c-s 3 dan mendukung fitur API unggahan multipart S3. Karena klien HTTP AWS berbasis CRT dimaksudkan untuk penggunaan tujuan umum, itu tidak mendukung fitur API unggahan multibagian S3.

## Tambahkan dependensi untuk menggunakan klien S3 berbasis AWS CRT

Untuk menggunakan klien S3 AWS berbasis CRT, tambahkan dua dependensi berikut ke file proyek Maven Anda. Contoh menunjukkan versi minimum yang akan digunakan. Cari repositori pusat Maven untuk versi terbaru dari artefak s3 dan aws-crt.

```
<dependency>
  <groupId>software.amazon.awssdk</groupId>
  <artifactId>s3</artifactId>
  <version>2.27.21</version>
</dependency>
<dependency>
  <groupId>software.amazon.awssdk.crt</groupId>
  <artifactId>aws-crt</artifactId>
  <version>0.30.11</version>
</dependency>
```

## Buat instance klien S3 AWS berbasis CRT

Buat instance klien S3 AWS berbasis CRT dengan pengaturan default seperti yang ditunjukkan pada cuplikan kode berikut.

```
S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
```

Untuk mengkonfigurasi klien, gunakan pembuat klien AWS CRT. Anda dapat beralih dari klien asinkron S3 standar ke klien AWS berbasis CRT dengan mengubah metode pembangun.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;


S3AsyncClient s3AsyncClient =
        S3AsyncClient.crtBuilder()
                     .credentialsProvider(DefaultCredentialsProvider.create())
                     .region(Region.US_WEST_2)
                     .targetThroughputInGbps(20.0)
                     .minimumPartSizeInBytes(8 * 1025 * 1024L)
                     .build();
```

> **Note**
>
> Beberapa pengaturan di pembuat standar mungkin saat ini tidak didukung di pembuat klien AWS CRT. Dapatkan pembangun standar dengan meneleponS3AsyncClient#builder().

## Gunakan klien AWS S3 berbasis CRT

Gunakan klien S3 AWS berbasis CRT untuk memanggil operasi API Amazon S3. Contoh berikut menunjukkan PutObjectdan GetObjectoperasi yang tersedia melalui. AWS SDK untuk Java

```
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.async.AsyncResponseTransformer;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
```

```
import software.amazon.awssdk.services.s3.model.PutObjectResponse;


S3AsyncClient s3Client = S3AsyncClient.crtCreate();

// Upload a local file to Amazon S3.
PutObjectResponse putObjectResponse =
      s3Client.putObject(req -> req.bucket(<BUCKET_NAME>)
                                   .key(<KEY_NAME>),
                        AsyncRequestBody.fromFile(Paths.get(<FILE_NAME>)))
              .join();

// Download an object from Amazon S3 to a local file.
GetObjectResponse getObjectResponse =
      s3Client.getObject(req -> req.bucket(<BUCKET_NAME>)
                                   .key(<KEY_NAME>),
                        AsyncResponseTransformer.toFile(Paths.get(<FILE_NAME>)))
              .join();
```

## Mengunggah aliran dengan ukuran yang tidak diketahui

Salah satu keuntungan signifikan dari klien S3 AWS AWS berbasis CRT adalah kemampuannya untuk menangani aliran input dengan ukuran yang tidak diketahui secara efisien. Ini sangat berguna ketika Anda perlu mengunggah data dari sumber di mana ukuran totalnya tidak dapat ditentukan sebelumnya.

```
public PutObjectResponse crtClient_stream_unknown_size(String bucketName, String key,
 InputStream inputStream) {

    S3AsyncClient s3AsyncClient = S3AsyncClient.crtCreate();
    ExecutorService executor = Executors.newSingleThreadExecutor();
    AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);  // 'null' indicates that the

     // content length is unknown.
    CompletableFuture<PutObjectResponse> responseFuture =
            s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                    .exceptionally(e -> {
                        if (e != null){
                            logger.error(e.getMessage(), e);
                        }
                        return null;
```

```
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Kemampuan ini membantu menghindari masalah umum dengan unggahan tradisional di mana spesifikasi panjang konten yang salah dapat menyebabkan objek terpotong atau unggahan gagal.

## Batasan konfigurasi

Klien S3 AWS berbasis CRT dan klien async S3 berbasis Java menyediakan fitur yang sebanding, dengan klien S3 berbasis CRT yang menawarkan keunggulan kinerja. AWS Namun, klien S3 AWS berbasis CRT tidak memiliki pengaturan konfigurasi yang dimiliki klien async S3 berbasis Java. Pengaturan ini meliputi:

- Konfigurasi tingkat klien: Batas waktu upaya panggilan API, pencegat eksekusi kompresi, penerbit metrik, atribut eksekusi kustom, opsi lanjutan khusus, layanan pelaksana terjadwal khusus, header khusus
- Konfigurasi tingkat permintaan: penandatangan khusus, penyedia kredensyal, batas waktu upaya panggilan API

Untuk daftar lengkap perbedaan konfigurasi, lihat referensi API.

| Klien asinkron S3 berbasis Java | AWS Klien S3 berbasis CRT |
| --- | --- |
| Konfigurasi tingkat klien<br>• ClientOverrideConfiguration.Pembangun | Konfigurasi tingkat klien<br>• S3 CrtAsyncClientBuilder |
| Konfigurasi tingkat permintaan<br>• RequestOverrideConfiguration.Pembangun<br>• AwsRequestOverrideConfiguration.Pembangun | Tidak ada konfigurasi tingkat permintaan |

# Konfigurasikan klien async S3 berbasis Java untuk menggunakan transfer paralel

Sejak versi 2.27.5, klien async S3 berbasis Java standar mendukung transfer paralel otomatis (unggahan dan unduhan multipart). Anda mengonfigurasi dukungan untuk transfer paralel saat membuat klien asinkron S3 berbasis Java.

Bagian ini menunjukkan cara mengaktifkan transfer paralel dan cara menyesuaikan konfigurasi.

## Buat sebuah instance dari **`S3AsyncClient`**

Saat Anda membuat `S3AsyncClient` instance tanpa memanggil `multipart*` metode apa pun di builder, transfer paralel tidak diaktifkan. Setiap pernyataan berikut membuat klien asinkron S3 berbasis Java tanpa dukungan untuk unggahan dan unduhan multibagian.

Buat tanpa dukungan multipart

Example

```
import software.amazon.awssdk.auth.credentials.ProcessCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3AsyncClient;


S3AsyncClient s3Client = S3AsyncClient.create();

S3AsyncClient s3Client2 = S3AsyncClient.builder().build();

S3AsyncClient s3Client3 = S3AsyncClient.builder()
        .credentialsProvider(ProcessCredentialsProvider.builder().build())
        .region(Region.EU_NORTH_1)
        .build();
```

Buat dengan dukungan multipart

Untuk mengaktifkan transfer paralel dengan pengaturan default, panggil `multipartEnabled` pembangun dan teruskan `true` seperti yang ditunjukkan pada contoh berikut.

Example

```
S3AsyncClient s3AsyncClient2 = S3AsyncClient.builder()
```

```
        .multipartEnabled(true)
        .build();
```

Nilai default adalah 8 MiB untuk `thresholdInBytes` dan `minimumPartSizeInBytes` pengaturan.

Jika Anda menyesuaikan pengaturan multipart, transfer paralel secara otomatis diaktifkan seperti yang ditunjukkan pada berikut ini.

Example

```
import software.amazon.awssdk.services.s3.S3AsyncClient;
import static software.amazon.awssdk.transfer.s3.SizeConstant.MB;


S3AsyncClient s3AsyncClient2 = S3AsyncClient.builder()
        .multipartConfiguration(b -> b
                .thresholdInBytes(16 * MB)
                .minimumPartSizeInBytes(10 * MB))
        .build();
```

## Mengunggah aliran dengan ukuran yang tidak diketahui

Klien asinkron S3 berbasis Java dengan multipart diaktifkan dapat secara efisien menangani aliran input di mana ukuran total tidak diketahui sebelumnya:

```
public PutObjectResponse asyncClient_multipart_stream_unknown_size(String bucketName,
 String key, InputStream inputStream) {

   S3AsyncClient s3AsyncClient =
 S3AsyncClient.builder().multipartEnabled(true).build();
   ExecutorService executor = Executors.newSingleThreadExecutor();
   AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor); // 'null' indicates that the

   // content length is unknown.
   CompletableFuture<PutObjectResponse> responseFuture =
           s3AsyncClient.putObject(r -> r.bucket(bucketName).key(key), body)
                   .exceptionally(e -> {
                       if (e != null) {
                           logger.error(e.getMessage(), e);
                       }
                       return null;
```

```
                    });

    PutObjectResponse response = responseFuture.join(); // Wait for the response.
    executor.shutdown();
    return response;
}
```

Pendekatan ini mencegah masalah yang dapat terjadi saat menentukan panjang konten yang salah secara manual, seperti objek terpotong atau unggahan yang gagal.

## Transfer file dan direktori dengan Amazon S3 Transfer Manager

Amazon S3 Transfer Manager adalah sumber terbuka, utilitas transfer file tingkat tinggi untuk file. AWS SDK for Java 2.x Gunakan untuk mentransfer file dan direktori ke dan dari Amazon Simple Storage Service (Amazon S3).

Ketika dibangun di atas klien S3 AWS berbasis CRT atau klien asinkron S3berbasis Java standar dengan multipart diaktifkan, S3 Transfer Manager dapat memanfaatkan peningkatan kinerja seperti API unggahan multibagian dan pengambilan rentang byte.

Dengan S3 Transfer Manager, Anda juga dapat memantau kemajuan transfer secara real time dan menjeda transfer untuk eksekusi nanti.

### Memulai

Tambahkan dependensi ke file build

Untuk menggunakan S3 Transfer Manager dengan performa multipart yang disempurnakan, konfigurasikan file build Anda dengan dependensi yang diperlukan.

Use the AWS CRT-based S3 client

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
```

```
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-transfer-manager</artifactId>
    </dependency>
    <dependency>
        <groupId>software.amazon.awssdk.crt</groupId>
        <artifactId>aws-crt</artifactId>
        <version>0.29.143[2]</version>
    </dependency>
</dependencies>
```

[1] Versi terbaru. [2] Versi terbaru.

Use the Java-based S3 async client

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.27.21[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-transfer-manager</artifactId>
    </dependency>
</dependencies>
```

[1] Versi terbaru.

Buat instance dari S3 Transfer Manager

Untuk mengaktifkan transfer paralel, Anda harus meneruskan klien S3 AWS berbasis CRT ATAU klien async S3 berbasis Java dengan multipart diaktifkan. Contoh berikut menunjukkan cara mengkonfigurasi Manajer Transfer S3 dengan pengaturan khusus.

Use the AWS CRT-based S3 client

```
        S3AsyncClient s3AsyncClient = S3AsyncClient.crtBuilder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .targetThroughputInGbps(20.0)
                .minimumPartSizeInBytes(8 * MB)
                .build();

        S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();
```

Use the Java-based S3 async client

Jika `aws-crt` dependensi tidak disertakan dalam file build, S3 Transfer Manager dibangun di atas klien async S3 berbasis Java standar yang digunakan dalam SDK for Java 2.x.

Konfigurasi kustom klien S3 - memerlukan multipart diaktifkan

```
        S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
                .multipartEnabled(true)
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();
```

Tidak ada konfigurasi klien S3 - dukungan multipart diaktifkan secara otomatis

```
S3TransferManager transferManager = S3TransferManager.create();
```

## Unggah file ke bucket S3

Contoh berikut menunjukkan contoh upload file bersama dengan penggunaan opsional dari LoggingTransferListener, yang mencatat kemajuan upload.

Untuk mengunggah file ke Amazon S3 menggunakan S3 Transfer Manager, teruskan `UploadFileRequest`objek ke metode UploadFile. `S3TransferManager`

FileUploadObjek yang dikembalikan dari `uploadFile` metode mewakili proses upload. Setelah permintaan selesai, CompletedFileUploadobjek berisi informasi tentang unggahan.

```
    public void trackUploadFile(S3TransferManager transferManager, String bucketName,
                                String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
                .putObjectRequest(b -> b.bucket(bucketName).key(key))
                .addTransferListener(LoggingTransferListener.create())  // Add
listener.
                .source(Paths.get(filePathURI))
                .build();

        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        fileUpload.completionFuture().join();
        /*
            The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
            You can also implement the interface to provide your own logic.

            Configure log4J2 with settings such as the following.
                <Configuration status="WARN">
                    <Appenders>
                        <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                            <PatternLayout pattern="%m%n"/>
                        </Console>
                    </Appenders>

                    <Loggers>
                        <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                            <AppenderRef ref="AlignedConsoleAppender"/>
                        </logger>
                    </Loggers>
                </Configuration>

            Log4J2 logs the progress. The following is example output for a 21.3 MB
file upload.
                Transfer initiated...
                |                    | 0.0%
                |====                | 21.1%
                |============        | 60.5%
```

```
                |====================| 100.0%
                Transfer complete!
        */
    }
```

Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileUpload;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;
import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;
```

## Unduh file dari ember S3

Contoh berikut menunjukkan contoh download bersama dengan penggunaan opsional dari LoggingTransferListener, yang mencatat kemajuan download.

Untuk mengunduh objek dari bucket S3 menggunakan S3 Transfer Manager, buat DownloadFileRequestobjek dan teruskan ke metode DownloadFile.

FileDownloadObjek yang `S3TransferManager` dikembalikan oleh `downloadFile` metode ini mewakili transfer file. Setelah unduhan selesai, CompletedFileDownloadberisi akses ke informasi tentang unduhan.

```
    public void trackDownloadFile(S3TransferManager transferManager, String bucketName,
                                  String key, String downloadedFileWithPath) {
        DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
                .getObjectRequest(b -> b.bucket(bucketName).key(key))
                .addTransferListener(LoggingTransferListener.create())  // Add
listener.
                .destination(Paths.get(downloadedFileWithPath))
                .build();

        FileDownload downloadFile = transferManager.downloadFile(downloadFileRequest);
```

```
        CompletedFileDownload downloadResult = downloadFile.completionFuture().join();
        /*
            The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
            You can also implement the interface to provide your own logic.

            Configure log4J2 with settings such as the following.
                <Configuration status="WARN">
                    <Appenders>
                        <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                            <PatternLayout pattern="%m%n"/>
                        </Console>
                    </Appenders>

                    <Loggers>
                        <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                            <AppenderRef ref="AlignedConsoleAppender"/>
                        </logger>
                    </Loggers>
                </Configuration>

            Log4J2 logs the progress. The following is example output for a 21.3 MB
file download.
                Transfer initiated...
                |=======             | 39.4%
                |===============     | 78.8%
                |====================| 100.0%
                Transfer complete!
        */
    }
```

## Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileDownload;
```

```
import software.amazon.awssdk.transfer.s3.model.DownloadFileRequest;
import software.amazon.awssdk.transfer.s3.model.FileDownload;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;

import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Files;
import java.nio.file.NoSuchFileException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.UUID;
```

## Salin objek Amazon S3 ke ember lain

Contoh berikut menunjukkan cara menyalin objek dengan S3 Transfer Manager.

Untuk memulai salinan objek dari bucket S3 ke bucket lain, buat CopyObjectRequestinstance dasar.

Selanjutnya, bungkus dasar `CopyObjectRequest` dalam CopyRequestyang dapat digunakan oleh S3 Transfer Manager.

CopyObjek yang dikembalikan oleh `copy` metode ini mewakili proses penyalinan. `S3TransferManager` Setelah proses penyalinan selesai, CompletedCopyobjek berisi detail tentang respons.

```
    public String copyObject(S3TransferManager transferManager, String bucketName,
            String key, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyObjectRequest = CopyObjectRequest.builder()
                .sourceBucket(bucketName)
                .sourceKey(key)
                .destinationBucket(destinationBucket)
                .destinationKey(destinationKey)
                .build();

        CopyRequest copyRequest = CopyRequest.builder()
                .copyObjectRequest(copyObjectRequest)
                .build();

        Copy copy = transferManager.copy(copyRequest);

        CompletedCopy completedCopy = copy.completionFuture().join();
        return completedCopy.response().copyObjectResult().eTag();
```

```
    }
```

> **Note**
>
> Untuk melakukan salinan Lintas wilayah dengan S3 Transfer Manager, aktifkan `crossRegionAccessEnabled` pada pembuat klien S3 AWS berbasis CRT seperti yang ditunjukkan pada cuplikan berikut.
>
> ```
> S3AsyncClient s3AsyncClient = S3AsyncClient.crtBuilder()
>                 .crossRegionAccessEnabled(true)
>                 .build();
>
> S3TransferManager transferManager = S3TransferManager.builder()
>                 .s3Client(s3AsyncClient)
>                 .build();
> ```

Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedCopy;
import software.amazon.awssdk.transfer.s3.model.Copy;
import software.amazon.awssdk.transfer.s3.model.CopyRequest;

import java.util.UUID;
```

## Unggah direktori lokal ke bucket S3

Contoh berikut menunjukkan bagaimana Anda dapat meng-upload direktori lokal ke S3.

Mulailah dengan memanggil metode uploadDirectory dari `S3TransferManager` instance, meneruskan file. UploadDirectoryRequest

DirectoryUploadObjek mewakili proses upload, yang menghasilkan CompletedDirectoryUploadketika permintaan selesai. `CompleteDirectoryUpload`Objek berisi informasi tentang hasil transfer, termasuk file mana yang gagal ditransfer.

```
   public Integer uploadDirectory(S3TransferManager transferManager,
           URI sourceDirectory, String bucketName) {
       DirectoryUpload directoryUpload =
transferManager.uploadDirectory(UploadDirectoryRequest.builder()
               .source(Paths.get(sourceDirectory))
               .bucket(bucketName)
               .build());

       CompletedDirectoryUpload completedDirectoryUpload =
directoryUpload.completionFuture().join();
       completedDirectoryUpload.failedTransfers()
               .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
       return completedDirectoryUpload.failedTransfers().size();
   }
```

Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.DirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.UploadDirectoryRequest;

import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;
```

## Unduh objek bucket S3 ke direktori lokal

Anda dapat mengunduh objek dalam bucket S3 ke direktori lokal seperti yang ditunjukkan pada contoh berikut.

Untuk mengunduh objek dalam bucket S3 ke direktori lokal, mulailah dengan memanggil metode DownloadDirectory dari Transfer Manager, meneruskan file. DownloadDirectoryRequest

DirectoryDownloadObjek mewakili proses download, yang menghasilkan CompletedDirectoryDownloadketika permintaan selesai. `CompleteDirectoryDownload`Objek berisi informasi tentang hasil transfer, termasuk file mana yang gagal ditransfer.

```
   public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
           URI destinationPathURI, String bucketName) {
       DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
               .destination(Paths.get(destinationPathURI))
               .bucket(bucketName)
               .build());
       CompletedDirectoryDownload completedDirectoryDownload =
directoryDownload.completionFuture().join();

       completedDirectoryDownload.failedTransfers()
               .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
       return completedDirectoryDownload.failedTransfers().size();
   }
```

Impor

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadDirectoryRequest;
import java.io.IOException;
import java.net.URI;
import java.net.URISyntaxException;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.HashSet;
import java.util.Set;
import java.util.UUID;
import java.util.stream.Collectors;
```

### Lihat contoh lengkap

GitHub berisi kode lengkap untuk semua contoh di halaman ini.

## Bekerja dengan Pemberitahuan Acara S3

Untuk membantu Anda memantau aktivitas di bucket, Amazon S3 dapat mengirim notifikasi saat peristiwa tertentu terjadi. Panduan Pengguna Amazon S3 memberikan informasi tentang notifikasi yang dapat dikirimkan bucket.

Anda dapat menyiapkan bucket untuk mengirim peristiwa ke empat kemungkinan tujuan menggunakan SDK for Java:

- Topik Amazon Simple Notification Service
- Antrean Amazon Simple Queue Service
- AWS Lambda fungsi
- Amazon EventBridge

Saat menyiapkan bucket untuk mengirim acara EventBridge, Anda memiliki kemampuan untuk mengonfigurasi EventBridge aturan untuk meng-fanout acara yang sama ke beberapa tujuan. Saat Anda mengonfigurasi bucket untuk dikirim langsung ke salah satu dari tiga tujuan pertama, hanya satu jenis tujuan yang dapat ditentukan untuk setiap acara.

Di bagian selanjutnya, Anda akan melihat cara mengonfigurasi bucket menggunakan SDK for Java untuk mengirim Pemberitahuan Acara S3 dengan dua cara: langsung ke antrian Amazon SQS dan ke. EventBridge

Bagian terakhir menunjukkan cara menggunakan S3 Event Notifications API untuk bekerja dengan notifikasi dengan cara berorientasi objek.

### Konfigurasikan bucket untuk mengirim langsung ke tujuan

Contoh berikut mengonfigurasi bucket untuk mengirim notifikasi saat peristiwa pembuatan objek atau peristiwa penandaan objek terjadi terhadap bucket.

```
static void processS3Events(String bucketName, String queueArn) {
    // Configure the bucket to send Object Created and Object Tagging notifications to
 an existing SQS queue.
```

```
    s3Client.putBucketNotificationConfiguration(b -> b
            .notificationConfiguration(ncb -> ncb
                    .queueConfigurations(qcb -> qcb
                            .events(Event.S3_OBJECT_CREATED, Event.S3_OBJECT_TAGGING)
                            .queueArn(queueArn)))
                    .bucket(bucketName)
    );
}
```

Kode yang ditunjukkan di atas mengatur satu antrian untuk menerima dua jenis acara. Dengan mudah, `queueConfigurations` metode ini memungkinkan Anda untuk mengatur beberapa tujuan antrian jika diperlukan. Selain itu, dalam `notificationConfiguration` metode ini Anda dapat mengatur tujuan tambahan, seperti satu atau beberapa topik Amazon SNS atau satu atau lebih fungsi Lambda. Cuplikan berikut menunjukkan contoh dengan dua antrian dan tiga jenis tujuan.

```
s3Client.putBucketNotificationConfiguration(b -> b
                .notificationConfiguration(ncb -> ncb
                        .queueConfigurations(qcb -> qcb
                                .events(Event.S3_OBJECT_CREATED,
 Event.S3_OBJECT_TAGGING)
                                .queueArn(queueArn),
                                qcb2 -> qcb2.<...>)
                        .topicConfigurations(tcb -> tcb.<...>)
                        .lambdaFunctionConfigurations(lfcb -> lfcb.<...>))
                        .bucket(bucketName)
        );
```

GitHub Repositori Contoh Kode berisi contoh lengkap untuk mengirim pemberitahuan acara S3 langsung ke antrian.

## Konfigurasikan bucket untuk dikirim EventBridge

Contoh berikut mengonfigurasi bucket untuk mengirim notifikasi. EventBridge

```
public static String setBucketNotificationToEventBridge(String bucketName) {
    // Enable bucket to emit S3 Event notifications to EventBridge.
    s3Client.putBucketNotificationConfiguration(b -> b
            .bucket(bucketName)
            .notificationConfiguration(b1 -> b1
                    .eventBridgeConfiguration(SdkBuilder::build))
    .build());
```

Saat Anda mengonfigurasi bucket untuk mengirim acara EventBridge, Anda cukup menunjukkan EventBridge tujuan, bukan jenis acara atau tujuan akhir yang EventBridge akan dikirim. Anda mengonfigurasi target akhir dan jenis acara dengan menggunakan EventBridge klien Java SDK.

Kode berikut menunjukkan cara mengkonfigurasi EventBridge untuk menyebarkan peristiwa yang dibuat objek ke topik dan antrian.

```
  public static String configureEventBridge(String topicArn, String queueArn) {
       try {
           // Create an EventBridge rule to route Object Created notifications.
           PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                   .name(RULE_NAME)
                   .eventPattern("""
                           {
                             "source": ["aws.s3"],
                             "detail-type": ["Object Created"],
                             "detail": {
                               "bucket": {
                                 "name": ["%s"]
                               }
                             }
                           }
                           """.formatted(bucketName))
                   .build();

           // Add the rule to the default event bus.
           PutRuleResponse putRuleResponse = eventBridgeClient.putRule(putRuleRequest)
                   .whenComplete((r, t) -> {
                       if (t != null) {
                           logger.error("Error creating event bus rule: " +
t.getMessage(), t);
                           throw new RuntimeException(t.getCause().getMessage(), t);
                       }
                       logger.info("Event bus rule creation request sent successfully.
ARN is: {}", r.ruleArn());
                   }).join();

           // Add the existing SNS topic and SQS queue as targets to the rule.
           eventBridgeClient.putTargets(b -> b
                   .eventBusName("default")
                   .rule(RULE_NAME)
                   .targets(List.of (
                           Target.builder()
```

```
                                .arn(queueArn)
                                .id("Queue")
                                .build(),
                        Target.builder()
                                .arn(topicArn)
                                .id("Topic")
                                .build())
                        )
                ).join();
            return putRuleResponse.ruleArn();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

Untuk bekerja dengan EventBridge kode Java Anda, tambahkan ketergantungan pada `eventbridge` artefak ke file `pom.xml` Maven Anda.

```
<dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>eventbridge</artifactId>
</dependency>
```

GitHub Repositori Contoh Kode berisi contoh lengkap untuk mengirim pemberitahuan acara S3 ke EventBridge dan kemudian ke topik dan antrian.

## Gunakan API Pemberitahuan Acara S3 untuk memproses peristiwa

Setelah tujuan menerima peristiwa notifikasi S3, Anda dapat memprosesnya dengan cara berorientasi objek dengan menggunakan S3 Event Notifications API. Anda dapat menggunakan S3 Event Notifications API untuk bekerja dengan pemberitahuan peristiwa yang dikirim langsung ke target (seperti yang ditunjukkan pada contoh pertama), tetapi tidak dengan notifikasi yang diarahkan. EventBridge Pemberitahuan peristiwa S3 dikirim oleh bucket untuk EventBridge berisi struktur berbeda yang saat ini tidak ditangani oleh API Pemberitahuan Acara S3.

Tambahkan ketergantungan

S3 Event Notifications API dirilis dengan SDK for Java 2.x versi 2.25.11.

Untuk menggunakan S3 Event Notifications API, tambahkan elemen dependensi yang diperlukan ke Maven Anda `pom.xml` seperti yang ditunjukkan pada cuplikan berikut.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.X.X[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>s3-event-notifications</artifactId>
    </dependency>
</dependencies>
```

[1] Versi terbaru.

### Gunakan **`S3EventNotification`** kelas

#### Buat **`S3EventNotification`** instance dari string JSON

Untuk mengkonversi string JSON menjadi `S3EventNotification` objek, menggunakan metode statis `S3EventNotification` kelas seperti yang ditunjukkan pada contoh berikut.

```
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotificationRecord
import software.amazon.awssdk.services.sqs.model.Message;

public class S3EventNotificationExample {
    ...

    void receiveMessage(Message message) {
       // Message received from SQSClient.
       String sqsEventBody = message.body();
       S3EventNotification s3EventNotification =
 S3EventNotification.fromJson(sqsEventBody);
```

```
        // Use getRecords() to access all the records in the notification.


        List<S3EventNotificationRecord> records = s3EventNotification.getRecords();

         S3EventNotificationRecord record = records.stream().findFirst();
         // Use getters on the record to access individual attributes.
         String awsRegion = record.getAwsRegion();
         String eventName = record.getEventName();
         String eventSource = record.getEventSource();

    }
}
```

Dalam contoh ini, `fromJson` metode mengubah string JSON menjadi objek`S3EventNotification`. Bidang yang hilang dalam string JSON akan menghasilkan `null` nilai di bidang objek Java yang sesuai dan bidang tambahan apa pun di JSON akan diabaikan.

Lainnya APIs untuk catatan pemberitahuan peristiwa dapat ditemukan di referensi API untuk`S3EventNotificationRecord`.

Mengkonversi **`S3EventNotification`** instance ke string JSON

Gunakan metode `toJson` (or`toJsonPretty`) untuk mengubah `S3EventNotification` objek menjadi string JSON seperti yang ditunjukkan pada contoh berikut.

```
import software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification

public class S3EventNotificationExample {
    ...

    void toJsonString(S3EventNotification event) {

        String json = event.toJson();
        String jsonPretty = event.toJsonPretty();

        System.out.println("JSON: " + json);
        System.out.println("Pretty JSON: " + jsonPretty);
    }
}
```

Bidang untuk `GlacierEventDataReplicationEventData`,`IntelligentTieringEventData`,, dan `LifecycleEventData` dikecualikan dari JSON jika memang `null` demikian. `null`Bidang lainnya akan diserialkan sebagai`null`.

Berikut ini menunjukkan contoh output dari `toJsonPretty` metode untuk peristiwa penandaan objek S3.

```
{
  "Records" : [ {
    "eventVersion" : "2.3",
    "eventSource" : "aws:s3",
    "awsRegion" : "us-east-1",
    "eventTime" : "2024-07-19T20:09:18.551Z",
    "eventName" : "ObjectTagging:Put",
    "userIdentity" : {
      "principalId" : "AWS:XXXXXXXXXXX"
    },
    "requestParameters" : {
      "sourceIPAddress" : "XXX.XX.XX.XX"
    },
    "responseElements" : {
      "x-amz-request-id" : "XXXXXXXXXXXX",
      "x-amz-id-2" : "XXXXXXXXXXXXX"
    },
    "s3" : {
      "s3SchemaVersion" : "1.0",
      "configurationId" : "XXXXXXXXXXXXX",
      "bucket" : {
        "name" : "amzn-s3-demo-bucket",
        "ownerIdentity" : {
          "principalId" : "XXXXXXXXXXX"
        },
        "arn" : "arn:aws:s3:::XXXXXXXXXX"
      },
      "object" : {
        "key" : "akey",
        "size" : null,
        "eTag" : "XXXXXXXXXX",
        "versionId" : null,
        "sequencer" : null
      }
    }
  } ]
```

```
}
```

Contoh lengkap tersedia GitHub yang menunjukkan cara menggunakan API untuk bekerja dengan notifikasi yang diterima oleh antrean Amazon SQS.

## Proses Acara S3 di Lambda dengan Perpustakaan Java: dan AWS SDK for Java 2.x `aws-lambda-java-events`

Alih-alih menggunakan SDK for Java 2.x untuk memproses notifikasi peristiwa Amazon S3 dalam fungsi Lambda, Anda dapat menggunakan pustaka pada versi 3.xx. `aws-lambda-java-events` AWS memelihara `aws-lambda-java-events` perpustakaan secara independen, dan memiliki persyaratan ketergantungan sendiri. `aws-lambda-java-events`Pustaka hanya berfungsi dengan peristiwa S3 dalam fungsi Lambda, sedangkan SDK for Java 2.x berfungsi dengan peristiwa S3 di fungsi Lambda, Amazon SNS, dan Amazon SQS.

Kedua pendekatan memodelkan payload notifikasi acara JSON dengan cara yang berorientasi objek dengan yang serupa. APIs Tabel berikut menunjukkan perbedaan mencolok antara menggunakan dua pendekatan.

| | AWS SDK untuk Java | aws-lambda-java-events perpustakaan |
|---|---|---|
| Penamaan Package | `software.amazon.awssdk.eventnotifications.s3.model.S3EventNotification` | `com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification` |
| `RequestHandler` parameter | Tulis `RequestHandler` implementasi fungsi Lambda Anda untuk menerima String JSON:<br>`import com.amazonaws.services.lambda.runtime.Context;`<br>`import com.amazonaws.services.lamb` | Tulis `RequestHandler` implementasi fungsi Lambda Anda untuk menerima objek`S3Event`:<br>`import com.amazonaws.services.lambda.runtime.Context;`<br>`import com.amazonaws.services.lamb` |

| | AWS SDK untuk Java | aws-lambda-java-events perpustakaan |
|---|---|---|

```
da.runtime.Request
Handler;
import software.
amazon.awssdk.even
tnotifications.s3.
model.S3EventNotif
ication;

public class Handler
 implements RequestHa
ndler<String, String>
 {

    @Override
        public String
 handleRequest(String
 jsonS3Event, Context
 context) {
            S3EventNo
tification s3Event =
 S3EventNotification


   .fromJson(jsonS3Ev
ent);
            // Work with
 the s3Event object.

            ...
    }
}
```

```
da.runtime.Request
Handler;
import com.amazo
naws.services.lamb
da.runtime.events.
S3Event;

public class Handler
 implements RequestHa
ndler<S3Event, String>
 {

    @Override
        public String
 handleRequest(S3Ev
ent s3event, Context
 context) {
            // Work with
 the s3Event object.

            ...
    }
}
```

| | AWS SDK untuk Java | aws-lambda-java-events perpustakaan |
|---|---|---|
| Ketergantungan Maven | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifact<br>Id>bom</artifactId><br><version><br>2.X.X</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifactId>s3-<br>event-notifications</<br>artifactId><br></dependency><br><!-- Add other SDK<br>dependencies that you<br>need. --><br></dependencies> | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifact<br>Id>bom</artifactId><br><version><br>2.X.X</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><!-- The following<br>two dependencies are<br>for the<br>aws-lambda-<br>java-events library. --<br>><br><dependency><br><groupId><br>com.amazonaws</gro<br>upId><br><artifact<br>Id>aws-lambda-java-<br>core</artifactId><br><version><br>1.2.3</version><br></dependency><br><dependency><br><groupId><br>com.amazonaws</gro<br>upId> |

| | AWS SDK untuk Java | aws-lambda-java-events perpustakaan |
|---|---|---|
| | | <artifact Id>aws-lambda-java-events</artifactId> <version> 3.15.0</version> </dependency> <!-- Add other SDK dependencies that you need. --> </dependencies> |

# Bekerja dengan Amazon Simple Notification Service

Dengan Amazon Simple Notification Service, Anda dapat dengan mudah mendorong pesan notifikasi real-time dari aplikasi Anda ke pelanggan melalui beberapa saluran komunikasi. Topik ini menjelaskan bagaimana melakukan beberapa fungsi dasar Amazon SNS.

## Buat topik

Topik adalah pengelompokan logis saluran komunikasi yang mendefinisikan sistem mana yang akan mengirim pesan, misalnya, mengipasi pesan AWS Lambda dan webhook HTTP. Anda mengirim pesan ke Amazon SNS, lalu mereka didistribusikan ke saluran yang ditentukan dalam topik. Ini membuat pesan tersedia untuk pelanggan.

Untuk membuat topik, pertama-tama buat CreateTopicRequestobjek, dengan nama set topik menggunakan `name()` metode di pembuat. Kemudian, kirim objek permintaan ke Amazon SNS dengan menggunakan `createTopic()` metode SnsClient. Anda dapat menangkap hasil permintaan ini sebagai CreateTopicResponseobjek, seperti yang ditunjukkan dalam cuplikan kode berikut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

Kode

```
    public static String createSNSTopic(SnsClient snsClient, String topicName ) {

        CreateTopicResponse result = null;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();
        } catch (SnsException e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Lihat contoh lengkapnya di GitHub.

## Buat daftar Amazon SNS topik Anda

Untuk mengambil daftar Amazon SNS topik yang ada, buat ListTopicsRequestobjek. Kemudian, kirim objek permintaan ke Amazon SNS dengan menggunakan `listTopics()` metode`SnsClient`. Anda dapat menangkap hasil permintaan ini sebagai ListTopicsResponseobjek.

Cuplikan kode berikut mencetak kode status HTTP permintaan dan daftar Amazon Resource Names (ARNs) untuk topik Anda Amazon SNS .

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListTopicsRequest;
import software.amazon.awssdk.services.sns.model.ListTopicsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

Kode

```
    public static void listSNSTopics(SnsClient snsClient) {
```

```
        try {
            ListTopicsRequest request = ListTopicsRequest.builder()
                    .build();

            ListTopicsResponse result = snsClient.listTopics(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode() +
"\n\nTopics\n\n" + result.topics());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Berlangganan titik akhir ke suatu topik

Setelah Anda membuat topik, Anda dapat mengonfigurasi saluran komunikasi mana yang akan menjadi titik akhir untuk topik tersebut. Pesan didistribusikan ke titik akhir ini setelah Amazon SNS menerimanya.

Untuk mengonfigurasi saluran komunikasi sebagai titik akhir untuk suatu topik, berlangganan titik akhir tersebut ke topik tersebut. Untuk memulai, buat SubscribeRequestobjek. Tentukan saluran komunikasi (misalnya, `lambda` atau`email`) sebagai`protocol()`. Atur `endpoint()` ke lokasi keluaran yang relevan (misalnya, ARN Lambda fungsi atau alamat email), lalu atur ARN dari topik yang ingin Anda berlangganan sebagai. `topicArn()` Kirim objek permintaan ke Amazon SNS dengan menggunakan `subscribe()` metode`SnsClient`. Anda dapat menangkap hasil permintaan ini sebagai SubscribeResponseobjek.

Cuplikan kode berikut menunjukkan cara berlangganan alamat email ke suatu topik.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
```

Kode

```
    public static void subEmail(SnsClient snsClient, String topicArn, String email) {

        try {
            SubscribeRequest request = SubscribeRequest.builder()
                .protocol("email")
                .endpoint(email)
                .returnSubscriptionArn(true)
                .topicArn(topicArn)
                .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n\n
 Status is " + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Publikasikan pesan ke suatu topik

Setelah Anda memiliki topik dan satu atau beberapa titik akhir yang dikonfigurasi untuk itu, Anda dapat mempublikasikan pesan ke sana. Untuk memulai, buat PublishRequestobjek. Tentukan `message()` yang akan dikirim, dan ARN dari topik (`topicArn()`) untuk mengirimkannya. Kemudian, kirim objek permintaan ke Amazon SNS dengan menggunakan `publish()` metode`SnsClient`. Anda dapat menangkap hasil permintaan ini sebagai PublishResponseobjek.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

Kode

```
    public static void pubTopic(SnsClient snsClient, String message, String topicArn) {
```

```
        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();

            PublishResponse result = snsClient.publish(request);
            System.out.println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

         } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
         }
    }
```

Lihat contoh lengkapnya di GitHub.

## Berhenti berlangganan titik akhir dari suatu topik

Anda dapat menghapus saluran komunikasi yang dikonfigurasi sebagai titik akhir untuk suatu topik. Setelah melakukan itu, topik itu sendiri terus ada dan mendistribusikan pesan ke titik akhir lain yang dikonfigurasi untuk topik itu.

Untuk menghapus saluran komunikasi sebagai titik akhir topik, berhenti berlangganan titik akhir tersebut dari topik tersebut. Untuk memulai, buat UnsubscribeRequestobjek dan atur ARN dari topik yang ingin Anda berhenti berlangganan sebagai. `subscriptionArn()` Kemudian kirim objek permintaan ke SNS dengan menggunakan `unsubscribe()` metode. `SnsClient` Anda dapat menangkap hasil permintaan ini sebagai UnsubscribeResponseobjek.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
```

Kode

```
    public static void unSub(SnsClient snsClient, String subscriptionArn) {
```

```
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);

            System.out.println("\n\nStatus was " +
result.sdkHttpResponse().statusCode()
                + "\n\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

## Hapus topik

Untuk menghapus Amazon SNS topik, pertama-tama buat DeleteTopicRequestobjek dengan ARN dari set topik sebagai `topicArn()` metode di pembuat. Kemudian kirim objek permintaan ke Amazon SNS dengan menggunakan `deleteTopic()` metode`SnsClient`. Anda dapat menangkap hasil permintaan ini sebagai DeleteTopicResponseobjek, seperti yang ditunjukkan dalam cuplikan kode berikut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

Kode

```
    public static void deleteSNSTopic(SnsClient snsClient, String topicArn ) {

        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
```

```
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat contoh lengkapnya di GitHub.

Untuk informasi selengkapnya, lihat Panduan Developer Amazon Simple Notification Service.

# Bekerja dengan Amazon Simple Queue Service

Bagian ini memberikan contoh pemrograman Amazon Simple Queue Servicemenggunakan AWS SDK untuk Java 2.x.

Contoh berikut hanya mencakup kode yang diperlukan untuk mendemonstrasikan setiap teknik. Kode contoh lengkap tersedia di GitHub. Dari sana, Anda dapat mengunduh satu file sumber atau mengkloning repositori secara lokal untuk mendapatkan semua contoh untuk dibangun dan dijalankan.

Topik

- Gunakan batching permintaan otomatis untuk Amazon SQS dengan AWS SDK for Java 2.x
- Bekerja dengan Amazon Simple Queue Service antrian pesan
- Mengirim, menerima, dan menghapus Amazon Simple Queue Service pesan

## Gunakan batching permintaan otomatis untuk Amazon SQS dengan AWS SDK for Java 2.x

Automatic Request Batching API untuk Amazon SQS adalah pustaka tingkat tinggi yang menyediakan cara efisien untuk mengumpulkan dan menyangga permintaan untuk operasi SQS. Dengan menggunakan API batching, Anda mengurangi jumlah permintaan ke SQS, yang meningkatkan throughput dan meminimalkan biaya.

Karena metode API batch cocok dengan `SqsAsyncClient` metode—`sendMessage`,, `changeMessageVisibilitydeleteMessage`, `receiveMessage` —Anda dapat menggunakan API batch sebagai pengganti drop-in dengan sedikit perubahan.

Topik ini memberi Anda gambaran umum tentang cara mengonfigurasi dan bekerja dengan Automatic Request Batching API untuk Amazon SQS.

## Periksa prasyarat

Anda perlu menggunakan SDK for Java 2.x versi 2.28.0 atau yang lebih baru untuk memiliki akses ke API batching. Maven Anda setidaknya `pom.xml` harus mengandung elemen-elemen berikut.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.amazon.awssdk</groupId>
            <artifactId>bom</artifactId>
            <version>2.28.23[1]</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.awssdk</groupId>
        <artifactId>sqs</artifactId>
    </dependency>
</dependencies>
```

[1] Versi terbaru

## Buat pengelola batch

API batching permintaan otomatis diimplementasikan oleh SqsAsyncBatchManagerantarmuka. Anda dapat membuat contoh manajer beberapa cara.

Konfigurasi default dengan menggunakan **`SqsAsyncClient`**

Cara paling sederhana Anda dapat membuat pengelola batch adalah dengan memanggil metode `batchManager` pabrik pada SqsAsyncClientinstance yang ada. Pendekatan sederhana ditunjukkan dalam cuplikan berikut.

```
SqsAsyncClient asyncClient = SqsAsyncClient.create();
SqsAsyncBatchManager sqsAsyncBatchManager = asyncClient.batchManager();
```

Bila Anda menggunakan pendekatan ini, `SqsAsyncBatchManager` instance menggunakan nilai default yang ditampilkan dalam tabel di the section called “Pengaturan konfigurasi” bagian. Selain itu, `SqsAsyncBatchManager` instance menggunakan `SqsAsyncClient` instance dari mana ia dibuat. `ExecutorService`

Konfigurasi kustom dengan menggunakan **`SqsAsyncBatchManager.Builder`**

Untuk kasus penggunaan yang lebih lanjut, Anda dapat menyesuaikan pengelola batch menggunakan file `SqsAsyncBatchManager.Builder`. Dengan menggunakan pendekatan ini untuk membuat `SqsAsyncBatchManager` instance, Anda dapat menyempurnakan perilaku batching. Cuplikan berikut menunjukkan contoh cara menggunakan builder untuk menyesuaikan perilaku batching.

```
SqsAsyncBatchManager batchManager = SqsAsyncBatchManager.builder()
    .client(SqsAsyncClient.create())
    .scheduledExecutor(Executors.newScheduledThreadPool(5))
    .overrideConfiguration(b -> b
        .receiveMessageMinWaitDuration(Duration.ofSeconds(10))
        .receiveMessageVisibilityTimeout(Duration.ofSeconds(1))
        .receiveMessageAttributeNames(Collections.singletonList("*"))

 .receiveMessageSystemAttributeNames(Collections.singletonList(MessageSystemAttributeName.ALL))
    .build();
```

Bila Anda menggunakan pendekatan ini, Anda dapat menyesuaikan pengaturan pada `BatchOverrideConfiguration` objek yang ditunjukkan pada tabel di the section called “Pengaturan konfigurasi” bagian. Anda juga dapat memberikan kustom `ScheduledExecutorService`untuk pengelola batch dengan menggunakan pendekatan ini.

## Kirim pesan

Untuk mengirim pesan dengan pengelola batch, gunakan `SqsAsyncBatchManager#sendMessage` metode ini. Buffer SDK meminta dan mengirimkannya sebagai batch saat `sendRequestFrequency` nilai `maxBatchSize` atau tercapai.

Contoh berikut menunjukkan `sendMessage` permintaan segera diikuti oleh permintaan lain. Dalam hal ini, SDK mengirim kedua pesan dalam satu batch.

```
// Sending the first message
CompletableFuture<SendMessageResponse> futureOne =
    sqsAsyncBatchManager.sendMessage(r -> r.messageBody("One").queueUrl("queue"));

// Sending the second message
CompletableFuture<SendMessageResponse> futureTwo =
    sqsAsyncBatchManager.sendMessage(r -> r.messageBody("Two").queueUrl("queue"));

// Waiting for both futures to complete and retrieving the responses
SendMessageResponse messageOne = futureOne.join();
SendMessageResponse messageTwo = futureTwo.join();
```

## Mengubah batas waktu visibilitas pesan

Anda dapat mengubah batas waktu visibilitas pesan dalam batch dengan menggunakan metode ini `SqsAsyncBatchManager#changeMessageVisibility`. Buffer SDK meminta dan mengirimkannya sebagai batch saat `sendRequestFrequency` nilai `maxBatchSize` atau tercapai.

Contoh berikut menunjukkan cara memanggil `changeMessageVisibility` metode.

```
CompletableFuture<ChangeMessageVisibilityResponse> futureOne =
    sqsAsyncBatchManager.changeMessageVisibility(r ->
        r.receiptHandle("receiptHandle")
         .queueUrl("queue"));
ChangeMessageVisibilityResponse response = futureOne.join();
```

## Hapus pesan

Anda dapat menghapus pesan dalam batch menggunakan `SqsAsyncBatchManager#deleteMessage`metode ini. Buffer SDK meminta dan mengirimkannya sebagai batch saat `sendRequestFrequency` nilai `maxBatchSize` atau tercapai.

Contoh berikut menunjukkan bagaimana Anda dapat memanggil `deleteMessage` metode.

```
CompletableFuture<DeleteMessageResponse> futureOne =
    sqsAsyncBatchManager.deleteMessage(r ->
        r.receiptHandle("receiptHandle")
         .queueUrl("queue"));
DeleteMessageResponse response = futureOne.join();
```

## Menerima pesan

### Gunakan pengaturan default

Saat Anda melakukan polling `SqsAsyncBatchManager#receiveMessage` metode dalam aplikasi Anda, pengelola batch mengambil pesan dari buffer internalnya, yang diperbarui secara otomatis oleh SDK di latar belakang.

Contoh berikut menunjukkan cara memanggil `receiveMessage` metode.

```
CompletableFuture<ReceiveMessageResponse> responseFuture =
    sqsAsyncBatchManager.receiveMessage(r -> r.queueUrl("queueUrl"));
```

### Gunakan pengaturan khusus

Jika Anda ingin menyesuaikan permintaan lebih lanjut, misalnya dengan menyetel waktu tunggu khusus dan menentukan jumlah pesan yang akan diambil, Anda dapat menyesuaikan permintaan seperti yang ditunjukkan pada contoh berikut.

```
CompletableFuture<ReceiveMessageResponse> response =
    sqsAsyncBatchManager.receiveMessage(r ->
        r.queueUrl("queueUrl")
         .waitTimeSeconds(5)
         .visibilityTimeout(20));
```

> **Note**
>
> Jika Anda memanggil `receiveMessage` dengan `ReceiveMessageRequest` yang menyertakan salah satu parameter berikut, SDK melewati pengelola batch dan mengirimkan permintaan `receiveMessage` asinkron reguler:
>
> - `messageAttributeNames`
> - `messageSystemAttributeNames`
> - `messageSystemAttributeNamesWithStrings`
> - `overrideConfiguration`

## Ganti pengaturan konfigurasi untuk **`SqsAsyncBatchManager`**

Anda dapat menyesuaikan pengaturan berikut saat membuat `SqsAsyncBatchManager` instance. Daftar pengaturan berikut tersedia di `BatchOverrideConfiguration.Builder`.

| Pengaturan | Deskripsi | Nilai default |
|---|---|---|
| `maxBatchSize` | Jumlah maksimum permintaan per batch untuk masing-masing `SendMessageBatchRequest` , `ChangeMessageVisibilityBatchRequest` , atau `DeleteMessageBatchRequest` . Nilai maksimumnya adalah 10. | 10 |
| `sendRequestFrequency` | Waktu sebelum mengirim batch, kecuali `maxBatchSize` tercapai lebih awal. Nilai yang lebih tinggi dapat mengurangi permintaan tetapi meningkatkan latensi. | 200ms |
| `receiveMessageVisibilityTimeout` | Batas waktu visibilitas untuk pesan. Jika tidak disetel, default antrian digunakan. | Antrian default |
| `receiveMessageMinWaitDuration` | Waktu tunggu minimum untuk `receiveMessage` permintaan. Hindari pengaturan ke 0 untuk mencegah pemborosan CPU. | 50ms |
| `receiveMessageSystemAttributeNames` | Daftar nama atribut sistem untuk meminta `receiveMessage` panggilan. | Tidak ada |

| Pengaturan | Deskripsi | Nilai default |
| --- | --- | --- |
| `receiveMessageAttributeNames` | Daftar nama atribut untuk meminta `receiveMessage` panggilan. | Tidak ada |

## Bekerja dengan Amazon Simple Queue Service antrian pesan

Antrian pesan adalah wadah logis yang digunakan untuk mengirim pesan dengan andal. Amazon Simple Queue Service Ada dua jenis antrian: standar dan first-in, first-out (FIFO). Untuk mempelajari lebih lanjut tentang antrian dan perbedaan di antara jenis-jenis ini, lihat Panduan Amazon Simple Queue Service Pengembang.

Topik ini menjelaskan cara membuat, membuat daftar, menghapus, dan mendapatkan URL Amazon Simple Queue Service antrian dengan menggunakan. AWS SDK untuk Java

`sqsClient`Variabel yang digunakan dalam contoh berikut dapat dibuat dari cuplikan berikut.

```
SqsClient sqsClient = SqsClient.create();
```

Bila Anda membuat `SqsClient` dengan menggunakan `create()` metode statis, SDK akan mengonfigurasi Region menggunakan rantai penyedia wilayah default dan kredensialnya menggunakan rantai penyedia kredensial default.

### Membuat antrean

Gunakan `SqsClient's` `createQueue` metode ini, dan berikan `CreateQueueRequest` objek yang menjelaskan parameter antrian seperti yang ditunjukkan pada cuplikan kode berikut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
            CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
```

```
                .queueName(queueName)
                .build();

            sqsClient.createQueue(createQueueRequest);
```

Lihat sampel lengkapnya di GitHub.

## Daftar antrian

Untuk membuat daftar Amazon Simple Queue Service antrian untuk akun Anda, panggil `SqsClient's` `listQueues` metode dengan `ListQueuesRequest` objek.

Bila Anda menggunakan bentuk `listQueues`metode yang tidak mengambil parameter, layanan mengembalikan semua antrian hingga 1.000 antrian.

Anda dapat memberikan awalan nama antrian ke `ListQueuesRequest` objek untuk membatasi hasil ke antrian yang cocok dengan awalan seperti yang ditunjukkan dalam kode berikut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
 ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
 sqsClient.listQueues(listQueuesRequest);

            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
```

Lihat sampel lengkapnya di GitHub.

## Dapatkan URL untuk antrian

Kode berikut menunjukkan cara mendapatkan URL untuk antrian dengan memanggil `SqsClient's` `getQueueUrl` metode dengan `GetQueueUrlRequest` objek.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
            GetQueueUrlResponse getQueueUrlResponse =

 sqsClient.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            String queueUrl = getQueueUrlResponse.queueUrl();
            return queueUrl;
```

Lihat sampel lengkapnya di GitHub.

## Hapus antrian

Berikan URL antrian ke `DeleteQueueRequest` objek. Kemudian panggil `SqsClient's` `deleteQueue` metode untuk menghapus antrian seperti yang ditunjukkan pada kode berikut.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
```

```
        try {

            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();

            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                    .queueUrl(queueUrl)
                    .build();

            sqsClient.deleteQueue(deleteQueueRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Lihat sampel lengkapnya di GitHub.

### Informasi selengkapnya

- CreateQueuedi Referensi Amazon Simple Queue Service API
- GetQueueUrldi Referensi Amazon Simple Queue Service API
- ListQueuesdi Referensi Amazon Simple Queue Service API
- DeleteQueuedi Referensi Amazon Simple Queue Service API

## Mengirim, menerima, dan menghapus Amazon Simple Queue Service pesan

Pesan adalah sepotong data yang dapat dikirim dan diterima oleh komponen terdistribusi. Pesan selalu dikirimkan menggunakan SQS Queue.

`sqsClient`Variabel yang digunakan dalam contoh berikut dapat dibuat dari cuplikan berikut.

```
SqsClient sqsClient = SqsClient.create();
```

Bila Anda membuat `SqsClient` dengan menggunakan `create()` metode statis, SDK akan mengonfigurasi Region menggunakan rantai penyedia wilayah default dan kredensialnya menggunakan rantai penyedia kredensial default.

## Kirim pesan

Tambahkan satu pesan ke Amazon Simple Queue Service antrian dengan memanggil `sendMessage` metode SqsClient klien. Berikan SendMessageRequestobjek yang berisi URL antrian, isi pesan, dan nilai penundaan opsional (dalam hitungan detik).

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
            sqsClient.sendMessage(SendMessageRequest.builder()
                .queueUrl(queueUrl)
                .messageBody("Hello world!")
                .delaySeconds(10)
                .build());

            sqsClient.sendMessage(sendMsgRequest);
```

## Kirim beberapa pesan dalam satu permintaan

Kirim lebih dari satu pesan dalam satu permintaan dengan menggunakan SqsClient `sendMessageBatch` metode ini. Metode ini mengambil SendMessageBatchRequestyang berisi URL antrian dan daftar pesan untuk dikirim. (Setiap pesan adalah a SendMessageBatchRequestEntry.) Anda juga dapat menunda pengiriman pesan tertentu dengan menetapkan nilai penundaan pada pesan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
```

```
import java.util.List;
```

Kode

```
            SendMessageBatchRequest sendMessageBatchRequest =
SendMessageBatchRequest.builder()
                .queueUrl(queueUrl)

.entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from msg
1").build(),

SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
2").delaySeconds(10).build())
                .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);
```

Lihat sampel lengkapnya di GitHub.

## Ambil Pesan

Ambil pesan apa pun yang saat ini berada dalam antrian dengan memanggil metode. SqsClient `receiveMessage` Metode ini mengambil ReceiveMessageRequestyang berisi URL antrian. Anda juga dapat menentukan jumlah maksimum pesan yang akan dikembalikan. Pesan dikembalikan sebagai daftar objek Pesan.

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                .queueUrl(queueUrl)
                .maxNumberOfMessages(5)
                .build();
            List<Message> messages =
sqsClient.receiveMessage(receiveMessageRequest).messages();
```

```
            return messages;
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
```

Lihat sampel lengkapnya di GitHub.

## Hapus pesan setelah diterima

Setelah menerima pesan dan memproses isinya, hapus pesan dari antrian dengan mengirimkan alamat tanda terima pesan dan URL antrian ke metode. `SqsClient's` `deleteMessage`

Impor

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.*;
import java.util.List;
```

Kode

```
        try {
            for (Message message : messages) {
                DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
```

Lihat sampel lengkapnya di GitHub.

## Info Selengkapnya

- Cara Kerja Amazon Simple Queue Service Antrian di Panduan Pengembang Amazon Simple Queue Service
- SendMessagedi Referensi Amazon Simple Queue Service API
- SendMessageBatchdi Referensi Amazon Simple Queue Service API

- ReceiveMessagedi Referensi Amazon Simple Queue Service API
- DeleteMessagedi Referensi Amazon Simple Queue Service API

# Bekerja dengan Amazon Transcribe

Contoh berikut menunjukkan cara kerja streaming dua arah menggunakan. Amazon Transcribe Streaming dua arah berarti bahwa ada aliran data yang masuk ke layanan dan diterima kembali secara real time. Contoh menggunakan transkripsi Amazon Transcribe streaming untuk mengirim aliran audio dan menerima aliran teks yang ditranskripsi kembali secara real time.

Lihat Transkripsi Streaming di Panduan Amazon Transcribe Pengembang untuk mempelajari lebih lanjut tentang fitur ini.

Lihat Memulai di Panduan Amazon Transcribe Pengembang untuk mulai menggunakan Amazon Transcribe.

## Siapkan mikrofon

Kode ini menggunakan paket javax.sound.sampled untuk mengalirkan audio dari perangkat input.

Kode

```
import javax.sound.sampled.AudioFormat;
import javax.sound.sampled.AudioSystem;
import javax.sound.sampled.DataLine;
import javax.sound.sampled.TargetDataLine;

public class Microphone {

    public static TargetDataLine get() throws Exception {
        AudioFormat format = new AudioFormat(16000, 16, 1, true, false);
        DataLine.Info datalineInfo = new DataLine.Info(TargetDataLine.class, format);

        TargetDataLine dataLine = (TargetDataLine) AudioSystem.getLine(datalineInfo);
        dataLine.open(format);

        return dataLine;
    }
}
```

Lihat contoh lengkapnya di GitHub.

# Buat penerbit

Kode ini mengimplementasikan penerbit yang menerbitkan data audio dari aliran audio. Amazon Transcribe

Kode

```
package com.amazonaws.transcribe;

import java.io.IOException;
import java.io.InputStream;
import java.io.UncheckedIOException;
import java.nio.ByteBuffer;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;
import java.util.concurrent.atomic.AtomicLong;
import org.reactivestreams.Publisher;
import org.reactivestreams.Subscriber;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.transcribestreaming.model.AudioEvent;
import software.amazon.awssdk.services.transcribestreaming.model.AudioStream;
import
 software.amazon.awssdk.services.transcribestreaming.model.TranscribeStreamingException;


public class AudioStreamPublisher implements Publisher<AudioStream> {
    private final InputStream inputStream;

    public AudioStreamPublisher(InputStream inputStream) {
        this.inputStream = inputStream;
    }

    @Override
    public void subscribe(Subscriber<? super AudioStream> s) {
        s.onSubscribe(new SubscriptionImpl(s, inputStream));
    }

    private class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);
```

```
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;

        private SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream
inputStream) {
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent = audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (TranscribeStreamingException e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {

        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];
```

```
            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

Lihat contoh lengkapnya di GitHub.

## Buat klien dan mulai streaming

Dalam metode utama, buat objek permintaan, mulai aliran input audio dan buat instance penerbit dengan input audio.

Anda juga harus membuat StartStreamTranscriptionResponseHandleruntuk menentukan cara menangani respons dari Amazon Transcribe.

Kemudian, gunakan `startStreamTranscription` metode ini untuk memulai streaming dua arah. TranscribeStreamingAsyncClient

Impor

```
import javax.sound.sampled.AudioFormat;
import javax.sound.sampled.AudioSystem;
import javax.sound.sampled.DataLine;
```

```
import javax.sound.sampled.TargetDataLine;
import javax.sound.sampled.AudioInputStream;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.transcribestreaming.TranscribeStreamingAsyncClient;
import
 software.amazon.awssdk.services.transcribestreaming.model.TranscribeStreamingException ;
import
 software.amazon.awssdk.services.transcribestreaming.model.StartStreamTranscriptionRequest;
import software.amazon.awssdk.services.transcribestreaming.model.MediaEncoding;
import software.amazon.awssdk.services.transcribestreaming.model.LanguageCode;
import
 software.amazon.awssdk.services.transcribestreaming.model.StartStreamTranscriptionResponseHand
import software.amazon.awssdk.services.transcribestreaming.model.TranscriptEvent;
```

## Kode

```
   public static void convertAudio(TranscribeStreamingAsyncClient client) throws
Exception {

       try {

           StartStreamTranscriptionRequest request =
StartStreamTranscriptionRequest.builder()
                   .mediaEncoding(MediaEncoding.PCM)
                   .languageCode(LanguageCode.EN_US)
                   .mediaSampleRateHertz(16_000).build();

           TargetDataLine mic = Microphone.get();
           mic.start();

           AudioStreamPublisher publisher = new AudioStreamPublisher(new
AudioInputStream(mic));

           StartStreamTranscriptionResponseHandler response =
                   StartStreamTranscriptionResponseHandler.builder().subscriber(e -> {
                       TranscriptEvent event = (TranscriptEvent) e;
                       event.transcript().results().forEach(r ->
r.alternatives().forEach(a -> System.out.println(a.transcript())));
                   }).build();

           // Keeps Streaming until you end the Java program
           client.startStreamTranscription(request, publisher, response);
```

```
        } catch (TranscribeStreamingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
         }
    }
```

Lihat contoh lengkapnya di GitHub.

## Informasi selengkapnya

- Cara Kerjanya di Panduan Amazon Transcribe Pengembang.
- Memulai Dengan Streaming Audio di Panduan Amazon Transcribe Pengembang.

# Contoh kode SDK for Java 2.x

Contoh kode dalam topik ini menunjukkan cara menggunakan AWS SDK for Java 2.x with AWS.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Beberapa layanan berisi kategori contoh tambahan yang menunjukkan cara memanfaatkan pustaka atau fungsi khusus untuk layanan.

Layanan

- Contoh ACM menggunakan SDK for Java 2.x
- Contoh API Gateway menggunakan SDK for Java 2.x
- Contoh Application Auto Scaling menggunakan SDK for Java 2.x
- Contoh Pengontrol Pemulihan Aplikasi menggunakan SDK for Java 2.x
- Contoh Aurora menggunakan SDK for Java 2.x
- Contoh Auto Scaling menggunakan SDK for Java 2.x
- AWS Batch contoh menggunakan SDK for Java 2.x
- Contoh Amazon Bedrock menggunakan SDK for Java 2.x
- Contoh Amazon Bedrock Runtime menggunakan SDK for Java 2.x
- CloudFront contoh menggunakan SDK for Java 2.x
- CloudWatch contoh menggunakan SDK for Java 2.x
- CloudWatch Contoh acara menggunakan SDK for Java 2.x
- CloudWatch Contoh log menggunakan SDK for Java 2.x
- Contoh Identitas Amazon Cognito menggunakan SDK for Java 2.x
- Contoh Penyedia Identitas Amazon Cognito menggunakan SDK for Java 2.x
- Amazon Comprehend contoh menggunakan SDK for Java 2.x

- AWS Control Tower contoh menggunakan SDK for Java 2.x
- Contoh Firehose menggunakan SDK for Java 2.x
- Contoh Amazon DocumentDB menggunakan SDK for Java 2.x
- Contoh DynamoDB menggunakan SDK for Java 2.x
- Contoh Amazon EC2 menggunakan SDK for Java 2.x
- Contoh Amazon ECR menggunakan SDK for Java 2.x
- Contoh Amazon ECS menggunakan SDK for Java 2.x
- Elastic Load Balancing - Contoh Versi 2 menggunakan SDK for Java 2.x
- MediaStore contoh menggunakan SDK for Java 2.x
- Resolusi Entitas AWS contoh menggunakan SDK for Java 2.x
- OpenSearch Contoh layanan menggunakan SDK for Java 2.x
- EventBridge contoh menggunakan SDK for Java 2.x
- EventBridge Contoh penjadwal menggunakan SDK for Java 2.x
- Contoh Forecast menggunakan SDK for Java 2.x
- Contoh Amazon Glacier menggunakan SDK for Java 2.x
- AWS Glue contoh menggunakan SDK for Java 2.x
- HealthImaging contoh menggunakan SDK for Java 2.x
- Contoh IAM menggunakan SDK for Java 2.x
- Contoh Amazon Inspector menggunakan SDK for Java 2.x
- AWS IoT contoh menggunakan SDK for Java 2.x
- AWS IoT data contoh menggunakan SDK for Java 2.x
- AWS IoT FleetWise contoh menggunakan SDK for Java 2.x
- AWS IoT SiteWise contoh menggunakan SDK for Java 2.x
- Contoh Amazon Keyspaces menggunakan SDK for Java 2.x
- Contoh Kinesis menggunakan SDK for Java 2.x
- AWS KMS contoh menggunakan SDK for Java 2.x
- Contoh Lambda menggunakan SDK for Java 2.x
- Contoh Amazon Lex menggunakan SDK for Java 2.x
- Contoh Lokasi Amazon menggunakan SDK for Java 2.x
- Contoh Location Service Places menggunakan SDK for Java 2.x

- AWS Marketplace Contoh API Katalog menggunakan SDK for Java 2.x
- AWS Marketplace Contoh API perjanjian menggunakan SDK for Java 2.x
- MediaConvert contoh menggunakan SDK for Java 2.x
- Contoh Migration Hub menggunakan SDK for Java 2.x
- Contoh MSK Amazon menggunakan SDK for Java 2.x
- Contoh Neptunus menggunakan SDK for Java 2.x
- Contoh Partner Central menggunakan SDK for Java 2.x
- Amazon Personalisasi contoh menggunakan SDK for Java 2.x
- Amazon Personalize Events contoh menggunakan SDK for Java 2.x
- Amazon Personalisasi contoh Runtime menggunakan SDK for Java 2.x
- Amazon Pinpoint contoh menggunakan SDK for Java 2.x
- Amazon Pinpoint SMS dan Voice API contoh menggunakan SDK for Java 2.x
- Contoh Amazon Polly menggunakan SDK for Java 2.x
- Contoh Amazon RDS menggunakan SDK for Java 2.x
- Contoh Amazon RDS Data Service menggunakan SDK for Java 2.x
- Contoh Amazon Redshift menggunakan SDK for Java 2.x
- Contoh Amazon Rekognition menggunakan SDK for Java 2.x
- Route 53 contoh pendaftaran domain menggunakan SDK for Java 2.x
- Contoh Amazon S3 menggunakan SDK for Java 2.x
- Contoh Kontrol Amazon S3 menggunakan SDK for Java 2.x
- Contoh Bucket Direktori S3 menggunakan SDK for Java 2.x
- SageMaker Contoh AI menggunakan SDK for Java 2.x
- Secrets Manager contoh menggunakan SDK for Java 2.x
- Amazon SES contoh menggunakan SDK for Java 2.x
- Amazon SES API v2 contoh menggunakan SDK for Java 2.x
- Contoh Amazon SNS menggunakan SDK for Java 2.x
- Contoh Amazon SQS menggunakan SDK for Java 2.x
- Contoh Step Functions menggunakan SDK for Java 2.x
- AWS STS contoh menggunakan SDK for Java 2.x
- Dukungan contoh menggunakan SDK for Java 2.x

- Contoh Systems Manager menggunakan SDK for Java 2.x
- Contoh Amazon Texttract menggunakan SDK for Java 2.x
- Contoh Amazon Transcribe menggunakan SDK for Java 2.x
- Contoh Streaming Amazon Transcribe menggunakan SDK for Java 2.x
- Contoh Amazon Translate menggunakan SDK for Java 2.x

# Contoh ACM menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan ACM AWS SDK for Java 2.x with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `AddTagsToCertificate`

Contoh kode berikut menunjukkan cara menggunakan`AddTagsToCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddTagsToCertificate {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        addTags(certArn);
    }

    /**
     * Adds tags to a certificate in AWS Certificate Manager (ACM).
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to add tags
 to
     */
    public static void addTags(String certArn) {
        AcmClient acmClient = AcmClient.create();
        List<Tag> expectedTags =
 List.of(Tag.builder().key("key").value("value").build());
        AddTagsToCertificateRequest addTagsToCertificateRequest =
 AddTagsToCertificateRequest.builder()
            .certificateArn(certArn)
            .tags(expectedTags)
            .build();

        try {
            acmClient.addTagsToCertificate(addTagsToCertificateRequest);
            System.out.println("Successfully added tags to a certificate");
```

```
        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat AddTagsToCertificatedi Referensi AWS SDK for Java 2.x API.

### `DeleteCertificate`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
```

```
        }

        String certArn = args[0];
        deleteCertificate(certArn);
    }

    /**
     * Deletes an SSL/TLS certificate from the AWS Certificate Manager (ACM).
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to be
 deleted
     */
    public static void deleteCertificate( String certArn) {
        AcmClient acmClient = AcmClient.create();
        DeleteCertificateRequest request = DeleteCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
            acmClient.deleteCertificate(request);
            System.out.println("The certificate was deleted");

        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat DeleteCertificatedi Referensi AWS SDK for Java 2.x API.

### `DescribeCertificate`

Contoh kode berikut menunjukkan cara menggunakan`DescribeCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DescribeCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        describeCertificate(certArn);
    }

    /**
     * Describes the details of an SSL/TLS certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate to describe
     * @throws AcmException if an error occurs while describing the certificate
     */
    public static void describeCertificate(String certArn) {
        AcmClient acmClient = AcmClient.create();
        DescribeCertificateRequest req = DescribeCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
```

```
            DescribeCertificateResponse response =
 acmClient.describeCertificate(req);

            // Print the certificate details.
            System.out.println("Certificate ARN: " +
 response.certificate().certificateArn());
            System.out.println("Domain Name: " +
 response.certificate().domainName());
            System.out.println("Issued By: " + response.certificate().issuer());
            System.out.println("Issued On: " + response.certificate().issuedAt());
            System.out.println("Status: " + response.certificate().status());
        } catch (AcmException e) {
            System.out.println(e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat DescribeCertificatedi Referensi AWS SDK for Java 2.x API.

### `ExportCertificate`

Contoh kode berikut menunjukkan cara menggunakan`ExportCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ExportCertificate {
```

```
   public static void main(String[] args) throws Exception {
       final String usage = """

           Usage:    <certArn>

           Where:
               certArn - the ARN of the certificate.
           """;
       if (args.length != 1) {
           System.out.println(usage);
           return;
       }

       String certArn = args[0];
       exportCert(certArn);
   }

   /**
    * Exports an SSL/TLS certificate and its associated private key and certificate
chain from AWS Certificate Manager (ACM).
    *
    * @param certArn The Amazon Resource Name (ARN) of the certificate that you
want to export.
    * @throws IOException If an I/O error occurs while reading the private key
passphrase file or exporting the certificate.
    */
   public static void exportCert(String certArn) throws IOException {
       AcmClient acmClient = AcmClient.create();

       // Initialize a file descriptor for the passphrase file.
       RandomAccessFile filePassphrase = null;
       ByteBuffer bufPassphrase = null;

       // Create a file stream for reading the private key passphrase.
       try {
           filePassphrase = new RandomAccessFile("C:\\AWS\\password.txt", "r");
       } catch (IllegalArgumentException | SecurityException |
FileNotFoundException ex) {
           throw ex;
       }

       // Create a channel to map the file.
       FileChannel channelPassphrase = filePassphrase.getChannel();
```

```
        // Map the file to the buffer.
        try {
            bufPassphrase = channelPassphrase.map(FileChannel.MapMode.READ_ONLY, 0,
 channelPassphrase.size());
            channelPassphrase.close();
            filePassphrase.close();
        } catch (IOException ex) {
            throw ex;
        }

        // Create a request object.
        ExportCertificateRequest req = ExportCertificateRequest.builder()
            .certificateArn(certArn)
            .passphrase(SdkBytes.fromByteBuffer(bufPassphrase))
            .build();

        // Export the certificate.
        ExportCertificateResponse result = null;
        try {
            result = acmClient.exportCertificate(req);
        } catch (InvalidArnException | InvalidTagException |
 ResourceNotFoundException ex) {
            throw ex;
        }

        // Clear the buffer.
        bufPassphrase.clear();

        // Display the certificate and certificate chain.
        String certificate = result.certificate();
        System.out.println(certificate);

        String certificateChain = result.certificateChain();
        System.out.println(certificateChain);

        // This example retrieves but does not display the private key.
        String privateKey = result.privateKey();
        System.out.println("The example is complete");
    }
}
```

- Untuk detail API, lihat ExportCertificatedi Referensi AWS SDK for Java 2.x API.

### `ImportCertificate`

Contoh kode berikut menunjukkan cara menggunakan`ImportCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ImportCert {

    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <certificateKey> <privateKeyKey>

            Where:
                bucketName - The name of the S3 bucket containing the certificate
 and private key.
                certificateKey - The object key for the SSL/TLS certificate file in
 S3.
                privateKeyKey - The object key for the private key file in S3.
            """;

        if (args.length != 3) {
            System.out.println(usage);
            return;
        }

        String bucketName = args[0];
        String certificateKey = args[1];
        String privateKeyKey = args[2];
```

```
        String certificateArn = importCertificate(bucketName, certificateKey,
privateKeyKey);
        System.out.println("Certificate imported with ARN: " + certificateArn);
    }

    /**
     * Imports an SSL/TLS certificate and private key from S3 into AWS Certificate
Manager (ACM).
     *
     * @param bucketName     The name of the S3 bucket.
     * @param certificateKey The key for the SSL/TLS certificate file in S3.
     * @param privateKeyKey  The key for the private key file in S3.
     * @return The ARN of the imported certificate.
     */
    public static String importCertificate(String bucketName, String certificateKey,
String privateKeyKey) {
        AcmClient acmClient = AcmClient.create();
        S3Client s3Client = S3Client.create();

        try {
            byte[] certificateBytes = downloadFileFromS3(s3Client, bucketName,
certificateKey);
            byte[] privateKeyBytes = downloadFileFromS3(s3Client, bucketName,
privateKeyKey);

            ImportCertificateRequest request = ImportCertificateRequest.builder()

.certificate(SdkBytes.fromByteBuffer(ByteBuffer.wrap(certificateBytes)))

.privateKey(SdkBytes.fromByteBuffer(ByteBuffer.wrap(privateKeyBytes)))
                    .build();

            ImportCertificateResponse response =
acmClient.importCertificate(request);
            return response.certificateArn();

        } catch (IOException e) {
            System.err.println("Error downloading certificate or private key from
S3: " + e.getMessage());
        } catch (S3Exception e) {
            System.err.println("S3 error: " + e.awsErrorDetails().errorMessage());
        }
        return "";
    }
```

```
    /**
     * Downloads a file from Amazon S3 and returns its contents as a byte array.
     *
     * @param s3Client   The S3 client.
     * @param bucketName The name of the S3 bucket.
     * @param objectKey  The key of the object in S3.
     * @return The file contents as a byte array.
     * @throws IOException If an I/O error occurs.
     */
    private static byte[] downloadFileFromS3(S3Client s3Client, String bucketName,
 String objectKey) throws IOException {
        GetObjectRequest getObjectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

        try (ResponseInputStream<GetObjectResponse> s3Object =
 s3Client.getObject(getObjectRequest);
             ByteArrayOutputStream byteArrayOutputStream = new
 ByteArrayOutputStream()) {
            IoUtils.copy(s3Object, byteArrayOutputStream);
            return byteArrayOutputStream.toByteArray();
        }
    }
}
```

- Untuk detail API, lihat ImportCertificatedi Referensi AWS SDK for Java 2.x API.

### `ListCertificates`

Contoh kode berikut menunjukkan cara menggunakan`ListCertificates`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCerts {
    public static void main(String[] args) {
        listCertificates();
    }

    /**
     * Lists all the certificates managed by AWS Certificate Manager (ACM) that have
 a status of "ISSUED".
     */
    public static void listCertificates() {
        AcmClient acmClient = AcmClient.create();
        try {
            ListCertificatesRequest listRequest = ListCertificatesRequest.builder()
                .certificateStatuses(CertificateStatus.ISSUED)
                .maxItems(100)
                .build();
            ListCertificatesIterable listResponse =
 acmClient.listCertificatesPaginator(listRequest);

            // Print the certificate details using streams
            listResponse.certificateSummaryList().stream()
                .forEach(certificate -> {
                    System.out.println("Certificate ARN: " +
 certificate.certificateArn());
                    System.out.println("Certificate Domain Name: " +
 certificate.domainName());
                    System.out.println("Certificate Status: " +
 certificate.statusAsString());
                    System.out.println("---");
                });

        } catch (AcmException e) {
            System.err.println(e.getMessage());
        }
    }
```

```
}
```

- Untuk detail API, lihat ListCertificatesdi Referensi AWS SDK for Java 2.x API.

### `ListTagsForCertificate`

Contoh kode berikut menunjukkan cara menggunakan`ListTagsForCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCertTags {

    public static void main(String[] args) {

        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }
```

```
        String certArn = args[0];
        listCertTags(certArn);
    }

    /**
     * Lists the tags associated with an AWS Certificate Manager (ACM) certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the ACM certificate
     */
    public static void listCertTags(String certArn) {
        AcmClient acmClient = AcmClient.create();

        ListTagsForCertificateRequest request =
 ListTagsForCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        ListTagsForCertificateResponse response =
 acmClient.listTagsForCertificate(request);
        List<Tag> tagList = response.tags();
        tagList.forEach(tag -> {
            System.out.println("Key: " + tag.key());
            System.out.println("Value: " + tag.value());
        });
    }
}
```

- Untuk detail API, lihat ListTagsForCertificatedi Referensi AWS SDK for Java 2.x API.

### `RemoveTagsFromCertificate`

Contoh kode berikut menunjukkan cara menggunakan`RemoveTagsFromCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class RemoveTagsFromCert {

    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>

            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        removeTags(certArn);
    }

    /**
     * Removes tags from an AWS Certificate Manager (ACM) certificate.
     *
     * @param certArn the Amazon Resource Name (ARN) of the certificate from which
 to remove tags
     */
    public static void removeTags(String certArn) {
        AcmClient acmClient = AcmClient.create();
        List<Tag> expectedTags =
 List.of(Tag.builder().key("key").value("value").build());
        RemoveTagsFromCertificateRequest req =
 RemoveTagsFromCertificateRequest.builder()
            .certificateArn(certArn)
            .tags(expectedTags)
```

```
            .build();

        try {
            acmClient.removeTagsFromCertificate(req);
            System.out.println("Successfully removed tags from the certificate");
        } catch (AcmException e) {
            System.err.println(e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat RemoveTagsFromCertificatedi Referensi AWS SDK for Java 2.x API.

### `RenewCertificate`

Contoh kode berikut menunjukkan cara menggunakan`RenewCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class RenewCert {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <certArn>
```

```
            Where:
                certArn - the ARN of the certificate.
            """;
        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String certArn = args[0];
        renewCertificate(certArn);
    }

    /**
     * Renews an existing SSL/TLS certificate in AWS Certificate Manager (ACM).
     *
     * @param certArn The Amazon Resource Name (ARN) of the certificate to be
 renewed.
     * @throws AcmException If there is an error renewing the certificate.
     */
    public static void renewCertificate(String certArn) {
        AcmClient acmClient = AcmClient.create();

        RenewCertificateRequest certificateRequest =
 RenewCertificateRequest.builder()
            .certificateArn(certArn)
            .build();

        try {
            acmClient.renewCertificate(certificateRequest);
            System.out.println("The certificate was renewed");
        } catch(AcmException e){
            System.out.println(e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat RenewCertificatedi Referensi AWS SDK for Java 2.x API.

### `RequestCertificate`

Contoh kode berikut menunjukkan cara menggunakan`RequestCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RequestCert {

    public static void main(String[] args) {
        requestCertificate();
    }

    /**
     * Requests a certificate from the AWS Certificate Manager (ACM) service.
     */
    public static void requestCertificate() {
        AcmClient acmClient = AcmClient.create();
        ArrayList<String> san = new ArrayList<>();
        san.add("www.example.com");

        RequestCertificateRequest req = RequestCertificateRequest.builder()
            .domainName("example.com")
            .idempotencyToken("1Aq25pTy")
            .subjectAlternativeNames(san)
            .build();

        try {
            RequestCertificateResponse response = acmClient.requestCertificate(req);
            System.out.println("Cert ARN IS " + response.certificateArn());
        } catch (AcmException e) {
            System.err.println(e.getMessage());
```

```
        }
    }
}
```

- Untuk detail API, lihat RequestCertificatedi Referensi AWS SDK for Java 2.x API.

# Contoh API Gateway menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan API Gateway AWS SDK for Java 2.x with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

AWS kontribusi komunitas adalah contoh yang dibuat dan dikelola oleh banyak tim AWS. Untuk memberikan umpan balik, gunakan mekanisme yang disediakan di repositori terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario
- AWS kontribusi komunitas

## Tindakan

### `CreateDeployment`

Contoh kode berikut menunjukkan cara menggunakan`CreateDeployment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createNewDeployment(ApiGatewayClient apiGateway, String
restApiId, String stageName) {

       try {
           CreateDeploymentRequest request = CreateDeploymentRequest.builder()
                   .restApiId(restApiId)
                   .description("Created using the AWS API Gateway Java API")
                   .stageName(stageName)
                   .build();

           CreateDeploymentResponse response =
apiGateway.createDeployment(request);
           System.out.println("The id of the deployment is " + response.id());
           return response.id();

       } catch (ApiGatewayException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat CreateDeploymentdi Referensi AWS SDK for Java 2.x API.

### `CreateRestApi`

Contoh kode berikut menunjukkan cara menggunakan`CreateRestApi`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createAPI(ApiGatewayClient apiGateway, String restApiId,
String restApiName) {

        try {
            CreateRestApiRequest request = CreateRestApiRequest.builder()
                    .cloneFrom(restApiId)
                    .description("Created using the Gateway Java API")
                    .name(restApiName)
                    .build();

            CreateRestApiResponse response = apiGateway.createRestApi(request);
            System.out.println("The id of the new api is " + response.id());
            return response.id();

        } catch (ApiGatewayException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
   }
```

- Untuk detail API, lihat CreateRestApidi Referensi AWS SDK for Java 2.x API.

### `DeleteDeployment`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDeployment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteSpecificDeployment(ApiGatewayClient apiGateway, String
restApiId, String deploymentId) {

       try {
           DeleteDeploymentRequest request = DeleteDeploymentRequest.builder()
                   .restApiId(restApiId)
                   .deploymentId(deploymentId)
                   .build();

           apiGateway.deleteDeployment(request);
           System.out.println("Deployment was deleted");

       } catch (ApiGatewayException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DeleteDeploymentdi Referensi AWS SDK for Java 2.x API.

### `DeleteRestApi`

Contoh kode berikut menunjukkan cara menggunakan`DeleteRestApi`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteAPI(ApiGatewayClient apiGateway, String restApiId) {

        try {
            DeleteRestApiRequest request = DeleteRestApiRequest.builder()
                    .restApiId(restApiId)
                    .build();

            apiGateway.deleteRestApi(request);
            System.out.println("The API was successfully deleted");

        } catch (ApiGatewayException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DeleteRestApidi Referensi AWS SDK for Java 2.x API.

## Skenario

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda

- Amazon Rekognition
- Amazon S3
- Amazon SNS

Menggunakan API Gateway untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh Amazon API Gateway.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi dengan menggunakan Lambda Java runtime API. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat fungsi Lambda yang diinvokasi oleh Amazon API Gateway yang memindai peringatan hari jadi kerja di tabel Amazon DynamoDB dan menggunakan Amazon Simple Notification Service (Amazon SNS) untuk mengirim pesan teks berisi ucapan selamat kepada karyawan Anda pada tanggal hari jadi kerja satu tahun mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

## AWS kontribusi komunitas

Membangun dan menguji aplikasi tanpa server

Contoh kode berikut menunjukkan cara membangun dan menguji aplikasi tanpa server menggunakan API Gateway dengan Lambda dan DynamoDB

SDK untuk Java 2.x

Menunjukkan cara membangun dan menguji aplikasi tanpa server yang terdiri dari API Gateway dengan Lambda dan DynamoDB menggunakan Java SDK.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda

# Contoh Application Auto Scaling menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Application Auto Scaling AWS SDK for Java 2.x with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `DeleteScalingPolicy`

Contoh kode berikut menunjukkan cara menggunakan`DeleteScalingPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import
 software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ApplicationAutoScalingExceptio
import
 software.amazon.awssdk.services.applicationautoscaling.model.DeleteScalingPolicyRequest;
import
 software.amazon.awssdk.services.applicationautoscaling.model.DeregisterScalableTargetReques
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.ScalableDimension;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ServiceNamespace;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DisableDynamoDBAutoscaling {
    public static void main(String[] args) {
        final String usage = """

            Usage:
               <tableId> <policyName>\s

            Where:
               tableId - The table Id value (for example, table/Music).\s
               policyName - The name of the policy (for example, $Music5-scaling-
policy).

            """;
        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        ApplicationAutoScalingClient appAutoScalingClient =
ApplicationAutoScalingClient.builder()
            .region(Region.US_EAST_1)
            .build();

        ServiceNamespace ns = ServiceNamespace.DYNAMODB;
        ScalableDimension tableWCUs =
ScalableDimension.DYNAMODB_TABLE_WRITE_CAPACITY_UNITS;
        String tableId = args[0];
        String policyName = args[1];

        deletePolicy(appAutoScalingClient, policyName, tableWCUs, ns, tableId);
        verifyScalingPolicies(appAutoScalingClient, tableId, ns, tableWCUs);
        deregisterScalableTarget(appAutoScalingClient, tableId, ns, tableWCUs);
        verifyTarget(appAutoScalingClient, tableId, ns, tableWCUs);
    }

    public static void deletePolicy(ApplicationAutoScalingClient
appAutoScalingClient, String policyName, ScalableDimension tableWCUs,
ServiceNamespace ns, String tableId) {
        try {
            DeleteScalingPolicyRequest delSPRequest =
DeleteScalingPolicyRequest.builder()
                .policyName(policyName)
                .scalableDimension(tableWCUs)
                .serviceNamespace(ns)
                .resourceId(tableId)
                .build();

            appAutoScalingClient.deleteScalingPolicy(delSPRequest);
            System.out.println(policyName +" was deleted successfully.");

        } catch (ApplicationAutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Verify that the scaling policy was deleted
```

```
   public static void verifyScalingPolicies(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       DescribeScalingPoliciesRequest dscRequest =
DescribeScalingPoliciesRequest.builder()
           .scalableDimension(tableWCUs)
           .serviceNamespace(ns)
           .resourceId(tableId)
           .build();

       DescribeScalingPoliciesResponse response =
appAutoScalingClient.describeScalingPolicies(dscRequest);
       System.out.println("DescribeScalableTargets result: ");
       System.out.println(response);
   }

   public static void deregisterScalableTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       try {
           DeregisterScalableTargetRequest targetRequest =
DeregisterScalableTargetRequest.builder()
               .scalableDimension(tableWCUs)
               .serviceNamespace(ns)
               .resourceId(tableId)
               .build();

           appAutoScalingClient.deregisterScalableTarget(targetRequest);
           System.out.println("The scalable target was deregistered.");

       } catch (ApplicationAutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
       }
   }

   public static void verifyTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
       DescribeScalableTargetsRequest dscRequest =
DescribeScalableTargetsRequest.builder()
           .scalableDimension(tableWCUs)
           .serviceNamespace(ns)
           .resourceIds(tableId)
           .build();
```

```
        DescribeScalableTargetsResponse response =
 appAutoScalingClient.describeScalableTargets(dscRequest);
        System.out.println("DescribeScalableTargets result: ");
        System.out.println(response);
    }
}
```

- Untuk detail API, lihat DeleteScalingPolicydi Referensi AWS SDK for Java 2.x API.

### `RegisterScalableTarget`

Contoh kode berikut menunjukkan cara menggunakan`RegisterScalableTarget`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ApplicationAutoScalingExceptio
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalableTargetsRespons
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRequest
import
 software.amazon.awssdk.services.applicationautoscaling.model.DescribeScalingPoliciesRespons
import software.amazon.awssdk.services.applicationautoscaling.model.PolicyType;
import
 software.amazon.awssdk.services.applicationautoscaling.model.PredefinedMetricSpecification;
import
 software.amazon.awssdk.services.applicationautoscaling.model.PutScalingPolicyRequest;
```

```
import
 software.amazon.awssdk.services.applicationautoscaling.model.RegisterScalableTargetRequest;
import software.amazon.awssdk.services.applicationautoscaling.model.ScalingPolicy;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ServiceNamespace;
import
 software.amazon.awssdk.services.applicationautoscaling.model.ScalableDimension;
import software.amazon.awssdk.services.applicationautoscaling.model.MetricType;
import
 software.amazon.awssdk.services.applicationautoscaling.model.TargetTrackingScalingPolicyCon
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnableDynamoDBAutoscaling {
    public static void main(String[] args) {
        final String usage = """

            Usage:
               <tableId> <roleARN> <policyName>\s

            Where:
               tableId - The table Id value (for example, table/Music).
               roleARN - The ARN of the role that has ApplicationAutoScaling
 permissions.
               policyName - The name of the policy to create.

            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        System.out.println("This example registers an Amazon DynamoDB table, which
 is the resource to scale.");
        String tableId = args[0];
        String roleARN = args[1];
```

```
        String policyName = args[2];
        ServiceNamespace ns = ServiceNamespace.DYNAMODB;
        ScalableDimension tableWCUs =
ScalableDimension.DYNAMODB_TABLE_WRITE_CAPACITY_UNITS;
        ApplicationAutoScalingClient appAutoScalingClient =
ApplicationAutoScalingClient.builder()
            .region(Region.US_EAST_1)
            .build();

        registerScalableTarget(appAutoScalingClient, tableId, roleARN, ns,
tableWCUs);
        verifyTarget(appAutoScalingClient, tableId, ns, tableWCUs);
        configureScalingPolicy(appAutoScalingClient, tableId, ns, tableWCUs,
policyName);
    }

    public static void registerScalableTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, String roleARN, ServiceNamespace ns,
ScalableDimension tableWCUs) {
        try {
            RegisterScalableTargetRequest targetRequest =
RegisterScalableTargetRequest.builder()
                .serviceNamespace(ns)
                .scalableDimension(tableWCUs)
                .resourceId(tableId)
                .roleARN(roleARN)
                .minCapacity(5)
                .maxCapacity(10)
                .build();

            appAutoScalingClient.registerScalableTarget(targetRequest);
            System.out.println("You have registered " + tableId);

        } catch (ApplicationAutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Verify that the target was created.
    public static void verifyTarget(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs) {
        DescribeScalableTargetsRequest dscRequest =
DescribeScalableTargetsRequest.builder()
```

```
            .scalableDimension(tableWCUs)
            .serviceNamespace(ns)
            .resourceIds(tableId)
            .build();

        DescribeScalableTargetsResponse response =
appAutoScalingClient.describeScalableTargets(dscRequest);
        System.out.println("DescribeScalableTargets result: ");
        System.out.println(response);
    }

    // Configure a scaling policy.
    public static void configureScalingPolicy(ApplicationAutoScalingClient
appAutoScalingClient, String tableId, ServiceNamespace ns, ScalableDimension
tableWCUs, String policyName) {
        // Check if the policy exists before creating a new one.
        DescribeScalingPoliciesResponse describeScalingPoliciesResponse =
appAutoScalingClient.describeScalingPolicies(DescribeScalingPoliciesRequest.builder()
            .serviceNamespace(ns)
            .resourceId(tableId)
            .scalableDimension(tableWCUs)
            .build());

        if (!describeScalingPoliciesResponse.scalingPolicies().isEmpty()) {
            // If policies exist, consider updating an existing policy instead of
creating a new one.
            System.out.println("Policy already exists. Consider updating it
instead.");
            List<ScalingPolicy> polList =
describeScalingPoliciesResponse.scalingPolicies();
            for (ScalingPolicy pol : polList) {
                System.out.println("Policy name:" +pol.policyName());
            }
        } else {
            // If no policies exist, proceed with creating a new policy.
            PredefinedMetricSpecification specification =
PredefinedMetricSpecification.builder()

.predefinedMetricType(MetricType.DYNAMO_DB_WRITE_CAPACITY_UTILIZATION)
                .build();

            TargetTrackingScalingPolicyConfiguration policyConfiguration =
TargetTrackingScalingPolicyConfiguration.builder()
                .predefinedMetricSpecification(specification)
```

```
                .targetValue(50.0)
                .scaleInCooldown(60)
                .scaleOutCooldown(60)
                .build();

            PutScalingPolicyRequest putScalingPolicyRequest =
 PutScalingPolicyRequest.builder()
                .targetTrackingScalingPolicyConfiguration(policyConfiguration)
                .serviceNamespace(ns)
                .scalableDimension(tableWCUs)
                .resourceId(tableId)
                .policyName(policyName)
                .policyType(PolicyType.TARGET_TRACKING_SCALING)
                .build();

            try {
                appAutoScalingClient.putScalingPolicy(putScalingPolicyRequest);
                System.out.println("You have successfully created a scaling policy
 for an Application Auto Scaling scalable target");
            } catch (ApplicationAutoScalingException e) {
                System.err.println("Error: " + e.awsErrorDetails().errorMessage());
            }
        }
    }
}
```

- Untuk detail API, lihat RegisterScalableTargetdi Referensi AWS SDK for Java 2.x API.

# Contoh Pengontrol Pemulihan Aplikasi menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda bagaimana melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan Application Recovery Controller.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


## Tindakan

### `GetRoutingControlState`

Contoh kode berikut menunjukkan cara menggunakan`GetRoutingControlState`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static GetRoutingControlStateResponse
 getRoutingControlState(List<ClusterEndpoint> clusterEndpoints,
            String routingControlArn) {
        // As a best practice, we recommend choosing a random cluster endpoint to
 get or
        // set routing control states.
        // For more information, see
        // https://docs.aws.amazon.com/r53recovery/latest/dg/route53-arc-best-
practices.html#route53-arc-best-practices.regional
        Collections.shuffle(clusterEndpoints);
        for (ClusterEndpoint clusterEndpoint : clusterEndpoints) {
            try {
                System.out.println(clusterEndpoint);
                Route53RecoveryClusterClient client =
 Route53RecoveryClusterClient.builder()
                        .endpointOverride(URI.create(clusterEndpoint.endpoint()))
                        .region(Region.of(clusterEndpoint.region())).build();
                return client.getRoutingControlState(
                        GetRoutingControlStateRequest.builder()
                                .routingControlArn(routingControlArn).build());
```

```
            } catch (Exception exception) {
                System.out.println(exception);
            }
        }
        return null;
    }
```

- Untuk detail API, lihat GetRoutingControlStatedi Referensi AWS SDK for Java 2.x API.

### `UpdateRoutingControlState`

Contoh kode berikut menunjukkan cara menggunakan`UpdateRoutingControlState`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static UpdateRoutingControlStateResponse
 updateRoutingControlState(List<ClusterEndpoint> clusterEndpoints,
            String routingControlArn,
            String routingControlState) {
        // As a best practice, we recommend choosing a random cluster endpoint to
 get or
        // set routing control states.
        // For more information, see
        // https://docs.aws.amazon.com/r53recovery/latest/dg/route53-arc-best-
practices.html#route53-arc-best-practices.regional
        Collections.shuffle(clusterEndpoints);
        for (ClusterEndpoint clusterEndpoint : clusterEndpoints) {
            try {
                System.out.println(clusterEndpoint);
                Route53RecoveryClusterClient client =
 Route53RecoveryClusterClient.builder()
                        .endpointOverride(URI.create(clusterEndpoint.endpoint()))
                        .region(Region.of(clusterEndpoint.region()))
                        .build();
```

```
                return client.updateRoutingControlState(
                        UpdateRoutingControlStateRequest.builder()

.routingControlArn(routingControlArn).routingControlState(routingControlState).build());
            } catch (Exception exception) {
                System.out.println(exception);
            }
        }
        return null;
    }
```

- Untuk detail API, lihat UpdateRoutingControlStatedi Referensi AWS SDK for Java 2.x API.

# Contoh Aurora menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan AWS SDK for Java 2.x with Aurora.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario

# Memulai

## Halo Aurora

Contoh kode berikut menunjukkan bagaimana memulai menggunakan Aurora.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.paginators.DescribeDBClustersIterable;

public class DescribeDbClusters {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeClusters(rdsClient);
        rdsClient.close();
    }

    public static void describeClusters(RdsClient rdsClient) {
        DescribeDBClustersIterable clustersIterable =
 rdsClient.describeDBClustersPaginator();
        clustersIterable.stream()
                .flatMap(r -> r.dbClusters().stream())
                .forEach(cluster -> System.out
                        .println("Database name: " + cluster.databaseName() + " Arn
 = " + cluster.dbClusterArn()));
    }
}
```

- Untuk detail API, lihat Menjelaskan DBClusters di Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

## Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Membuat grup parameter klaster DB Aurora dan mengatur nilai parameter.
- Membuat klaster DB yang menggunakan grup parameter.
- Membuat instans DB yang berisi basis data.
- Mengambil snapshot klaster DB, lalu membersihkan sumber daya.

### SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Gets available engine families for Amazon Aurora MySQL-Compatible Edition
 * by calling the DescribeDbEngineVersions(Engine='aurora-mysql') method.
 * 2. Selects an engine family and creates a custom DB cluster parameter group
 * by invoking the describeDBClusterParameters method.
```

```
 * 3. Gets the parameter groups by invoking the describeDBClusterParameterGroups
 * method.
 * 4. Gets parameters in the group by invoking the describeDBClusterParameters
 * method.
 * 5. Modifies the auto_increment_offset parameter by invoking the
 * modifyDbClusterParameterGroupRequest method.
 * 6. Gets and displays the updated parameters.
 * 7. Gets a list of allowed engine versions by invoking the
 * describeDbEngineVersions method.
 * 8. Creates an Aurora DB cluster database cluster that contains a MySQL
 * database.
 * 9. Waits for DB instance to be ready.
 * 10. Gets a list of instance classes available for the selected engine.
 * 11. Creates a database instance in the cluster.
 * 12. Waits for DB instance to be ready.
 * 13. Creates a snapshot.
 * 14. Waits for DB snapshot to be ready.
 * 15. Deletes the DB cluster.
 * 16. Deletes the DB cluster group.
 */
public class AuroraScenario {
    public static long sleepTime = 20;
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = "\n" +
                "Usage:\n" +
                "    <dbClusterGroupName> <dbParameterGroupFamily>
 <dbInstanceClusterIdentifier> <dbInstanceIdentifier> <dbName>
 <dbSnapshotIdentifier><secretName>"
                +
                "Where:\n" +
                "    dbClusterGroupName - The name of the DB cluster parameter
 group. \n" +
                "    dbParameterGroupFamily - The DB cluster parameter group family
 name (for example, aurora-mysql5.7). \n"
                +
                "    dbInstanceClusterIdentifier - The instance cluster identifier
 value.\n" +
                "    dbInstanceIdentifier - The database instance identifier.\n" +
                "    dbName - The database name.\n" +
                "    dbSnapshotIdentifier - The snapshot identifier.\n" +
                "    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials\"\n";
```

```
        ;

        if (args.length != 7) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbClusterGroupName = args[0];
        String dbParameterGroupFamily = args[1];
        String dbInstanceClusterIdentifier = args[2];
        String dbInstanceIdentifier = args[3];
        String dbName = args[4];
        String dbSnapshotIdentifier = args[5];
        String secretName = args[6];

        // Retrieve the database credentials using AWS Secrets Manager.
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        String username = user.getUsername();
        String userPassword = user.getPassword();

        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Aurora example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Return a list of the available DB engines");
        describeDBEngines(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a custom parameter group");
        createDBClusterParameterGroup(rdsClient, dbClusterGroupName,
dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Get the parameter group");
```

```
        describeDbClusterParameterGroups(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the parameters in the group");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, 0);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Modify the auto_increment_offset parameter");
        modifyDBClusterParas(rdsClient, dbClusterGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Display the updated parameter value");
        describeDbClusterParameters(rdsClient, dbClusterGroupName, -1);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Get a list of allowed engine versions");
        getAllowedEngines(rdsClient, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Create an Aurora DB cluster database");
        String arnClusterVal = createDBCluster(rdsClient, dbClusterGroupName,
dbName, dbInstanceClusterIdentifier,
                username, userPassword);
        System.out.println("The ARN of the cluster is " + arnClusterVal);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Wait for DB instance to be ready");
        waitForInstanceReady(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a list of instance classes available for the
selected engine");
        String instanceClass = getListInstanceClasses(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Create a database instance in the cluster.");
```

```
        String clusterDBARN = createDBInstanceCluster(rdsClient,
dbInstanceIdentifier, dbInstanceClusterIdentifier,
                instanceClass);
        System.out.println("The ARN of the database is " + clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Wait for DB instance to be ready");
        waitDBInstanceReady(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Create a snapshot");
        createDBClusterSnapshot(rdsClient, dbInstanceClusterIdentifier,
dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Wait for DB snapshot to be ready");
        waitForSnapshotReady(rdsClient, dbSnapshotIdentifier,
dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Delete the DB instance");
        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("15. Delete the DB cluster");
        deleteCluster(rdsClient, dbInstanceClusterIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("16. Delete the DB cluster group");
        deleteDBClusterGroup(rdsClient, dbClusterGroupName, clusterDBARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);
        rdsClient.close();
    }
```

```
   private static SecretsManagerClient getSecretClient() {
       Region region = Region.US_WEST_2;
       return SecretsManagerClient.builder()
               .region(region)

.credentialsProvider(EnvironmentVariableCredentialsProvider.create())
               .build();
   }

   private static String getSecretValues(String secretName) {
       SecretsManagerClient secretClient = getSecretClient();
       GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
               .secretId(secretName)
               .build();

       GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
       return valueResponse.secretString();
   }

   public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(clusterDBARN) == 0) {
                       System.out.println(clusterDBARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
```

```
                        // Went through the entire list and did not find the
database ARN.
                        isDataDel = true;
                    }
                    Thread.sleep(sleepTime * 1000);
                    index++;
                }
            }

            DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                    .builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .build();

            rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
            System.out.println(dbClusterGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
        try {
            DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .skipFinalSnapshot(true)
                    .build();

            rdsClient.deleteDBCluster(deleteDbClusterRequest);
            System.out.println(dbInstanceClusterIdentifier + " was deleted!");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
```

```
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();

            DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.println("The status of the database is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
            String dbInstanceClusterIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");

            DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbClusterSnapshotsResponse response =
rdsClient.describeDBClusterSnapshots(snapshotsRequest);
                List<DBClusterSnapshot> snapshotList =
response.dbClusterSnapshots();
                for (DBClusterSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.println(".");
```

```
                    Thread.sleep(sleepTime * 5000);
                }
            }
        }

        System.out.println("The Snapshot is available!");

    } catch (RdsException | InterruptedException e) {
        System.out.println(e.getLocalizedMessage());
        System.exit(1);
    }
}

public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
        String dbSnapshotIdentifier) {
    try {
        CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                .dbClusterIdentifier(dbInstanceClusterIdentifier)
                .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                .build();

        CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
        System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());

    } catch (RdsException e) {
        System.out.println(e.getLocalizedMessage());
        System.exit(1);
    }
}

public static void waitDBInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
    boolean instanceReady = false;
    String instanceReadyStr;
    System.out.println("Waiting for instance to become available.");
    try {
        DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                .dbInstanceIdentifier(dbInstanceIdentifier)
                .build();
```

```
            String endpoint = "";
            while (!instanceReady) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
                    if (instanceReadyStr.contains("available")) {
                        endpoint = instance.endpoint().address();
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database instance is available! The connection
endpoint is " + endpoint);

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBInstanceCluster(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbInstanceClusterIdentifier,
            String instanceClass) {
        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .engine("aurora-mysql")
                    .dbInstanceClass(instanceClass)
                    .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
            return response.dbInstance().dbInstanceArn();
```

```
        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    public static String getListInstanceClasses(RdsClient rdsClient) {
        try {
            DescribeOrderableDbInstanceOptionsRequest optionsRequest =
DescribeOrderableDbInstanceOptionsRequest
                    .builder()
                    .engine("aurora-mysql")
                    .maxRecords(20)
                    .build();

            DescribeOrderableDbInstanceOptionsResponse response = rdsClient
                    .describeOrderableDBInstanceOptions(optionsRequest);
            List<OrderableDBInstanceOption> instanceOptions =
response.orderableDBInstanceOptions();
            String instanceClass = "";
            for (OrderableDBInstanceOption instanceOption : instanceOptions) {
                instanceClass = instanceOption.dbInstanceClass();
                System.out.println("The instance class is " +
instanceOption.dbInstanceClass());
                System.out.println("The engine version is " +
instanceOption.engineVersion());
            }
            return instanceClass;

        } catch (RdsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
```

```
        try {
            DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .build();

            while (!instanceReady) {
                DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
                List<DBCluster> clusterList = response.dbClusters();
                for (DBCluster cluster : clusterList) {
                    instanceReadyStr = cluster.status();
                    if (instanceReadyStr.contains("available")) {
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database cluster is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
            String dbClusterIdentifier, String userName, String password) {
        try {
            CreateDbClusterRequest clusterRequest = CreateDbClusterRequest.builder()
                    .databaseName(dbName)
                    .dbClusterIdentifier(dbClusterIdentifier)
                    .dbClusterParameterGroupName(dbParameterGroupFamily)
                    .engine("aurora-mysql")
                    .masterUsername(userName)
                    .masterUserPassword(password)
                    .build();

            CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
            return response.dbCluster().dbClusterArn();
```

```
        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    // Get a list of allowed engine versions.
    public static void getAllowedEngines(RdsClient rdsClient, String
dbParameterGroupFamily) {
        try {
            DescribeDbEngineVersionsRequest versionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .engine("aurora-mysql")
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(versionsRequest);
            List<DBEngineVersion> dbEngines = response.dbEngineVersions();
            for (DBEngineVersion dbEngine : dbEngines) {
                System.out.println("The engine version is " +
dbEngine.engineVersion());
                System.out.println("The engine description is " +
dbEngine.dbEngineDescription());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Modify the auto_increment_offset parameter.
    public static void modifyDBClusterParas(RdsClient rdsClient, String
dClusterGroupName) {
        try {
            Parameter parameter1 = Parameter.builder()
                    .parameterName("auto_increment_offset")
                    .applyMethod("immediate")
                    .parameterValue("5")
                    .build();
```

```
            List<Parameter> paraList = new ArrayList<>();
            paraList.add(parameter1);
            ModifyDbClusterParameterGroupRequest groupRequest =
ModifyDbClusterParameterGroupRequest.builder()
                    .dbClusterParameterGroupName(dClusterGroupName)
                    .parameters(paraList)
                    .build();

            ModifyDbClusterParameterGroupResponse response =
rdsClient.modifyDBClusterParameterGroup(groupRequest);
            System.out.println(
                    "The parameter group " + response.dbClusterParameterGroupName()
+ " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
        try {
            DescribeDbClusterParametersRequest dbParameterGroupsRequest;
            if (flag == 0) {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .build();
            } else {
                dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                        .dbClusterParameterGroupName(dbCLusterGroupName)
                        .source("user")
                        .build();
            }

            DescribeDbClusterParametersResponse response = rdsClient
                    .describeDBClusterParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset or
                // auto_increment_increment.
```

```
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") == 0)) {
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
        try {
            DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                    .dbClusterParameterGroupName(dbClusterGroupName)
                    .maxRecords(20)
                    .build();

            List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                    .dbClusterParameterGroups();
            for (DBClusterParameterGroup group : groups) {
                System.out.println("The group name is " +
group.dbClusterParameterGroupName());
                System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
```

```
   }

   public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
           String dbParameterGroupFamily) {
       try {
           CreateDbClusterParameterGroupRequest groupRequest =
CreateDbClusterParameterGroupRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .description("Created by using the AWS SDK for Java")
                   .build();

           CreateDbClusterParameterGroupResponse response =
rdsClient.createDBClusterParameterGroup(groupRequest);
           System.out.println("The group name is " +
response.dbClusterParameterGroup().dbClusterParameterGroupName());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   public static void describeDBEngines(RdsClient rdsClient) {
       try {
           DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .engine("aurora-mysql")
                   .defaultOnly(true)
                   .maxRecords(20)
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
           List<DBEngineVersion> engines = response.dbEngineVersions();

           // Get all DBEngineVersion objects.
           for (DBEngineVersion engineOb : engines) {
               System.out.println("The name of the DB parameter group family for
the database engine is "
                       + engineOb.dbParameterGroupFamily());
               System.out.println("The name of the database engine " +
engineOb.engine());
```

```
                System.out.println("The version number of the database engine " +
 engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - Buat DBCluster
  - Buat DBCluster ParameterGroup
  - Buat DBCluster Snapshot
  - Buat DBInstance
  - Hapus DBCluster
  - Hapus DBCluster ParameterGroup
  - Hapus DBInstance
  - Jelaskan DBCluster ParameterGroups
  - Jelaskan DBCluster Parameter
  - Jelaskan DBCluster Snapshots
  - Jelaskan DBClusters
  - Jelaskan DBEngine Versi
  - Jelaskan DBInstances
  - DescribeOrderableDBInstancePilihan
  - Memodifikasi DBCluster ParameterGroup

## Tindakan

### `CreateDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createDBCluster(RdsClient rdsClient, String
dbParameterGroupFamily, String dbName,
           String dbClusterIdentifier, String userName, String password) {
       try {
           CreateDbClusterRequest clusterRequest = CreateDbClusterRequest.builder()
                   .databaseName(dbName)
                   .dbClusterIdentifier(dbClusterIdentifier)
                   .dbClusterParameterGroupName(dbParameterGroupFamily)
                   .engine("aurora-mysql")
                   .masterUsername(userName)
                   .masterUserPassword(password)
                   .build();

           CreateDbClusterResponse response =
rdsClient.createDBCluster(clusterRequest);
           return response.dbCluster().dbClusterArn();

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat Membuat DBCluster di Referensi AWS SDK for Java 2.x API.

### `CreateDBClusterParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBClusterParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void createDBClusterParameterGroup(RdsClient rdsClient, String
dbClusterGroupName,
           String dbParameterGroupFamily) {
       try {
           CreateDbClusterParameterGroupRequest groupRequest =
CreateDbClusterParameterGroupRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .description("Created by using the AWS SDK for Java")
                   .build();

           CreateDbClusterParameterGroupResponse response =
rdsClient.createDBClusterParameterGroup(groupRequest);
           System.out.println("The group name is " +
response.dbClusterParameterGroup().dbClusterParameterGroupName());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Membuat DBCluster ParameterGroup di Referensi AWS SDK for Java 2.x API.

### `CreateDBClusterSnapshot`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBClusterSnapshot`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void createDBClusterSnapshot(RdsClient rdsClient, String
dbInstanceClusterIdentifier,
           String dbSnapshotIdentifier) {
       try {
           CreateDbClusterSnapshotRequest snapshotRequest =
CreateDbClusterSnapshotRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                   .build();

           CreateDbClusterSnapshotResponse response =
rdsClient.createDBClusterSnapshot(snapshotRequest);
           System.out.println("The Snapshot ARN is " +
response.dbClusterSnapshot().dbClusterSnapshotArn());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Membuat DBCluster Snapshot di Referensi AWS SDK for Java 2.x API.

### `CreateDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createDBInstanceCluster(RdsClient rdsClient,
           String dbInstanceIdentifier,
           String dbInstanceClusterIdentifier,
           String instanceClass) {
       try {
           CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .engine("aurora-mysql")
                   .dbInstanceClass(instanceClass)
                   .build();

           CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
           System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
           return response.dbInstance().dbInstanceArn();

       } catch (RdsException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat Membuat DBInstance di Referensi AWS SDK for Java 2.x API.

### `DeleteDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteCluster(RdsClient rdsClient, String
dbInstanceClusterIdentifier) {
       try {
           DeleteDbClusterRequest deleteDbClusterRequest =
DeleteDbClusterRequest.builder()
                   .dbClusterIdentifier(dbInstanceClusterIdentifier)
                   .skipFinalSnapshot(true)
                   .build();

           rdsClient.deleteDBCluster(deleteDbClusterRequest);
           System.out.println(dbInstanceClusterIdentifier + " was deleted!");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Menghapus DBCluster di Referensi AWS SDK for Java 2.x API.

### `DeleteDBClusterParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBClusterParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteDBClusterGroup(RdsClient rdsClient, String
dbClusterGroupName, String clusterDBARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(clusterDBARN) == 0) {
                       System.out.println(clusterDBARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
                       // Went through the entire list and did not find the
database ARN.
                       isDataDel = true;
                   }
                   Thread.sleep(sleepTime * 1000);
                   index++;
               }
           }

           DeleteDbClusterParameterGroupRequest clusterParameterGroupRequest =
DeleteDbClusterParameterGroupRequest
                   .builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .build();

           rdsClient.deleteDBClusterParameterGroup(clusterParameterGroupRequest);
           System.out.println(dbClusterGroupName + " was deleted.");

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
```

```
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menghapus DBCluster ParameterGroup di Referensi AWS SDK for Java 2.x API.

### `DeleteDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
       try {
           DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
                   .dbInstanceIdentifier(dbInstanceIdentifier)
                   .deleteAutomatedBackups(true)
                   .skipFinalSnapshot(true)
                   .build();

           DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
           System.out.println("The status of the database is " +
response.dbInstance().dbInstanceStatus());

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Menghapus DBInstance di Referensi AWS SDK for Java 2.x API.

### `DescribeDBClusterParameterGroups`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBClusterParameterGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Menjelaskan DBCluster ParameterGroups di Referensi AWS SDK for Java 2.x API.

### `DescribeDBClusterParameters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBClusterParameters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbClusterParametersResponse response = rdsClient
                   .describeDBClusterParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
```

```
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBCluster Parameter di Referensi AWS SDK for Java 2.x API.

### `DescribeDBClusterSnapshots`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBClusterSnapshots`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbSnapshotIdentifier,
            String dbInstanceClusterIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");
```

```
            DescribeDbClusterSnapshotsRequest snapshotsRequest =
DescribeDbClusterSnapshotsRequest.builder()
                    .dbClusterSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbClusterIdentifier(dbInstanceClusterIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbClusterSnapshotsResponse response =
rdsClient.describeDBClusterSnapshots(snapshotsRequest);
                List<DBClusterSnapshot> snapshotList =
response.dbClusterSnapshots();
                for (DBClusterSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.println(".");
                        Thread.sleep(sleepTime * 5000);
                    }
                }
            }

            System.out.println("The Snapshot is available!");

        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBCluster Snapshot di Referensi AWS SDK for Java 2.x API.

### `DescribeDBClusters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBClusters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDbClusterParameters(RdsClient rdsClient, String
dbCLusterGroupName, int flag) {
       try {
           DescribeDbClusterParametersRequest dbParameterGroupsRequest;
           if (flag == 0) {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .build();
           } else {
               dbParameterGroupsRequest =
DescribeDbClusterParametersRequest.builder()
                       .dbClusterParameterGroupName(dbCLusterGroupName)
                       .source("user")
                       .build();
           }

           DescribeDbClusterParametersResponse response = rdsClient
                   .describeDBClusterParameters(dbParameterGroupsRequest);
           List<Parameter> dbParameters = response.parameters();
           String paraName;
           for (Parameter para : dbParameters) {
               // Only print out information about either auto_increment_offset or
               // auto_increment_increment.
               paraName = para.parameterName();
               if ((paraName.compareTo("auto_increment_offset") == 0)
                       || (paraName.compareTo("auto_increment_increment ") == 0)) {
                   System.out.println("*** The parameter name is  " + paraName);
                   System.out.println("*** The parameter value is  " +
para.parameterValue());
                   System.out.println("*** The parameter data type is " +
para.dataType());
                   System.out.println("*** The parameter description is " +
para.description());
```

```
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBClusters di Referensi AWS SDK for Java 2.x API.

### `DescribeDBEngineVersions`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBEngineVersions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
```

```
                System.out.println("The name of the DB parameter group family for
the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
engineOb.engine());
                System.out.println("The version number of the database engine " +
engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBEngine Versi dalam Referensi AWS SDK for Java 2.x API.

### `DescribeDBInstances`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbClusterIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbClustersRequest instanceRequest =
DescribeDbClustersRequest.builder()
                    .dbClusterIdentifier(dbClusterIdentifier)
```

```
                    .build();

            while (!instanceReady) {
                DescribeDbClustersResponse response =
rdsClient.describeDBClusters(instanceRequest);
                List<DBCluster> clusterList = response.dbClusters();
                for (DBCluster cluster : clusterList) {
                    instanceReadyStr = cluster.status();
                    if (instanceReadyStr.contains("available")) {
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database cluster is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBInstances di Referensi AWS SDK for Java 2.x API.

### `DescribeOrderableDBInstanceOptions`

Contoh kode berikut menunjukkan cara menggunakan`DescribeOrderableDBInstanceOptions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void describeDBEngines(RdsClient rdsClient) {
        try {
```

```
            DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                    .engine("aurora-mysql")
                    .defaultOnly(true)
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
engineOb.engine());
                System.out.println("The version number of the database engine " +
engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DescribeOrderableDBInstanceOpsi di Referensi AWS SDK for Java 2.x API.

### `ModifyDBClusterParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`ModifyDBClusterParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDbClusterParameterGroups(RdsClient rdsClient, String
dbClusterGroupName) {
       try {
           DescribeDbClusterParameterGroupsRequest groupsRequest =
DescribeDbClusterParameterGroupsRequest.builder()
                   .dbClusterParameterGroupName(dbClusterGroupName)
                   .maxRecords(20)
                   .build();

           List<DBClusterParameterGroup> groups =
rdsClient.describeDBClusterParameterGroups(groupsRequest)
                   .dbClusterParameterGroups();
           for (DBClusterParameterGroup group : groups) {
               System.out.println("The group name is " +
group.dbClusterParameterGroupName());
               System.out.println("The group ARN is " +
group.dbClusterParameterGroupArn());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Memodifikasi DBCluster ParameterGroup dalam Referensi AWS SDK for Java 2.x API.

## Skenario

Buat pelacak butir kerja Aurora Nirserver

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item pekerjaan dalam database Amazon Aurora Tanpa Server dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan butir kerja yang tersimpan dalam basis data Amazon RDS.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Aurora Tanpa Server dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Untuk kode sumber lengkap dan instruksi tentang cara menyiapkan dan menjalankan contoh yang menggunakan JDBC API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Aurora
- Amazon RDS
- Layanan Data Amazon RDS
- Amazon SES

# Contoh Auto Scaling menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Auto Scaling AWS SDK for Java 2.x with.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


## Memulai

Halo Auto Scaling

Contoh kode berikut menunjukkan cara memulai menggunakan Auto Scaling.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingGroup;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import java.util.List;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAutoScalingGroups {
    public static void main(String[] args) throws InterruptedException {
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        describeGroups(autoScalingClient);
    }

    public static void describeGroups(AutoScalingClient autoScalingClient) {
        DescribeAutoScalingGroupsResponse response =
 autoScalingClient.describeAutoScalingGroups();
        List<AutoScalingGroup> groups = response.autoScalingGroups();
        groups.forEach(group -> {
            System.out.println("Group Name: " + group.autoScalingGroupName());
            System.out.println("Group ARN: " + group.autoScalingGroupARN());
        });
    }
}
```

- Untuk detail API, lihat DescribeAutoScalingGroupsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat grup Amazon EC2 Auto Scaling dengan template peluncuran dan Availability Zone, dan dapatkan informasi tentang menjalankan instans.
- Aktifkan pengumpulan CloudWatch metrik Amazon.
- Perbarui kapasitas yang diinginkan grup dan tunggu instance dimulai.
- Mengakhiri sebuah instance dalam grup.
- Buat daftar aktivitas penskalaan yang terjadi sebagai respons terhadap permintaan pengguna dan perubahan kapasitas.
- Dapatkan statistik untuk CloudWatch metrik, lalu bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, create a launch template. For more information, see the
 * following topic:
 *
 * https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ec2-launch-
templates.html#create-launch-template
 *
 * This code example performs the following operations:
 * 1. Creates an Auto Scaling group using an AutoScalingWaiter.
 * 2. Gets a specific Auto Scaling group and returns an instance Id value.
 * 3. Describes Auto Scaling with the Id value.
 * 4. Enables metrics collection.
 * 5. Update an Auto Scaling group.
 * 6. Describes Account details.
 * 7. Describe account details"
 * 8. Updates an Auto Scaling group to use an additional instance.
 * 9. Gets the specific Auto Scaling group and gets the number of instances.
 * 10. List the scaling activities that have occurred for the group.
 * 11. Terminates an instance in the Auto Scaling group.
 * 12. Stops the metrics collection.
 * 13. Deletes the Auto Scaling group.
 */

public class AutoScalingScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String ROLES_STACK = "MyCdkAutoScaleStack";
    public static void main(String[] args) throws InterruptedException {
```

```
        final String usage = """

                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        String groupName = "MyAutoScalingGroup2";
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_WEST_2)
                .build();

        Ec2Client ec2 = Ec2Client.builder()
                .region(Region.US_WEST_2)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon EC2 Auto Scaling example
scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("First, we will create a launch template using a
CloudFormation script");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String launchTemplateName = stackOutputs.get("LaunchTemplateNameOutput");
        String vpcZoneId = getVPC(ec2);
        updateTemlate(ec2, launchTemplateName );
        System.out.println("The VPC zone id created by the CloudFormation stack
is"+vpcZoneId);

        System.out.println("1. Create an Auto Scaling group named " + groupName);
        createAutoScalingGroup(autoScalingClient, ec2, groupName,
launchTemplateName, vpcZoneId);

        System.out.println(
                "Wait 1 min for the resources, including the instance. Otherwise, an
empty instance Id is returned");
        Thread.sleep(60000);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("2. Get Auto Scale group Id value");
        String instanceId = getSpecificAutoScalingGroups(autoScalingClient,
groupName);
        if (instanceId.compareTo("") == 0) {
            System.out.println("Error - no instance Id value");
            System.exit(1);
        } else {
            System.out.println("The instance Id value is " + instanceId);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Describe Auto Scaling with the Id value " +
instanceId);
        describeAutoScalingInstance(autoScalingClient, instanceId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Enable metrics collection " + instanceId);
        enableMetricsCollection(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Update an Auto Scaling group to update max size to
3");
        updateAutoScalingGroup(autoScalingClient, groupName, launchTemplateName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Describe Auto Scaling groups");
        describeAutoScalingGroups(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Describe account details");
        describeAccountLimits(autoScalingClient);
        System.out.println(
                "Wait 1 min for the resources, including the instance. Otherwise, an
empty instance Id is returned");
        Thread.sleep(60000);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("8. Set desired capacity to 2");
        setDesiredCapacity(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get the two instance Id values and state");
        getSpecificAutoScalingGroups(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. List the scaling activities that have occurred for
the group");
        describeScalingActivities(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Terminate an instance in the Auto Scaling group");
        terminateInstanceInAutoScalingGroup(autoScalingClient, instanceId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Stop the metrics collection");
        disableMetricsCollection(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Delete the Auto Scaling group and cloud formation
resources");
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        deleteAutoScalingGroup(autoScalingClient, groupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);

        autoScalingClient.close();
    }

    public static String getVPC(Ec2Client ec2) {
        try {
            DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                    .filters(f -> f.name("isDefault").values("true"))
```

```
                    .build();

            DescribeVpcsResponse response = ec2.describeVpcs(request);

            if (!response.vpcs().isEmpty()) {
                Vpc defaultVpc = response.vpcs().get(0);
                System.out.println("Default VPC ID: " + defaultVpc.vpcId());
                return defaultVpc.vpcId();
            } else {
                System.out.println("No default VPC found.");
                return null; // Return null if no default VPC is found
            }

        } catch (Ec2Exception e) {
            System.err.println("EC2 error: " + e.awsErrorDetails().errorMessage());
            return null; // Return null in case of an error
        }
    }


    public static void updateTemlate(Ec2Client ec2, String launchTemplateName ) {
        // Step 1: Create new launch template version
        String newAmiId = "ami-0025f0db847eb6254";
        RequestLaunchTemplateData launchTemplateData =
RequestLaunchTemplateData.builder()
                .imageId(newAmiId)
                .build();

        CreateLaunchTemplateVersionRequest createVersionRequest =
CreateLaunchTemplateVersionRequest.builder()
                .launchTemplateName(launchTemplateName)
                .versionDescription("Updated with valid AMI")
                .sourceVersion("1")
                .launchTemplateData(launchTemplateData)
                .build();

        CreateLaunchTemplateVersionResponse createResponse =
ec2.createLaunchTemplateVersion(createVersionRequest);
        int newVersionNumber =
createResponse.launchTemplateVersion().versionNumber().intValue();

        // Step 2: Modify default version
        ModifyLaunchTemplateRequest modifyRequest =
ModifyLaunchTemplateRequest.builder()
```

```
                .launchTemplateName(launchTemplateName)
                .defaultVersion(String.valueOf(newVersionNumber))
                .build();

        ec2.modifyLaunchTemplate(modifyRequest);
        System.out.println("Updated launch template to version " + newVersionNumber
+ " with AMI " + newAmiId);
    }


    public static void describeScalingActivities(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            DescribeScalingActivitiesRequest scalingActivitiesRequest =
DescribeScalingActivitiesRequest.builder()
                    .autoScalingGroupName(groupName)
                    .maxRecords(10)
                    .build();

            DescribeScalingActivitiesResponse response = autoScalingClient
                    .describeScalingActivities(scalingActivitiesRequest);
            List<Activity> activities = response.activities();
            for (Activity activity : activities) {
                System.out.println("The activity Id is " + activity.activityId());
                System.out.println("The activity details are " +
activity.details());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void setDesiredCapacity(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            SetDesiredCapacityRequest capacityRequest =
SetDesiredCapacityRequest.builder()
                    .autoScalingGroupName(groupName)
                    .desiredCapacity(2)
                    .build();

            autoScalingClient.setDesiredCapacity(capacityRequest);
```

```
            System.out.println("You have set the DesiredCapacity to 2");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createAutoScalingGroup(AutoScalingClient autoScalingClient,
                                               Ec2Client ec2Client,
                                               String groupName,
                                               String launchTemplateName,
                                               String vpcId) {
        try {
            // Step 1: Get one subnet ID in the given VPC
            DescribeSubnetsRequest subnetRequest = DescribeSubnetsRequest.builder()
                    .filters(Filter.builder().name("vpc-id").values(vpcId).build())
                    .build();

            DescribeSubnetsResponse subnetResponse =
ec2Client.describeSubnets(subnetRequest);

            if (subnetResponse.subnets().isEmpty()) {
                throw new RuntimeException("No subnets found in VPC: " + vpcId);
            }

            String subnetId = subnetResponse.subnets().get(0).subnetId(); // Use
first subnet
            System.out.println("Using subnet: " + subnetId);

            // Step 2: Create launch template reference
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            // Step 3: Create Auto Scaling group
            CreateAutoScalingGroupRequest request =
CreateAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .launchTemplate(templateSpecification)
                    .minSize(1)
                    .maxSize(1)
                    .vpcZoneIdentifier(subnetId)  // Correct: subnet ID, not VPC ID
```

```
                    .build();

            autoScalingClient.createAutoScalingGroup(request);

            // Step 4: Wait until group is created
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
                    waiter.waitUntilGroupExists(groupsRequest);

            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Auto Scaling Group created");

        } catch (Ec2Exception | AutoScalingException e) {
            System.err.println("Error: " + e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeAutoScalingInstance(AutoScalingClient
autoScalingClient, String id) {
        try {
            DescribeAutoScalingInstancesRequest describeAutoScalingInstancesRequest
= DescribeAutoScalingInstancesRequest
                    .builder()
                    .instanceIds(id)
                    .build();

            DescribeAutoScalingInstancesResponse response = autoScalingClient

.describeAutoScalingInstances(describeAutoScalingInstancesRequest);
            List<AutoScalingInstanceDetails> instances =
response.autoScalingInstances();
            for (AutoScalingInstanceDetails instance : instances) {
                System.out.println("The instance lifecycle state is: " +
instance.lifecycleState());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }

    public static void describeAutoScalingGroups(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .maxRecords(10)
                    .build();

            DescribeAutoScalingGroupsResponse response =
autoScalingClient.describeAutoScalingGroups(groupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("*** The service to use for the health checks: "
+ group.healthCheckType());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSpecificAutoScalingGroups(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            String instanceId = "";
            DescribeAutoScalingGroupsRequest scalingGroupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            DescribeAutoScalingGroupsResponse response = autoScalingClient
                    .describeAutoScalingGroups(scalingGroupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("The group name is " +
group.autoScalingGroupName());
                System.out.println("The group ARN is " +
group.autoScalingGroupARN());
```

```
                List<Instance> instances = group.instances();

                for (Instance instance : instances) {
                    instanceId = instance.instanceId();
                    System.out.println("The instance id is " + instanceId);
                    System.out.println("The lifecycle state is " +
instance.lifecycleState());
                }
            }

            return instanceId;
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void enableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            EnableMetricsCollectionRequest collectionRequest =
EnableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
                    .metrics("GroupMaxSize")
                    .granularity("1Minute")
                    .build();

            autoScalingClient.enableMetricsCollection(collectionRequest);
            System.out.println("The enable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void disableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DisableMetricsCollectionRequest disableMetricsCollectionRequest =
DisableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
```

```
                    .metrics("GroupMaxSize")
                    .build();


autoScalingClient.disableMetricsCollection(disableMetricsCollectionRequest);
            System.out.println("The disable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeAccountLimits(AutoScalingClient autoScalingClient) {
        try {
            DescribeAccountLimitsResponse response =
autoScalingClient.describeAccountLimits();
            System.out.println("The max number of auto scaling groups is " +
response.maxNumberOfAutoScalingGroups());
            System.out.println("The current number of auto scaling groups is " +
response.numberOfAutoScalingGroups());

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void updateAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName,
            String launchTemplateName) {
        try {
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            UpdateAutoScalingGroupRequest groupRequest =
UpdateAutoScalingGroupRequest.builder()
                    .maxSize(3)
                    .autoScalingGroupName(groupName)
                    .launchTemplate(templateSpecification)
```

```
                    .build();

            autoScalingClient.updateAutoScalingGroup(groupRequest);
            DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
waiter
                    .waitUntilGroupInService(groupsRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("You successfully updated the auto scaling group  " +
groupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void terminateInstanceInAutoScalingGroup(AutoScalingClient
autoScalingClient, String instanceId) {
        try {
            TerminateInstanceInAutoScalingGroupRequest request =
TerminateInstanceInAutoScalingGroupRequest.builder()
                    .instanceId(instanceId)
                    .shouldDecrementDesiredCapacity(false)
                    .build();

            autoScalingClient.terminateInstanceInAutoScalingGroup(request);
            System.out.println("You have terminated instance " + instanceId);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
```

```
                    .autoScalingGroupName(groupName)
                    .forceDelete(true)
                    .build();

            autoScalingClient.deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
            System.out.println("You successfully deleted " + groupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateAutoScalingGroup
  - DeleteAutoScalingGroup
  - DescribeAutoScalingGroups
  - DescribeAutoScalingInstances
  - DescribeScalingActivities
  - DisableMetricsCollection
  - EnableMetricsCollection
  - SetDesiredCapacity
  - TerminateInstanceInAutoScalingGroup
  - UpdateAutoScalingGroup

## Tindakan

### `CreateAutoScalingGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateAutoScalingGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import
 software.amazon.awssdk.services.autoscaling.model.CreateAutoScalingGroupRequest;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsRequest;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import
 software.amazon.awssdk.services.autoscaling.model.LaunchTemplateSpecification;
import software.amazon.awssdk.services.autoscaling.waiters.AutoScalingWaiter;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAutoScalingGroup {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <groupName> <launchTemplateName> <serviceLinkedRoleARN>
 <vpcZoneId>

                Where:
                    groupName - The name of the Auto Scaling group.
                    launchTemplateName - The name of the launch template.\s
```

```
                    vpcZoneId - A subnet Id for a virtual private cloud (VPC) where
instances in the Auto Scaling group can be created.
                """";

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        String launchTemplateName = args[1];
        String vpcZoneId = args[2];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createAutoScalingGroup(autoScalingClient, groupName, launchTemplateName,
vpcZoneId);
        autoScalingClient.close();
    }

    public static void createAutoScalingGroup(AutoScalingClient autoScalingClient,
            String groupName,
            String launchTemplateName,
            String vpcZoneId) {

        try {
            AutoScalingWaiter waiter = autoScalingClient.waiter();
            LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                    .launchTemplateName(launchTemplateName)
                    .build();

            CreateAutoScalingGroupRequest request =
CreateAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .availabilityZones("us-east-1a")
                    .launchTemplate(templateSpecification)
                    .maxSize(1)
                    .minSize(1)
                    .vpcZoneIdentifier(vpcZoneId)
                    .build();

            autoScalingClient.createAutoScalingGroup(request);
```

```
            DescribeAutoScalingGroupsRequest groupsRequest =
 DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
 waiter
                    .waitUntilGroupExists(groupsRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Auto Scaling Group created");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateAutoScalingGroupdi Referensi AWS SDK for Java 2.x API.

### `DeleteAutoScalingGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAutoScalingGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import
 software.amazon.awssdk.services.autoscaling.model.DeleteAutoScalingGroupRequest;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteAutoScalingGroup {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteAutoScalingGroup(autoScalingClient, groupName);
        autoScalingClient.close();
    }

    public static void deleteAutoScalingGroup(AutoScalingClient autoScalingClient,
 String groupName) {
        try {
            DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
 DeleteAutoScalingGroupRequest.builder()
                    .autoScalingGroupName(groupName)
                    .forceDelete(true)
                    .build();

            autoScalingClient.deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
            System.out.println("You successfully deleted " + groupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteAutoScalingGroupdi Referensi AWS SDK for Java 2.x API.

### `DescribeAutoScalingGroups`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAutoScalingGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.autoscaling.AutoScalingClient;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingException;
import software.amazon.awssdk.services.autoscaling.model.AutoScalingGroup;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsResponse;
import
 software.amazon.awssdk.services.autoscaling.model.DescribeAutoScalingGroupsRequest;
import software.amazon.awssdk.services.autoscaling.model.Instance;
import java.util.List;

/**
 * Before running this SDK for Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAutoScalingInstances {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <groupName>

                Where:
                    groupName - The name of the Auto Scaling group.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String groupName = args[0];
        AutoScalingClient autoScalingClient = AutoScalingClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String instanceId = getAutoScaling(autoScalingClient, groupName);
        System.out.println(instanceId);
        autoScalingClient.close();
    }

    public static String getAutoScaling(AutoScalingClient autoScalingClient, String
groupName) {
        try {
            String instanceId = "";
            DescribeAutoScalingGroupsRequest scalingGroupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                    .autoScalingGroupNames(groupName)
                    .build();

            DescribeAutoScalingGroupsResponse response = autoScalingClient
                    .describeAutoScalingGroups(scalingGroupsRequest);
            List<AutoScalingGroup> groups = response.autoScalingGroups();
            for (AutoScalingGroup group : groups) {
                System.out.println("The group name is " +
group.autoScalingGroupName());
                System.out.println("The group ARN is " +
group.autoScalingGroupARN());

                List<Instance> instances = group.instances();
                for (Instance instance : instances) {
                    instanceId = instance.instanceId();
```

```
                }
            }
            return instanceId;
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat DescribeAutoScalingGroupsdi Referensi AWS SDK for Java 2.x API.

### `DescribeAutoScalingInstances`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAutoScalingInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeAutoScalingInstance(AutoScalingClient
autoScalingClient, String id) {
       try {
           DescribeAutoScalingInstancesRequest describeAutoScalingInstancesRequest
= DescribeAutoScalingInstancesRequest
                   .builder()
                   .instanceIds(id)
                   .build();

           DescribeAutoScalingInstancesResponse response = autoScalingClient

.describeAutoScalingInstances(describeAutoScalingInstancesRequest);
           List<AutoScalingInstanceDetails> instances =
response.autoScalingInstances();
           for (AutoScalingInstanceDetails instance : instances) {
```

```
                System.out.println("The instance lifecycle state is: " +
instance.lifecycleState());
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DescribeAutoScalingInstancesdi Referensi AWS SDK for Java 2.x API.

### `DescribeScalingActivities`

Contoh kode berikut menunjukkan cara menggunakan`DescribeScalingActivities`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void describeScalingActivities(AutoScalingClient
autoScalingClient, String groupName) {
        try {
            DescribeScalingActivitiesRequest scalingActivitiesRequest =
DescribeScalingActivitiesRequest.builder()
                    .autoScalingGroupName(groupName)
                    .maxRecords(10)
                    .build();

            DescribeScalingActivitiesResponse response = autoScalingClient
                    .describeScalingActivities(scalingActivitiesRequest);
            List<Activity> activities = response.activities();
            for (Activity activity : activities) {
                System.out.println("The activity Id is " + activity.activityId());
                System.out.println("The activity details are " +
activity.details());
```

```
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DescribeScalingActivitiesdi Referensi AWS SDK for Java 2.x API.

### `DisableMetricsCollection`

Contoh kode berikut menunjukkan cara menggunakan`DisableMetricsCollection`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void disableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
        try {
            DisableMetricsCollectionRequest disableMetricsCollectionRequest =
DisableMetricsCollectionRequest.builder()
                    .autoScalingGroupName(groupName)
                    .metrics("GroupMaxSize")
                    .build();


autoScalingClient.disableMetricsCollection(disableMetricsCollectionRequest);
            System.out.println("The disable metrics collection operation was
successful");

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
```

- Untuk detail API, lihat DisableMetricsCollectiondi Referensi AWS SDK for Java 2.x API.

### `EnableMetricsCollection`

Contoh kode berikut menunjukkan cara menggunakan`EnableMetricsCollection`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void enableMetricsCollection(AutoScalingClient autoScalingClient,
String groupName) {
       try {
           EnableMetricsCollectionRequest collectionRequest =
EnableMetricsCollectionRequest.builder()
                   .autoScalingGroupName(groupName)
                   .metrics("GroupMaxSize")
                   .granularity("1Minute")
                   .build();

           autoScalingClient.enableMetricsCollection(collectionRequest);
           System.out.println("The enable metrics collection operation was
successful");

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat EnableMetricsCollectiondi Referensi AWS SDK for Java 2.x API.

### `SetDesiredCapacity`

Contoh kode berikut menunjukkan cara menggunakan`SetDesiredCapacity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void setDesiredCapacity(AutoScalingClient autoScalingClient,
String groupName) {
       try {
           SetDesiredCapacityRequest capacityRequest =
SetDesiredCapacityRequest.builder()
                   .autoScalingGroupName(groupName)
                   .desiredCapacity(2)
                   .build();

           autoScalingClient.setDesiredCapacity(capacityRequest);
           System.out.println("You have set the DesiredCapacity to 2");

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat SetDesiredCapacitydi Referensi AWS SDK for Java 2.x API.

### `TerminateInstanceInAutoScalingGroup`

Contoh kode berikut menunjukkan cara menggunakan`TerminateInstanceInAutoScalingGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void terminateInstanceInAutoScalingGroup(AutoScalingClient
autoScalingClient, String instanceId) {
       try {
           TerminateInstanceInAutoScalingGroupRequest request =
TerminateInstanceInAutoScalingGroupRequest.builder()
                   .instanceId(instanceId)
                   .shouldDecrementDesiredCapacity(false)
                   .build();

           autoScalingClient.terminateInstanceInAutoScalingGroup(request);
           System.out.println("You have terminated instance " + instanceId);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat TerminateInstanceInAutoScalingGroupdi Referensi AWS SDK for Java 2.x API.

### `UpdateAutoScalingGroup`

Contoh kode berikut menunjukkan cara menggunakan`UpdateAutoScalingGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void updateAutoScalingGroup(AutoScalingClient autoScalingClient,
String groupName,
           String launchTemplateName) {
       try {
           AutoScalingWaiter waiter = autoScalingClient.waiter();
           LaunchTemplateSpecification templateSpecification =
LaunchTemplateSpecification.builder()
                   .launchTemplateName(launchTemplateName)
                   .build();

           UpdateAutoScalingGroupRequest groupRequest =
UpdateAutoScalingGroupRequest.builder()
                   .maxSize(3)
                   .autoScalingGroupName(groupName)
                   .launchTemplate(templateSpecification)
                   .build();

           autoScalingClient.updateAutoScalingGroup(groupRequest);
           DescribeAutoScalingGroupsRequest groupsRequest =
DescribeAutoScalingGroupsRequest.builder()
                   .autoScalingGroupNames(groupName)
                   .build();

           WaiterResponse<DescribeAutoScalingGroupsResponse> waiterResponse =
waiter
                   .waitUntilGroupInService(groupsRequest);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("You successfully updated the auto scaling group  " +
groupName);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat UpdateAutoScalingGroupdi Referensi AWS SDK for Java 2.x API.

# Skenario

Membangun dan mengelola layanan yang tangguh

Contoh kode berikut menunjukkan cara membuat layanan web load-balanced yang mengembalikan rekomendasi buku, film, dan lagu. Contoh ini menunjukkan cara layanan tersebut merespons kegagalan, serta cara merestrukturisasi layanan agar lebih tangguh ketika terjadi kegagalan.

- Menggunakan grup Amazon EC2 Auto Scaling untuk membuat instans Amazon Elastic Compute Cloud (Amazon EC2) berdasarkan templat peluncuran dan menyimpan sejumlah instans dalam rentang yang ditentukan.
- Menangani dan mendistribusikan permintaan HTTP dengan Elastic Load Balancing.
- Memantau kondisi instans dalam grup Auto Scaling dan meneruskan permintaan hanya ke instans yang sehat.
- Menjalankan server web Python pada setiap instans EC2 untuk menangani permintaan HTTP. Server web merespons dengan memberikan rekomendasi dan melakukan pemeriksaan kondisi.
- Menyimulasikan layanan yang direkomendasikan dengan tabel Amazon DynamoDB.
- Kontrol respons server web terhadap permintaan dan pemeriksaan kesehatan dengan memperbarui AWS Systems Manager parameter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario interaktif di prompt perintah.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
```

```
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
 resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
```

```
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
```

```
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
```

```
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }
```

```
        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                       """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
```

```
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();

        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
```

```
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");

        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
```

```
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
```

```
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();
```

```
                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
```

```
    }
}
```

Membuat kelas yang menggabungkan tindakan Penskalaan Otomatis dan Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
```

```
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                              // name.
                .build();
```

```
        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
```

```
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
```

```
                .build();

        GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
        String name = response.instanceProfile().instanceProfileName();
        System.out.println(name);

        RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .roleName(roleName)
                .build();

        getIAMClient().removeRoleFromInstanceProfile(profileRequest);
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .build();

        getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
        System.out.println("Deleted instance profile " + profileName);

        DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        // List attached role policies.
        ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                .listAttachedRolePolicies(role -> role.roleName(roleName));
        List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
        for (AttachedPolicy attachedPolicy : attachedPolicies) {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(attachedPolicy.policyArn())
                    .build();

            getIAMClient().detachRolePolicy(request);
            System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
        }

        getIAMClient().deleteRole(deleteRoleRequest);
        System.out.println("Instance profile and role deleted.");
```

```
        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
```

```
                .build();

        Filter filter1 = Filter.builder()
                .name("vpc-id")
                .values(VPC)
                .build();

        DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                .filters(filter, filter1)
                .build();

        DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                .describeSecurityGroups(securityGroupsRequest);
        String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
        groupInfo.setGroupName(securityGroup);

        for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
            System.out.println("Found security group: " + secGroup.groupId());

            for (IpPermission ipPermission : secGroup.ipPermissions()) {
                if (ipPermission.fromPort() == port) {
                    System.out.println("Found inbound rule: " + ipPermission);
                    for (IpRange ipRange : ipPermission.ipRanges()) {
                        String cidrIp = ipRange.cidrIp();
                        if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                            System.out.println(cidrIp + " is applicable");
                            portIsOpen = true;
                        }
                    }

                    if (!ipPermission.prefixListIds().isEmpty()) {
                        System.out.println("Prefix lList is applicable");
                        portIsOpen = true;
                    }

                    if (!portIsOpen) {
                        System.out
                                .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                        + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
```

```
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {
```

```
       // Get availability zones.
       software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
               .builder()
               .build();

       DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
       List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
               .collect(Collectors.toList());

       String availabilityZones = String.join(",", availabilityZoneNames);
       LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
               .launchTemplateName(templateName)
               .version("$Default")
               .build();

       String[] zones = availabilityZones.split(",");
       CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
               .launchTemplate(specification)
               .availabilityZones(zones)
               .maxSize(groupSize)
               .minSize(groupSize)
               .autoScalingGroupName(autoScalingGroupName)
               .build();

       try {
           getAutoScalingClient().createAutoScalingGroup(groupRequest);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
       return zones;
   }
```

```
    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();

        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }
```

```
   // Gets data about the instances in the EC2 Auto Scaling group.
   public String getBadInstance(String groupName) {
       DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
               .autoScalingGroupNames(groupName)
               .build();

       DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
       AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
       List<String> instanceIds = autoScalingGroup.instances().stream()
               .map(instance -> instance.instanceId())
               .collect(Collectors.toList());

       String[] instanceIdArray = instanceIds.toArray(new String[0]);
       for (String instanceId : instanceIdArray) {
           System.out.println("Instance ID: " + instanceId);
           return instanceId;
       }
       return "";
   }

   // Gets data about the profile associated with an instance.
   public String getInstanceProfile(String instanceId) {
       Filter filter = Filter.builder()
               .name("instance-id")
               .values(instanceId)
               .build();

       DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
               .builder()
               .filters(filter)
               .build();

       DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
               .describeIamInstanceProfileAssociations(associationsRequest);
       return response.iamInstanceProfileAssociations().get(0).associationId();
   }

   public void deleteRolesPolicies(String policyName, String roleName, String
InstanceProfile) {
```

```
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();

                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
```

```
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Membuat kelas yang menggabungkan tindakan Penyeimbangan Beban Elastis.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
```

```
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
```

```
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
```

```
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
```

```
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Membuat kelas yang menggunakan DynamoDB untuk menyimulasikan layanan yang direkomendasikan.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;
```

```
    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
```

```
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }
```

```
    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
        System.out.println("Added all records to the " + tableName);
    }
}
```

Membuat kelas yang mengabungkan tindakan Systems Manager.

```
public class ParameterHelper {
```

```
    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile
  - CreateLaunchTemplate
  - CreateListener
  - CreateLoadBalancer
  - CreateTargetGroup
  - DeleteAutoScalingGroup
  - DeleteInstanceProfile

- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

# AWS Batch contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS Batch.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai

- Hal-hal mendasar
- Tindakan

# Memulai

## Halo AWS Batch

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS Batch.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.batch.BatchAsyncClient;
import software.amazon.awssdk.services.batch.model.JobStatus;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.batch.model.ListJobsRequest;
import software.amazon.awssdk.services.batch.paginators.ListJobsPublisher;
import java.time.Duration;
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;

public class HelloBatch {
    private static BatchAsyncClient batchClient;

    public static void main(String[] args) {
        List<JobSummary> jobs = listJobs("my-job-queue");
        jobs.forEach(job ->
            System.out.printf("Job ID: %s, Job Name: %s, Job Status: %s%n",
                job.jobId(), job.jobName(), job.status())
        );
```

```
    }

    public static List<JobSummary> listJobs(String jobQueue) {
        if (jobQueue == null || jobQueue.isEmpty()) {
            throw new IllegalArgumentException("Job queue cannot be null or empty");
        }

        ListJobsRequest listJobsRequest = ListJobsRequest.builder()
            .jobQueue(jobQueue)
            .jobStatus(JobStatus.SUCCEEDED)
            .build();

        List<JobSummary> jobSummaries = new ArrayList<>();
        ListJobsPublisher listJobsPaginator =
getAsyncClient().listJobsPaginator(listJobsRequest);
        CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
            jobSummaries.addAll(response.jobSummaryList());
        });

        future.join();
        return jobSummaries;
    }

    private static BatchAsyncClient getAsyncClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)  // Increase max concurrency to handle more
simultaneous connections.
            .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
            .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
            .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
            .build();

        ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
            .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the individual
call attempt timeout.
            .retryPolicy(RetryPolicy.builder()  // Add a retry policy to handle
transient errors.
                .numRetries(3)  // Number of retry attempts.
                .build())
            .build();
```

```
        if (batchClient == null) {
            batchClient = BatchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return batchClient;
    }
}
```

- Untuk detail API, lihat listJobsPaginatordi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat lingkungan AWS Batch komputasi.
- Periksa status lingkungan komputasi.
- Siapkan antrian AWS Batch pekerjaan dan definisi pekerjaan.
- Daftarkan definisi pekerjaan.
- Kirim AWS Batch Job.
- Dapatkan daftar pekerjaan yang berlaku untuk antrian pekerjaan.
- Periksa status pekerjaan.
- Hapus AWS Batch sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan AWS Batch fitur.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.batch.model.BatchException;
import software.amazon.awssdk.services.batch.model.ClientException;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeSubnetsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSubnetsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest;
import software.amazon.awssdk.services.ec2.model.Filter;
import software.amazon.awssdk.services.ec2.model.SecurityGroup;
import software.amazon.awssdk.services.ec2.model.Subnet;
import software.amazon.awssdk.services.ec2.model.Vpc;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import java.util.List;
import java.util.Map;
import java.util.Scanner;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * NOTE
 * This scenario submits a job that pulls a Docker image named echo-text from Amazon
 ECR to Amazon Fargate.
 *
 * To place this Docker image on Amazon ECR, run the following Basics scenario.
 *
 * https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/javav2/example_code/ecr
 *
 */
```

```
public class BatchScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    // Define two stacks used in this Basics Scenario.
    private static final String ROLES_STACK = "RolesStack";
    private static String defaultSubnet;
    private static String defaultSecurityGroup;

    private static final Logger logger =
 LoggerFactory.getLogger(BatchScenario.class);

    public static void main(String[] args) throws InterruptedException {

        BatchActions batchActions = new BatchActions();
        Scanner scanner = new Scanner(System.in);
        String computeEnvironmentName = "my-compute-environment";
        String jobQueueName = "my-job-queue";
        String jobDefinitionName = "my-job-definition";


        // See the NOTE in this Java code example (at start).
        String dockerImage = "dkr.ecr.us-east-1.amazonaws.com/echo-text:echo-text";

        logger.info("""
            AWS Batch is a fully managed batch processing service that dynamically
 provisions the required compute
            resources for batch computing workloads. The Java V2 `BatchAsyncClient`
 allows
            developers to automate the submission, monitoring, and management of
 batch jobs.

            This scenario provides an example of setting up a compute environment,
 job queue and job definition,
            and then submitting a job.

            This scenario submits a job that pulls a Docker image named echo-text
 from Amazon ECR to Amazon Fargate.

            To place this Docker image on Amazon ECR, run the following Basics
 scenario.

            https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/javav2/
example_code/ecr
```

```
            Let's get started...

            You have two choices:

            1 - Run the entire program.
            2 - Delete an existing Compute Environment (created from a previous
execution of
            this program that did not complete).
            """);

        while (true) {
            String input = scanner.nextLine();
            if (input.trim().equalsIgnoreCase("1")) {
                logger.info("Continuing with the program...");
               // logger.info("");
                break;
            } else if (input.trim().equalsIgnoreCase("2")) {
                String jobQueueARN = String.valueOf(batchActions.
describeJobQueueAsync(computeEnvironmentName));
                if (!jobQueueARN.isEmpty()) {
                    batchActions.disableJobQueueAsync(jobQueueARN);
                    countdown(1);
                    batchActions.deleteJobQueueAsync(jobQueueARN);
                }

                try {

batchActions.disableComputeEnvironmentAsync(computeEnvironmentName)
                        .exceptionally(ex -> {
                            logger.info("Disable compute environment failed: " +
ex.getMessage());
                            return null;
                        })
                        .join();
                } catch (CompletionException ex) {
                    logger.info("Failed to disable compute environment: " +
ex.getMessage());
                }
                countdown(2);

batchActions.deleteComputeEnvironmentAsync(computeEnvironmentName).join();
                return;
            } else {
                // Handle invalid input.
```

```
                logger.info("Invalid input. Please try again.");
            }
        }
        System.out.println(DASHES);

        waitForInputToContinue(scanner);
        // Get an AWS Account id used to retrieve the docker image from Amazon ECR.
        // Create a single-element array to store the `accountId` value.
        String[] accId = new String[1];
        CompletableFuture<String> accountIdFuture = batchActions.getAccountId();
        accountIdFuture.thenAccept(accountId -> {
            logger.info("Account ID: " + accountId);
            accId[0] = accountId;
        }).join();

        dockerImage = accId[0]+"."+dockerImage;

        // Get a default subnet and default security associated with the default
VPC.
        getSubnetSecurityGroup();

        logger.info("Use AWS CloudFormation to create two IAM roles that are
required for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);

        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputs(ROLES_STACK);
        String batchIAMRole = stackOutputs.get("BatchRoleArn");
        String executionRoleARN = stackOutputs.get("EcsRoleArn");

        logger.info("The IAM role needed to interact with AWS Batch is
"+batchIAMRole);
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("1. Create a Batch compute environment");
        logger.info("""
            A compute environment is a resource where you can run your batch jobs.
            After creating a compute environment, you can define job queues and job
definitions to submit jobs for
            execution.

            The benefit of creating a compute environment is it allows you to easily
configure and manage the compute
```

```
            resources that will be used to run your Batch jobs. By separating the
compute environment from the job definitions,
            you can easily scale your compute resources up or down as needed,
without having to modify your job definitions.
            This makes it easier to manage your Batch workloads and ensures that
your jobs have the necessary
            compute resources to run efficiently.
            """);

        waitForInputToContinue(scanner);
        try {
            CompletableFuture<CreateComputeEnvironmentResponse> future =
batchActions.createComputeEnvironmentAsync(computeEnvironmentName, batchIAMRole,
defaultSubnet, defaultSecurityGroup);
            CreateComputeEnvironmentResponse response = future.join();
            logger.info("Compute Environment ARN: " +
response.computeEnvironmentArn());
        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof ClientException batchExceptionEx) {
                String myErrorCode =
batchExceptionEx.awsErrorDetails().errorMessage();
                if ("Object already exists".contains(myErrorCode)) {
                    logger.info("The compute environment '" + computeEnvironmentName
+ "' already exists. Moving on...");
                } else {
                    logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                    return;
                }
            } else {
                    logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rte.getMessage()));
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Check the status of the "+computeEnvironmentName +" Compute
Environment.");
        waitForInputToContinue(scanner);
        try {
```

```
            CompletableFuture<String> future =
batchActions.checkComputeEnvironmentsStatus(computeEnvironmentName);
            String status = future.join();
            logger.info("Compute Environment Status: " + status);

        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof ClientException batchExceptionEx) {
                logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: " + (cause != null ?
cause.getMessage() : rte.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a job queue");
        logger.info("""
             A job queue is an essential component that helps manage the execution
of your batch jobs.
             It acts as a buffer, where jobs are placed and then scheduled for
execution based on their
             priority and the available resources in the compute environment.
             """);
        waitForInputToContinue(scanner);

        String jobQueueArn = null;
        try {
            CompletableFuture<String> jobQueueFuture =
batchActions.createJobQueueAsync(jobQueueName, computeEnvironmentName);
            jobQueueArn = jobQueueFuture.join();
            logger.info("Job Queue ARN: " + jobQueueArn);

        } catch (RuntimeException rte) {
            Throwable cause = rte.getCause();
            if (cause instanceof BatchException batchExceptionEx) {
                String myErrorCode =
batchExceptionEx.awsErrorDetails().errorMessage();
                if ("Object already exists".contains(myErrorCode)) {
```

```
                    logger.info("The job queue '" + jobQueueName + "' already
exists. Moving on...");
                    // Retrieve the ARN of the job queue.
                    CompletableFuture<String> jobQueueArnFuture =
batchActions.getJobQueueARN(jobQueueName);
                    jobQueueArn = jobQueueArnFuture.join();
                    logger.info("Job Queue ARN: " + jobQueueArn);
                } else {
                    logger.info("Batch error occurred: {} (Code: {})",
batchExceptionEx.getMessage(), batchExceptionEx.awsErrorDetails().errorCode());
                    return;
                }
            } else {
                logger.info("An unexpected error occurred: " + (cause != null ?
cause.getMessage() : rte.getMessage()));
                return; // End the execution
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("4. Register a Job Definition.");
        logger.info("""
            Registering a job in AWS Batch using the Fargate launch type ensures
that all
            necessary parameters, such as the execution role, command to run, and so
on
            are specified and reused across multiple job submissions.

             The job definition pulls a Docker image from Amazon ECR and executes
the Docker image.
            """);

        waitForInputToContinue(scanner);
        String jobARN;
        try {
            String platform = "";
            while (true) {
                logger.info("""
                    On which platform/CPU architecture combination did you build the
Docker image?:
                    1. Windows       X86_64
                    2. Mac or Linux  ARM64
                    3. Mac or Linux  X86_64
```

```
                    Please select 1, 2, or 3.
                    """);
                String platAns = scanner.nextLine().trim();
                if (platAns.equals("1")) {
                    platform = "X86_64";
                    break; // Exit loop since a valid option is selected
                } else if (platAns.equals("2")) {
                    platform = "ARM64";
                    break; // Exit loop since a valid option is selected
                } else if (platAns.equals("3")) {
                    platform = "X86_64";
                    break; // Exit loop since a valid option is selected
                } else {
                    System.out.println("Invalid input. Please select either 1 or
2.");
                }
            }

            jobARN = batchActions.registerJobDefinitionAsync(jobDefinitionName,
executionRoleARN, dockerImage, platform)
                .exceptionally(ex -> {
                    System.err.println("Register job definition failed: " +
ex.getMessage());
                    return null;
                })
                .join();
            if (jobARN != null) {
                logger.info("Job ARN: " + jobARN);
            }
        } catch (RuntimeException rte) {
            logger.error("A Batch exception occurred while registering the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Submit an AWS Batch job from a job definition.");
        waitForInputToContinue(scanner);
        String jobId;
        try {
            jobId = batchActions.submitJobAsync(jobDefinitionName, jobQueueName,
jobARN)
```

```
                .exceptionally(ex -> {
                    System.err.println("Submit job failed: " + ex.getMessage());
                    return null;
                })
                .join();

            logger.info("The job id is "+jobId);
            logger.info("Let's wait 2 minutes for the job to complete");
            countdown(2);

        } catch (RuntimeException rte) {
            logger.error("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        logger.info(DASHES);
        logger.info("6. Get a list of jobs applicable to the job queue.");

        waitForInputToContinue(scanner);
        try {
            List<JobSummary> jobs = batchActions.listJobsAsync(jobQueueName);
            jobs.forEach(job ->
                logger.info("Job ID: {}, Job Name: {}, Job Status: {}", job.jobId(),
job.jobName(), job.status()));

        } catch (RuntimeException rte) {
            logger.info("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Check the status of job "+jobId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future = batchActions.describeJobAsync(jobId);
            String jobStatus = future.join();
            logger.info("Job Status: " + jobStatus);
```

```
        } catch (RuntimeException rte) {
            logger.info("A Batch exception occurred while submitting the job: {}",
rte.getCause() != null ? rte.getCause().getMessage() : rte.getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        logger.info("8. Delete Batch resources");
        logger.info(
            """
            When deleting an AWS Batch compute environment, it does not happen
instantaneously.
            There is typically a delay, similar to some other AWS resources.
            AWS Batch starts the deletion process.
            """);
        logger.info("Would you like to delete the AWS Batch resources such as the
compute environment? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the AWS ECR resources.");
            logger.info("First, we will deregister the Job Definition.");
            waitForInputToContinue(scanner);
            try {
                batchActions.deregisterJobDefinitionAsync(jobARN)
                    .exceptionally(ex -> {
                        logger.info("Deregister job definition failed: " +
ex.getMessage());
                        return null;
                    })
                    .join();
                logger.info(jobARN + " was deregistered");
            } catch (RuntimeException rte) {
                logger.error("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            logger.info("Second, we will disable and then delete the Job Queue.");
            waitForInputToContinue(scanner);
            try {
                batchActions.disableJobQueueAsync(jobQueueArn)
```

```
                    .exceptionally(ex -> {
                        logger.info("Disable job queue failed: " + ex.getMessage());
                        return null;
                    })
                    .join();
                logger.info(jobQueueArn + " was disabled");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            batchActions.waitForJobQueueToBeDisabledAsync(jobQueueArn);
            try {
                CompletableFuture<Void> future =
batchActions.waitForJobQueueToBeDisabledAsync(jobQueueArn);
                future.join();
                logger.info("Job queue is now disabled.");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }

            waitForInputToContinue(scanner);
            try {
                batchActions.deleteJobQueueAsync(jobQueueArn);
                logger.info(jobQueueArn +" was deleted");
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }
            logger.info("Let's wait 2 minutes for the job queue to be deleted");
            countdown(2);
            waitForInputToContinue(scanner);

            logger.info("Third, we will delete the Compute Environment.");
            waitForInputToContinue(scanner);
            try {
                batchActions.disableComputeEnvironmentAsync(computeEnvironmentName)
                    .exceptionally(ex -> {
                        System.err.println("Disable compute environment failed: " +
ex.getMessage());
```

```
                        return null;
                    })
                    .join();
                logger.info("Compute environment disabled") ;
            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }


batchActions.checkComputeEnvironmentsStatus(computeEnvironmentName).thenAccept(state
-> {
                logger.info("Current State: " + state);
            }).join();

            logger.info("Lets wait 1 min for the compute environment to be
deleted");
            countdown(1);

            try {

batchActions.deleteComputeEnvironmentAsync(computeEnvironmentName).join();
                logger.info(computeEnvironmentName +" was deleted.");

            } catch (RuntimeException rte) {
                logger.info("A Batch exception occurred: {}", rte.getCause() !=
null ? rte.getCause().getMessage() : rte.getMessage());
                return;
            }
            waitForInputToContinue(scanner);
            CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        }

        logger.info(DASHES);
        logger.info("This concludes the AWS Batch SDK scenario");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
```

```
            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdown(int minutes) throws InterruptedException {
        int seconds = 0;
        for (int i = minutes * 60 + seconds; i >= 0; i--) {
            int displayMinutes = i / 60;
            int displaySeconds = i % 60;
            System.out.print(String.format("\r%02d:%02d", displayMinutes,
displaySeconds));
            Thread.sleep(1000); // Wait for 1 second
        }
        logger.info("Countdown complete!");
    }

    private static void getSubnetSecurityGroup() {
        try (Ec2AsyncClient ec2Client = Ec2AsyncClient.create()) {
            CompletableFuture<Vpc> defaultVpcFuture =
ec2Client.describeVpcs(DescribeVpcsRequest.builder()
                            .filters(Filter.builder()
                                    .name("is-default")
                                    .values("true")
                                    .build())
                            .build())
                    .thenApply(response -> response.vpcs().stream()
                            .findFirst()
                            .orElseThrow(() -> new RuntimeException("Default VPC not
found")));

            CompletableFuture<String> defaultSubnetFuture = defaultVpcFuture
                    .thenCompose(vpc ->
ec2Client.describeSubnets(DescribeSubnetsRequest.builder()
                                    .filters(Filter.builder()
                                                    .name("vpc-id")
                                                    .values(vpc.vpcId())
```

```
                                                .build(),
                                        Filter.builder()
                                                .name("default-for-az")
                                                .values("true")
                                                .build())
                                .build())
                        .thenApply(DescribeSubnetsResponse::subnets)
                        .thenApply(subnets -> subnets.stream()
                                .findFirst()
                                .map(Subnet::subnetId)
                                .orElseThrow(() -> new RuntimeException("No
 default subnet found"))));

            CompletableFuture<String> defaultSecurityGroupFuture = defaultVpcFuture
                    .thenCompose(vpc ->
 ec2Client.describeSecurityGroups(DescribeSecurityGroupsRequest.builder()
                                .filters(Filter.builder()
                                                .name("group-name")
                                                .values("default")
                                                .build(),
                                        Filter.builder()
                                                .name("vpc-id")
                                                .values(vpc.vpcId())
                                                .build())
                                .build())

 .thenApply(DescribeSecurityGroupsResponse::securityGroups)
                        .thenApply(securityGroups -> securityGroups.stream()
                                .findFirst()
                                .map(SecurityGroup::groupId)
                                .orElseThrow(() -> new RuntimeException("No
 default security group found"))));

            defaultSubnet = defaultSubnetFuture.join();
            defaultSecurityGroup = defaultSecurityGroupFuture.join();
        }
    }
}
```

Kelas pembungkus untuk metode AWS Batch SDK.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.batch.BatchAsyncClient;
import software.amazon.awssdk.services.batch.BatchClient;
import software.amazon.awssdk.services.batch.model.AssignPublicIp;
import software.amazon.awssdk.services.batch.model.BatchException;
import software.amazon.awssdk.services.batch.model.CEState;
import software.amazon.awssdk.services.batch.model.CEType;
import software.amazon.awssdk.services.batch.model.CRType;
import software.amazon.awssdk.services.batch.model.ComputeEnvironmentOrder;
import software.amazon.awssdk.services.batch.model.ComputeResource;
import software.amazon.awssdk.services.batch.model.ContainerProperties;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.CreateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.CreateJobQueueRequest;
import software.amazon.awssdk.services.batch.model.DeleteComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.DeleteComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.DeleteJobQueueRequest;
import software.amazon.awssdk.services.batch.model.DeleteJobQueueResponse;
import software.amazon.awssdk.services.batch.model.DeregisterJobDefinitionRequest;
import software.amazon.awssdk.services.batch.model.DeregisterJobDefinitionResponse;
import
 software.amazon.awssdk.services.batch.model.DescribeComputeEnvironmentsRequest;
import
 software.amazon.awssdk.services.batch.model.DescribeComputeEnvironmentsResponse;
import software.amazon.awssdk.services.batch.model.DescribeJobQueuesRequest;
import software.amazon.awssdk.services.batch.model.DescribeJobQueuesResponse;
import software.amazon.awssdk.services.batch.model.DescribeJobsRequest;
import software.amazon.awssdk.services.batch.model.DescribeJobsResponse;
import software.amazon.awssdk.services.batch.model.JQState;
import software.amazon.awssdk.services.batch.model.JobDefinitionType;
import software.amazon.awssdk.services.batch.model.JobDetail;
import software.amazon.awssdk.services.batch.model.JobQueueDetail;
import software.amazon.awssdk.services.batch.model.JobStatus;
import software.amazon.awssdk.services.batch.model.JobSummary;
import software.amazon.awssdk.services.batch.model.ListJobsRequest;
import software.amazon.awssdk.services.batch.model.RegisterJobDefinitionResponse;
import software.amazon.awssdk.services.batch.model.NetworkConfiguration;
import software.amazon.awssdk.services.batch.model.PlatformCapability;
import software.amazon.awssdk.services.batch.model.RegisterJobDefinitionRequest;
```

```
import software.amazon.awssdk.services.batch.model.ResourceRequirement;
import software.amazon.awssdk.services.batch.model.ResourceType;
import software.amazon.awssdk.services.batch.model.RuntimePlatform;
import software.amazon.awssdk.services.batch.model.SubmitJobRequest;
import software.amazon.awssdk.services.batch.model.CreateJobQueueResponse;
import java.time.Duration;
import java.util.ArrayList;
import java.util.Arrays;
import java.util.Collections;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.atomic.AtomicBoolean;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.services.batch.model.SubmitJobResponse;
import software.amazon.awssdk.services.batch.model.UpdateComputeEnvironmentRequest;
import software.amazon.awssdk.services.batch.model.UpdateComputeEnvironmentResponse;
import software.amazon.awssdk.services.batch.model.UpdateJobQueueRequest;
import software.amazon.awssdk.services.batch.model.UpdateJobQueueResponse;
import software.amazon.awssdk.services.batch.paginators.ListJobsPublisher;
import software.amazon.awssdk.services.sts.StsAsyncClient;
import software.amazon.awssdk.services.sts.model.GetCallerIdentityResponse;

public class BatchActions {
    private static BatchAsyncClient batchClient;

    private static final Logger logger =
 LoggerFactory.getLogger(BatchActions.class);

    private static BatchAsyncClient getAsyncClient() {
        if (batchClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
```

```
                    .build())
                .build();

            batchClient = BatchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return batchClient;
    }

    /**
     * Asynchronously creates a new compute environment in AWS Batch.
     *
     * @param computeEnvironmentName the name of the compute environment to create
     * @param batchIAMRole the IAM role to be used by the compute environment
     * @param subnet the subnet ID to be used for the compute environment
     * @param secGroup the security group ID to be used for the compute environment
     * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with the
     *         {@link CreateComputeEnvironmentResponse} when the compute environment
has been created
     * @throws BatchException if there is an error creating the compute environment
     * @throws RuntimeException if there is an unexpected error during the operation
     */
    public CompletableFuture<CreateComputeEnvironmentResponse>
createComputeEnvironmentAsync(
        String computeEnvironmentName, String batchIAMRole, String subnet, String
secGroup) {
        CreateComputeEnvironmentRequest environmentRequest =
CreateComputeEnvironmentRequest.builder()
            .computeEnvironmentName(computeEnvironmentName)
            .type(CEType.MANAGED)
            .state(CEState.ENABLED)
            .computeResources(ComputeResource.builder()
                .type(CRType.FARGATE)
                .maxvCpus(256)
                .subnets(Collections.singletonList(subnet))
                .securityGroupIds(Collections.singletonList(secGroup))
                .build())
            .serviceRole(batchIAMRole)
            .build();
```

```
        CompletableFuture<CreateComputeEnvironmentResponse> response =
getAsyncClient().createComputeEnvironment(environmentRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
               String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
               throw new RuntimeException(errorMessage, ex);
            }
        });

        return response;
    }

    public CompletableFuture<DeleteComputeEnvironmentResponse>
deleteComputeEnvironmentAsync(String computeEnvironmentName) {
        DeleteComputeEnvironmentRequest deleteComputeEnvironment =
DeleteComputeEnvironmentRequest.builder()
            .computeEnvironment(computeEnvironmentName)
            .build();

        return getAsyncClient().deleteComputeEnvironment(deleteComputeEnvironment)
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof BatchException) {
                        throw new RuntimeException(cause);
                    } else {
                        throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                    }
                }
            });
    }

    /**
     * Checks the status of the specified compute environment.
     *
     * @param computeEnvironmentName the name of the compute environment to check
     * @return a CompletableFuture containing the status of the compute environment,
or "ERROR" if an exception occurs
     */
    public CompletableFuture<String> checkComputeEnvironmentsStatus(String
computeEnvironmentName) {
        if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
```

```
            throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
        }

        DescribeComputeEnvironmentsRequest environmentsRequest =
DescribeComputeEnvironmentsRequest.builder()
            .computeEnvironments(computeEnvironmentName)
            .build();

        CompletableFuture<DescribeComputeEnvironmentsResponse> response =
getAsyncClient().describeComputeEnvironments(environmentsRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(resp -> resp.computeEnvironments().stream()
            .map(env -> env.statusAsString())
            .findFirst()
            .orElse("UNKNOWN"));
    }

    /**
     * Creates a job queue asynchronously.
     *
     * @param jobQueueName the name of the job queue to create
     * @param computeEnvironmentName the name of the compute environment to
associate with the job queue
     * @return a CompletableFuture that completes with the Amazon Resource Name
(ARN) of the job queue
     */
    public CompletableFuture<String> createJobQueueAsync(String jobQueueName, String
computeEnvironmentName) {
        if (jobQueueName == null || jobQueueName.isEmpty()) {
            throw new IllegalArgumentException("Job queue name cannot be null or
empty");
        }
        if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
            throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
        }
```

```
        CreateJobQueueRequest request = CreateJobQueueRequest.builder()
            .jobQueueName(jobQueueName)
            .priority(1)
            .computeEnvironmentOrder(ComputeEnvironmentOrder.builder()
                .computeEnvironment(computeEnvironmentName)
                .order(1)
                .build())
            .build();

        CompletableFuture<CreateJobQueueResponse> response =
getAsyncClient().createJobQueue(request);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(CreateJobQueueResponse::jobQueueArn);
    }

    /**
     * Asynchronously lists the jobs in the specified job queue with the given job
status.
     *
     * @param jobQueue the name of the job queue to list jobs from
     * @return a List<JobSummary> that contains the jobs that succeeded
     */
    public List<JobSummary> listJobsAsync(String jobQueue) {
        if (jobQueue == null || jobQueue.isEmpty()) {
            throw new IllegalArgumentException("Job queue cannot be null or empty");
        }

        ListJobsRequest listJobsRequest = ListJobsRequest.builder()
            .jobQueue(jobQueue)
            .jobStatus(JobStatus.SUCCEEDED)  // Filter jobs by status.
            .build();

        List<JobSummary> jobSummaries = new ArrayList<>();
        ListJobsPublisher listJobsPaginator =
getAsyncClient().listJobsPaginator(listJobsRequest);
        CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
```

```
            jobSummaries.addAll(response.jobSummaryList());
        });
        future.join();
        return jobSummaries;
    }

    /**
     * Registers a new job definition asynchronously in AWS Batch.
     * <p>
     * When using Fargate as the compute environment, it is crucial to set the
     * {@link NetworkConfiguration} with {@link AssignPublicIp#ENABLED} to
     * ensure proper networking configuration for the Fargate tasks. This
     * allows the tasks to communicate with external services, access the
     * internet, or communicate within a VPC.
     *
     * @param jobDefinitionName the name of the job definition to be registered
     * @param executionRoleARN the ARN (Amazon Resource Name) of the execution role
     *                         that provides permissions for the containers in the
job
     * @param cpuArch a value of either X86_64 or ARM64 required for the service
call
     * @return a CompletableFuture that completes with the ARN of the registered
     *         job definition upon successful execution, or completes exceptionally
with
     *         an error if the registration fails
     */
    public CompletableFuture<String> registerJobDefinitionAsync(String
jobDefinitionName, String executionRoleARN, String image, String cpuArch) {
        NetworkConfiguration networkConfiguration = NetworkConfiguration.builder()
                .assignPublicIp(AssignPublicIp.ENABLED)
                .build();

        ContainerProperties containerProperties = ContainerProperties.builder()
                .image(image)
                .executionRoleArn(executionRoleARN)
                .resourceRequirements(
                        Arrays.asList(
                                ResourceRequirement.builder()
                                        .type(ResourceType.VCPU)
                                        .value("1")
                                        .build(),
                                ResourceRequirement.builder()
                                        .type(ResourceType.MEMORY)
                                        .value("2048")
```

```
                                        .build()
                        )
                )
                .networkConfiguration(networkConfiguration)
               .runtimePlatform(b -> b
                        .cpuArchitecture(cpuArch)
                        .operatingSystemFamily("LINUX"))
                .build();

        RegisterJobDefinitionRequest request =
RegisterJobDefinitionRequest.builder()
                .jobDefinitionName(jobDefinitionName)
                .type(JobDefinitionType.CONTAINER)
                .containerProperties(containerProperties)
                .platformCapabilities(PlatformCapability.FARGATE)
                .build();

        CompletableFuture<String> future = new CompletableFuture<>();
        getAsyncClient().registerJobDefinition(request)
                .thenApply(RegisterJobDefinitionResponse::jobDefinitionArn)
                .whenComplete((result, ex) -> {
                    if (ex != null) {
                        future.completeExceptionally(ex);
                    } else {
                        future.complete(result);
                    }
                });

        return future;
    }

    /**
     * Deregisters a job definition asynchronously.
     *
     * @param jobDefinition the name of the job definition to be deregistered
     * @return a CompletableFuture that completes when the job definition has been
deregistered
     * or an exception has occurred
     */
    public CompletableFuture<DeregisterJobDefinitionResponse>
deregisterJobDefinitionAsync(String jobDefinition) {
        DeregisterJobDefinitionRequest jobDefinitionRequest =
DeregisterJobDefinitionRequest.builder()
            .jobDefinition(jobDefinition)
```

```
            .build();

        CompletableFuture<DeregisterJobDefinitionResponse> responseFuture =
getAsyncClient().deregisterJobDefinition(jobDefinitionRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        });

        return responseFuture;
    }

    /**
     * Disables the specified job queue asynchronously.
     *
     * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to be
disabled
     * @return a {@link CompletableFuture} that completes when the job queue update
operation is complete,
     *         or completes exceptionally if an error occurs during the operation
     */
    public CompletableFuture<Void> disableJobQueueAsync(String jobQueueArn) {
        UpdateJobQueueRequest updateRequest = UpdateJobQueueRequest.builder()
            .jobQueue(jobQueueArn)
            .state(JQState.DISABLED)
            .build();

        CompletableFuture<UpdateJobQueueResponse> responseFuture =
getAsyncClient().updateJobQueue(updateRequest);
        return responseFuture.whenComplete((updateResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to update job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(updateResponse -> null);
    }

    /**
     * Deletes a Batch job queue asynchronously.
     *
     * @param jobQueueArn The Amazon Resource Name (ARN) of the job queue to delete.
```

```
    * @return A CompletableFuture that represents the asynchronous deletion of the
job queue.
    *         The future completes when the job queue has been successfully deleted
or if an error occurs.
    *         If successful, the future will be completed with a {@code Void}
value.
    *         If an error occurs, the future will be completed exceptionally with
the thrown exception.
    */
   public CompletableFuture<Void> deleteJobQueueAsync(String jobQueueArn) {
       DeleteJobQueueRequest deleteRequest = DeleteJobQueueRequest.builder()
           .jobQueue(jobQueueArn)
           .build();

       CompletableFuture<DeleteJobQueueResponse> responseFuture =
getAsyncClient().deleteJobQueue(deleteRequest);
       return responseFuture.whenComplete((deleteResponse, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to delete job queue: " +
ex.getMessage(), ex);
           }
       }).thenApply(deleteResponse -> null);
   }

   /**
    * Asynchronously describes the job queue associated with the specified compute
environment.
    *
    * @param computeEnvironmentName the name of the compute environment to find the
associated job queue for
    * @return a {@link CompletableFuture} that, when completed, contains the job
queue ARN associated with the specified compute environment
    * @throws RuntimeException if the job queue description fails
    */
   public CompletableFuture<String> describeJobQueueAsync(String
computeEnvironmentName) {
       DescribeJobQueuesRequest describeJobQueuesRequest =
DescribeJobQueuesRequest.builder()
           .build();

       CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeJobQueuesRequest);
       return responseFuture.whenComplete((describeJobQueuesResponse, ex) -> {
           if (describeJobQueuesResponse != null) {
```

```
                String jobQueueARN;
                for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                    for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                        String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                        String name = getComputeEnvironmentName(computeEnvironment);
                        if (name.equals(computeEnvironmentName)) {
                            jobQueueARN = jobQueueDetail.jobQueueArn();
                            logger.info("Job queue ARN associated with the compute
environment: " + jobQueueARN);
                        }
                    }
                }
            } else {
                throw new RuntimeException("Failed to describe job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(describeJobQueuesResponse -> {
            String jobQueueARN = "";
            for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                    String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                    String name = getComputeEnvironmentName(computeEnvironment);
                    if (name.equals(computeEnvironmentName)) {
                        jobQueueARN = jobQueueDetail.jobQueueArn();
                    }
                }
            }
            return jobQueueARN;
        });
    }

    /**
     * Disables the specified compute environment asynchronously.
     *
     * @param computeEnvironmentName the name of the compute environment to disable
     * @return a CompletableFuture that completes when the compute environment is
disabled
     */
```

```
   public CompletableFuture<UpdateComputeEnvironmentResponse>
disableComputeEnvironmentAsync(String computeEnvironmentName) {
       UpdateComputeEnvironmentRequest updateRequest =
UpdateComputeEnvironmentRequest.builder()
           .computeEnvironment(computeEnvironmentName)
           .state(CEState.DISABLED)
           .build();

       CompletableFuture<UpdateComputeEnvironmentResponse> responseFuture =
getAsyncClient().updateComputeEnvironment(updateRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to disable compute environment: "
+ ex.getMessage(), ex);
           }
       });

       return responseFuture;
   }

   /**
    * Submits a job asynchronously to the AWS Batch service.
    *
    * @param jobDefinitionName the name of the job definition to use
    * @param jobQueueName the name of the job queue to submit the job to
    * @param jobARN the Amazon Resource Name (ARN) of the job definition
    * @return a CompletableFuture that, when completed, contains the job ID of the
submitted job
    */
   public CompletableFuture<String> submitJobAsync(String jobDefinitionName, String
jobQueueName, String jobARN) {
       SubmitJobRequest jobRequest = SubmitJobRequest.builder()
           .jobDefinition(jobARN)
           .jobName(jobDefinitionName)
           .jobQueue(jobQueueName)
           .build();

       CompletableFuture<SubmitJobResponse> responseFuture =
getAsyncClient().submitJob(jobRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
           }
```

```
        });

        return responseFuture.thenApply(SubmitJobResponse::jobId);
    }

    /**
     * Asynchronously retrieves the status of a specific job.
     *
     * @param jobId the ID of the job to retrieve the status for
     * @return a CompletableFuture that completes with the job status
     */
    public CompletableFuture<String> describeJobAsync(String jobId) {
        DescribeJobsRequest describeJobsRequest = DescribeJobsRequest.builder()
            .jobs(jobId)
            .build();

        CompletableFuture<DescribeJobsResponse> responseFuture =
getAsyncClient().describeJobs(describeJobsRequest);
        return responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        }).thenApply(response -> response.jobs().get(0).status().toString());
    }

    /**
     * Disables the specific job queue using the asynchronous Java client.
     *
     * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to wait
for
     * @return a {@link CompletableFuture} that completes when the job queue is
disabled
     */
    public CompletableFuture<Void> waitForJobQueueToBeDisabledAsync(String
jobQueueArn) {
        AtomicBoolean isDisabled = new AtomicBoolean(false);
        return CompletableFuture.runAsync(() -> {
            while (!isDisabled.get()) {
                DescribeJobQueuesRequest describeRequest =
DescribeJobQueuesRequest.builder()
                    .jobQueues(jobQueueArn)
                    .build();
```

```
                CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeRequest);
                responseFuture.whenComplete((describeResponse, ex) -> {
                    if (describeResponse != null) {
                        for (JobQueueDetail jobQueue : describeResponse.jobQueues())
{
                            if (jobQueue.jobQueueArn().equals(jobQueueArn) &&
jobQueue.state() == JQState.DISABLED) {
                                isDisabled.set(true);
                                break;
                            }
                        }
                    } else {
                        throw new RuntimeException("Error describing job queues",
ex);
                    }
                }).join();

                if (!isDisabled.get()) {
                    try {
                        logger.info("Waiting for job queue to be disabled...");
                        Thread.sleep(5000);
                    } catch (InterruptedException e) {
                        Thread.currentThread().interrupt();
                        throw new RuntimeException("Thread interrupted while waiting
for job queue to be disabled", e);
                    }
                }
            }
        }).whenComplete((result, throwable) -> {
            if (throwable != null) {
                throw new RuntimeException("Error while waiting for job queue to be
disabled", throwable);
            }
        });
    }

    public CompletableFuture<String> getJobQueueARN(String jobQueueName) {
        // Describe the job queue asynchronously
        CompletableFuture<DescribeJobQueuesResponse> describeJobQueuesFuture =
batchClient.describeJobQueues(
            DescribeJobQueuesRequest.builder()
                .jobQueues(jobQueueName)
                .build()
```

```
        );

        // Handle the asynchronous response and return the Job Queue ARN in the
CompletableFuture<String>
        CompletableFuture<String> jobQueueArnFuture = new CompletableFuture<>();
        describeJobQueuesFuture.whenComplete((response, error) -> {
            if (error != null) {
                if (error instanceof BatchException) {
                    logger.info("Batch error: " + ((BatchException)
error).awsErrorDetails().errorMessage());
                } else {
                    logger.info("Error describing job queue: " +
error.getMessage());
                }
                jobQueueArnFuture.completeExceptionally(new RuntimeException("Failed
to retrieve Job Queue ARN", error));
            } else {
                if (response.jobQueues().isEmpty()) {
                    jobQueueArnFuture.completeExceptionally(new
RuntimeException("Job queue not found: " + jobQueueName));
                } else {
                    // Assuming only one job queue is returned for the given name
                    String jobQueueArn = response.jobQueues().get(0).jobQueueArn();
                    jobQueueArnFuture.complete(jobQueueArn);
                }
            }
        });

        return jobQueueArnFuture;
    }

    private static String getComputeEnvironmentName(String computeEnvironment) {
        String[] parts = computeEnvironment.split("/");
        if (parts.length == 2) {
            return parts[1];
        }
        return null;
    }

    public CompletableFuture<String> getAccountId() {
        StsAsyncClient stsAsyncClient = StsAsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();
```

```
        return stsAsyncClient.getCallerIdentity()
            .thenApply(GetCallerIdentityResponse::account);
    }


}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateComputeEnvironment
  - CreateJobQueue
  - DeleteComputeEnvironment
  - DeleteJobQueue
  - DeregisterJobDefinition
  - DescribeComputeEnvironments
  - DescribeJobQueues
  - DescribeJobs
  - ListJobsPaginator
  - RegisterJobDefinition
  - SubmitJob
  - UpdateComputeEnvironment
  - UpdateJobQueue

## Tindakan

### `CreateComputeEnvironment`

Contoh kode berikut menunjukkan cara menggunakan`CreateComputeEnvironment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously creates a new compute environment in AWS Batch.
    *
    * @param computeEnvironmentName the name of the compute environment to create
    * @param batchIAMRole the IAM role to be used by the compute environment
    * @param subnet the subnet ID to be used for the compute environment
    * @param secGroup the security group ID to be used for the compute environment
    * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with the
    *         {@link CreateComputeEnvironmentResponse} when the compute environment
has been created
    * @throws BatchException if there is an error creating the compute environment
    * @throws RuntimeException if there is an unexpected error during the operation
    */
   public CompletableFuture<CreateComputeEnvironmentResponse>
createComputeEnvironmentAsync(
       String computeEnvironmentName, String batchIAMRole, String subnet, String
secGroup) {
       CreateComputeEnvironmentRequest environmentRequest =
CreateComputeEnvironmentRequest.builder()
           .computeEnvironmentName(computeEnvironmentName)
           .type(CEType.MANAGED)
           .state(CEState.ENABLED)
           .computeResources(ComputeResource.builder()
               .type(CRType.FARGATE)
               .maxvCpus(256)
               .subnets(Collections.singletonList(subnet))
               .securityGroupIds(Collections.singletonList(secGroup))
               .build())
           .serviceRole(batchIAMRole)
           .build();

       CompletableFuture<CreateComputeEnvironmentResponse> response =
getAsyncClient().createComputeEnvironment(environmentRequest);
       response.whenComplete((resp, ex) -> {
           if (ex != null) {
              String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
              throw new RuntimeException(errorMessage, ex);
           }
       });

       return response;
```

```
    }
```

- Untuk detail API, lihat CreateComputeEnvironmentdi Referensi AWS SDK for Java 2.x API.

### `CreateJobQueue`

Contoh kode berikut menunjukkan cara menggunakan`CreateJobQueue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a job queue asynchronously.
    *
    * @param jobQueueName the name of the job queue to create
    * @param computeEnvironmentName the name of the compute environment to
associate with the job queue
    * @return a CompletableFuture that completes with the Amazon Resource Name
(ARN) of the job queue
    */
   public CompletableFuture<String> createJobQueueAsync(String jobQueueName, String
computeEnvironmentName) {
       if (jobQueueName == null || jobQueueName.isEmpty()) {
           throw new IllegalArgumentException("Job queue name cannot be null or
empty");
       }
       if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
           throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
       }

       CreateJobQueueRequest request = CreateJobQueueRequest.builder()
           .jobQueueName(jobQueueName)
           .priority(1)
           .computeEnvironmentOrder(ComputeEnvironmentOrder.builder()
```

```
                .computeEnvironment(computeEnvironmentName)
                .order(1)
                .build())
            .build();

        CompletableFuture<CreateJobQueueResponse> response =
getAsyncClient().createJobQueue(request);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(CreateJobQueueResponse::jobQueueArn);
    }
```

- Untuk detail API, lihat CreateJobQueuedi Referensi AWS SDK for Java 2.x API.

### `DeleteComputeEnvironment`

Contoh kode berikut menunjukkan cara menggunakan`DeleteComputeEnvironment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public CompletableFuture<DeleteComputeEnvironmentResponse>
deleteComputeEnvironmentAsync(String computeEnvironmentName) {
        DeleteComputeEnvironmentRequest deleteComputeEnvironment =
DeleteComputeEnvironmentRequest.builder()
            .computeEnvironment(computeEnvironmentName)
            .build();

        return getAsyncClient().deleteComputeEnvironment(deleteComputeEnvironment)
            .whenComplete((response, ex) -> {
```

```
                if (ex != null) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof BatchException) {
                        throw new RuntimeException(cause);
                    } else {
                        throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                    }
                }
            });
    }
```

- Untuk detail API, lihat DeleteComputeEnvironmentdi Referensi AWS SDK for Java 2.x API.

### `DeleteJobQueue`

Contoh kode berikut menunjukkan cara menggunakan`DeleteJobQueue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a Batch job queue asynchronously.
     *
     * @param jobQueueArn The Amazon Resource Name (ARN) of the job queue to delete.
     * @return A CompletableFuture that represents the asynchronous deletion of the
job queue.
     *         The future completes when the job queue has been successfully deleted
or if an error occurs.
     *         If successful, the future will be completed with a {@code Void}
value.
     *         If an error occurs, the future will be completed exceptionally with
the thrown exception.
     */
    public CompletableFuture<Void> deleteJobQueueAsync(String jobQueueArn) {
        DeleteJobQueueRequest deleteRequest = DeleteJobQueueRequest.builder()
```

```
            .jobQueue(jobQueueArn)
            .build();

        CompletableFuture<DeleteJobQueueResponse> responseFuture =
getAsyncClient().deleteJobQueue(deleteRequest);
        return responseFuture.whenComplete((deleteResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete job queue: " +
ex.getMessage(), ex);
            }
        }).thenApply(deleteResponse -> null);
    }
```

- Untuk detail API, lihat DeleteJobQueuedi Referensi AWS SDK for Java 2.x API.

### `DeregisterJobDefinition`

Contoh kode berikut menunjukkan cara menggunakan`DeregisterJobDefinition`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deregisters a job definition asynchronously.
     *
     * @param jobDefinition the name of the job definition to be deregistered
     * @return a CompletableFuture that completes when the job definition has been
deregistered
     * or an exception has occurred
     */
    public CompletableFuture<DeregisterJobDefinitionResponse>
deregisterJobDefinitionAsync(String jobDefinition) {
        DeregisterJobDefinitionRequest jobDefinitionRequest =
DeregisterJobDefinitionRequest.builder()
            .jobDefinition(jobDefinition)
            .build();
```

```
        CompletableFuture<DeregisterJobDefinitionResponse> responseFuture =
getAsyncClient().deregisterJobDefinition(jobDefinitionRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        });

        return responseFuture;
    }
```

- Untuk detail API, lihat DeregisterJobDefinitiondi Referensi AWS SDK for Java 2.x API.

### `DescribeComputeEnvironments`

Contoh kode berikut menunjukkan cara menggunakan`DescribeComputeEnvironments`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Checks the status of the specified compute environment.
     *
     * @param computeEnvironmentName the name of the compute environment to check
     * @return a CompletableFuture containing the status of the compute environment,
or "ERROR" if an exception occurs
     */
    public CompletableFuture<String> checkComputeEnvironmentsStatus(String
computeEnvironmentName) {
        if (computeEnvironmentName == null || computeEnvironmentName.isEmpty()) {
            throw new IllegalArgumentException("Compute environment name cannot be
null or empty");
        }
```

```
        DescribeComputeEnvironmentsRequest environmentsRequest =
DescribeComputeEnvironmentsRequest.builder()
            .computeEnvironments(computeEnvironmentName)
            .build();

        CompletableFuture<DescribeComputeEnvironmentsResponse> response =
getAsyncClient().describeComputeEnvironments(environmentsRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                throw new RuntimeException(errorMessage, ex);
            }
        });

        return response.thenApply(resp -> resp.computeEnvironments().stream()
            .map(env -> env.statusAsString())
            .findFirst()
            .orElse("UNKNOWN"));
    }
```

- Untuk detail API, lihat DescribeComputeEnvironmentsdi Referensi AWS SDK for Java 2.x API.

### `DescribeJobQueues`

Contoh kode berikut menunjukkan cara menggunakan`DescribeJobQueues`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously describes the job queue associated with the specified compute
environment.
     *
     * @param computeEnvironmentName the name of the compute environment to find the
associated job queue for
```

```
    * @return a {@link CompletableFuture} that, when completed, contains the job
queue ARN associated with the specified compute environment
    * @throws RuntimeException if the job queue description fails
    */
   public CompletableFuture<String> describeJobQueueAsync(String
computeEnvironmentName) {
       DescribeJobQueuesRequest describeJobQueuesRequest =
DescribeJobQueuesRequest.builder()
           .build();

       CompletableFuture<DescribeJobQueuesResponse> responseFuture =
getAsyncClient().describeJobQueues(describeJobQueuesRequest);
       return responseFuture.whenComplete((describeJobQueuesResponse, ex) -> {
           if (describeJobQueuesResponse != null) {
               String jobQueueARN;
               for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
                   for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                       String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                       String name = getComputeEnvironmentName(computeEnvironment);
                       if (name.equals(computeEnvironmentName)) {
                           jobQueueARN = jobQueueDetail.jobQueueArn();
                           logger.info("Job queue ARN associated with the compute
environment: " + jobQueueARN);
                       }
                   }
               }
           } else {
               throw new RuntimeException("Failed to describe job queue: " +
ex.getMessage(), ex);
           }
       }).thenApply(describeJobQueuesResponse -> {
           String jobQueueARN = "";
           for (JobQueueDetail jobQueueDetail :
describeJobQueuesResponse.jobQueues()) {
               for (ComputeEnvironmentOrder computeEnvironmentOrder :
jobQueueDetail.computeEnvironmentOrder()) {
                   String computeEnvironment =
computeEnvironmentOrder.computeEnvironment();
                   String name = getComputeEnvironmentName(computeEnvironment);
                   if (name.equals(computeEnvironmentName)) {
                       jobQueueARN = jobQueueDetail.jobQueueArn();
```

```
                    }
                }
            }
            return jobQueueARN;
        });
    }
```

- Untuk detail API, lihat DescribeJobQueuesdi Referensi AWS SDK for Java 2.x API.

### `DescribeJobs`

Contoh kode berikut menunjukkan cara menggunakan`DescribeJobs`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously retrieves the status of a specific job.
     *
     * @param jobId the ID of the job to retrieve the status for
     * @return a CompletableFuture that completes with the job status
     */
    public CompletableFuture<String> describeJobAsync(String jobId) {
        DescribeJobsRequest describeJobsRequest = DescribeJobsRequest.builder()
            .jobs(jobId)
            .build();

        CompletableFuture<DescribeJobsResponse> responseFuture =
getAsyncClient().describeJobs(describeJobsRequest);
        return responseFuture.whenComplete((response, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
            }
        }).thenApply(response -> response.jobs().get(0).status().toString());
    }
```

- Untuk detail API, lihat DescribeJobsdi Referensi AWS SDK for Java 2.x API.

### `ListJobsPaginator`

Contoh kode berikut menunjukkan cara menggunakan`ListJobsPaginator`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously lists the jobs in the specified job queue with the given job
status.
    *
    * @param jobQueue the name of the job queue to list jobs from
    * @return a List<JobSummary> that contains the jobs that succeeded
    */
   public List<JobSummary> listJobsAsync(String jobQueue) {
       if (jobQueue == null || jobQueue.isEmpty()) {
           throw new IllegalArgumentException("Job queue cannot be null or empty");
       }

       ListJobsRequest listJobsRequest = ListJobsRequest.builder()
           .jobQueue(jobQueue)
           .jobStatus(JobStatus.SUCCEEDED)  // Filter jobs by status.
           .build();

       List<JobSummary> jobSummaries = new ArrayList<>();
       ListJobsPublisher listJobsPaginator =
getAsyncClient().listJobsPaginator(listJobsRequest);
       CompletableFuture<Void> future = listJobsPaginator.subscribe(response -> {
           jobSummaries.addAll(response.jobSummaryList());
       });
       future.join();
       return jobSummaries;
   }
```

- Untuk detail API, lihat ListJobsPaginatordi Referensi AWS SDK for Java 2.x API.

### `RegisterJobDefinition`

Contoh kode berikut menunjukkan cara menggunakan`RegisterJobDefinition`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Registers a new job definition asynchronously in AWS Batch.
    * <p>
    * When using Fargate as the compute environment, it is crucial to set the
    * {@link NetworkConfiguration} with {@link AssignPublicIp#ENABLED} to
    * ensure proper networking configuration for the Fargate tasks. This
    * allows the tasks to communicate with external services, access the
    * internet, or communicate within a VPC.
    *
    * @param jobDefinitionName the name of the job definition to be registered
    * @param executionRoleARN the ARN (Amazon Resource Name) of the execution role
    *                         that provides permissions for the containers in the
job
    * @param cpuArch a value of either X86_64 or ARM64 required for the service
call
    * @return a CompletableFuture that completes with the ARN of the registered
    *         job definition upon successful execution, or completes exceptionally
with
    *         an error if the registration fails
    */
   public CompletableFuture<String> registerJobDefinitionAsync(String
jobDefinitionName, String executionRoleARN, String image, String cpuArch) {
       NetworkConfiguration networkConfiguration = NetworkConfiguration.builder()
               .assignPublicIp(AssignPublicIp.ENABLED)
               .build();
```

```
        ContainerProperties containerProperties = ContainerProperties.builder()
                .image(image)
                .executionRoleArn(executionRoleARN)
                .resourceRequirements(
                        Arrays.asList(
                                ResourceRequirement.builder()
                                        .type(ResourceType.VCPU)
                                        .value("1")
                                        .build(),
                                ResourceRequirement.builder()
                                        .type(ResourceType.MEMORY)
                                        .value("2048")
                                        .build()
                        )
                )
                .networkConfiguration(networkConfiguration)
               .runtimePlatform(b -> b
                        .cpuArchitecture(cpuArch)
                        .operatingSystemFamily("LINUX"))
                .build();

        RegisterJobDefinitionRequest request =
RegisterJobDefinitionRequest.builder()
                .jobDefinitionName(jobDefinitionName)
                .type(JobDefinitionType.CONTAINER)
                .containerProperties(containerProperties)
                .platformCapabilities(PlatformCapability.FARGATE)
                .build();

        CompletableFuture<String> future = new CompletableFuture<>();
        getAsyncClient().registerJobDefinition(request)
                .thenApply(RegisterJobDefinitionResponse::jobDefinitionArn)
                .whenComplete((result, ex) -> {
                    if (ex != null) {
                        future.completeExceptionally(ex);
                    } else {
                        future.complete(result);
                    }
                });

        return future;
    }
```

- Untuk detail API, lihat RegisterJobDefinitiondi Referensi AWS SDK for Java 2.x API.

### `SubmitJob`

Contoh kode berikut menunjukkan cara menggunakan`SubmitJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Submits a job asynchronously to the AWS Batch service.
    *
    * @param jobDefinitionName the name of the job definition to use
    * @param jobQueueName the name of the job queue to submit the job to
    * @param jobARN the Amazon Resource Name (ARN) of the job definition
    * @return a CompletableFuture that, when completed, contains the job ID of the
submitted job
    */
   public CompletableFuture<String> submitJobAsync(String jobDefinitionName, String
jobQueueName, String jobARN) {
       SubmitJobRequest jobRequest = SubmitJobRequest.builder()
           .jobDefinition(jobARN)
           .jobName(jobDefinitionName)
           .jobQueue(jobQueueName)
           .build();

       CompletableFuture<SubmitJobResponse> responseFuture =
getAsyncClient().submitJob(jobRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Unexpected error occurred: " +
ex.getMessage(), ex);
           }
       });

       return responseFuture.thenApply(SubmitJobResponse::jobId);
   }
```

- Untuk detail API, lihat SubmitJobdi Referensi AWS SDK for Java 2.x API.

### `UpdateComputeEnvironment`

Contoh kode berikut menunjukkan cara menggunakan`UpdateComputeEnvironment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Disables the specified compute environment asynchronously.
    *
    * @param computeEnvironmentName the name of the compute environment to disable
    * @return a CompletableFuture that completes when the compute environment is
disabled
    */
   public CompletableFuture<UpdateComputeEnvironmentResponse>
disableComputeEnvironmentAsync(String computeEnvironmentName) {
       UpdateComputeEnvironmentRequest updateRequest =
UpdateComputeEnvironmentRequest.builder()
           .computeEnvironment(computeEnvironmentName)
           .state(CEState.DISABLED)
           .build();

       CompletableFuture<UpdateComputeEnvironmentResponse> responseFuture =
getAsyncClient().updateComputeEnvironment(updateRequest);
       responseFuture.whenComplete((response, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to disable compute environment: "
+ ex.getMessage(), ex);
           }
       });

       return responseFuture;
   }
```

- Untuk detail API, lihat UpdateComputeEnvironmentdi Referensi AWS SDK for Java 2.x API.

### `UpdateJobQueue`

Contoh kode berikut menunjukkan cara menggunakan`UpdateJobQueue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Disables the specified job queue asynchronously.
    *
    * @param jobQueueArn the Amazon Resource Name (ARN) of the job queue to be
disabled
    * @return a {@link CompletableFuture} that completes when the job queue update
operation is complete,
    *         or completes exceptionally if an error occurs during the operation
    */
   public CompletableFuture<Void> disableJobQueueAsync(String jobQueueArn) {
       UpdateJobQueueRequest updateRequest = UpdateJobQueueRequest.builder()
           .jobQueue(jobQueueArn)
           .state(JQState.DISABLED)
           .build();

       CompletableFuture<UpdateJobQueueResponse> responseFuture =
getAsyncClient().updateJobQueue(updateRequest);
       return responseFuture.whenComplete((updateResponse, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to update job queue: " +
ex.getMessage(), ex);
           }
       }).thenApply(updateResponse -> null);
   }
```

- Untuk detail API, lihat UpdateJobQueuedi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Bedrock menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon Bedrock.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `GetFoundationModel`

Contoh kode berikut menunjukkan cara menggunakan`GetFoundationModel`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan detail tentang model foundation menggunakan klien Amazon Bedrock sinkron.

```
    /**
     * Get details about an Amazon Bedrock foundation model.
     *
     * @param bedrockClient   The service client for accessing Amazon Bedrock.
     * @param modelIdentifier The model identifier.
     * @return An object containing the foundation model's details.
     */
```

```
    public static FoundationModelDetails getFoundationModel(BedrockClient
bedrockClient, String modelIdentifier) {
        try {
            GetFoundationModelResponse response = bedrockClient.getFoundationModel(
                    r -> r.modelIdentifier(modelIdentifier)
            );

            FoundationModelDetails model = response.modelDetails();

            System.out.println(" Model ID:                    " + model.modelId());
            System.out.println(" Model ARN:                   " +
model.modelArn());
            System.out.println(" Model Name:                  " +
model.modelName());
            System.out.println(" Provider Name:               " +
model.providerName());
            System.out.println(" Lifecycle status:            " +
model.modelLifecycle().statusAsString());
            System.out.println(" Input modalities:            " +
model.inputModalities());
            System.out.println(" Output modalities:           " +
model.outputModalities());
            System.out.println(" Supported customizations:    " +
model.customizationsSupported());
            System.out.println(" Supported inference types:   " +
model.inferenceTypesSupported());
            System.out.println(" Response streaming supported: " +
model.responseStreamingSupported());

            return model;

        } catch (ValidationException e) {
            throw new IllegalArgumentException(e.getMessage());
        } catch (SdkException e) {
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

Dapatkan detail tentang model foundation menggunakan klien Amazon Bedrock asinkron.

```
    /**
```

```
    * Get details about an Amazon Bedrock foundation model.
    *
    * @param bedrockClient   The async service client for accessing Amazon Bedrock.
    * @param modelIdentifier The model identifier.
    * @return An object containing the foundation model's details.
    */
   public static FoundationModelDetails getFoundationModel(BedrockAsyncClient
bedrockClient, String modelIdentifier) {
       try {
           CompletableFuture<GetFoundationModelResponse> future =
bedrockClient.getFoundationModel(
                   r -> r.modelIdentifier(modelIdentifier)
           );

           FoundationModelDetails model = future.get().modelDetails();

           System.out.println(" Model ID:                    " + model.modelId());
           System.out.println(" Model ARN:                   " +
model.modelArn());
           System.out.println(" Model Name:                  " +
model.modelName());
           System.out.println(" Provider Name:               " +
model.providerName());
           System.out.println(" Lifecycle status:            " +
model.modelLifecycle().statusAsString());
           System.out.println(" Input modalities:            " +
model.inputModalities());
           System.out.println(" Output modalities:           " +
model.outputModalities());
           System.out.println(" Supported customizations:    " +
model.customizationsSupported());
           System.out.println(" Supported inference types:   " +
model.inferenceTypesSupported());
           System.out.println(" Response streaming supported: " +
model.responseStreamingSupported());

           return model;

       } catch (ExecutionException e) {
           if (e.getMessage().contains("ValidationException")) {
               throw new IllegalArgumentException(e.getMessage());
           } else {
               System.err.println(e.getMessage());
               throw new RuntimeException(e);
```

```
            }
        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat GetFoundationModeldi Referensi AWS SDK for Java 2.x API.

### `ListFoundationModels`

Contoh kode berikut menunjukkan cara menggunakan`ListFoundationModels`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat daftar model foundation Amazon Bedrock yang tersedia menggunakan klien Amazon Bedrock sinkron.

```
    /**
     * Lists Amazon Bedrock foundation models that you can use.
     * You can filter the results with the request parameters.
     *
     * @param bedrockClient The service client for accessing Amazon Bedrock.
     * @return A list of objects containing the foundation models' details
     */
    public static List<FoundationModelSummary> listFoundationModels(BedrockClient
bedrockClient) {

        try {
            ListFoundationModelsResponse response =
bedrockClient.listFoundationModels(r -> {});

            List<FoundationModelSummary> models = response.modelSummaries();
```

```
            if (models.isEmpty()) {
                System.out.println("No available foundation models in " +
region.toString());
            } else {
                for (FoundationModelSummary model : models) {
                    System.out.println("Model ID: " + model.modelId());
                    System.out.println("Provider: " + model.providerName());
                    System.out.println("Name:     " + model.modelName());
                    System.out.println();
                }
            }

            return models;

        } catch (SdkClientException e) {
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

Buat daftar model foundation Amazon Bedrock yang tersedia menggunakan klien Amazon Bedrock asinkron.

```
    /**
     * Lists Amazon Bedrock foundation models that you can use.
     * You can filter the results with the request parameters.
     *
     * @param bedrockClient The async service client for accessing Amazon Bedrock.
     * @return A list of objects containing the foundation models' details
     */
    public static List<FoundationModelSummary>
listFoundationModels(BedrockAsyncClient bedrockClient) {
        try {
            CompletableFuture<ListFoundationModelsResponse> future =
bedrockClient.listFoundationModels(r -> {});

            List<FoundationModelSummary> models = future.get().modelSummaries();

            if (models.isEmpty()) {
                System.out.println("No available foundation models in " +
region.toString());
            } else {
```

```
                for (FoundationModelSummary model : models) {
                    System.out.println("Model ID: " + model.modelId());
                    System.out.println("Provider: " + model.providerName());
                    System.out.println("Name:     " + model.modelName());
                    System.out.println();
                }
            }

            return models;

        } catch (InterruptedException e) {
            Thread.currentThread().interrupt();
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        } catch (ExecutionException e) {
            System.err.println(e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat ListFoundationModelsdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Bedrock Runtime menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Runtime AWS SDK for Java 2.x with Amazon Bedrock.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Skenario
- Amazon Nova
- Kanvas Amazon Nova
- Generator Gambar Amazon Titan

- Embeddings Teks Amazon Titan
- Antropik Claude
- Perintah Cohere
- Meta Llama
- Mistral AI
- Difusi Stabil

## Skenario

Buat aplikasi taman bermain untuk berinteraksi dengan model yayasan Amazon Bedrock

Contoh kode berikut menunjukkan cara membuat taman bermain untuk berinteraksi dengan model dasar Amazon Bedrock melalui modalitas yang berbeda.

SDK untuk Java 2.x

Java Foundation Model (FM) Playground adalah contoh aplikasi Spring Boot yang menampilkan cara menggunakan Amazon Bedrock dengan Java. Contoh ini menunjukkan bagaimana pengembang Java dapat menggunakan Amazon Bedrock untuk membangun aplikasi berkemampuan AI generatif. Anda dapat menguji dan berinteraksi dengan model yayasan Amazon Bedrock dengan menggunakan tiga taman bermain berikut:

- Taman bermain teks.
- Taman bermain obrolan.
- Taman bermain gambar.

Contoh ini juga mencantumkan dan menampilkan model pondasi yang dapat Anda akses, bersama dengan karakteristiknya. Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Waktu Jalan Amazon Bedrock

Hasilkan video dari petunjuk teks menggunakan Amazon Bedrock

Contoh kode berikut menunjukkan cara aplikasi Spring Boot yang menghasilkan video dari prompt teks menggunakan Amazon Bedrock dan model Nova-Reel.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hasilkan video dari petunjuk teks menggunakan Amazon Bedrock dan Nova-Reel.

```
import org.springframework.stereotype.Service;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

@Service
public class VideoGenerationService {

    public GenerateVideoResponse generateVideo(String prompt) {

        // add S3 bucket you want to store your generated videos
        String s3Bucket = "s3://mygeneratedvidoenovatest";


        //Create json request as an instance of Document class
        Document novaRequest = prepareDocument(prompt);

        // Create request
        StartAsyncInvokeRequest request = StartAsyncInvokeRequest.builder()
                .modelId("amazon.nova-reel-v1:0")
                .modelInput(novaRequest)
                .outputDataConfig(AsyncInvokeOutputDataConfig.builder()

 .s3OutputDataConfig(AsyncInvokeS3OutputDataConfig.builder().s3Uri(s3Bucket).build())
                        .build())
                .build();

        try (BedrockRuntimeAsyncClient bedrockClient =
 getBedrockRuntimeAsyncClient()) {
```

```
            CompletableFuture<StartAsyncInvokeResponse>
startAsyncInvokeResponseCompletableFuture =
bedrockClient.startAsyncInvoke(request);

            //blocking operation to wait for the AWS API response
            StartAsyncInvokeResponse startAsyncInvokeResponse =
startAsyncInvokeResponseCompletableFuture.get();
            System.out.println("invocation ARN: " +
startAsyncInvokeResponse.invocationArn());

            GenerateVideoResponse response = new GenerateVideoResponse();
            response.setStatus("inProgress");
            response.setExecutionArn(startAsyncInvokeResponse.invocationArn());

            return response;
        } catch (Exception e) {
            System.out.println(e);
            throw new RuntimeException(e);
        }

    }

    public GenerateVideoResponse checkGenerationStatus(String invocationArn) {
        GenerateVideoResponse response = new GenerateVideoResponse();

        try (BedrockRuntimeAsyncClient bedrockClient =
getBedrockRuntimeAsyncClient()) {
            //creating async request to fetch status by invocation Arn
            GetAsyncInvokeRequest asyncRequest =
GetAsyncInvokeRequest.builder().invocationArn(invocationArn).build();

            CompletableFuture<GetAsyncInvokeResponse> asyncInvoke =
bedrockClient.getAsyncInvoke(asyncRequest);

            //blocking operation to wait for the AWS API response
            GetAsyncInvokeResponse asyncInvokeResponse = asyncInvoke.get();
            System.out.println("Invocation status =" +
asyncInvokeResponse.statusAsString());

            response.setExecutionArn(invocationArn);
            response.setStatus(asyncInvokeResponse.statusAsString());
            return response;
        } catch (Exception e) {
            e.printStackTrace();
```

```
            throw new RuntimeException(e);
        }

    }

    private static BedrockRuntimeAsyncClient getBedrockRuntimeAsyncClient() {
        BedrockRuntimeAsyncClient bedrockClient =
 BedrockRuntimeAsyncClient.builder()
                .region(Region.US_EAST_1)
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();
        return bedrockClient;
    }

    private static Document prepareDocument(String prompt) {
        Document textToVideoParams = Document.mapBuilder()
                .putString("text", prompt)
                .build();

        Document videoGenerationConfig = Document.mapBuilder()
                .putNumber("durationSeconds", 6)
                .putNumber("fps", 24)
                .putString("dimension", "1280x720")
                .build();

        Document novaRequest = Document.mapBuilder()
                .putString("taskType", "TEXT_VIDEO")
                .putDocument("textToVideoParams", textToVideoParams)
                .putDocument("videoGenerationConfig", videoGenerationConfig)
                .build();
        return novaRequest;
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - GetAsyncInvoke
  - StartAsyncInvoke

Penggunaan alat dengan API Converse

Contoh kode berikut menunjukkan bagaimana membangun interaksi khas antara aplikasi, model AI generatif, dan alat yang terhubung atau APIs untuk memediasi interaksi antara AI dan dunia luar. Ini menggunakan contoh menghubungkan API cuaca eksternal ke model AI sehingga dapat memberikan informasi cuaca real-time berdasarkan input pengguna.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Eksekusi utama dari alur skenario. Skenario ini mengatur percakapan antara pengguna, Amazon Bedrock Converse API, dan alat cuaca.

```
/*
 This demo illustrates a tool use scenario using Amazon Bedrock's Converse API and a
 weather tool.
 The program interacts with a foundation model on Amazon Bedrock to provide weather
 information based on user
 input. It uses the Open-Meteo API (https://open-meteo.com) to retrieve current
 weather data for a given location.
 */
public class BedrockScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String modelId = "amazon.nova-lite-v1:0";
    private static String defaultPrompt = "What is the weather like in Seattle?";
    private static WeatherTool weatherTool = new WeatherTool();

    // The maximum number of recursive calls allowed in the tool use function.
    // This helps prevent infinite loops and potential performance issues.
    private static int maxRecursions = 5;
    static BedrockActions bedrockActions = new BedrockActions();
    public static boolean interactive = true;

    private static final String systemPrompt = """
            You are a weather assistant that provides current weather data for user-
specified locations using only
```

```
            the Weather_Tool, which expects latitude and longitude. Infer the
 coordinates from the location yourself.
            If the user provides coordinates, infer the approximate location and
 refer to it in your response.
            To use the tool, you strictly apply the provided tool specification.

            - Explain your step-by-step process, and give brief updates before each
 step.
            - Only use the Weather_Tool for data. Never guess or make up
 information.
            - Repeat the tool use for subsequent requests if necessary.
            - If the tool errors, apologize, explain weather is unavailable, and
 suggest other options.
            - Report temperatures in °C (°F) and wind in km/h (mph). Keep weather
 reports concise. Sparingly use
              emojis where appropriate.
            - Only respond to weather queries. Remind off-topic users of your
 purpose.
            - Never claim to search online, access external data, or use tools
 besides Weather_Tool.
            - Complete the entire process until you have all required data before
 sending the complete response.
            """;

    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        System.out.println("""
                ==================================================
                Welcome to the Amazon Bedrock Tool Use demo!
                ==================================================

                This assistant provides current weather information for user-
specified locations.
                You can ask for weather details by providing the location name or
 coordinates.

                Example queries:
                - What's the weather like in New York?
                - Current weather for latitude 40.70, longitude -74.01
                - Is it warmer in Rome or Barcelona today?

                To exit the program, simply type 'x' and press Enter.
```

```
                P.S.: You're not limited to single locations, or even to using
English!
                Have fun and experiment with the app!
                """);
        System.out.println(DASHES);

        try {
            runConversation(scanner);

        } catch (Exception ex) {
            System.out.println("There was a problem running the scenario: " +
ex.getMessage());
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("Amazon Bedrock Converse API with Tool Use Feature
Scenario is complete.");
        System.out.println(DASHES);
    }

    /**
     * Starts the conversation with the user and handles the interaction with
Bedrock.
     */
    private static List<Message> runConversation(Scanner scanner) {
        List<Message> conversation = new ArrayList<>();

        // Get the first user input
        String userInput = getUserInput("Your weather info request:", scanner);
        System.out.println(userInput);

        while (userInput != null) {
            ContentBlock block = ContentBlock.builder()
                    .text(userInput)
                    .build();

            List<ContentBlock> blockList = new ArrayList<>();
            blockList.add(block);

            Message message = Message.builder()
                    .role(ConversationRole.USER)
                    .content(blockList)
```

```
                    .build();

            conversation.add(message);

            // Send the conversation to Amazon Bedrock.
            ConverseResponse bedrockResponse =
sendConversationToBedrock(conversation);

            // Recursively handle the model's response until the model has returned
its final response or the recursion counter has reached 0.
            processModelResponse(bedrockResponse, conversation, maxRecursions);

            // Repeat the loop until the user decides to exit the application.
            userInput = getUserInput("Your weather info request:", scanner);
        }
        printFooter();
        return conversation;
    }

    /**
     * Processes the response from the model and updates the conversation
accordingly.
     *
     * @param modelResponse the response from the model
     * @param conversation  the ongoing conversation
     * @param maxRecursion  the maximum number of recursions allowed
     */
    private static void processModelResponse(ConverseResponse modelResponse,
List<Message> conversation, int maxRecursion) {
        if (maxRecursion <= 0) {
            // Stop the process, the number of recursive calls could indicate an
infinite loop
            System.out.println("\tWarning: Maximum number of recursions reached.
Please try again.");
        }

        // Append the model's response to the ongoing conversation
        conversation.add(modelResponse.output().message());

        String modelResponseVal = modelResponse.stopReasonAsString();
        if (modelResponseVal.compareTo("tool_use") == 0) {
            // If the stop reason is "tool_use", forward everything to the tool use
handler
            handleToolUse(modelResponse.output(), conversation, maxRecursion - 1);
```

```
        }

        if (modelResponseVal.compareTo("end_turn") == 0) {
            // If the stop reason is "end_turn", print the model's response text,
and finish the process

PrintModelResponse(modelResponse.output().message().content().get(0).text());
            if (!interactive) {
                defaultPrompt = "x";
            }
        }
    }

    /**
     * Handles the use of a tool by the model in a conversation.
     *
     * @param modelResponse the response from the model, which may include a tool
use request
     * @param conversation  the current conversation, which will be updated with the
tool use results
     * @param maxRecursion  the maximum number of recursive calls allowed to handle
the model's response
     */
    private static void handleToolUse(ConverseOutput modelResponse, List<Message>
conversation, int maxRecursion) {
        List<ContentBlock> toolResults = new ArrayList<>();

        // The model's response can consist of multiple content blocks
        for (ContentBlock contentBlock : modelResponse.message().content()) {
            if (contentBlock.text() != null && !contentBlock.text().isEmpty()) {
                // If the content block contains text, print it to the console
                PrintModelResponse(contentBlock.text());
            }

            if (contentBlock.toolUse() != null) {
                ToolResponse toolResponse = invokeTool(contentBlock.toolUse());

                // Add the tool use ID and the tool's response to the list of
results
                List<ToolResultContentBlock> contentBlockList = new ArrayList<>();
                ToolResultContentBlock block = ToolResultContentBlock.builder()
                        .json(toolResponse.getContent())
                        .build();
                contentBlockList.add(block);
```

```
                ToolResultBlock toolResultBlock = ToolResultBlock.builder()
                        .toolUseId(toolResponse.getToolUseId())
                        .content(contentBlockList)
                        .build();

                ContentBlock contentBlock1 = ContentBlock.builder()
                        .toolResult(toolResultBlock)
                        .build();

                toolResults.add(contentBlock1);
            }
        }

        // Embed the tool results in a new user message
        Message message = Message.builder()
                .role(ConversationRole.USER)
                .content(toolResults)
                .build();

        // Append the new message to the ongoing conversation
        //conversation.add(message);
        conversation.add(message);

        // Send the conversation to Amazon Bedrock
        var response = sendConversationToBedrock(conversation);

        // Recursively handle the model's response until the model has returned its
final response or the recursion counter has reached 0
        processModelResponse(response, conversation, maxRecursion);
    }

    // Invokes the specified tool with the given payload and returns the tool's
response.
    // If the requested tool does not exist, an error message is returned.
    private static ToolResponse invokeTool(ToolUseBlock payload) {
        String toolName = payload.name();

        if (Objects.equals(toolName, "Weather_Tool")) {
            Map<String, Document> inputData = payload.input().asMap();
            printToolUse(toolName, inputData);

            // Invoke the weather tool with the input data provided
```

```
            Document weatherResponse =
weatherTool.fetchWeatherData(inputData.get("latitude").toString(),
inputData.get("longitude").toString());

            ToolResponse toolResponse = new ToolResponse();
            toolResponse.setContent(weatherResponse);
            toolResponse.setToolUseId(payload.toolUseId());
            return toolResponse;
        } else {
            String errorMessage = "The requested tool with name " + toolName + "
does not exist.";
            System.out.println(errorMessage);
            return null;
        }
    }

    public static void printToolUse(String toolName, Map<String, Document>
inputData) {
        System.out.println("Invoking tool: " + toolName + " with input: " +
inputData.get("latitude").toString() + ", " + inputData.get("longitude").toString()
+ "...");
    }

    private static void PrintModelResponse(String message) {
        System.out.println("\tThe model's response:\n");
        System.out.println(message);
        System.out.println("");
    }

    private static ConverseResponse sendConversationToBedrock(List<Message>
conversation) {
        System.out.println("Calling Bedrock...");

        try {
            return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, weatherTool.getToolSpec());
        } catch (ModelNotReadyException ex) {
             System.err.println("Model is not ready. Please try again later: " +
ex.getMessage());
            throw ex;
        } catch (BedrockRuntimeException ex) {
            System.err.println("Bedrock service error: " + ex.getMessage());
            throw ex;
        } catch (RuntimeException ex) {
```

```
            System.err.println("Unexpected error occurred: " + ex.getMessage());
            throw ex;
        }
    }

    private static ConverseResponse sendConversationToBedrockwithSpec(List<Message>
conversation, ToolSpecification toolSpec) {
        System.out.println("Calling Bedrock...");

        // Send the conversation, system prompt, and tool configuration, and return
the response
        return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, toolSpec);
    }

    public static String getUserInput(String prompt, Scanner scanner) {
        String userInput = defaultPrompt;
        if (interactive) {
            System.out.println("*".repeat(80));
            System.out.println(prompt + " (x to exit): \n\t");
            userInput = scanner.nextLine();
        }

        if (userInput == null || userInput.trim().isEmpty()) {
            return getUserInput("\tPlease enter your weather info request, e.g., the
name of a city", scanner);
        }

        if (userInput.equalsIgnoreCase("x")) {
            return null;
        }

        return userInput;
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
```

```
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    public static void printFooter() {
        System.out.println("""
                ================================================
                Thank you for checking out the Amazon Bedrock Tool Use demo. We hope
 you
                learned something new, or got some inspiration for your own apps
 today!

                For more Bedrock examples in different programming languages, have a
 look at:
                https://docs.aws.amazon.com/bedrock/latest/userguide/
service_code_examples.html
                ================================================
                """);
    }
}
```

Alat cuaca yang digunakan oleh demo. File ini mendefinisikan spesifikasi alat dan mengimplementasikan logika untuk mengambil data cuaca menggunakan dari Open-Meteo API.

```
public class WeatherTool {

    private static final Logger logger = LoggerFactory.getLogger(WeatherTool.class);
    private static java.net.http.HttpClient httpClient = null;

    /**
     * Returns the JSON Schema specification for the Weather tool. The tool
 specification
     * defines the input schema and describes the tool's functionality.
     * For more information, see https://json-schema.org/understanding-json-schema/
reference.
     *
     * @return The tool specification for the Weather tool.
     */
```

```
    public ToolSpecification getToolSpec() {
        Map<String, Document> latitudeMap = new HashMap<>();
        latitudeMap.put("type", Document.fromString("string"));
        latitudeMap.put("description", Document.fromString("Geographical WGS84
latitude of the location."));

        // Create the nested "longitude" object
        Map<String, Document> longitudeMap = new HashMap<>();
        longitudeMap.put("type", Document.fromString("string"));
        longitudeMap.put("description", Document.fromString("Geographical WGS84
longitude of the location."));

        // Create the "properties" object
        Map<String, Document> propertiesMap = new HashMap<>();
        propertiesMap.put("latitude", Document.fromMap(latitudeMap));
        propertiesMap.put("longitude", Document.fromMap(longitudeMap));

        // Create the "required" array
        List<Document> requiredList = new ArrayList<>();
        requiredList.add(Document.fromString("latitude"));
        requiredList.add(Document.fromString("longitude"));

        // Create the root object
        Map<String, Document> rootMap = new HashMap<>();
        rootMap.put("type", Document.fromString("object"));
        rootMap.put("properties", Document.fromMap(propertiesMap));
        rootMap.put("required", Document.fromList(requiredList));

        // Now create the Document representing the JSON schema
        Document document = Document.fromMap(rootMap);

        ToolSpecification specification = ToolSpecification.builder()
            .name("Weather_Tool")
            .description("Get the current weather for a given location, based on its
WGS84 coordinates.")
            .inputSchema(ToolInputSchema.builder()
                .json(document)
                .build())
            .build();

        return specification;
    }

    /**
```

```
     * Fetches weather data for the given latitude and longitude.
     *
     * @param latitude  the latitude coordinate
     * @param longitude the longitude coordinate
     * @return a {@link CompletableFuture} containing the weather data as a JSON
 string
     */
    public Document fetchWeatherData(String latitude, String longitude) {
        HttpClient httpClient = HttpClient.newHttpClient();

        // Ensure no extra double quotes
        latitude = latitude.replace("\"", "");
        longitude = longitude.replace("\"", "");

        String endpoint = "https://api.open-meteo.com/v1/forecast";
        String url = String.format("%s?latitude=%s&longitude=
%s&current_weather=True", endpoint, latitude, longitude);

        HttpRequest request = HttpRequest.newBuilder()
            .uri(URI.create(url))
            .build();

        try {
            HttpResponse<String> response = httpClient.send(request,
 HttpResponse.BodyHandlers.ofString());
            if (response.statusCode() == 200) {
                String weatherJson = response.body();
                System.out.println(weatherJson);
                ObjectMapper objectMapper = new ObjectMapper();
                Map<String, Object> rawMap = objectMapper.readValue(weatherJson, new
 TypeReference<Map<String, Object>>() {});
                Map<String, Document> documentMap = convertToDocumentMap(rawMap);


                Document weatherDocument = Document.fromMap(documentMap);
                System.out.println(weatherDocument);
                return weatherDocument;
            } else {
                throw new RuntimeException("Error fetching weather data: " +
 response.statusCode());
            }
        } catch (Exception e) {
            System.out.println("Error fetching weather data: " + e.getMessage());
            throw new RuntimeException("Error fetching weather data", e);
```

```
        }

    }

    private static Map<String, Document> convertToDocumentMap(Map<String, Object>
 inputMap) {
        Map<String, Document> result = new HashMap<>();
        for (Map.Entry<String, Object> entry : inputMap.entrySet()) {
            result.put(entry.getKey(), convertToDocument(entry.getValue()));
        }
        return result;
    }

    // Convert different types of Objects to Document
    private static Document convertToDocument(Object value) {
        if (value instanceof Map) {
            return Document.fromMap(convertToDocumentMap((Map<String, Object>)
 value));
        } else if (value instanceof Integer) {
            return Document.fromNumber(SdkNumber.fromInteger((Integer) value));
        } else if (value instanceof Double) {  //
            return Document.fromNumber(SdkNumber.fromDouble((Double) value));
        } else if (value instanceof Boolean) {
            return Document.fromBoolean((Boolean) value);
        } else if (value instanceof String) {
            return Document.fromString((String) value);
        }
        return Document.fromNull(); // Handle null values safely
    }
}
```

Tindakan Converse API dengan konfigurasi alat.

```
    /**
     * Sends an asynchronous converse request to the AI model.
     *
     * @param modelId      the unique identifier of the AI model to be used for the
 converse request
     * @param systemPrompt the system prompt to be included in the converse request
     * @param conversation a list of messages representing the conversation history
     * @param toolSpec     the specification of the tool to be used in the converse
 request
```

```
     * @return the converse response received from the AI model
     */
    public ConverseResponse sendConverseRequestAsync(String modelId, String
systemPrompt, List<Message> conversation, ToolSpecification toolSpec) {
        List<Tool> toolList = new ArrayList<>();
        Tool tool = Tool.builder()
            .toolSpec(toolSpec)
            .build();

        toolList.add(tool);

        ToolConfiguration configuration = ToolConfiguration.builder()
            .tools(toolList)
            .build();

        SystemContentBlock block = SystemContentBlock.builder()
            .text(systemPrompt)
            .build();

        ConverseRequest request = ConverseRequest.builder()
            .modelId(modelId)
            .system(block)
            .messages(conversation)
            .toolConfig(configuration)
            .build();

        try {
            ConverseResponse response = getClient().converse(request).join();
            return response;

        } catch (ModelNotReadyException ex) {
            throw new RuntimeException("Model is not ready: " + ex.getMessage(),
ex);
        } catch (BedrockRuntimeException ex) {
            throw new RuntimeException("Failed to converse with Bedrock model: " +
ex.getMessage(), ex);
        }
    }
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

# Amazon Nova

Bercakap-cakap

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Amazon Nova, menggunakan API Converse Bedrock.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Amazon Nova menggunakan API Converse Bedrock dengan klien Java async.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

/**
 * This example demonstrates how to use the Amazon Nova foundation models
 * with an asynchronous Amazon Bedrock runtime client to generate text.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure and send a request
 * - Process the response
 */
public class ConverseAsync {

    public static String converseAsync() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
```

```
        BedrockRuntimeAsyncClient client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
        //   OR
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseRequest request = ConverseRequest.builder()
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
```

```
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Send and process the request asynchronously
        // - Send the request to the model
        // - Extract and return the generated text from the response
        try {
            CompletableFuture<ConverseResponse> asyncResponse =
 client.converse(request);
            return asyncResponse.thenApply(
                    response -> response.output().message().content().get(0).text()
            ).get();

        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        String response = converseAsync();
        System.out.println(response);
    }
}
```

Kirim pesan teks ke Amazon Nova, menggunakan API Converse Bedrock.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

/**
 * This example demonstrates how to use the Amazon Nova foundation models
 * with a synchronous Amazon Bedrock runtime client to generate text.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
```

```
 * - Configure and send a request
 * - Process the response
 */
public class Converse {

    public static String converse() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeClient client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
        //   OR
```

```
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseRequest request = ConverseRequest.builder()
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Send and process the request
        // - Send the request to the model
        // - Extract and return the generated text from the response
        try {
            ConverseResponse response = client.converse(request);
            return response.output().message().content().get(0).text();

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        String response = converse();
        System.out.println(response);
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

### ConverseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Amazon Nova, menggunakan API Converse Bedrock dan memproses aliran respons secara real-time.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Amazon Nova menggunakan API Converse Bedrock dan proses aliran respons secara real-time.

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.ExecutionException;

/**
 * This example demonstrates how to use the Amazon Nova foundation models with an
 * asynchronous Amazon Bedrock runtime client to generate streaming text responses.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure a streaming request
 * - Set up a stream handler to process the response chunks
 * - Process the streaming response
 */
public class ConverseStream {

    public static void converseStream() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeAsyncClient client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Step 2: Specify which model to use
```

```
        // Available Amazon Nova models and their characteristics:
        // - Amazon Nova Micro: Text-only model optimized for lowest latency and
 cost
        // - Amazon Nova Lite:  Fast, low-cost multimodal model for image, video,
 and text
        // - Amazon Nova Pro:   Advanced multimodal model balancing accuracy, speed,
 and cost
        //
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-lite-v1:0";

        // Step 3: Create the message
        // The message includes the text prompt and specifies that it comes from the
 user
        var inputText = "Describe the purpose of a 'hello world' program in one
 paragraph";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Step 4: Configure the request
        // Optional parameters to control the model's response:
        // - maxTokens: maximum number of tokens to generate
        // - temperature: randomness (max: 1.0, default: 0.7)
        //   OR
        // - topP: diversity of word choice (max: 1.0, default: 0.9)
        // Note: Use either temperature OR topP, but not both
        ConverseStreamRequest request = ConverseStreamRequest.builder()
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                                .maxTokens(500)     // The maximum response length
                                .temperature(0.5F)  // Using temperature for
 randomness control
                        //.topP(0.9F)       // Alternative: use topP instead of
 temperature
                ).build();

        // Step 5: Set up the stream handler
        // The stream handler processes chunks of the response as they arrive
        // - onContentBlockDelta: Processes each text chunk
```

```
        // - onError: Handles any errors during streaming
        var streamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            System.out.print(chunk.delta().text());
                            System.out.flush();  // Ensure immediate output of each
 chunk
                        }).build())
                .onError(err -> System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage()))
                .build();

        // Step 6: Send the streaming request and process the response
        // - Send the request to the model
        // - Attach the handler to process response chunks as they arrive
        // - Handle any errors during streaming
        try {
            client.converseStream(request, streamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }

    public static void main(String[] args) {
        converseStream();
    }
}
```

- Untuk detail API, lihat ConverseStreamdi Referensi AWS SDK for Java 2.x API.

Skenario: Penggunaan alat dengan API Converse

Contoh kode berikut menunjukkan bagaimana membangun interaksi khas antara aplikasi, model AI generatif, dan alat yang terhubung atau APIs untuk memediasi interaksi antara AI dan dunia luar. Ini menggunakan contoh menghubungkan API cuaca eksternal ke model AI sehingga dapat memberikan informasi cuaca real-time berdasarkan input pengguna.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Eksekusi utama dari alur skenario. Skenario ini mengatur percakapan antara pengguna, Amazon Bedrock Converse API, dan alat cuaca.

```
/*
 This demo illustrates a tool use scenario using Amazon Bedrock's Converse API and a
 weather tool.
 The program interacts with a foundation model on Amazon Bedrock to provide weather
 information based on user
 input. It uses the Open-Meteo API (https://open-meteo.com) to retrieve current
 weather data for a given location.
 */
public class BedrockScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String modelId = "amazon.nova-lite-v1:0";
    private static String defaultPrompt = "What is the weather like in Seattle?";
    private static WeatherTool weatherTool = new WeatherTool();

    // The maximum number of recursive calls allowed in the tool use function.
    // This helps prevent infinite loops and potential performance issues.
    private static int maxRecursions = 5;
    static BedrockActions bedrockActions = new BedrockActions();
    public static boolean interactive = true;

    private static final String systemPrompt = """
            You are a weather assistant that provides current weather data for user-
specified locations using only
            the Weather_Tool, which expects latitude and longitude. Infer the
 coordinates from the location yourself.
            If the user provides coordinates, infer the approximate location and
 refer to it in your response.
            To use the tool, you strictly apply the provided tool specification.

            - Explain your step-by-step process, and give brief updates before each
 step.
```

```
            - Only use the Weather_Tool for data. Never guess or make up
 information.
            - Repeat the tool use for subsequent requests if necessary.
            - If the tool errors, apologize, explain weather is unavailable, and
 suggest other options.
            - Report temperatures in °C (°F) and wind in km/h (mph). Keep weather
 reports concise. Sparingly use
              emojis where appropriate.
            - Only respond to weather queries. Remind off-topic users of your
 purpose.
            - Never claim to search online, access external data, or use tools
 besides Weather_Tool.
            - Complete the entire process until you have all required data before
 sending the complete response.
            """;

    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        System.out.println("""
                ==================================================
                Welcome to the Amazon Bedrock Tool Use demo!
                ==================================================

                This assistant provides current weather information for user-
specified locations.
                You can ask for weather details by providing the location name or
 coordinates.

                Example queries:
                - What's the weather like in New York?
                - Current weather for latitude 40.70, longitude -74.01
                - Is it warmer in Rome or Barcelona today?

                To exit the program, simply type 'x' and press Enter.

                P.S.: You're not limited to single locations, or even to using
 English!
                Have fun and experiment with the app!
                """);
        System.out.println(DASHES);

        try {
            runConversation(scanner);
```

```
        } catch (Exception ex) {
            System.out.println("There was a problem running the scenario: " +
ex.getMessage());
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("Amazon Bedrock Converse API with Tool Use Feature
Scenario is complete.");
        System.out.println(DASHES);
    }

    /**
     * Starts the conversation with the user and handles the interaction with
Bedrock.
     */
    private static List<Message> runConversation(Scanner scanner) {
        List<Message> conversation = new ArrayList<>();

        // Get the first user input
        String userInput = getUserInput("Your weather info request:", scanner);
        System.out.println(userInput);

        while (userInput != null) {
            ContentBlock block = ContentBlock.builder()
                    .text(userInput)
                    .build();

            List<ContentBlock> blockList = new ArrayList<>();
            blockList.add(block);

            Message message = Message.builder()
                    .role(ConversationRole.USER)
                    .content(blockList)
                    .build();

            conversation.add(message);

            // Send the conversation to Amazon Bedrock.
            ConverseResponse bedrockResponse =
sendConversationToBedrock(conversation);
```

```
            // Recursively handle the model's response until the model has returned
its final response or the recursion counter has reached 0.
            processModelResponse(bedrockResponse, conversation, maxRecursions);

            // Repeat the loop until the user decides to exit the application.
            userInput = getUserInput("Your weather info request:", scanner);
        }
        printFooter();
        return conversation;
    }

    /**
     * Processes the response from the model and updates the conversation
accordingly.
     *
     * @param modelResponse the response from the model
     * @param conversation  the ongoing conversation
     * @param maxRecursion  the maximum number of recursions allowed
     */
    private static void processModelResponse(ConverseResponse modelResponse,
List<Message> conversation, int maxRecursion) {
        if (maxRecursion <= 0) {
            // Stop the process, the number of recursive calls could indicate an
infinite loop
            System.out.println("\tWarning: Maximum number of recursions reached.
Please try again.");
        }

        // Append the model's response to the ongoing conversation
        conversation.add(modelResponse.output().message());

        String modelResponseVal = modelResponse.stopReasonAsString();
        if (modelResponseVal.compareTo("tool_use") == 0) {
            // If the stop reason is "tool_use", forward everything to the tool use
handler
            handleToolUse(modelResponse.output(), conversation, maxRecursion - 1);
        }

        if (modelResponseVal.compareTo("end_turn") == 0) {
            // If the stop reason is "end_turn", print the model's response text,
and finish the process

PrintModelResponse(modelResponse.output().message().content().get(0).text());
            if (!interactive) {
```

```
                defaultPrompt = "x";
            }
        }
    }

    /**
     * Handles the use of a tool by the model in a conversation.
     *
     * @param modelResponse the response from the model, which may include a tool
use request
     * @param conversation  the current conversation, which will be updated with the
tool use results
     * @param maxRecursion  the maximum number of recursive calls allowed to handle
the model's response
     */
    private static void handleToolUse(ConverseOutput modelResponse, List<Message>
conversation, int maxRecursion) {
        List<ContentBlock> toolResults = new ArrayList<>();

        // The model's response can consist of multiple content blocks
        for (ContentBlock contentBlock : modelResponse.message().content()) {
            if (contentBlock.text() != null && !contentBlock.text().isEmpty()) {
                // If the content block contains text, print it to the console
                PrintModelResponse(contentBlock.text());
            }

            if (contentBlock.toolUse() != null) {
                ToolResponse toolResponse = invokeTool(contentBlock.toolUse());

                // Add the tool use ID and the tool's response to the list of
results
                List<ToolResultContentBlock> contentBlockList = new ArrayList<>();
                ToolResultContentBlock block = ToolResultContentBlock.builder()
                        .json(toolResponse.getContent())
                        .build();
                contentBlockList.add(block);

                ToolResultBlock toolResultBlock = ToolResultBlock.builder()
                        .toolUseId(toolResponse.getToolUseId())
                        .content(contentBlockList)
                        .build();

                ContentBlock contentBlock1 = ContentBlock.builder()
                        .toolResult(toolResultBlock)
```

```
                        .build();

                toolResults.add(contentBlock1);
            }
        }

        // Embed the tool results in a new user message
        Message message = Message.builder()
                .role(ConversationRole.USER)
                .content(toolResults)
                .build();

        // Append the new message to the ongoing conversation
        //conversation.add(message);
        conversation.add(message);

        // Send the conversation to Amazon Bedrock
        var response = sendConversationToBedrock(conversation);

        // Recursively handle the model's response until the model has returned its
final response or the recursion counter has reached 0
        processModelResponse(response, conversation, maxRecursion);
    }

    // Invokes the specified tool with the given payload and returns the tool's
response.
    // If the requested tool does not exist, an error message is returned.
    private static ToolResponse invokeTool(ToolUseBlock payload) {
        String toolName = payload.name();

        if (Objects.equals(toolName, "Weather_Tool")) {
            Map<String, Document> inputData = payload.input().asMap();
            printToolUse(toolName, inputData);

            // Invoke the weather tool with the input data provided
            Document weatherResponse =
weatherTool.fetchWeatherData(inputData.get("latitude").toString(),
inputData.get("longitude").toString());

            ToolResponse toolResponse = new ToolResponse();
            toolResponse.setContent(weatherResponse);
            toolResponse.setToolUseId(payload.toolUseId());
            return toolResponse;
        } else {
```

```
            String errorMessage = "The requested tool with name " + toolName + "
does not exist.";
            System.out.println(errorMessage);
            return null;
        }
    }

    public static void printToolUse(String toolName, Map<String, Document>
inputData) {
        System.out.println("Invoking tool: " + toolName + " with input: " +
inputData.get("latitude").toString() + ", " + inputData.get("longitude").toString()
+ "...");
    }

    private static void PrintModelResponse(String message) {
        System.out.println("\tThe model's response:\n");
        System.out.println(message);
        System.out.println("");
    }

    private static ConverseResponse sendConversationToBedrock(List<Message>
conversation) {
        System.out.println("Calling Bedrock...");

        try {
            return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, weatherTool.getToolSpec());
        } catch (ModelNotReadyException ex) {
             System.err.println("Model is not ready. Please try again later: " +
ex.getMessage());
            throw ex;
        } catch (BedrockRuntimeException ex) {
            System.err.println("Bedrock service error: " + ex.getMessage());
            throw ex;
        } catch (RuntimeException ex) {
            System.err.println("Unexpected error occurred: " + ex.getMessage());
            throw ex;
        }
    }

    private static ConverseResponse sendConversationToBedrockwithSpec(List<Message>
conversation, ToolSpecification toolSpec) {
        System.out.println("Calling Bedrock...");
```

```
        // Send the conversation, system prompt, and tool configuration, and return
the response
        return bedrockActions.sendConverseRequestAsync(modelId, systemPrompt,
conversation, toolSpec);
    }

    public static String getUserInput(String prompt, Scanner scanner) {
        String userInput = defaultPrompt;
        if (interactive) {
            System.out.println("*".repeat(80));
            System.out.println(prompt + " (x to exit): \n\t");
            userInput = scanner.nextLine();
        }

        if (userInput == null || userInput.trim().isEmpty()) {
            return getUserInput("\tPlease enter your weather info request, e.g., the
name of a city", scanner);
        }

        if (userInput.equalsIgnoreCase("x")) {
            return null;
        }

        return userInput;
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    public static void printFooter() {
```

```
        System.out.println("""
                ================================================
                Thank you for checking out the Amazon Bedrock Tool Use demo. We hope
 you
                learned something new, or got some inspiration for your own apps
 today!

                For more Bedrock examples in different programming languages, have a
 look at:
                https://docs.aws.amazon.com/bedrock/latest/userguide/
service_code_examples.html
                ================================================
                """);
    }
}
```

Alat cuaca yang digunakan oleh demo. File ini mendefinisikan spesifikasi alat dan mengimplementasikan logika untuk mengambil data cuaca menggunakan dari Open-Meteo API.

```
public class WeatherTool {

    private static final Logger logger = LoggerFactory.getLogger(WeatherTool.class);
    private static java.net.http.HttpClient httpClient = null;

    /**
     * Returns the JSON Schema specification for the Weather tool. The tool
 specification
     * defines the input schema and describes the tool's functionality.
     * For more information, see https://json-schema.org/understanding-json-schema/
reference.
     *
     * @return The tool specification for the Weather tool.
     */
    public ToolSpecification getToolSpec() {
        Map<String, Document> latitudeMap = new HashMap<>();
        latitudeMap.put("type", Document.fromString("string"));
        latitudeMap.put("description", Document.fromString("Geographical WGS84
 latitude of the location."));

        // Create the nested "longitude" object
        Map<String, Document> longitudeMap = new HashMap<>();
        longitudeMap.put("type", Document.fromString("string"));
```

```
        longitudeMap.put("description", Document.fromString("Geographical WGS84
longitude of the location."));

        // Create the "properties" object
        Map<String, Document> propertiesMap = new HashMap<>();
        propertiesMap.put("latitude", Document.fromMap(latitudeMap));
        propertiesMap.put("longitude", Document.fromMap(longitudeMap));

        // Create the "required" array
        List<Document> requiredList = new ArrayList<>();
        requiredList.add(Document.fromString("latitude"));
        requiredList.add(Document.fromString("longitude"));

        // Create the root object
        Map<String, Document> rootMap = new HashMap<>();
        rootMap.put("type", Document.fromString("object"));
        rootMap.put("properties", Document.fromMap(propertiesMap));
        rootMap.put("required", Document.fromList(requiredList));

        // Now create the Document representing the JSON schema
        Document document = Document.fromMap(rootMap);

        ToolSpecification specification = ToolSpecification.builder()
            .name("Weather_Tool")
            .description("Get the current weather for a given location, based on its
WGS84 coordinates.")
            .inputSchema(ToolInputSchema.builder()
                .json(document)
                .build())
            .build();

        return specification;
    }

    /**
     * Fetches weather data for the given latitude and longitude.
     *
     * @param latitude  the latitude coordinate
     * @param longitude the longitude coordinate
     * @return a {@link CompletableFuture} containing the weather data as a JSON
string
     */
    public Document fetchWeatherData(String latitude, String longitude) {
        HttpClient httpClient = HttpClient.newHttpClient();
```

```
        // Ensure no extra double quotes
        latitude = latitude.replace("\"", "");
        longitude = longitude.replace("\"", "");

        String endpoint = "https://api.open-meteo.com/v1/forecast";
        String url = String.format("%s?latitude=%s&longitude=
%s&current_weather=True", endpoint, latitude, longitude);

        HttpRequest request = HttpRequest.newBuilder()
            .uri(URI.create(url))
            .build();

        try {
            HttpResponse<String> response = httpClient.send(request,
 HttpResponse.BodyHandlers.ofString());
            if (response.statusCode() == 200) {
                String weatherJson = response.body();
                System.out.println(weatherJson);
                ObjectMapper objectMapper = new ObjectMapper();
                Map<String, Object> rawMap = objectMapper.readValue(weatherJson, new
 TypeReference<Map<String, Object>>() {});
                Map<String, Document> documentMap = convertToDocumentMap(rawMap);


                Document weatherDocument = Document.fromMap(documentMap);
                System.out.println(weatherDocument);
                return weatherDocument;
            } else {
                throw new RuntimeException("Error fetching weather data: " +
 response.statusCode());
            }
        } catch (Exception e) {
            System.out.println("Error fetching weather data: " + e.getMessage());
            throw new RuntimeException("Error fetching weather data", e);
        }

    }

    private static Map<String, Document> convertToDocumentMap(Map<String, Object>
 inputMap) {
        Map<String, Document> result = new HashMap<>();
        for (Map.Entry<String, Object> entry : inputMap.entrySet()) {
            result.put(entry.getKey(), convertToDocument(entry.getValue()));
```

```
        }
        return result;
    }

    // Convert different types of Objects to Document
    private static Document convertToDocument(Object value) {
        if (value instanceof Map) {
            return Document.fromMap(convertToDocumentMap((Map<String, Object>)
 value));
        } else if (value instanceof Integer) {
            return Document.fromNumber(SdkNumber.fromInteger((Integer) value));
        } else if (value instanceof Double) {  //
            return Document.fromNumber(SdkNumber.fromDouble((Double) value));
        } else if (value instanceof Boolean) {
            return Document.fromBoolean((Boolean) value);
        } else if (value instanceof String) {
            return Document.fromString((String) value);
        }
        return Document.fromNull(); // Handle null values safely
    }
}
```

Tindakan Converse API dengan konfigurasi alat.

```
    /**
     * Sends an asynchronous converse request to the AI model.
     *
     * @param modelId      the unique identifier of the AI model to be used for the
 converse request
     * @param systemPrompt the system prompt to be included in the converse request
     * @param conversation a list of messages representing the conversation history
     * @param toolSpec     the specification of the tool to be used in the converse
 request
     * @return the converse response received from the AI model
     */
    public ConverseResponse sendConverseRequestAsync(String modelId, String
 systemPrompt, List<Message> conversation, ToolSpecification toolSpec) {
        List<Tool> toolList = new ArrayList<>();
        Tool tool = Tool.builder()
            .toolSpec(toolSpec)
            .build();
```

```
        toolList.add(tool);

        ToolConfiguration configuration = ToolConfiguration.builder()
            .tools(toolList)
            .build();

        SystemContentBlock block = SystemContentBlock.builder()
            .text(systemPrompt)
            .build();

        ConverseRequest request = ConverseRequest.builder()
            .modelId(modelId)
            .system(block)
            .messages(conversation)
            .toolConfig(configuration)
            .build();

        try {
            ConverseResponse response = getClient().converse(request).join();
            return response;

        } catch (ModelNotReadyException ex) {
            throw new RuntimeException("Model is not ready: " + ex.getMessage(),
ex);
        } catch (BedrockRuntimeException ex) {
            throw new RuntimeException("Failed to converse with Bedrock model: " +
ex.getMessage(), ex);
        }
    }
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

## Kanvas Amazon Nova

### InvokeModel

Contoh kode berikut menunjukkan cara memanggil Amazon Nova Canvas di Amazon Bedrock untuk menghasilkan gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat gambar dengan Amazon Nova Canvas.

```
import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.InvokeModelResponse;

import java.security.SecureRandom;
import java.util.Base64;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

/**
 * This example demonstrates how to use Amazon Nova Canvas to generate images.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Configure the image generation parameters
 * - Send a request to generate an image
 * - Process the response and handle the generated image
 */
public class InvokeModel {

    public static byte[] invokeModel() {

        // Step 1: Create the Amazon Bedrock runtime client
        // The runtime client handles the communication with AI models on Amazon
 Bedrock
        BedrockRuntimeClient client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
```

```
                .build();

        // Step 2: Specify which model to use
        // For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        String modelId = "amazon.nova-canvas-v1:0";

        // Step 3: Configure the generation parameters and create the request
        // First, set the main parameters:
        // - prompt: Text description of the image to generate
        // - seed: Random number for reproducible generation (0 to 858,993,459)
        String prompt = "A stylized picture of a cute old steampunk robot";
        int seed = new SecureRandom().nextInt(858_993_460);

        // Then, create the request using a template with the following structure:
        // - taskType: TEXT_IMAGE (specifies text-to-image generation)
        // - textToImageParams: Contains the text prompt
        // - imageGenerationConfig: Contains optional generation settings (seed,
 quality, etc.)
        // For a list of available request parameters, see:
        // https://docs.aws.amazon.com/nova/latest/userguide/image-gen-req-resp-
structure.html
        String request = """
                {
                    "taskType": "TEXT_IMAGE",
                    "textToImageParams": {
                        "text": "{{prompt}}"
                    },
                    "imageGenerationConfig": {
                        "seed": {{seed}},
                        "quality": "standard"
                    }
                }"""
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", String.valueOf(seed));

        // Step 4: Send and process the request
        // - Send the request to the model using InvokeModelResponse
        // - Extract the Base64-encoded image from the JSON response
        // - Convert the encoded image to a byte array and return it
        try {
            InvokeModelResponse response = client.invokeModel(builder -> builder
                    .modelId(modelId)
```

```
                    .body(SdkBytes.fromUtf8String(request))
            );

            JSONObject responseBody = new
 JSONObject(response.body().asUtf8String());
            // Convert the Base64 string to byte array for better handling
            return Base64.getDecoder().decode(
                    new JSONPointer("/images/0").queryFrom(responseBody).toString()
            );

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s%n", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");
        byte[] imageData = invokeModel();
        displayImage(imageData);
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

## Generator Gambar Amazon Titan

InvokeModel

Contoh kode berikut menunjukkan cara memanggil Amazon Titan Image di Amazon Bedrock untuk menghasilkan gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat gambar dengan Amazon Titan Image Generator.

```
// Create an image with the Amazon Titan Image Generator.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

import java.math.BigInteger;
import java.security.SecureRandom;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Titan Image G2.
        var modelId = "amazon.titan-image-generator-v2:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
titan-image.html
        var nativeRequestTemplate = """
                {
                    "taskType": "TEXT_IMAGE",
                    "textToImageParams": { "text": "{{prompt}}" },
                    "imageGenerationConfig": { "seed": {{seed}} }
                }""";
```

```
        // Define the prompt for the image generation.
        var prompt = "A stylized picture of a cute old steampunk robot";

        // Get a random 31-bit seed for the image generation (max. 2,147,483,647).
        var seed = new BigInteger(31, new SecureRandom());

        // Embed the prompt and seed in the model's native request payload.
        var nativeRequest = nativeRequestTemplate
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", seed.toString());

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated image data from the model's response.
            var base64ImageData = new JSONPointer("/
images/0").queryFrom(responseBody).toString();

            return base64ImageData;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");

        String base64ImageData = invokeModel();

        displayImage(base64ImageData);
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

## Embeddings Teks Amazon Titan

InvokeModel

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Mulailah membuat penyematan pertama Anda.
- Buat embeddings yang mengonfigurasi jumlah dimensi dan normalisasi (hanya V2).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat penyematan pertama Anda dengan Titan Text Embeddings V2.

```
// Generate and print an embedding with Amazon Titan Text Embeddings.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
```

```
                .build();

        // Set the model ID, e.g., Titan Text Embeddings V2.
        var modelId = "amazon.titan-embed-text-v2:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
titan-embed-text.html
        var nativeRequestTemplate = "{ \"inputText\": \"{{inputText}}\" }";

        // The text to convert into an embedding.
        var inputText = "Please recommend books with a theme similar to the movie
 'Inception'.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{inputText}}",
 inputText);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/
embedding").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }
```

```
    public static void main(String[] args) {
        invokeModel();
    }
}
```

Panggil Titan Text Embeddings V2 yang mengonfigurasi jumlah dimensi dan normalisasi.

```
   /**
    * Invoke Amazon Titan Text Embeddings V2 with additional inference parameters.
    *
    * @param inputText  - The text to convert to an embedding.
    * @param dimensions - The number of dimensions the output embeddings should
have.
    *                   Values accepted by the model: 256, 512, 1024.
    * @param normalize  - A flag indicating whether or not to normalize the output
embeddings.
    * @return The {@link JSONObject} representing the model's response.
    */
   public static JSONObject invokeModel(String inputText, int dimensions, boolean
normalize) {

       // Create a Bedrock Runtime client in the AWS Region of your choice.
       var client = BedrockRuntimeClient.builder()
               .region(Region.US_WEST_2)
               .build();

       // Set the model ID, e.g., Titan Embed Text v2.0.
       var modelId = "amazon.titan-embed-text-v2:0";

       // Create the request for the model.
       var nativeRequest = """
               {
                   "inputText": "%s",
                   "dimensions": %d,
                   "normalize": %b
               }
               """.formatted(inputText, dimensions, normalize);

       // Encode and send the request.
       var response = client.invokeModel(request -> {
           request.body(SdkBytes.fromUtf8String(nativeRequest));
```

```
            request.modelId(modelId);
        });

        // Decode the model's response.
        var modelResponse = new JSONObject(response.body().asUtf8String());

        // Extract and print the generated embedding and the input text token count.
        var embedding = modelResponse.getJSONArray("embedding");
        var inputTokenCount = modelResponse.getBigInteger("inputTextTokenCount");
        System.out.println("Embedding: " + embedding);
        System.out.println("\nInput token count: " + inputTokenCount);

        // Return the model's native response.
        return modelResponse;
    }
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

## Antropik Claude

### Bercakap-cakap

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Anthropic Claude, menggunakan API Converse Bedrock.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Anthropic Claude, menggunakan API Converse Bedrock.

```
// Use the Converse API to send a text message to Anthropic Claude.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
```

```
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText =
 response.output().message().content().getFirst().text();
            System.out.println(responseText);
```

```
            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Kirim pesan teks ke Anthropic Claude, menggunakan API Converse Bedrock dengan klien Java async.

```
// Use the Converse API to send a text message to Anthropic Claude
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();
```

```
        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
response.output().message().content().getFirst().text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
text.
            String responseText = future.get();
            System.out.println(responseText);
```

```
            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

### ConverseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Anthropic Claude, menggunakan API Converse Bedrock dan memproses aliran respons secara real-time.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Anthropic Claude, menggunakan API Converse Bedrock dan proses aliran respons secara real-time.

```
// Use the Converse API to send a text message to Anthropic Claude
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
```

```
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request.modelId(modelId)
```

```
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Untuk detail API, lihat ConverseStreamdi Referensi AWS SDK for Java 2.x API.

InvokeModel

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Anthropic Claude, menggunakan Invoke Model API.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks.

```
// Use the native inference API to send a text message to Anthropic Claude.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
```

```
public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
anthropic-claude-messages.html
        var nativeRequestTemplate = """
                {
                    "anthropic_version": "bedrock-2023-05-31",
                    "max_tokens": 512,
                    "temperature": 0.5,
                    "messages": [{
                        "role": "user",
                        "content": "{{prompt}}"
                    }]
                }""";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );
```

```
            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/content/0/
text").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

### InvokeModelWithResponseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke model Anthropic Claude, menggunakan Invoke Model API, dan mencetak aliran respons.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks dan memproses aliran respons secara real-time.

```
// Use the native inference API to send a text message to Anthropic Claude
```

```
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.Objects;
import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Claude 3 Haiku.
        var modelId = "anthropic.claude-3-haiku-20240307-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
anthropic-claude-messages.html
        var nativeRequestTemplate = """
                {
                    "anthropic_version": "bedrock-2023-05-31",
                    "max_tokens": 512,
                    "temperature": 0.5,
```

```
                    "messages": [{
                        "role": "user",
                        "content": "{{prompt}}"
                    }]
                }""";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    var response = new JSONObject(chunk.bytes().asUtf8String());

                    // Extract and print the text from the content blocks.
                    if (Objects.equals(response.getString("type"),
 "content_block_delta")) {
                        var text = new JSONPointer("/delta/
text").queryFrom(response);
                        System.out.print(text);

                        // Append the text to the response text buffer.
                        completeResponseTextBuffer.append(text);
                    }
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
```

```
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Untuk detail API, lihat InvokeModelWithResponseStreamdi Referensi AWS SDK for Java 2.x API.

Penalaran

Contoh kode berikut menunjukkan cara menggunakan kemampuan penalaran Anthropic Claude 3.7 Sonnet di Amazon Bedrock

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan kemampuan penalaran Anthropic Claude 3.7 Sonnet dengan klien runtime Bedrock asinkron.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
```

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.CompletableFuture;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 capability
 * with an asynchronous Amazon Bedrock runtime client.
 * It shows how to:
 * - Set up the Amazon Bedrock async runtime client
 * - Create a message
 * - Configure reasoning parameters
 * - Send an asynchronous request with reasoning enabled
 * - Process both the reasoning output and final response
 */
public class ReasoningAsync {

    public static ReasoningResponse reasoningAsync() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
```

```
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
                .build();

        try {
            // Send message and reasoning configuration to the model
            CompletableFuture<ConverseResponse> asyncResponse =
client.converse(request -> request
                    .additionalModelRequestFields(reasoningConfig)
                    .messages(message)
                    .modelId(modelId)
            );

            // Process the response asynchronously
            return asyncResponse.thenApply(response -> {

                        var content = response.output().message().content();
                        ReasoningContentBlock reasoning = null;
                        String text = null;

                        // Process each content block to find reasoning and response
text
                        for (ContentBlock block : content) {
                            if (block.reasoningContent() != null) {
                                reasoning = block.reasoningContent();
                            } else if (block.text() != null) {
                                text = block.text();
                            }
                        }

                        return new ReasoningResponse(reasoning, text);
                    }
            ).get();

        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        // Execute the example and display reasoning and final response
        ReasoningResponse response = reasoningAsync();
```

```
        System.out.println("\n<thinking>");
        System.out.println(response.reasoning().reasoningText());
        System.out.println("</thinking>\n");
        System.out.println(response.text());
    }
}
```

Gunakan kemampuan penalaran Anthropic Claude 3.7 Sonnet dengan klien runtime Bedrock sinkron.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 capability
 * with the synchronous Amazon Bedrock runtime client.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure reasoning parameters
 * - Send a request with reasoning enabled
 * - Process both the reasoning output and final response
 */
public class Reasoning {

    public static ReasoningResponse reasoning() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
```

```
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
                .build();

        try {
            // Send message and reasoning configuration to the model
            ConverseResponse bedrockResponse = client.converse(request -> request
                    .additionalModelRequestFields(reasoningConfig)
                    .messages(message)
                    .modelId(modelId)
            );


            // Extract both reasoning and final response
            var content = bedrockResponse.output().message().content();
            ReasoningContentBlock reasoning = null;
            String text = null;

            // Process each content block to find reasoning and response text
            for (ContentBlock block : content) {
                if (block.reasoningContent() != null) {
                    reasoning = block.reasoningContent();
                } else if (block.text() != null) {
                    text = block.text();
                }
            }

            return new ReasoningResponse(reasoning, text);
```

```
        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        // Execute the example and display reasoning and final response
        ReasoningResponse response = reasoning();
        System.out.println("\n<thinking>");
        System.out.println(response.reasoning().reasoningText());
        System.out.println("</thinking>\n");
        System.out.println(response.text());
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

Penalaran dengan respons streaming

Contoh kode berikut menunjukkan cara menggunakan kemampuan penalaran Anthropic Claude 3.7 Sonnet di Amazon Bedrock

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan kemampuan penalaran Anthropic Claude 3.7 Sonnet untuk menghasilkan respons teks streaming.

```
import com.example.bedrockruntime.models.anthropicClaude.lib.ReasoningResponse;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.*;

import java.util.concurrent.ExecutionException;
import java.util.concurrent.atomic.AtomicReference;

/**
 * This example demonstrates how to use Anthropic Claude 3.7 Sonnet's reasoning
 * capability to generate streaming text responses.
 * It shows how to:
 * - Set up the Amazon Bedrock runtime client
 * - Create a message
 * - Configure a streaming request
 * - Set up a stream handler to process the response chunks
 * - Process the streaming response
 */
public class ReasoningStream {

    public static ReasoningResponse reasoningStream() {

        // Create the Amazon Bedrock runtime client
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Specify the model ID. For the latest available models, see:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/models-
supported.html
        var modelId = "us.anthropic.claude-3-7-sonnet-20250219-v1:0";

        // Create the message with the user's prompt
        var prompt = "Describe the purpose of a 'hello world' program in one line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(prompt))
                .role(ConversationRole.USER)
                .build();

        // Configure reasoning parameters with a 2000 token budget
        Document reasoningConfig = Document.mapBuilder()
                .putDocument("thinking", Document.mapBuilder()
                        .putString("type", "enabled")
                        .putNumber("budget_tokens", 2000)
                        .build())
```

```
                .build();

        // Configure the request with the message, model ID, and reasoning config
        ConverseStreamRequest request = ConverseStreamRequest.builder()
                .additionalModelRequestFields(reasoningConfig)
                .messages(message)
                .modelId(modelId)
                .build();

        StringBuilder reasoning = new StringBuilder();
        StringBuilder text = new StringBuilder();
        AtomicReference<ReasoningResponse> finalresponse = new AtomicReference<>();

        // Set up the stream handler to processes chunks of the response as they
arrive
        var streamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            ContentBlockDelta delta = chunk.delta();
                            if (delta.reasoningContent() != null) {
                                if (reasoning.isEmpty()) {
                                    System.out.println("\n<thinking>");
                                }
                                if (delta.reasoningContent().text() != null) {

System.out.print(delta.reasoningContent().text());

reasoning.append(delta.reasoningContent().text());
                                }
                            } else if (delta.text() != null) {
                                if (text.isEmpty()) {
                                    System.out.println("\n</thinking>\n");
                                }
                                System.out.print(delta.text());
                                text.append(delta.text());
                            }
                            System.out.flush();  // Ensure immediate output of each
chunk
                        }).build())
                .onComplete(() -> finalresponse.set(new ReasoningResponse(
                        ReasoningContentBlock.fromReasoningText(t ->
t.text(reasoning.toString())),
                        text.toString()
                )))
```

```
                .onError(err -> System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage()))
                .build();

        // Step 6: Send the streaming request and process the response
        // - Send the request to the model
        // - Attach the handler to process response chunks as they arrive
        // - Handle any errors during streaming
        try {
            client.converseStream(request, streamHandler).get();
            return finalresponse.get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        } catch (Exception e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        reasoningStream();
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

## Perintah Cohere

### Bercakap-cakap

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Cohere Command, menggunakan API Converse Bedrock.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Cohere Command, menggunakan API Converse Bedrock.

```
// Use the Converse API to send a text message to Cohere Command.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
```

```
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Kirim pesan teks ke Cohere Command, menggunakan API Converse Bedrock dengan klien Java async.

```
// Use the Converse API to send a text message to Cohere Command
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
```

```
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
```

```
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
 response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
 text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

### ConverseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Cohere Command, menggunakan API Converse Bedrock dan memproses aliran respons secara real-time.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Cohere Command, menggunakan API Converse Bedrock dan proses aliran respons secara real-time.

```
// Use the Converse API to send a text message to Cohere Command
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
```

```
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request.modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Untuk detail API, lihat ConverseStreamdi Referensi AWS SDK for Java 2.x API.

InvokeModel: Perintah R dan R +

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Cohere Command R dan R +, menggunakan Invoke Model API.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks.

```
// Use the native inference API to send a text message to Cohere Command R.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class Command_R_InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
```

```
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
cohere-command-r-plus.html
        var nativeRequestTemplate = "{ \"message\": \"{{prompt}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/text").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

InvokeModelWithResponseStream: Perintah R dan R +

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Cohere Command, menggunakan Invoke Model API dengan aliran respons.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks dan memproses aliran respons secara real-time.

```
// Use the native inference API to send a text message to Cohere Command R
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class Command_R_InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
```

```
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Command R.
        var modelId = "cohere.command-r-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
cohere-command-r-plus.html
        var nativeRequestTemplate = "{ \"message\": \"{{prompt}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in the model's native request payload.
        String nativeRequest = nativeRequestTemplate.replace("{{prompt}}", prompt);

        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/text").queryFrom(response);
                    System.out.print(text);

                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();
```

```
        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

## Meta Llama

### Bercakap-cakap

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Meta Llama, menggunakan API Converse Bedrock.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Meta Llama, menggunakan API Converse Bedrock.

```
// Use the Converse API to send a text message to Meta Llama.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
```

```
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converse();
    }
}
```

Kirim pesan teks ke Meta Llama, menggunakan API Converse Bedrock dengan klien Java async.

```
// Use the Converse API to send a text message to Meta Llama
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
```

```
        // Replace the DefaultCredentialsProvider with your preferred credentials
provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
role.
        var inputText = "Describe the purpose of a 'hello world' program in one
line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });
```

```
        try {
            // Wait for the future object to complete and retrieve the generated
 text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

### ConverseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Meta Llama, menggunakan API Converse Bedrock dan memproses aliran respons secara real-time.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Meta Llama, menggunakan API Converse Bedrock dan proses aliran respons secara real-time.

```
// Use the Converse API to send a text message to Meta Llama
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Llama 3 8b Instruct.
        var modelId = "meta.llama3-8b-instruct-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
```

```
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Untuk detail API, lihat ConverseStreamdi Referensi AWS SDK for Java 2.x API.

InvokeModel

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Meta Llama, menggunakan Invoke Model API.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks.

```
// Use the native inference API to send a text message to Meta Llama 3.

import org.json.JSONObject;
```

```
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class Llama3_InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_WEST_2)
                .build();

        // Set the model ID, e.g., Llama 3 70b Instruct.
        var modelId = "meta.llama3-70b-instruct-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
meta.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Llama 3's instruction format.
        var instruction = (
                "<|begin_of_text|><|start_header_id|>user<|end_header_id|>\\n" +
                "{{prompt}} <|eot_id|>\\n" +
                "<|start_header_id|>assistant<|end_header_id|>\\n"
        ).replace("{{prompt}}", prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        try {
```

```
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/
generation").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

InvokeModelWithResponseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Meta Llama, menggunakan Invoke Model API, dan mencetak aliran respons.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks dan memproses aliran respons secara real-time.

```
// Use the native inference API to send a text message to Meta Llama 3
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class Llama3_InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_WEST_2)
                .build();
```

```
        // Set the model ID, e.g., Llama 3 70b Instruct.
        var modelId = "meta.llama3-70b-instruct-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
meta.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Llama 3's instruction format.
        var instruction = (
                "<|begin_of_text|><|start_header_id|>user<|end_header_id|>\\n" +
                "{{prompt}} <|eot_id|>\\n" +
                "<|start_header_id|>assistant<|end_header_id|>\\n"
        ).replace("{{prompt}}", prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/generation").queryFrom(response);
                    System.out.print(text);
```

```
                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Untuk detail API, lihat InvokeModelWithResponseStreamdi Referensi AWS SDK for Java 2.x API.

## Mistral AI

### Bercakap-cakap

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Mistral, menggunakan API Converse Bedrock.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Mistral, menggunakan API Converse Bedrock.

```
// Use the Converse API to send a text message to Mistral.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import software.amazon.awssdk.services.bedrockruntime.model.ConverseResponse;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

public class Converse {

    public static String converse() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
```

```
                .build();


        try {
            // Send the message with a basic inference configuration.
            ConverseResponse response = client.converse(request -> request
                    .modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)));

            // Retrieve the generated text from Bedrock's response object.
            var responseText = response.output().message().content().get(0).text();
            System.out.println(responseText);

            return responseText;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }

    }

    public static void main(String[] args) {
        converse();
    }
}
```

Kirim pesan teks ke Mistral, menggunakan API Converse Bedrock dengan klien Java async.

```
// Use the Converse API to send a text message to Mistral
// with the async Java client.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
```

```
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class ConverseAsync {

    public static String converseAsync() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Send the message with a basic inference configuration.
        var request = client.converse(params -> params
                .modelId(modelId)
                .messages(message)
                .inferenceConfig(config -> config
                        .maxTokens(512)
                        .temperature(0.5F)
                        .topP(0.9F))
        );

        // Prepare a future object to handle the asynchronous response.
        CompletableFuture<String> future = new CompletableFuture<>();

        // Handle the response or error using the future object.
        request.whenComplete((response, error) -> {
```

```
            if (error == null) {
                // Extract the generated text from Bedrock's response object.
                String responseText =
 response.output().message().content().get(0).text();
                future.complete(responseText);
            } else {
                future.completeExceptionally(error);
            }
        });

        try {
            // Wait for the future object to complete and retrieve the generated
 text.
            String responseText = future.get();
            System.out.println(responseText);

            return responseText;

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId, e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        converseAsync();
    }
}
```

- Untuk detail API, lihat Converse di Referensi AWS SDK for Java 2.x API.

### ConverseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke Mistral, menggunakan API Converse Bedrock dan memproses aliran respons secara real-time.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan teks ke Mistral, menggunakan API Converse Bedrock dan proses aliran respons secara real-time.

```
// Use the Converse API to send a text message to Mistral
// and print the response stream.

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import software.amazon.awssdk.services.bedrockruntime.model.ContentBlock;
import software.amazon.awssdk.services.bedrockruntime.model.ConversationRole;
import
 software.amazon.awssdk.services.bedrockruntime.model.ConverseStreamResponseHandler;
import software.amazon.awssdk.services.bedrockruntime.model.Message;

import java.util.concurrent.ExecutionException;

public class ConverseStream {

    public static void main(String[] args) {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // Create the input text and embed it in a message object with the user
 role.
```

```
        var inputText = "Describe the purpose of a 'hello world' program in one
 line.";
        var message = Message.builder()
                .content(ContentBlock.fromText(inputText))
                .role(ConversationRole.USER)
                .build();

        // Create a handler to extract and print the response text in real-time.
        var responseStreamHandler = ConverseStreamResponseHandler.builder()
                .subscriber(ConverseStreamResponseHandler.Visitor.builder()
                        .onContentBlockDelta(chunk -> {
                            String responseText = chunk.delta().text();
                            System.out.print(responseText);
                        }).build()
                ).onError(err ->
                        System.err.printf("Can't invoke '%s': %s", modelId,
 err.getMessage())
                ).build();

        try {
            // Send the message with a basic inference configuration and attach the
 handler.
            client.converseStream(request -> request.modelId(modelId)
                    .messages(message)
                    .inferenceConfig(config -> config
                            .maxTokens(512)
                            .temperature(0.5F)
                            .topP(0.9F)
                    ), responseStreamHandler).get();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
        }
    }
}
```

- Untuk detail API, lihat ConverseStreamdi Referensi AWS SDK for Java 2.x API.

InvokeModel

Contoh kode berikut menunjukkan cara mengirim pesan teks ke model Mistral, menggunakan Invoke Model API.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks.

```
// Use the native inference API to send a text message to Mistral.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
```

```
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
mistral-text-completion.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Mistral's instruction format.
        var instruction = "<s>[INST] {{prompt}} [/INST]\\n".replace("{{prompt}}",
 prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated text from the model's response.
            var text = new JSONPointer("/outputs/0/
text").queryFrom(responseBody).toString();
            System.out.println(text);

            return text;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        invokeModel();
    }
}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

### InvokeModelWithResponseStream

Contoh kode berikut menunjukkan cara mengirim pesan teks ke model AI Mistral, menggunakan API Model Invoke, dan mencetak aliran respons.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan API Invoke Model untuk mengirim pesan teks dan memproses aliran respons secara real-time.

```
// Use the native inference API to send a text message to Mistral
// and print the response stream.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeAsyncClient;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamRequest;
import
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

import java.util.concurrent.ExecutionException;

import static
 software.amazon.awssdk.services.bedrockruntime.model.InvokeModelWithResponseStreamResponseH

public class InvokeModelWithResponseStream {

    public static String invokeModelWithResponseStream() {
```

```
        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeAsyncClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Mistral Large.
        var modelId = "mistral.mistral-large-2402-v1:0";

        // The InvokeModelWithResponseStream API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
mistral-text-completion.html
        var nativeRequestTemplate = "{ \"prompt\": \"{{instruction}}\" }";

        // Define the prompt for the model.
        var prompt = "Describe the purpose of a 'hello world' program in one line.";

        // Embed the prompt in Mistral's instruction format.
        var instruction = "<s>[INST] {{prompt}} [/INST]\\n".replace("{{prompt}}",
 prompt);

        // Embed the instruction in the the native request payload.
        var nativeRequest = nativeRequestTemplate.replace("{{instruction}}",
 instruction);

        // Create a request with the model ID and the model's native request
 payload.
        var request = InvokeModelWithResponseStreamRequest.builder()
                .body(SdkBytes.fromUtf8String(nativeRequest))
                .modelId(modelId)
                .build();

        // Prepare a buffer to accumulate the generated response text.
        var completeResponseTextBuffer = new StringBuilder();

        // Prepare a handler to extract, accumulate, and print the response text in
 real-time.
        var responseStreamHandler =
 InvokeModelWithResponseStreamResponseHandler.builder()
```

```
                .subscriber(Visitor.builder().onChunk(chunk -> {
                    // Extract and print the text from the model's native response.
                    var response = new JSONObject(chunk.bytes().asUtf8String());
                    var text = new JSONPointer("/outputs/0/
text").queryFrom(response);
                    System.out.print(text);

                    // Append the text to the response text buffer.
                    completeResponseTextBuffer.append(text);
                }).build()).build();

        try {
            // Send the request and wait for the handler to process the response.
            client.invokeModelWithResponseStream(request,
 responseStreamHandler).get();

            // Return the complete response text.
            return completeResponseTextBuffer.toString();

        } catch (ExecutionException | InterruptedException e) {
            System.err.printf("Can't invoke '%s': %s", modelId,
 e.getCause().getMessage());
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) throws ExecutionException,
 InterruptedException {
        invokeModelWithResponseStream();
    }
}
```

- Untuk detail API, lihat InvokeModelWithResponseStreamdi Referensi AWS SDK for Java 2.x API.

## Difusi Stabil

### InvokeModel

Contoh kode berikut menunjukkan cara memanggil Stability.ai Stable Diffusion XL di Amazon Bedrock untuk menghasilkan gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat gambar dengan Difusi Stabil.

```
// Create an image with Stable Diffusion.

import org.json.JSONObject;
import org.json.JSONPointer;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.exception.SdkClientException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.bedrockruntime.BedrockRuntimeClient;

import java.math.BigInteger;
import java.security.SecureRandom;

import static com.example.bedrockruntime.libs.ImageTools.displayImage;

public class InvokeModel {

    public static String invokeModel() {

        // Create a Bedrock Runtime client in the AWS Region you want to use.
        // Replace the DefaultCredentialsProvider with your preferred credentials
 provider.
        var client = BedrockRuntimeClient.builder()
                .credentialsProvider(DefaultCredentialsProvider.create())
                .region(Region.US_EAST_1)
                .build();

        // Set the model ID, e.g., Stable Diffusion XL v1.
        var modelId = "stability.stable-diffusion-xl-v1";

        // The InvokeModel API uses the model's native payload.
        // Learn more about the available inference parameters and response fields
 at:
```

```
        // https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
diffusion-1-0-text-image.html
        var nativeRequestTemplate = """
                {
                    "text_prompts": [{ "text": "{{prompt}}" }],
                    "style_preset": "{{style}}",
                    "seed": {{seed}}
                }""";

        // Define the prompt for the image generation.
        var prompt = "A stylized picture of a cute old steampunk robot";

        // Get a random 32-bit seed for the image generation (max. 4,294,967,295).
        var seed = new BigInteger(31, new SecureRandom());

        // Choose a style preset.
        var style = "cinematic";

        // Embed the prompt, seed, and style in the model's native request payload.
        String nativeRequest = nativeRequestTemplate
                .replace("{{prompt}}", prompt)
                .replace("{{seed}}", seed.toString())
                .replace("{{style}}", style);

        try {
            // Encode and send the request to the Bedrock Runtime.
            var response = client.invokeModel(request -> request
                    .body(SdkBytes.fromUtf8String(nativeRequest))
                    .modelId(modelId)
            );

            // Decode the response body.
            var responseBody = new JSONObject(response.body().asUtf8String());

            // Retrieve the generated image data from the model's response.
            var base64ImageData = new JSONPointer("/artifacts/0/base64")
                    .queryFrom(responseBody)
                    .toString();

            return base64ImageData;

        } catch (SdkClientException e) {
            System.err.printf("ERROR: Can't invoke '%s'. Reason: %s", modelId,
 e.getMessage());
```

```
            throw new RuntimeException(e);
        }
    }

    public static void main(String[] args) {
        System.out.println("Generating image. This may take a few seconds...");

        String base64ImageData = invokeModel();

        displayImage(base64ImageData);
    }


}
```

- Untuk detail API, lihat InvokeModeldi Referensi AWS SDK for Java 2.x API.

## CloudFront contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with CloudFront.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario

# Tindakan

### `CreateDistribution`

Contoh kode berikut menunjukkan cara menggunakan`CreateDistribution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh berikut menggunakan bucket Amazon Simple Storage Service (Amazon S3) sebagai sumber konten.

Setelah membuat distribusi, kode membuat CloudFrontWaiteruntuk menunggu sampai distribusi diterapkan sebelum mengembalikan distribusi.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CreateDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.ItemSelection;
import software.amazon.awssdk.services.cloudfront.model.Method;
import software.amazon.awssdk.services.cloudfront.model.ViewerProtocolPolicy;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;
import software.amazon.awssdk.services.s3.S3Client;

import java.time.Instant;

public class CreateDistribution {

        private static final Logger logger =
 LoggerFactory.getLogger(CreateDistribution.class);
```

```
       public static Distribution createDistribution(CloudFrontClient
cloudFrontClient, S3Client s3Client,
                        final String bucketName, final String keyGroupId, final
String originAccessControlId) {

               final String region = s3Client.headBucket(b ->
b.bucket(bucketName)).sdkHttpResponse().headers()
                               .get("x-amz-bucket-region").get(0);
               final String originDomain = bucketName + ".s3." + region +
".amazonaws.com";
               String originId = originDomain; // Use the originDomain value for
the originId.

               // The service API requires some deprecated methods, such as
               // DefaultCacheBehavior.Builder#minTTL and #forwardedValue.
               CreateDistributionResponse createDistResponse =
cloudFrontClient.createDistribution(builder -> builder
                               .distributionConfig(b1 -> b1
                                                       .origins(b2 -> b2
                                                                       .quantity(1)
                                                                       .items(b3 -> b3

.domainName(originDomain)

.id(originId)

.s3OriginConfig(builder4 -> builder4

           .originAccessIdentity(

                           ""))

.originAccessControlId(

           originAccessControlId)))
                                                       .defaultCacheBehavior(b2 -> b2

.viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)

.targetOriginId(originId)
                                                                       .minTTL(200L)
                                                                       .forwardedValues(b5
-> b5
```

```
 .cookies(cp -> cp

           .forward(ItemSelection.NONE))

 .queryString(true))
                                                                  .trustedKeyGroups(b3
 -> b3

 .quantity(1)

 .items(keyGroupId)

 .enabled(true))
                                                                  .allowedMethods(b4 -
> b4

 .quantity(2)

 .items(Method.HEAD, Method.GET)

 .cachedMethods(b5 -> b5

           .quantity(2)

           .items(Method.HEAD,

                           Method.GET))))
                                                .cacheBehaviors(b -> b
                                                                  .quantity(1)
                                                                  .items(b2 -> b2

 .pathPattern("/index.html")

 .viewerProtocolPolicy(

           ViewerProtocolPolicy.ALLOW_ALL)

 .targetOriginId(originId)

 .trustedKeyGroups(b3 -> b3

           .quantity(1)
```

```
            .items(keyGroupId)

            .enabled(true))

.minTTL(200L)

.forwardedValues(b4 -> b4

            .cookies(cp -> cp

                            .forward(ItemSelection.NONE))

            .queryString(true))

.allowedMethods(b5 -> b5.quantity(2)

            .items(Method.HEAD,

                           Method.GET)

            .cachedMethods(b6 -> b6

                           .quantity(2)

                           .items(Method.HEAD,

                                          Method.GET)))))
                                              .enabled(true)
                                              .comment("Distribution built with
java")

.callerReference(Instant.now().toString())));

                final Distribution distribution = createDistResponse.distribution();
                logger.info("Distribution created. DomainName: [{}]  Id: [{}]",
distribution.domainName(),
                                distribution.id());
                logger.info("Waiting for distribution to be deployed ...");
                try (CloudFrontWaiter cfWaiter =
CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
                        ResponseOrException<GetDistributionResponse>
responseOrException = cfWaiter
```

```
                                        .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                                        .matched();
                        responseOrException.response()
                                        .orElseThrow(() -> new
 RuntimeException("Distribution not created"));
                        logger.info("Distribution deployed. DomainName: [{}]  Id:
 [{}]", distribution.domainName(),
                                        distribution.id());
                }
                return distribution;
        }
}
```

- Untuk detail API, lihat CreateDistributiondi Referensi AWS SDK for Java 2.x API.

### `CreateFunction`

Contoh kode berikut menunjukkan cara menggunakan`CreateFunction`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CloudFrontException;
import software.amazon.awssdk.services.cloudfront.model.CreateFunctionRequest;
import software.amazon.awssdk.services.cloudfront.model.CreateFunctionResponse;
import software.amazon.awssdk.services.cloudfront.model.FunctionConfig;
import software.amazon.awssdk.services.cloudfront.model.FunctionRuntime;
import java.io.InputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateFunction {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <functionName> <filePath>

                Where:
                    functionName - The name of the function to create.\s
                    filePath - The path to a file that contains the application
 logic for the function.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String functionName = args[0];
        String filePath = args[1];
        CloudFrontClient cloudFrontClient = CloudFrontClient.builder()
                .region(Region.AWS_GLOBAL)
                .build();

        String funArn = createNewFunction(cloudFrontClient, functionName, filePath);
        System.out.println("The function ARN is " + funArn);
        cloudFrontClient.close();
    }

    public static String createNewFunction(CloudFrontClient cloudFrontClient, String
 functionName, String filePath) {
        try {
            InputStream fileIs =
 CreateFunction.class.getClassLoader().getResourceAsStream(filePath);
            SdkBytes functionCode = SdkBytes.fromInputStream(fileIs);

            FunctionConfig config = FunctionConfig.builder()
                    .comment("Created by using the CloudFront Java API")
```

```
                    .runtime(FunctionRuntime.CLOUDFRONT_JS_1_0)
                    .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                    .name(functionName)
                    .functionCode(functionCode)
                    .functionConfig(config)
                    .build();

            CreateFunctionResponse response =
 cloudFrontClient.createFunction(functionRequest);
            return response.functionSummary().functionMetadata().functionARN();

        } catch (CloudFrontException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateFunctiondi Referensi AWS SDK for Java 2.x API.

### `CreateKeyGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateKeyGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Grup kunci memerlukan setidaknya satu kunci publik yang digunakan untuk memverifikasi tanda tangan URLs atau cookie.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
```

```
import java.util.UUID;

public class CreateKeyGroup {
    private static final Logger logger =
 LoggerFactory.getLogger(CreateKeyGroup.class);

    public static String createKeyGroup(CloudFrontClient cloudFrontClient, String
 publicKeyId) {
        String keyGroupId = cloudFrontClient.createKeyGroup(b -> b.keyGroupConfig(c
 -> c
                .items(publicKeyId)
                .name("JavaKeyGroup" + UUID.randomUUID())))
                .keyGroup().id();
        logger.info("KeyGroup created with ID: [{}]", keyGroupId);
        return keyGroupId;
    }
}
```

- Untuk detail API, lihat CreateKeyGroupdi Referensi AWS SDK for Java 2.x API.

### `CreatePublicKey`

Contoh kode berikut menunjukkan cara menggunakan`CreatePublicKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh kode berikut dibaca dalam kunci publik dan mengunggahnya ke Amazon CloudFront.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.CreatePublicKeyResponse;
import software.amazon.awssdk.utils.IoUtils;
```

```
import java.io.IOException;
import java.io.InputStream;
import java.util.UUID;

public class CreatePublicKey {
    private static final Logger logger =
 LoggerFactory.getLogger(CreatePublicKey.class);

    public static String createPublicKey(CloudFrontClient cloudFrontClient, String
 publicKeyFileName) {
        try (InputStream is =
 CreatePublicKey.class.getClassLoader().getResourceAsStream(publicKeyFileName)) {
            String publicKeyString = IoUtils.toUtf8String(is);
            CreatePublicKeyResponse createPublicKeyResponse = cloudFrontClient
                    .createPublicKey(b -> b.publicKeyConfig(c -> c
                            .name("JavaCreatedPublicKey" + UUID.randomUUID())
                            .encodedKey(publicKeyString)
                            .callerReference(UUID.randomUUID().toString())));
            String createdPublicKeyId = createPublicKeyResponse.publicKey().id();
            logger.info("Public key created with id: [{}]", createdPublicKeyId);
            return createdPublicKeyId;

        } catch (IOException e) {
            throw new RuntimeException(e);
        }
    }
}
```

- Untuk detail API, lihat CreatePublicKeydi Referensi AWS SDK for Java 2.x API.

### `DeleteDistribution`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDistribution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh kode berikut memperbarui distribusi ke dinonaktifkan, menggunakan pelayan yang menunggu perubahan diterapkan, lalu menghapus distribusi.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.DeleteDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionConfig;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;

public class DeleteDistribution {
        private static final Logger logger =
 LoggerFactory.getLogger(DeleteDistribution.class);

        public static void deleteDistribution(final CloudFrontClient
 cloudFrontClient, final String distributionId) {
                // First, disable the distribution by updating it.
                GetDistributionResponse response =
 cloudFrontClient.getDistribution(b -> b
                                .id(distributionId));
                String etag = response.eTag();
                DistributionConfig distConfig =
 response.distribution().distributionConfig();

                cloudFrontClient.updateDistribution(builder -> builder
                                .id(distributionId)
                                .distributionConfig(builder1 -> builder1

 .cacheBehaviors(distConfig.cacheBehaviors())

 .defaultCacheBehavior(distConfig.defaultCacheBehavior())
                                                .enabled(false)
                                                .origins(distConfig.origins())
                                                .comment(distConfig.comment())

 .callerReference(distConfig.callerReference())

 .defaultCacheBehavior(distConfig.defaultCacheBehavior())
                                                .priceClass(distConfig.priceClass())
                                                .aliases(distConfig.aliases())
                                                .logging(distConfig.logging())
```

```
 .defaultRootObject(distConfig.defaultRootObject())

 .customErrorResponses(distConfig.customErrorResponses())

 .httpVersion(distConfig.httpVersion())

 .isIPV6Enabled(distConfig.isIPV6Enabled())

 .restrictions(distConfig.restrictions())

 .viewerCertificate(distConfig.viewerCertificate())
                                                 .webACLId(distConfig.webACLId())

 .originGroups(distConfig.originGroups()))
                                 .ifMatch(etag));

                logger.info("Distribution [{}] is DISABLED, waiting for deployment
 before deleting ...",
                                 distributionId);
                GetDistributionResponse distributionResponse;
                try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
                        ResponseOrException<GetDistributionResponse>
 responseOrException = cfWaiter
                                        .waitUntilDistributionDeployed(builder ->
 builder.id(distributionId)).matched();
                        distributionResponse = responseOrException.response()
                                        .orElseThrow(() -> new
 RuntimeException("Could not disable distribution"));
                }

                DeleteDistributionResponse deleteDistributionResponse =
 cloudFrontClient
                                 .deleteDistribution(builder -> builder
                                                 .id(distributionId)

 .ifMatch(distributionResponse.eTag()));
                if (deleteDistributionResponse.sdkHttpResponse().isSuccessful()) {
                        logger.info("Distribution [{}] DELETED", distributionId);
                }
        }
}
```

- Untuk detail API, lihat DeleteDistributiondi Referensi AWS SDK for Java 2.x API.

### `UpdateDistribution`

Contoh kode berikut menunjukkan cara menggunakan`UpdateDistribution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionRequest;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.DistributionConfig;
import software.amazon.awssdk.services.cloudfront.model.UpdateDistributionRequest;
import software.amazon.awssdk.services.cloudfront.model.CloudFrontException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ModifyDistribution {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <id>\s

                Where:
                    id - the id value of the distribution.\s
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String id = args[0];
        CloudFrontClient cloudFrontClient = CloudFrontClient.builder()
                .region(Region.AWS_GLOBAL)
                .build();

        modDistribution(cloudFrontClient, id);
        cloudFrontClient.close();
    }

    public static void modDistribution(CloudFrontClient cloudFrontClient, String
idVal) {
        try {
            // Get the Distribution to modify.
            GetDistributionRequest disRequest = GetDistributionRequest.builder()
                    .id(idVal)
                    .build();

            GetDistributionResponse response =
cloudFrontClient.getDistribution(disRequest);
            Distribution disObject = response.distribution();
            DistributionConfig config = disObject.distributionConfig();

            // Create a new DistributionConfig object and add new values to comment
and
            // aliases
            DistributionConfig config1 = DistributionConfig.builder()
                    .aliases(config.aliases()) // You can pass in new values here
                    .comment("New Comment")
                    .cacheBehaviors(config.cacheBehaviors())
                    .priceClass(config.priceClass())
                    .defaultCacheBehavior(config.defaultCacheBehavior())
                    .enabled(config.enabled())
                    .callerReference(config.callerReference())
                    .logging(config.logging())
                    .originGroups(config.originGroups())
                    .origins(config.origins())
                    .restrictions(config.restrictions())
```

```
                    .defaultRootObject(config.defaultRootObject())
                    .webACLId(config.webACLId())
                    .httpVersion(config.httpVersion())
                    .viewerCertificate(config.viewerCertificate())
                    .customErrorResponses(config.customErrorResponses())
                    .build();

            UpdateDistributionRequest updateDistributionRequest =
 UpdateDistributionRequest.builder()
                    .distributionConfig(config1)
                    .id(disObject.id())
                    .ifMatch(response.eTag())
                    .build();

            cloudFrontClient.updateDistribution(updateDistributionRequest);

        } catch (CloudFrontException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat UpdateDistributiondi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat penyewa distribusi dan distribusi multi-tenant

Contoh kode berikut menunjukkan cara membuat distribusi multi-tenant dan penyewa distribusi dengan berbagai konfigurasi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh berikut menunjukkan cara membuat distribusi multi-tenant dengan parameter dan sertifikat wildcard.

```
import software.amazon.awssdk.core.internal.waiters.ResponseOrException;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.ConnectionMode;
import software.amazon.awssdk.services.cloudfront.model.CreateDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.Distribution;
import software.amazon.awssdk.services.cloudfront.model.GetDistributionResponse;
import software.amazon.awssdk.services.cloudfront.model.HttpVersion;
import software.amazon.awssdk.services.cloudfront.model.Method;
import software.amazon.awssdk.services.cloudfront.model.SSLSupportMethod;
import software.amazon.awssdk.services.cloudfront.model.ViewerProtocolPolicy;
import software.amazon.awssdk.services.cloudfront.waiters.CloudFrontWaiter;
import software.amazon.awssdk.services.s3.S3Client;

import java.time.Instant;

public class CreateMultiTenantDistribution {
    public static Distribution
 CreateMultiTenantDistributionWithCert(CloudFrontClient cloudFrontClient,
                                                                    S3Client
 s3Client,
                                                                    final String
 bucketName,
                                                                    final String
 certificateArn) {
        // fetch the origin info if necessary
        final String region = s3Client.headBucket(b ->
 b.bucket(bucketName)).sdkHttpResponse().headers()
                .get("x-amz-bucket-region").get(0);
        final String originDomain = bucketName + ".s3." + region + ".amazonaws.com";
        String originId = originDomain; // Use the originDomain value for the
 originId.

        CreateDistributionResponse createDistResponse =
 cloudFrontClient.createDistribution(builder -> builder
                .distributionConfig(b1 -> b1
                        .httpVersion(HttpVersion.HTTP2)
                        .enabled(true)
                        .comment("Template Distribution with cert built with java")
                        .connectionMode(ConnectionMode.TENANT_ONLY)
```

```
                        .callerReference(Instant.now().toString())
                        .viewerCertificate(certBuilder -> certBuilder
                                .acmCertificateArn(certificateArn)
                                .sslSupportMethod(SSLSupportMethod.SNI_ONLY))
                        .origins(b2 -> b2
                                .quantity(1)
                                .items(b3 -> b3
                                        .domainName(originDomain)
                                        .id(originId)
                                        .originPath("/{{tenantName}}")
                                        .s3OriginConfig(builder4 -> builder4
                                                .originAccessIdentity(
                                                        ""))))
                        .tenantConfig(b5 -> b5
                                .parameterDefinitions(b6 -> b6
                                        .name("tenantName")
                                        .definition(b7 -> b7
                                                .stringSchema(b8 -> b8
                                                        .comment("tenantName value")
                                                        .defaultValue("root")
                                                        .required(false)))))
                        .defaultCacheBehavior(b2 -> b2

 .viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)
                                .targetOriginId(originId)
                                .cachePolicyId("658327ea-f89d-4fab-
a63d-7e88639e58f6") // CachingOptimized Policy
                                .allowedMethods(b4 -> b4
                                        .quantity(2)
                                        .items(Method.HEAD, Method.GET)))
                ));

        final Distribution distribution = createDistResponse.distribution();
        try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
            ResponseOrException<GetDistributionResponse> responseOrException =
 cfWaiter
                    .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                    .matched();
            responseOrException.response()
                    .orElseThrow(() -> new RuntimeException("Distribution not
 created"));
        }
```

```
        return distribution;
    }

    public static Distribution CreateMultiTenantDistributionNoCert(CloudFrontClient
cloudFrontClient,
                                                                   S3Client s3Client,
                                                                   final String
bucketName) {
        // fetch the origin info if necessary
        final String region = s3Client.headBucket(b ->
b.bucket(bucketName)).sdkHttpResponse().headers()
                .get("x-amz-bucket-region").get(0);
        final String originDomain = bucketName + ".s3." + region + ".amazonaws.com";
        String originId = originDomain; // Use the originDomain value for the
originId.

        CreateDistributionResponse createDistResponse =
cloudFrontClient.createDistribution(builder -> builder
                .distributionConfig(b1 -> b1
                        .httpVersion(HttpVersion.HTTP2)
                        .enabled(true)
                        .comment("Template Distribution with cert built with java")
                        .connectionMode(ConnectionMode.TENANT_ONLY)
                        .callerReference(Instant.now().toString())
                        .origins(b2 -> b2
                                .quantity(1)
                                .items(b3 -> b3
                                        .domainName(originDomain)
                                        .id(originId)
                                        .originPath("/{{tenantName}}")
                                        .s3OriginConfig(builder4 -> builder4
                                                .originAccessIdentity(
                                                        ""))))
                        .tenantConfig(b5 -> b5
                                .parameterDefinitions(b6 -> b6
                                        .name("tenantName")
                                        .definition(b7 -> b7
                                                .stringSchema(b8 -> b8
                                                        .comment("tenantName value")
                                                        .defaultValue("root")
                                                        .required(false)))))
                        .defaultCacheBehavior(b2 -> b2

.viewerProtocolPolicy(ViewerProtocolPolicy.ALLOW_ALL)
```

```
                                .targetOriginId(originId)
                                .cachePolicyId("658327ea-f89d-4fab-
a63d-7e88639e58f6") // CachingOptimized Policy
                                .allowedMethods(b4 -> b4
                                        .quantity(2)
                                        .items(Method.HEAD, Method.GET)))
                ));

        final Distribution distribution = createDistResponse.distribution();
        try (CloudFrontWaiter cfWaiter =
 CloudFrontWaiter.builder().client(cloudFrontClient).build()) {
            ResponseOrException<GetDistributionResponse> responseOrException =
 cfWaiter
                    .waitUntilDistributionDeployed(builder ->
 builder.id(distribution.id()))
                    .matched();
            responseOrException.response()
                    .orElseThrow(() -> new RuntimeException("Distribution not
 created"));
        }
        return distribution;
    }
}
```

Contoh berikut menunjukkan cara membuat penyewa distribusi yang terkait dengan template itu, termasuk memanfaatkan parameter yang kami nyatakan di atas. Perhatikan bahwa kita tidak perlu menambahkan info sertifikat di sini karena domain kita sudah dicakup oleh template induk.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;
```

```
public class CreateDistributionTenant {

   public static DistributionTenant createDistributionTenantNoCert(CloudFrontClient
 cloudFrontClient,
                                                                    Route53Client
 route53Client,
                                                                    String
 distributionId,
                                                                    String domain,
                                                                    String
 hostedZoneId) {
       CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
               .distributionId(distributionId)
               .domains(b1 -> b1
                       .domain(domain))
               .parameters(b2 -> b2
                       .name("tenantName")
                       .value("myTenant"))
               .enabled(false)
               .name("no-cert-tenant")
       );

       final DistributionTenant distributionTenant =
 createResponse.distributionTenant();

       // Then update the Route53 hosted zone to point your domain at the
 distribution tenant
       // We fetch the RoutingEndpoint to point to via the default connection group
 that was created for your tenant
       final GetConnectionGroupResponse fetchedConnectionGroup =
 cloudFrontClient.getConnectionGroup(builder -> builder
               .identifier(distributionTenant.connectionGroupId()));

       route53Client.changeResourceRecordSets(builder -> builder
               .hostedZoneId(hostedZoneId)
               .changeBatch(b1 -> b1
                       .comment("ChangeBatch comment")
                       .changes(b2 -> b2
                               .resourceRecordSet(b3 -> b3
                                       .name(domain)
                                       .type("CNAME")
                                       .ttl(300L)
                                       .resourceRecords(b4 -> b4
```

```
 .value(fetchedConnectionGroup.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));
        return distributionTenant;
    }

}
```

Jika sertifikat penampil dihilangkan dari templat induk, Anda perlu menambahkan info sertifikat pada penyewa yang terkait dengannya. Contoh berikut menunjukkan bagaimana melakukannya melalui sertifikat ACM arn yang mencakup domain yang diperlukan untuk penyewa.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantWithCert(CloudFrontClient cloudFrontClient,
                                                                  Route53Client
 route53Client,
                                                                  String
 distributionId,
                                                                  String domain,
                                                                  String
 hostedZoneId,
                                                                  String
 certificateArn) {
        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
```

```
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))
                .enabled(false)
                .name("tenant-with-cert")
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .customizations(b3 -> b3
                        .certificate(b4 -> b4
                                .arn(certificateArn))) // NOTE: Cert must be in Us-
East-1 and cover the domain provided in this request

        );

        final DistributionTenant distributionTenant =
 createResponse.distributionTenant();

        // Then update the Route53 hosted zone to point your domain at the
 distribution tenant
        // We fetch the RoutingEndpoint to point to via the default connection group
 that was created for your tenant
        final GetConnectionGroupResponse fetchedConnectionGroup =
 cloudFrontClient.getConnectionGroup(builder -> builder
                .identifier(distributionTenant.connectionGroupId()));

        route53Client.changeResourceRecordSets(builder -> builder
                .hostedZoneId(hostedZoneId)
                .changeBatch(b1 -> b1
                        .comment("ChangeBatch comment")
                        .changes(b2 -> b2
                                .resourceRecordSet(b3 -> b3
                                        .name(domain)
                                        .type("CNAME")
                                        .ttl(300L)
                                        .resourceRecords(b4 -> b4

 .value(fetchedConnectionGroup.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));
        return distributionTenant;
    }

}
```

Contoh berikut menunjukkan cara melakukannya dengan permintaan sertifikat terkelola CloudFront -host. Ini sangat ideal jika Anda belum memiliki lalu lintas ke domain Anda. Dalam hal ini, kami membuat ConnectionGroup untuk menghasilkan a RoutingEndpoint. Kemudian kami menggunakannya RoutingEndpoint untuk membuat catatan DNS yang memverifikasi kepemilikan domain dan menunjuk ke CloudFront. CloudFront kemudian akan secara otomatis menyajikan token untuk memvalidasi kepemilikan domain dan membuat sertifikat terkelola.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantCfHosted(CloudFrontClient cloudFrontClient,
                                                                    Route53Client
 route53Client,
                                                                    String
 distributionId,
                                                                    String domain,
                                                                    String
 hostedZoneId) throws InterruptedException {
        CreateConnectionGroupResponse createConnectionGroupResponse =
 cloudFrontClient.createConnectionGroup(builder -> builder
                .ipv6Enabled(true)
                .name("cf-hosted-connection-group")
                .enabled(true));

        route53Client.changeResourceRecordSets(builder -> builder
                .hostedZoneId(hostedZoneId)
```

```
                .changeBatch(b1 -> b1
                        .comment("cf-hosted domain validation record")
                        .changes(b2 -> b2
                                .resourceRecordSet(b3 -> b3
                                        .name(domain)
                                        .type(RRType.CNAME)
                                        .ttl(300L)
                                        .resourceRecords(b4 -> b4

.value(createConnectionGroupResponse.connectionGroup().routingEndpoint())))
                                .action("CREATE"))
                ));

        // Give the R53 record time to propagate, if it isn't being returned by
servers yet, the following call will fail
        Thread.sleep(60000);

        CreateDistributionTenantResponse createResponse =
cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))

.connectionGroupId(createConnectionGroupResponse.connectionGroup().id())
                .enabled(false)
                .name("cf-hosted-tenant")
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .managedCertificateRequest(b3 -> b3
                        .validationTokenHost(ValidationTokenHost.CLOUDFRONT)
                )
        );

        return createResponse.distributionTenant();
    }

}
```

Contoh berikut menunjukkan cara melakukannya dengan permintaan sertifikat terkelola yang dihosting sendiri. Ini sangat ideal jika Anda memiliki lalu lintas ke domain Anda dan tidak dapat mentolerir downtime selama migrasi. Pada akhir contoh ini, Penyewa akan dibuat

dalam keadaan menunggu validasi domain dan penyiapan DNS. Ikuti langkah-langkah [di sini] (https://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/managed-cloudfront-certificates.html#complete-domain-ownership) untuk menyelesaikan penyiapan saat Anda siap untuk memigrasikan lalu lintas.

```
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import
 software.amazon.awssdk.services.cloudfront.model.CreateConnectionGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.CreateDistributionTenantResponse;
import software.amazon.awssdk.services.cloudfront.model.DistributionTenant;
import software.amazon.awssdk.services.cloudfront.model.GetConnectionGroupResponse;
import software.amazon.awssdk.services.cloudfront.model.ValidationTokenHost;
import software.amazon.awssdk.services.route53.Route53Client;
import software.amazon.awssdk.services.route53.model.RRType;

import java.time.Instant;

public class CreateDistributionTenant {

    public static DistributionTenant
 createDistributionTenantSelfHosted(CloudFrontClient cloudFrontClient,
                                                                        String
 distributionId,
                                                                        String
 domain) {
        CreateDistributionTenantResponse createResponse =
 cloudFrontClient.createDistributionTenant(builder -> builder
                .distributionId(distributionId)
                .domains(b1 -> b1
                        .domain(domain))
                .parameters(b2 -> b2
                        .name("tenantName")
                        .value("myTenant"))
                .enabled(false)
                .name("self-hosted-tenant")
                .managedCertificateRequest(b3 -> b3
                        .validationTokenHost(ValidationTokenHost.SELF_HOSTED)
                        .primaryDomainName(domain)
                )
        );
```

```
        return createResponse.distributionTenant();
    }

}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateDistribution
  - CreateDistributionTenant

Hapus sumber penandatanganan

Contoh kode berikut menunjukkan cara menghapus sumber daya yang digunakan untuk mendapatkan akses ke konten terbatas di bucket Amazon Simple Storage Service (Amazon S3).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontClient;
import software.amazon.awssdk.services.cloudfront.model.DeleteKeyGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.DeleteOriginAccessControlResponse;
import software.amazon.awssdk.services.cloudfront.model.DeletePublicKeyResponse;
import software.amazon.awssdk.services.cloudfront.model.GetKeyGroupResponse;
import
 software.amazon.awssdk.services.cloudfront.model.GetOriginAccessControlResponse;
import software.amazon.awssdk.services.cloudfront.model.GetPublicKeyResponse;

public class DeleteSigningResources {
    private static final Logger logger =
 LoggerFactory.getLogger(DeleteSigningResources.class);

    public static void deleteOriginAccessControl(final CloudFrontClient
 cloudFrontClient,
```

```
            final String originAccessControlId) {
        GetOriginAccessControlResponse getResponse = cloudFrontClient
                .getOriginAccessControl(b -> b.id(originAccessControlId));
        DeleteOriginAccessControlResponse deleteResponse =
 cloudFrontClient.deleteOriginAccessControl(builder -> builder
                .id(originAccessControlId)
                .ifMatch(getResponse.eTag()));
        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Origin Access Control [{}]",
 originAccessControlId);
        }
    }

    public static void deleteKeyGroup(final CloudFrontClient cloudFrontClient, final
 String keyGroupId) {

        GetKeyGroupResponse getResponse = cloudFrontClient.getKeyGroup(b ->
 b.id(keyGroupId));
        DeleteKeyGroupResponse deleteResponse =
 cloudFrontClient.deleteKeyGroup(builder -> builder
                .id(keyGroupId)
                .ifMatch(getResponse.eTag()));
        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Key Group [{}]", keyGroupId);
        }
    }

    public static void deletePublicKey(final CloudFrontClient cloudFrontClient,
 final String publicKeyId) {
        GetPublicKeyResponse getResponse = cloudFrontClient.getPublicKey(b ->
 b.id(publicKeyId));

        DeletePublicKeyResponse deleteResponse =
 cloudFrontClient.deletePublicKey(builder -> builder
                .id(publicKeyId)
                .ifMatch(getResponse.eTag()));

        if (deleteResponse.sdkHttpResponse().isSuccessful()) {
            logger.info("Successfully deleted Public Key [{}]", publicKeyId);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteKeyGroup
  - DeleteOriginAccessControl
  - DeletePublicKey

Tanda tangan URLs dan cookie

Contoh kode berikut menunjukkan cara membuat ditandatangani URLs dan cookie yang memungkinkan akses ke sumber daya terbatas.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan CannedSignerRequestkelas untuk menandatangani URLs atau cookie dengan kebijakan kalengan.

```
import software.amazon.awssdk.services.cloudfront.model.CannedSignerRequest;

import java.net.URL;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.temporal.ChronoUnit;

public class CreateCannedPolicyRequest {

    public static CannedSignerRequest createRequestForCannedPolicy(String
 distributionDomainName,
            String fileNameToUpload,
            String privateKeyFullPath, String publicKeyId) throws Exception {
        String protocol = "https";
        String resourcePath = "/" + fileNameToUpload;

        String cloudFrontUrl = new URL(protocol, distributionDomainName,
 resourcePath).toString();
```

```
        Instant expirationDate = Instant.now().plus(7, ChronoUnit.DAYS);
        Path path = Paths.get(privateKeyFullPath);

        return CannedSignerRequest.builder()
                .resourceUrl(cloudFrontUrl)
                .privateKey(path)
                .keyPairId(publicKeyId)
                .expirationDate(expirationDate)
                .build();
    }
}
```

Gunakan CustomSignerRequestkelas untuk menandatangani URLs atau cookie dengan kebijakan khusus. Metode `activeDate` dan `ipRange` merupakan metode opsional.

```
import software.amazon.awssdk.services.cloudfront.model.CustomSignerRequest;

import java.net.URL;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.temporal.ChronoUnit;

public class CreateCustomPolicyRequest {

    public static CustomSignerRequest createRequestForCustomPolicy(String
 distributionDomainName,
            String fileNameToUpload,
            String privateKeyFullPath, String publicKeyId) throws Exception {
        String protocol = "https";
        String resourcePath = "/" + fileNameToUpload;

        String cloudFrontUrl = new URL(protocol, distributionDomainName,
 resourcePath).toString();
        Instant expireDate = Instant.now().plus(7, ChronoUnit.DAYS);
        // URL will be accessible tomorrow using the signed URL.
        Instant activeDate = Instant.now().plus(1, ChronoUnit.DAYS);
        Path path = Paths.get(privateKeyFullPath);

        return CustomSignerRequest.builder()
                .resourceUrl(cloudFrontUrl)
                // .resourceUrlPattern("https://*.example.com/*")  // Optional.
```

```
                .privateKey(path)
                .keyPairId(publicKeyId)
                .expirationDate(expireDate)
                .activeDate(activeDate) // Optional.
                // .ipRange("192.168.0.1/24") // Optional.
                .build();
    }
}
```

Contoh berikut menunjukkan penggunaan CloudFrontUtilitieskelas untuk menghasilkan cookie ditandatangani dan URLs. Lihat contoh kode ini di GitHub.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudfront.CloudFrontUtilities;
import software.amazon.awssdk.services.cloudfront.cookie.CookiesForCannedPolicy;
import software.amazon.awssdk.services.cloudfront.cookie.CookiesForCustomPolicy;
import software.amazon.awssdk.services.cloudfront.model.CannedSignerRequest;
import software.amazon.awssdk.services.cloudfront.model.CustomSignerRequest;
import software.amazon.awssdk.services.cloudfront.url.SignedUrl;

public class SigningUtilities {
    private static final Logger logger =
 LoggerFactory.getLogger(SigningUtilities.class);
    private static final CloudFrontUtilities cloudFrontUtilities =
 CloudFrontUtilities.create();

    public static SignedUrl signUrlForCannedPolicy(CannedSignerRequest
 cannedSignerRequest) {
        SignedUrl signedUrl =
 cloudFrontUtilities.getSignedUrlWithCannedPolicy(cannedSignerRequest);
        logger.info("Signed URL: [{}]", signedUrl.url());
        return signedUrl;
    }

    public static SignedUrl signUrlForCustomPolicy(CustomSignerRequest
 customSignerRequest) {
        SignedUrl signedUrl =
 cloudFrontUtilities.getSignedUrlWithCustomPolicy(customSignerRequest);
        logger.info("Signed URL: [{}]", signedUrl.url());
        return signedUrl;
    }
```

```
    public static CookiesForCannedPolicy
 getCookiesForCannedPolicy(CannedSignerRequest cannedSignerRequest) {
        CookiesForCannedPolicy cookiesForCannedPolicy = cloudFrontUtilities
                .getCookiesForCannedPolicy(cannedSignerRequest);
        logger.info("Cookie EXPIRES header [{}]",
 cookiesForCannedPolicy.expiresHeaderValue());
        logger.info("Cookie KEYPAIR header [{}]",
 cookiesForCannedPolicy.keyPairIdHeaderValue());
        logger.info("Cookie SIGNATURE header [{}]",
 cookiesForCannedPolicy.signatureHeaderValue());
        return cookiesForCannedPolicy;
    }

    public static CookiesForCustomPolicy
 getCookiesForCustomPolicy(CustomSignerRequest customSignerRequest) {
        CookiesForCustomPolicy cookiesForCustomPolicy = cloudFrontUtilities
                .getCookiesForCustomPolicy(customSignerRequest);
        logger.info("Cookie POLICY header [{}]",
 cookiesForCustomPolicy.policyHeaderValue());
        logger.info("Cookie KEYPAIR header [{}]",
 cookiesForCustomPolicy.keyPairIdHeaderValue());
        logger.info("Cookie SIGNATURE header [{}]",
 cookiesForCustomPolicy.signatureHeaderValue());
        return cookiesForCustomPolicy;
    }
}
```

- Untuk detail API, lihat CloudFrontUtilitiesdi Referensi AWS SDK for Java 2.x API.

# CloudWatch contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with CloudWatch.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


## Memulai

Halo CloudWatch

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan CloudWatch.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.ListMetricsRequest;
import software.amazon.awssdk.services.cloudwatch.paginators.ListMetricsIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloService {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <namespace>\s

                Where:
                  namespace - The namespace to filter against (for example, AWS/
EC2).\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String namespace = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();

        listMets(cw, namespace);
        cw.close();
    }

    public static void listMets(CloudWatchClient cw, String namespace) {
        try {
            ListMetricsRequest request = ListMetricsRequest.builder()
                    .namespace(namespace)
                    .build();

            ListMetricsIterable listRes = cw.listMetricsPaginator(request);
            listRes.stream()
                    .flatMap(r -> r.metrics().stream())
                    .forEach(metrics -> System.out.println(" Retrieved metric is: "
 + metrics.metricName()));

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Untuk detail API, lihat ListMetricsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat daftar CloudWatch ruang nama dan metrik.
- Ambil statistik untuk metrik dan estimasi penagihan.
- Membuat dan memperbarui sebuah dasbor.
- Membuat dan menambahkan data ke metrik.
- Membuat dan memicu alarm, lalu lihat riwayat alarm.
- Menambahkan detektor anomali.
- Ambil gambar metrik, lalu bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan CloudWatch fitur.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import
 software.amazon.awssdk.services.cloudwatch.model.DashboardInvalidInputErrorException;
import software.amazon.awssdk.services.cloudwatch.model.DeleteAlarmsResponse;
```

```
import
 software.amazon.awssdk.services.cloudwatch.model.DeleteAnomalyDetectorResponse;
import software.amazon.awssdk.services.cloudwatch.model.DeleteDashboardsResponse;
import software.amazon.awssdk.services.cloudwatch.model.Dimension;
import software.amazon.awssdk.services.cloudwatch.model.GetMetricStatisticsResponse;
import software.amazon.awssdk.services.cloudwatch.model.LimitExceededException;
import software.amazon.awssdk.services.cloudwatch.model.PutDashboardResponse;
import software.amazon.awssdk.services.cloudwatch.model.PutMetricDataResponse;
import java.io.IOException;
import java.util.ArrayList;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To enable billing metrics and statistics for this example, make sure billing
 * alerts are enabled for your account:
 * https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/
monitor_estimated_charges_with_cloudwatch.html#turning_on_billing_metrics
 *
 * This Java code example performs the following tasks:
 *
 * 1. List available namespaces from Amazon CloudWatch.
 * 2. List available metrics within the selected Namespace.
 * 3. Get statistics for the selected metric over the last day.
 * 4. Get CloudWatch estimated billing for the last week.
 * 5. Create a new CloudWatch dashboard with metrics.
 * 6. List dashboards using a paginator.
 * 7. Create a new custom metric by adding data for it.
 * 8. Add the custom metric to the dashboard.
 * 9. Create an alarm for the custom metric.
 * 10. Describe current alarms.
 * 11. Get current data for the new custom metric.
 * 12. Push data into the custom metric to trigger the alarm.
 * 13. Check the alarm state using the action DescribeAlarmsForMetric.
 * 14. Get alarm history for the new alarm.
 * 15. Add an anomaly detector for the custom metric.
 * 16. Describe current anomaly detectors.
```

```
 * 17. Get a metric image for the custom metric.
 * 18. Clean up the Amazon CloudWatch resources.
 */
public class CloudWatchScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    static CloudWatchActions cwActions = new CloudWatchActions();

    private static final Logger logger =
 LoggerFactory.getLogger(CloudWatchScenario.class);
    static Scanner scanner = new Scanner(System.in);
    public static void main(String[] args) throws Throwable {

        final String usage = """

            Usage:
              <myDate> <costDateWeek> <dashboardName> <dashboardJson> <dashboardAdd>
 <settings> <metricImage> \s

            Where:
              myDate - The start date to use to get metric statistics. (For example,
 2023-01-11T18:35:24.00Z.)\s
              costDateWeek - The start date to use to get AWS/Billing statistics.
 (For example, 2023-01-11T18:35:24.00Z.)\s
              dashboardName - The name of the dashboard to create.\s
              dashboardJson - The location of a JSON file to use to create a
 dashboard. (See jsonWidgets.json in javav2/example_code/cloudwatch.)\s
              dashboardAdd - The location of a JSON file to use to update a
 dashboard. (See CloudDashboard.json in javav2/example_code/cloudwatch.)\s
              settings - The location of a JSON file from which various values are
 read. (See settings.json in javav2/example_code/cloudwatch.)\s
              metricImage - The location of a BMP file that is used to create a
 graph.\s
            """;

        if (args.length != 7) {
            logger.info(usage);
            return;
        }
        String myDate = args[0];
        String costDateWeek = args[1];
        String dashboardName = args[2];
        String dashboardJson = args[3];
        String dashboardAdd = args[4];
```

```
        String settings = args[5];
        String metricImage = args[6];

        logger.info(DASHES);
        logger.info("Welcome to the Amazon CloudWatch Basics scenario.");
        logger.info("""
            Amazon CloudWatch is a comprehensive monitoring and observability
service
            provided by Amazon Web Services (AWS). It is designed to help you
monitor your
            AWS resources, applications, and services, as well as on-premises
resources,
            in real-time.

            CloudWatch collects and tracks various types of data, including
metrics,
            logs, and events, from your AWS and on-premises resources. It allows you
to set
            alarms and automatically respond to changes in your environment,
            enabling you to quickly identify and address issues before they impact
your
            applications or services.

            With CloudWatch, you can gain visibility into your entire
infrastructure, from the cloud
            to the edge, and use this information to make informed decisions and
optimize your
            resource utilization.

            This scenario guides you through how to perform Amazon CloudWatch tasks
by using the
            AWS SDK for Java v2. Let's get started...
            """);
        waitForInputToContinue(scanner);

        try {
            runScenario(myDate, costDateWeek, dashboardName, dashboardJson,
dashboardAdd, settings, metricImage);
        } catch (RuntimeException e) {
            e.printStackTrace();
        }
        logger.info(DASHES);
    }
```

```
   private static void runScenario(String myDate, String costDateWeek, String
dashboardName, String dashboardJson, String dashboardAdd, String settings, String
metricImage ) throws Throwable {
       Double dataPoint = Double.parseDouble("10.0");
       logger.info(DASHES);
       logger.info("""
       1. List at least five available unique namespaces from Amazon CloudWatch.
       Select one from the list.
       """);
       String selectedNamespace;
       String selectedMetrics;
       int num;
       try {
           CompletableFuture<ArrayList<String>> future =
cwActions.listNameSpacesAsync();
           ArrayList<String> list = future.join();
           for (int z = 0; z < 5; z++) {
               int index = z + 1;
               logger.info("    " + index + ". {}", list.get(z));
           }

           num = Integer.parseInt(scanner.nextLine());
           if (1 <= num && num <= 5) {
               selectedNamespace = list.get(num - 1);
           } else {
               logger.info("You did not select a valid option.");
               return;
           }
           logger.info("You selected {}", selectedNamespace);

       } catch (RuntimeException rt) {
           Throwable cause = rt.getCause();
           if (cause instanceof CloudWatchException cwEx) {
               logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
           } else {
               logger.info("An unexpected error occurred: " + rt.getMessage());
           }
           throw cause;
       }
       waitForInputToContinue(scanner);
       logger.info(DASHES);

       logger.info(DASHES);
```

```
        logger.info("2. List available metrics within the selected namespace.");
        logger.info("""
            A metric is a measure of the performance or health of your AWS
resources,
            applications, or custom resources. Metrics are the basic building blocks
of CloudWatch
            and provide data points that represent a specific aspect of your system
or application over time.

            Select a metric from the list.
            """);

        Dimension myDimension = null;
        try {
            CompletableFuture<ArrayList<String>> future =
cwActions.listMetsAsync(selectedNamespace);
            ArrayList<String> metList = future.join();
            logger.info("Metrics successfully retrieved. Total metrics: {}",
metList.size());
            for (int z = 0; z < 5; z++) {
                int index = z + 1;
                logger.info("    " + index + ". " + metList.get(z));
            }
            num = Integer.parseInt(scanner.nextLine());
            if (1 <= num && num <= 5) {
                selectedMetrics = metList.get(num - 1);
            } else {
                logger.info("You did not select a valid option.");
                return;
            }
            logger.info("You selected {}", selectedMetrics);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        try {
```

```
            myDimension = cwActions.getSpecificMetAsync(selectedNamespace).join();
            logger.info("Metric statistics successfully retrieved and displayed.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Get statistics for the selected metric over the last day.");
        logger.info("""
            Statistics refer to the various mathematical calculations that can be
performed on the
            collected metrics to derive meaningful insights. Statistics provide a
way to summarize and
            analyze the data collected for a specific metric over a specified time
period.
            """);
        waitForInputToContinue(scanner);
        String metricOption = "";
        ArrayList<String> statTypes = new ArrayList<>();
        statTypes.add("SampleCount");
        statTypes.add("Average");
        statTypes.add("Sum");
        statTypes.add("Minimum");
        statTypes.add("Maximum");

        for (int t = 0; t < 5; t++) {
            logger.info("    " + (t + 1) + ". {}", statTypes.get(t));
        }
        logger.info("Select a metric statistic by entering a number from the
preceding list:");
        num = Integer.parseInt(scanner.nextLine());
        if (1 <= num && num <= 5) {
            metricOption = statTypes.get(num - 1);
        } else {
```

```
            logger.info("You did not select a valid option.");
            return;
        }
        logger.info("You selected " + metricOption);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<GetMetricStatisticsResponse> future =
cwActions.getAndDisplayMetricStatisticsAsync(selectedNamespace, selectedMetrics,
metricOption, myDate, myDimension);
            future.join();
            logger.info("Metric statistics retrieved successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Get CloudWatch estimated billing for the last week.");
        waitForInputToContinue(scanner);
         try {
            CompletableFuture<GetMetricStatisticsResponse> future =
cwActions.getMetricStatisticsAsync(costDateWeek);
            future.join();

            logger.info("Metric statistics successfully retrieved and displayed.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
             throw cause;
         }
```

```
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Create a new CloudWatch dashboard with metrics.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutDashboardResponse> future =
cwActions.createDashboardWithMetricsAsync(dashboardName, dashboardJson);
            future.join();

        } catch (RuntimeException | IOException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DashboardInvalidInputErrorException cwEx) {
                logger.info("Invalid CloudWatch data. Error message: {}, Error code
{}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. List dashboards using a paginator.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = cwActions.listDashboardsAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);
```

```
        logger.info(DASHES);
        logger.info("7. Create a new custom metric by adding data to it.");
        logger.info("""
            The primary benefit of using a custom metric in Amazon CloudWatch is the
ability to
            monitor and collect data that is specific to your application or
infrastructure.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutMetricDataResponse> future =
cwActions.createNewCustomMetricAsync(dataPoint);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Add an additional metric to the dashboard.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutDashboardResponse> future =
cwActions.addMetricToDashboardAsync(dashboardAdd, dashboardName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DashboardInvalidInputErrorException cwEx) {
                logger.info("Invalid CloudWatch data. Error message: {}, Error code
{}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
```

```
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Create an alarm for the custom metric.");
        waitForInputToContinue(scanner);
        String alarmName = "" ;
        try {
            CompletableFuture<String> future = cwActions.createAlarmAsync(settings);
            alarmName = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof LimitExceededException cwEx) {
                logger.info("The quota for alarms has been reached: Error message:
{}, Error code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Describe ten current alarms.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = cwActions.describeAlarmsAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);
```

```
        logger.info(DASHES);
        logger.info("11. Get current data for new custom metric.");
        try {
            CompletableFuture<Void> future =
cwActions.getCustomMetricDataAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("12. Push data into the custom metric to trigger the alarm.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutMetricDataResponse> future =
cwActions.addMetricDataForAlarmAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("13. Check the alarm state using the action
DescribeAlarmsForMetric.");
```

```
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.checkForMetricAlarmAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("14. Get alarm history for the new alarm.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.getAlarmHistoryAsync(settings, myDate);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("15. Add an anomaly detector for the custom metric.");
        logger.info("""
            An anomaly detector is a feature that automatically detects unusual
patterns or deviations in your
```

```
            monitored metrics. It uses machine learning algorithms to analyze the
historical behavior
            of your metrics and establish a baseline.

            The anomaly detector then compares the current metric values against
this baseline and
            identifies any anomalies or outliers that may indicate potential issues
or unexpected changes
            in your system's performance or behavior.

            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.addAnomalyDetectorAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("16. Describe current anomaly detectors.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
cwActions.describeAnomalyDetectorsAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
```

```
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("17. Get a metric image for the custom metric.");
        try {
            CompletableFuture<Void> future =
cwActions.downloadAndSaveMetricImageAsync(metricImage);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("18. Clean up the Amazon CloudWatch resources.");

        try {
            logger.info(". Delete the Dashboard.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteDashboardsResponse> future =
cwActions.deleteDashboardAsync(dashboardName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
```

```
            throw cause;
        }

        try {
            logger.info("Delete the alarm.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteAlarmsResponse> future =
cwActions.deleteCWAlarmAsync(alarmName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        try {
            logger.info("Delete the anomaly detector.");
            waitForInputToContinue(scanner);
            CompletableFuture<DeleteAnomalyDetectorResponse> future =
cwActions.deleteAnomalyDetectorAsync(settings);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof CloudWatchException cwEx) {
                logger.info("CloudWatch error occurred: Error message: {}, Error
code {}", cwEx.getMessage(), cwEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("The Amazon CloudWatch example scenario is complete.");
        logger.info(DASHES);
```

```
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode CloudWatch SDK.

```
public class CloudWatchActions {

    private static CloudWatchAsyncClient cloudWatchAsyncClient;

    private static final Logger logger =
 LoggerFactory.getLogger(CloudWatchActions.class);

    /**
     * Retrieves an asynchronous CloudWatch client instance.
     *
     * <p>
     * This method ensures that the CloudWatch client is initialized with the
 following configurations:
     * <ul>
     *     <li>Maximum concurrency: 100</li>
     *     <li>Connection timeout: 60 seconds</li>
     *     <li>Read timeout: 60 seconds</li>
     *     <li>Write timeout: 60 seconds</li>
     *     <li>API call timeout: 2 minutes</li>
     *     <li>API call attempt timeout: 90 seconds</li>
     *     <li>Retry strategy: STANDARD</li>
```

```
     * </ul>
     * </p>
     *
     * @return the asynchronous CloudWatch client instance
     */
    private static CloudWatchAsyncClient getAsyncClient() {
        if (cloudWatchAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            cloudWatchAsyncClient = CloudWatchAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return cloudWatchAsyncClient;
    }

    /**
     * Deletes an Anomaly Detector.
     *
     * @param fileName the name of the file containing the Anomaly Detector
configuration
     * @return a CompletableFuture that represents the asynchronous deletion of the
Anomaly Detector
     */
    public CompletableFuture<DeleteAnomalyDetectorResponse>
deleteAnomalyDetectorAsync(String fileName) {
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
```

```
                return new ObjectMapper().readTree(parser); // Return the root node
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        return readFileFuture.thenCompose(rootNode -> {
            String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
            String customMetricName =
rootNode.findValue("customMetricName").asText();

            SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                .metricName(customMetricName)
                .namespace(customMetricNamespace)
                .stat("Maximum")
                .build();

            DeleteAnomalyDetectorRequest request =
DeleteAnomalyDetectorRequest.builder()
                .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                .build();

            return getAsyncClient().deleteAnomalyDetector(request);
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Failed to delete the Anomaly Detector",
exception);
            } else {
                logger.info("Successfully deleted the Anomaly Detector.");
            }
        });
    }

    /**
     * Deletes a CloudWatch alarm.
     *
     * @param alarmName the name of the alarm to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
to delete the alarm
     * the {@link DeleteAlarmsResponse} is returned when the operation completes
successfully,
     * or a {@link RuntimeException} is thrown if the operation fails
```

```
     */
    public CompletableFuture<DeleteAlarmsResponse> deleteCWAlarmAsync(String
alarmName) {
        DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
            .alarmNames(alarmName)
            .build();

        return getAsyncClient().deleteAlarms(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the alarm:{} " +
alarmName, exception);
                } else {
                    logger.info("Successfully deleted alarm {} ", alarmName);
                }
            });
    }

    /**
     * Deletes the specified dashboard.
     *
     * @param dashboardName the name of the dashboard to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the dashboard
     * @throws RuntimeException if the dashboard deletion fails
     */
    public CompletableFuture<DeleteDashboardsResponse> deleteDashboardAsync(String
dashboardName) {
        DeleteDashboardsRequest dashboardsRequest =
DeleteDashboardsRequest.builder()
            .dashboardNames(dashboardName)
            .build();

        return getAsyncClient().deleteDashboards(dashboardsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the dashboard: " +
dashboardName, exception);
                } else {
                    logger.info("{} was successfully deleted.", dashboardName);
                }
            });
    }
```

```
   /**
    * Retrieves and saves a custom metric image to a file.
    *
    * @param fileName the name of the file to save the metric image to
    * @return a {@link CompletableFuture} that completes when the image has been
saved to the file
    */
   public CompletableFuture<Void> downloadAndSaveMetricImageAsync(String fileName)
{
       logger.info("Getting Image data for custom metric.");
       String myJSON = """
             {
                 "title": "Example Metric Graph",
                 "view": "timeSeries",
                 "stacked ": false,
                 "period": 10,
                 "width": 1400,
                 "height": 600,
                 "metrics": [
                     [
                     "AWS/Billing",
                     "EstimatedCharges",
                     "Currency",
                     "USD"
                    ]
                 ]
             }
           """;

       GetMetricWidgetImageRequest imageRequest =
GetMetricWidgetImageRequest.builder()
           .metricWidget(myJSON)
           .build();

       return getAsyncClient().getMetricWidgetImage(imageRequest)
           .thenCompose(response -> {
               SdkBytes sdkBytes = response.metricWidgetImage();
               byte[] bytes = sdkBytes.asByteArray();
               return CompletableFuture.runAsync(() -> {
                   try {
                       File outputFile = new File(fileName);
                       try (FileOutputStream outputStream = new
FileOutputStream(outputFile)) {
```

```
                            outputStream.write(bytes);
                        }
                    } catch (IOException e) {
                        throw new RuntimeException("Failed to write image to file",
e);
                    }
                });
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Error getting and saving metric
image", exception);
                } else {
                    logger.info("Image data saved successfully to {}", fileName);
                }
            });
    }


    /**
     * Describes the anomaly detectors based on the specified JSON file.
     *
     * @param fileName the name of the JSON file containing the custom metric
namespace and name
     * @return a {@link CompletableFuture} that completes when the anomaly detectors
have been described
     * @throws RuntimeException if there is a failure during the operation, such as
when reading or parsing the JSON file,
     *                          or when describing the anomaly detectors
     */
    public CompletableFuture<Void> describeAnomalyDetectorsAsync(String fileName) {
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                return new ObjectMapper().readTree(parser);
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        return readFileFuture.thenCompose(rootNode -> {
            try {
```

```
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                DescribeAnomalyDetectorsRequest detectorsRequest =
DescribeAnomalyDetectorsRequest.builder()
                    .maxResults(10)
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return
getAsyncClient().describeAnomalyDetectors(detectorsRequest).thenAccept(response ->
{
                    List<AnomalyDetector> anomalyDetectorList =
response.anomalyDetectors();
                    for (AnomalyDetector detector : anomalyDetectorList) {
                        logger.info("Metric name: {} ",
detector.singleMetricAnomalyDetector().metricName());
                        logger.info("State: {} ", detector.stateValue());
                    }
                });
            } catch (RuntimeException e) {
                throw new RuntimeException("Failed to describe anomaly detectors",
e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error describing anomaly detectors",
exception);
            }
        });
    }


    /**
     * Adds an anomaly detector for the given file.
     *
     * @param fileName the name of the file containing the anomaly detector
configuration
     * @return a {@link CompletableFuture} that completes when the anomaly detector
has been added
     */
```

```
   public CompletableFuture<Void> addAnomalyDetectorAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser); // Return the root node
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           try {
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();

               SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                   .metricName(customMetricName)
                   .namespace(customMetricNamespace)
                   .stat("Maximum")
                   .build();

               PutAnomalyDetectorRequest anomalyDetectorRequest =
PutAnomalyDetectorRequest.builder()
                   .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                   .build();

               return
getAsyncClient().putAnomalyDetector(anomalyDetectorRequest).thenAccept(response ->
{
                   logger.info("Added anomaly detector for metric {}",
customMetricName);
               });
           } catch (Exception e) {
               throw new RuntimeException("Failed to create anomaly detector", e);
           }
       }).whenComplete((result, exception) -> {
           if (exception != null) {
               throw new RuntimeException("Error adding anomaly detector",
exception);
```

```
            }
        });
    }


    /**
     * Retrieves the alarm history for a given alarm name and date range.
     *
     * @param fileName the path to the JSON file containing the alarm name
     * @param date     the date to start the alarm history search (in the format
"yyyy-MM-dd'T'HH:mm:ss'Z'")
     * @return a {@code CompletableFuture<Void>} that completes when the alarm
history has been retrieved and processed
     */
    public CompletableFuture<Void> getAlarmHistoryAsync(String fileName, String
date) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.findValue("exampleAlarmName").asText(); // Return
alarmName from the JSON file
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        // Use the alarm name to describe alarm history with a paginator.
        return readFileFuture.thenCompose(alarmName -> {
            try {
                Instant start = Instant.parse(date);
                Instant endDate = Instant.now();
                DescribeAlarmHistoryRequest historyRequest =
DescribeAlarmHistoryRequest.builder()
                    .startDate(start)
                    .endDate(endDate)
                    .alarmName(alarmName)
                    .historyItemType(HistoryItemType.ACTION)
                    .build();

                // Use the paginator to paginate through alarm history pages.
```

```
                DescribeAlarmHistoryPublisher historyPublisher =
getAsyncClient().describeAlarmHistoryPaginator(historyRequest);
                CompletableFuture<Void> future = historyPublisher
                    .subscribe(response -> response.alarmHistoryItems().forEach(item
-> {
                        logger.info("History summary: {}", item.historySummary());
                        logger.info("Timestamp: {}", item.timestamp());
                    }))
                    .whenComplete((result, exception) -> {
                        if (exception != null) {
                            logger.error("Error occurred while getting alarm
history: " + exception.getMessage(), exception);
                        } else {
                            logger.info("Successfully retrieved all alarm
history.");
                        }
                    });

                // Return the future to the calling code for further handling
                return future;
            } catch (Exception e) {
                throw new RuntimeException("Failed to process alarm history", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error completing alarm history
processing", exception);
            }
        });
    }



    /**
     * Checks for a metric alarm in AWS CloudWatch.
     *
     * @param fileName the name of the file containing the JSON configuration for
the custom metric
     * @return a {@link CompletableFuture} that completes when the check for the
metric alarm is complete
     */
    public CompletableFuture<Void> checkForMetricAlarmAsync(String fileName) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
```

```
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                DescribeAlarmsForMetricRequest metricRequest =
DescribeAlarmsForMetricRequest.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return checkForAlarmAsync(metricRequest, customMetricName, 10);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error checking metric alarm",
exception);
            }
        });
    }

    // Recursive method to check for the alarm.

    /**
     * Checks for the existence of an alarm asynchronously for the specified metric.
```

```
    *
    * @param metricRequest    the request to describe the alarms for the specified
metric
    * @param customMetricName the name of the custom metric to check for an alarm
    * @param retries          the number of retries to perform if no alarm is found
    * @return a {@link CompletableFuture} that completes when an alarm is found or
the maximum number of retries has been reached
    */
   private static CompletableFuture<Void>
checkForAlarmAsync(DescribeAlarmsForMetricRequest metricRequest, String
customMetricName, int retries) {
       if (retries == 0) {
           return CompletableFuture.completedFuture(null).thenRun(() ->
               logger.info("No Alarm state found for {} after 10 retries.",
customMetricName)
           );
       }

       return
(getAsyncClient().describeAlarmsForMetric(metricRequest).thenCompose(response -> {
           if (response.hasMetricAlarms()) {
               logger.info("Alarm state found for {}", customMetricName);
               return CompletableFuture.completedFuture(null); // Alarm found,
complete the future
           } else {
               return CompletableFuture.runAsync(() -> {
                   try {
                       Thread.sleep(20000);
                       logger.info(".");
                   } catch (InterruptedException e) {
                       throw new RuntimeException("Interrupted while waiting to
retry", e);
                   }
               }).thenCompose(v -> checkForAlarmAsync(metricRequest,
customMetricName, retries - 1)); // Recursive call
           }
       }));
   }


   /**
    * Adds metric data for an alarm asynchronously.
    *
    * @param fileName the name of the JSON file containing the metric data
```

```
    * @return a CompletableFuture that asynchronously returns the
PutMetricDataResponse
    */
   public CompletableFuture<PutMetricDataResponse>
addMetricDataForAlarmAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
               throw new RuntimeException("Failed to read file", e);
           }
       });

       return readFileFuture.thenCompose(jsonContent -> {
           try {
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
               Instant instant = Instant.now();

               // Create MetricDatum objects.
               MetricDatum datum1 = MetricDatum.builder()
                   .metricName(customMetricName)
                   .unit(StandardUnit.NONE)
                   .value(1001.00)
                   .timestamp(instant)
                   .build();

               MetricDatum datum2 = MetricDatum.builder()
                   .metricName(customMetricName)
                   .unit(StandardUnit.NONE)
                   .value(1002.00)
                   .timestamp(instant)
                   .build();
```

```
                List<MetricDatum> metricDataList = new ArrayList<>();
                metricDataList.add(datum1);
                metricDataList.add(datum2);

                // Build the PutMetricData request.
                PutMetricDataRequest request = PutMetricDataRequest.builder()
                    .namespace(customMetricNamespace)
                    .metricData(metricDataList)
                    .build();

                // Send the request asynchronously.
                return getAsyncClient().putMetricData(request);

            } catch (IOException e) {
                CompletableFuture<PutMetricDataResponse> failedFuture = new
CompletableFuture<>();
                failedFuture.completeExceptionally(new RuntimeException("Failed to
parse JSON content", e));
                return failedFuture;
            }
        }).whenComplete((response, exception) -> {
            if (exception != null) {
                logger.error("Failed to put metric data: " + exception.getMessage(),
exception);
            } else {
                logger.info("Added metric values for metric.");
            }
        });
    }


    /**
     * Retrieves custom metric data from the AWS CloudWatch service.
     *
     * @param fileName the name of the file containing the custom metric information
     * @return a {@link CompletableFuture} that completes when the metric data has
been retrieved
     */
    public CompletableFuture<Void> getCustomMetricDataAsync(String fileName) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                // Read values from the JSON file.
```

```
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                // Parse the JSON string to extract relevant values.
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                // Set the current time and date range for metric query.
                Instant nowDate = Instant.now();
                long hours = 1;
                long minutes = 30;
                Instant endTime = nowDate.plus(hours,
ChronoUnit.HOURS).plus(minutes, ChronoUnit.MINUTES);

                Metric met = Metric.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                MetricStat metStat = MetricStat.builder()
                    .stat("Maximum")
                    .period(60)  // Assuming period in seconds
                    .metric(met)
                    .build();

                MetricDataQuery dataQuery = MetricDataQuery.builder()
                    .metricStat(metStat)
                    .id("foo2")
                    .returnData(true)
                    .build();
```

```
                List<MetricDataQuery> dq = new ArrayList<>();
                dq.add(dataQuery);

                GetMetricDataRequest getMetricDataRequest =
GetMetricDataRequest.builder()
                    .maxDatapoints(10)
                    .scanBy(ScanBy.TIMESTAMP_DESCENDING)
                    .startTime(nowDate)
                    .endTime(endTime)
                    .metricDataQueries(dq)
                    .build();

                // Call the async method for CloudWatch data retrieval.
                return getAsyncClient().getMetricData(getMetricDataRequest);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).thenAccept(response -> {
            List<MetricDataResult> data = response.metricDataResults();
            for (MetricDataResult item : data) {
                logger.info("The label is: {}", item.label());
                logger.info("The status code is: {}", item.statusCode().toString());
            }
        }).exceptionally(exception -> {
            throw new RuntimeException("Failed to get metric data", exception);
        });
    }


    /**
     * Describes the CloudWatch alarms of the 'METRIC_ALARM' type.
     *
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     * of describing the CloudWatch alarms. The future completes when the
     * operation is finished, either successfully or with an error.
     */
    public CompletableFuture<Void> describeAlarmsAsync() {
        List<AlarmType> typeList = new ArrayList<>();
        typeList.add(AlarmType.METRIC_ALARM);
        DescribeAlarmsRequest alarmsRequest = DescribeAlarmsRequest.builder()
            .alarmTypes(typeList)
```

```
            .maxRecords(10)
            .build();

        return getAsyncClient().describeAlarms(alarmsRequest)
            .thenAccept(response -> {
                List<MetricAlarm> alarmList = response.metricAlarms();
                for (MetricAlarm alarm : alarmList) {
                    logger.info("Alarm name: {}", alarm.alarmName());
                    logger.info("Alarm description: {} ", alarm.alarmDescription());
                }
            })
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to describe alarms: {}", ex.getMessage());
                } else {
                    logger.info("Successfully described alarms.");
                }
            });
    }

    /**
     * Creates an alarm based on the configuration provided in a JSON file.
     *
     * @param fileName the name of the JSON file containing the alarm configuration
     * @return a CompletableFuture that represents the asynchronous operation of
creating the alarm
     * @throws RuntimeException if an exception occurs while reading the JSON file
or creating the alarm
     */
    public CompletableFuture<String> createAlarmAsync(String fileName) {
        com.fasterxml.jackson.databind.JsonNode rootNode;
        try {
            JsonParser parser = new JsonFactory().createParser(new File(fileName));
            rootNode = new ObjectMapper().readTree(parser);
        } catch (IOException e) {
            throw new RuntimeException("Failed to read the alarm configuration
file", e);
        }

        // Extract values from the JSON node.
        String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
        String customMetricName = rootNode.findValue("customMetricName").asText();
        String alarmName = rootNode.findValue("exampleAlarmName").asText();
```

```
        String emailTopic = rootNode.findValue("emailTopic").asText();
        String accountId = rootNode.findValue("accountId").asText();
        String region = rootNode.findValue("region").asText();

        // Create a List for alarm actions.
        List<String> alarmActions = new ArrayList<>();
        alarmActions.add("arn:aws:sns:" + region + ":" + accountId + ":" +
emailTopic);

        PutMetricAlarmRequest alarmRequest = PutMetricAlarmRequest.builder()
            .alarmActions(alarmActions)
            .alarmDescription("Example metric alarm")
            .alarmName(alarmName)

.comparisonOperator(ComparisonOperator.GREATER_THAN_OR_EQUAL_TO_THRESHOLD)
            .threshold(100.00)
            .metricName(customMetricName)
            .namespace(customMetricNamespace)
            .evaluationPeriods(1)
            .period(10)
            .statistic("Maximum")
            .datapointsToAlarm(1)
            .treatMissingData("ignore")
            .build();

        // Call the putMetricAlarm asynchronously and handle the result.
        return getAsyncClient().putMetricAlarm(alarmRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create alarm: {}", ex.getMessage());
                    throw new RuntimeException("Failed to create alarm", ex);
                } else {
                    logger.info("{} was successfully created!", alarmName);
                    return alarmName;
                }
            });
    }

    /**
     * Adds a metric to a dashboard asynchronously.
     *
     * @param fileName      the name of the file containing the dashboard content
     * @param dashboardName the name of the dashboard to be updated
```

```
    * @return a {@link CompletableFuture} representing the asynchronous operation,
which will complete with a
    * {@link PutDashboardResponse} when the dashboard is successfully updated
    */
   public CompletableFuture<PutDashboardResponse> addMetricToDashboardAsync(String
fileName, String dashboardName) {
       String dashboardBody;
       try {
           dashboardBody = readFileAsString(fileName);
       } catch (IOException e) {
           throw new RuntimeException("Failed to read the dashboard file", e);
       }

       PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
           .dashboardName(dashboardName)
           .dashboardBody(dashboardBody)
           .build();

       return getAsyncClient().putDashboard(dashboardRequest)
           .handle((response, ex) -> {
               if (ex != null) {
                   logger.info("Failed to update dashboard: {}", ex.getMessage());
                   throw new RuntimeException("Error updating dashboard", ex);
               } else {
                   logger.info("{} was successfully updated.", dashboardName);
                   return response;
               }
           });
   }

   /**
    * Creates a new custom metric.
    *
    * @param dataPoint the data point to be added to the custom metric
    * @return a {@link CompletableFuture} representing the asynchronous operation
of adding the custom metric
    */
   public CompletableFuture<PutMetricDataResponse>
createNewCustomMetricAsync(Double dataPoint) {
       Dimension dimension = Dimension.builder()
           .name("UNIQUE_PAGES")
           .value("URLS")
           .build();
```

```
        // Set an Instant object for the current time in UTC.
        String time =
ZonedDateTime.now(ZoneOffset.UTC).format(DateTimeFormatter.ISO_INSTANT);
        Instant instant = Instant.parse(time);

        // Create the MetricDatum.
        MetricDatum datum = MetricDatum.builder()
            .metricName("PAGES_VISITED")
            .unit(StandardUnit.NONE)
            .value(dataPoint)
            .timestamp(instant)
            .dimensions(dimension)
            .build();

        PutMetricDataRequest request = PutMetricDataRequest.builder()
            .namespace("SITE/TRAFFIC")
            .metricData(datum)
            .build();

        return getAsyncClient().putMetricData(request)
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    throw new RuntimeException("Error adding custom metric", ex);
                } else {
                    logger.info("Successfully added metric values for
PAGES_VISITED.");
                }
            });
    }

    /**
     * Lists the available dashboards.
     *
     * @return a {@link CompletableFuture} that completes when the operation is
finished.
     * The future will complete exceptionally if an error occurs while listing the
dashboards.
     */
    public CompletableFuture<Void> listDashboardsAsync() {
        ListDashboardsRequest listDashboardsRequest =
ListDashboardsRequest.builder().build();
        ListDashboardsPublisher paginator =
getAsyncClient().listDashboardsPaginator(listDashboardsRequest);
        return paginator.subscribe(response -> {
```

```
            response.dashboardEntries().forEach(entry -> {
                logger.info("Dashboard name is: {} ", entry.dashboardName());
                logger.info("Dashboard ARN is: {} ", entry.dashboardArn());
            });
        }).exceptionally(ex -> {
            logger.info("Failed to list dashboards: {} ", ex.getMessage());
            throw new RuntimeException("Error occurred while listing dashboards",
ex);
        });
    }


    /**
     * Creates a new dashboard with the specified name and metrics from the given
file.
     *
     * @param dashboardName the name of the dashboard to be created
     * @param fileName      the name of the file containing the dashboard body
     * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the dashboard
     * @throws IOException if there is an error reading the dashboard body from the
file
     */
    public CompletableFuture<PutDashboardResponse>
createDashboardWithMetricsAsync(String dashboardName, String fileName) throws
IOException {
        String dashboardBody = readFileAsString(fileName);
        PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
            .dashboardName(dashboardName)
            .dashboardBody(dashboardBody)
            .build();

        return getAsyncClient().putDashboard(dashboardRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create dashboard: {}", ex.getMessage());
                    throw new RuntimeException("Dashboard creation failed", ex);
                } else {
                    // Handle the normal response case
                    logger.info("{} was successfully created.", dashboardName);
                    List<DashboardValidationMessage> messages =
response.dashboardValidationMessages();
                    if (messages.isEmpty()) {
                        logger.info("There are no messages in the new Dashboard.");
```

```
                    } else {
                        for (DashboardValidationMessage message : messages) {
                            logger.info("Message: {}", message.message());
                        }
                    }
                    return response; // Return the response for further use
                }
            });
    }


    /**
     * Retrieves the metric statistics for the "EstimatedCharges" metric in the
"AWS/Billing" namespace.
     *
     * @param costDateWeek the start date for the metric statistics, in the format
of an ISO-8601 date string (e.g., "2023-04-05")
     * @return a {@link CompletableFuture} that, when completed, contains the {@link
GetMetricStatisticsResponse} with the retrieved metric statistics
     * @throws RuntimeException if the metric statistics cannot be retrieved
successfully
     */
    public CompletableFuture<GetMetricStatisticsResponse>
getMetricStatisticsAsync(String costDateWeek) {
        Instant start = Instant.parse(costDateWeek);
        Instant endDate = Instant.now();

        // Define dimension
        Dimension dimension = Dimension.builder()
            .name("Currency")
            .value("USD")
            .build();

        List<Dimension> dimensionList = new ArrayList<>();
        dimensionList.add(dimension);

        GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
            .metricName("EstimatedCharges")
            .namespace("AWS/Billing")
            .dimensions(dimensionList)
            .statistics(Statistic.MAXIMUM)
            .startTime(start)
            .endTime(endDate)
```

```
            .period(86400) // One day period
            .build();

        return getAsyncClient().getMetricStatistics(statisticsRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    List<Datapoint> data = response.datapoints();
                    if (!data.isEmpty()) {
                        for (Datapoint datapoint : data) {
                            logger.info("Timestamp: {} Maximum value: {})",
datapoint.timestamp(), datapoint.maximum());
                        }
                    } else {
                        logger.info("The returned data list is empty");
                    }
                } else {
                    throw new RuntimeException("Failed to get metric statistics: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Retrieves and displays metric statistics for the specified parameters.
     *
     * @param nameSpace    the namespace for the metric
     * @param metVal       the name of the metric
     * @param metricOption the statistic to retrieve for the metric (e.g.,
"Maximum", "Average")
     * @param date         the date for which to retrieve the metric statistics, in
the format "yyyy-MM-dd'T'HH:mm:ss'Z'"
     * @param myDimension  the dimension(s) to filter the metric statistics by
     * @return a {@link CompletableFuture} that completes when the metric statistics
have been retrieved and displayed
     */
    public CompletableFuture<GetMetricStatisticsResponse>
getAndDisplayMetricStatisticsAsync(String nameSpace, String metVal,

         String metricOption, String date, Dimension myDimension) {

        Instant start = Instant.parse(date);
        Instant endDate = Instant.now();
```

```
        // Building the request for metric statistics.
        GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
            .endTime(endDate)
            .startTime(start)
            .dimensions(myDimension)
            .metricName(metVal)
            .namespace(nameSpace)
            .period(86400) // 1 day period
            .statistics(Statistic.fromValue(metricOption))
            .build();

        return getAsyncClient().getMetricStatistics(statisticsRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    List<Datapoint> data = response.datapoints();
                    if (!data.isEmpty()) {
                        for (Datapoint datapoint : data) {
                            logger.info("Timestamp: {} Maximum value: {}",
datapoint.timestamp(), datapoint.maximum());
                        }
                    } else {
                        logger.info("The returned data list is empty");
                    }
                } else {
                    logger.info("Failed to get metric statistics: {} ",
exception.getMessage());
                }
            })
            .exceptionally(exception -> {
                throw new RuntimeException("Error while getting metric statistics: "
+ exception.getMessage(), exception);
            });
    }


    /**
     * Retrieves a list of metric names for the specified namespace.
     *
     * @param namespace the namespace for which to retrieve the metric names
     * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of
     * the metric names in the specified namespace
     * @throws RuntimeException if an error occurs while listing the metrics
```

```
     */
    public CompletableFuture<ArrayList<String>> listMetsAsync(String namespace) {
        ListMetricsRequest request = ListMetricsRequest.builder()
            .namespace(namespace)
            .build();

        ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
        Set<String> metSet = new HashSet<>();
        CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
            response.metrics().forEach(metric -> {
                String metricName = metric.metricName();
                metSet.add(metricName);
            });
        });

        return future
            .thenApply(ignored -> new ArrayList<>(metSet))
            .exceptionally(exception -> {
                throw new RuntimeException("Failed to list metrics: " +
exception.getMessage(), exception);
            });
    }

    /**
     * Lists the available namespaces for the current AWS account.
     *
     * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of the available namespace names.
     * @throws RuntimeException if an error occurs while listing the namespaces.
     */
    public CompletableFuture<ArrayList<String>> listNameSpacesAsync() {
        ArrayList<String> nameSpaceList = new ArrayList<>();
        ListMetricsRequest request = ListMetricsRequest.builder().build();

        ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
        CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
            response.metrics().forEach(metric -> {
                String namespace = metric.namespace();
                if (!nameSpaceList.contains(namespace)) {
                    nameSpaceList.add(namespace);
                }
            });
```

```
        });

        return future
            .thenApply(ignored -> nameSpaceList)
            .exceptionally(exception -> {
                throw new RuntimeException("Failed to list namespaces: " +
exception.getMessage(), exception);
            });
    }
    /**
     * Retrieves the specific metric asynchronously.
     *
     * @param namespace the namespace of the metric to retrieve
     * @return a CompletableFuture that completes with the first dimension of the
first metric found in the specified namespace,
     * or throws a RuntimeException if an error occurs or no metrics or dimensions
are found
     */
    public CompletableFuture<Dimension> getSpecificMetAsync(String namespace) {
        ListMetricsRequest request = ListMetricsRequest.builder()
            .namespace(namespace)
            .build();

        return getAsyncClient().listMetrics(request).handle((response, exception) ->
{
            if (exception != null) {
                logger.info("Error occurred while listing metrics: {} ",
exception.getMessage());
                throw new RuntimeException("Failed to retrieve specific metric
dimension", exception);
            } else {
                List<Metric> myList = response.metrics();
                if (!myList.isEmpty()) {
                    Metric metric = myList.get(0);
                    if (!metric.dimensions().isEmpty()) {
                        return metric.dimensions().get(0); // Return the first
dimension
                    }
                }
                throw new RuntimeException("No metrics or dimensions found");
            }
        });
    }
```

```
    public static String readFileAsString(String file) throws IOException {
        return new String(Files.readAllBytes(Paths.get(file)));
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteAlarms
  - DeleteAnomalyDetector
  - DeleteDashboards
  - DescribeAlarmHistory
  - DescribeAlarms
  - DescribeAlarmsForMetric
  - DescribeAnomalyDetectors
  - GetMetricData
  - GetMetricStatistics
  - GetMetricWidgetImage
  - ListMetrics
  - PutAnomalyDetector
  - PutDashboard
  - PutMetricAlarm
  - PutMetricData

## Tindakan

### `DeleteAlarms`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAlarms`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a CloudWatch alarm.
     *
     * @param alarmName the name of the alarm to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
to delete the alarm
     * the {@link DeleteAlarmsResponse} is returned when the operation completes
successfully,
     * or a {@link RuntimeException} is thrown if the operation fails
     */
    public CompletableFuture<DeleteAlarmsResponse> deleteCWAlarmAsync(String
alarmName) {
        DeleteAlarmsRequest request = DeleteAlarmsRequest.builder()
            .alarmNames(alarmName)
            .build();

        return getAsyncClient().deleteAlarms(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the alarm:{} " +
alarmName, exception);
                } else {
                    logger.info("Successfully deleted alarm {} ", alarmName);
                }
            });
    }
```

- Untuk detail API, lihat DeleteAlarmsdi Referensi AWS SDK for Java 2.x API.

### `DeleteAnomalyDetector`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAnomalyDetector`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes an Anomaly Detector.
    *
    * @param fileName the name of the file containing the Anomaly Detector
configuration
    * @return a CompletableFuture that represents the asynchronous deletion of the
Anomaly Detector
    */
   public CompletableFuture<DeleteAnomalyDetectorResponse>
deleteAnomalyDetectorAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser); // Return the root node
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
           String customMetricName =
rootNode.findValue("customMetricName").asText();

           SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
               .metricName(customMetricName)
               .namespace(customMetricNamespace)
               .stat("Maximum")
               .build();

           DeleteAnomalyDetectorRequest request =
DeleteAnomalyDetectorRequest.builder()
               .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
               .build();

           return getAsyncClient().deleteAnomalyDetector(request);
       }).whenComplete((result, exception) -> {
           if (exception != null) {
```

```
                throw new RuntimeException("Failed to delete the Anomaly Detector",
exception);
            } else {
                logger.info("Successfully deleted the Anomaly Detector.");
            }
        });
    }
```

- Untuk detail API, lihat DeleteAnomalyDetectordi Referensi AWS SDK for Java 2.x API.

### `DeleteDashboards`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDashboards`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes the specified dashboard.
     *
     * @param dashboardName the name of the dashboard to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the dashboard
     * @throws RuntimeException if the dashboard deletion fails
     */
    public CompletableFuture<DeleteDashboardsResponse> deleteDashboardAsync(String
dashboardName) {
        DeleteDashboardsRequest dashboardsRequest =
DeleteDashboardsRequest.builder()
            .dashboardNames(dashboardName)
            .build();

        return getAsyncClient().deleteDashboards(dashboardsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
```

```
                    throw new RuntimeException("Failed to delete the dashboard: " +
dashboardName, exception);
                } else {
                    logger.info("{} was successfully deleted.", dashboardName);
                }
            });
    }
```

- Untuk detail API, lihat DeleteDashboardsdi Referensi AWS SDK for Java 2.x API.

### `DescribeAlarmHistory`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAlarmHistory`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the alarm history for a given alarm name and date range.
     *
     * @param fileName the path to the JSON file containing the alarm name
     * @param date     the date to start the alarm history search (in the format
"yyyy-MM-dd'T'HH:mm:ss'Z'")
     * @return a {@code CompletableFuture<Void>} that completes when the alarm
history has been retrieved and processed
     */
    public CompletableFuture<Void> getAlarmHistoryAsync(String fileName, String
date) {
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
```

```
                return rootNode.findValue("exampleAlarmName").asText(); // Return
alarmName from the JSON file
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });

        // Use the alarm name to describe alarm history with a paginator.
        return readFileFuture.thenCompose(alarmName -> {
            try {
                Instant start = Instant.parse(date);
                Instant endDate = Instant.now();
                DescribeAlarmHistoryRequest historyRequest =
DescribeAlarmHistoryRequest.builder()
                    .startDate(start)
                    .endDate(endDate)
                    .alarmName(alarmName)
                    .historyItemType(HistoryItemType.ACTION)
                    .build();

                // Use the paginator to paginate through alarm history pages.
                DescribeAlarmHistoryPublisher historyPublisher =
getAsyncClient().describeAlarmHistoryPaginator(historyRequest);
                CompletableFuture<Void> future = historyPublisher
                    .subscribe(response -> response.alarmHistoryItems().forEach(item
-> {
                        logger.info("History summary: {}", item.historySummary());
                        logger.info("Timestamp: {}", item.timestamp());
                    }))
                    .whenComplete((result, exception) -> {
                        if (exception != null) {
                            logger.error("Error occurred while getting alarm
history: " + exception.getMessage(), exception);
                        } else {
                            logger.info("Successfully retrieved all alarm
history.");
                        }
                    });

                // Return the future to the calling code for further handling
                return future;
            } catch (Exception e) {
                throw new RuntimeException("Failed to process alarm history", e);
            }
```

```
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error completing alarm history
processing", exception);
            }
        });
    }
```

- Untuk detail API, lihat DescribeAlarmHistorydi Referensi AWS SDK for Java 2.x API.

### `DescribeAlarms`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAlarms`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Describes the CloudWatch alarms of the 'METRIC_ALARM' type.
     *
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     * of describing the CloudWatch alarms. The future completes when the
     * operation is finished, either successfully or with an error.
     */
    public CompletableFuture<Void> describeAlarmsAsync() {
        List<AlarmType> typeList = new ArrayList<>();
        typeList.add(AlarmType.METRIC_ALARM);
        DescribeAlarmsRequest alarmsRequest = DescribeAlarmsRequest.builder()
            .alarmTypes(typeList)
            .maxRecords(10)
            .build();

        return getAsyncClient().describeAlarms(alarmsRequest)
```

```
            .thenAccept(response -> {
                List<MetricAlarm> alarmList = response.metricAlarms();
                for (MetricAlarm alarm : alarmList) {
                    logger.info("Alarm name: {}", alarm.alarmName());
                    logger.info("Alarm description: {} ", alarm.alarmDescription());
                }
            })
            .whenComplete((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to describe alarms: {}", ex.getMessage());
                } else {
                    logger.info("Successfully described alarms.");
                }
            });
    }
```

- Untuk detail API, lihat DescribeAlarmsdi Referensi AWS SDK for Java 2.x API.

### `DescribeAlarmsForMetric`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAlarmsForMetric`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Checks for a metric alarm in AWS CloudWatch.
     *
     * @param fileName the name of the file containing the JSON configuration for
the custom metric
     * @return a {@link CompletableFuture} that completes when the check for the
metric alarm is complete
     */
    public CompletableFuture<Void> checkForMetricAlarmAsync(String fileName) {
```

```
        CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
                return rootNode.toString(); // Return JSON as a string for further
processing
            } catch (IOException e) {
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                DescribeAlarmsForMetricRequest metricRequest =
DescribeAlarmsForMetricRequest.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return checkForAlarmAsync(metricRequest, customMetricName, 10);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error checking metric alarm",
exception);
            }
        });
    }

    // Recursive method to check for the alarm.
```

```
   /**
    * Checks for the existence of an alarm asynchronously for the specified metric.
    *
    * @param metricRequest    the request to describe the alarms for the specified
metric
    * @param customMetricName the name of the custom metric to check for an alarm
    * @param retries          the number of retries to perform if no alarm is found
    * @return a {@link CompletableFuture} that completes when an alarm is found or
the maximum number of retries has been reached
    */
   private static CompletableFuture<Void>
checkForAlarmAsync(DescribeAlarmsForMetricRequest metricRequest, String
customMetricName, int retries) {
       if (retries == 0) {
           return CompletableFuture.completedFuture(null).thenRun(() ->
               logger.info("No Alarm state found for {} after 10 retries.",
customMetricName)
           );
       }

       return
(getAsyncClient().describeAlarmsForMetric(metricRequest).thenCompose(response -> {
           if (response.hasMetricAlarms()) {
               logger.info("Alarm state found for {}", customMetricName);
               return CompletableFuture.completedFuture(null); // Alarm found,
complete the future
           } else {
               return CompletableFuture.runAsync(() -> {
                   try {
                       Thread.sleep(20000);
                       logger.info(".");
                   } catch (InterruptedException e) {
                       throw new RuntimeException("Interrupted while waiting to
retry", e);
                   }
               }).thenCompose(v -> checkForAlarmAsync(metricRequest,
customMetricName, retries - 1)); // Recursive call
           }
       }));
   }
```

- Untuk detail API, lihat DescribeAlarmsForMetricdi Referensi AWS SDK for Java 2.x API.

### `DescribeAnomalyDetectors`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAnomalyDetectors`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Describes the anomaly detectors based on the specified JSON file.
    *
    * @param fileName the name of the JSON file containing the custom metric
namespace and name
    * @return a {@link CompletableFuture} that completes when the anomaly detectors
have been described
    * @throws RuntimeException if there is a failure during the operation, such as
when reading or parsing the JSON file,
    *                          or when describing the anomaly detectors
    */
   public CompletableFuture<Void> describeAnomalyDetectorsAsync(String fileName) {
       CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               return new ObjectMapper().readTree(parser);
           } catch (IOException e) {
               throw new RuntimeException("Failed to read or parse the file", e);
           }
       });

       return readFileFuture.thenCompose(rootNode -> {
           try {
               String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
               String customMetricName =
rootNode.findValue("customMetricName").asText();
```

```
                DescribeAnomalyDetectorsRequest detectorsRequest =
DescribeAnomalyDetectorsRequest.builder()
                    .maxResults(10)
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                return
getAsyncClient().describeAnomalyDetectors(detectorsRequest).thenAccept(response ->
{
                    List<AnomalyDetector> anomalyDetectorList =
response.anomalyDetectors();
                    for (AnomalyDetector detector : anomalyDetectorList) {
                        logger.info("Metric name: {} ",
detector.singleMetricAnomalyDetector().metricName());
                        logger.info("State: {} ", detector.stateValue());
                    }
                });
            } catch (RuntimeException e) {
                throw new RuntimeException("Failed to describe anomaly detectors",
e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error describing anomaly detectors",
exception);
            }
        });
    }
```

- Untuk detail API, lihat DescribeAnomalyDetectorsdi Referensi AWS SDK for Java 2.x API.

### `DisableAlarmActions`

Contoh kode berikut menunjukkan cara menggunakan`DisableAlarmActions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.DisableAlarmActionsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DisableAlarmActions {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <alarmName>

                Where:
                  alarmName - An alarm name to disable (for example, MyAlarm).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alarmName = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();
```

```
        disableActions(cw, alarmName);
        cw.close();
    }

    public static void disableActions(CloudWatchClient cw, String alarmName) {
        try {
            DisableAlarmActionsRequest request =
 DisableAlarmActionsRequest.builder()
                    .alarmNames(alarmName)
                    .build();

            cw.disableAlarmActions(request);
            System.out.printf("Successfully disabled actions on alarm %s",
 alarmName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DisableAlarmActionsdi Referensi AWS SDK for Java 2.x API.

### `EnableAlarmActions`

Contoh kode berikut menunjukkan cara menggunakan`EnableAlarmActions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.CloudWatchClient;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatch.model.EnableAlarmActionsRequest;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnableAlarmActions {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <alarmName>

                Where:
                  alarmName - An alarm name to enable (for example, MyAlarm).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alarm = args[0];
        Region region = Region.US_EAST_1;
        CloudWatchClient cw = CloudWatchClient.builder()
                .region(region)
                .build();

        enableActions(cw, alarm);
        cw.close();
    }

    public static void enableActions(CloudWatchClient cw, String alarm) {
        try {
            EnableAlarmActionsRequest request = EnableAlarmActionsRequest.builder()
                    .alarmNames(alarm)
                    .build();

            cw.enableAlarmActions(request);
            System.out.printf("Successfully enabled actions on alarm %s", alarm);
```

```
        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat EnableAlarmActionsdi Referensi AWS SDK for Java 2.x API.

### `GetMetricData`

Contoh kode berikut menunjukkan cara menggunakan`GetMetricData`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves custom metric data from the AWS CloudWatch service.
    *
    * @param fileName the name of the file containing the custom metric information
    * @return a {@link CompletableFuture} that completes when the metric data has
been retrieved
    */
   public CompletableFuture<Void> getCustomMetricDataAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               // Read values from the JSON file.
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
```

```
                throw new RuntimeException("Failed to read file", e);
            }
        });

        return readFileFuture.thenCompose(jsonContent -> {
            try {
                // Parse the JSON string to extract relevant values.
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                // Set the current time and date range for metric query.
                Instant nowDate = Instant.now();
                long hours = 1;
                long minutes = 30;
                Instant endTime = nowDate.plus(hours,
ChronoUnit.HOURS).plus(minutes, ChronoUnit.MINUTES);

                Metric met = Metric.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .build();

                MetricStat metStat = MetricStat.builder()
                    .stat("Maximum")
                    .period(60)  // Assuming period in seconds
                    .metric(met)
                    .build();

                MetricDataQuery dataQuery = MetricDataQuery.builder()
                    .metricStat(metStat)
                    .id("foo2")
                    .returnData(true)
                    .build();

                List<MetricDataQuery> dq = new ArrayList<>();
                dq.add(dataQuery);

                GetMetricDataRequest getMetricDataRequest =
GetMetricDataRequest.builder()
                    .maxDatapoints(10)
```

```
                    .scanBy(ScanBy.TIMESTAMP_DESCENDING)
                    .startTime(nowDate)
                    .endTime(endTime)
                    .metricDataQueries(dq)
                    .build();

                // Call the async method for CloudWatch data retrieval.
                return getAsyncClient().getMetricData(getMetricDataRequest);

            } catch (IOException e) {
                throw new RuntimeException("Failed to parse JSON content", e);
            }
        }).thenAccept(response -> {
            List<MetricDataResult> data = response.metricDataResults();
            for (MetricDataResult item : data) {
                logger.info("The label is: {}", item.label());
                logger.info("The status code is: {}", item.statusCode().toString());
            }
        }).exceptionally(exception -> {
            throw new RuntimeException("Failed to get metric data", exception);
        });
    }
```

- Untuk detail API, lihat GetMetricDatadi Referensi AWS SDK for Java 2.x API.

### `GetMetricStatistics`

Contoh kode berikut menunjukkan cara menggunakan`GetMetricStatistics`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves and displays metric statistics for the specified parameters.
     *
     * @param nameSpace    the namespace for the metric
```

```
    * @param metVal       the name of the metric
    * @param metricOption the statistic to retrieve for the metric (e.g.,
"Maximum", "Average")
    * @param date         the date for which to retrieve the metric statistics, in
the format "yyyy-MM-dd'T'HH:mm:ss'Z'"
    * @param myDimension  the dimension(s) to filter the metric statistics by
    * @return a {@link CompletableFuture} that completes when the metric statistics
have been retrieved and displayed
    */
   public CompletableFuture<GetMetricStatisticsResponse>
getAndDisplayMetricStatisticsAsync(String nameSpace, String metVal,

        String metricOption, String date, Dimension myDimension) {

       Instant start = Instant.parse(date);
       Instant endDate = Instant.now();

       // Building the request for metric statistics.
       GetMetricStatisticsRequest statisticsRequest =
GetMetricStatisticsRequest.builder()
           .endTime(endDate)
           .startTime(start)
           .dimensions(myDimension)
           .metricName(metVal)
           .namespace(nameSpace)
           .period(86400) // 1 day period
           .statistics(Statistic.fromValue(metricOption))
           .build();

       return getAsyncClient().getMetricStatistics(statisticsRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   List<Datapoint> data = response.datapoints();
                   if (!data.isEmpty()) {
                       for (Datapoint datapoint : data) {
                           logger.info("Timestamp: {} Maximum value: {}",
datapoint.timestamp(), datapoint.maximum());
                       }
                   } else {
                       logger.info("The returned data list is empty");
                   }
               } else {
                   logger.info("Failed to get metric statistics: {} ",
exception.getMessage());
```

```
                }
            })
            .exceptionally(exception -> {
                throw new RuntimeException("Error while getting metric statistics: "
+ exception.getMessage(), exception);
            });
    }
```

- Untuk detail API, lihat GetMetricStatisticsdi Referensi AWS SDK for Java 2.x API.

### `GetMetricWidgetImage`

Contoh kode berikut menunjukkan cara menggunakan`GetMetricWidgetImage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves and saves a custom metric image to a file.
     *
     * @param fileName the name of the file to save the metric image to
     * @return a {@link CompletableFuture} that completes when the image has been
saved to the file
     */
    public CompletableFuture<Void> downloadAndSaveMetricImageAsync(String fileName)
{
        logger.info("Getting Image data for custom metric.");
        String myJSON = """
              {
                  "title": "Example Metric Graph",
                  "view": "timeSeries",
                  "stacked ": false,
                  "period": 10,
                  "width": 1400,
```

```
                "height": 600,
                "metrics": [
                    [
                    "AWS/Billing",
                    "EstimatedCharges",
                    "Currency",
                    "USD"
                   ]
                ]
              }
            """;

       GetMetricWidgetImageRequest imageRequest =
GetMetricWidgetImageRequest.builder()
           .metricWidget(myJSON)
           .build();

       return getAsyncClient().getMetricWidgetImage(imageRequest)
           .thenCompose(response -> {
               SdkBytes sdkBytes = response.metricWidgetImage();
               byte[] bytes = sdkBytes.asByteArray();
               return CompletableFuture.runAsync(() -> {
                   try {
                       File outputFile = new File(fileName);
                       try (FileOutputStream outputStream = new
FileOutputStream(outputFile)) {
                           outputStream.write(bytes);
                       }
                   } catch (IOException e) {
                       throw new RuntimeException("Failed to write image to file",
e);
                   }
               });
           })
           .whenComplete((result, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Error getting and saving metric
image", exception);
               } else {
                   logger.info("Image data saved successfully to {}", fileName);
               }
           });
   }
```

- Untuk detail API, lihat GetMetricWidgetImagedi Referensi AWS SDK for Java 2.x API.

### `ListDashboards`

Contoh kode berikut menunjukkan cara menggunakan`ListDashboards`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Lists the available dashboards.
    *
    * @return a {@link CompletableFuture} that completes when the operation is
finished.
    * The future will complete exceptionally if an error occurs while listing the
dashboards.
    */
   public CompletableFuture<Void> listDashboardsAsync() {
       ListDashboardsRequest listDashboardsRequest =
ListDashboardsRequest.builder().build();
       ListDashboardsPublisher paginator =
getAsyncClient().listDashboardsPaginator(listDashboardsRequest);
       return paginator.subscribe(response -> {
           response.dashboardEntries().forEach(entry -> {
               logger.info("Dashboard name is: {} ", entry.dashboardName());
               logger.info("Dashboard ARN is: {} ", entry.dashboardArn());
           });
       }).exceptionally(ex -> {
           logger.info("Failed to list dashboards: {} ", ex.getMessage());
           throw new RuntimeException("Error occurred while listing dashboards",
ex);
       });
   }
```

- Untuk detail API, lihat ListDashboardsdi Referensi AWS SDK for Java 2.x API.

### `ListMetrics`

Contoh kode berikut menunjukkan cara menggunakan`ListMetrics`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves a list of metric names for the specified namespace.
     *
     * @param namespace the namespace for which to retrieve the metric names
     * @return a {@link CompletableFuture} that, when completed, contains an {@link
ArrayList} of
     * the metric names in the specified namespace
     * @throws RuntimeException if an error occurs while listing the metrics
     */
    public CompletableFuture<ArrayList<String>> listMetsAsync(String namespace) {
        ListMetricsRequest request = ListMetricsRequest.builder()
            .namespace(namespace)
            .build();

        ListMetricsPublisher metricsPaginator =
getAsyncClient().listMetricsPaginator(request);
        Set<String> metSet = new HashSet<>();
        CompletableFuture<Void> future = metricsPaginator.subscribe(response -> {
            response.metrics().forEach(metric -> {
                String metricName = metric.metricName();
                metSet.add(metricName);
            });
        });

        return future
            .thenApply(ignored -> new ArrayList<>(metSet))
            .exceptionally(exception -> {
```

```
                throw new RuntimeException("Failed to list metrics: " +
exception.getMessage(), exception);
            });
    }
```

- Untuk detail API, lihat ListMetricsdi Referensi AWS SDK for Java 2.x API.

### `PutAnomalyDetector`

Contoh kode berikut menunjukkan cara menggunakan`PutAnomalyDetector`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Adds an anomaly detector for the given file.
     *
     * @param fileName the name of the file containing the anomaly detector
configuration
     * @return a {@link CompletableFuture} that completes when the anomaly detector
has been added
     */
    public CompletableFuture<Void> addAnomalyDetectorAsync(String fileName) {
        CompletableFuture<JsonNode> readFileFuture =
CompletableFuture.supplyAsync(() -> {
            try {
                JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                return new ObjectMapper().readTree(parser); // Return the root node
            } catch (IOException e) {
                throw new RuntimeException("Failed to read or parse the file", e);
            }
        });
```

```
        return readFileFuture.thenCompose(rootNode -> {
            try {
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();

                SingleMetricAnomalyDetector singleMetricAnomalyDetector =
SingleMetricAnomalyDetector.builder()
                    .metricName(customMetricName)
                    .namespace(customMetricNamespace)
                    .stat("Maximum")
                    .build();

                PutAnomalyDetectorRequest anomalyDetectorRequest =
PutAnomalyDetectorRequest.builder()
                    .singleMetricAnomalyDetector(singleMetricAnomalyDetector)
                    .build();

                return
getAsyncClient().putAnomalyDetector(anomalyDetectorRequest).thenAccept(response ->
{
                    logger.info("Added anomaly detector for metric {}",
customMetricName);
                });
            } catch (Exception e) {
                throw new RuntimeException("Failed to create anomaly detector", e);
            }
        }).whenComplete((result, exception) -> {
            if (exception != null) {
                throw new RuntimeException("Error adding anomaly detector",
exception);
            }
        });
    }
```

- Untuk detail API, lihat PutAnomalyDetectordi Referensi AWS SDK for Java 2.x API.

### `PutDashboard`

Contoh kode berikut menunjukkan cara menggunakan`PutDashboard`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new dashboard with the specified name and metrics from the given
file.
    *
    * @param dashboardName the name of the dashboard to be created
    * @param fileName      the name of the file containing the dashboard body
    * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the dashboard
    * @throws IOException if there is an error reading the dashboard body from the
file
    */
   public CompletableFuture<PutDashboardResponse>
createDashboardWithMetricsAsync(String dashboardName, String fileName) throws
IOException {
       String dashboardBody = readFileAsString(fileName);
       PutDashboardRequest dashboardRequest = PutDashboardRequest.builder()
           .dashboardName(dashboardName)
           .dashboardBody(dashboardBody)
           .build();

       return getAsyncClient().putDashboard(dashboardRequest)
           .handle((response, ex) -> {
               if (ex != null) {
                   logger.info("Failed to create dashboard: {}", ex.getMessage());
                   throw new RuntimeException("Dashboard creation failed", ex);
               } else {
                   // Handle the normal response case
                   logger.info("{} was successfully created.", dashboardName);
                   List<DashboardValidationMessage> messages =
response.dashboardValidationMessages();
                   if (messages.isEmpty()) {
                       logger.info("There are no messages in the new Dashboard.");
                   } else {
```

```
                    for (DashboardValidationMessage message : messages) {
                        logger.info("Message: {}", message.message());
                    }
                }
                return response; // Return the response for further use
            }
        });
    }
```

- Untuk detail API, lihat PutDashboarddi Referensi AWS SDK for Java 2.x API.

### `PutMetricAlarm`

Contoh kode berikut menunjukkan cara menggunakan`PutMetricAlarm`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an alarm based on the configuration provided in a JSON file.
     *
     * @param fileName the name of the JSON file containing the alarm configuration
     * @return a CompletableFuture that represents the asynchronous operation of
creating the alarm
     * @throws RuntimeException if an exception occurs while reading the JSON file
or creating the alarm
     */
    public CompletableFuture<String> createAlarmAsync(String fileName) {
        com.fasterxml.jackson.databind.JsonNode rootNode;
        try {
            JsonParser parser = new JsonFactory().createParser(new File(fileName));
            rootNode = new ObjectMapper().readTree(parser);
        } catch (IOException e) {
            throw new RuntimeException("Failed to read the alarm configuration
file", e);
        }
```

```
        // Extract values from the JSON node.
        String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
        String customMetricName = rootNode.findValue("customMetricName").asText();
        String alarmName = rootNode.findValue("exampleAlarmName").asText();
        String emailTopic = rootNode.findValue("emailTopic").asText();
        String accountId = rootNode.findValue("accountId").asText();
        String region = rootNode.findValue("region").asText();

        // Create a List for alarm actions.
        List<String> alarmActions = new ArrayList<>();
        alarmActions.add("arn:aws:sns:" + region + ":" + accountId + ":" +
emailTopic);

        PutMetricAlarmRequest alarmRequest = PutMetricAlarmRequest.builder()
            .alarmActions(alarmActions)
            .alarmDescription("Example metric alarm")
            .alarmName(alarmName)

.comparisonOperator(ComparisonOperator.GREATER_THAN_OR_EQUAL_TO_THRESHOLD)
            .threshold(100.00)
            .metricName(customMetricName)
            .namespace(customMetricNamespace)
            .evaluationPeriods(1)
            .period(10)
            .statistic("Maximum")
            .datapointsToAlarm(1)
            .treatMissingData("ignore")
            .build();

        // Call the putMetricAlarm asynchronously and handle the result.
        return getAsyncClient().putMetricAlarm(alarmRequest)
            .handle((response, ex) -> {
                if (ex != null) {
                    logger.info("Failed to create alarm: {}", ex.getMessage());
                    throw new RuntimeException("Failed to create alarm", ex);
                } else {
                    logger.info("{} was successfully created!", alarmName);
                    return alarmName;
                }
            });
    }
```

- Untuk detail API, lihat PutMetricAlarmdi Referensi AWS SDK for Java 2.x API.

### `PutMetricData`

Contoh kode berikut menunjukkan cara menggunakan`PutMetricData`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Adds metric data for an alarm asynchronously.
    *
    * @param fileName the name of the JSON file containing the metric data
    * @return a CompletableFuture that asynchronously returns the
PutMetricDataResponse
    */
   public CompletableFuture<PutMetricDataResponse>
addMetricDataForAlarmAsync(String fileName) {
       CompletableFuture<String> readFileFuture = CompletableFuture.supplyAsync(()
-> {
           try {
               JsonParser parser = new JsonFactory().createParser(new
File(fileName));
               com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
               return rootNode.toString(); // Return JSON as a string for further
processing
           } catch (IOException e) {
               throw new RuntimeException("Failed to read file", e);
           }
       });

       return readFileFuture.thenCompose(jsonContent -> {
           try {
```

```
                com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(jsonContent);
                String customMetricNamespace =
rootNode.findValue("customMetricNamespace").asText();
                String customMetricName =
rootNode.findValue("customMetricName").asText();
                Instant instant = Instant.now();

                // Create MetricDatum objects.
                MetricDatum datum1 = MetricDatum.builder()
                    .metricName(customMetricName)
                    .unit(StandardUnit.NONE)
                    .value(1001.00)
                    .timestamp(instant)
                    .build();

                MetricDatum datum2 = MetricDatum.builder()
                    .metricName(customMetricName)
                    .unit(StandardUnit.NONE)
                    .value(1002.00)
                    .timestamp(instant)
                    .build();

                List<MetricDatum> metricDataList = new ArrayList<>();
                metricDataList.add(datum1);
                metricDataList.add(datum2);

                // Build the PutMetricData request.
                PutMetricDataRequest request = PutMetricDataRequest.builder()
                    .namespace(customMetricNamespace)
                    .metricData(metricDataList)
                    .build();

                // Send the request asynchronously.
                return getAsyncClient().putMetricData(request);

            } catch (IOException e) {
                CompletableFuture<PutMetricDataResponse> failedFuture = new
CompletableFuture<>();
                failedFuture.completeExceptionally(new RuntimeException("Failed to
parse JSON content", e));
                return failedFuture;
            }
        }).whenComplete((response, exception) -> {
```

```
            if (exception != null) {
                logger.error("Failed to put metric data: " + exception.getMessage(),
exception);
            } else {
                logger.info("Added metric values for metric.");
            }
        });
    }
```

- Untuk detail API, lihat PutMetricDatadi Referensi AWS SDK for Java 2.x API.

## Skenario

Pantau kinerja DynamoDB

Contoh kode berikut menunjukkan cara mengkonfigurasi penggunaan aplikasi DynamoDB untuk memantau kinerja.

SDK untuk Java 2.x

Contoh ini menunjukkan cara mengkonfigurasi aplikasi Java untuk memantau kinerja DynamoDB. Aplikasi mengirimkan data metrik ke CloudWatch tempat Anda dapat memantau kinerja.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch
- DynamoDB

# CloudWatch Contoh acara menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With CloudWatch Events.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


# Tindakan

### `PutEvents`

Contoh kode berikut menunjukkan cara menggunakan`PutEvents`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutEventsRequestEntry;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutEvents {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <resourceArn>

                Where:
```

```
                    resourceArn - An Amazon Resource Name (ARN) related to the
 events.
                """";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String resourceArn = args[0];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWEvents(cwe, resourceArn);
        cwe.close();
    }

    public static void putCWEvents(CloudWatchEventsClient cwe, String resourceArn) {
        try {
            final String EVENT_DETAILS = "{ \"key1\": \"value1\", \"key2\":
 \"value2\" }";

            PutEventsRequestEntry requestEntry = PutEventsRequestEntry.builder()
                    .detail(EVENT_DETAILS)
                    .detailType("sampleSubmitted")
                    .resources(resourceArn)
                    .source("aws-sdk-java-cloudwatch-example")
                    .build();

            PutEventsRequest request = PutEventsRequest.builder()
                    .entries(requestEntry)
                    .build();

            cwe.putEvents(request);
            System.out.println("Successfully put CloudWatch event");

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutEventsdi Referensi AWS SDK for Java 2.x API.

### `PutRule`

Contoh kode berikut menunjukkan cara menggunakan`PutRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.PutRuleResponse;
import software.amazon.awssdk.services.cloudwatchevents.model.RuleState;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutRule {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <ruleName> roleArn>\s

                Where:
                  ruleName - A rule name (for example, myrule).
                  roleArn - A role ARN value (for example,
 arn:aws:iam::xxxxxx047983:user/MyUser).
                """;

        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String ruleName = args[0];
        String roleArn = args[1];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWRule(cwe, ruleName, roleArn);
        cwe.close();
    }

    public static void putCWRule(CloudWatchEventsClient cwe, String ruleName, String
 roleArn) {
        try {
            PutRuleRequest request = PutRuleRequest.builder()
                    .name(ruleName)
                    .roleArn(roleArn)
                    .scheduleExpression("rate(5 minutes)")
                    .state(RuleState.ENABLED)
                    .build();

            PutRuleResponse response = cwe.putRule(request);
            System.out.printf(
                    "Successfully created CloudWatch events rule %s with arn %s",
                    roleArn, response.ruleArn());

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutRuledi Referensi AWS SDK for Java 2.x API.

### `PutTargets`

Contoh kode berikut menunjukkan cara menggunakan`PutTargets`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient;
import software.amazon.awssdk.services.cloudwatchevents.model.PutTargetsRequest;
import software.amazon.awssdk.services.cloudwatchevents.model.Target;

/**
 * To run this Java V2 code example, ensure that you have setup your development
 * environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutTargets {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <ruleName> <functionArn> <targetId>\s

                Where:
                  ruleName - A rule name (for example, myrule).
                  functionArn - An AWS Lambda function ARN (for example,
 arn:aws:lambda:us-west-2:xxxxxx047983:function:lamda1).
                  targetId - A target id value.
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String ruleName = args[0];
        String functionArn = args[1];
```

```
        String targetId = args[2];
        CloudWatchEventsClient cwe = CloudWatchEventsClient.builder()
                .build();

        putCWTargets(cwe, ruleName, functionArn, targetId);
        cwe.close();
    }

    public static void putCWTargets(CloudWatchEventsClient cwe, String ruleName,
 String functionArn, String targetId) {
        try {
            Target target = Target.builder()
                    .arn(functionArn)
                    .id(targetId)
                    .build();

            PutTargetsRequest request = PutTargetsRequest.builder()
                    .targets(target)
                    .rule(ruleName)
                    .build();

            cwe.putTargets(request);
            System.out.printf(
                    "Successfully created CloudWatch events target for rule %s",
                    ruleName);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutTargetsdi Referensi AWS SDK for Java 2.x API.

# CloudWatch Contoh log menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With CloudWatch Logs.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


## Tindakan

### `DeleteSubscriptionFilter`

Contoh kode berikut menunjukkan cara menggunakan`DeleteSubscriptionFilter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DeleteSubscriptionFilterRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteSubscriptionFilter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <filter> <logGroup>

                Where:
                  filter - The name of the subscription filter (for example,
 MyFilter).
                  logGroup - The name of the log group. (for example, testgroup).
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String filter = args[0];
        String logGroup = args[1];
        CloudWatchLogsClient logs = CloudWatchLogsClient.builder()
                .build();

        deleteSubFilter(logs, filter, logGroup);
        logs.close();
    }

    public static void deleteSubFilter(CloudWatchLogsClient logs, String filter,
 String logGroup) {
        try {
            DeleteSubscriptionFilterRequest request =
 DeleteSubscriptionFilterRequest.builder()
                    .filterName(filter)
                    .logGroupName(logGroup)
                    .build();

            logs.deleteSubscriptionFilter(request);
            System.out.printf("Successfully deleted CloudWatch logs subscription
 filter %s", filter);

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteSubscriptionFilterdi Referensi AWS SDK for Java 2.x API.

### `DescribeLogStreams`

Contoh kode berikut menunjukkan cara menggunakan`DescribeLogStreams`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mencari aliran log dalam grup log tertentu yang cocok dengan awalan yang diberikan.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CloudWatchLogsSearch {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <logGroupName> <logStreamName>

                Where:
                  logGroupName - The name of the log group (for example,
 WeathertopJavaContainerLogs).
```

```
                 logStreamName - The name of the log stream (for example,
weathertop-java-stream).
                 pattern - the pattern to use (for example, INFO)

               """;

       if (args.length != 3) {
           System.out.print(usage);
           System.exit(1);
       }

       String logGroupName = args[0] ;
       String logStreamName = args[1] ;
       String pattern = args[2] ;

       CloudWatchLogsClient cwlClient = CloudWatchLogsClient.builder()
               .region(Region.US_EAST_1)
               .build();

       searchLogStreamsAndFilterEvents(cwlClient, logGroupName, logStreamName,
pattern);
   }

   /**
    * Searches for log streams with a specific prefix within a log group and
filters log events based on a specified pattern.
    *
    * @param cwlClient       the CloudWatchLogsClient used to interact with AWS
CloudWatch Logs
    * @param logGroupName    the name of the log group to search within
    * @param logStreamPrefix the prefix of the log streams to search for
    * @param pattern         the pattern to filter log events by
    */
   public static void searchLogStreamsAndFilterEvents(CloudWatchLogsClient
cwlClient, String logGroupName, String logStreamPrefix, String pattern) {
       DescribeLogStreamsRequest describeLogStreamsRequest =
DescribeLogStreamsRequest.builder()
               .logGroupName(logGroupName)
               .logStreamNamePrefix(logStreamPrefix)
               .build();

       DescribeLogStreamsResponse describeLogStreamsResponse =
cwlClient.describeLogStreams(describeLogStreamsRequest);
       List<LogStream> logStreams = describeLogStreamsResponse.logStreams();
```

```
        for (LogStream logStream : logStreams) {
            String logStreamName = logStream.logStreamName();
            System.out.println("Searching in log stream: " + logStreamName);

            FilterLogEventsRequest filterLogEventsRequest =
 FilterLogEventsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamNames(logStreamName)
                    .filterPattern(pattern)
                    .build();

            FilterLogEventsResponse filterLogEventsResponse =
 cwlClient.filterLogEvents(filterLogEventsRequest);

            for (FilteredLogEvent event : filterLogEventsResponse.events()) {
                System.out.println(event.message());
            }


 System.out.println("-------------------------------------------------"); //
 Separator for better readability
        }
    }
}
```

Mencetak metadata tentang aliran log terbaru dalam grup log tertentu.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CloudWatchLogQuery {
    public static void main(final String[] args) {
        final String usage = """
                Usage:
                  <logGroupName>
```

```
                Where:
                  logGroupName - The name of the log group (for example, /aws/
lambda/ChatAIHandler).
                """;

        if (args.length != 1) {
            System.out.print(usage);
            System.exit(1);
        }

        String logGroupName = "/aws/lambda/ChatAIHandler" ; //args[0];
        CloudWatchLogsClient logsClient = CloudWatchLogsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        describeMostRecentLogStream(logsClient, logGroupName);
    }

    /**
     * Describes and prints metadata about the most recent log stream in the
 specified log group.
     *
     * @param logsClient   the CloudWatchLogsClient used to interact with AWS
 CloudWatch Logs
     * @param logGroupName the name of the log group
     */
    public static void describeMostRecentLogStream(CloudWatchLogsClient logsClient,
 String logGroupName) {
        DescribeLogStreamsRequest streamsRequest =
 DescribeLogStreamsRequest.builder()
                .logGroupName(logGroupName)
                .orderBy(OrderBy.LAST_EVENT_TIME)
                .descending(true)
                .limit(1)
                .build();

        try {
            DescribeLogStreamsResponse streamsResponse =
 logsClient.describeLogStreams(streamsRequest);
            List<LogStream> logStreams = streamsResponse.logStreams();

            if (logStreams.isEmpty()) {
```

```
                System.out.println("No log streams found for log group: " +
 logGroupName);
                return;
            }

            LogStream stream = logStreams.get(0);
            System.out.println("Most Recent Log Stream:");
            System.out.println("  Name: " + stream.logStreamName());
            System.out.println("  ARN: " + stream.arn());
            System.out.println("  Creation Time: " + stream.creationTime());
            System.out.println("  First Event Time: " +
 stream.firstEventTimestamp());
            System.out.println("  Last Event Time: " + stream.lastEventTimestamp());
            System.out.println("  Stored Bytes: " + stream.storedBytes());
            System.out.println("  Upload Sequence Token: " +
 stream.uploadSequenceToken());

        } catch (CloudWatchLogsException e) {
            System.err.println("Failed to describe log stream: " +
 e.awsErrorDetails().errorMessage());
        }
    }
}
```

- Untuk detail API, lihat DescribeLogStreamsdi Referensi AWS SDK for Java 2.x API.

### `DescribeSubscriptionFilters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeSubscriptionFilters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
```

```
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeSubscriptionFiltersRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeSubscriptionFiltersResponse;
import software.amazon.awssdk.services.cloudwatchlogs.model.SubscriptionFilter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeSubscriptionFilters {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                  <logGroup>

                Where:
                  logGroup - A log group name (for example, myloggroup).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String logGroup = args[0];
        CloudWatchLogsClient logs = CloudWatchLogsClient.builder()
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();

        describeFilters(logs, logGroup);
        logs.close();
    }

    public static void describeFilters(CloudWatchLogsClient logs, String logGroup) {
        try {
            boolean done = false;
            String newToken = null;
```

```
            while (!done) {
                DescribeSubscriptionFiltersResponse response;
                if (newToken == null) {
                    DescribeSubscriptionFiltersRequest request =
 DescribeSubscriptionFiltersRequest.builder()
                            .logGroupName(logGroup)
                            .limit(1).build();

                    response = logs.describeSubscriptionFilters(request);
                } else {
                    DescribeSubscriptionFiltersRequest request =
 DescribeSubscriptionFiltersRequest.builder()
                            .nextToken(newToken)
                            .logGroupName(logGroup)
                            .limit(1).build();
                    response = logs.describeSubscriptionFilters(request);
                }

                for (SubscriptionFilter filter : response.subscriptionFilters()) {
                    System.out.printf("Retrieved filter with name %s, " + "pattern
 %s " + "and destination arn %s",
                            filter.filterName(),
                            filter.filterPattern(),
                            filter.destinationArn());
                }

                if (response.nextToken() == null) {
                    done = true;
                } else {
                    newToken = response.nextToken();
                }
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.printf("Done");
    }
}
```

- Untuk detail API, lihat DescribeSubscriptionFiltersdi Referensi AWS SDK for Java 2.x API.

### `GetLogEvents`

Contoh kode berikut menunjukkan cara menggunakan`GetLogEvents`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatch.model.CloudWatchException;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeLogStreamsRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.DescribeLogStreamsResponse;
import software.amazon.awssdk.services.cloudwatchlogs.model.GetLogEventsRequest;
import software.amazon.awssdk.services.cloudwatchlogs.model.GetLogEventsResponse;

import java.time.Instant;
import java.time.temporal.ChronoUnit;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetLogEvents {

    public static void main(String[] args) {

        final String usage = """

                Usage:
                  <logGroupName> <logStreamName>

                Where:
```

```
                    logGroupName - The name of the log group (for example,
 myloggroup).
                    logStreamName - The name of the log stream (for example,
 mystream).

                """;

       // if (args.length != 2) {
       //     System.out.print(usage);
       //     System.exit(1);
//        }

        String logGroupName = "WeathertopJavaContainerLogs" ; //args[0];
        String logStreamName = "weathertop-java-stream" ; //args[1];

        Region region = Region.US_EAST_1 ;
        CloudWatchLogsClient cloudWatchLogsClient = CloudWatchLogsClient.builder()
                .region(region)
                .build();

        getCWLogEvents(cloudWatchLogsClient, logGroupName, logStreamName);
        cloudWatchLogsClient.close();
    }

    public static void getCWLogEvents(CloudWatchLogsClient cloudWatchLogsClient,
                                      String logGroupName,
                                      String logStreamPrefix) {
        try {
            // First, find the exact log stream name
            DescribeLogStreamsRequest describeRequest =
 DescribeLogStreamsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamNamePrefix(logStreamPrefix)
                    .limit(1) // get the first matching stream
                    .build();

            DescribeLogStreamsResponse describeResponse =
 cloudWatchLogsClient.describeLogStreams(describeRequest);

            if (describeResponse.logStreams().isEmpty()) {
                System.out.println("No matching log streams found for prefix: " +
 logStreamPrefix);
                return;
            }
```

```
            String exactLogStreamName =
 describeResponse.logStreams().get(0).logStreamName();
            System.out.println("Using exact log stream: " + exactLogStreamName);

            long startTime = Instant.now().minus(7, ChronoUnit.DAYS).toEpochMilli();
            long endTime = Instant.now().toEpochMilli();

            GetLogEventsRequest getLogEventsRequest = GetLogEventsRequest.builder()
                    .logGroupName(logGroupName)
                    .logStreamName(exactLogStreamName) // <-- exact name, not prefix
                    .startTime(startTime)
                    .endTime(endTime)
                    .startFromHead(true)
                    .build();

            GetLogEventsResponse response =
 cloudWatchLogsClient.getLogEvents(getLogEventsRequest);

            if (response.events().isEmpty()) {
                System.out.println("No log events found in the past 7 days.");
            } else {
                response.events().forEach(e -> System.out.println(e.message()));
            }

        } catch (CloudWatchException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetLogEventsdi Referensi AWS SDK for Java 2.x API.

### `PutSubscriptionFilter`

Contoh kode berikut menunjukkan cara menggunakan`PutSubscriptionFilter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsClient;
import software.amazon.awssdk.services.cloudwatchlogs.model.CloudWatchLogsException;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.PutSubscriptionFilterRequest;

/**
 * Before running this code example, you need to grant permission to CloudWatch
 * Logs the right to execute your Lambda function.
 * To perform this task, you can use this CLI command:
 *
 * aws lambda add-permission --function-name "lamda1" --statement-id "lamda1"
 * --principal "logs.us-west-2.amazonaws.com" --action "lambda:InvokeFunction"
 * --source-arn "arn:aws:logs:us-west-2:111111111111:log-group:testgroup:*"
 * --source-account "111111111111"
 *
 * Make sure you replace the function name with your function name and replace
 * '111111111111' with your account details.
 * For more information, see "Subscription Filters with AWS Lambda" in the
 * Amazon CloudWatch Logs Guide.
 *
 *
 * Also, before running this Java V2 code example,set up your development
 * environment,including your credentials.
 *
 * For more information,see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */

public class PutSubscriptionFilter {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                  <filter> <pattern> <logGroup> <functionArn>\s

                Where:
                  filter - A filter name (for example, myfilter).
                  pattern - A filter pattern (for example, ERROR).
                  logGroup - A log group name (testgroup).
                  functionArn - An AWS Lambda function ARN (for example,
arn:aws:lambda:us-west-2:111111111111:function:lambda1) .
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String filter = args[0];
        String pattern = args[1];
        String logGroup = args[2];
        String functionArn = args[3];
        Region region = Region.US_WEST_2;
        CloudWatchLogsClient cwl = CloudWatchLogsClient.builder()
                .region(region)
                .build();

        putSubFilters(cwl, filter, pattern, logGroup, functionArn);
        cwl.close();
    }

    public static void putSubFilters(CloudWatchLogsClient cwl,
            String filter,
            String pattern,
            String logGroup,
            String functionArn) {

        try {
            PutSubscriptionFilterRequest request =
PutSubscriptionFilterRequest.builder()
                    .filterName(filter)
                    .filterPattern(pattern)
                    .logGroupName(logGroup)
                    .destinationArn(functionArn)
                    .build();
```

```
            cwl.putSubscriptionFilter(request);
            System.out.printf(
                    "Successfully created CloudWatch logs subscription filter %s",
                    filter);

        } catch (CloudWatchLogsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutSubscriptionFilterdi Referensi AWS SDK for Java 2.x API.

### `StartLiveTail`

Contoh kode berikut menunjukkan cara menggunakan`StartLiveTail`.

SDK untuk Java 2.x

Sertakan file-file yang diperlukan.

```
import io.reactivex.FlowableSubscriber;
import io.reactivex.annotations.NonNull;
import org.reactivestreams.Subscription;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.services.cloudwatchlogs.CloudWatchLogsAsyncClient;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionLogEvent;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionStart;
import software.amazon.awssdk.services.cloudwatchlogs.model.LiveTailSessionUpdate;
import software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailRequest;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailResponseHandler;
import software.amazon.awssdk.services.cloudwatchlogs.model.CloudWatchLogsException;
import
 software.amazon.awssdk.services.cloudwatchlogs.model.StartLiveTailResponseStream;

import java.util.Date;
import java.util.List;
import java.util.concurrent.atomic.AtomicReference;
```

Tangani acara dari sesi Live Tail.

```
   private static StartLiveTailResponseHandler
getStartLiveTailResponseStreamHandler(
           AtomicReference<Subscription> subscriptionAtomicReference) {
       return StartLiveTailResponseHandler.builder()
           .onResponse(r -> System.out.println("Received initial response"))
           .onError(throwable -> {
               CloudWatchLogsException e = (CloudWatchLogsException)
throwable.getCause();
               System.err.println(e.awsErrorDetails().errorMessage());
               System.exit(1);
           })
           .subscriber(() -> new FlowableSubscriber<>() {
               @Override
               public void onSubscribe(@NonNull Subscription s) {
                   subscriptionAtomicReference.set(s);
                   s.request(Long.MAX_VALUE);
               }

               @Override
               public void onNext(StartLiveTailResponseStream event) {
                   if (event instanceof LiveTailSessionStart) {
                       LiveTailSessionStart sessionStart = (LiveTailSessionStart)
event;
                       System.out.println(sessionStart);
                   } else if (event instanceof LiveTailSessionUpdate) {
                       LiveTailSessionUpdate sessionUpdate =
(LiveTailSessionUpdate) event;
                       List<LiveTailSessionLogEvent> logEvents =
sessionUpdate.sessionResults();
                       logEvents.forEach(e -> {
                           long timestamp = e.timestamp();
                           Date date = new Date(timestamp);
                           System.out.println("[" + date + "] " + e.message());
                       });
                   } else {
                       throw CloudWatchLogsException.builder().message("Unknown
event type").build();
                   }
               }
```

```
                @Override
                public void onError(Throwable throwable) {
                    System.out.println(throwable.getMessage());
                    System.exit(1);
                }

                @Override
                public void onComplete() {
                    System.out.println("Completed Streaming Session");
                }
            })
            .build();
    }
```

Mulai sesi Live Tail.

```
        CloudWatchLogsAsyncClient cloudWatchLogsAsyncClient =
                CloudWatchLogsAsyncClient.builder()
                    .credentialsProvider(ProfileCredentialsProvider.create())
                    .build();

        StartLiveTailRequest request =
                StartLiveTailRequest.builder()
                    .logGroupIdentifiers(logGroupIdentifiers)
                    .logStreamNames(logStreamNames)
                    .logEventFilterPattern(logEventFilterPattern)
                    .build();

        /* Create a reference to store the subscription */
        final AtomicReference<Subscription> subscriptionAtomicReference = new
AtomicReference<>(null);

        cloudWatchLogsAsyncClient.startLiveTail(request,
getStartLiveTailResponseStreamHandler(subscriptionAtomicReference));
```

Hentikan sesi Live Tail setelah periode waktu berlalu.

```
        /* Set a timeout for the session and cancel the subscription. This will:
         * 1). Close the stream
         * 2). Stop the Live Tail session
```

```
         */
        try {
            Thread.sleep(10000);
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
        if (subscriptionAtomicReference.get() != null) {
            subscriptionAtomicReference.get().cancel();
            System.out.println("Subscription to stream closed");
        }
```

- Untuk detail API, lihat StartLiveTaildi Referensi AWS SDK for Java 2.x API.

## Skenario

Menggunakan peristiwa terjadwal untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh acara EventBridge terjadwal Amazon.

SDK untuk Java 2.x

Menunjukkan cara membuat acara EventBridge terjadwal Amazon yang memanggil AWS Lambda fungsi. Konfigurasikan EventBridge untuk menggunakan ekspresi cron untuk menjadwalkan saat fungsi Lambda dipanggil. Dalam contoh ini, Anda membuat fungsi Lambda menggunakan API runtime Java Lambda. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat aplikasi yang mengirimkan pesan teks seluler kepada karyawan Anda berisi ucapan selamat pada hari jadi setahun kerja mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch Log
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

# Contoh Identitas Amazon Cognito menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Identitas Cognito AWS SDK for Java 2.x With Amazon.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


## Tindakan

### `CreateIdentityPool`

Contoh kode berikut menunjukkan cara menggunakan`CreateIdentityPool`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.CreateIdentityPoolRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.CreateIdentityPoolResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateIdentityPool {
    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <identityPoolName>\s

                Where:
                    identityPoolName - The name to give your identity pool.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String identityPoolName = args[0];
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String identityPoolId = createIdPool(cognitoClient, identityPoolName);
        System.out.println("Unity pool ID " + identityPoolId);
        cognitoClient.close();
    }

    public static String createIdPool(CognitoIdentityClient cognitoClient, String
 identityPoolName) {
        try {
            CreateIdentityPoolRequest poolRequest =
 CreateIdentityPoolRequest.builder()
                    .allowUnauthenticatedIdentities(false)
                    .identityPoolName(identityPoolName)
                    .build();

            CreateIdentityPoolResponse response =
 cognitoClient.createIdentityPool(poolRequest);
            return response.identityPoolId();
```

```
        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateIdentityPooldi Referensi AWS SDK for Java 2.x API.

### `DeleteIdentityPool`

Contoh kode berikut menunjukkan cara menggunakan`DeleteIdentityPool`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.DeleteIdentityPoolRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteIdentityPool {

    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <identityPoolId>\s

                Where:
                    identityPoolId - The Id value of your identity pool.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String identityPoold = args[0];
        CognitoIdentityClient cognitoIdClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .credentialsProvider(ProfileCredentialsProvider.create())
                .build();

        deleteIdPool(cognitoIdClient, identityPoold);
        cognitoIdClient.close();
    }

    public static void deleteIdPool(CognitoIdentityClient cognitoIdClient, String
 identityPoold) {
        try {

            DeleteIdentityPoolRequest identityPoolRequest =
 DeleteIdentityPoolRequest.builder()
                    .identityPoolId(identityPoold)
                    .build();

            cognitoIdClient.deleteIdentityPool(identityPoolRequest);
            System.out.println("Done");

        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteIdentityPooldi Referensi AWS SDK for Java 2.x API.

### `GetCredentialsForIdentity`

Contoh kode berikut menunjukkan cara menggunakan`GetCredentialsForIdentity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.GetCredentialsForIdentityRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.GetCredentialsForIdentityResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetIdentityCredentials {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <identityId>\s

            Where:
                identityId - The Id of an existing identity in the format
 REGION:GUID.
            """;

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String identityId = args[0];
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .build();

        getCredsForIdentity(cognitoClient, identityId);
        cognitoClient.close();
    }

    public static void getCredsForIdentity(CognitoIdentityClient cognitoClient,
 String identityId) {
        try {
            GetCredentialsForIdentityRequest getCredentialsForIdentityRequest =
 GetCredentialsForIdentityRequest
                    .builder()
                    .identityId(identityId)
                    .build();

            GetCredentialsForIdentityResponse response = cognitoClient
                    .getCredentialsForIdentity(getCredentialsForIdentityRequest);
            System.out.println(
                    "Identity ID " + response.identityId() + ", Access key ID " +
 response.credentials().accessKeyId());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetCredentialsForIdentitydi Referensi AWS SDK for Java 2.x API.

### `ListIdentityPools`

Contoh kode berikut menunjukkan cara menggunakan`ListIdentityPools`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient;
import
 software.amazon.awssdk.services.cognitoidentity.model.ListIdentityPoolsRequest;
import
 software.amazon.awssdk.services.cognitoidentity.model.ListIdentityPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListIdentityPools {
    public static void main(String[] args) {
        CognitoIdentityClient cognitoClient = CognitoIdentityClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listIdPools(cognitoClient);
        cognitoClient.close();
    }

    public static void listIdPools(CognitoIdentityClient cognitoClient) {
        try {
            ListIdentityPoolsRequest poolsRequest =
 ListIdentityPoolsRequest.builder()
                    .maxResults(15)
                    .build();
```

```
            ListIdentityPoolsResponse response =
 cognitoClient.listIdentityPools(poolsRequest);
            response.identityPools().forEach(pool -> {
                System.out.println("Pool ID: " + pool.identityPoolId());
                System.out.println("Pool name: " + pool.identityPoolName());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListIdentityPoolsdi Referensi AWS SDK for Java 2.x API.

# Contoh Penyedia Identitas Amazon Cognito menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Penyedia Identitas Amazon Cognito AWS SDK for Java 2.x dengan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Tindakan
- Skenario

# Memulai

## Halo Amazon Cognito

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon Cognito.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUserPools {
    public static void main(String[] args) {
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllUserPools(cognitoClient);
        cognitoClient.close();
    }
```

```
    public static void listAllUserPools(CognitoIdentityProviderClient cognitoClient)
{
        try {
            ListUserPoolsRequest request = ListUserPoolsRequest.builder()
                    .maxResults(10)
                    .build();

            ListUserPoolsResponse response = cognitoClient.listUserPools(request);
            response.userPools().forEach(userpool -> {
                System.out.println("User pool " + userpool.name() + ", User ID " +
 userpool.id());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListUserPoolsdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `AdminGetUser`

Contoh kode berikut menunjukkan cara menggunakan`AdminGetUser`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void getAdminUser(CognitoIdentityProviderClient
 identityProviderClient, String userName,
            String poolId) {
```

```
        try {
            AdminGetUserRequest userRequest = AdminGetUserRequest.builder()
                    .username(userName)
                    .userPoolId(poolId)
                    .build();

            AdminGetUserResponse response =
identityProviderClient.adminGetUser(userRequest);
            System.out.println("User status " + response.userStatusAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat AdminGetUserdi Referensi AWS SDK for Java 2.x API.

### `AdminInitiateAuth`

Contoh kode berikut menunjukkan cara menggunakan`AdminInitiateAuth`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static AdminInitiateAuthResponse
initiateAuth(CognitoIdentityProviderClient identityProviderClient,
            String clientId, String userName, String password, String userPoolId) {
        try {
            Map<String, String> authParameters = new HashMap<>();
            authParameters.put("USERNAME", userName);
            authParameters.put("PASSWORD", password);

            AdminInitiateAuthRequest authRequest =
AdminInitiateAuthRequest.builder()
```

```
                    .clientId(clientId)
                    .userPoolId(userPoolId)
                    .authParameters(authParameters)
                    .authFlow(AuthFlowType.ADMIN_USER_PASSWORD_AUTH)
                    .build();

            AdminInitiateAuthResponse response =
identityProviderClient.adminInitiateAuth(authRequest);
            System.out.println("Result Challenge is : " + response.challengeName());
            return response;

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
```

- Untuk detail API, lihat AdminInitiateAuthdi Referensi AWS SDK for Java 2.x API.

### `AdminRespondToAuthChallenge`

Contoh kode berikut menunjukkan cara menggunakan`AdminRespondToAuthChallenge`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Respond to an authentication challenge.
    public static void adminRespondToAuthChallenge(CognitoIdentityProviderClient
identityProviderClient,
            String userName, String clientId, String mfaCode, String session) {
        System.out.println("SOFTWARE_TOKEN_MFA challenge is generated");
        Map<String, String> challengeResponses = new HashMap<>();

        challengeResponses.put("USERNAME", userName);
```

```
        challengeResponses.put("SOFTWARE_TOKEN_MFA_CODE", mfaCode);

        AdminRespondToAuthChallengeRequest respondToAuthChallengeRequest =
AdminRespondToAuthChallengeRequest.builder()
                .challengeName(ChallengeNameType.SOFTWARE_TOKEN_MFA)
                .clientId(clientId)
                .challengeResponses(challengeResponses)
                .session(session)
                .build();

        AdminRespondToAuthChallengeResponse respondToAuthChallengeResult =
identityProviderClient
                .adminRespondToAuthChallenge(respondToAuthChallengeRequest);
        System.out.println("respondToAuthChallengeResult.getAuthenticationResult()"
                + respondToAuthChallengeResult.authenticationResult());
    }
```

- Untuk detail API, lihat AdminRespondToAuthChallengedi Referensi AWS SDK for Java 2.x API.

### `AssociateSoftwareToken`

Contoh kode berikut menunjukkan cara menggunakan`AssociateSoftwareToken`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String getSecretForAppMFA(CognitoIdentityProviderClient
identityProviderClient, String session) {
        AssociateSoftwareTokenRequest softwareTokenRequest =
AssociateSoftwareTokenRequest.builder()
                .session(session)
                .build();

        AssociateSoftwareTokenResponse tokenResponse = identityProviderClient
                .associateSoftwareToken(softwareTokenRequest);
        String secretCode = tokenResponse.secretCode();
```

```
        System.out.println("Enter this token into Google Authenticator");
        System.out.println(secretCode);
        return tokenResponse.session();
    }
```

- Untuk detail API, lihat AssociateSoftwareTokendi Referensi AWS SDK for Java 2.x API.

### `ConfirmSignUp`

Contoh kode berikut menunjukkan cara menggunakan`ConfirmSignUp`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void confirmSignUp(CognitoIdentityProviderClient
identityProviderClient, String clientId, String code,
           String userName) {
       try {
           ConfirmSignUpRequest signUpRequest = ConfirmSignUpRequest.builder()
                   .clientId(clientId)
                   .confirmationCode(code)
                   .username(userName)
                   .build();

           identityProviderClient.confirmSignUp(signUpRequest);
           System.out.println(userName + " was confirmed");

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ConfirmSignUpdi Referensi AWS SDK for Java 2.x API.

### `CreateUserPool`

Contoh kode berikut menunjukkan cara menggunakan`CreateUserPool`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUserPool {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <userPoolName>\s

                Where:
                    userPoolName - The name to give your user pool when it's
 created.
                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userPoolName = args[0];
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String id = createPool(cognitoClient, userPoolName);
        System.out.println("User pool ID: " + id);
        cognitoClient.close();
    }

    public static String createPool(CognitoIdentityProviderClient cognitoClient,
 String userPoolName) {
        try {
            CreateUserPoolRequest request = CreateUserPoolRequest.builder()
                    .poolName(userPoolName)
                    .build();

            CreateUserPoolResponse response = cognitoClient.createUserPool(request);
            return response.userPool().id();

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateUserPooldi Referensi AWS SDK for Java 2.x API.

### `CreateUserPoolClient`

Contoh kode berikut menunjukkan cara menggunakan`CreateUserPoolClient`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolClientRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CreateUserPoolClientResponse;

/**
 * A user pool client app is an application that authenticates with Amazon
 * Cognito user pools.
 * When you create a user pool, you can configure app clients that allow mobile
 * or web applications
 * to call API operations to authenticate users, manage user attributes and
 * profiles,
 * and implement sign-up and sign-in flows.
 *
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUserPoolClient {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <clientName> <userPoolId>\s

                Where:
                    clientName - The name for the user pool client to create.
```

```
                    userPoolId - The ID for the user pool.
                """";

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clientName = args[0];
        String userPoolId = args[1];
        CognitoIdentityProviderClient cognitoClient =
CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createPoolClient(cognitoClient, clientName, userPoolId);
        cognitoClient.close();
    }

    public static void createPoolClient(CognitoIdentityProviderClient cognitoClient,
String clientName,
            String userPoolId) {
        try {
            CreateUserPoolClientRequest request =
CreateUserPoolClientRequest.builder()
                    .clientName(clientName)
                    .userPoolId(userPoolId)
                    .build();

            CreateUserPoolClientResponse response =
cognitoClient.createUserPoolClient(request);
            System.out.println("User pool " + response.userPoolClient().clientName()
+ " created. ID: "
                    + response.userPoolClient().clientId());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateUserPoolClientdi Referensi AWS SDK for Java 2.x API.

### `ListUserPools`

Contoh kode berikut menunjukkan cara menggunakan`ListUserPools`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUserPoolsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUserPools {
    public static void main(String[] args) {
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllUserPools(cognitoClient);
        cognitoClient.close();
    }

    public static void listAllUserPools(CognitoIdentityProviderClient cognitoClient)
 {
```

```
        try {
            ListUserPoolsRequest request = ListUserPoolsRequest.builder()
                    .maxResults(10)
                    .build();

            ListUserPoolsResponse response = cognitoClient.listUserPools(request);
            response.userPools().forEach(userpool -> {
                System.out.println("User pool " + userpool.name() + ", User ID " +
 userpool.id());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListUserPoolsdi Referensi AWS SDK for Java 2.x API.

### `ListUsers`

Contoh kode berikut menunjukkan cara menggunakan`ListUsers`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUsersRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ListUsersResponse;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUsers {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <userPoolId>\s

                Where:
                    userPoolId - The ID given to your user pool when it's created.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userPoolId = args[0];
        CognitoIdentityProviderClient cognitoClient =
 CognitoIdentityProviderClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllUsers(cognitoClient, userPoolId);
        listUsersFilter(cognitoClient, userPoolId);
        cognitoClient.close();
    }

    public static void listAllUsers(CognitoIdentityProviderClient cognitoClient,
 String userPoolId) {
        try {
            ListUsersRequest usersRequest = ListUsersRequest.builder()
                    .userPoolId(userPoolId)
                    .build();
```

```
            ListUsersResponse response = cognitoClient.listUsers(usersRequest);
            response.users().forEach(user -> {
                System.out.println("User " + user.username() + " Status " +
 user.userStatus() + " Created "
                        + user.userCreateDate());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Shows how to list users by using a filter.
    public static void listUsersFilter(CognitoIdentityProviderClient cognitoClient,
 String userPoolId) {

        try {
            String filter = "email = \"tblue@noserver.com\"";
            ListUsersRequest usersRequest = ListUsersRequest.builder()
                    .userPoolId(userPoolId)
                    .filter(filter)
                    .build();

            ListUsersResponse response = cognitoClient.listUsers(usersRequest);
            response.users().forEach(user -> {
                System.out.println("User with filter applied " + user.username() + "
 Status " + user.userStatus()
                        + " Created " + user.userCreateDate());
            });

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListUsersdi Referensi AWS SDK for Java 2.x API.

### `ResendConfirmationCode`

Contoh kode berikut menunjukkan cara menggunakan`ResendConfirmationCode`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void resendConfirmationCode(CognitoIdentityProviderClient
identityProviderClient, String clientId,
           String userName) {
       try {
           ResendConfirmationCodeRequest codeRequest =
ResendConfirmationCodeRequest.builder()
                   .clientId(clientId)
                   .username(userName)
                   .build();

           ResendConfirmationCodeResponse response =
identityProviderClient.resendConfirmationCode(codeRequest);
           System.out.println("Method of delivery is " +
response.codeDeliveryDetails().deliveryMediumAsString());

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ResendConfirmationCodedi Referensi AWS SDK for Java 2.x API.

### `SignUp`

Contoh kode berikut menunjukkan cara menggunakan`SignUp`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void signUp(CognitoIdentityProviderClient identityProviderClient,
String clientId, String userName,
           String password, String email) {
       AttributeType userAttrs = AttributeType.builder()
               .name("email")
               .value(email)
               .build();

       List<AttributeType> userAttrsList = new ArrayList<>();
       userAttrsList.add(userAttrs);
       try {
           SignUpRequest signUpRequest = SignUpRequest.builder()
                   .userAttributes(userAttrsList)
                   .username(userName)
                   .clientId(clientId)
                   .password(password)
                   .build();

           identityProviderClient.signUp(signUpRequest);
           System.out.println("User has been signed up ");

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat SignUpdi Referensi AWS SDK for Java 2.x API.

### `VerifySoftwareToken`

Contoh kode berikut menunjukkan cara menggunakan`VerifySoftwareToken`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Verify the TOTP and register for MFA.
   public static void verifyTOTP(CognitoIdentityProviderClient
identityProviderClient, String session, String code) {
       try {
           VerifySoftwareTokenRequest tokenRequest =
VerifySoftwareTokenRequest.builder()
                   .userCode(code)
                   .session(session)
                   .build();

           VerifySoftwareTokenResponse verifyResponse =
identityProviderClient.verifySoftwareToken(tokenRequest);
           System.out.println("The status of the token is " +
verifyResponse.statusAsString());

       } catch (CognitoIdentityProviderException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat VerifySoftwareTokendi Referensi AWS SDK for Java 2.x API.

## Skenario

Mendaftar pengguna dengan kumpulan pengguna yang membutuhkan MFA

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Daftar dan konfirmasikan pengguna dengan nama pengguna, kata sandi, dan alamat email.
- Siapkan otentikasi multi-faktor dengan mengaitkan aplikasi MFA dengan pengguna.

- Masuk dengan menggunakan kata sandi dan kode MFA.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminGetUserRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminGetUserResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminInitiateAuthRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminInitiateAuthResponse;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminRespondToAuthChallengeRe
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AdminRespondToAuthChallengeRe
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AssociateSoftwareTokenRequest
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.AssociateSoftwareTokenRespons
import software.amazon.awssdk.services.cognitoidentityprovider.model.AttributeType;
import software.amazon.awssdk.services.cognitoidentityprovider.model.AuthFlowType;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ChallengeNameType;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.CognitoIdentityProviderExcept
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ConfirmSignUpRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ResendConfirmationCodeRequest
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.ResendConfirmationCodeRespons
import software.amazon.awssdk.services.cognitoidentityprovider.model.SignUpRequest;
```

```
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.VerifySoftwareTokenRequest;
import
 software.amazon.awssdk.services.cognitoidentityprovider.model.VerifySoftwareTokenResponse;
import java.security.InvalidKeyException;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * TIP: To set up the required user pool, run the AWS Cloud Development Kit (AWS
 * CDK) script provided in this GitHub repo at
 * resources/cdk/cognito_scenario_user_pool_with_mfa.
 *
 * This code example performs the following operations:
 *
 * 1. Invokes the signUp method to sign up a user.
 * 2. Invokes the adminGetUser method to get the user's confirmation status.
 * 3. Invokes the ResendConfirmationCode method if the user requested another
 * code.
 * 4. Invokes the confirmSignUp method.
 * 5. Invokes the AdminInitiateAuth to sign in. This results in being prompted
 * to set up TOTP (time-based one-time password). (The response is
 * “ChallengeName”: “MFA_SETUP”).
 * 6. Invokes the AssociateSoftwareToken method to generate a TOTP MFA private
 * key. This can be used with Google Authenticator.
 * 7. Invokes the VerifySoftwareToken method to verify the TOTP and register for
 * MFA.
 * 8. Invokes the AdminInitiateAuth to sign in again. This results in being
 * prompted to submit a TOTP (Response: “ChallengeName”: “SOFTWARE_TOKEN_MFA”).
 * 9. Invokes the AdminRespondToAuthChallenge to get back a token.
 */

public class CognitoMVP {
```

```
   public static final String DASHES = new String(new char[80]).replace("\0", "-");

   public static void main(String[] args) throws NoSuchAlgorithmException,
InvalidKeyException {
       final String usage = """

               Usage:
                   <clientId> <poolId>

               Where:
                   clientId - The app client Id value that you can get from the AWS
CDK script.
                   poolId - The pool Id that you can get from the AWS CDK script.\s
               """;

       if (args.length != 2) {
           System.out.println(usage);
           System.exit(1);
       }

       String clientId = args[0];
       String poolId = args[1];
       CognitoIdentityProviderClient identityProviderClient =
CognitoIdentityProviderClient.builder()
               .region(Region.US_EAST_1)
               .build();

       System.out.println(DASHES);
       System.out.println("Welcome to the Amazon Cognito example scenario.");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("*** Enter your user name");
       Scanner in = new Scanner(System.in);
       String userName = in.nextLine();

       System.out.println("*** Enter your password");
       String password = in.nextLine();

       System.out.println("*** Enter your email");
       String email = in.nextLine();

       System.out.println("1. Signing up " + userName);
       signUp(identityProviderClient, clientId, userName, password, email);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Getting " + userName + " in the user pool");
        getAdminUser(identityProviderClient, userName, poolId);

        System.out
                .println("*** Conformation code sent to " + userName + ". Would you
like to send a new code? (Yes/No)");
        System.out.println(DASHES);

        System.out.println(DASHES);
        String ans = in.nextLine();

        if (ans.compareTo("Yes") == 0) {
            resendConfirmationCode(identityProviderClient, clientId, userName);
            System.out.println("3. Sending a new confirmation code");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Enter confirmation code that was emailed");
        String code = in.nextLine();
        confirmSignUp(identityProviderClient, clientId, code, userName);
        System.out.println("Rechecking the status of " + userName + " in the user
pool");
        getAdminUser(identityProviderClient, userName, poolId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Invokes the initiateAuth to sign in");
        AdminInitiateAuthResponse authResponse =
initiateAuth(identityProviderClient, clientId, userName, password,
                poolId);
        String mySession = authResponse.session();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Invokes the AssociateSoftwareToken method to generate
a TOTP key");
        String newSession = getSecretForAppMFA(identityProviderClient, mySession);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("*** Enter the 6-digit code displayed in Google
Authenticator");
        String myCode = in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Verify the TOTP and register for MFA");
        verifyTOTP(identityProviderClient, newSession, myCode);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Re-enter a 6-digit code displayed in Google
Authenticator");
        String mfaCode = in.nextLine();
        AdminInitiateAuthResponse authResponse1 =
initiateAuth(identityProviderClient, clientId, userName, password,
                poolId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9.  Invokes the AdminRespondToAuthChallenge");
        String session2 = authResponse1.session();
        adminRespondToAuthChallenge(identityProviderClient, userName, clientId,
mfaCode, session2);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("All Amazon Cognito operations were successfully
performed");
        System.out.println(DASHES);
    }

    // Respond to an authentication challenge.
    public static void adminRespondToAuthChallenge(CognitoIdentityProviderClient
identityProviderClient,
            String userName, String clientId, String mfaCode, String session) {
        System.out.println("SOFTWARE_TOKEN_MFA challenge is generated");
        Map<String, String> challengeResponses = new HashMap<>();

        challengeResponses.put("USERNAME", userName);
        challengeResponses.put("SOFTWARE_TOKEN_MFA_CODE", mfaCode);

        AdminRespondToAuthChallengeRequest respondToAuthChallengeRequest =
AdminRespondToAuthChallengeRequest.builder()
```

```
                .challengeName(ChallengeNameType.SOFTWARE_TOKEN_MFA)
                .clientId(clientId)
                .challengeResponses(challengeResponses)
                .session(session)
                .build();

        AdminRespondToAuthChallengeResponse respondToAuthChallengeResult =
identityProviderClient
                .adminRespondToAuthChallenge(respondToAuthChallengeRequest);
        System.out.println("respondToAuthChallengeResult.getAuthenticationResult()"
                + respondToAuthChallengeResult.authenticationResult());
    }

    // Verify the TOTP and register for MFA.
    public static void verifyTOTP(CognitoIdentityProviderClient
identityProviderClient, String session, String code) {
        try {
            VerifySoftwareTokenRequest tokenRequest =
VerifySoftwareTokenRequest.builder()
                    .userCode(code)
                    .session(session)
                    .build();

            VerifySoftwareTokenResponse verifyResponse =
identityProviderClient.verifySoftwareToken(tokenRequest);
            System.out.println("The status of the token is " +
verifyResponse.statusAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static AdminInitiateAuthResponse
initiateAuth(CognitoIdentityProviderClient identityProviderClient,
            String clientId, String userName, String password, String userPoolId) {
        try {
            Map<String, String> authParameters = new HashMap<>();
            authParameters.put("USERNAME", userName);
            authParameters.put("PASSWORD", password);

            AdminInitiateAuthRequest authRequest =
AdminInitiateAuthRequest.builder()
```

```
                    .clientId(clientId)
                    .userPoolId(userPoolId)
                    .authParameters(authParameters)
                    .authFlow(AuthFlowType.ADMIN_USER_PASSWORD_AUTH)
                    .build();

            AdminInitiateAuthResponse response =
identityProviderClient.adminInitiateAuth(authRequest);
            System.out.println("Result Challenge is : " + response.challengeName());
            return response;

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }

    public static String getSecretForAppMFA(CognitoIdentityProviderClient
identityProviderClient, String session) {
        AssociateSoftwareTokenRequest softwareTokenRequest =
AssociateSoftwareTokenRequest.builder()
                .session(session)
                .build();

        AssociateSoftwareTokenResponse tokenResponse = identityProviderClient
                .associateSoftwareToken(softwareTokenRequest);
        String secretCode = tokenResponse.secretCode();
        System.out.println("Enter this token into Google Authenticator");
        System.out.println(secretCode);
        return tokenResponse.session();
    }

    public static void confirmSignUp(CognitoIdentityProviderClient
identityProviderClient, String clientId, String code,
            String userName) {
        try {
            ConfirmSignUpRequest signUpRequest = ConfirmSignUpRequest.builder()
                    .clientId(clientId)
                    .confirmationCode(code)
                    .username(userName)
                    .build();
```

```
            identityProviderClient.confirmSignUp(signUpRequest);
            System.out.println(userName + " was confirmed");

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void resendConfirmationCode(CognitoIdentityProviderClient
identityProviderClient, String clientId,
            String userName) {
        try {
            ResendConfirmationCodeRequest codeRequest =
ResendConfirmationCodeRequest.builder()
                    .clientId(clientId)
                    .username(userName)
                    .build();

            ResendConfirmationCodeResponse response =
identityProviderClient.resendConfirmationCode(codeRequest);
            System.out.println("Method of delivery is " +
response.codeDeliveryDetails().deliveryMediumAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void signUp(CognitoIdentityProviderClient identityProviderClient,
String clientId, String userName,
            String password, String email) {
        AttributeType userAttrs = AttributeType.builder()
                .name("email")
                .value(email)
                .build();

        List<AttributeType> userAttrsList = new ArrayList<>();
        userAttrsList.add(userAttrs);
        try {
            SignUpRequest signUpRequest = SignUpRequest.builder()
                    .userAttributes(userAttrsList)
                    .username(userName)
```

```
                    .clientId(clientId)
                    .password(password)
                    .build();

            identityProviderClient.signUp(signUpRequest);
            System.out.println("User has been signed up ");

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void getAdminUser(CognitoIdentityProviderClient
 identityProviderClient, String userName,
            String poolId) {
        try {
            AdminGetUserRequest userRequest = AdminGetUserRequest.builder()
                    .username(userName)
                    .userPoolId(poolId)
                    .build();

            AdminGetUserResponse response =
 identityProviderClient.adminGetUser(userRequest);
            System.out.println("User status " + response.userStatusAsString());

        } catch (CognitoIdentityProviderException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AdminGetUser
  - AdminInitiateAuth
  - AdminRespondToAuthChallenge
  - AssociateSoftwareToken
  - ConfirmDevice
  - ConfirmSignUp

- InitiateAuth
- ListUsers
- ResendConfirmationCode
- RespondToAuthChallenge
- SignUp
- VerifySoftwareToken

# Amazon Comprehend contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon AWS SDK for Java 2.x Comprehend.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario

## Tindakan

### `CreateDocumentClassifier`

Contoh kode berikut menunjukkan cara menggunakan`CreateDocumentClassifier`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import
 software.amazon.awssdk.services.comprehend.model.CreateDocumentClassifierRequest;
import
 software.amazon.awssdk.services.comprehend.model.CreateDocumentClassifierResponse;
import
 software.amazon.awssdk.services.comprehend.model.DocumentClassifierInputDataConfig;

/**
 * Before running this code example, you can setup the necessary resources, such
 * as the CSV file and IAM Roles, by following this document:
 * https://aws.amazon.com/blogs/machine-learning/building-a-custom-classifier-using-
amazon-comprehend/
 *
 * Also, set up your development environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DocumentClassifierDemo {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <dataAccessRoleArn> <s3Uri> <documentClassifierName>

                Where:
                  dataAccessRoleArn - The ARN value of the role used for this
 operation.
                  s3Uri - The Amazon S3 bucket that contains the CSV file.
                  documentClassifierName - The name of the document classifier.
                """;
```

```
        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String dataAccessRoleArn = args[0];
        String s3Uri = args[1];
        String documentClassifierName = args[2];

        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        createDocumentClassifier(comClient, dataAccessRoleArn, s3Uri,
documentClassifierName);
        comClient.close();
    }

    public static void createDocumentClassifier(ComprehendClient comClient, String
dataAccessRoleArn, String s3Uri,
            String documentClassifierName) {
        try {
            DocumentClassifierInputDataConfig config =
DocumentClassifierInputDataConfig.builder()
                    .s3Uri(s3Uri)
                    .build();

            CreateDocumentClassifierRequest createDocumentClassifierRequest =
CreateDocumentClassifierRequest.builder()
                    .documentClassifierName(documentClassifierName)
                    .dataAccessRoleArn(dataAccessRoleArn)
                    .languageCode("en")
                    .inputDataConfig(config)
                    .build();

            CreateDocumentClassifierResponse createDocumentClassifierResult =
comClient
                    .createDocumentClassifier(createDocumentClassifierRequest);
            String documentClassifierArn =
createDocumentClassifierResult.documentClassifierArn();
            System.out.println("Document Classifier ARN: " + documentClassifierArn);
```

```
        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateDocumentClassifierdi Referensi AWS SDK for Java 2.x API.

### `DetectDominantLanguage`

Contoh kode berikut menunjukkan cara menggunakan`DetectDominantLanguage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import
 software.amazon.awssdk.services.comprehend.model.DetectDominantLanguageRequest;
import
 software.amazon.awssdk.services.comprehend.model.DetectDominantLanguageResponse;
import software.amazon.awssdk.services.comprehend.model.DominantLanguage;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectLanguage {
```

```
    public static void main(String[] args) {
        // Specify French text - "It is raining today in Seattle".
        String text = "Il pleut aujourd'hui à Seattle";
        Region region = Region.US_EAST_1;

        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectDominantLanguage");
        detectTheDominantLanguage(comClient, text);
        comClient.close();
    }

    public static void detectTheDominantLanguage(ComprehendClient comClient, String
 text) {
        try {
            DetectDominantLanguageRequest request =
 DetectDominantLanguageRequest.builder()
                    .text(text)
                    .build();

            DetectDominantLanguageResponse resp =
 comClient.detectDominantLanguage(request);
            List<DominantLanguage> allLanList = resp.languages();
            for (DominantLanguage lang : allLanList) {
                System.out.println("Language is " + lang.languageCode());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectDominantLanguagedi Referensi AWS SDK for Java 2.x API.

### `DetectEntities`

Contoh kode berikut menunjukkan cara menggunakan`DetectEntities`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.DetectEntitiesRequest;
import software.amazon.awssdk.services.comprehend.model.DetectEntitiesResponse;
import software.amazon.awssdk.services.comprehend.model.Entity;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectEntities {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectEntities");
        detectAllEntities(comClient, text);
        comClient.close();
    }

    public static void detectAllEntities(ComprehendClient comClient, String text) {
        try {
```

```
            DetectEntitiesRequest detectEntitiesRequest =
 DetectEntitiesRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectEntitiesResponse detectEntitiesResult =
 comClient.detectEntities(detectEntitiesRequest);
            List<Entity> entList = detectEntitiesResult.entities();
            for (Entity entity : entList) {
                System.out.println("Entity text is " + entity.text());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectEntitiesdi Referensi AWS SDK for Java 2.x API.

### `DetectKeyPhrases`

Contoh kode berikut menunjukkan cara menggunakan`DetectKeyPhrases`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.DetectKeyPhrasesRequest;
import software.amazon.awssdk.services.comprehend.model.DetectKeyPhrasesResponse;
import software.amazon.awssdk.services.comprehend.model.KeyPhrase;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectKeyPhrases {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectKeyPhrases");
        detectAllKeyPhrases(comClient, text);
        comClient.close();
    }

    public static void detectAllKeyPhrases(ComprehendClient comClient, String text)
 {
        try {
            DetectKeyPhrasesRequest detectKeyPhrasesRequest =
 DetectKeyPhrasesRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectKeyPhrasesResponse detectKeyPhrasesResult =
 comClient.detectKeyPhrases(detectKeyPhrasesRequest);
            List<KeyPhrase> phraseList = detectKeyPhrasesResult.keyPhrases();
            for (KeyPhrase keyPhrase : phraseList) {
                System.out.println("Key phrase text is " + keyPhrase.text());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
}
```

- Untuk detail API, lihat DetectKeyPhrasesdi Referensi AWS SDK for Java 2.x API.

### `DetectSentiment`

Contoh kode berikut menunjukkan cara menggunakan`DetectSentiment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import software.amazon.awssdk.services.comprehend.model.DetectSentimentRequest;
import software.amazon.awssdk.services.comprehend.model.DetectSentimentResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectSentiment {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
```

```
                .region(region)
                .build();

        System.out.println("Calling DetectSentiment");
        detectSentiments(comClient, text);
        comClient.close();
    }

    public static void detectSentiments(ComprehendClient comClient, String text) {
        try {
            DetectSentimentRequest detectSentimentRequest =
 DetectSentimentRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectSentimentResponse detectSentimentResult =
 comClient.detectSentiment(detectSentimentRequest);
            System.out.println("The Neutral value is " +
 detectSentimentResult.sentimentScore().neutral());

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectSentimentdi Referensi AWS SDK for Java 2.x API.

### `DetectSyntax`

Contoh kode berikut menunjukkan cara menggunakan`DetectSyntax`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.comprehend.ComprehendClient;
import software.amazon.awssdk.services.comprehend.model.ComprehendException;
import software.amazon.awssdk.services.comprehend.model.DetectSyntaxRequest;
import software.amazon.awssdk.services.comprehend.model.DetectSyntaxResponse;
import software.amazon.awssdk.services.comprehend.model.SyntaxToken;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectSyntax {
    public static void main(String[] args) {
        String text = "Amazon.com, Inc. is located in Seattle, WA and was founded
 July 5th, 1994 by Jeff Bezos, allowing customers to buy everything from books to
 blenders. Seattle is north of Portland and south of Vancouver, BC. Other notable
 Seattle - based companies are Starbucks and Boeing.";
        Region region = Region.US_EAST_1;
        ComprehendClient comClient = ComprehendClient.builder()
                .region(region)
                .build();

        System.out.println("Calling DetectSyntax");
        detectAllSyntax(comClient, text);
        comClient.close();
    }

    public static void detectAllSyntax(ComprehendClient comClient, String text) {
        try {
            DetectSyntaxRequest detectSyntaxRequest = DetectSyntaxRequest.builder()
                    .text(text)
                    .languageCode("en")
                    .build();

            DetectSyntaxResponse detectSyntaxResult =
 comClient.detectSyntax(detectSyntaxRequest);
            List<SyntaxToken> syntaxTokens = detectSyntaxResult.syntaxTokens();
            for (SyntaxToken token : syntaxTokens) {
```

```
                System.out.println("Language is " + token.text());
                System.out.println("Part of speech is " +
 token.partOfSpeech().tagAsString());
            }

        } catch (ComprehendException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectSyntaxdi Referensi AWS SDK for Java 2.x API.

## Skenario

Membangun chatbot Amazon Lex

Contoh kode berikut menunjukkan cara membuat chatbot untuk melibatkan pengunjung situs web Anda.

SDK untuk Java 2.x

> Menunjukkan cara menggunakan Amazon Lex API untuk membuat Chatbot dalam aplikasi web untuk melibatkan pengunjung situs web Anda.
>
> Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.
>
> Layanan yang digunakan dalam contoh ini
>
> - Amazon Comprehend
> - Amazon Lex
> - Amazon Translate

Buat aplikasi perpesanan

Contoh kode berikut menunjukkan cara membuat aplikasi pesan dengan menggunakan Amazon SQS.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon SQS API untuk mengembangkan Spring REST API yang mengirim dan mengambil pesan.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Amazon SQS

## Buat aplikasi untuk menganalisis umpan balik pelanggan

Contoh kode berikut menunjukkan cara membuat aplikasi yang menganalisis kartu komentar pelanggan, menerjemahkannya dari bahasa aslinya, menentukan sentimen mereka, dan menghasilkan file audio dari teks yang diterjemahkan.

SDK untuk Java 2.x

Aplikasi contoh ini menganalisis dan menyimpan kartu umpan balik pelanggan. Secara khusus, ini memenuhi kebutuhan hotel fiktif di New York City. Hotel menerima umpan balik dari para tamu dalam berbagai bahasa dalam bentuk kartu komentar fisik. Umpan balik itu diunggah ke aplikasi melalui klien web. Setelah gambar kartu komentar diunggah, langkah-langkah berikut terjadi:

- Teks diekstraksi dari gambar menggunakan Amazon Textract.
- Amazon Comprehend menentukan sentimen teks yang diekstraksi dan bahasanya.
- Teks yang diekstraksi diterjemahkan ke bahasa Inggris menggunakan Amazon Translate.
- Amazon Polly mensintesis file audio dari teks yang diekstraksi.

Aplikasi lengkap dapat digunakan dengan. AWS CDK Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract

- Amazon Translate

# AWS Control Tower contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS Control Tower.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

Halo AWS Control Tower

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS Control Tower.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class HelloControlTower {
```

```
   public static void main(String[] args) {
       try {
           ControlTowerClient controlTowerClient = ControlTowerClient.builder()
               .build() ;
           helloControlTower(controlTowerClient);
       } catch (ControlTowerException e) {
           System.out.println("Control Tower error occurred: " +
e.awsErrorDetails().errorMessage());
       }
   }

   /**
    * Use the AWS SDK for Java (v2) to create an AWS Control Tower client
    * and list all available baselines.
    * This example uses the default settings specified in your shared credentials
    * and config files.
    *
    * @param controlTowerClient A ControlTowerClient object. This object wraps
    *                           the low-level AWS Control Tower service API.
    */
   public static void helloControlTower(ControlTowerClient controlTowerClient) {
       System.out.println("Hello, AWS Control Tower! Let's list available
baselines:\n");

       ListBaselinesIterable paginator = controlTowerClient.listBaselinesPaginator(
               ListBaselinesRequest.builder().build());
       List<String> baselineNames = new ArrayList<>();

       try {
           paginator.stream()
               .flatMap(response -> response.baselines().stream())
                   .forEach(baseline -> baselineNames.add(baseline.name()));

           System.out.println(baselineNames.size() + " baseline(s) retrieved.");
           for (String baselineName : baselineNames) {
               System.out.println("\t" + baselineName);
           }

       } catch (ControlTowerException e) {
           if ("AccessDeniedException".equals(e.awsErrorDetails().errorCode())) {
               System.out.println("Access denied. Please ensure you have the
necessary permissions.");
           } else {
               System.out.println("An error occurred: " + e.getMessage());
```

```
            }
        }
    }
}
```

- Untuk detail API, lihat ListBaselinesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Daftar zona pendaratan.
- Buat daftar, aktifkan, dapatkan, atur ulang, dan nonaktifkan garis dasar.
- Daftar, aktifkan, dapatkan, dan nonaktifkan kontrol.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan AWS Control Tower fitur.

```
public class ControlTowerScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Scanner scanner = new Scanner(in);

    private static OrganizationsClient orgClient;
    private static ControlCatalogClient catClient;

    private static String ouId = null;
    private static String ouArn = null;
    private static String landingZoneArn = null;
    private static boolean useLandingZone = false;
```

```
    private String stack = null;
    private String accountId = null;

    public static void main(String[] args) {

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Control Tower basics scenario!");
        System.out.println(DASHES);

        try {
            runScenarioAsync();
        } catch (Exception e) {
            e.printStackTrace();
        }
    }

    // ----------------------------
    // Utilities
    // ----------------------------
    private static boolean askYesNo(String msg) {
        System.out.println(msg);
        return scanner.nextLine().trim().toLowerCase().startsWith("y");
    }

    private static void runScenarioAsync() {
        try {
            ControlTowerActions actions = new ControlTowerActions();

            // ----------------------------
            // Step 1: Landing Zones
            // ----------------------------
            System.out.println(DASHES);
            System.out.println("""
        Some demo operations require the use of a landing zone.
        You can use an existing landing zone or opt out of these operations in the
 demo.
        For instructions on how to set up a landing zone,
        see https://docs.aws.amazon.com/controltower/latest/userguide/getting-
started-from-console.html
        """);

            System.out.println("Step 1: Listing landing zones...");
            waitForInputToContinue(scanner);
```

```
            List<LandingZoneSummary> landingZones =
                    actions.listLandingZonesAsync().join();

            if (landingZones.isEmpty()) {
                System.out.println("No landing zones found. Landing-zone-dependent
steps will be skipped.");
                useLandingZone = false;
                waitForInputToContinue(scanner);
            } else {
                System.out.println("\nAvailable Landing Zones:");
                for (int i = 0; i < landingZones.size(); i++) {
                    System.out.printf("%d) %s%n", i + 1, landingZones.get(i).arn());
                }

                if (askYesNo("Do you want to use the first landing zone in the list
(" +
                        landingZones.get(0).arn() + ")? (y/n): ")) {
                    useLandingZone = true;
                    landingZoneArn = landingZones.get(0).arn();
                } else if (askYesNo("Do you want to use a different existing Landing
Zone for this demo? (y/n): ")) {
                    useLandingZone = true;
                    System.out.println("Enter landing zone ARN: ");
                    landingZoneArn = scanner.nextLine().trim();
                } else {
                    System.out.println("Proceeding without a landing zone.");
                    useLandingZone = false;
                    waitForInputToContinue(scanner);
                }
            }

            // ----------------------------
            // Setup Organization + Sandbox OU
            // ----------------------------
            if (useLandingZone) {
                System.out.println("Using landing zone ARN: " + landingZoneArn);

                ControlTowerActions.OrgSetupResult result =
                        actions.setupOrganizationAsync().join();

                ouArn = result.sandboxOuArn();
                ouId  = result.sandboxOuArn();

                System.out.println("Organization ID: " + result.orgId());
```

```
                System.out.println("Using Sandbox OU ARN: " + ouArn);
            }

            // ----------------------------
            // Step 2: Baselines
            // ----------------------------
            System.out.println(DASHES);
            System.out.println("Step 2: Listing available baselines...");
            System.out.println("""
In this step, the program lists available AWS Control Tower baselines and may
 perform
baseline-related operations (enable, disable, reset) if requested.

NOTE:
AWS Control Tower enforces governance through baselines and mandatory controls
(guardrails). Mandatory controls are required for landing zone governance and may
restrict certain operations depending on the account, region, or organizational
 policy.

For more information, see:
- Types of baselines in AWS Control Tower:
  https://docs.aws.amazon.com/controltower/latest/userguide/types-of-baselines.html
- Mandatory controls (guardrails) in AWS Control Tower:
  https://docs.aws.amazon.com/controltower/latest/controlreference/mandatory-
controls.html
- Baseline API examples:
  https://docs.aws.amazon.com/controltower/latest/userguide/baseline-api-
examples.html
""");



            waitForInputToContinue(scanner);
            List<BaselineSummary> baselines =
                    actions.listBaselinesAsync().join();

            BaselineSummary controlTowerBaseline = null;
            for (BaselineSummary b : baselines) {
                System.out.println("Baseline: " + b.name());
                System.out.println("  ARN: " + b.arn());
                if ("AWSControlTowerBaseline".equals(b.name())) {
                    controlTowerBaseline = b;
                }
            }
```

```
            waitForInputToContinue(scanner);

            if (useLandingZone && controlTowerBaseline != null) {

                System.out.println("\nListing enabled baselines:");
                List<EnabledBaselineSummary> enabledBaselines =
                        actions.listEnabledBaselinesAsync().join();

                String enabledBaselineArn = null;
                for (EnabledBaselineSummary eb : enabledBaselines) {
                    System.out.println("Checking enabled baseline ARN: " +
 eb.arn());
                    if (eb.baselineIdentifier().equals(controlTowerBaseline.arn()))
 {
                        enabledBaselineArn = eb.arn(); // correct enabled ARN for
 this baseline
                        break; // stop after finding the matching one
                    }
                }

                if (enabledBaselineArn == null) {
                    System.out.println("No enabled baseline found for " +
 controlTowerBaseline.arn());
                } else {
                    System.out.println("Selected enabled baseline ARN for reset/
disable: " + enabledBaselineArn);
                }


                // Enable the Baseline
                if (askYesNo("Do you want to enable the Control Tower Baseline? (y/
n): ")) {
                    System.out.println("\nEnabling Control Tower Baseline...");

                    String baselineId = controlTowerBaseline.arn();
                    String enabledBaselineId =
                            actions.enableBaselineAsync(
                                    ouArn,                  // targetIdentifier #
 the OU or account ARN
                                    baselineId,             // baselineIdentifier #
 the Control Tower baseline ARN
                                    "5.0"                   // baselineVersion #
 version string
```

```
                        ).join();


                System.out.println("Enabled baseline operation ID: " +
enabledBaselineId);
                if (enabledBaselineId == null) {
                   enabledBaselineId = enabledBaselineArn;
                }

                // Reset the Baseline
                if (askYesNo("Do you want to reset the Control Tower Baseline?
(y/n): ")) {
                    String operationId =

actions.resetEnabledBaselineAsync(enabledBaselineId).join();
                    System.out.println("Reset baseline operation ID: " +
operationId);
                }

                if (askYesNo("Do you want to disable the Control Tower Baseline?
(y/n): ")) {
                    String operationId =

actions.disableBaselineAsync(enabledBaselineId).join();
                    System.out.println("Disabled baseline operation ID: " +
operationId);

                    System.out.println("Now we will re-enable the baseline and
wait 1 minute before making the call...");
                    try {
                        Thread.sleep(Duration.ofMinutes(1).toMillis());
                    } catch (InterruptedException e) {
                        Thread.currentThread().interrupt();
                        System.out.println("Wait interrupted");
                    }
                    String reEnabledBaselineId = actions.enableBaselineAsync(
                            ouArn,
                            baselineId,  // reuse baseline definition ARN
                            "5.0"
                    ).join();

                    System.out.println("Re-enabled baseline operation ID: " +
reEnabledBaselineId);
                }
```

```
                }
            }

            // ----------------------------
            // Step 3: Controls
            // ----------------------------
            System.out.println(DASHES);
            System.out.println("Step 3: Managing Controls:");
            waitForInputToContinue(scanner);

            List<ControlSummary> controls =
                    actions.listControlsAsync().join();

            System.out.println("\nListing first 5 available Controls:");
            for (int i = 0; i < Math.min(5, controls.size()); i++) {
                ControlSummary c = controls.get(i);
                System.out.println("%d. %s - %s".formatted(i + 1, c.name(),
c.arn()));
            }

            if (useLandingZone) {
                waitForInputToContinue(scanner);

                List<EnabledControlSummary> enabledControls =
                        actions.listEnabledControlsAsync(ouArn).join();

                System.out.println("\nListing enabled controls:");
                for (int i = 0; i < enabledControls.size(); i++) {
                    System.out.println("%d. %s".formatted(i + 1,
enabledControls.get(i).controlIdentifier()));
                }

                String controlArnToEnable = null;
                for (ControlSummary control : controls) {
                    boolean enabled = enabledControls.stream()
                            .anyMatch(ec ->
ec.controlIdentifier().equals(control.arn()));
                    if (!enabled) {
                        controlArnToEnable = control.arn();
                        break;
                    }
                }

                waitForInputToContinue(scanner);
```

```
                if (controlArnToEnable != null &&
                        askYesNo("Do you want to enable the control " +
controlArnToEnable + "? (y/n): ")) {

                    String operationId =
                            actions.enableControlAsync(controlArnToEnable,
ouArn).join();

                    System.out.println("Enabled control with operation ID: " +
operationId);
                }

                waitForInputToContinue(scanner);

                if (controlArnToEnable != null &&
                        askYesNo("Do you want to disable the control? (y/n): ")) {

                    String operationId =
                            actions.disableControlAsync(controlArnToEnable,
ouArn).join();

                    System.out.println("Disable operation ID: " + operationId);
                }
            }
            System.out.println("\nThis concludes the example scenario.");
            System.out.println("Thanks for watching!");
            System.out.println(DASHES);

        } catch (CompletionException e) {
            Throwable cause = e.getCause() != null ? e.getCause() : e;
            System.out.println("Scenario failed: " + cause.getMessage());
            throw e; // bubble up for tests / callers
        } catch (Exception e) {
            System.out.println("Unexpected error running scenario: " +
e.getMessage());
            throw new RuntimeException(e);
        }
    }

    private static void waitForInputToContinue(Scanner sc) {
        System.out.println("\nEnter 'c' then <ENTER> to continue:");
        while (true) {
            String input = sc.nextLine();
            if ("c".equalsIgnoreCase(input.trim())) {
```

```
                System.out.println("Continuing...");
                break;
            }
        }
    }
}

public class ControlTowerActions {
    private static ControlCatalogAsyncClient controlCatalogAsyncClient;
    private static ControlTowerAsyncClient controlTowerAsyncClient;
    private static OrganizationsAsyncClient orgAsyncClient;

    private static OrganizationsAsyncClient getAsyncOrgClient() {
        if (orgAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(50)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .build();

            orgAsyncClient = OrganizationsAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return orgAsyncClient;
    }

    private static ControlCatalogAsyncClient getAsyncCatClient() {
        if (controlCatalogAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();
```

```
            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            controlCatalogAsyncClient = ControlCatalogAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return controlCatalogAsyncClient;
    }

    private static ControlTowerAsyncClient getAsyncClient() {
        if (controlTowerAsyncClient == null) {

            SdkAsyncHttpClient httpClient =
                    AwsCrtAsyncHttpClient.builder()
                            .maxConcurrency(100)
                            .connectionTimeout(Duration.ofSeconds(60))
                            .build();

            ClientOverrideConfiguration overrideConfig =
                    ClientOverrideConfiguration.builder()
                            .apiCallTimeout(Duration.ofMinutes(2))
                            .apiCallAttemptTimeout(Duration.ofSeconds(90))
                            .retryStrategy(RetryMode.STANDARD)
                            .build();

            controlTowerAsyncClient =
                    ControlTowerAsyncClient.builder()
                            .httpClient(httpClient)
                            .overrideConfiguration(overrideConfig)
                            .build();
        }

        return controlTowerAsyncClient;
    }

    public record OrgSetupResult(String orgId, String sandboxOuArn) {
    }
```

```
   public CompletableFuture<OrgSetupResult> setupOrganizationAsync() {
       System.out.println("Starting organization setup…");

       OrganizationsAsyncClient client = getAsyncOrgClient();

       // Step 1: Describe or create organization
       CompletableFuture<Organization> orgFuture = client.describeOrganization()
               .thenApply(desc -> {
                   System.out.println("Organization exists: " +
desc.organization().id());
                   return desc.organization();
               })
               .exceptionallyCompose(ex -> {
                   Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                   if (cause instanceof AwsServiceException awsEx &&

"AWSOrganizationsNotInUseException".equals(awsEx.awsErrorDetails().errorCode())) {
                       System.out.println("No organization found. Creating one…");
                       return
client.createOrganization(CreateOrganizationRequest.builder()
                                       .featureSet(OrganizationFeatureSet.ALL)
                                       .build())
                               .thenApply(createResp -> {
                                   System.out.println("Created organization: {}" +
createResp.organization().id());
                                   return createResp.organization();
                               });
                   }
                   return CompletableFuture.failedFuture(
                           new CompletionException("Failed to describe or create
organization", cause)
                   );
               });

       // Step 2: Locate Sandbox OU
       return orgFuture.thenCompose(org -> {
           String orgId = org.id();
           System.out.println("Organization ID: {}" + orgId);

           return client.listRoots()
                   .thenCompose(rootsResp -> {
                       if (rootsResp.roots().isEmpty()) {
                           return CompletableFuture.failedFuture(
```

```
                                    new RuntimeException("No root found in
organization")
                            );
                        }
                        String rootId = rootsResp.roots().get(0).id();

                        ListOrganizationalUnitsForParentRequest ouRequest =
                                ListOrganizationalUnitsForParentRequest.builder()
                                        .parentId(rootId)
                                        .build();

                        ListOrganizationalUnitsForParentPublisher paginator =

client.listOrganizationalUnitsForParentPaginator(ouRequest);

                        AtomicReference<String> sandboxOuArnRef = new
AtomicReference<>();
                        return paginator.subscribe(page -> {
                                    for (OrganizationalUnit ou :
page.organizationalUnits()) {
                                        if ("Sandbox".equals(ou.name())) {
                                            sandboxOuArnRef.set(ou.arn());
                                            System.out.println("Found Sandbox OU: "
+ ou.id());
                                            break;
                                        }
                                    }
                                })
                                .thenApply(v -> {
                                    String sandboxArn = sandboxOuArnRef.get();
                                    if (sandboxArn == null) {
                                        System.out.println("Sandbox OU not found.");
                                    }
                                    return new OrgSetupResult(orgId, sandboxArn);
                                });
                    });
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
            System.out.println("Failed to setup organization: {}" +
cause.getMessage());
            throw new CompletionException(cause);
        });
    }
```

```
    /**
     * Lists all landing zones using pagination to retrieve complete results.
     *
     * @return a list of all landing zones
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<LandingZoneSummary>> listLandingZonesAsync() {
        System.out.println("Starting list landing zones paginator…");

        ListLandingZonesRequest request = ListLandingZonesRequest.builder().build();
        ListLandingZonesPublisher paginator =
 getAsyncClient().listLandingZonesPaginator(request);
        List<LandingZoneSummary> landingZones = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.landingZones() != null && !
response.landingZones().isEmpty()) {
                        response.landingZones().forEach(lz -> {
                            System.out.println("Landing zone ARN: " + lz.arn());
                            landingZones.add(lz);
                        });
                    } else {
                        System.out.println("Page contained no landing zones.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved "+
 landingZones.size() + " landing zones." ))
                .thenApply(v -> landingZones)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing landing zones: "
 + e.getMessage(), e);
                            default:
                                throw new CompletionException(
                                        "Error listing landing zones: " +
 e.getMessage(), e);
                        }
```

```
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing landing zones: " +
 cause.getMessage(), cause);
                    }

                    throw new CompletionException("Failed to list landing zones",
 cause);
                });
    }


    /**
     * Lists all available baselines using pagination to retrieve complete results.
     *
     * @return a list of all baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<BaselineSummary>> listBaselinesAsync() {
        System.out.println("Starting list baselines paginator…");
        ListBaselinesRequest request = ListBaselinesRequest.builder().build();
        ListBaselinesPublisher paginator =
                getAsyncClient().listBaselinesPaginator(request);

        List<BaselineSummary> baselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.baselines() != null && !
response.baselines().isEmpty()) {
                        response.baselines().forEach(baseline -> {
                            baselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println("Successfully listed baselines. Total: "
 + baselines.size())
                )
                .thenApply(v -> baselines)
                .exceptionally(ex -> {
```

```
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing baselines:
%s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Error listing baselines:
%s".formatted(e.getMessage()),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing baselines:
%s".formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException("Failed to list baselines",
cause);
                });
    }

    /**
     * Lists all enabled baselines using pagination to retrieve complete results.
     *
     * @return a list of all enabled baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledBaselineSummary>>
listEnabledBaselinesAsync() {
        System.out.println("Starting list enabled baselines paginator…");
```

```
        ListEnabledBaselinesRequest request =
                ListEnabledBaselinesRequest.builder().build();

        ListEnabledBaselinesPublisher paginator =
                getAsyncClient().listEnabledBaselinesPaginator(request);

        List<EnabledBaselineSummary> enabledBaselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.enabledBaselines() != null
                            && !response.enabledBaselines().isEmpty()) {

                        response.enabledBaselines().forEach(baseline -> {
                            enabledBaselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no enabled baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println(
                                "Successfully listed enabled baselines. Total: " +
                                        enabledBaselines.size()
                        )
                )
                .thenApply(v -> enabledBaselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing enabled baselines:
%s".formatted(e.getMessage()), e);
                        }

                        throw new CompletionException(
                                "Error listing enabled baselines: %s"
                                        .formatted(e.getMessage()),
                                e
                        );
                    }
```

```
                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing enabled baselines: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to list enabled baselines",
                            cause
                    );
                });
    }


    /**
     * Asynchronously enables a baseline for the specified target if not already
enabled.
     *
     * @param targetIdentifier       The ARN of the target (OU or account).
     * @param baselineIdentifier     The baseline definition ARN to enable.
     * @param baselineVersion        The baseline version to enable.
     * @return A CompletableFuture containing the enabled baseline ARN, or null if
already enabled.
     */
    public CompletableFuture<String> enableBaselineAsync(
            String targetIdentifier,
            String baselineIdentifier,
            String baselineVersion
    ) {
        EnableBaselineRequest request = EnableBaselineRequest.builder()
                .baselineIdentifier(baselineIdentifier)
                .baselineVersion(baselineVersion)
                .targetIdentifier(targetIdentifier)
                .build();

        return getAsyncClient().enableBaseline(request)
                .handle((resp, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ControlTowerException e) {
```

```
                            String code = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                            String msg = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                            if ("ValidationException".equals(code) &&
msg.contains("already enabled")) {
                                System.out.println("Baseline is already enabled for
this target # fetching ARN...");
                                return fetchEnabledBaselineArn(targetIdentifier,
baselineIdentifier)
                                        .join(); // fetch existing ARN synchronously
                            }

                            throw new RuntimeException("Error enabling baseline: " +
code + " - " + msg, e);
                        }

                        throw new RuntimeException("Unexpected error enabling
baseline: " + cause.getMessage(), cause);
                    }

                    return resp;
                })
                .thenCompose(result -> {
                    if (result instanceof EnableBaselineResponse resp) {
                        String operationId = resp.operationIdentifier();
                        String enabledBaselineArn = resp.arn();
                        System.out.println("Baseline enable started. ARN: " +
enabledBaselineArn
                                + ", operation ID: " + operationId);

                        // Inline polling
                        return CompletableFuture.supplyAsync(() -> {
                            while (true) {
                                GetBaselineOperationRequest opReq =
GetBaselineOperationRequest.builder()
                                        .operationIdentifier(operationId)
                                        .build();

                                GetBaselineOperationResponse opResp =
getAsyncClient().getBaselineOperation(opReq).join();
                                BaselineOperation op = opResp.baselineOperation();
                                BaselineOperationStatus status = op.status();
```

```
                                System.out.println("Operation " + operationId + "
status: " + status);

                                if (status == BaselineOperationStatus.SUCCEEDED) {
                                    return enabledBaselineArn;
                                } else if (status == BaselineOperationStatus.FAILED)
{
                                    String opId = op.operationIdentifier();
                                    String reason = op.statusMessage() != null ?
op.statusMessage() : "No failure reason provided";
                                    throw new RuntimeException("Baseline operation
failed (ID: " + opId + "), status: "
                                            + status + ", reason: " + reason);
                                }

                                try {
                                    Thread.sleep(Duration.ofSeconds(15).toMillis());
                                } catch (InterruptedException e) {
                                    Thread.currentThread().interrupt();
                                    throw new RuntimeException(e);
                                }
                            }
                        });
                } else if (result instanceof String existingArn) {
                    // Already enabled branch
                    return CompletableFuture.completedFuture(existingArn);
                }

                return CompletableFuture.completedFuture(null);
            });
    }


    /**
     * Fetches the ARN of an already-enabled baseline for the target asynchronously.
     */
    private CompletableFuture<String> fetchEnabledBaselineArn(String
targetIdentifier, String baselineIdentifier) {
        return
getAsyncClient().listEnabledBaselines(ListEnabledBaselinesRequest.builder().build())
                .thenApply(listResp -> {
                    for (EnabledBaselineSummary eb : listResp.enabledBaselines()) {
                        if (baselineIdentifier.equals(eb.baselineIdentifier())
                                && targetIdentifier.equals(eb.targetIdentifier())) {
```

```
                        return eb.arn();
                    }
                }
                return null; // not yet available
            });
    }


    /**
     * Disables a baseline for a specified target.
     *
     * @param enabledBaselineIdentifier the identifier of the enabled baseline to
disable
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> disableBaselineAsync(String
enabledBaselineIdentifier) {

        System.out.println("Starting disable of enabled baseline…");
        System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

        DisableBaselineRequest request = DisableBaselineRequest.builder()
                .enabledBaselineIdentifier(enabledBaselineIdentifier)
                .build();

        return getAsyncClient().disableBaseline(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable baseline operation ID: " +
operationId);

                    // CompletableFuture that will be completed when operation
finishes
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    // Polling loop
                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getBaselineOperationAsync(operationId)
```

```
                                    .thenAccept(statusObj -> {
                                        String status = statusObj.toString(); //
Convert enum/status to string for printing
                                        System.out.println("Current disable
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                        if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                            System.out.println("Disable operation
finished with status: " + status);
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Schedule next poll in 15 seconds
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught while
disabling baseline: Code=" + errorCode + ", Message=" + errorMessage);
                        return null;
```

```
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught while disabling
baseline: " + sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception while disabling
baseline: " + cause.getMessage());
                    return null;
                });
    }



    /**
     * Gets the status of a baseline operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<BaselineOperationStatus> getBaselineOperationAsync(
            String operationIdentifier) {

        GetBaselineOperationRequest request = GetBaselineOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getBaselineOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null
                                ? exception.getCause()
                                : exception;

                        if (cause instanceof ControlTowerException e) {
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Baseline operation not found: %s"
```

```
                                                .formatted(e.getMessage()),
                                        e
                                    );
                            }

                            throw new CompletionException(
                                    "Error getting baseline operation status: %s"
                                            .formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting baseline operation status:
%s"
                                            .formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to get baseline operation status",
                                cause
                        );
                    }
                })
                .thenApply(response -> {
                    BaselineOperationStatus status =
                            response.baselineOperation().status();
                    return status;
                });
    }


    /**
     * Lists all enabled controls for a specific target using pagination.
     *
     * @param targetIdentifier the identifier of the target (e.g., OU ARN)
     * @return a list of enabled controls
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
```

```
    public CompletableFuture<List<EnabledControlSummary>>
 listEnabledControlsAsync(String targetIdentifier) {
        System.out.println("Starting list enabled controls paginator for target " +
 targetIdentifier);
        ListEnabledControlsRequest request = ListEnabledControlsRequest.builder()
                .targetIdentifier(targetIdentifier)
                .build();

        ListEnabledControlsPublisher paginator =
 getAsyncClient().listEnabledControlsPaginator(request);
        List<EnabledControlSummary> enabledControls = new ArrayList<>();

        // Subscribe to the paginator asynchronously
        return paginator.subscribe(response -> {
                    if (response.enabledControls() != null && !
response.enabledControls().isEmpty()) {
                        response.enabledControls().forEach(control -> {
                            enabledControls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no enabled controls.");
                    }
                })
                .thenRun(() -> System.out.println(
                        "Successfully retrieved "+enabledControls.size() +" enabled
 controls for target "+targetIdentifier
                ))
                .thenApply(v -> enabledControls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing enabled
 controls: %s".formatted(e.getMessage()), e);

                            case "ResourceNotFoundException":
                                if (e.getMessage() != null &&
 e.getMessage().contains("not registered with AWS Control Tower")) {
                                    throw new CompletionException(
```

```
                                                "Control Tower must be enabled to work
with controls", e);
                                }
                                throw new CompletionException(
                                        "Target not found when listing enabled
controls: %s".formatted(e.getMessage()), e);

                            default:
                                throw new CompletionException(
                                        "Error listing enabled controls:
%s".formatted(e.getMessage()), e);
                            }
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing enabled controls:
%s".formatted(cause.getMessage()), cause);
                    }

                    throw new CompletionException("Failed to list enabled controls",
cause);
                });
    }


    /**
     * Enables a control for a specified target.
     *
     * @param controlIdentifier the identifier of the control to enable
     * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> enableControlAsync(
            String controlIdentifier,
            String targetIdentifier) {

        EnableControlRequest request = EnableControlRequest.builder()
                .controlIdentifier(controlIdentifier)
                .targetIdentifier(targetIdentifier)
                .build();
```

```
        return getAsyncClient().enableControl(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Enable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
```

```
                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        String message = e.getMessage() != null ? e.getMessage() :
"";

                        if ("ValidationException".equals(errorCode)
                                && message.contains("already enabled")) {
                            System.out.println("Control is already enabled for this
target");
                            return null;
                        }

                        if ("ResourceNotFoundException".equals(errorCode)
                                && message.contains("not registered with AWS Control
Tower")) {
                            System.out.println(
                                    "Control Tower must be enabled to work with
controls.");
                            return null;
                        }

                        throw new CompletionException(
                                "Couldn't enable control: %s".formatted(message),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error enabling control: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to enable control",
                            cause
                    );
                });
    }


    /**
```

```
     * Disables a control for a specified target.
     *
     * @param controlIdentifier the identifier of the control to disable
     * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> disableControlAsync(
            String controlIdentifier,
            String targetIdentifier) {

        DisableControlRequest request = DisableControlRequest.builder()
                .controlIdentifier(controlIdentifier)
                .targetIdentifier(targetIdentifier)
                .build();

        return getAsyncClient().disableControl(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
```

```
                                    }
                                })
                                .exceptionally(ex -> {
                                    resultFuture.completeExceptionally(ex);
                                    return null;
                                });
                    }
                };

                // start polling immediately
                poller.run();

                return resultFuture;
            })
            .exceptionally(ex -> {
                Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                if (cause instanceof ControlTowerException e) {
                    String errorCode = e.awsErrorDetails().errorCode();

                    if ("ResourceNotFoundException".equals(errorCode)) {
                        // SPEC: notify user and continue
                        System.out.println("Control not found for disabling: " +
e.getMessage());
                        return null;
                    }

                    throw new CompletionException(
                            "Error disabling control: " + e.getMessage(), e);
                }

                if (cause instanceof SdkException) {
                    throw new CompletionException(
                            "SDK error disabling control: " +
cause.getMessage(), cause);
                }

                throw new CompletionException(
                        "Failed to disable control", cause);
            });
    }
```

```
    /**
     * Gets the status of a control operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<ControlOperationStatus> getControlOperationAsync(
            String operationIdentifier) {

        GetControlOperationRequest request = GetControlOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getControlOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ControlTowerException e) {
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Control operation not found:
%s".formatted(e.getMessage()),
                                        e
                                );
                            }

                            throw new CompletionException(
                                    "Error getting control operation status:
%s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting control operation status:
%s".formatted(cause.getMessage()),
                                    cause
```

```
                            );
                        }

                        throw new CompletionException("Failed to get control
 operation status", cause);
                    }
                })
                .thenApply(response -> response.controlOperation().status());
    }


    /**
     * Lists all controls in the Control Tower control catalog.
     *
     * @return a list of controls
     * @throws SdkException if a service-specific error occurs
     */
    public CompletableFuture<List<ControlSummary>> listControlsAsync() {
        System.out.println("Starting list controls paginator…");

        ListControlsRequest request = ListControlsRequest.builder().build();
        ListControlsPublisher paginator =
 getAsyncCatClient().listControlsPaginator(request);
        List<ControlSummary> controls = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.controls() != null && !
response.controls().isEmpty()) {
                        response.controls().forEach(control -> {
                            controls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no controls.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved " +
 controls.size() +" controls."))
                .thenApply(v -> controls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof SdkException sdkEx) {
                        if (sdkEx.getMessage() != null &&
 sdkEx.getMessage().contains("AccessDeniedException")) {
```

```
                            throw new CompletionException(
                                    "Access denied when listing controls. Please
ensure you have the necessary permissions.",
                                    sdkEx
                            );
                        } else {
                            throw new CompletionException(
                                    "SDK error listing controls:
%s".formatted(sdkEx.getMessage()),
                                    sdkEx
                            );
                        }
                    }

                    throw new CompletionException("Failed to list controls", cause);
                });
    }

    /**
     * Resets an enabled baseline for a specific target.
     *
     * @param enabledBaselineIdentifier the identifier of the enabled baseline to
reset
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> resetEnabledBaselineAsync(String
enabledBaselineIdentifier) {

        System.out.println("Starting reset of enabled baseline…");
        System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

        ResetEnabledBaselineRequest request = ResetEnabledBaselineRequest.builder()
                .enabledBaselineIdentifier(enabledBaselineIdentifier)
                .build();

        return getAsyncClient().resetEnabledBaseline(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Reset enabled baseline operation ID: " +
operationId);
```

```
                    // Polling loop
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getBaselineOperationAsync(operationId)
                                    .thenAccept(statusObj -> {
                                        String status = statusObj.toString(); //
Convert enum/status to string for printing
                                        System.out.println("Current baseline
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                        if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                            System.out.println("Baseline operation
finished with status: " + status);
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Schedule next poll in 15 seconds
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
```

```
                        String errorCode = e.awsErrorDetails() != null ?
 e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
 e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught: Code=" +
 errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught: " +
 sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception resetting baseline: " +
 cause.getMessage());
                    return null;
                });
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateLandingZone
  - DeleteLandingZone
  - DisableBaseline
  - DisableControl
  - EnableBaseline
  - EnableControl
  - GetControlOperation
  - GetLandingZoneOperation
  - ListBaselines
  - ListEnabledBaselines
  - ListEnabledControls
  - ListLandingZones
  - ResetEnabledBaseline

# Tindakan

## `DisableBaseline`

Contoh kode berikut menunjukkan cara menggunakan`DisableBaseline`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Disables a baseline for a specified target.
    *
    * @param enabledBaselineIdentifier the identifier of the enabled baseline to
disable
    * @return the operation identifier
    * @throws ControlTowerException if a service-specific error occurs
    * @throws SdkException          if an SDK error occurs
    */
   public CompletableFuture<String> disableBaselineAsync(String
enabledBaselineIdentifier) {

       System.out.println("Starting disable of enabled baseline…");
       System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

       DisableBaselineRequest request = DisableBaselineRequest.builder()
               .enabledBaselineIdentifier(enabledBaselineIdentifier)
               .build();

       return getAsyncClient().disableBaseline(request)
               .thenCompose(response -> {
                   String operationId = response.operationIdentifier();
                   System.out.println("Disable baseline operation ID: " +
operationId);
```

```
                    // CompletableFuture that will be completed when operation
finishes
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    // Polling loop
                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getBaselineOperationAsync(operationId)
                                    .thenAccept(statusObj -> {
                                        String status = statusObj.toString(); //
Convert enum/status to string for printing
                                        System.out.println("Current disable
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                        if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                            System.out.println("Disable operation
finished with status: " + status);
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Schedule next poll in 15 seconds
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
```

```
                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught while
disabling baseline: Code=" + errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught while disabling
baseline: " + sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception while disabling
baseline: " + cause.getMessage());
                    return null;
                });
    }
```

- Untuk detail API, lihat DisableBaselinedi Referensi AWS SDK for Java 2.x API.

### `DisableControl`

Contoh kode berikut menunjukkan cara menggunakan`DisableControl`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
     * Disables a control for a specified target.
     *
     * @param controlIdentifier the identifier of the control to disable
     * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> disableControlAsync(
            String controlIdentifier,
            String targetIdentifier) {

        DisableControlRequest request = DisableControlRequest.builder()
                .controlIdentifier(controlIdentifier)
                .targetIdentifier(targetIdentifier)
                .build();

        return getAsyncClient().disableControl(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Disable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
```

```
                                    }
                                })
                                .exceptionally(ex -> {
                                    resultFuture.completeExceptionally(ex);
                                    return null;
                                });
                    }
                };

                // start polling immediately
                poller.run();

                return resultFuture;
            })
            .exceptionally(ex -> {
                Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                if (cause instanceof ControlTowerException e) {
                    String errorCode = e.awsErrorDetails().errorCode();

                    if ("ResourceNotFoundException".equals(errorCode)) {
                        // SPEC: notify user and continue
                        System.out.println("Control not found for disabling: " +
e.getMessage());
                        return null;
                    }

                    throw new CompletionException(
                            "Error disabling control: " + e.getMessage(), e);
                }

                if (cause instanceof SdkException) {
                    throw new CompletionException(
                            "SDK error disabling control: " +
cause.getMessage(), cause);
                }

                throw new CompletionException(
                        "Failed to disable control", cause);
            });
    }
```

- Untuk detail API, lihat DisableControldi Referensi AWS SDK for Java 2.x API.

### `EnableBaseline`

Contoh kode berikut menunjukkan cara menggunakan`EnableBaseline`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously enables a baseline for the specified target if not already
enabled.
    *
    * @param targetIdentifier       The ARN of the target (OU or account).
    * @param baselineIdentifier     The baseline definition ARN to enable.
    * @param baselineVersion        The baseline version to enable.
    * @return A CompletableFuture containing the enabled baseline ARN, or null if
already enabled.
    */
   public CompletableFuture<String> enableBaselineAsync(
           String targetIdentifier,
           String baselineIdentifier,
           String baselineVersion
   ) {
       EnableBaselineRequest request = EnableBaselineRequest.builder()
               .baselineIdentifier(baselineIdentifier)
               .baselineVersion(baselineVersion)
               .targetIdentifier(targetIdentifier)
               .build();

       return getAsyncClient().enableBaseline(request)
               .handle((resp, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ControlTowerException e) {
```

```
                            String code = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                            String msg = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                            if ("ValidationException".equals(code) &&
msg.contains("already enabled")) {
                                System.out.println("Baseline is already enabled for
this target # fetching ARN...");
                                return fetchEnabledBaselineArn(targetIdentifier,
baselineIdentifier)
                                        .join(); // fetch existing ARN synchronously
                            }

                            throw new RuntimeException("Error enabling baseline: " +
code + " - " + msg, e);
                        }

                        throw new RuntimeException("Unexpected error enabling
baseline: " + cause.getMessage(), cause);
                    }

                    return resp;
                })
                .thenCompose(result -> {
                    if (result instanceof EnableBaselineResponse resp) {
                        String operationId = resp.operationIdentifier();
                        String enabledBaselineArn = resp.arn();
                        System.out.println("Baseline enable started. ARN: " +
enabledBaselineArn
                                + ", operation ID: " + operationId);

                        // Inline polling
                        return CompletableFuture.supplyAsync(() -> {
                            while (true) {
                                GetBaselineOperationRequest opReq =
GetBaselineOperationRequest.builder()
                                        .operationIdentifier(operationId)
                                        .build();

                                GetBaselineOperationResponse opResp =
getAsyncClient().getBaselineOperation(opReq).join();
                                BaselineOperation op = opResp.baselineOperation();
                                BaselineOperationStatus status = op.status();
```

```
                                System.out.println("Operation " + operationId + "
status: " + status);

                                if (status == BaselineOperationStatus.SUCCEEDED) {
                                    return enabledBaselineArn;
                                } else if (status == BaselineOperationStatus.FAILED)
{
                                    String opId = op.operationIdentifier();
                                    String reason = op.statusMessage() != null ?
op.statusMessage() : "No failure reason provided";
                                    throw new RuntimeException("Baseline operation
failed (ID: " + opId + "), status: "
                                            + status + ", reason: " + reason);
                                }

                                try {
                                    Thread.sleep(Duration.ofSeconds(15).toMillis());
                                } catch (InterruptedException e) {
                                    Thread.currentThread().interrupt();
                                    throw new RuntimeException(e);
                                }
                            }
                        });
                } else if (result instanceof String existingArn) {
                    // Already enabled branch
                    return CompletableFuture.completedFuture(existingArn);
                }

                return CompletableFuture.completedFuture(null);
            });
    }


    /**
     * Fetches the ARN of an already-enabled baseline for the target asynchronously.
     */
    private CompletableFuture<String> fetchEnabledBaselineArn(String
targetIdentifier, String baselineIdentifier) {
        return
getAsyncClient().listEnabledBaselines(ListEnabledBaselinesRequest.builder().build())
                .thenApply(listResp -> {
                    for (EnabledBaselineSummary eb : listResp.enabledBaselines()) {
                        if (baselineIdentifier.equals(eb.baselineIdentifier())
                                && targetIdentifier.equals(eb.targetIdentifier())) {
```

```
                        return eb.arn();
                    }
                }
                return null; // not yet available
            });
    }
```

- Untuk detail API, lihat EnableBaselinedi Referensi AWS SDK for Java 2.x API.

### `EnableControl`

Contoh kode berikut menunjukkan cara menggunakan`EnableControl`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Enables a control for a specified target.
 *
 * @param controlIdentifier the identifier of the control to enable
 * @param targetIdentifier  the identifier of the target (e.g., OU ARN)
 * @return the operation identifier
 * @throws ControlTowerException if a service-specific error occurs
 * @throws SdkException          if an SDK error occurs
 */
public CompletableFuture<String> enableControlAsync(
        String controlIdentifier,
        String targetIdentifier) {

    EnableControlRequest request = EnableControlRequest.builder()
            .controlIdentifier(controlIdentifier)
            .targetIdentifier(targetIdentifier)
            .build();

    return getAsyncClient().enableControl(request)
```

```
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Enable control operation started. Operation
ID: " + operationId);

                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getControlOperationAsync(operationId)
                                    .thenAccept(status -> {
                                        System.out.println("Control operation
status: " + status);

                                        if (status ==
ControlOperationStatus.SUCCEEDED
                                                || status ==
ControlOperationStatus.FAILED) {
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Poll again after 30 seconds
                                            CompletableFuture.delayedExecutor(30,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start polling immediately
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
```

```
                        String errorCode = e.awsErrorDetails().errorCode();
                        String message = e.getMessage() != null ? e.getMessage() :
"";

                        if ("ValidationException".equals(errorCode)
                                && message.contains("already enabled")) {
                            System.out.println("Control is already enabled for this
target");
                            return null;
                        }

                        if ("ResourceNotFoundException".equals(errorCode)
                                && message.contains("not registered with AWS Control
Tower")) {
                            System.out.println(
                                    "Control Tower must be enabled to work with
controls.");
                            return null;
                        }

                        throw new CompletionException(
                                "Couldn't enable control: %s".formatted(message),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error enabling control: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to enable control",
                            cause
                    );
                });
    }
```

- Untuk detail API, lihat EnableControldi Referensi AWS SDK for Java 2.x API.

### `GetBaselineOperation`

Contoh kode berikut menunjukkan cara menggunakan`GetBaselineOperation`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Gets the status of a baseline operation.
 *
 * @param operationIdentifier the identifier of the operation
 * @return the operation status
 * @throws ControlTowerException if a service-specific error occurs
 * @throws SdkException          if an SDK error occurs
 */
public CompletableFuture<BaselineOperationStatus> getBaselineOperationAsync(
        String operationIdentifier) {

    GetBaselineOperationRequest request = GetBaselineOperationRequest.builder()
            .operationIdentifier(operationIdentifier)
            .build();

    return getAsyncClient().getBaselineOperation(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause() != null
                            ? exception.getCause()
                            : exception;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("ResourceNotFoundException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Baseline operation not found: %s"
                                            .formatted(e.getMessage()),
                                    e
```

```
                                );
                            }

                            throw new CompletionException(
                                    "Error getting baseline operation status: %s"
                                            .formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting baseline operation status:
%s"
                                            .formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to get baseline operation status",
                                cause
                        );
                    }
                })
                .thenApply(response -> {
                    BaselineOperationStatus status =
                            response.baselineOperation().status();
                    return status;
                });
    }
```

- Untuk detail API, lihat GetBaselineOperationdi Referensi AWS SDK for Java 2.x API.

### `GetControlOperation`

Contoh kode berikut menunjukkan cara menggunakan`GetControlOperation`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Gets the status of a control operation.
     *
     * @param operationIdentifier the identifier of the operation
     * @return the operation status
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<ControlOperationStatus> getControlOperationAsync(
            String operationIdentifier) {

        GetControlOperationRequest request = GetControlOperationRequest.builder()
                .operationIdentifier(operationIdentifier)
                .build();

        return getAsyncClient().getControlOperation(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ControlTowerException e) {
                            String errorCode = e.awsErrorDetails().errorCode();

                            if ("ResourceNotFoundException".equals(errorCode)) {
                                throw new CompletionException(
                                        "Control operation not found:
%s".formatted(e.getMessage()),
                                        e
                                );
                            }

                            throw new CompletionException(
```

```
                                    "Error getting control operation status:
%s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error getting control operation status:
%s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException("Failed to get control
operation status", cause);
                    }
                })
                .thenApply(response -> response.controlOperation().status());
    }
```

- Untuk detail API, lihat GetControlOperationdi Referensi AWS SDK for Java 2.x API.

### `ListBaselines`

Contoh kode berikut menunjukkan cara menggunakan`ListBaselines`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all available baselines using pagination to retrieve complete results.
     *
     * @return a list of all baselines
     * @throws ControlTowerException if a service-specific error occurs
```

```
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<BaselineSummary>> listBaselinesAsync() {
        System.out.println("Starting list baselines paginator…");
        ListBaselinesRequest request = ListBaselinesRequest.builder().build();
        ListBaselinesPublisher paginator =
                getAsyncClient().listBaselinesPaginator(request);

        List<BaselineSummary> baselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.baselines() != null && !
response.baselines().isEmpty()) {
                        response.baselines().forEach(baseline -> {
                            baselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println("Successfully listed baselines. Total: "
 + baselines.size())
                )
                .thenApply(v -> baselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing baselines:
 %s".formatted(e.getMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Error listing baselines:
 %s".formatted(e.getMessage()),
                                e
                        );
                    }
```

```
                    if (cause instanceof SdkException) {
                        throw new CompletionException(
                                "SDK error listing baselines:
%s".formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException("Failed to list baselines",
cause);
                });
    }
```

- Untuk detail API, lihat ListBaselinesdi Referensi AWS SDK for Java 2.x API.

### `ListEnabledBaselines`

Contoh kode berikut menunjukkan cara menggunakan`ListEnabledBaselines`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all enabled baselines using pagination to retrieve complete results.
     *
     * @return a list of all enabled baselines
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledBaselineSummary>>
listEnabledBaselinesAsync() {
        System.out.println("Starting list enabled baselines paginator…");

        ListEnabledBaselinesRequest request =
                ListEnabledBaselinesRequest.builder().build();
```

```
        ListEnabledBaselinesPublisher paginator =
                getAsyncClient().listEnabledBaselinesPaginator(request);

        List<EnabledBaselineSummary> enabledBaselines = new ArrayList<>();
        return paginator.subscribe(response -> {
                    if (response.enabledBaselines() != null
                            && !response.enabledBaselines().isEmpty()) {

                        response.enabledBaselines().forEach(baseline -> {
                            enabledBaselines.add(baseline);
                        });
                    } else {
                        System.out.println("Page contained no enabled baselines.");
                    }
                })
                .thenRun(() ->
                        System.out.println(
                                "Successfully listed enabled baselines. Total: " +
                                        enabledBaselines.size()
                        )
                )
                .thenApply(v -> enabledBaselines)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        if ("AccessDeniedException".equals(errorCode)) {
                            throw new CompletionException(
                                    "Access denied when listing enabled baselines:
%s".formatted(e.getMessage()), e);
                        }

                        throw new CompletionException(
                                "Error listing enabled baselines: %s"
                                        .formatted(e.getMessage()),
                                e
                        );
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
```

```
                                "SDK error listing enabled baselines: %s"
                                        .formatted(cause.getMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to list enabled baselines",
                            cause
                    );
                });
    }
```

- Untuk detail API, lihat ListEnabledBaselinesdi Referensi AWS SDK for Java 2.x API.

### `ListEnabledControls`

Contoh kode berikut menunjukkan cara menggunakan`ListEnabledControls`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all enabled controls for a specific target using pagination.
     *
     * @param targetIdentifier the identifier of the target (e.g., OU ARN)
     * @return a list of enabled controls
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<EnabledControlSummary>>
listEnabledControlsAsync(String targetIdentifier) {
        System.out.println("Starting list enabled controls paginator for target " +
targetIdentifier);
        ListEnabledControlsRequest request = ListEnabledControlsRequest.builder()
```

```
                .targetIdentifier(targetIdentifier)
                .build();

        ListEnabledControlsPublisher paginator =
 getAsyncClient().listEnabledControlsPaginator(request);
        List<EnabledControlSummary> enabledControls = new ArrayList<>();

        // Subscribe to the paginator asynchronously
        return paginator.subscribe(response -> {
                    if (response.enabledControls() != null && !
response.enabledControls().isEmpty()) {
                        response.enabledControls().forEach(control -> {
                            enabledControls.add(control);
                        });
                    } else {
                        System.out.println("Page contained no enabled controls.");
                    }
                })
                .thenRun(() -> System.out.println(
                        "Successfully retrieved "+enabledControls.size() +" enabled
 controls for target "+targetIdentifier
                ))
                .thenApply(v -> enabledControls)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();

                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing enabled
 controls: %s".formatted(e.getMessage()), e);

                            case "ResourceNotFoundException":
                                if (e.getMessage() != null &&
 e.getMessage().contains("not registered with AWS Control Tower")) {
                                    throw new CompletionException(
                                            "Control Tower must be enabled to work
 with controls", e);
                                }
                                throw new CompletionException(
```

```
                                        "Target not found when listing enabled
controls: %s".formatted(e.getMessage()), e);

                            default:
                                throw new CompletionException(
                                        "Error listing enabled controls:
%s".formatted(e.getMessage()), e);
                            }
                        }

                        if (cause instanceof SdkException) {
                            throw new CompletionException(
                                    "SDK error listing enabled controls:
%s".formatted(cause.getMessage()), cause);
                        }

                        throw new CompletionException("Failed to list enabled controls",
cause);
                    });
        }
```

- Untuk detail API, lihat ListEnabledControlsdi Referensi AWS SDK for Java 2.x API.

### `ListLandingZones`

Contoh kode berikut menunjukkan cara menggunakan`ListLandingZones`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all landing zones using pagination to retrieve complete results.
     *
     * @return a list of all landing zones
     * @throws ControlTowerException if a service-specific error occurs
```

```
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<List<LandingZoneSummary>> listLandingZonesAsync() {
        System.out.println("Starting list landing zones paginator…");

        ListLandingZonesRequest request = ListLandingZonesRequest.builder().build();
        ListLandingZonesPublisher paginator =
 getAsyncClient().listLandingZonesPaginator(request);
        List<LandingZoneSummary> landingZones = new ArrayList<>();

        return paginator.subscribe(response -> {
                    if (response.landingZones() != null && !
response.landingZones().isEmpty()) {
                        response.landingZones().forEach(lz -> {
                            System.out.println("Landing zone ARN: " + lz.arn());
                            landingZones.add(lz);
                        });
                    } else {
                        System.out.println("Page contained no landing zones.");
                    }
                })
                .thenRun(() -> System.out.println("Successfully retrieved "+
 landingZones.size() + " landing zones." ))
                .thenApply(v -> landingZones)
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails().errorCode();
                        switch (errorCode) {
                            case "AccessDeniedException":
                                throw new CompletionException(
                                        "Access denied when listing landing zones: "
 + e.getMessage(), e);
                            default:
                                throw new CompletionException(
                                        "Error listing landing zones: " +
 e.getMessage(), e);
                        }
                    }

                    if (cause instanceof SdkException) {
                        throw new CompletionException(
```

```
                                "SDK error listing landing zones: " +
cause.getMessage(), cause);
                    }

                    throw new CompletionException("Failed to list landing zones",
cause);
                });
    }
```

- Untuk detail API, lihat ListLandingZonesdi Referensi AWS SDK for Java 2.x API.

### `ResetEnabledBaseline`

Contoh kode berikut menunjukkan cara menggunakan`ResetEnabledBaseline`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Resets an enabled baseline for a specific target.
     *
     * @param enabledBaselineIdentifier the identifier of the enabled baseline to
reset
     * @return the operation identifier
     * @throws ControlTowerException if a service-specific error occurs
     * @throws SdkException          if an SDK error occurs
     */
    public CompletableFuture<String> resetEnabledBaselineAsync(String
enabledBaselineIdentifier) {

        System.out.println("Starting reset of enabled baseline…");
        System.out.println("This operation will check the status every 15 seconds
until it completes (SUCCEEDED or FAILED).");

        ResetEnabledBaselineRequest request = ResetEnabledBaselineRequest.builder()
                .enabledBaselineIdentifier(enabledBaselineIdentifier)
```

```
                .build();

        return getAsyncClient().resetEnabledBaseline(request)
                .thenCompose(response -> {
                    String operationId = response.operationIdentifier();
                    System.out.println("Reset enabled baseline operation ID: " +
operationId);

                    // Polling loop
                    CompletableFuture<String> resultFuture = new
CompletableFuture<>();

                    Runnable poller = new Runnable() {
                        @Override
                        public void run() {
                            getBaselineOperationAsync(operationId)
                                    .thenAccept(statusObj -> {
                                        String status = statusObj.toString(); //
Convert enum/status to string for printing
                                        System.out.println("Current baseline
operation status: " + status + " # waiting for SUCCEEDED or FAILED...");

                                        if ("SUCCEEDED".equalsIgnoreCase(status) ||
"FAILED".equalsIgnoreCase(status)) {
                                            System.out.println("Baseline operation
finished with status: " + status);
                                            resultFuture.complete(operationId);
                                        } else {
                                            // Schedule next poll in 15 seconds
                                            CompletableFuture.delayedExecutor(15,
TimeUnit.SECONDS)
                                                    .execute(this);
                                        }
                                    })
                                    .exceptionally(ex -> {
                                        System.out.println("Error checking baseline
operation status: " + ex.getMessage());
                                        resultFuture.completeExceptionally(ex);
                                        return null;
                                    });
                        }
                    };

                    // Start first poll immediately
```

```
                    poller.run();

                    return resultFuture;
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ControlTowerException e) {
                        String errorCode = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorCode() : "UNKNOWN";
                        String errorMessage = e.awsErrorDetails() != null ?
e.awsErrorDetails().errorMessage() : e.getMessage();

                        System.out.println("ControlTowerException caught: Code=" +
errorCode + ", Message=" + errorMessage);
                        return null;
                    }

                    if (cause instanceof SdkException sdkEx) {
                        System.out.println("SDK exception caught: " +
sdkEx.getMessage());
                        return null;
                    }

                    System.out.println("Unexpected exception resetting baseline: " +
cause.getMessage());
                    return null;
                });
    }
```

- Untuk detail API, lihat ResetEnabledBaselinedi Referensi AWS SDK for Java 2.x API.

# Contoh Firehose menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan AWS SDK for Java 2.x Firehose with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


# Tindakan

### `PutRecord`

Contoh kode berikut menunjukkan cara menggunakan`PutRecord`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Puts a record to the specified Amazon Kinesis Data Firehose delivery stream.
     *
     * @param record The record to be put to the delivery stream. The record must be
a {@link Map} of String keys and Object values.
     * @param deliveryStreamName The name of the Amazon Kinesis Data Firehose
delivery stream to which the record should be put.
     * @throws IllegalArgumentException if the input record or delivery stream name
is null or empty.
     * @throws RuntimeException if there is an error putting the record to the
delivery stream.
     */
    public static void putRecord(Map<String, Object> record, String
deliveryStreamName) {
```

```
        if (record == null || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
            throw new IllegalArgumentException("Invalid input: record or delivery
stream name cannot be null/empty");
        }
        try {
            String jsonRecord = new ObjectMapper().writeValueAsString(record);
            Record firehoseRecord = Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                .build();

            PutRecordRequest putRecordRequest = PutRecordRequest.builder()
                .deliveryStreamName(deliveryStreamName)
                .record(firehoseRecord)
                .build();

            getFirehoseClient().putRecord(putRecordRequest);
            System.out.println("Record sent: " + jsonRecord);
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record: " + e.getMessage(),
e);
        }
    }
```

- Untuk detail API, lihat PutRecorddi Referensi AWS SDK for Java 2.x API.

### `PutRecordBatch`

Contoh kode berikut menunjukkan cara menggunakan`PutRecordBatch`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Puts a batch of records to an Amazon Kinesis Data Firehose delivery stream.
```

```
    *
    * @param records           a list of maps representing the records to be sent
    * @param batchSize         the maximum number of records to include in each
batch
    * @param deliveryStreamName the name of the Kinesis Data Firehose delivery
stream
    * @throws IllegalArgumentException if the input parameters are invalid (null or
empty)
    * @throws RuntimeException         if there is an error putting the record
batch
    */
   public static void putRecordBatch(List<Map<String, Object>> records, int
batchSize, String deliveryStreamName) {
       if (records == null || records.isEmpty() || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
           throw new IllegalArgumentException("Invalid input: records or delivery
stream name cannot be null/empty");
       }
       ObjectMapper objectMapper = new ObjectMapper();

       try {
           for (int i = 0; i < records.size(); i += batchSize) {
               List<Map<String, Object>> batch = records.subList(i, Math.min(i +
batchSize, records.size()));

               List<Record> batchRecords = batch.stream().map(record -> {
                   try {
                       String jsonRecord = objectMapper.writeValueAsString(record);
                       return Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                           .build();
                   } catch (Exception e) {
                       throw new RuntimeException("Error creating Firehose record",
e);
                   }
               }).collect(Collectors.toList());

               PutRecordBatchRequest request = PutRecordBatchRequest.builder()
                   .deliveryStreamName(deliveryStreamName)
                   .records(batchRecords)
                   .build();
```

```
                PutRecordBatchResponse response =
getFirehoseClient().putRecordBatch(request);

                if (response.failedPutCount() > 0) {
                    response.requestResponses().stream()
                        .filter(r -> r.errorCode() != null)
                        .forEach(r -> System.err.println("Failed record: " +
r.errorMessage()));
                }
                System.out.println("Batch sent with size: " + batchRecords.size());
            }
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record batch: " +
e.getMessage(), e);
        }
    }
```

- Untuk detail API, lihat PutRecordBatchdi Referensi AWS SDK for Java 2.x API.

## Skenario

Masukkan catatan ke Firehose

Contoh kode berikut menunjukkan cara menggunakan Firehose untuk memproses catatan individu dan batch.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini menempatkan catatan individu dan batch ke Firehose.

```
/**
 * Amazon Firehose Scenario example using Java V2 SDK.
 *
 * Demonstrates individual and batch record processing,
 * and monitoring Firehose delivery stream metrics.
```

```
 */
public class FirehoseScenario {

    private static FirehoseClient firehoseClient;
    private static CloudWatchClient cloudWatchClient;

    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <deliveryStreamName>
                Where:
                    deliveryStreamName - The Firehose delivery stream name.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            return;
        }

        String deliveryStreamName = args[0];

        try {
            // Read and parse sample data.
            String jsonContent = readJsonFile("sample_records.json");
            ObjectMapper objectMapper = new ObjectMapper();
            List<Map<String, Object>> sampleData =
 objectMapper.readValue(jsonContent, new TypeReference<>() {});

            // Process individual records.
            System.out.println("Processing individual records...");
            sampleData.subList(0, 100).forEach(record -> {
                try {
                    putRecord(record, deliveryStreamName);
                } catch (Exception e) {
                    System.err.println("Error processing record: " +
 e.getMessage());
                }
            });

            // Monitor metrics.
            monitorMetrics(deliveryStreamName);

            // Process batch records.
            System.out.println("Processing batch records...");
```

```
            putRecordBatch(sampleData.subList(100, sampleData.size()), 500,
deliveryStreamName);
            monitorMetrics(deliveryStreamName);

        } catch (Exception e) {
            System.err.println("Scenario failed: " + e.getMessage());
        } finally {
            closeClients();
        }
    }

    private static FirehoseClient getFirehoseClient() {
        if (firehoseClient == null) {
            firehoseClient = FirehoseClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return firehoseClient;
    }

    private static CloudWatchClient getCloudWatchClient() {
        if (cloudWatchClient == null) {
            cloudWatchClient = CloudWatchClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return cloudWatchClient;
    }

    /**
     * Puts a record to the specified Amazon Kinesis Data Firehose delivery stream.
     *
     * @param record The record to be put to the delivery stream. The record must be
a {@link Map} of String keys and Object values.
     * @param deliveryStreamName The name of the Amazon Kinesis Data Firehose
delivery stream to which the record should be put.
     * @throws IllegalArgumentException if the input record or delivery stream name
is null or empty.
     * @throws RuntimeException if there is an error putting the record to the
delivery stream.
     */
    public static void putRecord(Map<String, Object> record, String
deliveryStreamName) {
```

```
        if (record == null || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
            throw new IllegalArgumentException("Invalid input: record or delivery
stream name cannot be null/empty");
        }
        try {
            String jsonRecord = new ObjectMapper().writeValueAsString(record);
            Record firehoseRecord = Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                .build();

            PutRecordRequest putRecordRequest = PutRecordRequest.builder()
                .deliveryStreamName(deliveryStreamName)
                .record(firehoseRecord)
                .build();

            getFirehoseClient().putRecord(putRecordRequest);
            System.out.println("Record sent: " + jsonRecord);
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record: " + e.getMessage(),
e);
        }
    }


    /**
     * Puts a batch of records to an Amazon Kinesis Data Firehose delivery stream.
     *
     * @param records           a list of maps representing the records to be sent
     * @param batchSize         the maximum number of records to include in each
batch
     * @param deliveryStreamName the name of the Kinesis Data Firehose delivery
stream
     * @throws IllegalArgumentException if the input parameters are invalid (null or
empty)
     * @throws RuntimeException         if there is an error putting the record
batch
     */
    public static void putRecordBatch(List<Map<String, Object>> records, int
batchSize, String deliveryStreamName) {
        if (records == null || records.isEmpty() || deliveryStreamName == null ||
deliveryStreamName.isEmpty()) {
```

```
            throw new IllegalArgumentException("Invalid input: records or delivery
stream name cannot be null/empty");
        }
        ObjectMapper objectMapper = new ObjectMapper();

        try {
            for (int i = 0; i < records.size(); i += batchSize) {
                List<Map<String, Object>> batch = records.subList(i, Math.min(i +
batchSize, records.size()));

                List<Record> batchRecords = batch.stream().map(record -> {
                    try {
                        String jsonRecord = objectMapper.writeValueAsString(record);
                        return Record.builder()

.data(SdkBytes.fromByteArray(jsonRecord.getBytes(StandardCharsets.UTF_8)))
                                .build();
                    } catch (Exception e) {
                        throw new RuntimeException("Error creating Firehose record",
e);
                    }
                }).collect(Collectors.toList());

                PutRecordBatchRequest request = PutRecordBatchRequest.builder()
                    .deliveryStreamName(deliveryStreamName)
                    .records(batchRecords)
                    .build();

                PutRecordBatchResponse response =
getFirehoseClient().putRecordBatch(request);

                if (response.failedPutCount() > 0) {
                    response.requestResponses().stream()
                        .filter(r -> r.errorCode() != null)
                        .forEach(r -> System.err.println("Failed record: " +
r.errorMessage()));
                }
                System.out.println("Batch sent with size: " + batchRecords.size());
            }
        } catch (Exception e) {
            throw new RuntimeException("Failed to put record batch: " +
e.getMessage(), e);
        }
    }
```

```
   public static void monitorMetrics(String deliveryStreamName) {
       Instant endTime = Instant.now();
       Instant startTime = endTime.minusSeconds(600);

       List<String> metrics = List.of("IncomingBytes", "IncomingRecords",
"FailedPutCount");
       metrics.forEach(metric -> monitorMetric(metric, startTime, endTime,
deliveryStreamName));
   }

   private static void monitorMetric(String metricName, Instant startTime, Instant
endTime, String deliveryStreamName) {
       try {
           GetMetricStatisticsRequest request =
GetMetricStatisticsRequest.builder()
               .namespace("AWS/Firehose")
               .metricName(metricName)

.dimensions(Dimension.builder().name("DeliveryStreamName").value(deliveryStreamName).build(
               .startTime(startTime)
               .endTime(endTime)
               .period(60)
               .statistics(Statistic.SUM)
               .build();

           GetMetricStatisticsResponse response =
getCloudWatchClient().getMetricStatistics(request);
           double totalSum =
response.datapoints().stream().mapToDouble(Datapoint::sum).sum();
           System.out.println(metricName + ": " + totalSum);
       } catch (Exception e) {
           System.err.println("Failed to monitor metric " + metricName + ": " +
e.getMessage());
       }
   }

   public static String readJsonFile(String fileName) throws IOException {
       try (InputStream inputStream =
FirehoseScenario.class.getResourceAsStream("/" + fileName);
            Scanner scanner = new Scanner(inputStream, StandardCharsets.UTF_8)) {
           return scanner.useDelimiter("\\\\A").next();
       } catch (Exception e) {
           throw new RuntimeException("Error reading file: " + fileName, e);
```

```
        }
    }

    private static void closeClients() {
        try {
            if (firehoseClient != null) firehoseClient.close();
            if (cloudWatchClient != null) cloudWatchClient.close();
        } catch (Exception e) {
            System.err.println("Error closing clients: " + e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - PutRecord
  - PutRecordBatch

# Contoh Amazon DocumentDB menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Amazon DocumentDB. AWS SDK for Java 2.x

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Contoh nirserver

## Contoh nirserver

Memanggil fungsi Lambda dari pemicu Amazon DocumentDB

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima catatan dari aliran perubahan DocumentDB. Fungsi mengambil payload DocumentDB dan mencatat isi catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara Amazon DocumentDB dengan Lambda menggunakan Java.

```
import java.util.List;
import java.util.Map;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;

public class Example implements RequestHandler<Map<String, Object>, String> {

    @SuppressWarnings("unchecked")
    @Override
    public String handleRequest(Map<String, Object> event, Context context) {
        List<Map<String, Object>> events = (List<Map<String, Object>>)
 event.get("events");
        for (Map<String, Object> record : events) {
            Map<String, Object> eventData = (Map<String, Object>)
 record.get("event");
            processEventData(eventData);
        }

        return "OK";
    }

    @SuppressWarnings("unchecked")
    private void processEventData(Map<String, Object> eventData) {
        String operationType = (String) eventData.get("operationType");
        System.out.println("operationType: %s".formatted(operationType));

        Map<String, Object> ns = (Map<String, Object>) eventData.get("ns");

        String db = (String) ns.get("db");
        System.out.println("db: %s".formatted(db));
        String coll = (String) ns.get("coll");
        System.out.println("coll: %s".formatted(coll));
```

```
        Map<String, Object> fullDocument = (Map<String, Object>)
 eventData.get("fullDocument");
        System.out.println("fullDocument: %s".formatted(fullDocument));
    }

}
```

# Contoh DynamoDB menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with DynamoDB.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

AWS kontribusi komunitas adalah contoh yang dibuat dan dikelola oleh banyak tim AWS. Untuk memberikan umpan balik, gunakan mekanisme yang disediakan di repositori terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario
- Contoh nirserver
- AWS kontribusi komunitas

# Memulai

## Halo DynamoDB

Contoh kode berikut menunjukkan bagaimana untuk memulai menggunakan DynamoDB.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTables {
    public static void main(String[] args) {
        System.out.println("Listing your Amazon DynamoDB tables:\n");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        listAllTables(ddb);
        ddb.close();
    }

    public static void listAllTables(DynamoDbClient ddb) {
        boolean moreTables = true;
```

```
        String lastName = null;

        while (moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();
                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }

            } catch (DynamoDbException e) {
                System.err.println(e.getMessage());
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
}
```

- Untuk detail API, lihat ListTablesdi Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat tabel yang dapat menyimpan data film.
- Masukkan, dapatkan, dan perbarui satu film dalam tabel tersebut.
- Tulis data film ke tabel dari file JSON sampel.
- Kueri untuk film yang dirilis pada tahun tertentu.
- Pindai film yang dirilis dalam suatu rentang tahun.
- Hapus film dari tabel, lalu hapus tabel tersebut.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat tabel DynamoDB.

```
// Create a table with a Sort key.
public static void createTable(DynamoDbClient ddb, String tableName) {
    DynamoDbWaiter dbWaiter = ddb.waiter();
    ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

    // Define attributes.
    attributeDefinitions.add(AttributeDefinition.builder()
        .attributeName("year")
        .attributeType("N")
        .build());

    attributeDefinitions.add(AttributeDefinition.builder()
        .attributeName("title")
        .attributeType("S")
        .build());

    ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
```

```
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE)
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Buat fungsi pembantu untuk mengunduh dan mengekstrak file JSON sampel.

```
   // Load data into the table.
   public static void loadData(DynamoDbClient ddb, String tableName, String
fileName) throws IOException {
       DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
           .dynamoDbClient(ddb)
           .build();

       DynamoDbTable<Movies> mappedTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
       JsonParser parser = new JsonFactory().createParser(new File(fileName));
       com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
       Iterator<JsonNode> iter = rootNode.iterator();
       ObjectNode currentNode;
       int t = 0;
       while (iter.hasNext()) {
           // Only add 200 Movies to the table.
           if (t == 200)
               break;
           currentNode = (ObjectNode) iter.next();

           int year = currentNode.path("year").asInt();
           String title = currentNode.path("title").asText();
           String info = currentNode.path("info").toString();

           Movies movies = new Movies();
           movies.setYear(year);
           movies.setTitle(title);
           movies.setInfo(info);

           // Put the data into the Amazon DynamoDB Movie table.
           mappedTable.putItem(movies);
           t++;
       }
   }
```

Dapatkan item dari tabel.

```
   public static void getItem(DynamoDbClient ddb) {

       HashMap<String, AttributeValue> keyToGet = new HashMap<>();
       keyToGet.put("year", AttributeValue.builder()
```

```
            .n("1933")
            .build());

        keyToGet.put("title", AttributeValue.builder()
            .s("King Kong")
            .build());

        GetItemRequest request = GetItemRequest.builder()
            .key(keyToGet)
            .tableName("Movies")
            .build();

        try {
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();

            if (returnedItem != null) {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");

                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
 returnedItem.get(key1).toString());
                }
            } else {
                System.out.format("No item found with the key %s!\n", "year");
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

Contoh lengkap.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Creates the Amazon DynamoDB Movie table with partition and sort key.
 * 2. Puts data into the Amazon DynamoDB table from a JSON document using the
 * Enhanced client.
 * 3. Gets data from the Movie table.
 * 4. Adds a new item.
 * 5. Updates an item.
 * 6. Uses a Scan to query items using the Enhanced client.
 * 7. Queries all items where the year is 2013 using the Enhanced Client.
 * 8. Deletes the table.
 */

public class Scenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException {
        String tableName = "Movies";
        String fileName = "../../../resources/sample_files/movies.json";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon DynamoDB example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
            "1. Creating an Amazon DynamoDB table named Movies with a key named year
 and a sort key named title.");
        createTable(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Loading data into the Amazon DynamoDB table.");
        loadData(ddb, tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Getting data from the Movie table.");
```

```
        getItem(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Putting a record into the Amazon DynamoDB table.");
        putRecord(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Updating a record.");
        updateTableItem(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Scanning the Amazon DynamoDB table.");
        scanMovies(ddb, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Querying the Movies released in 2013.");
        queryTable(ddb);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        System.out.println(DASHES);

        ddb.close();
    }

    // Create a table with a Sort key.
    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
```

```
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE)
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

```
   // Query the table.
   public static void queryTable(DynamoDbClient ddb) {
       try {
           DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
               .dynamoDbClient(ddb)
               .build();

           DynamoDbTable<Movies> custTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
           QueryConditional queryConditional = QueryConditional
               .keyEqualTo(Key.builder()
                   .partitionValue(2013)
                   .build());

           // Get items in the table and write out the ID value.
           Iterator<Movies> results =
custTable.query(queryConditional).items().iterator();
           String result = "";

           while (results.hasNext()) {
               Movies rec = results.next();
               System.out.println("The title of the movie is " + rec.getTitle());
               System.out.println("The movie information  is " + rec.getInfo());
           }

       } catch (DynamoDbException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   // Scan the table.
   public static void scanMovies(DynamoDbClient ddb, String tableName) {
       System.out.println("******* Scanning all movies.\n");
       try {
           DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
               .dynamoDbClient(ddb)
               .build();

           DynamoDbTable<Movies> custTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
           Iterator<Movies> results = custTable.scan().items().iterator();
           while (results.hasNext()) {
```

```
                Movies rec = results.next();
                System.out.println("The movie title is " + rec.getTitle());
                System.out.println("The movie year is " + rec.getYear());
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Load data into the table.
    public static void loadData(DynamoDbClient ddb, String tableName, String
fileName) throws IOException {
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
            .dynamoDbClient(ddb)
            .build();

        DynamoDbTable<Movies> mappedTable = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        while (iter.hasNext()) {
            // Only add 200 Movies to the table.
            if (t == 200)
                break;
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String info = currentNode.path("info").toString();

            Movies movies = new Movies();
            movies.setYear(year);
            movies.setTitle(title);
            movies.setInfo(info);

            // Put the data into the Amazon DynamoDB Movie table.
            mappedTable.putItem(movies);
            t++;
```

```
        }
    }

    // Update the record to include show only directors.
    public static void updateTableItem(DynamoDbClient ddb, String tableName) {
        HashMap<String, AttributeValue> itemKey = new HashMap<>();
        itemKey.put("year", AttributeValue.builder().n("1933").build());
        itemKey.put("title", AttributeValue.builder().s("King Kong").build());

        HashMap<String, AttributeValueUpdate> updatedValues = new HashMap<>();
        updatedValues.put("info", AttributeValueUpdate.builder()
            .value(AttributeValue.builder().s("{\"directors\":[\"Merian C. Cooper\",
\"Ernest B. Schoedsack\"]")
                .build())
            .action(AttributeAction.PUT)
            .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(itemKey)
            .attributeUpdates(updatedValues)
            .build();

        try {
            ddb.updateItem(request);
        } catch (ResourceNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }

        System.out.println("Item was updated!");
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);
```

```
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    public static void putRecord(DynamoDbClient ddb) {
        try {
            DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(ddb)
                .build();

            DynamoDbTable<Movies> table = enhancedClient.table("Movies",
TableSchema.fromBean(Movies.class));

            // Populate the Table.
            Movies record = new Movies();
            record.setYear(2020);
            record.setTitle("My Movie2");
            record.setInfo("no info");
            table.putItem(record);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Added a new movie to the table.");
    }

    public static void getItem(DynamoDbClient ddb) {

        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put("year", AttributeValue.builder()
            .n("1933")
            .build());

        keyToGet.put("title", AttributeValue.builder()
            .s("King Kong")
            .build());

        GetItemRequest request = GetItemRequest.builder()
            .key(keyToGet)
            .tableName("Movies")
```

```
            .build();

        try {
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();

            if (returnedItem != null) {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");

                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
 returnedItem.get(key1).toString());
                }
            } else {
                System.out.format("No item found with the key %s!\n", "year");
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - BatchWriteItem
  - CreateTable
  - DeleteItem
  - DeleteTable
  - DescribeTable
  - GetItem
  - PutItem
  - Kueri
  - Scan
  - UpdateItem

# Tindakan

## `BatchGetItem`

Contoh kode berikut menunjukkan cara menggunakan`BatchGetItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menunjukkan cara mendapatkan item batch menggunakan klien layanan.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.KeysAndAttributes;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class BatchReadItems {
    public static void main(String[] args){
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
```

```
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        getBatchItems(dynamoDbClient, tableName);
    }

    public static void getBatchItems(DynamoDbClient dynamoDbClient, String
tableName) {
        // Define the primary key values for the items you want to retrieve.
        Map<String, AttributeValue> key1 = new HashMap<>();
        key1.put("Artist", AttributeValue.builder().s("Artist1").build());

        Map<String, AttributeValue> key2 = new HashMap<>();
        key2.put("Artist", AttributeValue.builder().s("Artist2").build());

        // Construct the batchGetItem request.
        Map<String, KeysAndAttributes> requestItems = new HashMap<>();
        requestItems.put(tableName, KeysAndAttributes.builder()
            .keys(List.of(key1, key2))
            .projectionExpression("Artist, SongTitle")
            .build());

        BatchGetItemRequest batchGetItemRequest = BatchGetItemRequest.builder()
            .requestItems(requestItems)
            .build();

        // Make the batchGetItem request.
        BatchGetItemResponse batchGetItemResponse =
dynamoDbClient.batchGetItem(batchGetItemRequest);

        // Extract and print the retrieved items.
        Map<String, List<Map<String, AttributeValue>>> responses =
batchGetItemResponse.responses();
        if (responses.containsKey(tableName)) {
            List<Map<String, AttributeValue>> musicItems = responses.get(tableName);
            for (Map<String, AttributeValue> item : musicItems) {
                System.out.println("Artist: " + item.get("Artist").s() +
                    ", SongTitle: " + item.get("SongTitle").s());
            }
```

```
        } else {
            System.out.println("No items retrieved.");
        }
    }
}
```

Menunjukkan cara mendapatkan item batch menggunakan klien layanan dan paginator.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchGetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.KeysAndAttributes;
import java.util.Collections;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

public class BatchGetItemsPaginator {

    public static void main(String[] args){
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        getBatchItemsPaginator(dynamoDbClient, tableName) ;
    }

    public static void getBatchItemsPaginator(DynamoDbClient dynamoDbClient, String
 tableName) {
        // Define the primary key values for the items you want to retrieve.
```

```
        Map<String, AttributeValue> key1 = new HashMap<>();
        key1.put("Artist", AttributeValue.builder().s("Artist1").build());

        Map<String, AttributeValue> key2 = new HashMap<>();
        key2.put("Artist", AttributeValue.builder().s("Artist2").build());

        // Construct the batchGetItem request.
        Map<String, KeysAndAttributes> requestItems = new HashMap<>();
        requestItems.put(tableName, KeysAndAttributes.builder()
            .keys(List.of(key1, key2))
            .projectionExpression("Artist, SongTitle")
            .build());

        BatchGetItemRequest batchGetItemRequest = BatchGetItemRequest.builder()
            .requestItems(requestItems)
            .build();

        // Use batchGetItemPaginator for paginated requests.
        dynamoDbClient.batchGetItemPaginator(batchGetItemRequest).stream()
            .flatMap(response -> response.responses().getOrDefault(tableName,
 Collections.emptyList()).stream())
            .forEach(item -> {
                System.out.println("Artist: " + item.get("Artist").s() +
                    ", SongTitle: " + item.get("SongTitle").s());
            });
    }
}
```

- Untuk detail API, lihat BatchGetItemdi Referensi AWS SDK for Java 2.x API.

### `BatchWriteItem`

Contoh kode berikut menunjukkan cara menggunakan`BatchWriteItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menyisipkan banyak item ke dalam tabel dengan menggunakan klien layanan.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.BatchWriteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.BatchWriteItemResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutRequest;
import software.amazon.awssdk.services.dynamodb.model.WriteRequest;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class BatchWriteItems {
    public static void main(String[] args){
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music).\s
                """;

        String tableName = "Music";
        Region region = Region.US_EAST_1;
        DynamoDbClient dynamoDbClient = DynamoDbClient.builder()
            .region(region)
            .build();

        addBatchItems(dynamoDbClient, tableName);
    }
```

```
   public static void addBatchItems(DynamoDbClient dynamoDbClient, String
tableName) {
       // Specify the updates you want to perform.
       List<WriteRequest> writeRequests = new ArrayList<>();

       // Set item 1.
       Map<String, AttributeValue> item1Attributes = new HashMap<>();
       item1Attributes.put("Artist",
AttributeValue.builder().s("Artist1").build());
       item1Attributes.put("Rating", AttributeValue.builder().s("5").build());
       item1Attributes.put("Comments", AttributeValue.builder().s("Great
song!").build());
       item1Attributes.put("SongTitle",
AttributeValue.builder().s("SongTitle1").build());

writeRequests.add(WriteRequest.builder().putRequest(PutRequest.builder().item(item1Attribut

       // Set item 2.
       Map<String, AttributeValue> item2Attributes = new HashMap<>();
       item2Attributes.put("Artist",
AttributeValue.builder().s("Artist2").build());
       item2Attributes.put("Rating", AttributeValue.builder().s("4").build());
       item2Attributes.put("Comments", AttributeValue.builder().s("Nice
melody.").build());
       item2Attributes.put("SongTitle",
AttributeValue.builder().s("SongTitle2").build());

writeRequests.add(WriteRequest.builder().putRequest(PutRequest.builder().item(item2Attribut

       try {
           // Create the BatchWriteItemRequest.
           BatchWriteItemRequest batchWriteItemRequest =
BatchWriteItemRequest.builder()
                .requestItems(Map.of(tableName, writeRequests))
                .build();

           // Execute the BatchWriteItem operation.
           BatchWriteItemResponse batchWriteItemResponse =
dynamoDbClient.batchWriteItem(batchWriteItemRequest);

           // Process the response.
           System.out.println("Batch write successful: " + batchWriteItemResponse);

       } catch (DynamoDbException e) {
```

```
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Menyisipkan banyak item ke dalam tabel menggunakan klien yang disempurnakan.

```
import com.example.dynamodb.Customer;
import com.example.dynamodb.Music;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbEnhancedClient;
import software.amazon.awssdk.enhanced.dynamodb.DynamoDbTable;
import software.amazon.awssdk.enhanced.dynamodb.Key;
import software.amazon.awssdk.enhanced.dynamodb.TableSchema;
import software.amazon.awssdk.enhanced.dynamodb.model.BatchWriteItemEnhancedRequest;
import software.amazon.awssdk.enhanced.dynamodb.model.WriteBatch;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.time.Instant;
import java.time.LocalDate;
import java.time.LocalDateTime;
import java.time.ZoneOffset;

/*
 * Before running this code example, create an Amazon DynamoDB table named Customer
 with these columns:
 *   - id - the id of the record that is the key
 *   - custName - the customer name
 *   - email - the email value
 *   - registrationDate - an instant value when the item was added to the table
 *
 * Also, ensure that you have set up your development environment, including your
 credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class EnhancedBatchWriteItems {
        public static void main(String[] args) {
                Region region = Region.US_EAST_1;
```

```
                DynamoDbClient ddb = DynamoDbClient.builder()
                                .region(region)
                                .build();
                DynamoDbEnhancedClient enhancedClient =
DynamoDbEnhancedClient.builder()
                                .dynamoDbClient(ddb)
                                .build();
                putBatchRecords(enhancedClient);
                ddb.close();
        }

        public static void putBatchRecords(DynamoDbEnhancedClient enhancedClient) {
                try {
                        DynamoDbTable<Customer> customerMappedTable =
enhancedClient.table("Customer",
                                        TableSchema.fromBean(Customer.class));
                        DynamoDbTable<Music> musicMappedTable =
enhancedClient.table("Music",
                                        TableSchema.fromBean(Music.class));
                        LocalDate localDate = LocalDate.parse("2020-04-07");
                        LocalDateTime localDateTime = localDate.atStartOfDay();
                        Instant instant = localDateTime.toInstant(ZoneOffset.UTC);

                        Customer record2 = new Customer();
                        record2.setCustName("Fred Pink");
                        record2.setId("id110");
                        record2.setEmail("fredp@noserver.com");
                        record2.setRegistrationDate(instant);

                        Customer record3 = new Customer();
                        record3.setCustName("Susan Pink");
                        record3.setId("id120");
                        record3.setEmail("spink@noserver.com");
                        record3.setRegistrationDate(instant);

                        Customer record4 = new Customer();
                        record4.setCustName("Jerry orange");
                        record4.setId("id101");
                        record4.setEmail("jorange@noserver.com");
                        record4.setRegistrationDate(instant);

                        BatchWriteItemEnhancedRequest batchWriteItemEnhancedRequest
= BatchWriteItemEnhancedRequest
                                        .builder()
```

```
                                        .writeBatches(

 WriteBatch.builder(Customer.class) // add items to the Customer

       // table

 .mappedTableResource(customerMappedTable)

 .addPutItem(builder -> builder.item(record2))

 .addPutItem(builder -> builder.item(record3))

 .addPutItem(builder -> builder.item(record4))
                                                                    .build(),

 WriteBatch.builder(Music.class) // delete an item from the Music

    // table

 .mappedTableResource(musicMappedTable)

 .addDeleteItem(builder -> builder.key(

    Key.builder().partitionValue(

                    "Famous Band")

                    .build()))
                                                                    .build())
                                        .build();

                        // Add three items to the Customer table and delete one item
 from the Music
                        // table.

 enhancedClient.batchWriteItem(batchWriteItemEnhancedRequest);
                        System.out.println("done");

                } catch (DynamoDbException e) {
                        System.err.println(e.getMessage());
                        System.exit(1);
                }
        }
}
```

- Untuk detail API, lihat BatchWriteItemdi Referensi AWS SDK for Java 2.x API.

### `CreateTable`

Contoh kode berikut menunjukkan cara menggunakan`CreateTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.BillingMode;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.OnDemandThroughput;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class CreateTable {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <tableName> <key>

            Where:
                tableName - The Amazon DynamoDB table to create (for example,
 Music3).
                key - The key for the Amazon DynamoDB table (for example, Artist).
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        System.out.println("Creating an Amazon DynamoDB table " + tableName + " with
 a simple primary key: " + key);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        String result = createTable(ddb, tableName, key);
        System.out.println("New table is " + result);
        ddb.close();
    }

    public static String createTable(DynamoDbClient ddb, String tableName, String
 key) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        CreateTableRequest request = CreateTableRequest.builder()
            .attributeDefinitions(AttributeDefinition.builder()
                .attributeName(key)
                .attributeType(ScalarAttributeType.S)
                .build())
            .keySchema(KeySchemaElement.builder()
                .attributeName(key)
                .keyType(KeyType.HASH)
                .build())
```

```
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
 scales based on traffic.
            .tableName(tableName)
            .build();

        String newTable;
        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
 dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            newTable = response.tableDescription().tableName();
            return newTable;

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateTabledi Referensi AWS SDK for Java 2.x API.

### `DeleteItem`

Contoh kode berikut menunjukkan cara menggunakan`DeleteItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyval>

                Where:
                    tableName - The Amazon DynamoDB table to delete the item from
 (for example, Music3).
                    key - The key used in the Amazon DynamoDB table (for example,
 Artist).\s
                    keyval - The key value that represents the item to delete (for
 example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        System.out.format("Deleting item \"%s\" from %s\n", keyVal, tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
```

```
                .build();

        deleteDynamoDBItem(ddb, tableName, key, keyVal);
        ddb.close();
    }

    public static void deleteDynamoDBItem(DynamoDbClient ddb, String tableName,
 String key, String keyVal) {
        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put(key, AttributeValue.builder()
                .s(keyVal)
                .build());

        DeleteItemRequest deleteReq = DeleteItemRequest.builder()
                .tableName(tableName)
                .key(keyToGet)
                .build();

        try {
            ddb.deleteItem(deleteReq);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteItemdi Referensi AWS SDK for Java 2.x API.

### `DeleteTable`

Contoh kode berikut menunjukkan cara menggunakan`DeleteTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteTable {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table to delete (for example,
 Music3).

                **Warning** This program will delete the table that you specify!
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        System.out.format("Deleting the Amazon DynamoDB table %s...\n", tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
    }
```

```
    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }
}
```

- Untuk detail API, lihat DeleteTabledi Referensi AWS SDK for Java 2.x API.

### `DescribeTable`

Contoh kode berikut menunjukkan cara menggunakan`DescribeTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import
 software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughputDescription;
import software.amazon.awssdk.services.dynamodb.model.TableDescription;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeTable {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table to get information about
 (for example, Music3).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        System.out.format("Getting description for %s\n\n", tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        describeDymamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static void describeDymamoDBTable(DynamoDbClient ddb, String tableName) {
        DescribeTableRequest request = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

        try {
            TableDescription tableInfo = ddb.describeTable(request).table();
            if (tableInfo != null) {
```

```
                System.out.format("Table name  : %s\n", tableInfo.tableName());
                System.out.format("Table ARN   : %s\n", tableInfo.tableArn());
                System.out.format("Status      : %s\n", tableInfo.tableStatus());
                System.out.format("Item count  : %d\n", tableInfo.itemCount());
                System.out.format("Size (bytes): %d\n", tableInfo.tableSizeBytes());

                ProvisionedThroughputDescription throughputInfo =
 tableInfo.provisionedThroughput();
                System.out.println("Throughput");
                System.out.format("  Read Capacity : %d\n",
 throughputInfo.readCapacityUnits());
                System.out.format("  Write Capacity: %d\n",
 throughputInfo.writeCapacityUnits());

                List<AttributeDefinition> attributes =
 tableInfo.attributeDefinitions();
                System.out.println("Attributes");
                for (AttributeDefinition a : attributes) {
                    System.out.format("  %s (%s)\n", a.attributeName(),
 a.attributeType());
                }
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("\nDone!");
    }
}
```

- Untuk detail API, lihat DescribeTabledi Referensi AWS SDK for Java 2.x API.

### `DescribeTimeToLive`

Contoh kode berikut menunjukkan cara menggunakan`DescribeTimeToLive`.

SDK untuk Java 2.x

Jelaskan konfigurasi TTL pada tabel DynamoDB yang ada menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DescribeTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTimeToLiveResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.logging.Level;
import java.util.logging.Logger;

    public DescribeTimeToLiveResponse describeTTL(final String tableName, final
 Region region) {
        final DescribeTimeToLiveRequest request =
            DescribeTimeToLiveRequest.builder().tableName(tableName).build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.describeTimeToLive(request);
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Untuk detail API, lihat DescribeTimeToLivedi Referensi AWS SDK for Java 2.x API.

### `GetItem`

Contoh kode berikut menunjukkan cara menggunakan`GetItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mendapat item dari tabel dengan menggunakan DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import java.util.HashMap;
import java.util.Map;
import java.util.Set;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To get an item from an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client, see the EnhancedGetItem example.
 */
public class GetItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal>

                Where:
                    tableName - The Amazon DynamoDB table from which an item is
 retrieved (for example, Music3).\s
                    key - The key used in the Amazon DynamoDB table (for example,
 Artist).\s
                    keyval - The key value that represents the item to get (for
 example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        System.out.format("Retrieving item \"%s\" from \"%s\"\n", keyVal,
tableName);
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        getDynamoDBItem(ddb, tableName, key, keyVal);
        ddb.close();
    }

    public static void getDynamoDBItem(DynamoDbClient ddb, String tableName, String
key, String keyVal) {
        HashMap<String, AttributeValue> keyToGet = new HashMap<>();
        keyToGet.put(key, AttributeValue.builder()
                .s(keyVal)
                .build());

        GetItemRequest request = GetItemRequest.builder()
                .key(keyToGet)
                .tableName(tableName)
                .build();

        try {
            // If there is no matching item, GetItem does not return any data.
            Map<String, AttributeValue> returnedItem = ddb.getItem(request).item();
            if (returnedItem.isEmpty())
                System.out.format("No item found with the key %s!\n", key);
            else {
                Set<String> keys = returnedItem.keySet();
                System.out.println("Amazon DynamoDB table attributes: \n");
                for (String key1 : keys) {
                    System.out.format("%s: %s\n", key1,
returnedItem.get(key1).toString());
                }
            }

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Untuk detail API, lihat GetItemdi Referensi AWS SDK for Java 2.x API.

### `ListTables`

Contoh kode berikut menunjukkan cara menggunakan`ListTables`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ListTablesRequest;
import software.amazon.awssdk.services.dynamodb.model.ListTablesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTables {
    public static void main(String[] args) {
        System.out.println("Listing your Amazon DynamoDB tables:\n");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        listAllTables(ddb);
        ddb.close();
```

```
    }

    public static void listAllTables(DynamoDbClient ddb) {
        boolean moreTables = true;
        String lastName = null;

        while (moreTables) {
            try {
                ListTablesResponse response = null;
                if (lastName == null) {
                    ListTablesRequest request = ListTablesRequest.builder().build();
                    response = ddb.listTables(request);
                } else {
                    ListTablesRequest request = ListTablesRequest.builder()
                            .exclusiveStartTableName(lastName).build();
                    response = ddb.listTables(request);
                }

                List<String> tableNames = response.tableNames();
                if (tableNames.size() > 0) {
                    for (String curName : tableNames) {
                        System.out.format("* %s\n", curName);
                    }
                } else {
                    System.out.println("No tables found!");
                    System.exit(0);
                }

                lastName = response.lastEvaluatedTableName();
                if (lastName == null) {
                    moreTables = false;
                }

            } catch (DynamoDbException e) {
                System.err.println(e.getMessage());
                System.exit(1);
            }
        }
        System.out.println("\nDone!");
    }
}
```

- Untuk detail API, lihat ListTablesdi Referensi AWS SDK for Java 2.x API.

### `PutItem`

Contoh kode berikut menunjukkan cara menggunakan`PutItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menempatkan item ke dalam tabel menggunakan DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.PutItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To place items into an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client. See the EnhancedPutItem example.
 */
public class PutItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal> <albumtitle> <albumtitleval> <awards>
 <awardsval> <Songtitle> <songtitleval>
```

```
                Where:
                    tableName - The Amazon DynamoDB table in which an item is placed
(for example, Music3).
                    key - The key used in the Amazon DynamoDB table (for example,
Artist).
                    keyval - The key value that represents the item to get (for
example, Famous Band).
                    albumTitle - The Album title (for example, AlbumTitle).
                    AlbumTitleValue - The name of the album (for example, Songs
About Life ).
                    Awards - The awards column (for example, Awards).
                    AwardVal - The value of the awards (for example, 10).
                    SongTitle - The song title (for example, SongTitle).
                    SongTitleVal - The value of the song title (for example, Happy
Day).
                **Warning** This program will  place an item that you specify into a
table!
                """;

        if (args.length != 9) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        String albumTitle = args[3];
        String albumTitleValue = args[4];
        String awards = args[5];
        String awardVal = args[6];
        String songTitle = args[7];
        String songTitleVal = args[8];

        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        putItemInTable(ddb, tableName, key, keyVal, albumTitle, albumTitleValue,
awards, awardVal, songTitle,
                songTitleVal);
        System.out.println("Done!");
        ddb.close();
```

```
    }

    public static void putItemInTable(DynamoDbClient ddb,
            String tableName,
            String key,
            String keyVal,
            String albumTitle,
            String albumTitleValue,
            String awards,
            String awardVal,
            String songTitle,
            String songTitleVal) {

        HashMap<String, AttributeValue> itemValues = new HashMap<>();
        itemValues.put(key, AttributeValue.builder().s(keyVal).build());
        itemValues.put(songTitle, AttributeValue.builder().s(songTitleVal).build());
        itemValues.put(albumTitle,
 AttributeValue.builder().s(albumTitleValue).build());
        itemValues.put(awards, AttributeValue.builder().s(awardVal).build());

        PutItemRequest request = PutItemRequest.builder()
                .tableName(tableName)
                .item(itemValues)
                .build();

        try {
            PutItemResponse response = ddb.putItem(request);
            System.out.println(tableName + " was successfully updated. The request
 id is "
                    + response.responseMetadata().requestId());

        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
 found.\n", tableName);
            System.err.println("Be sure that it exists and that you've typed its
 name correctly!");
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutItemdi Referensi AWS SDK for Java 2.x API.

### `Query`

Contoh kode berikut menunjukkan cara menggunakan`Query`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kueri tabel dengan menggunakan DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To query items from an Amazon DynamoDB table using the AWS SDK for Java V2,
 * its better practice to use the
 * Enhanced Client. See the EnhancedQueryRecords example.
 */
public class Query {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyVal>

                Where:
                    tableName - The Amazon DynamoDB table to put the item in (for
 example, Music3).
                    partitionKeyName - The partition key name of the Amazon DynamoDB
 table (for example, Artist).
                    partitionKeyVal - The value of the partition key that should
 match (for example, Famous Band).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String partitionKeyName = args[1];
        String partitionKeyVal = args[2];

        // For more information about an alias, see:
        // https://docs.aws.amazon.com/amazondynamodb/latest/developerguide/
Expressions.ExpressionAttributeNames.html
        String partitionAlias = "#a";

        System.out.format("Querying %s", tableName);
        System.out.println("");
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        int count = queryTable(ddb, tableName, partitionKeyName, partitionKeyVal,
 partitionAlias);
        System.out.println("There were " + count + "  record(s) returned");
        ddb.close();
    }

    public static int queryTable(DynamoDbClient ddb, String tableName, String
 partitionKeyName, String partitionKeyVal,
            String partitionAlias) {
        // Set up an alias for the partition key name in case it's a reserved word.
        HashMap<String, String> attrNameAlias = new HashMap<String, String>();
```

```
        attrNameAlias.put(partitionAlias, partitionKeyName);

        // Set up mapping of the partition name with the value.
        HashMap<String, AttributeValue> attrValues = new HashMap<>();
        attrValues.put(":" + partitionKeyName, AttributeValue.builder()
                .s(partitionKeyVal)
                .build());

        QueryRequest queryReq = QueryRequest.builder()
                .tableName(tableName)
                .keyConditionExpression(partitionAlias + " = :" + partitionKeyName)
                .expressionAttributeNames(attrNameAlias)
                .expressionAttributeValues(attrValues)
                .build();

        try {
            QueryResponse response = ddb.query(queryReq);
            return response.count();

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return -1;
    }
}
```

Melakukan tabel menggunakan `DynamoDbClient` dan indeks sekunder.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Create the Movies table by running the Scenario example and loading the Movie
 * data from the JSON file. Next create a secondary
 * index for the Movies table that uses only the year column. Name the index
 * **year-index**. For more information, see:
 *
 * https://docs.aws.amazon.com/amazondynamodb/latest/developerguide/GSI.html
 */
public class QueryItemsUsingIndex {
    public static void main(String[] args) {
        String tableName = "Movies";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        queryIndex(ddb, tableName);
        ddb.close();
    }

    public static void queryIndex(DynamoDbClient ddb, String tableName) {
        try {
            Map<String, String> expressionAttributesNames = new HashMap<>();
            expressionAttributesNames.put("#year", "year");
            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
            expressionAttributeValues.put(":yearValue",
 AttributeValue.builder().n("2013").build());

            QueryRequest request = QueryRequest.builder()
                    .tableName(tableName)
                    .indexName("year-index")
                    .keyConditionExpression("#year = :yearValue")
                    .expressionAttributeNames(expressionAttributesNames)
                    .expressionAttributeValues(expressionAttributeValues)
                    .build();

            System.out.println("=== Movie Titles ===");
            QueryResponse response = ddb.query(request);
            response.items()
                    .forEach(movie -> System.out.println(movie.get("title").s()));
```

```
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### `Scan`

Contoh kode berikut menunjukkan cara menggunakan`Scan`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Memindai tabel Amazon DynamoDbClientDynamoDB menggunakan.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;
import java.util.Map;
import java.util.Set;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To scan items from an Amazon DynamoDB table using the AWS SDK for Java V2,
```

```
 * its better practice to use the
 * Enhanced Client, See the EnhancedScanRecords example.
 */

public class DynamoDBScanItems {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <tableName>

                Where:
                    tableName - The Amazon DynamoDB table to get information from
 (for example, Music3).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();

        scanItems(ddb, tableName);
        ddb.close();
    }

    public static void scanItems(DynamoDbClient ddb, String tableName) {
        try {
            ScanRequest scanRequest = ScanRequest.builder()
                    .tableName(tableName)
                    .build();

            ScanResponse response = ddb.scan(scanRequest);
            for (Map<String, AttributeValue> item : response.items()) {
                Set<String> keys = item.keySet();
                for (String key : keys) {
                    System.out.println("The key name is " + key + "\n");
                    System.out.println("The value is " + item.get(key).s());
```

```
                }
            }

        } catch (DynamoDbException e) {
            e.printStackTrace();
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Scan di Referensi API AWS SDK for Java 2.x .

### `UpdateItem`

Contoh kode berikut menunjukkan cara menggunakan`UpdateItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Memperbarui item dalam tabel menggunakan DynamoDbClient.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.AttributeAction;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.AttributeValueUpdate;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To update an Amazon DynamoDB table using the AWS SDK for Java V2, its better
 * practice to use the
 * Enhanced Client, See the EnhancedModifyItem example.
 */
public class UpdateItem {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <tableName> <key> <keyVal> <name> <updateVal>

                Where:
                    tableName - The Amazon DynamoDB table (for example, Music3).
                    key - The name of the key in the table (for example, Artist).
                    keyVal - The value of the key (for example, Famous Band).
                    name - The name of the column where the value is updated (for
 example, Awards).
                    updateVal - The value used to update an item (for example, 14).
                 Example:
                    UpdateItem Music3 Artist Famous Band Awards 14
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String tableName = args[0];
        String key = args[1];
        String keyVal = args[2];
        String name = args[3];
        String updateVal = args[4];

        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
                .region(region)
                .build();
        updateTableItem(ddb, tableName, key, keyVal, name, updateVal);
        ddb.close();
    }

    public static void updateTableItem(DynamoDbClient ddb,
```

```
            String tableName,
            String key,
            String keyVal,
            String name,
            String updateVal) {

        HashMap<String, AttributeValue> itemKey = new HashMap<>();
        itemKey.put(key, AttributeValue.builder()
                .s(keyVal)
                .build());

        HashMap<String, AttributeValueUpdate> updatedValues = new HashMap<>();
        updatedValues.put(name, AttributeValueUpdate.builder()
                .value(AttributeValue.builder().s(updateVal).build())
                .action(AttributeAction.PUT)
                .build());

        UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(itemKey)
                .attributeUpdates(updatedValues)
                .build();

        try {
            ddb.updateItem(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("The Amazon DynamoDB table was updated!");
    }
}
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

### `UpdateTimeToLive`

Contoh kode berikut menunjukkan cara menggunakan`UpdateTimeToLive`.

SDK untuk Java 2.x

Aktifkan TTL pada tabel DynamoDB yang ada menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.TimeToLiveSpecification;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveResponse;

import java.util.logging.Level;
import java.util.logging.Logger;

    public UpdateTimeToLiveResponse enableTTL(final String tableName, final String
 attributeName, final Region region) {
        final TimeToLiveSpecification ttlSpec = TimeToLiveSpecification.builder()
            .attributeName(attributeName)
            .enabled(true)
            .build();

        final UpdateTimeToLiveRequest request = UpdateTimeToLiveRequest.builder()
            .tableName(tableName)
            .timeToLiveSpecification(ttlSpec)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.updateTimeToLive(request);
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

Nonaktifkan TTL pada tabel DynamoDB yang ada menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
```

```
import software.amazon.awssdk.services.dynamodb.model.TimeToLiveSpecification;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateTimeToLiveResponse;

import java.util.logging.Level;
import java.util.logging.Logger;

    public UpdateTimeToLiveResponse disableTTL(
        final String tableName, final String attributeName, final Region region) {
        final TimeToLiveSpecification ttlSpec = TimeToLiveSpecification.builder()
            .attributeName(attributeName)
            .enabled(false)
            .build();

        final UpdateTimeToLiveRequest request = UpdateTimeToLiveRequest.builder()
            .tableName(tableName)
            .timeToLiveSpecification(ttlSpec)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            return ddb.updateTimeToLive(request);
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Untuk detail API, lihat UpdateTimeToLivedi Referensi AWS SDK for Java 2.x API.

## Skenario

Membangun aplikasi untuk mengirimkan data ke tabel DynamoDB

Contoh kode berikut menunjukkan cara membuat aplikasi yang mengirimkan data ke tabel Amazon DynamoDB dan memberi tahu Anda saat pengguna memperbarui tabel.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web dinamis yang mengirimkan data menggunakan API Java Amazon DynamoDB dan mengirim pesan teks menggunakan API Java Amazon Simple Notification Service.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon SNS

## Bandingkan beberapa nilai dengan satu atribut

Contoh kode berikut menunjukkan bagaimana membandingkan beberapa nilai dengan atribut tunggal di DynamoDB.

- Gunakan operator IN untuk membandingkan beberapa nilai dengan satu atribut.
- Bandingkan operator IN dengan beberapa kondisi OR.
- Memahami manfaat kompleksitas kinerja dan ekspresi menggunakan IN.

SDK untuk Java 2.x

Bandingkan beberapa nilai dengan atribut tunggal di DynamoDB menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Locale;
import java.util.Map;
```

```
   /**
    * Queries a table using the IN operator to compare multiple values with a
single attribute.
    *
    * <p>This method demonstrates how to use the IN operator in a filter expression
    * to match an attribute against multiple values.
    *
    * @param dynamoDbClient The DynamoDB client
    * @param tableName The name of the DynamoDB table
    * @param partitionKeyName The name of the partition key attribute
    * @param partitionKeyValue The value of the partition key to query
    * @param attributeName The name of the attribute to compare
    * @param valuesList List of values to compare against
    * @return The query response from DynamoDB
    * @throws DynamoDbException if an error occurs during the operation
    */
   public static QueryResponse compareMultipleValues(
       DynamoDbClient dynamoDbClient,
       String tableName,
       String partitionKeyName,
       AttributeValue partitionKeyValue,
       String attributeName,
       List<AttributeValue> valuesList) {

       // Create expression attribute names
       Map<String, String> expressionAttributeNames = new HashMap<>();
       expressionAttributeNames.put("#pkName", partitionKeyName);
       expressionAttributeNames.put("#attrName", attributeName);

       // Create expression attribute values
       Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
       expressionAttributeValues.put(":pkValue", partitionKeyValue);

       // Add values for IN operator
       for (int i = 0; i < valuesList.size(); i++) {
           expressionAttributeValues.put(":val" + i, valuesList.get(i));
       }

       // Build the IN clause
       StringBuilder inClause = new StringBuilder();
       for (int i = 0; i < valuesList.size(); i++) {
           if (i > 0) {
               inClause.append(", ");
```

```
            }
            inClause.append(":val").append(i);
        }

        // Define the query parameters
        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression("#attrName IN (" + inClause.toString() + ")")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Queries a table using multiple OR conditions to compare multiple values with
a single attribute.
     *
     * <p>This method demonstrates the alternative approach to using the IN
operator,
     * by using multiple OR conditions.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key to query
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return The query response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static QueryResponse compareWithOrConditions(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
        String attributeName,
        List<AttributeValue> valuesList) {

        // Create expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
```

```
        expressionAttributeNames.put("#pkName", partitionKeyName);
        expressionAttributeNames.put("#attrName", attributeName);

        // Create expression attribute values
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        expressionAttributeValues.put(":pkValue", partitionKeyValue);

        // Add values for OR conditions
        for (int i = 0; i < valuesList.size(); i++) {
            expressionAttributeValues.put(":val" + i, valuesList.get(i));
        }

        // Build the OR conditions
        StringBuilder orConditions = new StringBuilder();
        for (int i = 0; i < valuesList.size(); i++) {
            if (i > 0) {
                orConditions.append(" OR ");
            }
            orConditions.append("#attrName = :val").append(i);
        }

        // Define the query parameters
        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression(orConditions.toString())
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Compares the performance of using the IN operator versus multiple OR
conditions.
     *
     * <p>This method demonstrates the performance difference between using the IN
operator
     * and using multiple OR conditions.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
```

```
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key to query
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return Map containing the performance comparison results
     */
    public static Map<String, Object> comparePerformance(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
        String attributeName,
        List<AttributeValue> valuesList) {

        Map<String, Object> results = new HashMap<>();

        try {
            // Measure performance of IN operator
            long inStartTime = System.nanoTime();
            QueryResponse inResponse = compareMultipleValues(
                dynamoDbClient, tableName, partitionKeyName, partitionKeyValue,
attributeName, valuesList);
            long inEndTime = System.nanoTime();
            long inDuration = inEndTime - inStartTime;

            // Measure performance of OR conditions
            long orStartTime = System.nanoTime();
            QueryResponse orResponse = compareWithOrConditions(
                dynamoDbClient, tableName, partitionKeyName, partitionKeyValue,
attributeName, valuesList);
            long orEndTime = System.nanoTime();
            long orDuration = orEndTime - orStartTime;

            // Record results
            results.put("inOperatorDuration", inDuration);
            results.put("orConditionsDuration", orDuration);
            results.put("inOperatorItems", inResponse.count());
            results.put("orConditionsItems", orResponse.count());
            results.put("inOperatorExpression", "IN operator with " +
valuesList.size() + " values");
            results.put("orConditionsExpression", valuesList.size() + " OR
conditions");
            results.put("success", true);
```

```
        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
     * Scans a table using the IN operator with a large number of values.
     *
     * <p>This method demonstrates how to use the IN operator with a large number of
values,
     * which can help stay within the 300 operator limit.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param attributeName The name of the attribute to compare
     * @param valuesList List of values to compare against
     * @return The scan response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static ScanResponse scanWithLargeInClause(
        DynamoDbClient dynamoDbClient, String tableName, String attributeName,
List<AttributeValue> valuesList) {

        // Create expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#attrName", attributeName);

        // Create expression attribute values
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

        // Add values for IN operator
        for (int i = 0; i < valuesList.size(); i++) {
            expressionAttributeValues.put(":val" + i, valuesList.get(i));
        }

        // Build the IN clause
        StringBuilder inClause = new StringBuilder();
        for (int i = 0; i < valuesList.size(); i++) {
            if (i > 0) {
                inClause.append(", ");
            }
```

```
            inClause.append(":val").append(i);
        }

        // Define the scan parameters
        ScanRequest request = ScanRequest.builder()
            .tableName(tableName)
            .filterExpression("#attrName IN (" + inClause.toString() + ")")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the scan operation
        return dynamoDbClient.scan(request);
    }

    /**
     * Generates a list of sample values for testing.
     *
     * <p>Helper method to generate a list of sample values for testing.
     *
     * @param valueType The type of values to generate (string, number, or boolean)
     * @param count The number of values to generate
     * @return List of generated attribute values
     */
    public static List<AttributeValue> generateSampleValues(String valueType, int
count) {
        List<AttributeValue> values = new ArrayList<>();

        for (int i = 0; i < count; i++) {
            AttributeValue value;

            switch (valueType.toLowerCase(Locale.ROOT)) {
                case "string":
                    value = AttributeValue.builder().s("Value" + i).build();
                    break;
                case "number":
                    value = AttributeValue.builder().n(String.valueOf(i)).build();
                    break;
                case "boolean":
                    value = AttributeValue.builder().bool(i % 2 == 0).build();
                    break;
                default:
                    throw new IllegalArgumentException("Unsupported value type: " +
valueType);
```

```
            }

            values.add(value);
        }

        return values;
    }
```

Contoh penggunaan membandingkan beberapa nilai dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        System.out.println("Demonstrating how to compare multiple values with a
single attribute in DynamoDB");

        try {
            // Example 1: Using the IN operator
            System.out.println("\nExample 1: Using the IN operator");
            List<AttributeValue> categories = List.of(
                AttributeValue.builder().s("Electronics").build(),
                AttributeValue.builder().s("Computers").build(),
                AttributeValue.builder().s("Accessories").build());

            QueryResponse inResponse = compareMultipleValues(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
                "Category",
                categories);

            System.out.println("Found " + inResponse.count() + " items using IN
operator");
            System.out.println("Items: " + inResponse.items());

            // Example 2: Using multiple OR conditions
            System.out.println("\nExample 2: Using multiple OR conditions");
            QueryResponse orResponse = compareWithOrConditions(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
```

```
                "Category",
                categories);

            System.out.println("Found " + orResponse.count() + " items using OR
conditions");
            System.out.println("Items: " + orResponse.items());

            // Example 3: Performance comparison
            System.out.println("\nExample 3: Performance comparison");
            Map<String, Object> perfComparison = comparePerformance(
                dynamoDbClient,
                tableName,
                "Department",
                AttributeValue.builder().s("Retail").build(),
                "Category",
                categories);

            if ((boolean) perfComparison.get("success")) {
                System.out.println("IN operator duration: " +
perfComparison.get("inOperatorDuration") + " ns");
                System.out.println("OR conditions duration: " +
perfComparison.get("orConditionsDuration") + " ns");
                System.out.println("IN operator found " +
perfComparison.get("inOperatorItems") + " items");
                System.out.println("OR conditions found " +
perfComparison.get("orConditionsItems") + " items");
                System.out.println("Expression complexity comparison:");
                System.out.println("  IN operator: " +
perfComparison.get("inOperatorExpression"));
                System.out.println("  OR conditions: " +
perfComparison.get("orConditionsExpression"));
            } else {
                System.out.println("Performance comparison failed: " +
perfComparison.get("error"));
            }

            // Example 4: Using IN with a large number of values
            System.out.println("\nExample 4: Using IN with a large number of
values");
            List<AttributeValue> productIds = generateSampleValues("string", 20);

            ScanResponse largeInResponse = scanWithLargeInClause(dynamoDbClient,
tableName, "ProductId", productIds);
```

```
            System.out.println(
                "Found " + largeInResponse.count() + " items using IN with " +
productIds.size() + " values");

            // Explain the benefits of using IN
            System.out.println("\nKey points about using the IN operator in
DynamoDB:");
            System.out.println("1. The IN operator allows comparing a single
attribute against multiple values");
            System.out.println("2. IN is more concise than using multiple OR
conditions");
            System.out.println("3. IN counts as only 1 operator regardless of the
number of values");
            System.out.println("4. Multiple OR conditions count as 1 operator per
condition plus 1 per OR");
            System.out.println("5. Using IN helps stay within the 300 operator limit
for complex expressions");
            System.out.println("6. IN can be used in filter expressions and
condition expressions");
            System.out.println("7. The IN operator supports up to 100 comparison
values");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - Kueri
  - Scan

Perbarui TTL item secara kondisional

Contoh kode berikut menunjukkan cara memperbarui TTL item secara kondisional.

SDK untuk Java 2.x

Perbarui TTL pada Item DynamoDB yang ada dalam tabel, dengan kondisi.

```
package com.amazon.samplelib.ttl;

import com.amazon.samplelib.CodeSampleUtils;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import
 software.amazon.awssdk.services.dynamodb.model.ConditionalCheckFailedException;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.Map;
import java.util.Optional;

/**
 * Updates an item in a DynamoDB table with TTL attributes using a conditional
 expression.
 * This class demonstrates how to conditionally update TTL expiration timestamps.
 */
public class UpdateTTLConditional {

    private static final String USAGE =
        """
            Usage:
                <tableName> <primaryKey> <sortKey> <region>
            Where:
                tableName - The Amazon DynamoDB table being queried.
                primaryKey - The name of the primary key. Also known as the hash or
 partition key.
                sortKey - The name of the sort key. Also known as the range
 attribute.
                region (optional) - The AWS region that the Amazon DynamoDB table is
 located in. (Default: us-east-1)
            """;
    private static final int DAYS_TO_EXPIRE = 90;
    private static final int SECONDS_PER_DAY = 24 * 60 * 60;
    private static final String PRIMARY_KEY_ATTR = "primaryKey";
    private static final String SORT_KEY_ATTR = "sortKey";
    private static final String UPDATED_AT_ATTR = "updatedAt";
    private static final String EXPIRE_AT_ATTR = "expireAt";
    private static final String UPDATE_EXPRESSION = "SET " + UPDATED_AT_ATTR + "=:c,
 " + EXPIRE_AT_ATTR + "=:e";
```

```
   private static final String CONDITION_EXPRESSION = "attribute_exists(" +
PRIMARY_KEY_ATTR + ")";
   private static final String SUCCESS_MESSAGE = "%s UpdateItem operation with TTL
successful.";
   private static final String CONDITION_FAILED_MESSAGE = "Condition check failed.
Item does not exist.";
   private static final String TABLE_NOT_FOUND_ERROR = "Error: The Amazon DynamoDB
table \"%s\" can't be found.";

   private final DynamoDbClient dynamoDbClient;

   /**
    * Constructs an UpdateTTLConditional with a default DynamoDB client.
    */
   public UpdateTTLConditional() {
       this.dynamoDbClient = null;
   }

   /**
    * Constructs an UpdateTTLConditional with the specified DynamoDB client.
    *
    * @param dynamoDbClient The DynamoDB client to use
    */
   public UpdateTTLConditional(final DynamoDbClient dynamoDbClient) {
       this.dynamoDbClient = dynamoDbClient;
   }

   /**
    * Main method to demonstrate conditionally updating an item with TTL.
    *
    * @param args Command line arguments
    */
   public static void main(final String[] args) {
       try {
           int result = new UpdateTTLConditional().processArgs(args);
           System.exit(result);
       } catch (Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Process command line arguments and conditionally update an item with TTL.
```

```
     *
     * @param args Command line arguments
     * @return 0 if successful, non-zero otherwise
     * @throws ResourceNotFoundException If the table doesn't exist
     * @throws DynamoDbException If an error occurs during the operation
     * @throws IllegalArgumentException If arguments are invalid
     */
    public int processArgs(final String[] args) {
        // Argument validation (remove or replace this line when reusing this code)
        CodeSampleUtils.validateArgs(args, new int[] {3, 4}, USAGE);

        final String tableName = args[0];
        final String primaryKey = args[1];
        final String sortKey = args[2];
        final Region region = Optional.ofNullable(args.length > 3 ? args[3] : null)
            .map(Region::of)
            .orElse(Region.US_EAST_1);

        // Get current time in epoch second format
        final long currentTime = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = currentTime + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);

        // Create the key map for the item to update
        final Map<String, AttributeValue> keyMap = Map.of(
            PRIMARY_KEY_ATTR, AttributeValue.builder().s(primaryKey).build(),
            SORT_KEY_ATTR, AttributeValue.builder().s(sortKey).build());

        // Create the expression attribute values
        final Map<String, AttributeValue> expressionAttributeValues = Map.of(
            ":c", AttributeValue.builder().n(String.valueOf(currentTime)).build(),
            ":e", AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(keyMap)
            .updateExpression(UPDATE_EXPRESSION)
            .conditionExpression(CONDITION_EXPRESSION)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
```

```
            : DynamoDbClient.builder().region(region).build()) {
            final UpdateItemResponse response = ddb.updateItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
            return 0;
        } catch (ConditionalCheckFailedException e) {
            System.err.println(CONDITION_FAILED_MESSAGE);
            throw e;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
}
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

### Hitung operator ekspresi

Contoh kode berikut menunjukkan bagaimana menghitung operator ekspresi di DynamoDB.

- Memahami batas 300 operator DynamoDB.
- Hitung operator dalam ekspresi kompleks.
- Optimalkan ekspresi agar tetap dalam batas.

#### SDK untuk Java 2.x

Menunjukkan penghitungan operator ekspresi menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;
import java.util.regex.Matcher;
```

```
import java.util.regex.Pattern;

    /**
     * Creates a complex filter expression with a specified number of conditions.
     *
     * <p>This method demonstrates how to generate a complex expression with
     * a specific number of operators to test the 300 operator limit.
     *
     * @param conditionsCount Number of conditions to include
     * @param useAnd Whether to use AND (true) or OR (false) between conditions
     * @return Map containing the filter expression, attribute values, and operator
 count
     */
    public static Map<String, Object> createComplexFilterExpression(int
 conditionsCount, boolean useAnd) {
        // Initialize the expression parts and attribute values
        StringBuilder filterExpression = new StringBuilder();
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

        // Generate the specified number of conditions
        for (int i = 0; i < conditionsCount; i++) {
            // Add the operator between conditions (except for the first one)
            if (i > 0) {
                filterExpression.append(useAnd ? " AND " : " OR ");
            }

            // Alternate between different comparison operators for variety
            String valueKey = ":val" + i;

            switch (i % 5) {
                case 0:
                    filterExpression.append("attribute").append(i).append(" =
 ").append(valueKey);
                    expressionAttributeValues.put(
                        valueKey, AttributeValue.builder().s("value" + i).build());
                    break;
                case 1:
                    filterExpression.append("attribute").append(i).append(" >
 ").append(valueKey);
                    expressionAttributeValues.put(
                        valueKey,
 AttributeValue.builder().n(String.valueOf(i)).build());
                    break;
                case 2:
```

```
                    filterExpression.append("attribute").append(i).append(" <
").append(valueKey);
                    expressionAttributeValues.put(
                        valueKey,
                        AttributeValue.builder().n(String.valueOf(i * 10)).build());
                    break;
                case 3:
                    filterExpression
                        .append("contains(attribute")
                        .append(i)
                        .append(", ")
                        .append(valueKey)
                        .append(")");
                    expressionAttributeValues.put(
                        valueKey, AttributeValue.builder().s("substring" +
i).build());
                    break;
                case 4:
                    filterExpression
                        .append("attribute_exists(attribute")
                        .append(i)
                        .append(")");
                    break;
                default:
                    // This case will never be reached, but added to satisfy
checkstyle
                    break;
            }
        }

        // Calculate the operator count
        // Each condition has 1 operator (=, >, <, contains, attribute_exists)
        // Each AND or OR between conditions is 1 operator
        int operatorCount = conditionsCount + (conditionsCount > 0 ? conditionsCount
- 1 : 0);

        // Create the result map
        Map<String, Object> result = new HashMap<>();
        result.put("filterExpression", filterExpression.toString());
        result.put("expressionAttributeValues", expressionAttributeValues);
        result.put("operatorCount", operatorCount);

        return result;
    }
```

```
   /**
    * Creates a complex update expression with a specified number of operations.
    *
    * <p>This method demonstrates how to generate a complex update expression with
    * a specific number of operators to test the 300 operator limit.
    *
    * @param operationsCount Number of operations to include
    * @return Map containing the update expression, attribute values, and operator
count
    */
   public static Map<String, Object> createComplexUpdateExpression(int
operationsCount) {
       // Initialize the expression parts and attribute values
       StringBuilder updateExpression = new StringBuilder("SET ");
       Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

       // Generate the specified number of SET operations
       for (int i = 0; i < operationsCount; i++) {
           // Add comma between operations (except for the first one)
           if (i > 0) {
               updateExpression.append(", ");
           }

           // Alternate between different types of SET operations
           String valueKey = ":val" + i;

           switch (i % 3) {
               case 0:
                   // Simple assignment (1 operator: =)
                   updateExpression.append("attribute").append(i).append(" =
").append(valueKey);
                   expressionAttributeValues.put(
                       valueKey, AttributeValue.builder().s("value" + i).build());
                   break;
               case 1:
                   // Addition (2 operators: = and +)
                   updateExpression
                       .append("attribute")
                       .append(i)
                       .append(" = attribute")
                       .append(i)
                       .append(" + ")
                       .append(valueKey);
```

```
                    expressionAttributeValues.put(
                        valueKey,
AttributeValue.builder().n(String.valueOf(i)).build());
                    break;
                case 2:
                    // Conditional assignment with if_not_exists (2 operators: = and
if_not_exists)
                    updateExpression
                        .append("attribute")
                        .append(i)
                        .append(" = if_not_exists(attribute")
                        .append(i)
                        .append(", ")
                        .append(valueKey)
                        .append(")");
                    expressionAttributeValues.put(
                        valueKey,
                        AttributeValue.builder().n(String.valueOf(i * 10)).build());
                    break;
                default:
                    // This case will never be reached, but added to satisfy
checkstyle
                    break;
            }
        }

        // Calculate the operator count
        // Each operation has 1-2 operators as noted above
        int operatorCount = 0;
        for (int i = 0; i < operationsCount; i++) {
            operatorCount += (i % 3 == 0) ? 1 : 2;
        }

        // Create the result map
        Map<String, Object> result = new HashMap<>();
        result.put("updateExpression", updateExpression.toString());
        result.put("expressionAttributeValues", expressionAttributeValues);
        result.put("operatorCount", operatorCount);

        return result;
    }

    /**
     * Test the operator limit by attempting an operation with a complex expression.
```

```
     *
     * <p>This method demonstrates what happens when an expression approaches or
     * exceeds the 300 operator limit.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param operatorCount Target number of operators to include
     * @return Map containing the result of the operation attempt
     */
    public static Map<String, Object> testOperatorLimit(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, int operatorCount) {

        // Create a complex update expression with the specified operator count
        Map<String, Object> expressionData =
            createComplexUpdateExpression((int) Math.ceil(operatorCount / 1.5)); //
Adjust to get close to target count

        String updateExpression = (String) expressionData.get("updateExpression");
        @SuppressWarnings("unchecked")
        Map<String, AttributeValue> expressionAttributeValues =
            (Map<String, AttributeValue>)
expressionData.get("expressionAttributeValues");
        int actualCount = (int) expressionData.get("operatorCount");

        System.out.println("Generated update expression with approximately " +
actualCount + " operators");

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression(updateExpression)
            .expressionAttributeValues(expressionAttributeValues)
            .returnValues("UPDATED_NEW")
            .build();

        try {
            // Attempt the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            Map<String, Object> result = new HashMap<>();
            result.put("success", true);
```

```
            result.put("message", "Operation succeeded with " + actualCount + "
operators");
            result.put("data", response);
            return result;

        } catch (DynamoDbException e) {
            // Check if the error is due to exceeding the operator limit
            if (e.getMessage().contains("too many operators")) {
                Map<String, Object> result = new HashMap<>();
                result.put("success", false);
                result.put("message", "Operation failed: " + e.getMessage());
                result.put("operatorCount", actualCount);
                return result;
            }

            // Return other errors
            Map<String, Object> result = new HashMap<>();
            result.put("success", false);
            result.put("message", "Operation failed: " + e.getMessage());
            result.put("error", e);
            return result;
        }
    }

    /**
     * Break down a complex expression into multiple simpler operations.
     *
     * <p>This method demonstrates how to handle expressions that would exceed
     * the 300 operator limit by breaking them into multiple operations.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param totalOperations Total number of operations to perform
     * @return Map containing the results of the operations
     */
    public static Map<String, Object> breakDownComplexExpression(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, int totalOperations) {

        // Calculate how many operations we can safely include in each batch
        // Using 150 as a conservative limit (well below 300)
        final int operationsPerBatch = 100;
```

```
        final int batchCount = (int) Math.ceil((double) totalOperations /
operationsPerBatch);

        System.out.println("Breaking down " + totalOperations + " operations into "
+ batchCount + " batches");

        Map<String, Object> results = new HashMap<>();
        results.put("totalBatches", batchCount);

        Map<Integer, Map<String, Object>> batchResults = new HashMap<>();

        // Process each batch
        for (int batch = 0; batch < batchCount; batch++) {
            // Calculate the operations for this batch
            int batchStart = batch * operationsPerBatch;
            int batchEnd = Math.min(batchStart + operationsPerBatch,
totalOperations);
            int batchSize = batchEnd - batchStart;

            System.out.println(
                "Processing batch " + (batch + 1) + "/" + batchCount + " with " +
batchSize + " operations");

            // Create an update expression for this batch
            Map<String, Object> expressionData =
createComplexUpdateExpression(batchSize);

            String updateExpression = (String)
expressionData.get("updateExpression");
            @SuppressWarnings("unchecked")
            Map<String, AttributeValue> expressionAttributeValues =
                (Map<String, AttributeValue>)
expressionData.get("expressionAttributeValues");
            int operatorCount = (int) expressionData.get("operatorCount");

            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression(updateExpression)
                .expressionAttributeValues(expressionAttributeValues)
                .returnValues("UPDATED_NEW")
                .build();
```

```
            try {
                // Perform the update operation for this batch
                UpdateItemResponse response = dynamoDbClient.updateItem(request);

                Map<String, Object> batchResult = new HashMap<>();
                batchResult.put("batch", batch + 1);
                batchResult.put("success", true);
                batchResult.put("operatorCount", operatorCount);
                batchResult.put("attributes", response.attributes());

                batchResults.put(batch, batchResult);

            } catch (DynamoDbException e) {
                Map<String, Object> batchResult = new HashMap<>();
                batchResult.put("batch", batch + 1);
                batchResult.put("success", false);
                batchResult.put("operatorCount", operatorCount);
                batchResult.put("error", e.getMessage());

                batchResults.put(batch, batchResult);

                // Continue with next batch instead of breaking
                continue;
            }
        }

        results.put("results", batchResults);
        return results;
    }

    /**
     * Count operators in a DynamoDB expression based on the rules in the
documentation.
     *
     * <p>This method demonstrates how operators are counted according to the
     * DynamoDB documentation.
     *
     * @param expression The DynamoDB expression to analyze
     * @return Map containing the breakdown of operator counts
     */
    public static Map<String, Integer> countOperatorsInExpression(String expression)
{
        // Initialize counters for different operator types
        Map<String, Integer> counts = new HashMap<>();
```

```
        counts.put("comparisonOperators", 0);
        counts.put("logicalOperators", 0);
        counts.put("functions", 0);
        counts.put("arithmeticOperators", 0);
        counts.put("specialOperators", 0);
        counts.put("total", 0);

        // Count comparison operators (=, <>, <, <=, >, >=)
        // This is a simplified approach and may not catch all cases
        int comparisonCount = 0;
        Pattern comparisonPattern = Pattern.compile("(=|<>|<=|>=|<|>)");
        Matcher comparisonMatcher = comparisonPattern.matcher(expression);
        while (comparisonMatcher.find()) {
            comparisonCount++;
        }
        counts.put("comparisonOperators", comparisonCount);

        // Count logical operators (AND, OR, NOT)
        int andCount = countOccurrences(expression, "\\bAND\\b");
        int orCount = countOccurrences(expression, "\\bOR\\b");
        int notCount = countOccurrences(expression, "\\bNOT\\b");
        counts.put("logicalOperators", andCount + orCount + notCount);

        // Count functions (attribute_exists, attribute_not_exists, attribute_type,
 begins_with, contains, size)
        int functionCount = countOccurrences(
            expression,
            "\\b(attribute_exists|attribute_not_exists|attribute_type|begins_with|
contains|size|if_not_exists)\\(");
        counts.put("functions", functionCount);

        // Count arithmetic operators (+ and -)
        // This is a simplified approach and may not catch all cases
        int arithmeticCount = 0;
        Pattern arithmeticPattern = Pattern.compile("[a-zA-Z0-9_)\\]]\\s*[\\+\\-]\
\s*[a-zA-Z0-9_:(]");
        Matcher arithmeticMatcher = arithmeticPattern.matcher(expression);
        while (arithmeticMatcher.find()) {
            arithmeticCount++;
        }
        counts.put("arithmeticOperators", arithmeticCount);

        // Count special operators (BETWEEN, IN)
        int betweenCount = countOccurrences(expression, "\\bBETWEEN\\b");
```

```
        int inCount = countOccurrences(expression, "\\bIN\\b");
        counts.put("specialOperators", betweenCount + inCount);

        // Add extra operators for BETWEEN (each BETWEEN includes an AND)
        int currentLogicalOps = counts.getOrDefault("logicalOperators", 0);
        counts.put("logicalOperators", currentLogicalOps + betweenCount);

        // Calculate total
        int total = counts.getOrDefault("comparisonOperators", 0)
            + counts.getOrDefault("logicalOperators", 0)
            + counts.getOrDefault("functions", 0)
            + counts.getOrDefault("arithmeticOperators", 0)
            + counts.getOrDefault("specialOperators", 0);
        counts.put("total", total);

        return counts;
    }

    /**
     * Helper method to count occurrences of a pattern in a string.
     *
     * @param text The text to search in
     * @param regex The regular expression pattern to search for
     * @return The number of occurrences
     */
    private static int countOccurrences(String text, String regex) {
        final Pattern pattern = Pattern.compile(regex);
        final Matcher matcher = pattern.matcher(text);
        int count = 0;
        while (matcher.find()) {
            count++;
        }
        return count;
    }
```

Contoh penggunaan operator ekspresi menghitung dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());
```

```
        System.out.println("Demonstrating DynamoDB expression operator counting and
the 300 operator limit");

        try {
            // Example 1: Analyze a simple expression
            System.out.println("\nExample 1: Analyzing a simple expression");
            String simpleExpression = "Price = :price AND Rating > :rating AND
Category IN (:cat1, :cat2, :cat3)";
            Map<String, Integer> simpleCount =
countOperatorsInExpression(simpleExpression);

            System.out.println("Expression: " + simpleExpression);
            System.out.println("Operator count breakdown:");
            System.out.println("- Comparison operators: " +
simpleCount.get("comparisonOperators"));
            System.out.println("- Logical operators: " +
simpleCount.get("logicalOperators"));
            System.out.println("- Functions: " + simpleCount.get("functions"));
            System.out.println("- Arithmetic operators: " +
simpleCount.get("arithmeticOperators"));
            System.out.println("- Special operators: " +
simpleCount.get("specialOperators"));
            System.out.println("- Total operators: " + simpleCount.get("total"));

            // Example 2: Analyze a complex expression
            System.out.println("\nExample 2: Analyzing a complex expression");
            String complexExpression = "(attribute_exists(Category) AND Size
BETWEEN :min AND :max) OR "
                + "(Price > :price AND contains(Description, :keyword) AND "
                + "(Rating >= :minRating OR Reviews > :minReviews))";
            Map<String, Integer> complexCount =
countOperatorsInExpression(complexExpression);

            System.out.println("Expression: " + complexExpression);
            System.out.println("Operator count breakdown:");
            System.out.println("- Comparison operators: " +
complexCount.get("comparisonOperators"));
            System.out.println("- Logical operators: " +
complexCount.get("logicalOperators"));
            System.out.println("- Functions: " + complexCount.get("functions"));
            System.out.println("- Arithmetic operators: " +
complexCount.get("arithmeticOperators"));
```

```
            System.out.println("- Special operators: " +
complexCount.get("specialOperators"));
            System.out.println("- Total operators: " + complexCount.get("total"));

            // Example 3: Test approaching the operator limit
            System.out.println("\nExample 3: Testing an expression approaching the
operator limit");
            Map<String, Object> approachingLimit = testOperatorLimit(dynamoDbClient,
tableName, key, 290);
            System.out.println(approachingLimit.get("message"));

            // Example 4: Test exceeding the operator limit
            System.out.println("\nExample 4: Testing an expression exceeding the
operator limit");
            Map<String, Object> exceedingLimit = testOperatorLimit(dynamoDbClient,
tableName, key, 310);
            System.out.println(exceedingLimit.get("message"));

            // Example 5: Breaking down a complex expression
            System.out.println("\nExample 5: Breaking down a complex expression into
multiple operations");
            Map<String, Object> breakdownResult =
breakDownComplexExpression(dynamoDbClient, tableName, key, 500);
            @SuppressWarnings("unchecked")
            Map<Integer, Map<String, Object>> results =
                (Map<Integer, Map<String, Object>>) breakdownResult.get("results");
            System.out.println(
                "Processed " + results.size() + " of " +
breakdownResult.get("totalBatches") + " batches");

            // Explain the operator counting rules
            System.out.println("\nKey points about DynamoDB expression operator
counting:");
            System.out.println("1. The maximum number of operators in any expression
is 300");
            System.out.println("2. Each comparison operator (=, <>, <, <=, >, >=)
counts as 1 operator");
            System.out.println("3. Each logical operator (AND, OR, NOT) counts as 1
operator");
            System.out.println("4. Each function call (attribute_exists, contains,
etc.) counts as 1 operator");
            System.out.println("5. Each arithmetic operator (+ or -) counts as 1
operator");
```

```
            System.out.println("6. BETWEEN counts as 2 operators (BETWEEN itself and
the AND within it)");
            System.out.println("7. IN counts as 1 operator regardless of the number
of values");
            System.out.println("8. Parentheses for grouping and attribute paths
don't count as operators");
            System.out.println("9. When you exceed the limit, the error always
reports '301 operators'");
            System.out.println("10. For complex operations, break them into multiple
smaller operations");

        } catch (Exception e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3

- Amazon SNS

Buat tabel dengan indeks sekunder global

Contoh kode berikut menunjukkan cara membuat tabel dengan indeks sekunder global.

SDK untuk Java 2.x

Buat tabel DynamoDB dengan Global Secondary Index menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DeleteTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableRequest;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndex;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.Projection;
import software.amazon.awssdk.services.dynamodb.model.ProjectionType;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.waiters.DynamoDbWaiter;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public void createTable() {
        try {
            // Attribute definitions
            final List<AttributeDefinition> attributeDefinitions = new
 ArrayList<>();
```

```
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName(ISSUE_ID_ATTR)
            .attributeType(ScalarAttributeType.S)
            .build());
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName(TITLE_ATTR)
            .attributeType(ScalarAttributeType.S)
            .build());
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName(CREATE_DATE_ATTR)
            .attributeType(ScalarAttributeType.S)
            .build());
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName(DUE_DATE_ATTR)
            .attributeType(ScalarAttributeType.S)
            .build());

        // Key schema for table
        final List<KeySchemaElement> tableKeySchema = new ArrayList<>();
        tableKeySchema.add(KeySchemaElement.builder()
            .attributeName(ISSUE_ID_ATTR)
            .keyType(KeyType.HASH)
            .build()); // Partition key
        tableKeySchema.add(KeySchemaElement.builder()
            .attributeName(TITLE_ATTR)
            .keyType(KeyType.RANGE)
            .build()); // Sort key

        // Initial provisioned throughput settings for the indexes
        final ProvisionedThroughput ptIndex = ProvisionedThroughput.builder()
            .readCapacityUnits(1L)
            .writeCapacityUnits(1L)
            .build();

        // CreateDateIndex
        final List<KeySchemaElement> createDateKeySchema = new ArrayList<>();
        createDateKeySchema.add(KeySchemaElement.builder()
            .attributeName(CREATE_DATE_ATTR)
            .keyType(KeyType.HASH)
            .build());
        createDateKeySchema.add(KeySchemaElement.builder()
            .attributeName(ISSUE_ID_ATTR)
            .keyType(KeyType.RANGE)
            .build());
```

```
            final Projection createDateProjection = Projection.builder()
                .projectionType(ProjectionType.INCLUDE)
                .nonKeyAttributes(DESCRIPTION_ATTR, STATUS_ATTR)
                .build();

            final GlobalSecondaryIndex createDateIndex =
GlobalSecondaryIndex.builder()
                .indexName(CREATE_DATE_INDEX)
                .keySchema(createDateKeySchema)
                .projection(createDateProjection)
                .provisionedThroughput(ptIndex)
                .build();

            // TitleIndex
            final List<KeySchemaElement> titleKeySchema = new ArrayList<>();
            titleKeySchema.add(KeySchemaElement.builder()
                .attributeName(TITLE_ATTR)
                .keyType(KeyType.HASH)
                .build());
            titleKeySchema.add(KeySchemaElement.builder()
                .attributeName(ISSUE_ID_ATTR)
                .keyType(KeyType.RANGE)
                .build());

            final Projection titleProjection =

Projection.builder().projectionType(ProjectionType.KEYS_ONLY).build();

            final GlobalSecondaryIndex titleIndex = GlobalSecondaryIndex.builder()
                .indexName(TITLE_INDEX)
                .keySchema(titleKeySchema)
                .projection(titleProjection)
                .provisionedThroughput(ptIndex)
                .build();

            // DueDateIndex
            final List<KeySchemaElement> dueDateKeySchema = new ArrayList<>();
            dueDateKeySchema.add(KeySchemaElement.builder()
                .attributeName(DUE_DATE_ATTR)
                .keyType(KeyType.HASH)
                .build());

            final Projection dueDateProjection =
```

```
                Projection.builder().projectionType(ProjectionType.ALL).build();

            final GlobalSecondaryIndex dueDateIndex = GlobalSecondaryIndex.builder()
                .indexName(DUE_DATE_INDEX)
                .keySchema(dueDateKeySchema)
                .projection(dueDateProjection)
                .provisionedThroughput(ptIndex)
                .build();

            final CreateTableRequest createTableRequest =
CreateTableRequest.builder()
                .tableName(TABLE_NAME)
                .keySchema(tableKeySchema)
                .attributeDefinitions(attributeDefinitions)
                .globalSecondaryIndexes(createDateIndex, titleIndex, dueDateIndex)
                .provisionedThroughput(ProvisionedThroughput.builder()
                    .readCapacityUnits(1L)
                    .writeCapacityUnits(1L)
                    .build())
                .build();

            System.out.println("Creating table " + TABLE_NAME + "...");
            dynamoDbClient.createTable(createTableRequest);

            // Wait for table to become active
            System.out.println("Waiting for " + TABLE_NAME + " to become
ACTIVE...");
            final DynamoDbWaiter waiter = dynamoDbClient.waiter();
            final DescribeTableRequest describeTableRequest =
                DescribeTableRequest.builder().tableName(TABLE_NAME).build();

            final WaiterResponse<DescribeTableResponse> waiterResponse =
                waiter.waitUntilTableExists(describeTableRequest);
            waiterResponse.matched().response().ifPresent(response ->
System.out.println("Table is now ready for use"));

        } catch (DynamoDbException e) {
            System.err.println("Error creating table: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat CreateTabledi Referensi AWS SDK for Java 2.x API.

Buat tabel dengan throughput hangat diaktifkan

Contoh kode berikut menunjukkan cara membuat tabel dengan throughput hangat diaktifkan.

SDK untuk Java 2.x

Buat tabel DynamoDB dengan pengaturan throughput hangat menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeDefinition;
import software.amazon.awssdk.services.dynamodb.model.CreateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.CreateTableResponse;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndex;
import software.amazon.awssdk.services.dynamodb.model.KeySchemaElement;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.Projection;
import software.amazon.awssdk.services.dynamodb.model.ProvisionedThroughput;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;
import software.amazon.awssdk.services.dynamodb.model.WarmThroughput;

    public static WarmThroughput buildWarmThroughput(final Long readUnitsPerSecond,
 final Long writeUnitsPerSecond) {
        return WarmThroughput.builder()
            .readUnitsPerSecond(readUnitsPerSecond)
            .writeUnitsPerSecond(writeUnitsPerSecond)
            .build();
    }

    /**
     * Builds a ProvisionedThroughput object with the specified read and write
 capacity units.
     *
     * @param readCapacityUnits The read capacity units
     * @param writeCapacityUnits The write capacity units
     * @return A configured ProvisionedThroughput object
     */
    public static ProvisionedThroughput buildProvisionedThroughput(
        final Long readCapacityUnits, final Long writeCapacityUnits) {
        return ProvisionedThroughput.builder()
            .readCapacityUnits(readCapacityUnits)
            .writeCapacityUnits(writeCapacityUnits)
            .build();
    }
```

```
    /**
     * Builds an AttributeDefinition with the specified name and type.
     *
     * @param attributeName The attribute name
     * @param scalarAttributeType The attribute type
     * @return A configured AttributeDefinition
     */
    private static AttributeDefinition buildAttributeDefinition(
        final String attributeName, final ScalarAttributeType scalarAttributeType) {
        return AttributeDefinition.builder()
            .attributeName(attributeName)
            .attributeType(scalarAttributeType)
            .build();
    }

    /**
     * Builds a KeySchemaElement with the specified name and key type.
     *
     * @param attributeName The attribute name
     * @param keyType The key type (HASH or RANGE)
     * @return A configured KeySchemaElement
     */
    private static KeySchemaElement buildKeySchemaElement(final String
attributeName, final KeyType keyType) {
        return KeySchemaElement.builder()
            .attributeName(attributeName)
            .keyType(keyType)
            .build();
    }

    /**
     * Creates a DynamoDB table with the specified configuration including warm
throughput settings.
     *
     * @param ddb The DynamoDB client
     * @param tableName The name of the table to create
     * @param partitionKey The partition key attribute name
     * @param sortKey The sort key attribute name
     * @param miscellaneousKeyAttribute Additional key attribute name for GSI
     * @param nonKeyAttribute Non-key attribute to include in GSI projection
     * @param tableReadCapacityUnits Read capacity units for the table
     * @param tableWriteCapacityUnits Write capacity units for the table
     * @param tableWarmReadUnitsPerSecond Warm read units per second for the table
```

```
    * @param tableWarmWriteUnitsPerSecond Warm write units per second for the table
    * @param globalSecondaryIndexName The name of the GSI to create
    * @param globalSecondaryIndexReadCapacityUnits Read capacity units for the GSI
    * @param globalSecondaryIndexWriteCapacityUnits Write capacity units for the
GSI
    * @param globalSecondaryIndexWarmReadUnitsPerSecond Warm read units per second
for the GSI
    * @param globalSecondaryIndexWarmWriteUnitsPerSecond Warm write units per
second for the GSI
    */
   public static void createDynamoDBTable(
       final DynamoDbClient ddb,
       final String tableName,
       final String partitionKey,
       final String sortKey,
       final String miscellaneousKeyAttribute,
       final String nonKeyAttribute,
       final Long tableReadCapacityUnits,
       final Long tableWriteCapacityUnits,
       final Long tableWarmReadUnitsPerSecond,
       final Long tableWarmWriteUnitsPerSecond,
       final String globalSecondaryIndexName,
       final Long globalSecondaryIndexReadCapacityUnits,
       final Long globalSecondaryIndexWriteCapacityUnits,
       final Long globalSecondaryIndexWarmReadUnitsPerSecond,
       final Long globalSecondaryIndexWarmWriteUnitsPerSecond) {

       // Define the table attributes
       final AttributeDefinition partitionKeyAttribute =
buildAttributeDefinition(partitionKey, ScalarAttributeType.S);
       final AttributeDefinition sortKeyAttribute =
buildAttributeDefinition(sortKey, ScalarAttributeType.S);
       final AttributeDefinition miscellaneousKeyAttributeDefinition =
           buildAttributeDefinition(miscellaneousKeyAttribute,
ScalarAttributeType.N);
       final AttributeDefinition[] attributeDefinitions = {
           partitionKeyAttribute, sortKeyAttribute,
miscellaneousKeyAttributeDefinition
       };

       // Define the table key schema
       final KeySchemaElement partitionKeyElement =
buildKeySchemaElement(partitionKey, KeyType.HASH);
```

```
        final KeySchemaElement sortKeyElement = buildKeySchemaElement(sortKey,
KeyType.RANGE);
        final KeySchemaElement[] keySchema = {partitionKeyElement, sortKeyElement};

        // Define the provisioned throughput for the table
        final ProvisionedThroughput provisionedThroughput =
            buildProvisionedThroughput(tableReadCapacityUnits,
tableWriteCapacityUnits);

        // Define the Global Secondary Index (GSI)
        final KeySchemaElement globalSecondaryIndexPartitionKeyElement =
buildKeySchemaElement(sortKey, KeyType.HASH);
        final KeySchemaElement globalSecondaryIndexSortKeyElement =
            buildKeySchemaElement(miscellaneousKeyAttribute, KeyType.RANGE);
        final KeySchemaElement[] gsiKeySchema = {
            globalSecondaryIndexPartitionKeyElement,
globalSecondaryIndexSortKeyElement
        };

        final Projection gsiProjection = Projection.builder()
            .projectionType(PROJECTION_TYPE_INCLUDE)
            .nonKeyAttributes(nonKeyAttribute)
            .build();

        final ProvisionedThroughput gsiProvisionedThroughput =
            buildProvisionedThroughput(globalSecondaryIndexReadCapacityUnits,
globalSecondaryIndexWriteCapacityUnits);

        // Define the warm throughput for the Global Secondary Index (GSI)
        final WarmThroughput gsiWarmThroughput = buildWarmThroughput(
            globalSecondaryIndexWarmReadUnitsPerSecond,
globalSecondaryIndexWarmWriteUnitsPerSecond);

        final GlobalSecondaryIndex globalSecondaryIndex =
GlobalSecondaryIndex.builder()
            .indexName(globalSecondaryIndexName)
            .keySchema(gsiKeySchema)
            .projection(gsiProjection)
            .provisionedThroughput(gsiProvisionedThroughput)
            .warmThroughput(gsiWarmThroughput)
            .build();

        // Define the warm throughput for the table
        final WarmThroughput tableWarmThroughput =
```

```
            buildWarmThroughput(tableWarmReadUnitsPerSecond,
tableWarmWriteUnitsPerSecond);

        final CreateTableRequest request = CreateTableRequest.builder()
            .tableName(tableName)
            .attributeDefinitions(attributeDefinitions)
            .keySchema(keySchema)
            .provisionedThroughput(provisionedThroughput)
            .globalSecondaryIndexes(globalSecondaryIndex)
            .warmThroughput(tableWarmThroughput)
            .build();

        final CreateTableResponse response = ddb.createTable(request);
        System.out.println(response);
    }
```

- Untuk detail API, lihat CreateTabledi Referensi AWS SDK for Java 2.x API.

Membuat aplikasi web untuk melacak data DynamoDB

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item kerja dalam tabel Amazon DynamoDB dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon DynamoDB API untuk membuat aplikasi web dinamis yang melacak data kerja DynamoDB.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon SES

Buat item dengan TTL

Contoh kode berikut menunjukkan cara membuat item dengan TTL.

SDK untuk Java 2.x

```
package com.amazon.samplelib.ttl;

import com.amazon.samplelib.CodeSampleUtils;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.PutItemRequest;
import software.amazon.awssdk.services.dynamodb.model.PutItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.Optional;

/**
 * Creates an item in a DynamoDB table with TTL attributes.
 * This class demonstrates how to add TTL expiration timestamps to DynamoDB items.
 */
public class CreateTTL {

    private static final String USAGE =
        """
            Usage:
                <tableName> <primaryKey> <sortKey> <region>
            Where:
                tableName - The Amazon DynamoDB table being queried.
                primaryKey - The name of the primary key. Also known as the hash or
 partition key.
                sortKey - The name of the sort key. Also known as the range
 attribute.
                region (optional) - The AWS region that the Amazon DynamoDB table is
 located in. (Default: us-east-1)
            """;
    private static final int DAYS_TO_EXPIRE = 90;
    private static final int SECONDS_PER_DAY = 24 * 60 * 60;
    private static final String PRIMARY_KEY_ATTR = "primaryKey";
    private static final String SORT_KEY_ATTR = "sortKey";
    private static final String CREATION_DATE_ATTR = "creationDate";
    private static final String EXPIRE_AT_ATTR = "expireAt";
```

```
   private static final String SUCCESS_MESSAGE = "%s PutItem operation with TTL
successful.";
   private static final String TABLE_NOT_FOUND_ERROR = "Error: The Amazon DynamoDB
table \"%s\" can't be found.";

   private final DynamoDbClient dynamoDbClient;

   /**
    * Constructs a CreateTTL instance with the specified DynamoDB client.
    *
    * @param dynamoDbClient The DynamoDB client to use
    */
   public CreateTTL(final DynamoDbClient dynamoDbClient) {
       this.dynamoDbClient = dynamoDbClient;
   }

   /**
    * Constructs a CreateTTL with a default DynamoDB client.
    */
   public CreateTTL() {
       this.dynamoDbClient = null;
   }

   /**
    * Main method to demonstrate creating an item with TTL.
    *
    * @param args Command line arguments
    */
   public static void main(final String[] args) {
       try {
           int result = new CreateTTL().processArgs(args);
           System.exit(result);
       } catch (Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Process command line arguments and create an item with TTL.
    *
    * @param args Command line arguments
    * @return 0 if successful, non-zero otherwise
    * @throws ResourceNotFoundException If the table doesn't exist
```

```
     * @throws DynamoDbException If an error occurs during the operation
     * @throws IllegalArgumentException If arguments are invalid
     */
    public int processArgs(final String[] args) {
        // Argument validation (remove or replace this line when reusing this code)
        CodeSampleUtils.validateArgs(args, new int[] {3, 4}, USAGE);

        final String tableName = args[0];
        final String primaryKey = args[1];
        final String sortKey = args[2];
        final Region region = Optional.ofNullable(args.length > 3 ? args[3] : null)
            .map(Region::of)
            .orElse(Region.US_EAST_1);

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            final CreateTTL createTTL = new CreateTTL(ddb);
            createTTL.createItemWithTTL(tableName, primaryKey, sortKey);
            return 0;
        } catch (Exception e) {
            throw e;
        }
    }

    /**
     * Creates an item in the specified table with TTL attributes.
     *
     * @param tableName The name of the table
     * @param primaryKeyValue The value for the primary key
     * @param sortKeyValue The value for the sort key
     * @return The response from the PutItem operation
     * @throws ResourceNotFoundException If the table doesn't exist
     * @throws DynamoDbException If an error occurs during the operation
     */
    public PutItemResponse createItemWithTTL(
        final String tableName, final String primaryKeyValue, final String
sortKeyValue) {
        // Get current time in epoch second format
        final long createDate = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = createDate + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);
```

```
        final Map<String, AttributeValue> itemMap = new HashMap<>();
        itemMap.put(
            PRIMARY_KEY_ATTR, AttributeValue.builder().s(primaryKeyValue).build());
        itemMap.put(SORT_KEY_ATTR,
 AttributeValue.builder().s(sortKeyValue).build());
        itemMap.put(
            CREATION_DATE_ATTR,
            AttributeValue.builder().n(String.valueOf(createDate)).build());
        itemMap.put(
            EXPIRE_AT_ATTR,
            AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final PutItemRequest request =
            PutItemRequest.builder().tableName(tableName).item(itemMap).build();

        try {
            final PutItemResponse response = dynamoDbClient.putItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
}
```

- Untuk detail API, lihat PutItemdi Referensi AWS SDK for Java 2.x API.

## Membuat dan mengelola tabel global MRSC

Contoh kode berikut menunjukkan cara membuat dan mengelola tabel global DynamoDB dengan Multi-Region Strong Consistency (MRSC).

- Buat tabel dengan Konsistensi Kuat Multi-Region.
- Verifikasi konfigurasi MRSC dan status replika.
- Uji konsistensi yang kuat di seluruh Wilayah dengan pembacaan langsung.
- Lakukan penulisan bersyarat dengan jaminan MRSC.

- Bersihkan sumber daya tabel global MRSC.

SDK untuk Java 2.x

Buat tabel regional yang siap untuk konversi MRSC menggunakan AWS SDK for Java 2.x.

```
   public static CreateTableResponse createRegionalTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }

       try {
           LOGGER.info("Creating regional table: " + tableName + " (must be empty
for MRSC)");

           CreateTableRequest createTableRequest = CreateTableRequest.builder()
               .tableName(tableName)
               .attributeDefinitions(
                   AttributeDefinition.builder()
                       .attributeName("Artist")
                       .attributeType(ScalarAttributeType.S)
                       .build(),
                   AttributeDefinition.builder()
                       .attributeName("SongTitle")
                       .attributeType(ScalarAttributeType.S)
                       .build())
               .keySchema(
                   KeySchemaElement.builder()
                       .attributeName("Artist")
                       .keyType(KeyType.HASH)
                       .build(),
                   KeySchemaElement.builder()
                       .attributeName("SongTitle")
                       .keyType(KeyType.RANGE)
                       .build())
               .billingMode(BillingMode.PAY_PER_REQUEST)
               .build();
```

```
            CreateTableResponse response =
dynamoDbClient.createTable(createTableRequest);
            LOGGER.info("Regional table creation initiated. Status: "
                + response.tableDescription().tableStatus());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to create regional table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to create regional table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Konversikan tabel regional ke MRSC dengan replika dan saksi menggunakan. AWS SDK for Java 2.x

```
    public static UpdateTableResponse convertToMRSCWithWitness(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final Region replicaRegion,
        final Region witnessRegion) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
```

```
            LOGGER.info("Converting table to MRSC with replica in " +
replicaRegion.id() + " and witness in "
                + witnessRegion.id());

            // Create replica update using ReplicationGroupUpdate
            ReplicationGroupUpdate replicaUpdate = ReplicationGroupUpdate.builder()
                .create(CreateReplicationGroupMemberAction.builder()
                    .regionName(replicaRegion.id())
                    .build())
                .build();

            // Create witness update
            GlobalTableWitnessGroupUpdate witnessUpdate =
GlobalTableWitnessGroupUpdate.builder()
                .create(CreateGlobalTableWitnessGroupMemberAction.builder()
                    .regionName(witnessRegion.id())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(List.of(replicaUpdate))
                .globalTableWitnessUpdates(List.of(witnessUpdate))
                .multiRegionConsistency(MultiRegionConsistency.STRONG)
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("MRSC conversion initiated. Status: "
                + response.tableDescription().tableStatus());
            LOGGER.info("UpdateTableResponse full object: " + response);
            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to convert table to MRSC: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to convert table to MRSC: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Jelaskan konfigurasi tabel global MRSC menggunakan AWS SDK for Java 2.x.

```
   public static DescribeTableResponse describeMRSCTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }

       try {
           LOGGER.info("Describing MRSC global table: " + tableName);

           DescribeTableRequest request =
               DescribeTableRequest.builder().tableName(tableName).build();

           DescribeTableResponse response = dynamoDbClient.describeTable(request);

           LOGGER.info("Table status: " + response.table().tableStatus());
           LOGGER.info("Multi-region consistency: " +
response.table().multiRegionConsistency());

           if (response.table().replicas() != null
               && !response.table().replicas().isEmpty()) {
               LOGGER.info("Number of replicas: " +
response.table().replicas().size());
               response.table()
                   .replicas()
                   .forEach(replica -> LOGGER.info(
                       "Replica region: " + replica.regionName() + ", Status: " +
replica.replicaStatus()));
           }

           if (response.table().globalTableWitnesses() != null
               && !response.table().globalTableWitnesses().isEmpty()) {
               LOGGER.info("Number of witnesses: "
                   + response.table().globalTableWitnesses().size());
               response.table()
                   .globalTableWitnesses()
                   .forEach(witness -> LOGGER.info(
```

```
                        "Witness region: " + witness.regionName() + ", Status: " +
witness.witnessStatus()));
            }

            return response;

        } catch (ResourceNotFoundException e) {
            LOGGER.severe("Table not found: " + tableName + " - " + e.getMessage());
            throw DynamoDbException.builder()
                .message("Table not found: " + tableName)
                .cause(e)
                .build();
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to describe table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to describe table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Tambahkan item pengujian untuk memverifikasi konsistensi kuat MRSC menggunakan AWS SDK for Java 2.x.

```
    public static PutItemResponse putTestItem(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final String artist,
        final String songTitle,
        final String album,
        final String year) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
```

```
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }

        try {
            LOGGER.info("Adding test item to MRSC global table: " + tableName);

            Map<String, AttributeValue> item = new HashMap<>();
            item.put("Artist", AttributeValue.builder().s(artist).build());
            item.put("SongTitle", AttributeValue.builder().s(songTitle).build());

            if (album != null && !album.trim().isEmpty()) {
                item.put("Album", AttributeValue.builder().s(album).build());
            }
            if (year != null && !year.trim().isEmpty()) {
                item.put("Year", AttributeValue.builder().n(year).build());
            }

            PutItemRequest putItemRequest =
                PutItemRequest.builder().tableName(tableName).item(item).build();

            PutItemResponse response = dynamoDbClient.putItem(putItemRequest);
            LOGGER.info("Test item added successfully with strong consistency");

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add test item to table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to add test item to table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Baca item dengan pembacaan konsisten dari replika MRSC menggunakan. AWS SDK for Java 2.x

```
    public static GetItemResponse getItemWithConsistentRead(
```

```
        final DynamoDbClient dynamoDbClient, final String tableName, final String
artist, final String songTitle) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }

        try {
            LOGGER.info("Reading item from MRSC global table with consistent read: "
+ tableName);

            Map<String, AttributeValue> key = new HashMap<>();
            key.put("Artist", AttributeValue.builder().s(artist).build());
            key.put("SongTitle", AttributeValue.builder().s(songTitle).build());

            GetItemRequest getItemRequest = GetItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .consistentRead(true)
                .build();

            GetItemResponse response = dynamoDbClient.getItem(getItemRequest);

            if (response.hasItem()) {
                LOGGER.info("Item found with strong consistency - no wait time
needed");
            } else {
                LOGGER.info("Item not found");
            }

            return response;

        } catch (DynamoDbException e) {
```

```
            LOGGER.severe("Failed to read item from table: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to read item from table: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Lakukan pembaruan bersyarat dengan jaminan MRSC menggunakan. AWS SDK for Java 2.x

```
    public static UpdateItemResponse performConditionalUpdate(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final String artist,
        final String songTitle,
        final String rating) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (artist == null || artist.trim().isEmpty()) {
            throw new IllegalArgumentException("Artist cannot be null or empty");
        }
        if (songTitle == null || songTitle.trim().isEmpty()) {
            throw new IllegalArgumentException("Song title cannot be null or
empty");
        }
        if (rating == null || rating.trim().isEmpty()) {
            throw new IllegalArgumentException("Rating cannot be null or empty");
        }

        try {
            LOGGER.info("Performing conditional update on MRSC global table: " +
tableName);

            Map<String, AttributeValue> key = new HashMap<>();
            key.put("Artist", AttributeValue.builder().s(artist).build());
```

```
            key.put("SongTitle", AttributeValue.builder().s(songTitle).build());

            Map<String, String> expressionAttributeNames = new HashMap<>();
            expressionAttributeNames.put("#rating", "Rating");

            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
            expressionAttributeValues.put(
                ":rating", AttributeValue.builder().n(rating).build());

            UpdateItemRequest updateItemRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #rating = :rating")
                .conditionExpression("attribute_exists(Artist)")
                .expressionAttributeNames(expressionAttributeNames)
                .expressionAttributeValues(expressionAttributeValues)
                .build();

            UpdateItemResponse response =
dynamoDbClient.updateItem(updateItemRequest);
            LOGGER.info("Conditional update successful - demonstrates strong
consistency");

            return response;

        } catch (ConditionalCheckFailedException e) {
            LOGGER.warning("Conditional check failed: " + e.getMessage());
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to perform conditional update: " + tableName + " -
" + e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to perform conditional update: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Tunggu replika dan saksi MRSC menjadi aktif menggunakan. AWS SDK for Java 2.x

```
    public static void waitForMRSCReplicasActive(
```

```
        final DynamoDbClient dynamoDbClient, final String tableName, final int
maxWaitTimeSeconds)
        throws InterruptedException {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (maxWaitTimeSeconds <= 0) {
            throw new IllegalArgumentException("Max wait time must be positive");
        }

        try {
            LOGGER.info("Waiting for MRSC replicas and witnesses to become active: "
+ tableName);

            final long startTime = System.currentTimeMillis();
            final long maxWaitTimeMillis = maxWaitTimeSeconds * 1000L;
            int backoffSeconds = 5; // Start with 5 second intervals
            final int maxBackoffSeconds = 30; // Cap at 30 seconds

            while (System.currentTimeMillis() - startTime < maxWaitTimeMillis) {
                DescribeTableResponse response = describeMRSCTable(dynamoDbClient,
tableName);

                boolean allActive = true;
                StringBuilder statusReport = new StringBuilder();

                if (response.table().multiRegionConsistency() == null
                    || !MultiRegionConsistency.STRONG
                        .toString()

.equals(response.table().multiRegionConsistency().toString())) {
                    allActive = false;
                    statusReport
                        .append("MultiRegionConsistency: ")
                        .append(response.table().multiRegionConsistency())
                        .append(" ");
                }
                if (response.table().replicas() == null
                    || response.table().replicas().isEmpty()) {
```

```
                    allActive = false;
                    statusReport.append("No replicas found. ");
                }
                if (response.table().globalTableWitnesses() == null
                    || response.table().globalTableWitnesses().isEmpty()) {
                    allActive = false;
                    statusReport.append("No witnesses found. ");
                }

                // Check table status
                if (!"ACTIVE".equals(response.table().tableStatus().toString())) {
                    allActive = false;
                    statusReport
                        .append("Table: ")
                        .append(response.table().tableStatus())
                        .append(" ");
                }

                // Check replica status
                if (response.table().replicas() != null) {
                    for (var replica : response.table().replicas()) {
                        if (!"ACTIVE".equals(replica.replicaStatus().toString())) {
                            allActive = false;
                            statusReport
                                .append("Replica(")
                                .append(replica.regionName())
                                .append("): ")
                                .append(replica.replicaStatus())
                                .append(" ");
                        }
                    }
                }

                // Check witness status
                if (response.table().globalTableWitnesses() != null) {
                    for (var witness : response.table().globalTableWitnesses()) {
                        if (!"ACTIVE".equals(witness.witnessStatus().toString())) {
                            allActive = false;
                            statusReport
                                .append("Witness(")
                                .append(witness.regionName())
                                .append("): ")
                                .append(witness.witnessStatus())
                                .append(" ");
```

```
                        }
                    }
                }

                if (allActive) {
                    LOGGER.info("All MRSC replicas and witnesses are now active: " +
tableName);
                    return;
                }

                LOGGER.info("Waiting for MRSC components to become active. Status: "
+ statusReport.toString());
                LOGGER.info("Next check in " + backoffSeconds + " seconds...");

                tempWait(backoffSeconds);

                // Exponential backoff with cap
                backoffSeconds = Math.min(backoffSeconds * 2, maxBackoffSeconds);
            }

            throw DynamoDbException.builder()
                .message("Timeout waiting for MRSC replicas to become active after "
+ maxWaitTimeSeconds + " seconds")
                .build();

        } catch (DynamoDbException | InterruptedException e) {
            LOGGER.severe("Failed to wait for MRSC replicas to become active: " +
tableName + " - " + e.getMessage());
            throw e;
        }
    }
```

Bersihkan replika dan saksi MRSC menggunakan. AWS SDK for Java 2.x

```
    public static UpdateTableResponse cleanupMRSCReplicas(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final Region replicaRegion,
        final Region witnessRegion) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
```

```
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
            LOGGER.info("Cleaning up MRSC replicas and witnesses for table: " +
tableName);

            // Remove replica using ReplicationGroupUpdate
            ReplicationGroupUpdate replicaUpdate = ReplicationGroupUpdate.builder()
                .delete(DeleteReplicationGroupMemberAction.builder()
                    .regionName(replicaRegion.id())
                    .build())
                .build();

            // Remove witness
            GlobalTableWitnessGroupUpdate witnessUpdate =
GlobalTableWitnessGroupUpdate.builder()
                .delete(DeleteGlobalTableWitnessGroupMemberAction.builder()
                    .regionName(witnessRegion.id())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(List.of(replicaUpdate))
                .globalTableWitnessUpdates(List.of(witnessUpdate))
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("MRSC cleanup initiated - removing replica and witness.
Response: " + response);

            return response;
```

```
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to cleanup MRSC replicas: " + tableName + " - " +
e.getMessage());
            throw DynamoDbException.builder()
                .message("Failed to cleanup MRSC replicas: " + tableName)
                .cause(e)
                .build();
        }
    }
```

Demonstrasi alur kerja MRSC lengkap menggunakan. AWS SDK for Java 2.x

```
    public static void demonstrateCompleteMRSCWorkflow(
        final DynamoDbClient primaryClient,
        final DynamoDbClient replicaClient,
        final String tableName,
        final Region replicaRegion,
        final Region witnessRegion)
        throws InterruptedException {

        if (primaryClient == null) {
            throw new IllegalArgumentException("Primary DynamoDB client cannot be
null");
        }
        if (replicaClient == null) {
            throw new IllegalArgumentException("Replica DynamoDB client cannot be
null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (witnessRegion == null) {
            throw new IllegalArgumentException("Witness region cannot be null");
        }

        try {
            LOGGER.info("=== Starting Complete MRSC Workflow Demonstration ===");
```

```
            // Step 1: Create an empty single-Region table
            LOGGER.info("Step 1: Creating empty single-Region table");
            createRegionalTable(primaryClient, tableName);

            // Use the existing GlobalTableOperations method for basic table waiting
            LOGGER.info("Intermediate step: Waiting for table [" + tableName + "] to
become active before continuing");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // Step 2: Convert to MRSC with replica and witness
            LOGGER.info("Step 2: Converting to MRSC with replica and witness");
            convertToMRSCWithWitness(primaryClient, tableName, replicaRegion,
witnessRegion);

            // Wait for MRSC conversion to complete using MRSC-specific waiter
            LOGGER.info("Waiting for MRSC conversion to complete...");
            waitForMRSCReplicasActive(primaryClient, tableName);

            LOGGER.info("Intermediate step: Waiting for table [" + tableName + "] to
become active before continuing");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // Step 3: Verify MRSC configuration
            LOGGER.info("Step 3: Verifying MRSC configuration");
            describeMRSCTable(primaryClient, tableName);

            // Step 4: Test strong consistency with data operations
            LOGGER.info("Step 4: Testing strong consistency with data operations");

            // Add test item to primary region
            putTestItem(primaryClient, tableName, "The Beatles", "Hey Jude", "The
Beatles 1967-1970", "1968");

            // Immediately read from replica region (no wait needed with MRSC)
            LOGGER.info("Reading from replica region immediately (strong
consistency):");
            GetItemResponse getResponse =
                getItemWithConsistentRead(replicaClient, tableName, "The Beatles",
"Hey Jude");

            if (getResponse.hasItem()) {
                LOGGER.info("# Strong consistency verified - item immediately
available in replica region");
            } else {
```

```
                LOGGER.warning("# Item not found in replica region");
            }

            // Test conditional update from replica region
            LOGGER.info("Testing conditional update from replica region:");
            performConditionalUpdate(replicaClient, tableName, "The Beatles", "Hey
Jude", "5");
            LOGGER.info("# Conditional update successful - demonstrates strong
consistency");

            // Step 5: Cleanup
            LOGGER.info("Step 5: Cleaning up resources");
            cleanupMRSCReplicas(primaryClient, tableName, replicaRegion,
witnessRegion);

            // Wait for cleanup to complete using basic table waiter
            LOGGER.info("Waiting for replica cleanup to complete...");
            GlobalTableOperations.waitForTableActive(primaryClient, tableName);

            // "Halt" until replica/witness cleanup is complete
            DescribeTableResponse cleanupVerification =
describeMRSCTable(primaryClient, tableName);
            int backoffSeconds = 5; // Start with 5 second intervals
            while (cleanupVerification.table().multiRegionConsistency() != null) {
                LOGGER.info("Waiting additional time (" + backoffSeconds + "
seconds) for MRSC cleanup to complete...");
                tempWait(backoffSeconds);

                // Exponential backoff with cap
                backoffSeconds = Math.min(backoffSeconds * 2, 30);
                cleanupVerification = describeMRSCTable(primaryClient, tableName);
            }

            // Delete the primary table
            deleteTable(primaryClient, tableName);

            LOGGER.info("=== MRSC Workflow Demonstration Complete ===");
            LOGGER.info("");
            LOGGER.info("Key benefits of Multi-Region Strong Consistency (MRSC):");
            LOGGER.info("- Immediate consistency across all regions (no eventual
consistency delays)");
            LOGGER.info("- Simplified application logic (no need to handle eventual
consistency)");
```

```
            LOGGER.info("- Support for conditional writes and transactions across
regions");
            LOGGER.info("- Consistent read operations from any region without
waiting");

        } catch (DynamoDbException | InterruptedException e) {
            LOGGER.severe("MRSC workflow failed: " + e.getMessage());
            throw e;
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateTable
  - DeleteTable
  - DescribeTable
  - GetItem
  - PutItem
  - UpdateItem
  - UpdateTable

Membuat dan mengelola tabel global yang menunjukkan MREC

Contoh kode berikut menunjukkan cara membuat dan mengelola tabel global DynamoDB dengan replika di beberapa Wilayah.

- Buat tabel dengan Global Secondary Index dan DynamoDB Streams.
- Tambahkan replika di Wilayah yang berbeda untuk membuat tabel global.
- Hapus replika dari tabel global.
- Tambahkan item pengujian untuk memverifikasi replikasi di seluruh Wilayah.
- Jelaskan konfigurasi tabel global dan status replika.

SDK untuk Java 2.x

Buat tabel dengan Global Secondary Index dan DynamoDB Streams menggunakan. AWS SDK for Java 2.x

```
   public static CreateTableResponse createTableWithGSI(
       final DynamoDbClient dynamoDbClient, final String tableName, final String
indexName) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }
       if (indexName == null || indexName.trim().isEmpty()) {
           throw new IllegalArgumentException("Index name cannot be null or
empty");
       }

       try {
           LOGGER.info("Creating table: " + tableName + " with GSI: " + indexName);

           CreateTableRequest createTableRequest = CreateTableRequest.builder()
               .tableName(tableName)
               .attributeDefinitions(
                   AttributeDefinition.builder()
                       .attributeName("Artist")
                       .attributeType(ScalarAttributeType.S)
                       .build(),
                   AttributeDefinition.builder()
                       .attributeName("SongTitle")
                       .attributeType(ScalarAttributeType.S)
                       .build())
               .keySchema(
                   KeySchemaElement.builder()
                       .attributeName("Artist")
                       .keyType(KeyType.HASH)
                       .build(),
                   KeySchemaElement.builder()
                       .attributeName("SongTitle")
                       .keyType(KeyType.RANGE)
                       .build())
               .billingMode(BillingMode.PAY_PER_REQUEST)
               .globalSecondaryIndexes(GlobalSecondaryIndex.builder()
                   .indexName(indexName)
                   .keySchema(KeySchemaElement.builder()
```

```
                        .attributeName("SongTitle")
                        .keyType(KeyType.HASH)
                        .build())
                    .projection(

Projection.builder().projectionType(ProjectionType.ALL).build())
                    .build())
                .streamSpecification(StreamSpecification.builder()
                    .streamEnabled(true)
                    .streamViewType(StreamViewType.NEW_AND_OLD_IMAGES)
                    .build())
                .build();

            CreateTableResponse response =
dynamoDbClient.createTable(createTableRequest);
            LOGGER.info("Table creation initiated. Status: "
                + response.tableDescription().tableStatus());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to create table: " + tableName + " - " +
e.getMessage());
            throw e;
        }
    }
```

Tunggu tabel menjadi aktif menggunakan AWS SDK for Java 2.x.

```
    public static void waitForTableActive(final DynamoDbClient dynamoDbClient, final
String tableName) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }

        try {
            LOGGER.info("Waiting for table to become active: " + tableName);
```

```
            try (DynamoDbWaiter waiter =
                DynamoDbWaiter.builder().client(dynamoDbClient).build()) {
                DescribeTableRequest request =
                    DescribeTableRequest.builder().tableName(tableName).build();

                waiter.waitUntilTableExists(request);
                LOGGER.info("Table is now active: " + tableName);
            }

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to wait for table to become active: " + tableName
+ " - " + e.getMessage());
            throw e;
        }
    }
```

Tambahkan replika untuk membuat atau memperluas tabel global menggunakan AWS SDK for Java 2.x.

```
    public static UpdateTableResponse addReplica(
        final DynamoDbClient dynamoDbClient,
        final String tableName,
        final Region replicaRegion,
        final String indexName,
        final Long readCapacity) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }
        if (replicaRegion == null) {
            throw new IllegalArgumentException("Replica region cannot be null");
        }
        if (indexName == null || indexName.trim().isEmpty()) {
            throw new IllegalArgumentException("Index name cannot be null or
empty");
        }
        if (readCapacity == null || readCapacity <= 0) {
```

```
            throw new IllegalArgumentException("Read capacity must be a positive
number");
        }

        try {
            LOGGER.info("Adding replica in region: " + replicaRegion.id() + " for
table: " + tableName);

            // Create a ReplicationGroupUpdate for adding a replica
            ReplicationGroupUpdate replicationGroupUpdate =
ReplicationGroupUpdate.builder()
                .create(builder -> builder.regionName(replicaRegion.id())
                    .globalSecondaryIndexes(ReplicaGlobalSecondaryIndex.builder()
                        .indexName(indexName)

.provisionedThroughputOverride(ProvisionedThroughputOverride.builder()
                            .readCapacityUnits(readCapacity)
                            .build())
                        .build())
                    .build())
                .build();

            UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
                .tableName(tableName)
                .replicaUpdates(replicationGroupUpdate)
                .build();

            UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
            LOGGER.info("Replica addition initiated in region: " +
replicaRegion.id());

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add replica in region: " + replicaRegion.id() +
" - " + e.getMessage());
            throw e;
        }
    }
```

Hapus replika dari tabel global menggunakan AWS SDK for Java 2.x.

```
   public static UpdateTableResponse removeReplica(
       final DynamoDbClient dynamoDbClient, final String tableName, final Region
replicaRegion) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }
       if (replicaRegion == null) {
           throw new IllegalArgumentException("Replica region cannot be null");
       }

       try {
           LOGGER.info("Removing replica in region: " + replicaRegion.id() + " for
table: " + tableName);

           // Create a ReplicationGroupUpdate for removing a replica
           ReplicationGroupUpdate replicationGroupUpdate =
ReplicationGroupUpdate.builder()
               .delete(builder -> builder.regionName(replicaRegion.id()).build())
               .build();

           UpdateTableRequest updateTableRequest = UpdateTableRequest.builder()
               .tableName(tableName)
               .replicaUpdates(replicationGroupUpdate)
               .build();

           UpdateTableResponse response =
dynamoDbClient.updateTable(updateTableRequest);
           LOGGER.info("Replica removal initiated in region: " +
replicaRegion.id());

           return response;

       } catch (DynamoDbException e) {
           LOGGER.severe("Failed to remove replica in region: " +
replicaRegion.id() + " - " + e.getMessage());
           throw e;
       }
   }
```

Tambahkan item uji untuk memverifikasi replikasi menggunakan AWS SDK for Java 2.x.

```
   public static PutItemResponse putTestItem(
       final DynamoDbClient dynamoDbClient, final String tableName, final String
artist, final String songTitle) {

       if (dynamoDbClient == null) {
           throw new IllegalArgumentException("DynamoDB client cannot be null");
       }
       if (tableName == null || tableName.trim().isEmpty()) {
           throw new IllegalArgumentException("Table name cannot be null or
empty");
       }
       if (artist == null || artist.trim().isEmpty()) {
           throw new IllegalArgumentException("Artist cannot be null or empty");
       }
       if (songTitle == null || songTitle.trim().isEmpty()) {
           throw new IllegalArgumentException("Song title cannot be null or
empty");
       }

       try {
           LOGGER.info("Adding test item to table: " + tableName);

           Map<String,
software.amazon.awssdk.services.dynamodb.model.AttributeValue> item = new
HashMap<>();
           item.put(
               "Artist",

software.amazon.awssdk.services.dynamodb.model.AttributeValue.builder()
                   .s(artist)
                   .build());
           item.put(
               "SongTitle",

software.amazon.awssdk.services.dynamodb.model.AttributeValue.builder()
                   .s(songTitle)
                   .build());

           PutItemRequest putItemRequest =
```

```
                PutItemRequest.builder().tableName(tableName).item(item).build();

            PutItemResponse response = dynamoDbClient.putItem(putItemRequest);
            LOGGER.info("Test item added successfully");

            return response;

        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to add test item to table: " + tableName + " - " +
e.getMessage());
            throw e;
        }
    }
```

Jelaskan konfigurasi tabel global dan replika menggunakan AWS SDK for Java 2.x.

```
    public static DescribeTableResponse describeTable(final DynamoDbClient
dynamoDbClient, final String tableName) {

        if (dynamoDbClient == null) {
            throw new IllegalArgumentException("DynamoDB client cannot be null");
        }
        if (tableName == null || tableName.trim().isEmpty()) {
            throw new IllegalArgumentException("Table name cannot be null or
empty");
        }

        try {
            LOGGER.info("Describing table: " + tableName);

            DescribeTableRequest request =
                DescribeTableRequest.builder().tableName(tableName).build();

            DescribeTableResponse response = dynamoDbClient.describeTable(request);

            LOGGER.info("Table status: " + response.table().tableStatus());
            if (response.table().replicas() != null
                && !response.table().replicas().isEmpty()) {
                LOGGER.info("Number of replicas: " +
response.table().replicas().size());
                response.table()
                    .replicas()
```

```
                    .forEach(replica -> LOGGER.info(
                        "Replica region: " + replica.regionName() + ", Status: " +
replica.replicaStatus()));
            }

            return response;

        } catch (ResourceNotFoundException e) {
            LOGGER.severe("Table not found: " + tableName + " - " + e.getMessage());
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.severe("Failed to describe table: " + tableName + " - " +
e.getMessage());
            throw e;
        }
    }
```

Contoh lengkap operasi tabel global menggunakan AWS SDK for Java 2.x.

```
    public static void exampleUsage(final Region sourceRegion, final Region
replicaRegion) {

        String tableName = "Music";
        String indexName = "SongTitleIndex";
        Long readCapacity = 15L;

        // Create DynamoDB client for the source region
        try (DynamoDbClient dynamoDbClient =
            DynamoDbClient.builder().region(sourceRegion).build()) {

            try {
                // Step 1: Create the initial table with GSI and streams
                LOGGER.info("Step 1: Creating table in source region: " +
sourceRegion.id());
                createTableWithGSI(dynamoDbClient, tableName, indexName);

                // Step 2: Wait for table to become active
                LOGGER.info("Step 2: Waiting for table to become active");
                waitForTableActive(dynamoDbClient, tableName);

                // Step 3: Add replica in destination region
```

```
                LOGGER.info("Step 3: Adding replica in region: " +
replicaRegion.id());
                addReplica(dynamoDbClient, tableName, replicaRegion, indexName,
readCapacity);

                // Step 4: Wait a moment for replica creation to start
                Thread.sleep(5000);

                // Step 5: Describe table to view replica information
                LOGGER.info("Step 5: Describing table to view replicas");
                describeTable(dynamoDbClient, tableName);

                // Step 6: Add a test item to verify replication
                LOGGER.info("Step 6: Adding test item to verify replication");
                putTestItem(dynamoDbClient, tableName, "TestArtist", "TestSong");

                LOGGER.info("Global table setup completed successfully!");
                LOGGER.info("You can verify replication by checking the item in
region: " + replicaRegion.id());

                // Step 7: Remove replica and clean up table
                LOGGER.info("Step 7: Removing replica from region: " +
replicaRegion.id());
                removeReplica(dynamoDbClient, tableName, replicaRegion);
                DeleteTableResponse deleteTableResponse =
dynamoDbClient.deleteTable(
                    DeleteTableRequest.builder().tableName(tableName).build());
                LOGGER.info("MREC global table demonstration completed
successfully!");

            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                throw new RuntimeException("Thread was interrupted", e);
            } catch (DynamoDbException e) {
                LOGGER.severe("DynamoDB operation failed: " + e.getMessage());
                throw e;
            }
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateTable

- DescribeTable
- PutItem
- UpdateTable

### Mendeteksi APD dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi Alat Pelindung Diri (APD) dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi yang mendeteksi gambar dengan Alat Pelindung Diri.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

### Pantau kinerja DynamoDB

Contoh kode berikut menunjukkan cara mengkonfigurasi penggunaan aplikasi DynamoDB untuk memantau kinerja.

SDK untuk Java 2.x

Contoh ini menunjukkan cara mengkonfigurasi aplikasi Java untuk memantau kinerja DynamoDB. Aplikasi mengirimkan data metrik ke CloudWatch tempat Anda dapat memantau kinerja.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch

- DynamoDB

### Lakukan operasi kueri lanjutan

Contoh kode berikut menunjukkan bagaimana melakukan operasi query lanjutan di DynamoDB.

- Tabel kueri menggunakan berbagai teknik penyaringan dan kondisi.
- Menerapkan pagination untuk set hasil besar.
- Gunakan Indeks Sekunder Global untuk pola akses alternatif.
- Terapkan kontrol konsistensi berdasarkan persyaratan aplikasi.

#### SDK untuk Java 2.x

Kueri dengan pembacaan yang sangat konsisten menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithConsistentReads(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final boolean useConsistentRead) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
```

```
        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .consistentRead(useConsistentRead)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query successful. Found {0} items",
 response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with consistent reads", e);
            throw e;
        }
    }
```

Kueri menggunakan Indeks Sekunder Global dengan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
```

```
   public QueryResponse queryTable(
       final String tableName, final String partitionKeyName, final String
partitionKeyValue) {

       CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);

       // Create expression attribute names for the column names
       final Map<String, String> expressionAttributeNames = new HashMap<>();
       expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);

       // Create expression attribute values for the column values
       final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
       expressionAttributeValues.put(
           EXPRESSION_ATTRIBUTE_VALUE_PK,
           AttributeValue.builder().s(partitionKeyValue).build());

       // Create the query request
       final QueryRequest queryRequest = QueryRequest.builder()
           .tableName(tableName)
           .keyConditionExpression(KEY_CONDITION_EXPRESSION)
           .expressionAttributeNames(expressionAttributeNames)
           .expressionAttributeValues(expressionAttributeValues)
           .build();

       try {
           final QueryResponse response = dynamoDbClient.query(queryRequest);
           System.out.println("Query on base table successful. Found " +
response.count() + " items");
           return response;
       } catch (ResourceNotFoundException e) {
           System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
           throw new DynamoDbQueryException("Table not found: " + tableName, e);
       } catch (DynamoDbException e) {
           System.err.println("Error querying base table: " + e.getMessage());
           throw new DynamoDbQueryException("Failed to execute query on base
table", e);
       }
   }
```

```
    /**
     * Queries a DynamoDB Global Secondary Index (GSI) by partition key.
     *
     * @param tableName         The name of the DynamoDB table
     * @param indexName         The name of the GSI
     * @param partitionKeyName  The name of the GSI partition key attribute
     * @param partitionKeyValue The value of the GSI partition key to query
     * @return The query response from DynamoDB
     * @throws ResourceNotFoundException if the table or index doesn't exist
     * @throws DynamoDbException if the query fails
     */
    public QueryResponse queryGlobalSecondaryIndex(
        final String tableName, final String indexName, final String
partitionKeyName, final String partitionKeyValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Index name", indexName);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_IK,
partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_IK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .indexName(indexName)
            .keyConditionExpression(GSI_KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on GSI successful. Found " + response.count()
+ " items");
```

```
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(
                "Error: The Amazon DynamoDB table \"%s\" or index \"%s\" can't be
 found.\n", tableName, indexName);
            throw new DynamoDbQueryException("Table or index not found: " +
 tableName + "/" + indexName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying GSI: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on GSI", e);
        }
    }
```

Kueri dengan pagination menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public List<Map<String, AttributeValue>> queryWithPagination(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue, final int pageSize) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validatePositiveInteger("Page size", pageSize);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
```

```
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        QueryRequest.Builder queryRequestBuilder = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(pageSize);

        // List to store all items from all pages
        final List<Map<String, AttributeValue>> allItems = new ArrayList<>();

        // Map to store the last evaluated key for pagination
        Map<String, AttributeValue> lastEvaluatedKey = null;
        int pageNumber = 1;

        try {
            do {
                // If we have a last evaluated key, use it for the next page
                if (lastEvaluatedKey != null) {
                    queryRequestBuilder.exclusiveStartKey(lastEvaluatedKey);
                }

                // Execute the query
                final QueryResponse response =
dynamoDbClient.query(queryRequestBuilder.build());

                // Process the current page of results
                final List<Map<String, AttributeValue>> pageItems =
response.items();
                allItems.addAll(pageItems);

                // Get the last evaluated key for the next page
                lastEvaluatedKey = response.lastEvaluatedKey();
                if (lastEvaluatedKey != null && lastEvaluatedKey.isEmpty()) {
                    lastEvaluatedKey = null;
                }
```

```
                System.out.println("Page " + pageNumber + ": Retrieved " +
 pageItems.size() + " items (Running total: "
                    + allItems.size() + ")");

                pageNumber++;

            } while (lastEvaluatedKey != null);

            System.out.println("Query with pagination complete. Retrieved a total of
 " + allItems.size()
                + " items across " + (pageNumber - 1) + " pages");

            return allItems;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
 found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with pagination: " + e.getMessage());
            throw e;
        }
    }
```

Kueri dengan filter kompleks menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithComplexFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
```

```
        final String statusAttrName,
        final String activeStatus,
        final String pendingStatus,
        final String priceAttrName,
        final double minPrice,
        final double maxPrice,
        final String categoryAttrName) {

        // Validate parameters
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Status attribute name",
statusAttrName);
        CodeSampleUtils.validateStringParameter("Active status", activeStatus);
        CodeSampleUtils.validateStringParameter("Pending status", pendingStatus);
        CodeSampleUtils.validateStringParameter("Price attribute name",
priceAttrName);
        CodeSampleUtils.validateStringParameter("Category attribute name",
categoryAttrName);
        CodeSampleUtils.validateNumericRange("Minimum price", minPrice, 0.0,
Double.MAX_VALUE);
        CodeSampleUtils.validateNumericRange("Maximum price", maxPrice, minPrice,
Double.MAX_VALUE);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pk", partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_STATUS,
statusAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PRICE,
priceAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_CATEGORY,
categoryAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            ":pkValue", AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_ACTIVE,
            AttributeValue.builder().s(activeStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PENDING,
```

```
            AttributeValue.builder().s(pendingStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MIN_PRICE,
            AttributeValue.builder().n(String.valueOf(minPrice)).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MAX_PRICE,
            AttributeValue.builder().n(String.valueOf(maxPrice)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        return dynamoDbClient.query(queryRequest);
    }
```

Kueri dengan ekspresi filter yang dibangun secara dinamis menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public static QueryResponse queryWithDynamicFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final Map<String, Object> filterCriteria,
        final Region region,
        final DynamoDbClient dynamoDbClient) {
```

```
        validateParameters(tableName, partitionKeyName, partitionKeyValue,
filterCriteria);

        DynamoDbClient ddbClient = dynamoDbClient;
        boolean shouldClose = false;

        try {
            if (ddbClient == null) {
                ddbClient = createClient(region);
                shouldClose = true;
            }

            final QueryWithDynamicFilter queryHelper = new
QueryWithDynamicFilter(ddbClient);
            return queryHelper.queryWithDynamicFilter(tableName, partitionKeyName,
partitionKeyValue, filterCriteria);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Failed to execute dynamic filter query: " +
e.getMessage());
            throw e;
        } catch (Exception e) {
            System.err.println("Unexpected error during query: " + e.getMessage());
            throw e;
        } finally {
            if (shouldClose && ddbClient != null) {
                ddbClient.close();
            }
        }
    }

    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue>
<filterAttrName> <filterAttrValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    filterAttrName - The name of the attribute to filter on.
```

```
                    filterAttrValue - The value to filter by.
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 5) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
        final String filterAttrName = args[3];
        final String filterAttrValue = args[4];
        final Region region = args.length > 5 ? Region.of(args[5]) :
Region.US_EAST_1;

        System.out.println("Querying items with dynamic filter: " + filterAttrName +
" = " + filterAttrValue);

        try {
            // Using the builder pattern to create and execute the query
            final QueryResponse response = new DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriterion(filterAttrName, filterAttrValue)
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> System.out.println(item));

            // Demonstrate multiple filter criteria
            System.out.println("\nNow querying with multiple filter criteria:");

            Map<String, Object> multipleFilters = new HashMap<>();
            multipleFilters.put(filterAttrName, filterAttrValue);
            multipleFilters.put("status", "active");

            final QueryResponse multiFilterResponse = new
DynamicFilterQueryBuilder()
```

```
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriteria(multipleFilters)
                .withRegion(region)
                .execute();

            System.out.println("Found " + multiFilterResponse.count() + " items with
 multiple filters:");
            multiFilterResponse.items().forEach(item -> System.out.println(item));

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

Kueri dengan ekspresi filter dan batas penggunaan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithFilterAndLimit(
```

```
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String filterAttrName,
        final String filterAttrValue,
        final int limit) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Filter attribute name",
filterAttrName);
        CodeSampleUtils.validateStringParameter("Filter attribute value",
filterAttrValue);
        CodeSampleUtils.validatePositiveInteger("Limit", limit);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_FILTER,
filterAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_FILTER,
            AttributeValue.builder().s(filterAttrValue).build());

        // Create the filter expression
        final String filterExpression = "#filterAttr = :filterValue";

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(limit)
            .build();
```

```
        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with filter and limit successful. Found
{0} items", response.count());
            LOGGER.log(
                Level.INFO, "ScannedCount: {0} (total items evaluated before
filtering)", response.scannedCount());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with filter and limit: {0}",
e.getMessage());
            throw e;
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Lakukan operasi daftar

Contoh kode berikut menunjukkan bagaimana melakukan operasi daftar di DynamoDB.

- Tambahkan elemen ke atribut daftar.
- Hapus elemen dari atribut daftar.
- Perbarui elemen tertentu dalam daftar berdasarkan indeks.
- Gunakan fungsi daftar append dan daftar indeks.

#### SDK untuk Java 2.x

Menunjukkan operasi daftar menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
```

```
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Appends items to a list attribute.
     *
     * <p>This method demonstrates how to use the list_append function to add
     * items to the end of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param itemsToAppend The items to append to the list
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse appendToList(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        List<AttributeValue> itemsToAppend) {

        // Create a list value from the items to append
        AttributeValue listValue =
 AttributeValue.builder().l(itemsToAppend).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName =
 list_append(if_not_exists(#attrName, :emptyList), :newItems)")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(
                ":newItems",
                listValue,
                ":emptyList",
```

```
                AttributeValue.builder().l(new
ArrayList<AttributeValue>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Prepends items to a list attribute.
     *
     * <p>This method demonstrates how to use the list_append function to add
     * items to the beginning of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param itemsToPrepend The items to prepend to the list
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse prependToList(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        List<AttributeValue> itemsToPrepend) {

        // Create a list value from the items to prepend
        AttributeValue listValue =
AttributeValue.builder().l(itemsToPrepend).build();

        // Define the update parameters
        // Note: To prepend, we put the new items first in the list_append function
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName = list_append(:newItems,
if_not_exists(#attrName, :emptyList))")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(
                ":newItems",
```

```
                listValue,
                ":emptyList",
                AttributeValue.builder().l(new
ArrayList<AttributeValue>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Updates a specific element in a list attribute.
     *
     * <p>This method demonstrates how to update a specific element in a list
     * by its index.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param index The index of the element to update
     * @param newValue The new value for the element
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateListElement(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        int index,
        AttributeValue newValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attrName[" + index + "] = :newValue")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .expressionAttributeValues(Map.of(":newValue", newValue))
            .returnValues("UPDATED_NEW")
            .build();
```

```
        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes a specific element from a list attribute.
     *
     * <p>This method demonstrates how to remove a specific element from a list
     * by its index.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param listAttributeName The name of the list attribute
     * @param index The index of the element to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeListElement(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String listAttributeName,
        int index) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #attrName[" + index + "]")
            .expressionAttributeNames(Map.of("#attrName", listAttributeName))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Gets the current value of a list attribute.
     *
     * <p>Helper method to retrieve the current value of a list attribute.
     *
     * @param dynamoDbClient The DynamoDB client
```

```
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param listAttributeName The name of the list attribute
     * @return The list attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static List<AttributeValue> getListAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String listAttributeName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(listAttributeName)
            .build();

        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the list attribute if it exists, otherwise null
            if (response.item() != null &&
response.item().containsKey(listAttributeName)) {
                return response.item().get(listAttributeName).l();
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get list attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Contoh penggunaan operasi daftar dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
```

```
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating list operations in DynamoDB");

        try {
            // Example 1: Append items to a list
            System.out.println("\nExample 1: Appending items to a list");
            List<AttributeValue> tagsToAppend = List.of(
                AttributeValue.builder().s("Electronics").build(),
                AttributeValue.builder().s("Gadget").build());

            UpdateItemResponse appendResponse = appendToList(dynamoDbClient,
tableName, key, "Tags", tagsToAppend);

            System.out.println("Updated list attribute: " +
appendResponse.attributes());

            // Example 2: Prepend items to a list
            System.out.println("\nExample 2: Prepending items to a list");
            List<AttributeValue> tagsToPrepend = List.of(
                AttributeValue.builder().s("Featured").build(),
                AttributeValue.builder().s("New").build());

            UpdateItemResponse prependResponse = prependToList(dynamoDbClient,
tableName, key, "Tags", tagsToPrepend);

            System.out.println("Updated list attribute: " +
prependResponse.attributes());

            // Example 3: Update a specific element in a list
            System.out.println("\nExample 3: Updating a specific element in a
list");
            UpdateItemResponse updateResponse = updateListElement(
                dynamoDbClient,
                tableName,
                key,
                "Tags",
                0,
                AttributeValue.builder().s("BestSeller").build());

            System.out.println("Updated list attribute: " +
updateResponse.attributes());

            // Example 4: Remove a specific element from a list
```

```
            System.out.println("\nExample 4: Removing a specific element from a
list");
            UpdateItemResponse removeResponse = removeListElement(dynamoDbClient,
tableName, key, "Tags", 1);

            System.out.println("Updated list attribute: " +
removeResponse.attributes());

            // Example 5: Get the current value of a list attribute
            System.out.println("\nExample 5: Getting the current value of a list
attribute");
            List<AttributeValue> currentList = getListAttribute(dynamoDbClient,
tableName, key, "Tags");

            if (currentList != null) {
                System.out.println("Current list attribute:");
                for (int i = 0; i < currentList.size(); i++) {
                    System.out.println("  [" + i + "]: " + currentList.get(i).s());
                }
            } else {
                System.out.println("List attribute not found");
            }

            // Explain list operations
            System.out.println("\nKey points about DynamoDB list operations:");
            System.out.println("1. Lists are ordered collections of attributes");
            System.out.println("2. Use list_append to add items to a list");
            System.out.println("3. To append items, use list_append(existingList,
newItems)");
            System.out.println("4. To prepend items, use list_append(newItems,
existingList)");
            System.out.println("5. Use index notation (list[0]) to access or update
specific elements");
            System.out.println("6. Use REMOVE to delete elements from a list");
            System.out.println("7. List indices are zero-based");
            System.out.println("8. Use if_not_exists to handle the case where the
list doesn't exist yet");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

### Lakukan operasi peta

Contoh kode berikut menunjukkan bagaimana melakukan operasi peta di DynamoDB.

- Tambahkan dan perbarui atribut bersarang dalam struktur peta.
- Hapus bidang tertentu dari peta.
- Bekerja dengan atribut peta yang sangat bersarang.

#### SDK untuk Java 2.x

Menunjukkan operasi peta menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Updates a map attribute that may not exist.
     *
     * <p>This method demonstrates how to safely update a map attribute
     * by using if_not_exists to handle the case where the map doesn't exist yet.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param mapKey The key within the map to update
     * @param value The value to set
     * @return The response from DynamoDB
```

```
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateMapAttributeSafe(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        String mapKey,
        AttributeValue value) {

        // Create an empty map to use if the map doesn't exist
        Map<String, AttributeValue> emptyMap = new HashMap<>();
        AttributeValue emptyMapValue = AttributeValue.builder().m(emptyMap).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #mapName = if_not_exists(#mapName, :emptyMap),
#mapName.#mapKey = :value")
            .expressionAttributeNames(Map.of(
                "#mapName", mapName,
                "#mapKey", mapKey))
            .expressionAttributeValues(Map.of(
                ":value",
                value,
                ":emptyMap",
                AttributeValue.builder().m(new HashMap<>()).build()))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Adds an attribute to a nested map.
     *
     * <p>This method demonstrates how to update a nested attribute without
     * overwriting the entire map.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
```

```
     * @param path The path to the nested attribute as a list
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToNestedMap(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        List<String> path,
        AttributeValue value) {

        // Create expression attribute names for each part of the path
        Map<String, String> expressionAttributeNames = new HashMap<>();
        for (int i = 0; i < path.size(); i++) {
            expressionAttributeNames.put("#attr" + i, path.get(i));
        }

        // Build the attribute path using the expression attribute names
        StringBuilder attributePathExpression = new StringBuilder();
        for (int i = 0; i < path.size(); i++) {
            if (i > 0) {
                attributePathExpression.append(".");
            }
            attributePathExpression.append("#attr").append(i);
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET " + attributePathExpression.toString() + "
= :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes an attribute from a map.
```

```
     *
     * <p>This method demonstrates how to remove a specific attribute from a map.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param mapKey The key within the map to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeMapAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        String mapKey) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #mapName.#mapKey")
            .expressionAttributeNames(Map.of(
                "#mapName", mapName,
                "#mapKey", mapKey))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Creates a map with multiple attributes in a single operation.
     *
     * <p>This method demonstrates how to create a map with multiple attributes
     * in a single update operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param mapName The name of the map attribute
     * @param attributes The attributes to set in the map
```

```
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse createMapWithAttributes(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String mapName,
        Map<String, AttributeValue> attributes) {

        // Create a map value from the attributes
        AttributeValue mapValue = AttributeValue.builder().m(attributes).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #mapName = :mapValue")
            .expressionAttributeNames(Map.of("#mapName", mapName))
            .expressionAttributeValues(Map.of(":mapValue", mapValue))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Gets the current value of a map attribute.
     *
     * <p>Helper method to retrieve the current value of a map attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param mapName The name of the map attribute
     * @return The map attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, AttributeValue> getMapAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String mapName) {

        // Define the get parameters
```

```
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(mapName)
            .build();

        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the map attribute if it exists, otherwise null
            if (response.item() != null && response.item().containsKey(mapName)) {
                return response.item().get(mapName).m();
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get map attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Contoh penggunaan operasi peta dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating map operations in DynamoDB");

        try {
            // Example 1: Create a map with multiple attributes
            System.out.println("\nExample 1: Creating a map with multiple
attributes");
            Map<String, AttributeValue> productDetails = new HashMap<>();
            productDetails.put("Color", AttributeValue.builder().s("Red").build());
            productDetails.put("Weight", AttributeValue.builder().n("2.5").build());
            productDetails.put(
```

```
                "Dimensions", AttributeValue.builder().s("10x20x5").build());

            UpdateItemResponse createResponse =
                createMapWithAttributes(dynamoDbClient, tableName, key, "Details",
productDetails);

            System.out.println("Created map attribute: " +
createResponse.attributes());

            // Example 2: Update a specific attribute in a map
            System.out.println("\nExample 2: Updating a specific attribute in a
map");
            UpdateItemResponse updateResponse = updateMapAttributeSafe(
                dynamoDbClient,
                tableName,
                key,
                "Details",
                "Color",
                AttributeValue.builder().s("Blue").build());

            System.out.println("Updated map attribute: " +
updateResponse.attributes());

            // Example 3: Add an attribute to a nested map
            System.out.println("\nExample 3: Adding an attribute to a nested map");
            UpdateItemResponse nestedResponse = addToNestedMap(
                dynamoDbClient,
                tableName,
                key,
                List.of("Specifications", "Technical", "Resolution"),
                AttributeValue.builder().s("1920x1080").build());

            System.out.println("Added to nested map: " +
nestedResponse.attributes());

            // Example 4: Remove an attribute from a map
            System.out.println("\nExample 4: Removing an attribute from a map");
            UpdateItemResponse removeResponse =
                removeMapAttribute(dynamoDbClient, tableName, key, "Details",
"Dimensions");

            System.out.println("Updated map after removal: " +
removeResponse.attributes());
```

```
            // Example 5: Get the current value of a map attribute
            System.out.println("\nExample 5: Getting the current value of a map
attribute");
            Map<String, AttributeValue> currentMap = getMapAttribute(dynamoDbClient,
tableName, key, "Details");

            if (currentMap != null) {
                System.out.println("Current map attribute:");
                for (Map.Entry<String, AttributeValue> entry :
currentMap.entrySet()) {
                    System.out.println("  " + entry.getKey() + ": " +
entry.getValue());
                }
            } else {
                System.out.println("Map attribute not found");
            }

            // Explain map operations
            System.out.println("\nKey points about DynamoDB map operations:");
            System.out.println("1. Maps are unordered collections of name-value
pairs");
            System.out.println("2. Use dot notation (map.key) to access or update
specific attributes");
            System.out.println("3. You can update individual attributes without
overwriting the entire map");
            System.out.println("4. Maps can be nested to create complex data
structures");
            System.out.println("5. Use REMOVE to delete attributes from a map");
            System.out.println("6. You can create a map with multiple attributes in
a single operation");
            System.out.println("7. Map keys are case-sensitive");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

### Lakukan operasi set

Contoh kode berikut menunjukkan bagaimana melakukan operasi set di DynamoDB.

- Tambahkan elemen ke atribut set.
- Hapus elemen dari atribut set.
- Gunakan operasi ADD dan DELETE dengan set.

#### SDK untuk Java 2.x

Menunjukkan operasi set menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.HashSet;
import java.util.Map;
import java.util.Set;

    /**
     * Adds values to a string set attribute.
     *
     * <p>This method demonstrates how to use the ADD operation to add values
     * to a string set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToAdd The values to add to the set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToStringSet(
        DynamoDbClient dynamoDbClient,
```

```
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<String> valuesToAdd) {

        // Create a string set value from the values to add
        AttributeValue setValue = AttributeValue.builder().ss(valuesToAdd).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #setAttr :valuesToAdd")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToAdd", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Adds values to a number set attribute.
     *
     * <p>This method demonstrates how to use the ADD operation to add values
     * to a number set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToAdd The values to add to the set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse addToNumberSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<Number> valuesToAdd) {

        // Convert numbers to strings for DynamoDB
```

```
        Set<String> stringValues = new HashSet<>();
        for (Number value : valuesToAdd) {
            stringValues.add(value.toString());
        }

        // Create a number set value from the values to add
        AttributeValue setValue = AttributeValue.builder().ns(stringValues).build();

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #setAttr :valuesToAdd")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToAdd", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Removes values from a set attribute.
     *
     * <p>This method demonstrates how to use the DELETE operation to remove values
     * from a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param valuesToRemove The values to remove from the set
     * @param isNumberSet Whether the set is a number set (true) or string set
(false)
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse removeFromSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<?> valuesToRemove,
```

```
        boolean isNumberSet) {

        AttributeValue setValue;

        if (isNumberSet) {
            // Convert numbers to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : valuesToRemove) {
                if (value instanceof Number) {
                    stringValues.add(value.toString());
                } else {
                    throw new IllegalArgumentException("Values must be numbers for a
number set");
                }
            }

            setValue = AttributeValue.builder().ns(stringValues).build();
        } else {
            // Convert objects to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : valuesToRemove) {
                stringValues.add(value.toString());
            }

            setValue = AttributeValue.builder().ss(stringValues).build();
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("DELETE #setAttr :valuesToRemove")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":valuesToRemove", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Checks if a value exists in a set attribute.
     *
```

```
     * <p>This method demonstrates how to use the contains function to check
     * if a value exists in a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to check
     * @param setAttributeName The name of the set attribute
     * @param valueToCheck The value to check for
     * @return Map containing the result of the check
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, Object> checkIfValueInSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        String valueToCheck) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the update parameters with a condition expression
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #tempAttr = :tempVal")
                .conditionExpression("contains(#setAttr, :valueToCheck)")
                .expressionAttributeNames(Map.of("#setAttr", setAttributeName,
"#tempAttr", "TempAttribute"))
                .expressionAttributeValues(Map.of(
                    ":valueToCheck",
AttributeValue.builder().s(valueToCheck).build(),
                    ":tempVal", AttributeValue.builder().s("TempValue").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Attempt the update operation
            dynamoDbClient.updateItem(request);

            // If we get here, the condition was met
            result.put("exists", true);
            result.put("message", "Value '" + valueToCheck + "' exists in the set");

            // Clean up the temporary attribute
```

```
            UpdateItemRequest cleanupRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("REMOVE #tempAttr")
                .expressionAttributeNames(Map.of("#tempAttr", "TempAttribute"))
                .build();

            dynamoDbClient.updateItem(cleanupRequest);

        } catch (DynamoDbException e) {
            if (e.getMessage().contains("ConditionalCheckFailed")) {
                // The condition was not met
                result.put("exists", false);
                result.put("message", "Value '" + valueToCheck + "' does not exist
in the set");
            } else {
                // Some other error occurred
                result.put("exists", false);
                result.put("message", "Error checking set: " + e.getMessage());
                result.put("error", e.getClass().getSimpleName());
            }
        }

        return result;
    }

    /**
     * Creates a set with multiple values in a single operation.
     *
     * <p>This method demonstrates how to create a set with multiple values
     * in a single update operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param setAttributeName The name of the set attribute
     * @param setValues The values to include in the set
     * @param isNumberSet Whether to create a number set (true) or string set
(false)
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse createSetWithValues(
        DynamoDbClient dynamoDbClient,
```

```
        String tableName,
        Map<String, AttributeValue> key,
        String setAttributeName,
        Set<?> setValues,
        boolean isNumberSet) {

        AttributeValue setValue;

        if (isNumberSet) {
            // Convert numbers to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : setValues) {
                if (value instanceof Number) {
                    stringValues.add(value.toString());
                } else {
                    throw new IllegalArgumentException("Values must be numbers for a
number set");
                }
            }

            setValue = AttributeValue.builder().ns(stringValues).build();
        } else {
            // Convert objects to strings for DynamoDB
            Set<String> stringValues = new HashSet<>();
            for (Object value : setValues) {
                stringValues.add(value.toString());
            }

            setValue = AttributeValue.builder().ss(stringValues).build();
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #setAttr = :setValue")
            .expressionAttributeNames(Map.of("#setAttr", setAttributeName))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }
```

```
    /**
     * Gets the current value of a set attribute.
     *
     * <p>Helper method to retrieve the current value of a set attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param setAttributeName The name of the set attribute
     * @return The set attribute value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static AttributeValue getSetAttribute(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String setAttributeName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(setAttributeName)
            .build();

        try {
            // Perform the get operation
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the set attribute if it exists, otherwise null
            if (response.item() != null &&
response.item().containsKey(setAttributeName)) {
                return response.item().get(setAttributeName);
            }

            return null;
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get set attribute: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Contoh penggunaan operasi set dengan AWS SDK for Java 2.x.

```
   public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
       // Example key
       Map<String, AttributeValue> key = new HashMap<>();
       key.put("ProductId", AttributeValue.builder().s("P12345").build());

       System.out.println("Demonstrating set operations in DynamoDB");

       try {
           // Example 1: Create a string set with multiple values
           System.out.println("\nExample 1: Creating a string set with multiple
values");
           Set<String> tags = new HashSet<>();
           tags.add("Electronics");
           tags.add("Gadget");
           tags.add("Smartphone");

           UpdateItemResponse createResponse = createSetWithValues(
               dynamoDbClient, tableName, key, "Tags", tags, false // Not a number
set
               );

           System.out.println("Created set attribute: " +
createResponse.attributes());

           // Example 2: Add values to a string set
           System.out.println("\nExample 2: Adding values to a string set");
           Set<String> additionalTags = new HashSet<>();
           additionalTags.add("Mobile");
           additionalTags.add("Wireless");

           UpdateItemResponse addResponse = addToStringSet(dynamoDbClient,
tableName, key, "Tags", additionalTags);

           System.out.println("Updated set attribute: " +
addResponse.attributes());

           // Example 3: Create a number set with multiple values
           System.out.println("\nExample 3: Creating a number set with multiple
values");
           Set<Number> ratings = new HashSet<>();
           ratings.add(4);
```

```
            ratings.add(5);
            ratings.add(4.5);

            UpdateItemResponse createNumberSetResponse = createSetWithValues(
                dynamoDbClient, tableName, key, "Ratings", ratings, true // Is a
number set
                );

            System.out.println("Created number set attribute: " +
createNumberSetResponse.attributes());

            // Example 4: Add values to a number set
            System.out.println("\nExample 4: Adding values to a number set");
            Set<Number> additionalRatings = new HashSet<>();
            additionalRatings.add(3.5);
            additionalRatings.add(4.2);

            UpdateItemResponse addNumberResponse =
                addToNumberSet(dynamoDbClient, tableName, key, "Ratings",
additionalRatings);

            System.out.println("Updated number set attribute: " +
addNumberResponse.attributes());

            // Example 5: Remove values from a set
            System.out.println("\nExample 5: Removing values from a set");
            Set<String> tagsToRemove = new HashSet<>();
            tagsToRemove.add("Gadget");

            UpdateItemResponse removeResponse = removeFromSet(
                dynamoDbClient, tableName, key, "Tags", tagsToRemove, false // Not a
number set
                );

            System.out.println("Updated set after removal: " +
removeResponse.attributes());

            // Example 6: Check if a value exists in a set
            System.out.println("\nExample 6: Checking if a value exists in a set");
            Map<String, Object> checkResult = checkIfValueInSet(dynamoDbClient,
tableName, key, "Tags", "Electronics");

            System.out.println("Check result: " + checkResult.get("message"));
```

```
            // Example 7: Get the current value of a set attribute
            System.out.println("\nExample 7: Getting the current value of a set
attribute");
            AttributeValue currentStringSet = getSetAttribute(dynamoDbClient,
tableName, key, "Tags");

            if (currentStringSet != null && currentStringSet.ss() != null) {
                System.out.println("Current string set values: " +
currentStringSet.ss());
            } else {
                System.out.println("String set attribute not found");
            }

            AttributeValue currentNumberSet = getSetAttribute(dynamoDbClient,
tableName, key, "Ratings");

            if (currentNumberSet != null && currentNumberSet.ns() != null) {
                System.out.println("Current number set values: " +
currentNumberSet.ns());
            } else {
                System.out.println("Number set attribute not found");
            }

            // Explain set operations
            System.out.println("\nKey points about DynamoDB set operations:");
            System.out.println(
                "1. DynamoDB supports three set types: string sets (SS), number sets
(NS), and binary sets (BS)");
            System.out.println("2. Sets can only contain elements of the same
type");
            System.out.println("3. Use ADD to add elements to a set");
            System.out.println("4. Use DELETE to remove elements from a set");
            System.out.println("5. Sets automatically remove duplicate values");
            System.out.println("6. Sets are unordered collections");
            System.out.println("7. Use the contains function to check if a value
exists in a set");
            System.out.println("8. You can create a set with multiple values in a
single operation");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

Melakukan kueri pada tabel menggunakan batch pernyataan PartiQL

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Dapatkan batch item dengan menjalankan beberapa pernyataan SELECT.
- Tambahkan batch item dengan menjalankan beberapa pernyataan INSERT.
- Perbarui batch item dengan menjalankan beberapa pernyataan UPDATE.
- Hapus batch item dengan menjalankan beberapa pernyataan DELETE.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class ScenarioPartiQLBatch {
    public static void main(String[] args) throws IOException {
        String tableName = "MoviesPartiQBatch";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println("Creating an Amazon DynamoDB table named " + tableName
            + " with a key named year and a sort key named title.");
        createTable(ddb, tableName);

        System.out.println("Adding multiple records into the " + tableName
            + " table using a batch command.");
        putRecordBatch(ddb);

        // Update multiple movies by using the BatchExecute statement.
        String title1 = "Star Wars";
        int year1 = 1977;
```

```
        String title2 = "Wizard of Oz";
        int year2 = 1939;

        System.out.println("Query two movies.");
        getBatch(ddb, tableName, title1, title2, year1, year2);

        System.out.println("Updating multiple records using a batch command.");
        updateTableItemBatch(ddb);

        System.out.println("Deleting multiple records using a batch command.");
        deleteItemBatch(ddb);

        System.out.println("Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static boolean getBatch(DynamoDbClient ddb, String tableName, String
title1, String title2, int year1, int year2) {
        String getBatch = "SELECT * FROM " + tableName + " WHERE title = ? AND year
= ?";

        List<BatchStatementRequest> statements = new ArrayList<>();
        statements.add(BatchStatementRequest.builder()
            .statement(getBatch)
            .parameters(AttributeValue.builder().s(title1).build(),
                AttributeValue.builder().n(String.valueOf(year1)).build())
            .build());
        statements.add(BatchStatementRequest.builder()
            .statement(getBatch)
            .parameters(AttributeValue.builder().s(title2).build(),
                AttributeValue.builder().n(String.valueOf(year2)).build())
            .build());

        BatchExecuteStatementRequest batchExecuteStatementRequest =
BatchExecuteStatementRequest.builder()
            .statements(statements)
            .build();

        try {
            BatchExecuteStatementResponse response =
ddb.batchExecuteStatement(batchExecuteStatementRequest);
            if (!response.responses().isEmpty()) {
                response.responses().forEach(r -> {
```

```
                    System.out.println(r.item().get("title") + "\\t" +
r.item().get("year"));
                });
                return true;
            } else {
                System.out.println("Couldn't find either " + title1 + " or " +
title2 + ".");
                return false;
            }
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            return false;
        }
    }

    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
            .attributeName("title")
            .keyType(KeyType.RANGE) // Sort
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);
```

```
        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //  DynamoDB automatically
scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse = dbWaiter
                .waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void putRecordBatch(DynamoDbClient ddb) {
        String sqlStatement = "INSERT INTO MoviesPartiQBatch VALUE {'year':?,
'title' : ?, 'info' : ?}";
        try {
            // Create three movies to add to the Amazon DynamoDB table.
            // Set data for Movie 1.
            List<AttributeValue> parameters = new ArrayList<>();

            AttributeValue att1 = AttributeValue.builder()
                .n("1977")
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s("Star Wars")
                .build();
```

```
            AttributeValue att3 = AttributeValue.builder()
                .s("No Information")
                .build();

            parameters.add(att1);
            parameters.add(att2);
            parameters.add(att3);

            BatchStatementRequest statementRequestMovie1 =
BatchStatementRequest.builder()
                .statement(sqlStatement)
                .parameters(parameters)
                .build();

            // Set data for Movie 2.
            List<AttributeValue> parametersMovie2 = new ArrayList<>();
            AttributeValue attMovie2 = AttributeValue.builder()
                .n("1939")
                .build();

            AttributeValue attMovie2A = AttributeValue.builder()
                .s("Wizard of Oz")
                .build();

            AttributeValue attMovie2B = AttributeValue.builder()
                .s("No Information")
                .build();

            parametersMovie2.add(attMovie2);
            parametersMovie2.add(attMovie2A);
            parametersMovie2.add(attMovie2B);

            BatchStatementRequest statementRequestMovie2 =
BatchStatementRequest.builder()
                .statement(sqlStatement)
                .parameters(parametersMovie2)
                .build();

            // Set data for Movie 3.
            List<AttributeValue> parametersMovie3 = new ArrayList<>();
            AttributeValue attMovie3 = AttributeValue.builder()
                .n(String.valueOf("2022"))
                .build();
```

```
            AttributeValue attMovie3A = AttributeValue.builder()
                .s("My Movie 3")
                .build();

            AttributeValue attMovie3B = AttributeValue.builder()
                .s("No Information")
                .build();

            parametersMovie3.add(attMovie3);
            parametersMovie3.add(attMovie3A);
            parametersMovie3.add(attMovie3B);

            BatchStatementRequest statementRequestMovie3 =
 BatchStatementRequest.builder()
                .statement(sqlStatement)
                .parameters(parametersMovie3)
                .build();

            // Add all three movies to the list.
            List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
            myBatchStatementList.add(statementRequestMovie1);
            myBatchStatementList.add(statementRequestMovie2);
            myBatchStatementList.add(statementRequestMovie3);

            BatchExecuteStatementRequest batchRequest =
 BatchExecuteStatementRequest.builder()
                .statements(myBatchStatementList)
                .build();

            BatchExecuteStatementResponse response =
 ddb.batchExecuteStatement(batchRequest);
            System.out.println("ExecuteStatement successful: " +
 response.toString());
            System.out.println("Added new movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void updateTableItemBatch(DynamoDbClient ddb) {
        String sqlStatement = "UPDATE MoviesPartiQBatch SET info = 'directors\":
[\"Merian C. Cooper\",\"Ernest B. Schoedsack' where year=? and title=?";
```

```
        List<AttributeValue> parametersRec1 = new ArrayList<>();

        // Update three records.
        AttributeValue att1 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("My Movie 1")
            .build();

        parametersRec1.add(att1);
        parametersRec1.add(att2);

        BatchStatementRequest statementRequestRec1 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec1)
            .build();

        // Update record 2.
        List<AttributeValue> parametersRec2 = new ArrayList<>();
        AttributeValue attRec2 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec2a = AttributeValue.builder()
            .s("My Movie 2")
            .build();

        parametersRec2.add(attRec2);
        parametersRec2.add(attRec2a);
        BatchStatementRequest statementRequestRec2 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec2)
            .build();

        // Update record 3.
        List<AttributeValue> parametersRec3 = new ArrayList<>();
        AttributeValue attRec3 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec3a = AttributeValue.builder()
            .s("My Movie 3")
```

```
            .build();

        parametersRec3.add(attRec3);
        parametersRec3.add(attRec3a);
        BatchStatementRequest statementRequestRec3 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec3)
            .build();

        // Add all three movies to the list.
        List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
        myBatchStatementList.add(statementRequestRec1);
        myBatchStatementList.add(statementRequestRec2);
        myBatchStatementList.add(statementRequestRec3);

        BatchExecuteStatementRequest batchRequest =
BatchExecuteStatementRequest.builder()
            .statements(myBatchStatementList)
            .build();

        try {
            BatchExecuteStatementResponse response =
ddb.batchExecuteStatement(batchRequest);
            System.out.println("ExecuteStatement successful: " +
response.toString());
            System.out.println("Updated three movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Item was updated!");
    }

    public static void deleteItemBatch(DynamoDbClient ddb) {
        String sqlStatement = "DELETE FROM MoviesPartiQBatch WHERE year = ? and
title=?";
        List<AttributeValue> parametersRec1 = new ArrayList<>();

        // Specify three records to delete.
        AttributeValue att1 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();
```

```
        AttributeValue att2 = AttributeValue.builder()
            .s("My Movie 1")
            .build();

        parametersRec1.add(att1);
        parametersRec1.add(att2);

        BatchStatementRequest statementRequestRec1 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec1)
            .build();

        // Specify record 2.
        List<AttributeValue> parametersRec2 = new ArrayList<>();
        AttributeValue attRec2 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec2a = AttributeValue.builder()
            .s("My Movie 2")
            .build();

        parametersRec2.add(attRec2);
        parametersRec2.add(attRec2a);
        BatchStatementRequest statementRequestRec2 = BatchStatementRequest.builder()
            .statement(sqlStatement)
            .parameters(parametersRec2)
            .build();

        // Specify record 3.
        List<AttributeValue> parametersRec3 = new ArrayList<>();
        AttributeValue attRec3 = AttributeValue.builder()
            .n(String.valueOf("2022"))
            .build();

        AttributeValue attRec3a = AttributeValue.builder()
            .s("My Movie 3")
            .build();

        parametersRec3.add(attRec3);
        parametersRec3.add(attRec3a);

        BatchStatementRequest statementRequestRec3 = BatchStatementRequest.builder()
            .statement(sqlStatement)
```

```
            .parameters(parametersRec3)
            .build();

        // Add all three movies to the list.
        List<BatchStatementRequest> myBatchStatementList = new ArrayList<>();
        myBatchStatementList.add(statementRequestRec1);
        myBatchStatementList.add(statementRequestRec2);
        myBatchStatementList.add(statementRequestRec3);

        BatchExecuteStatementRequest batchRequest =
BatchExecuteStatementRequest.builder()
            .statements(myBatchStatementList)
            .build();

        try {
            ddb.batchExecuteStatement(batchRequest);
            System.out.println("Deleted three movies using a batch command.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {
        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    private static ExecuteStatementResponse executeStatementRequest(DynamoDbClient
ddb, String statement,

List<AttributeValue> parameters) {
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
```

```
            .statement(statement)
            .parameters(parameters)
            .build();

        return ddb.executeStatement(request);
    }
}
```

- Untuk detail API, lihat BatchExecuteStatementdi Referensi AWS SDK for Java 2.x API.

Melakukan kueri tabel menggunakan PartiQL

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Dapatkan item dengan menjalankan pernyataan SELECT.
- Tambahkan item dengan menjalankan pernyataan INSERT.
- Perbarui item dengan menjalankan pernyataan UPDATE.
- Hapus item dengan menjalankan pernyataan DELETE.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class ScenarioPartiQ {
    public static void main(String[] args) throws IOException {
        String fileName = "../../../resources/sample_files/movies.json";
        String tableName = "MoviesPartiQ";
        Region region = Region.US_EAST_1;
        DynamoDbClient ddb = DynamoDbClient.builder()
            .region(region)
            .build();

        System.out.println(
            "******* Creating an Amazon DynamoDB table named MoviesPartiQ with a key
 named year and a sort key named title.");
```

```
        createTable(ddb, tableName);

        System.out.println("Loading data into the MoviesPartiQ table.");
        loadData(ddb, fileName);

        System.out.println("Getting data from the MoviesPartiQ table.");
        getItem(ddb);

        System.out.println("Putting a record into the MoviesPartiQ table.");
        putRecord(ddb);

        System.out.println("Updating a record.");
        updateTableItem(ddb);

        System.out.println("Querying the movies released in 2013.");
        queryTable(ddb);

        System.out.println("Deleting the Amazon DynamoDB table.");
        deleteDynamoDBTable(ddb, tableName);
        ddb.close();
    }

    public static void createTable(DynamoDbClient ddb, String tableName) {
        DynamoDbWaiter dbWaiter = ddb.waiter();
        ArrayList<AttributeDefinition> attributeDefinitions = new ArrayList<>();

        // Define attributes.
        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("year")
            .attributeType("N")
            .build());

        attributeDefinitions.add(AttributeDefinition.builder()
            .attributeName("title")
            .attributeType("S")
            .build());

        ArrayList<KeySchemaElement> tableKey = new ArrayList<>();
        KeySchemaElement key = KeySchemaElement.builder()
            .attributeName("year")
            .keyType(KeyType.HASH)
            .build();

        KeySchemaElement key2 = KeySchemaElement.builder()
```

```
            .attributeName("title")
            .keyType(KeyType.RANGE) // Sort
            .build();

        // Add KeySchemaElement objects to the list.
        tableKey.add(key);
        tableKey.add(key2);

        CreateTableRequest request = CreateTableRequest.builder()
            .keySchema(tableKey)
            .billingMode(BillingMode.PAY_PER_REQUEST) //Scales based on traffic.
            .attributeDefinitions(attributeDefinitions)
            .tableName(tableName)
            .build();

        try {
            CreateTableResponse response = ddb.createTable(request);
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                .tableName(tableName)
                .build();

            // Wait until the Amazon DynamoDB table is created.
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            String newTable = response.tableDescription().tableName();
            System.out.println("The " + newTable + " was successfully created.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Load data into the table.
    public static void loadData(DynamoDbClient ddb, String fileName) throws
IOException {

        String sqlStatement = "INSERT INTO MoviesPartiQ VALUE {'year':?,
'title' : ?, 'info' : ?}";
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
```

```
        ObjectNode currentNode;
        int t = 0;
        List<AttributeValue> parameters = new ArrayList<>();
        while (iter.hasNext()) {

            // Add 200 movies to the table.
            if (t == 200)
                break;
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String info = currentNode.path("info").toString();

            AttributeValue att1 = AttributeValue.builder()
                .n(String.valueOf(year))
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s(title)
                .build();

            AttributeValue att3 = AttributeValue.builder()
                .s(info)
                .build();

            parameters.add(att1);
            parameters.add(att2);
            parameters.add(att3);

            // Insert the movie into the Amazon DynamoDB table.
            executeStatementRequest(ddb, sqlStatement, parameters);
            System.out.println("Added Movie " + title);

            parameters.remove(att1);
            parameters.remove(att2);
            parameters.remove(att3);
            t++;
        }
    }

    public static void getItem(DynamoDbClient ddb) {

        String sqlStatement = "SELECT * FROM MoviesPartiQ where year=? and title=?";
```

```
        List<AttributeValue> parameters = new ArrayList<>();
        AttributeValue att1 = AttributeValue.builder()
            .n("2012")
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("The Perks of Being a Wallflower")
            .build();

        parameters.add(att1);
        parameters.add(att2);

        try {
            ExecuteStatementResponse response = executeStatementRequest(ddb,
sqlStatement, parameters);
            System.out.println("ExecuteStatement successful: " +
response.toString());

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void putRecord(DynamoDbClient ddb) {

        String sqlStatement = "INSERT INTO MoviesPartiQ VALUE {'year':?,
'title' : ?, 'info' : ?}";
        try {
            List<AttributeValue> parameters = new ArrayList<>();

            AttributeValue att1 = AttributeValue.builder()
                .n(String.valueOf("2020"))
                .build();

            AttributeValue att2 = AttributeValue.builder()
                .s("My Movie")
                .build();

            AttributeValue att3 = AttributeValue.builder()
                .s("No Information")
                .build();

            parameters.add(att1);
```

```
            parameters.add(att2);
            parameters.add(att3);

            executeStatementRequest(ddb, sqlStatement, parameters);
            System.out.println("Added new movie.");

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void updateTableItem(DynamoDbClient ddb) {

        String sqlStatement = "UPDATE MoviesPartiQ SET info = 'directors\":[\"Merian
C. Cooper\",\"Ernest B. Schoedsack' where year=? and title=?";
        List<AttributeValue> parameters = new ArrayList<>();
        AttributeValue att1 = AttributeValue.builder()
            .n(String.valueOf("2013"))
            .build();

        AttributeValue att2 = AttributeValue.builder()
            .s("The East")
            .build();

        parameters.add(att1);
        parameters.add(att2);

        try {
            executeStatementRequest(ddb, sqlStatement, parameters);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println("Item was updated!");
    }

    // Query the table where the year is 2013.
    public static void queryTable(DynamoDbClient ddb) {
        String sqlStatement = "SELECT * FROM MoviesPartiQ where year = ? ORDER BY
year";
        try {
```

```
            List<AttributeValue> parameters = new ArrayList<>();
            AttributeValue att1 = AttributeValue.builder()
                .n(String.valueOf("2013"))
                .build();
            parameters.add(att1);

            // Get items in the table and write out the ID value.
            ExecuteStatementResponse response = executeStatementRequest(ddb,
sqlStatement, parameters);
            System.out.println("ExecuteStatement successful: " +
response.toString());

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteDynamoDBTable(DynamoDbClient ddb, String tableName) {

        DeleteTableRequest request = DeleteTableRequest.builder()
            .tableName(tableName)
            .build();

        try {
            ddb.deleteTable(request);

        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        System.out.println(tableName + " was successfully deleted!");
    }

    private static ExecuteStatementResponse executeStatementRequest(DynamoDbClient
ddb, String statement,

List<AttributeValue> parameters) {
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
            .statement(statement)
            .parameters(parameters)
            .build();

        return ddb.executeStatement(request);
```

```
    }

    private static void processResults(ExecuteStatementResponse
 executeStatementResult) {
        System.out.println("ExecuteStatement successful: " +
 executeStatementResult.toString());
    }
}
```

- Untuk detail API, lihat ExecuteStatementdi Referensi AWS SDK for Java 2.x API.

### Kueri tabel menggunakan Global Secondary Index

Contoh kode berikut menunjukkan bagaimana untuk query tabel menggunakan Global Secondary Index.

- Kueri tabel DynamoDB menggunakan kunci utamanya.
- Kueri Indeks Sekunder Global (GSI) untuk pola akses alternatif.
- Bandingkan kueri tabel dan kueri GSI.

#### SDK untuk Java 2.x

Kueri tabel DynamoDB menggunakan kunci utamanya dan Indeks Sekunder Global (GSI) dengan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryTable(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue) {
```

```
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on base table successful. Found " +
response.count() + " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw new DynamoDbQueryException("Table not found: " + tableName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying base table: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on base
table", e);
        }
    }

    /**
     * Queries a DynamoDB Global Secondary Index (GSI) by partition key.
     *
     * @param tableName         The name of the DynamoDB table
     * @param indexName         The name of the GSI
```

```
     * @param partitionKeyName  The name of the GSI partition key attribute
     * @param partitionKeyValue The value of the GSI partition key to query
     * @return The query response from DynamoDB
     * @throws ResourceNotFoundException if the table or index doesn't exist
     * @throws DynamoDbException if the query fails
     */
    public QueryResponse queryGlobalSecondaryIndex(
        final String tableName, final String indexName, final String
partitionKeyName, final String partitionKeyValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Index name", indexName);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_IK,
partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_IK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .indexName(indexName)
            .keyConditionExpression(GSI_KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query on GSI successful. Found " + response.count()
+ " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(
                "Error: The Amazon DynamoDB table \"%s\" or index \"%s\" can't be
found.\n", tableName, indexName);
```

```
            throw new DynamoDbQueryException("Table or index not found: " +
tableName + "/" + indexName, e);
        } catch (DynamoDbException e) {
            System.err.println("Error querying GSI: " + e.getMessage());
            throw new DynamoDbQueryException("Failed to execute query on GSI", e);
        }
    }
```

Bandingkan kueri tabel secara langsung versus menanyakan GSI dengan. AWS SDK for Java 2.x

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <basePartitionKeyName> <basePartitionKeyValue>
<gsiName> <gsiPartitionKeyName> <gsiPartitionKeyValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    basePartitionKeyName - The name of the base table partition key
attribute.
                    basePartitionKeyValue - The value of the base table partition
key to query.
                    gsiName - The name of the Global Secondary Index.
                    gsiPartitionKeyName - The name of the GSI partition key
attribute.
                    gsiPartitionKeyValue - The value of the GSI partition key to
query.
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 6) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String basePartitionKeyName = args[1];
        final String basePartitionKeyValue = args[2];
        final String gsiName = args[3];
        final String gsiPartitionKeyName = args[4];
        final String gsiPartitionKeyValue = args[5];
```

```
        final Region region = args.length > 6 ? Region.of(args[6]) :
Region.US_EAST_1;

        try (DynamoDbClient ddb = DynamoDbClient.builder().region(region).build()) {
            final QueryTableAndGSI queryHelper = new QueryTableAndGSI(ddb);

            // Query the base table
            System.out.println("Querying base table where " + basePartitionKeyName +
" = " + basePartitionKeyValue);
            final QueryResponse tableResponse =
                queryHelper.queryTable(tableName, basePartitionKeyName,
basePartitionKeyValue);

            System.out.println("Found " + tableResponse.count() + " items in base
table:");
            tableResponse.items().forEach(item -> System.out.println(item));

            // Query the GSI
            System.out.println(
                "\nQuerying GSI '" + gsiName + "' where " + gsiPartitionKeyName + "
= " + gsiPartitionKeyValue);
            final QueryResponse gsiResponse =
                queryHelper.queryGlobalSecondaryIndex(tableName, gsiName,
gsiPartitionKeyName, gsiPartitionKeyValue);

            System.out.println("Found " + gsiResponse.count() + " items in GSI:");
            gsiResponse.items().forEach(item -> System.out.println(item));

            // Explain the differences between querying a table and a GSI
            System.out.println("\nKey differences between querying a table and a
GSI:");
            System.out.println("1. When querying a GSI, you must specify the
indexName parameter");
            System.out.println("2. GSIs may not contain all attributes from the base
table (projection)");
            System.out.println("3. GSIs consume read capacity units from the GSI's
capacity, not the base table's");
            System.out.println("4. GSIs may have eventually consistent data (cannot
use ConsistentRead=true)");

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
```

```
            System.err.println("Table or index not found: " + e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Kueri tabel menggunakan kondisi begins_with

Contoh kode berikut menunjukkan bagaimana untuk query tabel menggunakan kondisi begins_with.

- Gunakan fungsi begins_with dalam ekspresi kondisi kunci.
- Filter item berdasarkan pola awalan di tombol sortir.

SDK untuk Java 2.x

Kueri tabel DynamoDB menggunakan kondisi begins_with pada kunci pengurutan dengan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithBeginsWithCondition(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
```

```
        final String sortKeyName,
        final String sortKeyPrefix) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Sort key name", sortKeyName);
        CodeSampleUtils.validateStringParameter("Sort key prefix", sortKeyPrefix);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, sortKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_SK_PREFIX,
            AttributeValue.builder().s(sortKeyPrefix).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with begins_with condition successful.
Found {0} items", response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with begins_with condition",
e);
            throw e;
```

```
        }
    }
```

Peragakan menggunakan begins_with dengan panjang awalan yang berbeda dengan. AWS SDK for Java 2.x

```
    public static void main(String[] args) {
        try {
            CodeSampleUtils.BeginsWithQueryConfig config =
CodeSampleUtils.BeginsWithQueryConfig.fromArgs(args);
            LOGGER.log(Level.INFO, "Querying items where {0} = {1} and {2} begins
with ''{3}''", new Object[] {
                config.getPartitionKeyName(),
                config.getPartitionKeyValue(),
                config.getSortKeyName(),
                config.getSortKeyPrefix()
            });

            // Using the builder pattern to create and execute the query
            final QueryResponse response = new BeginsWithQueryBuilder()
                .withTableName(config.getTableName())
                .withPartitionKeyName(config.getPartitionKeyName())
                .withPartitionKeyValue(config.getPartitionKeyValue())
                .withSortKeyName(config.getSortKeyName())
                .withSortKeyPrefix(config.getSortKeyPrefix())
                .withRegion(config.getRegion())
                .execute();

            // Process the results
            LOGGER.log(Level.INFO, "Found {0} items:", response.count());
            response.items().forEach(item -> LOGGER.info(item.toString()));

            // Demonstrate with a different prefix
            if (!config.getSortKeyPrefix().isEmpty()) {
                String shorterPrefix = config.getSortKeyPrefix()
                    .substring(0, Math.max(1, config.getSortKeyPrefix().length() /
2));
                LOGGER.log(Level.INFO, "\nNow querying with a shorter prefix:
''{0}''", shorterPrefix);

                final QueryResponse response2 = new BeginsWithQueryBuilder()
                    .withTableName(config.getTableName())
```

```
                    .withPartitionKeyName(config.getPartitionKeyName())
                    .withPartitionKeyValue(config.getPartitionKeyValue())
                    .withSortKeyName(config.getSortKeyName())
                    .withSortKeyPrefix(shorterPrefix)
                    .withRegion(config.getRegion())
                    .execute();

                LOGGER.log(Level.INFO, "Found {0} items with shorter prefix:",
response2.count());
                response2.items().forEach(item -> LOGGER.info(item.toString()));
            }
        } catch (IllegalArgumentException e) {
            LOGGER.log(Level.SEVERE, "Invalid input: {0}", e.getMessage());
            printUsage();
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found", e);
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "DynamoDB error", e);
        } catch (Exception e) {
            LOGGER.log(Level.SEVERE, "Unexpected error", e);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Kueri tabel menggunakan rentang tanggal

Contoh kode berikut menunjukkan bagaimana untuk query tabel menggunakan rentang tanggal dalam kunci sort.

- Item kueri dalam rentang tanggal tertentu.
- Gunakan operator perbandingan pada kunci pengurutan berformat tanggal.

#### SDK untuk Java 2.x

Kueri tabel DynamoDB untuk item dalam rentang tanggal dengan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
```

```
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.LocalDate;
import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithDateRange(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final LocalDate startDate,
        final LocalDate endDate) {

        // Focus on query logic, assuming parameters are valid
        if (startDate == null || endDate == null) {
            throw new IllegalArgumentException("Start date and end date cannot be
 null");
        }

        if (endDate.isBefore(startDate)) {
            throw new IllegalArgumentException("End date must be after start date");
        }

        // Format dates as ISO strings for DynamoDB (using just the date part)
        final String formattedStartDate = startDate.toString();
        final String formattedEndDate = endDate.toString();

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
```

```
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_START_DATE,
            AttributeValue.builder().s(formattedStartDate).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_END_DATE,
            AttributeValue.builder().s(formattedEndDate).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query by date range successful. Found {0}
items", response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying by date range: {0}",
e.getMessage());
            throw e;
        }
    }
```

Menunjukkan bagaimana untuk query tabel DynamoDB dengan rentang tanggal penyaringan.

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue> <dateKeyName>
<startDate> <endDate> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
```

```
                    dateKeyName - The name of the date attribute to filter on.
                    startDate - The start date for the range query (YYYY-MM-DD).
                    endDate - The end date for the range query (YYYY-MM-DD).
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 6) {
            System.out.println(usage);
            System.exit(1);
        }

        try {
            // Parse command line arguments into a config object
            CodeSampleUtils.DateRangeQueryConfig config =
CodeSampleUtils.DateRangeQueryConfig.fromArgs(args);

            LOGGER.log(
                Level.INFO, "Querying items from {0} to {1}", new Object[]
{config.getStartDate(), config.getEndDate()
                });

            // Using the builder pattern to create and execute the query
            final QueryResponse response = new DateRangeQueryBuilder()
                .withTableName(config.getTableName())
                .withPartitionKeyName(config.getPartitionKeyName())
                .withPartitionKeyValue(config.getPartitionKeyValue())
                .withDateKeyName(config.getDateKeyName())
                .withStartDate(config.getStartDate())
                .withEndDate(config.getEndDate())
                .withRegion(config.getRegion())
                .execute();

            // Process the results
            LOGGER.log(Level.INFO, "Found {0} items:", response.count());
            response.items().forEach(item -> {
                LOGGER.info(item.toString());

                // Extract and display the date attribute for clarity
                if (item.containsKey(config.getDateKeyName())) {
                    LOGGER.log(
                        Level.INFO,
                        "  Date attribute: {0}",
                        item.get(config.getDateKeyName()).s());
```

```
                }
            });

            // Demonstrate with a different date range
            LocalDate narrowerStartDate = config.getStartDate().plusDays(1);
            LocalDate narrowerEndDate = config.getEndDate().minusDays(1);

            if (!narrowerStartDate.isAfter(narrowerEndDate)) {
                LOGGER.log(Level.INFO, "\nNow querying with a narrower date range:
{0} to {1}", new Object[] {
                    narrowerStartDate, narrowerEndDate
                });

                final QueryResponse response2 = new DateRangeQueryBuilder()
                    .withTableName(config.getTableName())
                    .withPartitionKeyName(config.getPartitionKeyName())
                    .withPartitionKeyValue(config.getPartitionKeyValue())
                    .withDateKeyName(config.getDateKeyName())
                    .withStartDate(narrowerStartDate)
                    .withEndDate(narrowerEndDate)
                    .withRegion(config.getRegion())
                    .execute();

                LOGGER.log(Level.INFO, "Found {0} items with narrower date range:",
response2.count());
                response2.items().forEach(item -> LOGGER.info(item.toString()));
            }

            LOGGER.info("\nNote: When storing dates in DynamoDB:");
            LOGGER.info("1. Use ISO format (YYYY-MM-DD) for lexicographical
ordering");
            LOGGER.info("2. Use the BETWEEN operator for inclusive date range
queries");
            LOGGER.info("3. Consider using ISO-8601 format for timestamps with time
components");

        } catch (IllegalArgumentException e) {
            LOGGER.log(Level.SEVERE, "Invalid input: {0}", e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", e.getMessage());
            System.exit(1);
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "DynamoDB error: {0}", e.getMessage());
```

```
            System.exit(1);
        } catch (Exception e) {
            LOGGER.log(Level.SEVERE, "Unexpected error: {0}", e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Kueri tabel dengan ekspresi filter yang kompleks

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan ekspresi filter kompleks.

- Terapkan ekspresi filter kompleks ke hasil kueri.
- Gabungkan beberapa kondisi menggunakan operator logis.
- Filter item berdasarkan atribut non-kunci.

SDK untuk Java 2.x

Kueri tabel DynamoDB dengan ekspresi filter kompleks menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithComplexFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String statusAttrName,
        final String activeStatus,
```

```
        final String pendingStatus,
        final String priceAttrName,
        final double minPrice,
        final double maxPrice,
        final String categoryAttrName) {

        // Validate parameters
        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Status attribute name",
statusAttrName);
        CodeSampleUtils.validateStringParameter("Active status", activeStatus);
        CodeSampleUtils.validateStringParameter("Pending status", pendingStatus);
        CodeSampleUtils.validateStringParameter("Price attribute name",
priceAttrName);
        CodeSampleUtils.validateStringParameter("Category attribute name",
categoryAttrName);
        CodeSampleUtils.validateNumericRange("Minimum price", minPrice, 0.0,
Double.MAX_VALUE);
        CodeSampleUtils.validateNumericRange("Maximum price", maxPrice, minPrice,
Double.MAX_VALUE);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pk", partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_STATUS,
statusAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PRICE,
priceAttrName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_CATEGORY,
categoryAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            ":pkValue", AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_ACTIVE,
            AttributeValue.builder().s(activeStatus).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PENDING,
            AttributeValue.builder().s(pendingStatus).build());
        expressionAttributeValues.put(
```

```
            EXPRESSION_ATTRIBUTE_VALUE_MIN_PRICE,
            AttributeValue.builder().n(String.valueOf(minPrice)).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_MAX_PRICE,
            AttributeValue.builder().n(String.valueOf(maxPrice)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        return dynamoDbClient.query(queryRequest);
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Kueri tabel dengan ekspresi filter dinamis

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan ekspresi filter dinamis.

- Buat ekspresi filter secara dinamis saat runtime.
- Membangun kondisi filter berdasarkan input pengguna atau status aplikasi.
- Tambahkan atau hapus kriteria filter secara kondisional.

SDK untuk Java 2.x

Kueri tabel DynamoDB dengan ekspresi filter yang dibangun secara dinamis menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
```

```
import java.util.HashMap;
import java.util.Map;

    public static QueryResponse queryWithDynamicFilter(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final Map<String, Object> filterCriteria,
        final Region region,
        final DynamoDbClient dynamoDbClient) {

        validateParameters(tableName, partitionKeyName, partitionKeyValue,
 filterCriteria);

        DynamoDbClient ddbClient = dynamoDbClient;
        boolean shouldClose = false;

        try {
            if (ddbClient == null) {
                ddbClient = createClient(region);
                shouldClose = true;
            }

            final QueryWithDynamicFilter queryHelper = new
 QueryWithDynamicFilter(ddbClient);
            return queryHelper.queryWithDynamicFilter(tableName, partitionKeyName,
 partitionKeyValue, filterCriteria);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Failed to execute dynamic filter query: " +
 e.getMessage());
            throw e;
        } catch (Exception e) {
            System.err.println("Unexpected error during query: " + e.getMessage());
            throw e;
        } finally {
            if (shouldClose && ddbClient != null) {
                ddbClient.close();
            }
        }
    }
```

Menunjukkan cara menggunakan ekspresi filter dinamis dengan AWS SDK for Java 2.x.

```
   public static void main(String[] args) {
       final String usage =
           """
               Usage:
                   <tableName> <partitionKeyName> <partitionKeyValue>
<filterAttrName> <filterAttrValue> [region]
               Where:
                   tableName - The Amazon DynamoDB table to query.
                   partitionKeyName - The name of the partition key attribute.
                   partitionKeyValue - The value of the partition key to query.
                   filterAttrName - The name of the attribute to filter on.
                   filterAttrValue - The value to filter by.
                   region (optional) - The AWS region where the table exists.
(Default: us-east-1)
               """;

       if (args.length < 5) {
           System.out.println(usage);
           System.exit(1);
       }

       final String tableName = args[0];
       final String partitionKeyName = args[1];
       final String partitionKeyValue = args[2];
       final String filterAttrName = args[3];
       final String filterAttrValue = args[4];
       final Region region = args.length > 5 ? Region.of(args[5]) :
Region.US_EAST_1;

       System.out.println("Querying items with dynamic filter: " + filterAttrName +
" = " + filterAttrValue);

       try {
           // Using the builder pattern to create and execute the query
           final QueryResponse response = new DynamicFilterQueryBuilder()
               .withTableName(tableName)
               .withPartitionKeyName(partitionKeyName)
               .withPartitionKeyValue(partitionKeyValue)
               .withFilterCriterion(filterAttrName, filterAttrValue)
```

```
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> System.out.println(item));

            // Demonstrate multiple filter criteria
            System.out.println("\nNow querying with multiple filter criteria:");

            Map<String, Object> multipleFilters = new HashMap<>();
            multipleFilters.put(filterAttrName, filterAttrValue);
            multipleFilters.put("status", "active");

            final QueryResponse multiFilterResponse = new
DynamicFilterQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withFilterCriteria(multipleFilters)
                .withRegion(region)
                .execute();

            System.out.println("Found " + multiFilterResponse.count() + " items with
multiple filters:");
            multiFilterResponse.items().forEach(item -> System.out.println(item));

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Kueri tabel dengan ekspresi filter dan batas

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan ekspresi filter dan batas.

- Terapkan ekspresi filter ke hasil kueri dengan batas item yang dievaluasi.
- Pahami bagaimana batas memengaruhi hasil kueri yang difilter.
- Kontrol jumlah maksimum item yang diproses dalam kueri.

SDK untuk Java 2.x

Kueri tabel DynamoDB dengan ekspresi filter dan batas penggunaan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithFilterAndLimit(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String filterAttrName,
        final String filterAttrValue,
        final int limit) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Filter attribute name",
 filterAttrName);
        CodeSampleUtils.validateStringParameter("Filter attribute value",
 filterAttrValue);
        CodeSampleUtils.validatePositiveInteger("Limit", limit);

        // Create expression attribute names for the column names
```

```
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_FILTER,
filterAttrName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_FILTER,
            AttributeValue.builder().s(filterAttrValue).build());

        // Create the filter expression
        final String filterExpression = "#filterAttr = :filterValue";

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(limit)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query with filter and limit successful. Found
{0} items", response.count());
            LOGGER.log(
                Level.INFO, "ScannedCount: {0} (total items evaluated before
filtering)", response.scannedCount());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with filter and limit: {0}",
e.getMessage());
            throw e;
```

```
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Kueri tabel dengan atribut bersarang

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan atribut bersarang.

- Akses dan filter berdasarkan atribut bersarang di item DynamoDB.
- Gunakan ekspresi jalur dokumen untuk referensi elemen bersarang.

#### SDK untuk Java 2.x

Kueri tabel DynamoDB dengan atribut bersarang menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithNestedAttributes(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String nestedPath,
        final String nestedAttr,
        final String nestedValue) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Nested path", nestedPath);
        CodeSampleUtils.validateStringParameter("Nested attribute", nestedAttr);
        CodeSampleUtils.validateStringParameter("Nested value", nestedValue);
```

```
        // Split the nested path into components
        final String[] pathComponents = nestedPath.split("\\.");

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);

        // Build the nested attribute reference using document path notation
        final StringBuilder nestedAttributeRef = new StringBuilder();
        for (int i = 0; i < pathComponents.length; i++) {
            final String aliasName = "#n" + i;
            expressionAttributeNames.put(aliasName, pathComponents[i]);

            if (i > 0) {
                nestedAttributeRef.append(".");
            }
            nestedAttributeRef.append(aliasName);
        }

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_NESTED,
            AttributeValue.builder().s(nestedValue).build());

        // Create the filter expression using the nested attribute reference
        final String filterExpression = nestedAttributeRef + " = :nestedValue";

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(filterExpression)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
```

```
            System.out.println("Query with nested attribute filter successful. Found
" + response.count() + " items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with nested attribute filter: " +
e.getMessage());
            throw e;
        }
    }
```

Menunjukkan bagaimana untuk query tabel DynamoDB dengan atribut bersarang.

```
    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <tableName> <partitionKeyName> <partitionKeyValue> <nestedPath>
<nestedAttr> <nestedValue> [region]
                Where:
                    tableName - The Amazon DynamoDB table to query.
                    partitionKeyName - The name of the partition key attribute.
                    partitionKeyValue - The value of the partition key to query.
                    nestedPath - The path to the nested map attribute (e.g.,
"address").
                    nestedAttr - The name of the nested attribute (e.g., "city").
                    nestedValue - The value to filter by (e.g., "Seattle").
                    region (optional) - The AWS region where the table exists.
(Default: us-east-1)
                """;

        if (args.length < 6) {
            System.out.println(usage);
            System.exit(1);
        }

        final String tableName = args[0];
        final String partitionKeyName = args[1];
        final String partitionKeyValue = args[2];
```

```
        final String nestedPath = args[3];
        final String nestedAttr = args[4];
        final String nestedValue = args[5];
        final Region region = args.length > 6 ? Region.of(args[6]) :
Region.US_EAST_1;

        System.out.println("Querying items where " + partitionKeyName + " = " +
partitionKeyValue + " and " + nestedPath
            + "." + nestedAttr + " = " + nestedValue);

        try {
            // Using the builder pattern to create and execute the query
            final QueryResponse response = new NestedAttributeQueryBuilder()
                .withTableName(tableName)
                .withPartitionKeyName(partitionKeyName)
                .withPartitionKeyValue(partitionKeyValue)
                .withNestedPath(nestedPath)
                .withNestedAttribute(nestedAttr)
                .withNestedValue(nestedValue)
                .withRegion(region)
                .execute();

            // Process the results
            System.out.println("Found " + response.count() + " items:");
            response.items().forEach(item -> {
                System.out.println(item);

                // Extract and display the nested attribute for clarity
                if (item.containsKey(nestedPath) && item.get(nestedPath).hasM()) {
                    Map<String, AttributeValue> nestedMap =
item.get(nestedPath).m();
                    if (nestedMap.containsKey(nestedAttr)) {
                        System.out.println("  Nested attribute " + nestedPath + "."
+ nestedAttr + ": "
                                + formatAttributeValue(nestedMap.get(nestedAttr)));
                    }
                }
            });

            System.out.println("\nNote: When working with nested attributes in
DynamoDB:");
            System.out.println("1. Use dot notation in filter expressions to access
nested attributes");
```

```
            System.out.println("2. Use expression attribute names for each component
of the path");
            System.out.println("3. Check if the nested attribute exists before
accessing it");

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Kueri tabel dengan pagination

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan pagination.

- Menerapkan pagination untuk hasil query DynamoDB.
- Gunakan LastEvaluatedKey untuk mengambil halaman berikutnya.
- Kontrol jumlah item per halaman dengan parameter Limit.

#### SDK untuk Java 2.x

Kueri tabel DynamoDB dengan pagination menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
```

```
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    public List<Map<String, AttributeValue>> queryWithPagination(
        final String tableName, final String partitionKeyName, final String
 partitionKeyValue, final int pageSize) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validatePositiveInteger("Page size", pageSize);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
        QueryRequest.Builder queryRequestBuilder = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .limit(pageSize);

        // List to store all items from all pages
        final List<Map<String, AttributeValue>> allItems = new ArrayList<>();

        // Map to store the last evaluated key for pagination
        Map<String, AttributeValue> lastEvaluatedKey = null;
        int pageNumber = 1;

        try {
            do {
```

```
                // If we have a last evaluated key, use it for the next page
                if (lastEvaluatedKey != null) {
                    queryRequestBuilder.exclusiveStartKey(lastEvaluatedKey);
                }

                // Execute the query
                final QueryResponse response =
dynamoDbClient.query(queryRequestBuilder.build());

                // Process the current page of results
                final List<Map<String, AttributeValue>> pageItems =
response.items();
                allItems.addAll(pageItems);

                // Get the last evaluated key for the next page
                lastEvaluatedKey = response.lastEvaluatedKey();
                if (lastEvaluatedKey != null && lastEvaluatedKey.isEmpty()) {
                    lastEvaluatedKey = null;
                }

                System.out.println("Page " + pageNumber + ": Retrieved " +
pageItems.size() + " items (Running total: "
                    + allItems.size() + ")");

                pageNumber++;

            } while (lastEvaluatedKey != null);

            System.out.println("Query with pagination complete. Retrieved a total of
" + allItems.size()
                + " items across " + (pageNumber - 1) + " pages");

            return allItems;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with pagination: " + e.getMessage());
            throw e;
        }
    }
```

Menunjukkan bagaimana untuk query tabel DynamoDB dengan pagination.

```
   public static void main(String[] args) {
       final String usage =
           """
               Usage:
                   <tableName> <partitionKeyName> <partitionKeyValue> [pageSize]
[region]
               Where:
                   tableName - The Amazon DynamoDB table to query.
                   partitionKeyName - The name of the partition key attribute.
                   partitionKeyValue - The value of the partition key to query.
                   pageSize (optional) - The maximum number of items to return per
page. (Default: 10)
                   region (optional) - The AWS region where the table exists.
(Default: us-east-1)
               """;

       if (args.length < 3) {
           System.out.println(usage);
           System.exit(1);
       }

       final String tableName = args[0];
       final String partitionKeyName = args[1];
       final String partitionKeyValue = args[2];
       final int pageSize = args.length > 3 ? Integer.parseInt(args[3]) : 10;
       final Region region = args.length > 4 ? Region.of(args[4]) :
Region.US_EAST_1;

       System.out.println("Querying items with pagination (page size: " + pageSize
+ ")");

       try {
           // Using the builder pattern to create and execute the query
           final List<Map<String, AttributeValue>> allItems = new
PaginationQueryBuilder()
               .withTableName(tableName)
               .withPartitionKeyName(partitionKeyName)
               .withPartitionKeyValue(partitionKeyValue)
               .withPageSize(pageSize)
               .withRegion(region)
               .executeWithPagination();
```

```
            // Process the results
            System.out.println("\nSummary: Retrieved a total of " + allItems.size()
+ " items");

            // Display the first few items as a sample
            final int sampleSize = Math.min(5, allItems.size());
            if (sampleSize > 0) {
                System.out.println("\nSample of retrieved items (first " +
sampleSize + "):");
                for (int i = 0; i < sampleSize; i++) {
                    System.out.println(allItems.get(i));
                }

                if (allItems.size() > sampleSize) {
                    System.out.println("... and " + (allItems.size() - sampleSize) +
" more items");
                }
            }
        } catch (IllegalArgumentException e) {
            System.err.println("Invalid input: " + e.getMessage());
            System.exit(1);
        } catch (ResourceNotFoundException e) {
            System.err.println("Table not found: " + tableName);
            System.exit(1);
        } catch (DynamoDbException e) {
            System.err.println("DynamoDB error: " + e.getMessage());
            System.exit(1);
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Kueri tabel dengan pembacaan yang sangat konsisten

Contoh kode berikut menunjukkan bagaimana untuk query tabel dengan pembacaan yang sangat konsisten.

- Konfigurasikan tingkat konsistensi untuk query DynamoDB.

- Gunakan pembacaan yang sangat konsisten untuk mendapatkan up-to-date data terbanyak.
- Memahami pengorbanan antara konsistensi akhirnya dan konsistensi yang kuat.

SDK untuk Java 2.x

Kueri tabel DynamoDB dengan konsistensi baca yang dapat dikonfigurasi menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithConsistentReads(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final boolean useConsistentRead) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());

        // Create the query request
```

```
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .consistentRead(useConsistentRead)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query successful. Found {0} items",
response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying with consistent reads", e);
            throw e;
        }
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Kueri untuk item TTL

Contoh kode berikut menunjukkan cara query untuk item TTL.

SDK untuk Java 2.x

Query Filtered Expression untuk mengumpulkan item TTL dalam tabel DynamoDB menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.util.Map;
```

```
import java.util.Optional;

        final QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .filterExpression(FILTER_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try (DynamoDbClient ddb = dynamoDbClient != null
            ? dynamoDbClient
            : DynamoDbClient.builder().region(region).build()) {
            final QueryResponse response = ddb.query(request);
            System.out.println("Query successful. Found " + response.count() + "
 items that have not expired yet.");

            // Print each item
            response.items().forEach(item -> {
                System.out.println("Item: " + item);
            });

            return 0;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

Tabel kueri menggunakan pola tanggal dan waktu

Contoh kode berikut menunjukkan bagaimana untuk query tabel menggunakan tanggal dan waktu pola.

- Simpan dan kueri date/time nilai di DynamoDB.
- Menerapkan kueri rentang tanggal menggunakan kunci pengurutan.
- Format string tanggal untuk kueri yang efektif.

SDK untuk Java 2.x

Kueri menggunakan rentang tanggal dalam kunci pengurutan dengan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.LocalDate;
import java.util.HashMap;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;

    public QueryResponse queryWithDateRange(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final LocalDate startDate,
        final LocalDate endDate) {

        // Focus on query logic, assuming parameters are valid
        if (startDate == null || endDate == null) {
            throw new IllegalArgumentException("Start date and end date cannot be
 null");
        }

        if (endDate.isBefore(startDate)) {
            throw new IllegalArgumentException("End date must be after start date");
        }

        // Format dates as ISO strings for DynamoDB (using just the date part)
        final String formattedStartDate = startDate.toString();
        final String formattedEndDate = endDate.toString();

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
```

```
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_SK, dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_START_DATE,
            AttributeValue.builder().s(formattedStartDate).build());
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_END_DATE,
            AttributeValue.builder().s(formattedEndDate).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            LOGGER.log(Level.INFO, "Query by date range successful. Found {0}
 items", response.count());
            return response;
        } catch (ResourceNotFoundException e) {
            LOGGER.log(Level.SEVERE, "Table not found: {0}", tableName);
            throw e;
        } catch (DynamoDbException e) {
            LOGGER.log(Level.SEVERE, "Error querying by date range: {0}",
 e.getMessage());
            throw e;
        }
    }
```

Kueri menggunakan variabel tanggal-waktu dengan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
```

```
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithDateTime(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final String startDate,
        final String endDate) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateDateRangeParameters(dateKeyName, startDate,
 endDate);
        CodeSampleUtils.validateDateFormat("Start date", startDate);
        CodeSampleUtils.validateDateFormat("End date", endDate);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
 partitionKeyName);
        expressionAttributeNames.put("#dateKey", dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            ":startDate", AttributeValue.builder().s(startDate).build());
        expressionAttributeValues.put(
            ":endDate", AttributeValue.builder().s(endDate).build());

        // Create the query request
```

```
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query successful. Found " + response.count() + "
 items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
 found.\n", tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with date range: " + e.getMessage());
            throw e;
        }
    }
```

Kueri dalam rentang tanggal dalam stempel waktu zaman Unix dengan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithDateTimeEpoch(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
```

```
        final long startEpoch,
        final long endEpoch) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Date key name", dateKeyName);
        CodeSampleUtils.validateEpochTimestamp("Start epoch", startEpoch);
        CodeSampleUtils.validateEpochTimestamp("End epoch", endEpoch);

        // Create expression attribute names for the column names
        final Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put(EXPRESSION_ATTRIBUTE_NAME_PK,
partitionKeyName);
        expressionAttributeNames.put("#dateKey", dateKeyName);

        // Create expression attribute values for the column values
        final Map<String, AttributeValue> expressionAttributeValues = new
HashMap<>();
        expressionAttributeValues.put(
            EXPRESSION_ATTRIBUTE_VALUE_PK,
            AttributeValue.builder().s(partitionKeyValue).build());
        expressionAttributeValues.put(
            ":startDate",
AttributeValue.builder().n(String.valueOf(startEpoch)).build());
        expressionAttributeValues.put(
            ":endDate",
AttributeValue.builder().n(String.valueOf(endEpoch)).build());

        // Create the query request
        final QueryRequest queryRequest = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression(KEY_CONDITION_EXPRESSION)
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final QueryResponse response = dynamoDbClient.query(queryRequest);
            System.out.println("Query successful. Found " + response.count() + "
items");
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format("Error: The Amazon DynamoDB table \"%s\" can't be
found.\n", tableName);
```

```
            throw e;
        } catch (DynamoDbException e) {
            System.err.println("Error querying with epoch timestamps: " +
 e.getMessage());
            throw e;
        }
    }
```

Kueri dalam rentang tanggal menggunakan LocalDateTime objek dengan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;

import java.time.Instant;
import java.time.LocalDateTime;
import java.time.ZoneOffset;
import java.util.HashMap;
import java.util.Map;

    public QueryResponse queryWithDateTimeLocalDateTime(
        final String tableName,
        final String partitionKeyName,
        final String partitionKeyValue,
        final String dateKeyName,
        final LocalDateTime startDateTime,
        final LocalDateTime endDateTime) {

        CodeSampleUtils.validateTableParameters(tableName, partitionKeyName,
 partitionKeyValue);
        CodeSampleUtils.validateStringParameter("Date key name", dateKeyName);
        if (startDateTime == null || endDateTime == null) {
            throw new IllegalArgumentException("Start and end LocalDateTime must not
 be null");
        }

        // Convert LocalDateTime to ISO-8601 strings in UTC with the correct format
        final String startDate =
 startDateTime.atZone(ZoneOffset.UTC).format(DATE_TIME_FORMATTER);
```

```
        final String endDate =
endDateTime.atZone(ZoneOffset.UTC).format(DATE_TIME_FORMATTER);

        return queryWithDateTime(tableName, partitionKeyName, partitionKeyValue,
dateKeyName, startDate, endDate);
    }
```

- Untuk detail API, lihat Kueri di Referensi API AWS SDK for Java 2.x .

### Memahami urutan ekspresi pembaruan

Contoh kode berikut menunjukkan bagaimana memahami urutan ekspresi pembaruan.

- Pelajari cara DynamoDB memproses ekspresi pembaruan.
- Memahami urutan operasi dalam ekspresi pembaruan.
- Hindari hasil yang tidak terduga dengan memahami evaluasi ekspresi.

#### SDK untuk Java 2.x

Menunjukkan urutan ekspresi pembaruan menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Demonstrates the effect of update expression order.
     *
     * <p>This method shows how the order of operations in an update expression
     * affects the result of the update.
     *
     * @param dynamoDbClient The DynamoDB client
```

```
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @return Map containing the results of different update orders
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, Object> demonstrateUpdateOrder(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

        Map<String, Object> results = new HashMap<>();

        try {
            // Initialize the item with a counter
            UpdateItemRequest initRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :zero, OldCounter = :zero")
                .expressionAttributeValues(
                    Map.of(":zero", AttributeValue.builder().n("0").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            dynamoDbClient.updateItem(initRequest);

            // Example 1: SET first, then ADD
            UpdateItemRequest setFirstRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :value ADD OldCounter :increment")
                .expressionAttributeValues(Map.of(
                    ":value", AttributeValue.builder().n("10").build(),
                    ":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse setFirstResponse =
dynamoDbClient.updateItem(setFirstRequest);
            results.put("setFirstResponse", setFirstResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 2: ADD first, then SET
            UpdateItemRequest addFirstRequest = UpdateItemRequest.builder()
```

```
                .tableName(tableName)
                .key(key)
                .updateExpression("ADD Counter :increment SET OldCounter = :value")
                .expressionAttributeValues(Map.of(
                    ":value", AttributeValue.builder().n("10").build(),
                    ":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse addFirstResponse =
dynamoDbClient.updateItem(addFirstRequest);
            results.put("addFirstResponse", addFirstResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 3: SET with multiple attributes
            UpdateItemRequest multiSetRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = :value, OldCounter = Counter")
                .expressionAttributeValues(
                    Map.of(":value", AttributeValue.builder().n("10").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse multiSetResponse =
dynamoDbClient.updateItem(multiSetRequest);
            results.put("multiSetResponse", multiSetResponse);

            // Reset the item
            dynamoDbClient.updateItem(initRequest);

            // Example 4: SET with expression using the same attribute
            UpdateItemRequest selfReferenceRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET Counter = Counter + :increment, OldCounter =
Counter")
                .expressionAttributeValues(
                    Map.of(":increment", AttributeValue.builder().n("5").build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();
```

```
            UpdateItemResponse selfReferenceResponse =
dynamoDbClient.updateItem(selfReferenceRequest);
            results.put("selfReferenceResponse", selfReferenceResponse);

            results.put("success", true);

        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
     * Updates an item with SET first, then REMOVE.
     *
     * <p>This method demonstrates updating an item with SET operation first,
     * followed by a REMOVE operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributeToSet The attribute to set
     * @param setValue The value to set
     * @param attributeToRemove The attribute to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateWithSetFirst(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String attributeToSet,
        AttributeValue setValue,
        String attributeToRemove) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #setAttr = :setValue REMOVE #removeAttr")
            .expressionAttributeNames(Map.of(
                "#setAttr", attributeToSet,
```

```
                "#removeAttr", attributeToRemove))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        try {
            return dynamoDbClient.updateItem(request);
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to update item with SET first: " + e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Updates an item with REMOVE first, then SET.
     *
     * <p>This method demonstrates updating an item with REMOVE operation first,
     * followed by a SET operation.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributeToSet The attribute to set
     * @param setValue The value to set
     * @param attributeToRemove The attribute to remove
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateWithRemoveFirst(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String attributeToSet,
        AttributeValue setValue,
        String attributeToRemove) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("REMOVE #removeAttr SET #setAttr = :setValue")
```

```
            .expressionAttributeNames(Map.of(
                "#setAttr", attributeToSet,
                "#removeAttr", attributeToRemove))
            .expressionAttributeValues(Map.of(":setValue", setValue))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        try {
            return dynamoDbClient.updateItem(request);
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to update item with REMOVE first: " +
e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Updates an item with all operation types in a specific order.
     *
     * <p>This method demonstrates using all operation types (SET, REMOVE, ADD,
DELETE)
     * in a specific order in a single update expression.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateWithAllOperationTypes(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #stringAttr = :stringVal, #mapAttr.#nestedAttr
= :nestedVal " + "REMOVE #oldAttr "
                + "ADD #counterAttr :increment "
                + "DELETE #stringSetAttr :stringSetVal")
```

```
            .expressionAttributeNames(Map.of(
                "#stringAttr", "StringAttribute",
                "#mapAttr", "MapAttribute",
                "#nestedAttr", "NestedAttribute",
                "#oldAttr", "OldAttribute",
                "#counterAttr", "CounterAttribute",
                "#stringSetAttr", "StringSetAttribute"))
            .expressionAttributeValues(Map.of(
                ":stringVal", AttributeValue.builder().s("New Value").build(),
                ":nestedVal", AttributeValue.builder().s("Nested Value").build(),
                ":increment", AttributeValue.builder().n("1").build(),
                ":stringSetVal", AttributeValue.builder().ss("Value1").build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        try {
            return dynamoDbClient.updateItem(request);
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to update item with all operation types: " +
e.getMessage())
                .cause(e)
                .build();
        }
    }

    /**
     * Gets the current state of an item.
     *
     * <p>Helper method to retrieve the current state of an item.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @return The item or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Map<String, AttributeValue> getItem(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {

        // Define the get parameters
        GetItemRequest request =
```

```
            GetItemRequest.builder().tableName(tableName).key(key).build();

        // Perform the get operation
        try {
            GetItemResponse response = dynamoDbClient.getItem(request);

            // Return the item if it exists, otherwise null
            return response.item();
        } catch (DynamoDbException e) {
            throw DynamoDbException.builder()
                .message("Failed to get item: " + e.getMessage())
                .cause(e)
                .build();
        }
    }
```

Contoh penggunaan urutan ekspresi pembaruan dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating update expression order in DynamoDB");

        try {
            // Example 1: Demonstrate update order effects
            System.out.println("\nExample 1: Demonstrating update order effects");
            Map<String, Object> orderResults =
demonstrateUpdateOrder(dynamoDbClient, tableName, key);

            if ((boolean) orderResults.get("success")) {
                System.out.println("SET first, then ADD:");
                System.out.println("  " + orderResults.get("setFirstResponse"));

                System.out.println("ADD first, then SET:");
                System.out.println("  " + orderResults.get("addFirstResponse"));

                System.out.println("SET with multiple attributes:");
                System.out.println("  " + orderResults.get("multiSetResponse"));
```

```
                System.out.println("SET with self-reference:");
                System.out.println("  " +
orderResults.get("selfReferenceResponse"));
            } else {
                System.out.println("Error: " + orderResults.get("error"));
            }

            // Example 2: Update with SET first, then REMOVE
            System.out.println("\nExample 2: Update with SET first, then REMOVE");
            UpdateItemResponse setFirstResponse = updateWithSetFirst(
                dynamoDbClient,
                tableName,
                key,
                "Status",
                AttributeValue.builder().s("Active").build(),
                "OldStatus");

            System.out.println("Updated attributes: " +
setFirstResponse.attributes());

            // Example 3: Update with REMOVE first, then SET
            System.out.println("\nExample 3: Update with REMOVE first, then SET");
            UpdateItemResponse removeFirstResponse = updateWithRemoveFirst(
                dynamoDbClient,
                tableName,
                key,
                "Status",
                AttributeValue.builder().s("Inactive").build(),
                "OldStatus");

            System.out.println("Updated attributes: " +
removeFirstResponse.attributes());

            // Example 4: Update with all operation types
            System.out.println("\nExample 4: Update with all operation types");
            UpdateItemResponse allOpsResponse =
updateWithAllOperationTypes(dynamoDbClient, tableName, key);

            System.out.println("Updated attributes: " +
allOpsResponse.attributes());

            // Example 5: Get the current state of the item
            System.out.println("\nExample 5: Current state of the item");
```

```
            Map<String, AttributeValue> item = getItem(dynamoDbClient, tableName,
key);

            if (item != null) {
                System.out.println("Item: " + item);
            } else {
                System.out.println("Item not found");
            }

            // Explain update expression order
            System.out.println("\nKey points about update expression order in
DynamoDB:");
            System.out.println("1. Update expressions are processed in this order:
SET, REMOVE, ADD, DELETE");
            System.out.println("2. Within each clause, operations are processed from
left to right");
            System.out.println("3. SET operations use the item state before any
updates in the expression");
            System.out.println("4. When an attribute is referenced multiple times,
the first operation wins");
            System.out.println("5. To reference a new value, split the update into
multiple operations");
            System.out.println("6. The order of clauses in the expression doesn't
change the evaluation order");
            System.out.println("7. For complex updates, consider using multiple
separate update operations");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

Perbarui pengaturan throughput hangat tabel

Contoh kode berikut menunjukkan cara memperbarui pengaturan throughput hangat tabel.

SDK untuk Java 2.x

Perbarui pengaturan throughput hangat pada tabel DynamoDB yang ada menggunakan. AWS SDK for Java 2.x

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GlobalSecondaryIndexUpdate;
import
 software.amazon.awssdk.services.dynamodb.model.UpdateGlobalSecondaryIndexAction;
import software.amazon.awssdk.services.dynamodb.model.UpdateTableRequest;
import software.amazon.awssdk.services.dynamodb.model.WarmThroughput;

    public static WarmThroughput buildWarmThroughput(final Long readUnitsPerSecond,
 final Long writeUnitsPerSecond) {
        return WarmThroughput.builder()
            .readUnitsPerSecond(readUnitsPerSecond)
            .writeUnitsPerSecond(writeUnitsPerSecond)
            .build();
    }

    /**
     * Updates a DynamoDB table with warm throughput settings for both the table and
 a global secondary index.
     *
     * @param ddb The DynamoDB client
     * @param tableName The name of the table to update
     * @param tableReadUnitsPerSecond Read units per second for the table
     * @param tableWriteUnitsPerSecond Write units per second for the table
     * @param globalSecondaryIndexName The name of the global secondary index to
 update
     * @param globalSecondaryIndexReadUnitsPerSecond Read units per second for the
 GSI
     * @param globalSecondaryIndexWriteUnitsPerSecond Write units per second for the
 GSI
     */
    public static void updateDynamoDBTable(
        final DynamoDbClient ddb,
        final String tableName,
        final Long tableReadUnitsPerSecond,
        final Long tableWriteUnitsPerSecond,
        final String globalSecondaryIndexName,
        final Long globalSecondaryIndexReadUnitsPerSecond,
        final Long globalSecondaryIndexWriteUnitsPerSecond) {
```

```
        final WarmThroughput tableWarmThroughput =
            buildWarmThroughput(tableReadUnitsPerSecond, tableWriteUnitsPerSecond);
        final WarmThroughput gsiWarmThroughput =
            buildWarmThroughput(globalSecondaryIndexReadUnitsPerSecond,
globalSecondaryIndexWriteUnitsPerSecond);

        final GlobalSecondaryIndexUpdate globalSecondaryIndexUpdate =
GlobalSecondaryIndexUpdate.builder()
            .update(UpdateGlobalSecondaryIndexAction.builder()
                .indexName(globalSecondaryIndexName)
                .warmThroughput(gsiWarmThroughput)
                .build())
            .build();

        final UpdateTableRequest request = UpdateTableRequest.builder()
            .tableName(tableName)
            .globalSecondaryIndexUpdates(globalSecondaryIndexUpdate)
            .warmThroughput(tableWarmThroughput)
            .build();

        try {
            ddb.updateTable(request);
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }

        System.out.println(SUCCESS_MESSAGE);
    }
```

- Untuk detail API, lihat UpdateTabledi Referensi AWS SDK for Java 2.x API.

### Perbarui TTL item

Contoh kode berikut menunjukkan cara memperbarui TTL item.

SDK untuk Java 2.x

Perbarui TTL pada item DynamoDB yang ada dalam tabel.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.ResourceNotFoundException;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;
import java.util.Optional;

    public UpdateItemResponse updateItemWithTTL(
        final String tableName, final String primaryKeyValue, final String
 sortKeyValue) {
        // Get current time in epoch second format
        final long currentTime = System.currentTimeMillis() / 1000;

        // Calculate expiration time 90 days from now in epoch second format
        final long expireDate = currentTime + (DAYS_TO_EXPIRE * SECONDS_PER_DAY);

        // Create the key map for the item to update
        final Map<String, AttributeValue> keyMap = new HashMap<>();
        keyMap.put(PRIMARY_KEY_ATTR,
 AttributeValue.builder().s(primaryKeyValue).build());
        keyMap.put(SORT_KEY_ATTR, AttributeValue.builder().s(sortKeyValue).build());

        // Create the expression attribute values
        final Map<String, AttributeValue> expressionAttributeValues = new
 HashMap<>();
        expressionAttributeValues.put(
            ":c", AttributeValue.builder().n(String.valueOf(currentTime)).build());
        expressionAttributeValues.put(
            ":e", AttributeValue.builder().n(String.valueOf(expireDate)).build());

        final UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(keyMap)
            .updateExpression(UPDATE_EXPRESSION)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        try {
            final UpdateItemResponse response = dynamoDbClient.updateItem(request);
            System.out.println(String.format(SUCCESS_MESSAGE, tableName));
```

```
            return response;
        } catch (ResourceNotFoundException e) {
            System.err.format(TABLE_NOT_FOUND_ERROR, tableName);
            throw e;
        } catch (DynamoDbException e) {
            System.err.println(e.getMessage());
            throw e;
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

Menggunakan API Gateway untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh Amazon API Gateway.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi dengan menggunakan Lambda Java runtime API. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat fungsi Lambda yang diinvokasi oleh Amazon API Gateway yang memindai peringatan hari jadi kerja di tabel Amazon DynamoDB dan menggunakan Amazon Simple Notification Service (Amazon SNS) untuk mengirim pesan teks berisi ucapan selamat kepada karyawan Anda pada tanggal hari jadi kerja satu tahun mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

Menggunakan Step Functions untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat mesin AWS Step Functions status yang memanggil AWS Lambda fungsi secara berurutan.

SDK untuk Java 2.x

Menunjukkan cara membuat alur kerja AWS tanpa server dengan menggunakan AWS Step Functions dan. AWS SDK for Java 2.x Setiap langkah alur kerja diimplementasikan menggunakan AWS Lambda fungsi.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

Gunakan operasi penghitung atom

Contoh kode berikut menunjukkan bagaimana menggunakan operasi penghitung atom di DynamoDB.

- Penghitung kenaikan secara atom menggunakan operasi ADD dan SET.
- Penghitung kenaikan aman yang mungkin tidak ada.
- Menerapkan penguncian optimis untuk operasi counter.

SDK untuk Java 2.x

Menunjukkan operasi penghitung atom menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
```

```
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Increments a counter using the ADD operation.
     *
     * <p>This method demonstrates how to use the ADD operation to atomically
     * increment a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterWithAdd(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("ADD #counterName :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":increment",
                AttributeValue.builder().n(String.valueOf(incrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
```

```
     * Increments a counter using the SET operation.
     *
     * <p>This method demonstrates how to use the SET operation with an expression
     * to increment a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterWithSet(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #counterName = #counterName + :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":increment",
                AttributeValue.builder().n(String.valueOf(incrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Increments a counter safely, handling the case where the counter doesn't
exist yet.
     *
     * <p>This method demonstrates how to use if_not_exists to safely increment a
counter
     * that may not exist yet.
     *
```

```
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
     * @param incrementValue The value to increment by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse incrementCounterSafely(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int incrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #counterName = if_not_exists(#counterName, :zero)
+ :increment")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":increment",

AttributeValue.builder().n(String.valueOf(incrementValue)).build(),
                ":zero", AttributeValue.builder().n("0").build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Decrements a counter safely, ensuring it doesn't go below zero.
     *
     * <p>This method demonstrates how to use a condition expression to safely
     * decrement a counter without going below zero.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param counterName The name of the counter attribute
```

```
     * @param decrementValue The value to decrement by
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation or if the
counter would go below zero
     */
    public static UpdateItemResponse decrementCounterSafely(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String counterName,
        int decrementValue) {

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #counterName = #counterName - :decrement")
            .conditionExpression("#counterName >= :decrement")
            .expressionAttributeNames(Map.of("#counterName", counterName))
            .expressionAttributeValues(Map.of(
                ":decrement",
                AttributeValue.builder().n(String.valueOf(decrementValue)).build()))
            .returnValues(ReturnValue.UPDATED_NEW)
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Compares the ADD and SET approaches for incrementing counters.
     *
     * <p>This method demonstrates the differences between using ADD and SET
     * for incrementing counters in DynamoDB.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @return Map containing the comparison results
     */
    public static Map<String, Object> compareAddVsSet(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key) {
```

```
        Map<String, Object> results = new HashMap<>();

        try {
            // Reset counters to ensure a fair comparison
            UpdateItemRequest resetRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET AddCounter = :zero, SetCounter = :zero")
                .expressionAttributeValues(
                    Map.of(":zero", AttributeValue.builder().n("0").build()))
                .build();

            dynamoDbClient.updateItem(resetRequest);

            // Increment with ADD
            long addStartTime = System.nanoTime();
            UpdateItemResponse addResponse = incrementCounterWithAdd(dynamoDbClient,
tableName, key, "AddCounter", 1);
            long addEndTime = System.nanoTime();
            long addDuration = addEndTime - addStartTime;

            // Increment with SET
            long setStartTime = System.nanoTime();
            UpdateItemResponse setResponse = incrementCounterWithSet(dynamoDbClient,
tableName, key, "SetCounter", 1);
            long setEndTime = System.nanoTime();
            long setDuration = setEndTime - setStartTime;

            // Record results
            results.put("addResponse", addResponse);
            results.put("setResponse", setResponse);
            results.put("addDuration", addDuration);
            results.put("setDuration", setDuration);
            results.put("success", true);

        } catch (DynamoDbException e) {
            results.put("success", false);
            results.put("error", e.getMessage());
        }

        return results;
    }

    /**
```

```
     * Gets the current value of a counter attribute.
     *
     * <p>Helper method to retrieve the current value of a counter attribute.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to get
     * @param counterName The name of the counter attribute
     * @return The counter value or null if not found
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static Integer getCounterValue(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String counterName) {

        // Define the get parameters
        GetItemRequest request = GetItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .projectionExpression(counterName)
            .build();

        // Perform the get operation
        GetItemResponse response = dynamoDbClient.getItem(request);

        // Return the counter value if it exists, otherwise null
        if (response.item() != null && response.item().containsKey(counterName)) {
            return Integer.parseInt(response.item().get(counterName).n());
        }

        return null;
    }
```

Contoh penggunaan operasi penghitung atom dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating atomic counter operations in DynamoDB");
```

```
        try {
            // Example 1: Increment a counter using ADD
            System.out.println("\nExample 1: Incrementing a counter using ADD");
            UpdateItemResponse addResponse = incrementCounterWithAdd(dynamoDbClient,
tableName, key, "ViewCount", 1);

            System.out.println("Updated counter: " + addResponse.attributes());

            // Example 2: Increment a counter using SET
            System.out.println("\nExample 2: Incrementing a counter using SET");
            UpdateItemResponse setResponse = incrementCounterWithSet(dynamoDbClient,
tableName, key, "LikeCount", 1);

            System.out.println("Updated counter: " + setResponse.attributes());

            // Example 3: Increment a counter safely
            System.out.println("\nExample 3: Incrementing a counter safely");
            UpdateItemResponse safeResponse = incrementCounterSafely(dynamoDbClient,
tableName, key, "ShareCount", 1);

            System.out.println("Updated counter: " + safeResponse.attributes());

            // Example 4: Decrement a counter safely
            System.out.println("\nExample 4: Decrementing a counter safely");
            try {
                UpdateItemResponse decrementResponse =
                    decrementCounterSafely(dynamoDbClient, tableName, key,
"InventoryCount", 1);

                System.out.println("Updated counter: " +
decrementResponse.attributes());
            } catch (DynamoDbException e) {
                if (e.getMessage().contains("ConditionalCheckFailed")) {
                    System.out.println("Cannot decrement counter below zero");
                } else {
                    throw e;
                }
            }

            // Example 5: Compare ADD vs SET
            System.out.println("\nExample 5: Comparing ADD vs SET");
            Map<String, Object> comparison = compareAddVsSet(dynamoDbClient,
tableName, key);
```

```
            if ((boolean) comparison.get("success")) {
                System.out.println("ADD duration: " + comparison.get("addDuration")
+ " ns");
                System.out.println("SET duration: " + comparison.get("setDuration")
+ " ns");
                System.out.println("ADD response: " +
comparison.get("addResponse"));
                System.out.println("SET response: " +
comparison.get("setResponse"));
            } else {
                System.out.println("Comparison failed: " + comparison.get("error"));
            }

            // Explain atomic counter operations
            System.out.println("\nKey points about DynamoDB atomic counter
operations:");
            System.out.println("1. Both ADD and SET can be used for atomic
counters");
            System.out.println("2. ADD is more concise for simple increments");
            System.out.println("3. SET with an expression is more flexible for
complex operations");
            System.out.println("4. Use if_not_exists to handle the case where the
counter doesn't exist yet");
            System.out.println("5. Use condition expressions to prevent counters
from going below zero");
            System.out.println("6. Atomic operations are guaranteed to be isolated
from other writes");
            System.out.println("7. ADD can only be used with number and set data
types");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat UpdateItemdi Referensi AWS SDK for Java 2.x API.

## Gunakan operasi bersyarat

Contoh kode berikut menunjukkan bagaimana menggunakan operasi bersyarat di DynamoDB.

- Menerapkan penulisan bersyarat untuk mencegah penimpaan data.
- Gunakan ekspresi kondisi untuk menegakkan aturan bisnis.
- Tangani kegagalan pemeriksaan bersyarat dengan anggun.

SDK untuk Java 2.x

Menunjukkan operasi bersyarat menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import
 software.amazon.awssdk.services.dynamodb.model.ConditionalCheckFailedException;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemRequest;
import software.amazon.awssdk.services.dynamodb.model.DeleteItemResponse;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.GetItemRequest;
import software.amazon.awssdk.services.dynamodb.model.GetItemResponse;
import software.amazon.awssdk.services.dynamodb.model.ReturnValue;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.HashMap;
import java.util.Map;

    /**
     * Performs a conditional update on an item.
     *
     * <p>This method demonstrates how to use a condition expression to update an
 item
     * only if a specific condition is met.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param conditionAttribute The attribute to check in the condition
     * @param conditionValue The value to compare against
     * @param updateAttribute The attribute to update
     * @param updateValue The new value to set
     * @return Map containing the operation result and status
     */
    public static Map<String, Object> conditionalUpdate(
        DynamoDbClient dynamoDbClient,
```

```
        String tableName,
        Map<String, AttributeValue> key,
        String conditionAttribute,
        AttributeValue conditionValue,
        String updateAttribute,
        AttributeValue updateValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #updateAttr = :updateVal")
                .conditionExpression("#condAttr = :condVal")
                .expressionAttributeNames(Map.of(
                    "#condAttr", conditionAttribute,
                    "#updateAttr", updateAttribute))
                .expressionAttributeValues(Map.of(
                    ":condVal", conditionValue,
                    ":updateVal", updateValue))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Perform the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            // Record success result
            result.put("success", true);
            result.put("message", "Condition was met and update was performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "Condition was not met, update was not
performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
```

```
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }

    /**
     * Performs a conditional delete on an item.
     *
     * <p>This method demonstrates how to use a condition expression to delete an
item
     * only if a specific condition is met.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to delete
     * @param conditionAttribute The attribute to check in the condition
     * @param conditionValue The value to compare against
     * @return Map containing the operation result and status
     */
    public static Map<String, Object> conditionalDelete(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String conditionAttribute,
        AttributeValue conditionValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Define the delete parameters
            DeleteItemRequest request = DeleteItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .conditionExpression("#condAttr = :condVal")
                .expressionAttributeNames(Map.of("#condAttr", conditionAttribute))
                .expressionAttributeValues(Map.of(":condVal", conditionValue))
                .returnValues(ReturnValue.ALL_OLD)
                .build();

            // Perform the delete operation
            DeleteItemResponse response = dynamoDbClient.deleteItem(request);

            // Record success result
```

```
            result.put("success", true);
            result.put("message", "Condition was met and delete was performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "Condition was not met, delete was not
performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }

    /**
     * Demonstrates optimistic locking using a version attribute.
     *
     * <p>This method shows how to implement optimistic locking by using a version
     * attribute that is incremented with each update.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param versionAttribute The name of the version attribute
     * @return Map containing the operation result
     */
    public static Map<String, Object> optimisticLockingExample(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
key, String versionAttribute) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Get the current version of the item
            GetItemRequest getRequest = GetItemRequest.builder()
                .tableName(tableName)
                .key(key)
```

```
                .projectionExpression(versionAttribute)
                .build();

            GetItemResponse getResponse = dynamoDbClient.getItem(getRequest);

            // Check if the item exists
            if (getResponse.item() == null || !
getResponse.item().containsKey(versionAttribute)) {
                // Item doesn't exist or doesn't have a version attribute
                // Initialize with version 1
                UpdateItemRequest initRequest = UpdateItemRequest.builder()
                    .tableName(tableName)
                    .key(key)
                    .updateExpression("SET #verAttr = :newVer, #dataAttr = :data")
                    .expressionAttributeNames(Map.of("#verAttr", versionAttribute,
 "#dataAttr", "Data"))
                    .expressionAttributeValues(Map.of(
                        ":newVer", AttributeValue.builder().n("1").build(),
                        ":data", AttributeValue.builder().s("Initial
 data").build()))
                    .returnValues(ReturnValue.UPDATED_NEW)
                    .build();

                UpdateItemResponse initResponse =
 dynamoDbClient.updateItem(initRequest);

                result.put("operation", "initialize");
                result.put("success", true);
                result.put("attributes", initResponse.attributes());

                return result;
            }

            // Get the current version number
            int currentVersion =
                Integer.parseInt(getResponse.item().get(versionAttribute).n());
            int newVersion = currentVersion + 1;

            // Update the item with a condition on the version
            UpdateItemRequest updateRequest = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #verAttr = :newVer, #dataAttr = :newData")
                .conditionExpression("#verAttr = :curVer")
```

```
                .expressionAttributeNames(Map.of("#verAttr", versionAttribute,
"#dataAttr", "Data"))
                .expressionAttributeValues(Map.of(
                    ":curVer",
                        AttributeValue.builder()
                            .n(String.valueOf(currentVersion))
                            .build(),
                    ":newVer",

AttributeValue.builder().n(String.valueOf(newVersion)).build(),
                    ":newData",
                        AttributeValue.builder()
                            .s("Updated data at version " + newVersion)
                            .build()))
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            UpdateItemResponse updateResponse =
dynamoDbClient.updateItem(updateRequest);

            // Record success result
            result.put("operation", "update");
            result.put("success", true);
            result.put("oldVersion", currentVersion);
            result.put("newVersion", newVersion);
            result.put("attributes", updateResponse.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to version mismatch
            result.put("operation", "update");
            result.put("success", false);
            result.put("message", "Version mismatch, another process may have
updated the item");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("operation", "update");
            result.put("success", false);
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
```

```
    }

    /**
     * Performs a conditional update with multiple conditions.
     *
     * <p>This method demonstrates how to use multiple conditions in a condition
expression.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param conditions Map of attribute names to values for conditions
     * @param updateAttribute The attribute to update
     * @param updateValue The new value to set
     * @return Map containing the operation result and status
     */
    public static Map<String, Object> conditionalUpdateWithMultipleConditions(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        Map<String, AttributeValue> conditions,
        String updateAttribute,
        AttributeValue updateValue) {

        Map<String, Object> result = new HashMap<>();

        try {
            // Build the condition expression and attribute names/values
            StringBuilder conditionExpression = new StringBuilder();
            Map<String, String> expressionAttributeNames = new HashMap<>();
            Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();

            // Add update attribute
            expressionAttributeNames.put("#updateAttr", updateAttribute);
            expressionAttributeValues.put(":updateVal", updateValue);

            // Add conditions
            int i = 0;
            for (Map.Entry<String, AttributeValue> condition :
conditions.entrySet()) {
                String attrName = condition.getKey();
                AttributeValue attrValue = condition.getValue();

                String nameKey = "#cond" + i;
```

```
                String valueKey = ":val" + i;

                expressionAttributeNames.put(nameKey, attrName);
                expressionAttributeValues.put(valueKey, attrValue);

                // Add AND between conditions (except for the first one)
                if (i > 0) {
                    conditionExpression.append(" AND ");
                }

                conditionExpression.append(nameKey).append(" = ").append(valueKey);
                i++;
            }

            // Define the update parameters
            UpdateItemRequest request = UpdateItemRequest.builder()
                .tableName(tableName)
                .key(key)
                .updateExpression("SET #updateAttr = :updateVal")
                .conditionExpression(conditionExpression.toString())
                .expressionAttributeNames(expressionAttributeNames)
                .expressionAttributeValues(expressionAttributeValues)
                .returnValues(ReturnValue.UPDATED_NEW)
                .build();

            // Perform the update operation
            UpdateItemResponse response = dynamoDbClient.updateItem(request);

            // Record success result
            result.put("success", true);
            result.put("message", "All conditions were met and update was
performed");
            result.put("attributes", response.attributes());

        } catch (ConditionalCheckFailedException e) {
            // Record failure due to condition not being met
            result.put("success", false);
            result.put("message", "One or more conditions were not met, update was
not performed");
            result.put("error", "ConditionalCheckFailedException");

        } catch (DynamoDbException e) {
            // Record failure due to other errors
            result.put("success", false);
```

```
            result.put("message", "Error occurred: " + e.getMessage());
            result.put("error", e.getClass().getSimpleName());
        }

        return result;
    }
```

Contoh penggunaan operasi bersyarat dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating conditional operations in DynamoDB");

        try {
            // Example 1: Conditional update
            System.out.println("\nExample 1: Conditional update");
            Map<String, Object> updateResult = conditionalUpdate(
                dynamoDbClient,
                tableName,
                key,
                "InStock",
                AttributeValue.builder().bool(true).build(),
                "Status",
                AttributeValue.builder().s("Available").build());

            System.out.println("Update result: " + updateResult.get("message"));
            if ((boolean) updateResult.get("success")) {
                System.out.println("Updated attributes: " +
updateResult.get("attributes"));
            }

            // Example 2: Conditional delete
            System.out.println("\nExample 2: Conditional delete");
            Map<String, Object> deleteResult = conditionalDelete(
                dynamoDbClient,
                tableName,
                key,
                "Status",
```

```
                AttributeValue.builder().s("Discontinued").build());

            System.out.println("Delete result: " + deleteResult.get("message"));
            if ((boolean) deleteResult.get("success")) {
                System.out.println("Deleted item: " +
deleteResult.get("attributes"));
            }

            // Example 3: Optimistic locking
            System.out.println("\nExample 3: Optimistic locking");
            Map<String, Object> lockingResult =
optimisticLockingExample(dynamoDbClient, tableName, key, "Version");

            System.out.println("Optimistic locking result:");
            System.out.println("  Operation: " + lockingResult.get("operation"));
            System.out.println("  Success: " + lockingResult.get("success"));
            if (lockingResult.get("operation").equals("update") && (boolean)
lockingResult.get("success")) {
                System.out.println("  Old version: " +
lockingResult.get("oldVersion"));
                System.out.println("  New version: " +
lockingResult.get("newVersion"));
            }
            System.out.println("  Attributes: " + lockingResult.get("attributes"));

            // Example 4: Multiple conditions
            System.out.println("\nExample 4: Multiple conditions");
            Map<String, AttributeValue> conditions = new HashMap<>();
            conditions.put("Price", AttributeValue.builder().n("199.99").build());
            conditions.put("Category",
AttributeValue.builder().s("Electronics").build());

            Map<String, Object> multiConditionResult =
conditionalUpdateWithMultipleConditions(
                dynamoDbClient,
                tableName,
                key,
                conditions,
                "OnSale",
                AttributeValue.builder().bool(true).build());

            System.out.println("Multiple conditions result: " +
multiConditionResult.get("message"));
            if ((boolean) multiConditionResult.get("success")) {
```

```
                System.out.println("Updated attributes: " +
multiConditionResult.get("attributes"));
            }

            // Explain conditional operations
            System.out.println("\nKey points about DynamoDB conditional
operations:");
            System.out.println("1. Conditional operations only succeed if the
condition is met");
            System.out.println("2. ConditionalCheckFailedException is thrown when
the condition fails");
            System.out.println("3. No changes are made to the item if the condition
fails");
            System.out.println("4. Conditions can be used with update, delete, and
put operations");
            System.out.println("5. Multiple conditions can be combined with AND and
OR");
            System.out.println("6. Optimistic locking can be implemented using a
version attribute");
            System.out.println(
                "7. Conditional operations consume the same amount of write capacity
whether they succeed or fail");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteItem
  - PutItem
  - UpdateItem

Gunakan nama atribut ekspresi

Contoh kode berikut menunjukkan bagaimana menggunakan nama atribut ekspresi di DynamoDB.

- Bekerja dengan kata-kata yang dicadangkan dalam ekspresi DynamoDB.
- Gunakan placeholder nama atribut ekspresi.

- Menangani karakter khusus dalam nama atribut.

SDK untuk Java 2.x

Menunjukkan nama atribut ekspresi menggunakan AWS SDK for Java 2.x.

```
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.AttributeValue;
import software.amazon.awssdk.services.dynamodb.model.DynamoDbException;
import software.amazon.awssdk.services.dynamodb.model.QueryRequest;
import software.amazon.awssdk.services.dynamodb.model.QueryResponse;
import software.amazon.awssdk.services.dynamodb.model.ScanRequest;
import software.amazon.awssdk.services.dynamodb.model.ScanResponse;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemRequest;
import software.amazon.awssdk.services.dynamodb.model.UpdateItemResponse;

import java.util.Arrays;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

    /**
     * Updates an attribute that is a reserved word in DynamoDB.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * attributes that are reserved words in DynamoDB.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param reservedWordAttribute The reserved word attribute to update
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String reservedWordAttribute,
        AttributeValue value) {

        // Define the update parameters using expression attribute names
```

```
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attr = :value")
            .expressionAttributeNames(Map.of("#attr", reservedWordAttribute))
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Updates an attribute that contains special characters.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * attributes that contain special characters.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param specialCharAttribute The attribute with special characters to update
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateSpecialCharacterAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        String specialCharAttribute,
        AttributeValue value) {

        // Define the update parameters using expression attribute names
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
            .updateExpression("SET #attr = :value")
            .expressionAttributeNames(Map.of("#attr", specialCharAttribute))
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();
```

```
        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Queries items using an attribute that is a reserved word.
     *
     * <p>This method demonstrates how to use expression attribute names in a query
     * when the attribute is a reserved word.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param partitionKeyName The name of the partition key attribute
     * @param partitionKeyValue The value of the partition key
     * @param reservedWordAttribute The reserved word attribute to filter on
     * @param value The value to compare against
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static QueryResponse queryWithReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        String partitionKeyName,
        AttributeValue partitionKeyValue,
        String reservedWordAttribute,
        AttributeValue value) {

        // Define the query parameters using expression attribute names
        Map<String, String> expressionAttributeNames = new HashMap<>();
        expressionAttributeNames.put("#pkName", partitionKeyName);
        expressionAttributeNames.put("#attr", reservedWordAttribute);

        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        expressionAttributeValues.put(":pkValue", partitionKeyValue);
        expressionAttributeValues.put(":value", value);

        QueryRequest request = QueryRequest.builder()
            .tableName(tableName)
            .keyConditionExpression("#pkName = :pkValue")
            .filterExpression("#attr = :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();
```

```
        // Perform the query operation
        return dynamoDbClient.query(request);
    }

    /**
     * Updates a nested attribute with a path that contains reserved words.
     *
     * <p>This method demonstrates how to use expression attribute names to update
     * nested attributes where the path contains reserved words.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param key The key of the item to update
     * @param attributePath The path to the nested attribute as an array
     * @param value The value to set
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static UpdateItemResponse updateNestedReservedWordAttribute(
        DynamoDbClient dynamoDbClient,
        String tableName,
        Map<String, AttributeValue> key,
        List<String> attributePath,
        AttributeValue value) {

        // Create expression attribute names for each part of the path
        Map<String, String> expressionAttributeNames = new HashMap<>();
        for (int i = 0; i < attributePath.size(); i++) {
            expressionAttributeNames.put("#attr" + i, attributePath.get(i));
        }

        // Build the attribute path using the expression attribute names
        StringBuilder attributePathExpression = new StringBuilder();
        for (int i = 0; i < attributePath.size(); i++) {
            if (i > 0) {
                attributePathExpression.append(".");
            }
            attributePathExpression.append("#attr").append(i);
        }

        // Define the update parameters
        UpdateItemRequest request = UpdateItemRequest.builder()
            .tableName(tableName)
            .key(key)
```

```
            .updateExpression("SET " + attributePathExpression.toString() + "
= :value")
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(Map.of(":value", value))
            .returnValues("UPDATED_NEW")
            .build();

        // Perform the update operation
        return dynamoDbClient.updateItem(request);
    }

    /**
     * Scans a table with multiple attribute name placeholders.
     *
     * <p>This method demonstrates how to use multiple expression attribute names
     * in a complex filter expression.
     *
     * @param dynamoDbClient The DynamoDB client
     * @param tableName The name of the DynamoDB table
     * @param filters Object mapping attribute names to filter values
     * @return The response from DynamoDB
     * @throws DynamoDbException if an error occurs during the operation
     */
    public static ScanResponse scanWithMultipleAttributeNames(
        DynamoDbClient dynamoDbClient, String tableName, Map<String, AttributeValue>
filters) {

        // Create expression attribute names and values
        Map<String, String> expressionAttributeNames = new HashMap<>();
        Map<String, AttributeValue> expressionAttributeValues = new HashMap<>();
        StringBuilder filterExpression = new StringBuilder();

        // Build the filter expression
        int index = 0;
        for (Map.Entry<String, AttributeValue> entry : filters.entrySet()) {
            String attrName = entry.getKey();
            AttributeValue attrValue = entry.getValue();

            String nameKey = "#attr" + index;
            String valueKey = ":val" + index;

            expressionAttributeNames.put(nameKey, attrName);
            expressionAttributeValues.put(valueKey, attrValue);
```

```
            // Add AND between conditions (except for the first one)
            if (index > 0) {
                filterExpression.append(" AND ");
            }

            filterExpression.append(nameKey).append(" = ").append(valueKey);
            index++;
        }

        // Define the scan parameters
        ScanRequest request = ScanRequest.builder()
            .tableName(tableName)
            .filterExpression(filterExpression.toString())
            .expressionAttributeNames(expressionAttributeNames)
            .expressionAttributeValues(expressionAttributeValues)
            .build();

        // Perform the scan operation
        return dynamoDbClient.scan(request);
    }
```

Contoh penggunaan nama atribut ekspresi dengan AWS SDK for Java 2.x.

```
    public static void exampleUsage(DynamoDbClient dynamoDbClient, String tableName)
{
        // Example key
        Map<String, AttributeValue> key = new HashMap<>();
        key.put("ProductId", AttributeValue.builder().s("P12345").build());

        System.out.println("Demonstrating expression attribute names in DynamoDB");

        try {
            // Example 1: Update an attribute that is a reserved word
            System.out.println("\nExample 1: Updating an attribute that is a
reserved word");
            UpdateItemResponse response1 = updateReservedWordAttribute(
                dynamoDbClient,
                tableName,
                key,
                "Size", // "SIZE" is a reserved word in DynamoDB
                AttributeValue.builder().s("Large").build());
```

```
            System.out.println("Updated attribute: " + response1.attributes());

            // Example 2: Update an attribute with special characters
            System.out.println("\nExample 2: Updating an attribute with special
characters");
            UpdateItemResponse response2 = updateSpecialCharacterAttribute(
                dynamoDbClient,
                tableName,
                key,
                "Product-Type", // Contains a hyphen, which is a special character
                AttributeValue.builder().s("Electronics").build());

            System.out.println("Updated attribute: " + response2.attributes());

            // Example 3: Query with a reserved word attribute
            System.out.println("\nExample 3: Querying with a reserved word
attribute");
            QueryResponse response3 = queryWithReservedWordAttribute(
                dynamoDbClient,
                tableName,
                "Category",
                AttributeValue.builder().s("Electronics").build(),
                "Count", // "COUNT" is a reserved word in DynamoDB
                AttributeValue.builder().n("10").build());

            System.out.println("Found " + response3.count() + " items");

            // Example 4: Update a nested attribute with reserved words in the path
            System.out.println("\nExample 4: Updating a nested attribute with
reserved words in the path");
            UpdateItemResponse response4 = updateNestedReservedWordAttribute(
                dynamoDbClient,
                tableName,
                key,
                Arrays.asList("Dimensions", "Size", "Height"), // "SIZE" is a
reserved word
                AttributeValue.builder().n("30").build());

            System.out.println("Updated nested attribute: " +
response4.attributes());

            // Example 5: Scan with multiple attribute name placeholders
            System.out.println("\nExample 5: Scanning with multiple attribute name
placeholders");
```

```
            Map<String, AttributeValue> filters = new HashMap<>();
            filters.put("Size", AttributeValue.builder().s("Large").build());
            filters.put("Count", AttributeValue.builder().n("10").build());
            filters.put(
                "Product-Type", AttributeValue.builder().s("Electronics").build());

            ScanResponse response5 = scanWithMultipleAttributeNames(dynamoDbClient,
tableName, filters);

            System.out.println("Found " + response5.count() + " items");

            // Show some common reserved words
            System.out.println("\nSome common DynamoDB reserved words:");
            List<String> commonReservedWords = getDynamoDBReservedWords();
            System.out.println(String.join(", ", commonReservedWords));

            // Explain expression attribute names
            System.out.println("\nKey points about expression attribute names:");
            System.out.println("1. Use expression attribute names (#name) for
reserved words");
            System.out.println("2. Use expression attribute names for attributes
with special characters");
            System.out.println(
                "3. Special characters include: spaces, hyphens, dots, and other
non-alphanumeric characters");
            System.out.println("4. Expression attribute names are required for
nested attributes with reserved words");
            System.out.println("5. You can use multiple expression attribute names
in a single expression");
            System.out.println("6. Expression attribute names are case-sensitive");
            System.out.println("7. Expression attribute names are only used in
expressions, not in the actual data");

        } catch (DynamoDbException e) {
            System.err.println("Error: " + e.getMessage());
            e.printStackTrace();
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - Kueri
  - UpdateItem

Menggunakan peristiwa terjadwal untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh acara EventBridge terjadwal Amazon.

SDK untuk Java 2.x

Menunjukkan cara membuat acara EventBridge terjadwal Amazon yang memanggil AWS Lambda fungsi. Konfigurasikan EventBridge untuk menggunakan ekspresi cron untuk menjadwalkan saat fungsi Lambda dipanggil. Dalam contoh ini, Anda membuat fungsi Lambda menggunakan API runtime Java Lambda. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat aplikasi yang mengirimkan pesan teks seluler kepada karyawan Anda berisi ucapan selamat pada hari jadi setahun kerja mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch Log
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

## Contoh nirserver

Memanggil fungsi Lambda dari pemicu DynamoDB

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima catatan dari aliran DynamoDB. Fungsi mengambil payload DynamoDB dan mencatat isi catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara DynamoDB dengan Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import
 com.amazonaws.services.lambda.runtime.events.DynamodbEvent.DynamodbStreamRecord;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;

public class example implements RequestHandler<DynamodbEvent, Void> {

    private static final Gson GSON = new GsonBuilder().setPrettyPrinting().create();

    @Override
    public Void handleRequest(DynamodbEvent event, Context context) {
        System.out.println(GSON.toJson(event));
        event.getRecords().forEach(this::logDynamoDBRecord);
        return null;
    }

    private void logDynamoDBRecord(DynamodbStreamRecord record) {
        System.out.println(record.getEventID());
        System.out.println(record.getEventName());
        System.out.println("DynamoDB Record: " + GSON.toJson(record.getDynamodb()));
    }
}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu DynamoDB

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari aliran DynamoDB. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch DynamoDB dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;
import com.amazonaws.services.lambda.runtime.events.models.dynamodb.StreamRecord;

import java.util.ArrayList;
import java.util.List;

public class ProcessDynamodbRecords implements RequestHandler<DynamodbEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(DynamodbEvent input, Context context)
 {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (DynamodbEvent.DynamodbStreamRecord dynamodbStreamRecord :
 input.getRecords()) {
          try {
                //Process your record
                StreamRecord dynamodbRecord = dynamodbStreamRecord.getDynamodb();
                curRecordSequenceNumber = dynamodbRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse();
    }
```

```
}
```

## AWS kontribusi komunitas

Membangun dan menguji aplikasi tanpa server

Contoh kode berikut menunjukkan cara membangun dan menguji aplikasi tanpa server menggunakan API Gateway dengan Lambda dan DynamoDB

SDK untuk Java 2.x

> Menunjukkan cara membangun dan menguji aplikasi tanpa server yang terdiri dari API Gateway dengan Lambda dan DynamoDB menggunakan Java SDK.
>
> Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.
>
> Layanan yang digunakan dalam contoh ini
>
> - API Gateway
> - DynamoDB
> - Lambda

# Contoh Amazon EC2 menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon EC2. AWS SDK for Java 2.x

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


## Memulai

Halo Amazon EC2

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon EC2.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously describes the security groups for the specified group ID.
    *
    * @param groupName the name of the security group to describe
    * @return a {@link CompletableFuture} that represents the asynchronous
operation
    *         of describing the security groups. The future will complete with a
    *         {@link DescribeSecurityGroupsResponse} object that contains the
    *         security group information.
    */
   public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
       DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
           .groupNames(groupName)
```

```
            .build();

        DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
        AtomicReference<String> groupIdRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.securityGroups().stream()
                .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
                .findFirst()
                .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
        }).thenApply(v -> {
            String groupId = groupIdRef.get();
            if (groupId == null) {
                throw new RuntimeException("No security group found with the name: "
+ groupName);
            }
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }
```

- Untuk detail API, lihat DescribeSecurityGroupsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Membuat pasangan kunci dan grup keamanan.
- Memilih Amazon Machine Image (AMI) dan tipe instans yang kompatibel, lalu membuat instans.
- Menghentikan dan memulai ulang instans.
- Kaitkan alamat IP Elastis dengan instans Anda.
- Menghubungkan instans Anda dengan SSH, lalu membersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario di prompt perintah.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DescribeKeyPairsResponse;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressResponse;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathResponse;
import software.amazon.awssdk.services.ssm.model.Parameter;

import java.net.InetAddress;
import java.net.UnknownHostException;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Creates an RSA key pair and saves the private key data as a .pem file.
 * 2. Lists key pairs.
 * 3. Creates a security group for the default VPC.
 * 4. Displays security group information.
 * 5. Gets a list of Amazon Linux 2 AMIs and selects one.
```

```
 * 6. Gets additional information about the image.
 * 7. Gets a list of instance types that are compatible with the selected AMI's
 * architecture.
 * 8. Creates an instance with the key pair, security group, AMI, and an
 * instance type.
 * 9. Displays information about the instance.
 * 10. Stops the instance and waits for it to stop.
 * 11. Starts the instance and waits for it to start.
 * 12. Allocates an Elastic IP address and associates it with the instance.
 * 13. Displays SSH connection info for the instance.
 * 14. Disassociates and deletes the Elastic IP address.
 * 15. Terminates the instance and waits for it to terminate.
 * 16. Deletes the security group.
 * 17. Deletes the key pair.
 */
public class EC2Scenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger = LoggerFactory.getLogger(EC2Scenario.class);
    public static void main(String[] args) throws InterruptedException,
 UnknownHostException {

        logger.info("""
            Usage:
               <keyName> <fileName> <groupName> <groupDesc>

            Where:
               keyName -  A key pair name (for example, TestKeyPair).\s
               fileName -  A file name where the key information is written to.\s
               groupName - The name of the security group.\s
               groupDesc - The description of the security group.\s
            """);

        Scanner scanner = new Scanner(System.in);
        EC2Actions ec2Actions = new EC2Actions();

        String keyName = "TestKeyPair7" ;
        String fileName = "ec2Key.pem";
        String groupName = "TestSecGroup7" ;
        String groupDesc = "Test Group" ;
        String vpcId = ec2Actions.describeFirstEC2VpcAsync().join().vpcId();
        InetAddress localAddress = InetAddress.getLocalHost();
        String myIpAddress = localAddress.getHostAddress();
```

```
        logger.info("""
            Amazon Elastic Compute Cloud (EC2) is a web service that provides
 secure, resizable compute
            capacity in the cloud. It allows developers and organizations to easily
 launch and manage
            virtual server instances, known as EC2 instances, to run their
 applications.

            EC2 provides a wide range of instance types, each with different
 compute, memory,
            and storage capabilities, to meet the diverse needs of various
 workloads. Developers
            can choose the appropriate instance type based on their application's
 requirements,
            such as high-performance computing, memory-intensive tasks, or GPU-
accelerated workloads.

            The `Ec2AsyncClient` interface in the AWS SDK for Java 2.x provides a
 set of methods to
            programmatically interact with the Amazon EC2 service. This allows
 developers to
            automate the provisioning, management, and monitoring of EC2 instances
 as part of their
            application deployment pipelines. With EC2, teams can focus on building
 and deploying
            their applications without having to worry about the underlying
 infrastructure
            required to host and manage physical servers.

            This scenario walks you through how to perform key operations for this
 service.
            Let's get started...
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create an RSA key pair and save the private key material as
 a .pem file.");
        logger.info("""
            An RSA key pair for Amazon EC2 is a security mechanism used to
 authenticate and secure
```

```
            access to your EC2 instances. It consists of a public key and a private
key,
            which are generated as a pair.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<CreateKeyPairResponse> future =
ec2Actions.createKeyPairAsync(keyName, fileName);
            CreateKeyPairResponse response = future.join();
            logger.info("Key Pair successfully created. Key Fingerprint: " +
response.keyFingerprint());

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                if (ec2Ex.getMessage().contains("already exists")) {
                    // Key pair already exists.
                    logger.info("The key pair '" + keyName + "' already exists.
Moving on...");
                } else {
                    logger.info("EC2 error occurred: Error message: {}, Error code
{}", ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                    return;
                }
            } else {
                logger.info("An unexpected error occurred: " + (rt.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. List key pairs.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<DescribeKeyPairsResponse> future =
ec2Actions.describeKeysAsync();
            DescribeKeyPairsResponse keyPairsResponse = future.join();
            keyPairsResponse.keyPairs().forEach(keyPair -> logger.info(
                "Found key pair with name {} and fingerprint {}",
                keyPair.keyName(),
                keyPair.keyFingerprint()));
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Error message: {}, Error code {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rt.getMessage()));
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a security group.");
        logger.info("""
            An AWS EC2 Security Group is a virtual firewall that controls the
            inbound and outbound traffic to an EC2 instance. It acts as a first
line
            of defense for your EC2 instances, allowing you to specify the rules
that
            govern the network traffic entering and leaving your instances.
           """);
        waitForInputToContinue(scanner);
        String groupId = "";
        try {
            CompletableFuture<String> future =
ec2Actions.createSecurityGroupAsync(groupName, groupDesc, vpcId, myIpAddress);
            future.join();
            logger.info("Created security group") ;

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                if (ec2Ex.awsErrorDetails().errorMessage().contains("already
exists")) {
                    logger.info("The Security Group already exists. Moving on...");
                } else {
                    logger.error("An unexpected error occurred: {}",
ec2Ex.awsErrorDetails().errorMessage());
                    return;
                }
```

```
            } else {
                logger.error("An unexpected error occurred: {}",
cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Display security group information for the new security
group.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
ec2Actions.describeSecurityGroupArnByNameAsync(groupName);
            groupId = future.join();
            logger.info("The security group Id is "+groupId);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                String errorCode = ec2Ex.awsErrorDetails().errorCode();
                if ("InvalidGroup.NotFound".equals(errorCode)) {
                    logger.info("Security group '{}' does not exist. Error Code:
{}", groupName, errorCode);
                } else {
                    logger.info("EC2 error occurred: Message {}, Error Code: {}",
ec2Ex.getMessage(), errorCode);
                }
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Get a list of Amazon Linux 2 AMIs and select one with amzn2
in the name.");
        logger.info("""
            An Amazon EC2 AMI (Amazon Machine Image) is a pre-configured virtual
machine image that
```

```
            serves as a template for launching EC2 instances. It contains all the
necessary software and
            configurations required to run an application or operating system on an
EC2 instance.
            """);
        waitForInputToContinue(scanner);
        String instanceAMI="";
        try {
            CompletableFuture<GetParametersByPathResponse> future =
ec2Actions.getParaValuesAsync();
            GetParametersByPathResponse pathResponse = future.join();
            List<Parameter> parameterList = pathResponse.parameters();
            for (Parameter para : parameterList) {
                if (filterName(para.name())) {
                    instanceAMI = para.value();
                    break;
                }
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info("The AMI value with amzn2 is: {}", instanceAMI);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Get the (Amazon Machine Image) AMI value from the amzn2
image.");
        logger.info("""
           An AMI value represents a specific version of a virtual machine (VM) or
server image.
           It uniquely identifies a particular version of an EC2 instance, including
its operating system,
           pre-installed software, and any custom configurations. This allows you to
consistently deploy the same
           VM image across your infrastructure.
```

```
            """);
        waitForInputToContinue(scanner);
        String amiValue;
        try {
            CompletableFuture<String> future =
ec2Actions.describeImageAsync(instanceAMI);
            amiValue = future.join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof Ec2Exception) {
                Ec2Exception ec2Ex = (Ec2Exception) cause;
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Retrieves an instance type available in the current AWS
region.");
        waitForInputToContinue(scanner);
        String instanceType;
        try {
            CompletableFuture<String> future = ec2Actions.getInstanceTypesAsync();
            instanceType = future.join();
            if (!instanceType.isEmpty()) {
                logger.info("Found instance type: " + instanceType);
            } else {
                logger.info("Desired instance type not found.");
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
```

```
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Create an Amazon EC2 instance using the key pair, the
instance type, the security group, and the EC2 AMI value.");
        logger.info("Once the EC2 instance is created, it is placed into a running
state.");
        waitForInputToContinue(scanner);
        String newInstanceId;
        try {
            CompletableFuture<String> future =
ec2Actions.runInstanceAsync(instanceType, keyName, groupName, amiValue);
            newInstanceId = future.join();
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception) {
                Ec2Exception ec2Ex = (Ec2Exception) cause;
                switch (ec2Ex.awsErrorDetails().errorCode()) {
                    case "InvalidParameterValue":
                        logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    case "InsufficientInstanceCapacity":
                        // Handle insufficient instance capacity.
                        logger.info("Insufficient instance capacity: {}, {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    case "InvalidGroup.NotFound":
                        // Handle security group not found.
                        logger.info("Security group not found: {},{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                    default:
                        logger.info("EC2 error occurred: {} (Code: {}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                        break;
                }
                return;
            } else {
```

```
                logger.info("An unexpected error occurred: {}", (cause != null ?
cause.getMessage() : rt.getMessage()));
                return;
            }
        }
        logger.info("The instance Id is " + newInstanceId);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Display information about the running instance. ");

        waitForInputToContinue(scanner);
        String publicIp;
        try {
            CompletableFuture<String> future =
ec2Actions.describeEC2InstancesAsync(newInstanceId);
            publicIp = future.join();
            logger.info("EC2 instance public IP {}", publicIp);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }

        }
        logger.info("You can SSH to the instance using this command:");
        logger.info("ssh -i " + fileName + " ec2-user@" + publicIp);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Stop the instance using a waiter (this may take a few
mins).");
        // Remove the 2nd one
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
ec2Actions.stopInstanceAsync(newInstanceId);
```

```
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("11. Start the instance using a waiter (this may take a few
mins).");
        try {
            CompletableFuture<Void> future =
ec2Actions.startInstanceAsync(newInstanceId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("12. Allocate an Elastic IP address and associate it with the
instance.");
        logger.info("""
```

```
            An Elastic IP address is a static public IP address that you can
associate with your EC2 instance.
            This allows you to have a fixed, predictable IP address that remains the
same even if your instance
            is stopped, terminated, or replaced.
            This is particularly useful for applications or services that need to be
accessed consistently from a
            known IP address.

            An EC2 Allocation ID (also known as a Reserved Instance Allocation
ID) is a unique identifier associated with a Reserved Instance (RI) that you have
purchased in AWS.

            When you purchase a Reserved Instance, AWS assigns a unique Allocation
ID to it.
            This Allocation ID is used to track and identify the specific RI you
have purchased,
            and it is important for managing and monitoring your Reserved Instances.

            """);

        waitForInputToContinue(scanner);
        String allocationId;
        try {
            CompletableFuture<String> future = ec2Actions.allocateAddressAsync();
            allocationId = future.join();
            logger.info("Successfully allocated address with ID: " +allocationId);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info("The allocation Id value is " + allocationId);
        waitForInputToContinue(scanner);
        String associationId;
        try {
            CompletableFuture<String> future =
ec2Actions.associateAddressAsync(newInstanceId, allocationId);
```

```
            associationId = future.join();
            logger.info("Successfully associated address with ID: " +associationId);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("13. Describe the instance again. Note that the public IP
address has changed");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
ec2Actions.describeEC2InstancesAsync(newInstanceId);
            publicIp = future.join();
            logger.info("EC2 instance public IP: " + publicIp);
            logger.info("You can SSH to the instance using this command:");
            logger.info("ssh -i " + fileName + " ec2-user@" + publicIp);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("14. Disassociate and release the Elastic IP address.");
        waitForInputToContinue(scanner);
```

```
        try {
            CompletableFuture<DisassociateAddressResponse> future =
ec2Actions.disassociateAddressAsync(associationId);
            future.join();
            logger.info("Address successfully disassociated.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<ReleaseAddressResponse> future =
ec2Actions.releaseEC2AddressAsync(allocationId);
            future.join(); // Wait for the operation to complete
            logger.info("Elastic IP address successfully released.");
        } catch (RuntimeException rte) {
            logger.info("An unexpected error occurred: {}", rte.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("15. Terminate the instance and use a waiter (this may take a
few mins).");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future =
ec2Actions.terminateEC2Async(newInstanceId);
            future.join();
            logger.info("EC2 instance successfully terminated.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                // Handle EC2 exceptions.
```

```
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("16. Delete the security group.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
ec2Actions.deleteEC2SecGroupAsync(groupId);
            future.join();
            logger.info("Security group successfully deleted.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("17. Delete the key.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<DeleteKeyPairResponse> future =
ec2Actions.deleteKeysAsync(keyName);
            future.join();
            logger.info("Successfully deleted key pair named " + keyName);
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof Ec2Exception ec2Ex) {
```

```
                logger.info("EC2 error occurred: Message {}, Error Code:{}",
 ec2Ex.getMessage(), ec2Ex.awsErrorDetails().errorCode());
                return;
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage());
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("You successfully completed the Amazon EC2 scenario.");
        logger.info(DASHES);
    }
    public static boolean filterName(String name) {
        String[] parts = name.split("/");
        String myValue = parts[4];
        return myValue.contains("amzn2");
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Menentukan kelas yang menggabungkan tindakan EC2.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.AllocateAddressRequest;
import software.amazon.awssdk.services.ec2.model.AllocateAddressResponse;
import software.amazon.awssdk.services.ec2.model.AssociateAddressRequest;
import software.amazon.awssdk.services.ec2.model.AssociateAddressResponse;
import
 software.amazon.awssdk.services.ec2.model.AuthorizeSecurityGroupIngressRequest;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairRequest;
import software.amazon.awssdk.services.ec2.model.CreateKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.CreateSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairRequest;
import software.amazon.awssdk.services.ec2.model.DeleteKeyPairResponse;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupRequest;
import software.amazon.awssdk.services.ec2.model.DeleteSecurityGroupResponse;
import software.amazon.awssdk.services.ec2.model.DescribeImagesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstanceTypesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstanceTypesResponse;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeKeyPairsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeSecurityGroupsResponse;
import software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressRequest;
import software.amazon.awssdk.services.ec2.model.DisassociateAddressResponse;
import software.amazon.awssdk.services.ec2.model.DomainType;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Filter;
import software.amazon.awssdk.services.ec2.model.InstanceTypeInfo;
import software.amazon.awssdk.services.ec2.model.IpPermission;
import software.amazon.awssdk.services.ec2.model.IpRange;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressRequest;
import software.amazon.awssdk.services.ec2.model.ReleaseAddressResponse;
import software.amazon.awssdk.services.ec2.model.RunInstancesRequest;
import software.amazon.awssdk.services.ec2.model.RunInstancesResponse;
import software.amazon.awssdk.services.ec2.model.StopInstancesRequest;
import software.amazon.awssdk.services.ec2.model.StartInstancesRequest;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesRequest;
import software.amazon.awssdk.services.ec2.model.Vpc;
import software.amazon.awssdk.services.ec2.paginators.DescribeImagesPublisher;
```

```
import software.amazon.awssdk.services.ec2.paginators.DescribeInstancesPublisher;
import
 software.amazon.awssdk.services.ec2.paginators.DescribeSecurityGroupsPublisher;
import software.amazon.awssdk.services.ec2.paginators.DescribeVpcsPublisher;
import software.amazon.awssdk.services.ec2.waiters.Ec2AsyncWaiter;
import software.amazon.awssdk.services.ssm.SsmAsyncClient;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathRequest;
import software.amazon.awssdk.services.ssm.model.GetParametersByPathResponse;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesResponse;
import java.io.BufferedWriter;
import java.io.FileWriter;
import java.io.IOException;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;
import java.util.concurrent.atomic.AtomicReference;

public class EC2Actions {
    private static final Logger logger = LoggerFactory.getLogger(EC2Actions.class);
    private static Ec2AsyncClient ec2AsyncClient;

    /**
     * Retrieves an asynchronous Amazon Elastic Container Registry (ECR) client.
     *
     * @return the configured ECR asynchronous client.
     */
    private static Ec2AsyncClient getAsyncClient() {
        if (ec2AsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
 responses.
             */
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
```

```
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .build();

            ec2AsyncClient = Ec2AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return ec2AsyncClient;
    }

    /**
     * Deletes a key pair asynchronously.
     *
     * @param keyPair the name of the key pair to delete
     * @return a {@link CompletableFuture} that represents the result of the
asynchronous operation.
     *         The {@link CompletableFuture} will complete with a {@link
DeleteKeyPairResponse} object
     *         that provides the result of the key pair deletion operation.
     */
    public CompletableFuture<DeleteKeyPairResponse> deleteKeysAsync(String keyPair)
{
        DeleteKeyPairRequest request = DeleteKeyPairRequest.builder()
            .keyName(keyPair)
            .build();

        // Initiate the asynchronous request to delete the key pair.
        CompletableFuture<DeleteKeyPairResponse> response =
getAsyncClient().deleteKeyPair(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete key pair: " + keyPair,
ex);
            } else if (resp == null) {
```

```
                throw new RuntimeException("No response received for deleting key
pair: " + keyPair);
            }
        });
    }

    /**
     * Deletes an EC2 security group asynchronously.
     *
     * @param groupId the ID of the security group to delete
     * @return a CompletableFuture that completes when the security group is deleted
     */
    public CompletableFuture<Void> deleteEC2SecGroupAsync(String groupId) {
        DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
            .groupId(groupId)
            .build();

        CompletableFuture<DeleteSecurityGroupResponse> response =
getAsyncClient().deleteSecurityGroup(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete security group with Id
" + groupId, ex);
            } else if (resp == null) {
                throw new RuntimeException("No response received for deleting
security group with Id " + groupId);
            }
        }).thenApply(resp -> null);
    }

    /**
     * Terminates an EC2 instance asynchronously and waits for it to reach the
terminated state.
     *
     * @param instanceId the ID of the EC2 instance to terminate
     * @return a {@link CompletableFuture} that completes when the instance has been
terminated
     * @throws RuntimeException if there is no response from the AWS SDK or if there
is a failure during the termination process
     */
    public CompletableFuture<Object> terminateEC2Async(String instanceId) {
        TerminateInstancesRequest terminateRequest =
TerminateInstancesRequest.builder()
            .instanceIds(instanceId)
```

```
            .build();

        CompletableFuture<TerminateInstancesResponse> responseFuture =
getAsyncClient().terminateInstances(terminateRequest);
        return responseFuture.thenCompose(terminateResponse -> {
            if (terminateResponse == null) {
                throw new RuntimeException("No response received for terminating
instance " + instanceId);
            }
            System.out.println("Going to terminate an EC2 instance and use a waiter
to wait for it to be in terminated state");
            return getAsyncClient().waiter()
                .waitUntilInstanceTerminated(r -> r.instanceIds(instanceId))
                .thenApply(waiterResponse -> null);
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to terminate EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }

    /**
     * Releases an Elastic IP address asynchronously.
     *
     * @param allocId the allocation ID of the Elastic IP address to be released
     * @return a {@link CompletableFuture} representing the asynchronous operation
of releasing the Elastic IP address
     */
    public CompletableFuture<ReleaseAddressResponse> releaseEC2AddressAsync(String
allocId) {
        ReleaseAddressRequest request = ReleaseAddressRequest.builder()
            .allocationId(allocId)
            .build();

        CompletableFuture<ReleaseAddressResponse> response =
getAsyncClient().releaseAddress(request);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to release Elastic IP address",
ex);
            }
        });

        return response;
```

```
    }

    /**
     * Disassociates an Elastic IP address from an instance asynchronously.
     *
     * @param associationId The ID of the association you want to disassociate.
     * @return a {@link CompletableFuture} representing the asynchronous operation
of disassociating the address. The
     *         {@link CompletableFuture} will complete with a {@link
DisassociateAddressResponse} when the operation is
     *         finished.
     * @throws RuntimeException if the disassociation of the address fails.
     */
    public CompletableFuture<DisassociateAddressResponse>
disassociateAddressAsync(String associationId) {
        Ec2AsyncClient ec2 = getAsyncClient();
        DisassociateAddressRequest addressRequest =
DisassociateAddressRequest.builder()
            .associationId(associationId)
            .build();

        // Disassociate the address asynchronously.
        CompletableFuture<DisassociateAddressResponse> response =
ec2.disassociateAddress(addressRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to disassociate address", ex);
            }
        });

        return response;
    }

    /**
     * Associates an Elastic IP address with an EC2 instance asynchronously.
     *
     * @param instanceId    the ID of the EC2 instance to associate the Elastic IP
address with
     * @param allocationId  the allocation ID of the Elastic IP address to associate
     * @return a {@link CompletableFuture} that completes with the association ID
when the operation is successful,
     *         or throws a {@link RuntimeException} if the operation fails
     */
```

```
   public CompletableFuture<String> associateAddressAsync(String instanceId, String
allocationId) {
       AssociateAddressRequest associateRequest = AssociateAddressRequest.builder()
           .instanceId(instanceId)
           .allocationId(allocationId)
           .build();

       CompletableFuture<AssociateAddressResponse> responseFuture =
getAsyncClient().associateAddress(associateRequest);
       return responseFuture.thenApply(response -> {
           if (response.associationId() != null) {
               return response.associationId();
           } else {
               throw new RuntimeException("Association ID is null after associating
address.");
           }
       }).whenComplete((result, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to associate address", ex);
           }
       });
   }

   /**
    * Allocates an Elastic IP address asynchronously in the VPC domain.
    *
    * @return a {@link CompletableFuture} containing the allocation ID of the
allocated Elastic IP address
    */
   public CompletableFuture<String> allocateAddressAsync() {
       AllocateAddressRequest allocateRequest = AllocateAddressRequest.builder()
           .domain(DomainType.VPC)
           .build();

       CompletableFuture<AllocateAddressResponse> responseFuture =
getAsyncClient().allocateAddress(allocateRequest);
       return
responseFuture.thenApply(AllocateAddressResponse::allocationId).whenComplete((result,
ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to allocate address", ex);
           }
       });
   }
```

```
   /**
    * Asynchronously describes the state of an EC2 instance.
    * The paginator helps you iterate over multiple pages of results.
    *
    * @param newInstanceId the ID of the EC2 instance to describe
    * @return a {@link CompletableFuture} that, when completed, contains a string
describing the state of the EC2 instance
    */
   public CompletableFuture<String> describeEC2InstancesAsync(String newInstanceId)
{
       DescribeInstancesRequest request = DescribeInstancesRequest.builder()
           .instanceIds(newInstanceId)
           .build();

       DescribeInstancesPublisher paginator =
getAsyncClient().describeInstancesPaginator(request);
       AtomicReference<String> publicIpAddressRef = new AtomicReference<>();
       return paginator.subscribe(response -> {
           response.reservations().stream()
               .flatMap(reservation -> reservation.instances().stream())
               .filter(instance -> instance.instanceId().equals(newInstanceId))
               .findFirst()
               .ifPresent(instance ->
publicIpAddressRef.set(instance.publicIpAddress()));
       }).thenApply(v -> {
           String publicIpAddress = publicIpAddressRef.get();
           if (publicIpAddress == null) {
               throw new RuntimeException("Instance with ID " + newInstanceId + "
not found.");
           }
           return publicIpAddress;
       }).exceptionally(ex -> {
           logger.info("Failed to describe instances: " + ex.getMessage());
           throw new RuntimeException("Failed to describe instances", ex);
       });
   }

   /**
    * Runs an EC2 instance asynchronously.
    *
    * @param instanceType The instance type to use for the EC2 instance.
    * @param keyName The name of the key pair to associate with the EC2 instance.
```

```
    * @param groupName The name of the security group to associate with the EC2
instance.
    * @param amiId The ID of the Amazon Machine Image (AMI) to use for the EC2
instance.
    * @return A {@link CompletableFuture} that completes with the ID of the started
EC2 instance.
    * @throws RuntimeException If there is an error running the EC2 instance.
    */
   public CompletableFuture<String> runInstanceAsync(String instanceType, String
keyName, String groupName, String amiId) {
       RunInstancesRequest runRequest = RunInstancesRequest.builder()
           .instanceType(instanceType)
           .keyName(keyName)
           .securityGroups(groupName)
           .maxCount(1)
           .minCount(1)
           .imageId(amiId)
           .build();

       CompletableFuture<RunInstancesResponse> responseFuture =
getAsyncClient().runInstances(runRequest);
       return responseFuture.thenCompose(response -> {
           String instanceIdVal = response.instances().get(0).instanceId();
           System.out.println("Going to start an EC2 instance and use a waiter to
wait for it to be in running state");
           return getAsyncClient().waiter()
               .waitUntilInstanceExists(r -> r.instanceIds(instanceIdVal))
               .thenCompose(waitResponse -> getAsyncClient().waiter()
                   .waitUntilInstanceRunning(r -> r.instanceIds(instanceIdVal))
                   .thenApply(runningResponse -> instanceIdVal));
       }).exceptionally(throwable -> {
           // Handle any exceptions that occurred during the async call
           throw new RuntimeException("Failed to run EC2 instance: " +
throwable.getMessage(), throwable);
       });
   }

   /**
    * Asynchronously retrieves the instance types available in the current AWS
region.
    * <p>
    * This method uses the AWS SDK's asynchronous API to fetch the available
instance types
```

```
    * and then processes the response. It logs the memory information, network
information,
    * and instance type for each instance type returned. Additionally, it returns a
    * {@link CompletableFuture} that resolves to the instance type string for the
"t2.2xlarge"
    * instance type, if it is found in the response. If the "t2.2xlarge" instance
type is not
    * found, an empty string is returned.
    * </p>
    *
    * @return a {@link CompletableFuture} that resolves to the instance type string
for the
    * "t2.2xlarge" instance type, or an empty string if the instance type is not
found
    */
   public CompletableFuture<String> getInstanceTypesAsync() {
       DescribeInstanceTypesRequest typesRequest =
DescribeInstanceTypesRequest.builder()
           .maxResults(10)
           .build();

       CompletableFuture<DescribeInstanceTypesResponse> response =
getAsyncClient().describeInstanceTypes(typesRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               List<InstanceTypeInfo> instanceTypes = resp.instanceTypes();
               for (InstanceTypeInfo type : instanceTypes) {
                   logger.info("The memory information of this type is " +
type.memoryInfo().sizeInMiB());
                   logger.info("Network information is " +
type.networkInfo().toString());
                   logger.info("Instance type is " +
type.instanceType().toString());
               }
           } else {
               throw (RuntimeException) ex;
           }
       });

       return response.thenApply(resp -> {
           for (InstanceTypeInfo type : resp.instanceTypes()) {
               String instanceType = type.instanceType().toString();
               if (instanceType.equals("t2.2xlarge")) {
                   return instanceType;
```

```
                }
            }
            return "";
        });
    }

    /**
     * Asynchronously describes an AWS EC2 image with the specified image ID.
     *
     * @param imageId the ID of the image to be described
     * @return a {@link CompletableFuture} that, when completed, contains the ID of
the described image
     * @throws RuntimeException if no images are found with the provided image ID,
or if an error occurs during the AWS API call
     */
    public CompletableFuture<String> describeImageAsync(String imageId) {
        DescribeImagesRequest imagesRequest = DescribeImagesRequest.builder()
            .imageIds(imageId)
            .build();

        AtomicReference<String> imageIdRef = new AtomicReference<>();
        DescribeImagesPublisher paginator =
getAsyncClient().describeImagesPaginator(imagesRequest);
        return paginator.subscribe(response -> {
            response.images().stream()
                .filter(image -> image.imageId().equals(imageId))
                .findFirst()
                .ifPresent(image -> {
                    logger.info("The description of the image is " +
image.description());
                    logger.info("The name of the image is " + image.name());
                    imageIdRef.set(image.imageId());
                });
        }).thenApply(v -> {
            String id = imageIdRef.get();
            if (id == null) {
                throw new RuntimeException("No images found with the provided image
ID.");
            }
            return id;
        }).exceptionally(ex -> {
            logger.info("Failed to describe image: " + ex.getMessage());
            throw new RuntimeException("Failed to describe image", ex);
        });
```

```
    }

    /**
     * Retrieves the parameter values asynchronously using the AWS Systems Manager
(SSM) API.
     *
     * @return a {@link CompletableFuture} that holds the response from the SSM API
call to get parameters by path
     */
    public CompletableFuture<GetParametersByPathResponse> getParaValuesAsync() {
        SsmAsyncClient ssmClient = SsmAsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        GetParametersByPathRequest parameterRequest =
GetParametersByPathRequest.builder()
            .path("/aws/service/ami-amazon-linux-latest")
            .build();

        // Create a CompletableFuture to hold the final result.
        CompletableFuture<GetParametersByPathResponse> responseFuture = new
CompletableFuture<>();
        ssmClient.getParametersByPath(parameterRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    responseFuture.completeExceptionally(new
RuntimeException("Failed to get parameters by path", exception));
                } else {
                    responseFuture.complete(response);
                }
            });

        return responseFuture;
    }


    /**
     * Asynchronously describes the security groups for the specified group ID.
     *
     * @param groupName the name of the security group to describe
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of describing the security groups. The future will complete with a
     *         {@link DescribeSecurityGroupsResponse} object that contains the
```

```
     *         security group information.
     */
    public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
        DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
            .groupNames(groupName)
            .build();

        DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
        AtomicReference<String> groupIdRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.securityGroups().stream()
                .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
                .findFirst()
                .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
        }).thenApply(v -> {
            String groupId = groupIdRef.get();
            if (groupId == null) {
                throw new RuntimeException("No security group found with the name: "
+ groupName);
            }
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }

    /**
     * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
     * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
     *
     * @param groupName    the name of the security group to create
     * @param groupDesc    the description of the security group
     * @param vpcId        the ID of the VPC in which to create the security group
     * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
     *                     any IP address in the 192.168.1.0/24 subnet)
```

```
    * @return a CompletableFuture that, when completed, returns the ID of the
created security group
    * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
    */
   public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
       CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
           .groupName(groupName)
           .description(groupDesc)
           .vpcId(vpcId)
           .build();

       return getAsyncClient().createSecurityGroup(createRequest)
           .thenCompose(createResponse -> {
               String groupId = createResponse.groupId();
               IpRange ipRange = IpRange.builder()
                   .cidrIp(myIpAddress + "/32")
                   .build();

               IpPermission ipPerm = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(80)
                   .fromPort(80)
                   .ipRanges(ipRange)
                   .build();

               IpPermission ipPerm2 = IpPermission.builder()
                   .ipProtocol("tcp")
                   .toPort(22)
                   .fromPort(22)
                   .ipRanges(ipRange)
                   .build();

               AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                   .groupName(groupName)
                   .ipPermissions(ipPerm, ipPerm2)
                   .build();

               return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                   .thenApply(authResponse -> groupId);
           })
```

```
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
    }

    /**
     * Asynchronously describes the key pairs associated with the current AWS
account.
     *
     * @return a {@link CompletableFuture} containing the {@link
DescribeKeyPairsResponse} object, which provides
     * information about the key pairs.
     */
    public CompletableFuture<DescribeKeyPairsResponse> describeKeysAsync() {
        CompletableFuture<DescribeKeyPairsResponse> responseFuture =
getAsyncClient().describeKeyPairs();
        responseFuture.whenComplete((response, exception) -> {
            if (exception != null) {
              throw new RuntimeException("Failed to describe key pairs: " +
exception.getMessage(), exception);
            }
        });

        return responseFuture;
    }

    /**
     * Creates a new key pair asynchronously.
     *
     * @param keyName the name of the key pair to create
     * @param fileName the name of the file to write the key material to
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of creating the key pair and writing the key material to a file
     */
```

```
   public CompletableFuture<CreateKeyPairResponse> createKeyPairAsync(String
keyName, String fileName) {
       CreateKeyPairRequest request = CreateKeyPairRequest.builder()
           .keyName(keyName)
           .build();

       CompletableFuture<CreateKeyPairResponse> responseFuture =
getAsyncClient().createKeyPair(request);
       responseFuture.whenComplete((response, exception) -> {
           if (response != null) {
               try {
                   BufferedWriter writer = new BufferedWriter(new
FileWriter(fileName));
                   writer.write(response.keyMaterial());
                   writer.close();
               } catch (IOException e) {
                   throw new RuntimeException("Failed to write key material to
file: " + e.getMessage(), e);
               }
           } else {
               throw new RuntimeException("Failed to create key pair: " +
exception.getMessage(), exception);
           }
       });

       return responseFuture;
   }

   /**
    * Describes the first default VPC asynchronously and using a paginator.
    *
    * @return a {@link CompletableFuture} that, when completed, contains the first
default VPC found.\
    */
   public CompletableFuture<Vpc> describeFirstEC2VpcAsync() {
       Filter myFilter = Filter.builder()
           .name("is-default")
           .values("true")
           .build();

       DescribeVpcsRequest request = DescribeVpcsRequest.builder()
           .filters(myFilter)
           .build();
```

```
        DescribeVpcsPublisher paginator =
getAsyncClient().describeVpcsPaginator(request);
        AtomicReference<Vpc> vpcRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.vpcs().stream()
                .findFirst()
                .ifPresent(vpcRef::set);
        }).thenApply(v -> {
            Vpc vpc = vpcRef.get();
            if (vpc == null) {
                throw new RuntimeException("Default VPC not found");
            }
            return vpc;
        }).exceptionally(ex -> {
            logger.info("Failed to describe VPCs: " + ex.getMessage());
            throw new RuntimeException("Failed to describe VPCs", ex);
        });
    }

    /**
     * Stops the EC2 instance with the specified ID asynchronously and waits for the
instance to stop.
     *
     * @param instanceId the ID of the EC2 instance to stop
     * @return a {@link CompletableFuture} that completes when the instance has been
stopped, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> stopInstanceAsync(String instanceId) {
        StopInstancesRequest stopRequest = StopInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        logger.info("Stopping instance " + instanceId + " and waiting for it to
stop.");
```

```
        getAsyncClient().stopInstances(stopRequest)
            .thenCompose(response -> {
                if (response.stoppingInstances().isEmpty()) {
                    return CompletableFuture.failedFuture(new RuntimeException("No
instances were stopped. Please check the instance ID: " + instanceId));
                }
                return ec2Waiter.waitUntilInstanceStopped(describeRequest);
            })
            .thenAccept(waiterResponse -> {
                logger.info("Successfully stopped instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                logger.error("Failed to stop instance " + instanceId + ": " +
throwable.getMessage(), throwable);
                resultFuture.completeExceptionally(new RuntimeException("Failed to
stop instance: " + throwable.getMessage(), throwable));
                return null;
            });

        return resultFuture;
    }

    /**
     * Starts an Amazon EC2 instance asynchronously and waits until it is in the
"running" state.
     *
     * @param instanceId the ID of the instance to start
     * @return a {@link CompletableFuture} that completes when the instance has been
started and is in the "running" state, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> startInstanceAsync(String instanceId) {
        StartInstancesRequest startRequest = StartInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();
```

```
        logger.info("Starting instance " + instanceId + " and waiting for it to
 run.");
        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        return getAsyncClient().startInstances(startRequest)
            .thenCompose(response ->
                ec2Waiter.waitUntilInstanceRunning(describeRequest)
            )
            .thenAccept(waiterResponse -> {
                logger.info("Successfully started instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                resultFuture.completeExceptionally(new RuntimeException("Failed to
 start instance: " + throwable.getMessage(), throwable));
                return null;
            });
    }

}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AllocateAddress
  - AssociateAddress
  - AuthorizeSecurityGroupIngress
  - CreateKeyPair
  - CreateSecurityGroup
  - DeleteKeyPair
  - DeleteSecurityGroup
  - DescribeImages
  - DescribeInstanceTypes
  - DescribeInstances
  - DescribeKeyPairs
  - DescribeSecurityGroups
  - DisassociateAddress
  - ReleaseAddress

- RunInstances
- StartInstances
- StopInstances
- TerminateInstances
- UnmonitorInstances

## Tindakan

### `AllocateAddress`

Contoh kode berikut menunjukkan cara menggunakan`AllocateAddress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Allocates an Elastic IP address asynchronously in the VPC domain.
    *
    * @return a {@link CompletableFuture} containing the allocation ID of the
allocated Elastic IP address
    */
   public CompletableFuture<String> allocateAddressAsync() {
       AllocateAddressRequest allocateRequest = AllocateAddressRequest.builder()
           .domain(DomainType.VPC)
           .build();

       CompletableFuture<AllocateAddressResponse> responseFuture =
getAsyncClient().allocateAddress(allocateRequest);
       return
responseFuture.thenApply(AllocateAddressResponse::allocationId).whenComplete((result,
ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to allocate address", ex);
           }
       });
```

```
    }
```

- Untuk detail API, lihat AllocateAddressdi Referensi AWS SDK for Java 2.x API.

### `AssociateAddress`

Contoh kode berikut menunjukkan cara menggunakan`AssociateAddress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Associates an Elastic IP address with an EC2 instance asynchronously.
    *
    * @param instanceId    the ID of the EC2 instance to associate the Elastic IP
address with
    * @param allocationId  the allocation ID of the Elastic IP address to associate
    * @return a {@link CompletableFuture} that completes with the association ID
when the operation is successful,
    *         or throws a {@link RuntimeException} if the operation fails
    */
   public CompletableFuture<String> associateAddressAsync(String instanceId, String
allocationId) {
       AssociateAddressRequest associateRequest = AssociateAddressRequest.builder()
           .instanceId(instanceId)
           .allocationId(allocationId)
           .build();

       CompletableFuture<AssociateAddressResponse> responseFuture =
getAsyncClient().associateAddress(associateRequest);
       return responseFuture.thenApply(response -> {
           if (response.associationId() != null) {
               return response.associationId();
           } else {
               throw new RuntimeException("Association ID is null after associating
address.");
```

```
            }
        }).whenComplete((result, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to associate address", ex);
            }
        });
    }
```

- Untuk detail API, lihat AssociateAddressdi Referensi AWS SDK for Java 2.x API.

### `AuthorizeSecurityGroupIngress`

Contoh kode berikut menunjukkan cara menggunakan`AuthorizeSecurityGroupIngress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
     * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
     *
     * @param groupName    the name of the security group to create
     * @param groupDesc    the description of the security group
     * @param vpcId        the ID of the VPC in which to create the security group
     * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
     *                     any IP address in the 192.168.1.0/24 subnet)
     * @return a CompletableFuture that, when completed, returns the ID of the
created security group
     * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
     */
    public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
```

```
        CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
            .groupName(groupName)
            .description(groupDesc)
            .vpcId(vpcId)
            .build();

        return getAsyncClient().createSecurityGroup(createRequest)
            .thenCompose(createResponse -> {
                String groupId = createResponse.groupId();
                IpRange ipRange = IpRange.builder()
                    .cidrIp(myIpAddress + "/32")
                    .build();

                IpPermission ipPerm = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(80)
                    .fromPort(80)
                    .ipRanges(ipRange)
                    .build();

                IpPermission ipPerm2 = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(22)
                    .fromPort(22)
                    .ipRanges(ipRange)
                    .build();

                AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                    .groupName(groupName)
                    .ipPermissions(ipPerm, ipPerm2)
                    .build();

                return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                    .thenApply(authResponse -> groupId);
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
```

```
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
    }
```

- Untuk detail API, lihat AuthorizeSecurityGroupIngressdi Referensi AWS SDK for Java 2.x API.

### `CreateKeyPair`

Contoh kode berikut menunjukkan cara menggunakan`CreateKeyPair`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new key pair asynchronously.
     *
     * @param keyName the name of the key pair to create
     * @param fileName the name of the file to write the key material to
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of creating the key pair and writing the key material to a file
     */
    public CompletableFuture<CreateKeyPairResponse> createKeyPairAsync(String
keyName, String fileName) {
        CreateKeyPairRequest request = CreateKeyPairRequest.builder()
            .keyName(keyName)
            .build();

        CompletableFuture<CreateKeyPairResponse> responseFuture =
getAsyncClient().createKeyPair(request);
        responseFuture.whenComplete((response, exception) -> {
            if (response != null) {
                try {
```

```
                    BufferedWriter writer = new BufferedWriter(new
FileWriter(fileName));
                    writer.write(response.keyMaterial());
                    writer.close();
                } catch (IOException e) {
                    throw new RuntimeException("Failed to write key material to
file: " + e.getMessage(), e);
                }
            } else {
                throw new RuntimeException("Failed to create key pair: " +
exception.getMessage(), exception);
            }
        });

        return responseFuture;
    }
```

- Untuk detail API, lihat CreateKeyPairdi Referensi AWS SDK for Java 2.x API.

### `CreateSecurityGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateSecurityGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new security group asynchronously with the specified group name,
description, and VPC ID. It also
     * authorizes inbound traffic on ports 80 and 22 from the specified IP address.
     *
     * @param groupName    the name of the security group to create
     * @param groupDesc    the description of the security group
     * @param vpcId        the ID of the VPC in which to create the security group
     * @param myIpAddress  the IP address from which to allow inbound traffic (e.g.,
"192.168.1.1/0" to allow traffic from
```

```
     *                      any IP address in the 192.168.1.0/24 subnet)
     * @return a CompletableFuture that, when completed, returns the ID of the
created security group
     * @throws RuntimeException if there was a failure creating the security group
or authorizing the inbound traffic
     */
    public CompletableFuture<String> createSecurityGroupAsync(String groupName,
String groupDesc, String vpcId, String myIpAddress) {
        CreateSecurityGroupRequest createRequest =
CreateSecurityGroupRequest.builder()
            .groupName(groupName)
            .description(groupDesc)
            .vpcId(vpcId)
            .build();

        return getAsyncClient().createSecurityGroup(createRequest)
            .thenCompose(createResponse -> {
                String groupId = createResponse.groupId();
                IpRange ipRange = IpRange.builder()
                    .cidrIp(myIpAddress + "/32")
                    .build();

                IpPermission ipPerm = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(80)
                    .fromPort(80)
                    .ipRanges(ipRange)
                    .build();

                IpPermission ipPerm2 = IpPermission.builder()
                    .ipProtocol("tcp")
                    .toPort(22)
                    .fromPort(22)
                    .ipRanges(ipRange)
                    .build();

                AuthorizeSecurityGroupIngressRequest authRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                    .groupName(groupName)
                    .ipPermissions(ipPerm, ipPerm2)
                    .build();

                return getAsyncClient().authorizeSecurityGroupIngress(authRequest)
                    .thenApply(authResponse -> groupId);
```

```
            })
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    if (exception instanceof CompletionException &&
exception.getCause() instanceof Ec2Exception) {
                        throw (Ec2Exception) exception.getCause();
                    } else {
                        throw new RuntimeException("Failed to create security group:
" + exception.getMessage(), exception);
                    }
                }
            });
    }
```

- Untuk detail API, lihat CreateSecurityGroupdi Referensi AWS SDK for Java 2.x API.

### `DeleteKeyPair`

Contoh kode berikut menunjukkan cara menggunakan`DeleteKeyPair`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a key pair asynchronously.
     *
     * @param keyPair the name of the key pair to delete
     * @return a {@link CompletableFuture} that represents the result of the
asynchronous operation.
     *         The {@link CompletableFuture} will complete with a {@link
DeleteKeyPairResponse} object
     *         that provides the result of the key pair deletion operation.
     */
    public CompletableFuture<DeleteKeyPairResponse> deleteKeysAsync(String keyPair)
{
        DeleteKeyPairRequest request = DeleteKeyPairRequest.builder()
```

```
            .keyName(keyPair)
            .build();

        // Initiate the asynchronous request to delete the key pair.
        CompletableFuture<DeleteKeyPairResponse> response =
getAsyncClient().deleteKeyPair(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete key pair: " + keyPair,
ex);
            } else if (resp == null) {
                throw new RuntimeException("No response received for deleting key
pair: " + keyPair);
            }
        });
    }
```

- Untuk detail API, lihat DeleteKeyPairdi Referensi AWS SDK for Java 2.x API.

### `DeleteSecurityGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteSecurityGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an EC2 security group asynchronously.
     *
     * @param groupId the ID of the security group to delete
     * @return a CompletableFuture that completes when the security group is deleted
     */
    public CompletableFuture<Void> deleteEC2SecGroupAsync(String groupId) {
        DeleteSecurityGroupRequest request = DeleteSecurityGroupRequest.builder()
            .groupId(groupId)
            .build();
```

```
        CompletableFuture<DeleteSecurityGroupResponse> response =
getAsyncClient().deleteSecurityGroup(request);
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to delete security group with Id
" + groupId, ex);
            } else if (resp == null) {
                throw new RuntimeException("No response received for deleting
security group with Id " + groupId);
            }
        }).thenApply(resp -> null);
    }
```

- Untuk detail API, lihat DeleteSecurityGroupdi Referensi AWS SDK for Java 2.x API.

### `DescribeInstanceTypes`

Contoh kode berikut menunjukkan cara menggunakan`DescribeInstanceTypes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously retrieves the instance types available in the current AWS
region.
     * <p>
     * This method uses the AWS SDK's asynchronous API to fetch the available
instance types
     * and then processes the response. It logs the memory information, network
information,
     * and instance type for each instance type returned. Additionally, it returns a
     * {@link CompletableFuture} that resolves to the instance type string for the
"t2.2xlarge"
     * instance type, if it is found in the response. If the "t2.2xlarge" instance
type is not
```

```
    * found, an empty string is returned.
    * </p>
    *
    * @return a {@link CompletableFuture} that resolves to the instance type string
for the
    * "t2.2xlarge" instance type, or an empty string if the instance type is not
found
    */
   public CompletableFuture<String> getInstanceTypesAsync() {
       DescribeInstanceTypesRequest typesRequest =
DescribeInstanceTypesRequest.builder()
           .maxResults(10)
           .build();

       CompletableFuture<DescribeInstanceTypesResponse> response =
getAsyncClient().describeInstanceTypes(typesRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               List<InstanceTypeInfo> instanceTypes = resp.instanceTypes();
               for (InstanceTypeInfo type : instanceTypes) {
                   logger.info("The memory information of this type is " +
type.memoryInfo().sizeInMiB());
                   logger.info("Network information is " +
type.networkInfo().toString());
                   logger.info("Instance type is " +
type.instanceType().toString());
               }
           } else {
               throw (RuntimeException) ex;
           }
       });

       return response.thenApply(resp -> {
           for (InstanceTypeInfo type : resp.instanceTypes()) {
               String instanceType = type.instanceType().toString();
               if (instanceType.equals("t2.2xlarge")) {
                   return instanceType;
               }
           }
           return "";
       });
   }
```

- Untuk detail API, lihat DescribeInstanceTypesdi Referensi AWS SDK for Java 2.x API.

### `DescribeInstances`

Contoh kode berikut menunjukkan cara menggunakan`DescribeInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously describes the state of an EC2 instance.
     * The paginator helps you iterate over multiple pages of results.
     *
     * @param newInstanceId the ID of the EC2 instance to describe
     * @return a {@link CompletableFuture} that, when completed, contains a string
describing the state of the EC2 instance
     */
    public CompletableFuture<String> describeEC2InstancesAsync(String newInstanceId)
{
        DescribeInstancesRequest request = DescribeInstancesRequest.builder()
            .instanceIds(newInstanceId)
            .build();

        DescribeInstancesPublisher paginator =
getAsyncClient().describeInstancesPaginator(request);
        AtomicReference<String> publicIpAddressRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.reservations().stream()
                .flatMap(reservation -> reservation.instances().stream())
                .filter(instance -> instance.instanceId().equals(newInstanceId))
                .findFirst()
                .ifPresent(instance ->
publicIpAddressRef.set(instance.publicIpAddress()));
        }).thenApply(v -> {
            String publicIpAddress = publicIpAddressRef.get();
            if (publicIpAddress == null) {
```

```
                throw new RuntimeException("Instance with ID " + newInstanceId + "
not found.");
            }
            return publicIpAddress;
        }).exceptionally(ex -> {
            logger.info("Failed to describe instances: " + ex.getMessage());
            throw new RuntimeException("Failed to describe instances", ex);
        });
    }
```

- Untuk detail API, lihat DescribeInstancesdi Referensi AWS SDK for Java 2.x API.

### `DescribeKeyPairs`

Contoh kode berikut menunjukkan cara menggunakan`DescribeKeyPairs`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously describes the key pairs associated with the current AWS
account.
     *
     * @return a {@link CompletableFuture} containing the {@link
DescribeKeyPairsResponse} object, which provides
     * information about the key pairs.
     */
    public CompletableFuture<DescribeKeyPairsResponse> describeKeysAsync() {
        CompletableFuture<DescribeKeyPairsResponse> responseFuture =
getAsyncClient().describeKeyPairs();
        responseFuture.whenComplete((response, exception) -> {
            if (exception != null) {
              throw new RuntimeException("Failed to describe key pairs: " +
exception.getMessage(), exception);
            }
        });
```

```
        return responseFuture;
    }
```

- Untuk detail API, lihat DescribeKeyPairsdi Referensi AWS SDK for Java 2.x API.

### `DescribeSecurityGroups`

Contoh kode berikut menunjukkan cara menggunakan`DescribeSecurityGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously describes the security groups for the specified group ID.
     *
     * @param groupName the name of the security group to describe
     * @return a {@link CompletableFuture} that represents the asynchronous
operation
     *         of describing the security groups. The future will complete with a
     *         {@link DescribeSecurityGroupsResponse} object that contains the
     *         security group information.
     */
    public CompletableFuture<String> describeSecurityGroupArnByNameAsync(String
groupName) {
        DescribeSecurityGroupsRequest request =
DescribeSecurityGroupsRequest.builder()
            .groupNames(groupName)
            .build();

        DescribeSecurityGroupsPublisher paginator =
getAsyncClient().describeSecurityGroupsPaginator(request);
        AtomicReference<String> groupIdRef = new AtomicReference<>();
        return paginator.subscribe(response -> {
            response.securityGroups().stream()
```

```
                .filter(securityGroup ->
securityGroup.groupName().equals(groupName))
                .findFirst()
                .ifPresent(securityGroup ->
groupIdRef.set(securityGroup.groupId()));
        }).thenApply(v -> {
            String groupId = groupIdRef.get();
            if (groupId == null) {
                throw new RuntimeException("No security group found with the name: "
+ groupName);
            }
            return groupId;
        }).exceptionally(ex -> {
            logger.info("Failed to describe security group: " + ex.getMessage());
            throw new RuntimeException("Failed to describe security group", ex);
        });
    }
```

- Untuk detail API, lihat DescribeSecurityGroupsdi Referensi AWS SDK for Java 2.x API.

### `DisassociateAddress`

Contoh kode berikut menunjukkan cara menggunakan`DisassociateAddress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Disassociates an Elastic IP address from an instance asynchronously.
     *
     * @param associationId The ID of the association you want to disassociate.
     * @return a {@link CompletableFuture} representing the asynchronous operation
of disassociating the address. The
     *         {@link CompletableFuture} will complete with a {@link
DisassociateAddressResponse} when the operation is
     *         finished.
```

```
     * @throws RuntimeException if the disassociation of the address fails.
     */
    public CompletableFuture<DisassociateAddressResponse>
disassociateAddressAsync(String associationId) {
        Ec2AsyncClient ec2 = getAsyncClient();
        DisassociateAddressRequest addressRequest =
DisassociateAddressRequest.builder()
            .associationId(associationId)
            .build();

        // Disassociate the address asynchronously.
        CompletableFuture<DisassociateAddressResponse> response =
ec2.disassociateAddress(addressRequest);
        response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to disassociate address", ex);
            }
        });

        return response;
    }
```

- Untuk detail API, lihat DisassociateAddressdi Referensi AWS SDK for Java 2.x API.

### `GetPasswordData`

Contoh kode berikut menunjukkan cara menggunakan`GetPasswordData`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ec2.Ec2AsyncClient;
import software.amazon.awssdk.services.ec2.model.*;
import java.util.concurrent.CompletableFuture;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetPasswordData {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <instanceId>

                Where:
                   instanceId - An instance id value that you can obtain from the
 AWS Management Console.\s
             """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        String instanceId = args[0];
        Ec2AsyncClient ec2AsyncClient = Ec2AsyncClient.builder()
            .region(Region.US_EAST_1)
            .build();

        try {
            CompletableFuture<Void> future = getPasswordDataAsync(ec2AsyncClient,
 instanceId);
            future.join();
        } catch (RuntimeException rte) {
            System.err.println("An exception occurred: " + (rte.getCause() != null ?
 rte.getCause().getMessage() : rte.getMessage()));
        }
    }

    /**
     * Fetches the password data for the specified EC2 instance asynchronously.
     *
     * @param ec2AsyncClient the EC2 asynchronous client to use for the request
```

```
     * @param instanceId instanceId the ID of the EC2 instance for which you want to
 fetch the password data
     * @return a {@link CompletableFuture} that completes when the password data has
 been fetched
     * @throws RuntimeException if there was a failure in fetching the password data
     */
    public static CompletableFuture<Void> getPasswordDataAsync(Ec2AsyncClient
 ec2AsyncClient, String instanceId) {
        GetPasswordDataRequest getPasswordDataRequest =
 GetPasswordDataRequest.builder()
            .instanceId(instanceId)
            .build();


        CompletableFuture<GetPasswordDataResponse> response =
 ec2AsyncClient.getPasswordData(getPasswordDataRequest);
        response.whenComplete((getPasswordDataResponse, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to get password data for
 instance: " + instanceId, ex);
            } else if (getPasswordDataResponse == null ||
 getPasswordDataResponse.passwordData().isEmpty()) {
                throw new RuntimeException("No password data found for instance: " +
 instanceId);
            } else {
                String encryptedPasswordData =
 getPasswordDataResponse.passwordData();
                System.out.println("Encrypted Password Data: " +
 encryptedPasswordData);
            }
        });

        return response.thenApply(resp -> null);
    }
}
```

- Untuk detail API, lihat GetPasswordDatadi Referensi AWS SDK for Java 2.x API.

### `ReleaseAddress`

Contoh kode berikut menunjukkan cara menggunakan`ReleaseAddress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Releases an Elastic IP address asynchronously.
    *
    * @param allocId the allocation ID of the Elastic IP address to be released
    * @return a {@link CompletableFuture} representing the asynchronous operation
of releasing the Elastic IP address
    */
   public CompletableFuture<ReleaseAddressResponse> releaseEC2AddressAsync(String
allocId) {
       ReleaseAddressRequest request = ReleaseAddressRequest.builder()
           .allocationId(allocId)
           .build();

       CompletableFuture<ReleaseAddressResponse> response =
getAsyncClient().releaseAddress(request);
       response.whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to release Elastic IP address",
ex);
           }
       });

       return response;
   }
```

- Untuk detail API, lihat ReleaseAddressdi Referensi AWS SDK for Java 2.x API.

### `RunInstances`

Contoh kode berikut menunjukkan cara menggunakan`RunInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Runs an EC2 instance asynchronously.
    *
    * @param instanceType The instance type to use for the EC2 instance.
    * @param keyName The name of the key pair to associate with the EC2 instance.
    * @param groupName The name of the security group to associate with the EC2
instance.
    * @param amiId The ID of the Amazon Machine Image (AMI) to use for the EC2
instance.
    * @return A {@link CompletableFuture} that completes with the ID of the started
EC2 instance.
    * @throws RuntimeException If there is an error running the EC2 instance.
    */
   public CompletableFuture<String> runInstanceAsync(String instanceType, String
keyName, String groupName, String amiId) {
       RunInstancesRequest runRequest = RunInstancesRequest.builder()
           .instanceType(instanceType)
           .keyName(keyName)
           .securityGroups(groupName)
           .maxCount(1)
           .minCount(1)
           .imageId(amiId)
           .build();

       CompletableFuture<RunInstancesResponse> responseFuture =
getAsyncClient().runInstances(runRequest);
       return responseFuture.thenCompose(response -> {
           String instanceIdVal = response.instances().get(0).instanceId();
           System.out.println("Going to start an EC2 instance and use a waiter to
wait for it to be in running state");
           return getAsyncClient().waiter()
               .waitUntilInstanceExists(r -> r.instanceIds(instanceIdVal))
               .thenCompose(waitResponse -> getAsyncClient().waiter()
                   .waitUntilInstanceRunning(r -> r.instanceIds(instanceIdVal))
```

```
                    .thenApply(runningResponse -> instanceIdVal));
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to run EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }
```

- Untuk detail API, lihat RunInstancesdi Referensi AWS SDK for Java 2.x API.

### `StartInstances`

Contoh kode berikut menunjukkan cara menggunakan`StartInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Starts an Amazon EC2 instance asynchronously and waits until it is in the
"running" state.
     *
     * @param instanceId the ID of the instance to start
     * @return a {@link CompletableFuture} that completes when the instance has been
started and is in the "running" state, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> startInstanceAsync(String instanceId) {
        StartInstancesRequest startRequest = StartInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
```

```
            .instanceIds(instanceId)
            .build();

        logger.info("Starting instance " + instanceId + " and waiting for it to
run.");
        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        return getAsyncClient().startInstances(startRequest)
            .thenCompose(response ->
                ec2Waiter.waitUntilInstanceRunning(describeRequest)
            )
            .thenAccept(waiterResponse -> {
                logger.info("Successfully started instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                resultFuture.completeExceptionally(new RuntimeException("Failed to
start instance: " + throwable.getMessage(), throwable));
                return null;
            });
    }
```

- Untuk detail API, lihat StartInstancesdi Referensi AWS SDK for Java 2.x API.

### `StopInstances`

Contoh kode berikut menunjukkan cara menggunakan`StopInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Stops the EC2 instance with the specified ID asynchronously and waits for the
instance to stop.
     *
     * @param instanceId the ID of the EC2 instance to stop
```

```
     * @return a {@link CompletableFuture} that completes when the instance has been
stopped, or exceptionally if an error occurs
     */
    public CompletableFuture<Void> stopInstanceAsync(String instanceId) {
        StopInstancesRequest stopRequest = StopInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        DescribeInstancesRequest describeRequest =
DescribeInstancesRequest.builder()
            .instanceIds(instanceId)
            .build();

        Ec2AsyncWaiter ec2Waiter = Ec2AsyncWaiter.builder()
            .client(getAsyncClient())
            .build();

        CompletableFuture<Void> resultFuture = new CompletableFuture<>();
        logger.info("Stopping instance " + instanceId + " and waiting for it to
stop.");
        getAsyncClient().stopInstances(stopRequest)
            .thenCompose(response -> {
                if (response.stoppingInstances().isEmpty()) {
                    return CompletableFuture.failedFuture(new RuntimeException("No
instances were stopped. Please check the instance ID: " + instanceId));
                }
                return ec2Waiter.waitUntilInstanceStopped(describeRequest);
            })
            .thenAccept(waiterResponse -> {
                logger.info("Successfully stopped instance " + instanceId);
                resultFuture.complete(null);
            })
            .exceptionally(throwable -> {
                logger.error("Failed to stop instance " + instanceId + ": " +
throwable.getMessage(), throwable);
                resultFuture.completeExceptionally(new RuntimeException("Failed to
stop instance: " + throwable.getMessage(), throwable));
                return null;
            });

        return resultFuture;
    }
```

- Untuk detail API, lihat StopInstancesdi Referensi AWS SDK for Java 2.x API.

### `TerminateInstances`

Contoh kode berikut menunjukkan cara menggunakan`TerminateInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Terminates an EC2 instance asynchronously and waits for it to reach the
terminated state.
    *
    * @param instanceId the ID of the EC2 instance to terminate
    * @return a {@link CompletableFuture} that completes when the instance has been
terminated
    * @throws RuntimeException if there is no response from the AWS SDK or if there
is a failure during the termination process
    */
   public CompletableFuture<Object> terminateEC2Async(String instanceId) {
       TerminateInstancesRequest terminateRequest =
TerminateInstancesRequest.builder()
           .instanceIds(instanceId)
           .build();

       CompletableFuture<TerminateInstancesResponse> responseFuture =
getAsyncClient().terminateInstances(terminateRequest);
       return responseFuture.thenCompose(terminateResponse -> {
           if (terminateResponse == null) {
               throw new RuntimeException("No response received for terminating
instance " + instanceId);
           }
           System.out.println("Going to terminate an EC2 instance and use a waiter
to wait for it to be in terminated state");
           return getAsyncClient().waiter()
               .waitUntilInstanceTerminated(r -> r.instanceIds(instanceId))
               .thenApply(waiterResponse -> null);
```

```
        }).exceptionally(throwable -> {
            // Handle any exceptions that occurred during the async call
            throw new RuntimeException("Failed to terminate EC2 instance: " +
throwable.getMessage(), throwable);
        });
    }
```

- Untuk detail API, lihat TerminateInstancesdi Referensi AWS SDK for Java 2.x API.

## Skenario

Membangun dan mengelola layanan yang tangguh

Contoh kode berikut menunjukkan cara membuat layanan web load-balanced yang mengembalikan rekomendasi buku, film, dan lagu. Contoh ini menunjukkan cara layanan tersebut merespons kegagalan, serta cara merestrukturisasi layanan agar lebih tangguh ketika terjadi kegagalan.

- Menggunakan grup Amazon EC2 Auto Scaling untuk membuat instans Amazon Elastic Compute Cloud (Amazon EC2) berdasarkan templat peluncuran dan menyimpan sejumlah instans dalam rentang yang ditentukan.
- Menangani dan mendistribusikan permintaan HTTP dengan Elastic Load Balancing.
- Memantau kondisi instans dalam grup Auto Scaling dan meneruskan permintaan hanya ke instans yang sehat.
- Menjalankan server web Python pada setiap instans EC2 untuk menangani permintaan HTTP. Server web merespons dengan memberikan rekomendasi dan melakukan pemeriksaan kondisi.
- Menyimulasikan layanan yang direkomendasikan dengan tabel Amazon DynamoDB.
- Kontrol respons server web terhadap permintaan dan pemeriksaan kesehatan dengan memperbarui AWS Systems Manager parameter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario interaktif di prompt perintah.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
```

```
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
```

```
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
```

```
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
```

```
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }

        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
```

```
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                        """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();
```

```
        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");
```

```
        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
```

```
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
```

```
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();

                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
```

```
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
    }
}
```

Membuat kelas yang menggabungkan tindakan Penskalaan Otomatis dan Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
```

```
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
```

```
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                                // name.
                .build();

        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
```

```
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
```

```
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
                    .build();

            GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
            String name = response.instanceProfile().instanceProfileName();
            System.out.println(name);

            RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .roleName(roleName)
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(profileRequest);
            DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .build();

            getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
            System.out.println("Deleted instance profile " + profileName);

            DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            // List attached role policies.
            ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                    .listAttachedRolePolicies(role -> role.roleName(roleName));
            List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
            for (AttachedPolicy attachedPolicy : attachedPolicies) {
                DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(attachedPolicy.policyArn())
```

```
                        .build();

                getIAMClient().detachRolePolicy(request);
                System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
            }

            getIAMClient().deleteRole(deleteRoleRequest);
            System.out.println("Instance profile and role deleted.");

        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
```

```
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
                    .build();

            Filter filter1 = Filter.builder()
                    .name("vpc-id")
                    .values(VPC)
                    .build();

            DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                    .filters(filter, filter1)
                    .build();

            DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                    .describeSecurityGroups(securityGroupsRequest);
            String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
            groupInfo.setGroupName(securityGroup);

            for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
                System.out.println("Found security group: " + secGroup.groupId());

                for (IpPermission ipPermission : secGroup.ipPermissions()) {
                    if (ipPermission.fromPort() == port) {
                        System.out.println("Found inbound rule: " + ipPermission);
                        for (IpRange ipRange : ipPermission.ipRanges()) {
                            String cidrIp = ipRange.cidrIp();
                            if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                                System.out.println(cidrIp + " is applicable");
                                portIsOpen = true;
                            }
                        }

                        if (!ipPermission.prefixListIds().isEmpty()) {
                            System.out.println("Prefix lList is applicable");
```

```
                            portIsOpen = true;
                        }

                        if (!portIsOpen) {
                            System.out
                                    .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                            + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {

        // Get availability zones.
        software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
                .builder()
                .build();

        DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
        List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
                .collect(Collectors.toList());

        String availabilityZones = String.join(",", availabilityZoneNames);
        LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
                .launchTemplateName(templateName)
                .version("$Default")
                .build();

        String[] zones = availabilityZones.split(",");
        CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
                .launchTemplate(specification)
                .availabilityZones(zones)
                .maxSize(groupSize)
                .minSize(groupSize)
                .autoScalingGroupName(autoScalingGroupName)
                .build();

        try {
            getAutoScalingClient().createAutoScalingGroup(groupRequest);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
        return zones;
    }

    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();
```

```
        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }

    // Gets data about the instances in the EC2 Auto Scaling group.
    public String getBadInstance(String groupName) {
        DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
                .autoScalingGroupNames(groupName)
                .build();

        DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
        AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
        List<String> instanceIds = autoScalingGroup.instances().stream()
                .map(instance -> instance.instanceId())
                .collect(Collectors.toList());

        String[] instanceIdArray = instanceIds.toArray(new String[0]);
        for (String instanceId : instanceIdArray) {
            System.out.println("Instance ID: " + instanceId);
            return instanceId;
        }
        return "";
    }

    // Gets data about the profile associated with an instance.
    public String getInstanceProfile(String instanceId) {
        Filter filter = Filter.builder()
                .name("instance-id")
                .values(instanceId)
                .build();

        DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
                .builder()
                .filters(filter)
                .build();
```

```
        DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
                .describeIamInstanceProfileAssociations(associationsRequest);
        return response.iamInstanceProfileAssociations().get(0).associationId();
    }

    public void deleteRolesPolicies(String policyName, String roleName, String
 InstanceProfile) {
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();
```

```
                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Membuat kelas yang menggabungkan tindakan Penyeimbangan Beban Elastis.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
 DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
 getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
 DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
 getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
```

```
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
```

```
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
```

```
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
 available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
 loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Membuat kelas yang menggunakan DynamoDB untuk menyimulasikan layanan yang direkomendasikan.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;

    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
 DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
```

```
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();
```

```
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }

    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
```

```
        System.out.println("Added all records to the " + tableName);
    }
}
```

Membuat kelas yang mengabungkan tindakan Systems Manager.

```
public class ParameterHelper {

    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile

- CreateLaunchTemplate
- CreateListener
- CreateLoadBalancer
- CreateTargetGroup
- DeleteAutoScalingGroup
- DeleteInstanceProfile
- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

# Contoh Amazon ECR menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon ECR.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

Halo Amazon ECR

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon ECR.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecr.EcrClient;
import software.amazon.awssdk.services.ecr.model.EcrException;
import software.amazon.awssdk.services.ecr.model.ListImagesRequest;
import software.amazon.awssdk.services.ecr.paginators.ListImagesIterable;

public class HelloECR {

    public static void main(String[] args) {
        final String usage = """
            Usage:    <repositoryName>

            Where:
               repositoryName - The name of the Amazon ECR repository.
```

```
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String repoName = args[0];
        EcrClient ecrClient = EcrClient.builder()
            .region(Region.US_EAST_1)
            .build();

        listImageTags(ecrClient, repoName);
    }
    public static void listImageTags(EcrClient ecrClient, String repoName){
        ListImagesRequest listImagesPaginator = ListImagesRequest.builder()
            .repositoryName(repoName)
            .build();

        ListImagesIterable imagesIterable =
 ecrClient.listImagesPaginator(listImagesPaginator);
        imagesIterable.stream()
            .flatMap(r -> r.imageIds().stream())
            .forEach(image -> System.out.println("The docker image tag is: "
 +image.imageTag()));
    }
}
```

- Untuk detail API, lihat listImages di Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

### Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat repositori Amazon ECR.
- Tetapkan kebijakan repositori.
- Ambil URIs repositori.
- Dapatkan token otorisasi Amazon ECR.

- Tetapkan kebijakan siklus hidup untuk repositori Amazon ECR.
- Dorong gambar Docker ke repositori Amazon ECR.
- Verifikasi keberadaan gambar di repositori Amazon ECR.
- Buat daftar repositori Amazon ECR untuk akun Anda dan dapatkan detailnya.
- Hapus repositori Amazon ECR.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan fitur Amazon ECR.

```
import software.amazon.awssdk.services.ecr.model.EcrException;
import software.amazon.awssdk.services.ecr.model.RepositoryPolicyNotFoundException;

import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code example requires an IAM Role that has permissions to interact with
 the Amazon ECR service.
 *
 * To create an IAM role, see:
 *
 * https://docs.aws.amazon.com/IAM/latest/UserGuide/id_roles_create.html
 *
 * This Java scenario example requires a local docker image named echo-text. Without
 a local image,
 * this Java program will not successfully run. For more information including how
 to create the local
```

```
 * image, see:
 *
 * /scenarios/basics/ecr/README
 *
 */
public class ECRScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    public static void main(String[] args) {
        final String usage = """
            Usage: <iamRoleARN> <accountId>

            Where:
               iamRoleARN - The IAM role ARN that has the necessary permissions to
 access and manage the Amazon ECR repository.
               accountId - Your AWS account number.
            """;

        if (args.length != 2) {
            System.out.println(usage);
            return;
        }

        ECRActions ecrActions = new ECRActions();
        String iamRole = args[0];
        String accountId = args[1];
        String localImageName;

        Scanner scanner = new Scanner(System.in);
        System.out.println("""
             The Amazon Elastic Container Registry (ECR) is a fully-managed Docker
 container registry
             service provided by AWS. It allows developers and organizations to
 securely
             store, manage, and deploy Docker container images.
             ECR provides a simple and scalable way to manage container images
 throughout their lifecycle,
             from building and testing to production deployment.\s

             The `EcrAsyncClient` interface in the AWS SDK for Java 2.x provides a
 set of methods to
             programmatically interact with the Amazon ECR service. This allows
 developers to
             automate the storage, retrieval, and management of container images as
 part of their application
```

```
             deployment pipelines. With ECR, teams can focus on building and
 deploying their
             applications without having to worry about the underlying
 infrastructure required to
             host and manage a container registry.

            This scenario walks you through how to perform key operations for this
 service.
            Let's get started...

            You have two choices:
            1 - Run the entire program.
            2 - Delete an existing Amazon ECR repository named echo-text (created
 from a previous execution of
            this program that did not complete).
            """);

        while (true) {
            String input = scanner.nextLine();
            if (input.trim().equalsIgnoreCase("1")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else if (input.trim().equalsIgnoreCase("2")) {
                String repoName = "echo-text";
                ecrActions.deleteECRRepository(repoName);
                return;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("""
           1. Create an ECR repository.

           The first task is to ensure we have a local Docker image named echo-
text.
           If this image exists, then an Amazon ECR repository is created.

           An ECR repository is a private Docker container repository provided
```

```
            by Amazon Web Services (AWS). It is a managed service that makes it easy
            to store, manage, and deploy Docker container images.\s
            """ );

        // Ensure that a local docker image named echo-text exists.
        boolean doesExist = ecrActions.isEchoTextImagePresent();
        String repoName;
        if (!doesExist){
            System.out.println("The local image named echo-text does not exist");
            return;
        } else {
            localImageName = "echo-text";
            repoName = "echo-text";
        }

        try {
            String repoArn = ecrActions.createECRRepository(repoName);
            System.out.println("The ARN of the ECR repository is " + repoArn);

        } catch (IllegalArgumentException e) {
            System.err.println("Invalid repository name: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while creating the ECR repository:
" + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        2. Set an ECR repository policy.

        Setting an ECR repository policy using the `setRepositoryPolicy` function is
crucial for maintaining
        the security and integrity of your container images. The repository policy
allows you to
        define specific rules and restrictions for accessing and managing the images
stored within your ECR
        repository.
        """);
        waitForInputToContinue(scanner);
        try {
```

```
            ecrActions.setRepoPolicy(repoName, iamRole);

        } catch (RepositoryPolicyNotFoundException e) {
            System.err.println("Invalid repository name: " + e.getMessage());
            return;
        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while creating the ECR repository:
" + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        3. Display ECR repository policy.

        Now we will retrieve the ECR policy to ensure it was successfully set.
        """);
        waitForInputToContinue(scanner);
        try {
            String policyText = ecrActions.getRepoPolicy(repoName);
            System.out.println("Policy Text:");
            System.out.println(policyText);

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while creating the ECR repository:
" + e.getMessage());
            return;
        }

        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        4. Retrieve an ECR authorization token.

        You need an authorization token to securely access and interact with the
Amazon ECR registry.
```

```
        The `getAuthorizationToken` method of the `EcrAsyncClient` is responsible
for securely accessing
        and interacting with an Amazon ECR repository. This operation is responsible
for obtaining a
        valid authorization token, which is required to authenticate your requests
to the ECR service.

        Without a valid authorization token, you would not be able to perform any
operations on the
        ECR repository, such as pushing, pulling, or managing your Docker images.

        """);
        waitForInputToContinue(scanner);
        try {
             ecrActions.getAuthToken();

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred while retrieving the authorization
token: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        5. Get the ECR Repository URI.

        The URI  of an Amazon ECR repository is important. When you want to deploy a
container image to
        a container orchestration platform like Amazon Elastic Kubernetes Service
(EKS)
        or Amazon Elastic Container Service (ECS), you need to specify the full
image URI,
        which includes the ECR repository URI. This allows the container runtime to
pull the
        correct container image from the ECR repository.
       """);
        waitForInputToContinue(scanner);

        try {
            ecrActions.getRepositoryURI(repoName);
```

```
        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;

        } catch (RuntimeException e) {
            System.err.println("An error occurred while retrieving the URI: " +
e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
            6. Set an ECR Lifecycle Policy.

            An ECR Lifecycle Policy is used to manage the lifecycle of Docker images
stored in your ECR repositories.
            These policies allow you to automatically remove old or unused Docker
images from your repositories,
            freeing up storage space and reducing costs.

            This example policy helps to maintain the size and efficiency of the
container registry
            by automatically removing older and potentially unused images, ensuring
that the
            storage is optimized and the registry remains up-to-date.
            """);
        waitForInputToContinue(scanner);
        try {
            ecrActions.setLifeCyclePolicy(repoName);

        } catch (RuntimeException e) {
            System.err.println("An error occurred while setting the lifecycle
policy: " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("""
        7. Push a docker image to the Amazon ECR Repository.
```

```
        The `pushImageCmd()` method pushes a local Docker image to an Amazon ECR
repository.
        It sets up the Docker client by connecting to the local Docker host using
the default port.
        It then retrieves the authorization token for the ECR repository by making a
call to the AWS SDK.

        The method uses the authorization token to create an `AuthConfig` object,
which is used to authenticate
        the Docker client when pushing the image. Finally, the method tags the
Docker image with the specified
        repository name and image tag, and then pushes the image to the ECR
repository using the Docker client.
        If the push operation is successful, the method prints a message indicating
that the image was pushed to ECR.
        """);
        waitForInputToContinue(scanner);

        try {
            ecrActions.pushDockerImage(repoName, localImageName);

        } catch (RuntimeException e) {
            System.err.println("An error occurred while pushing a local Docker image
to Amazon ECR: " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("8. Verify if the image is in the ECR Repository.");
        waitForInputToContinue(scanner);
        try {
            ecrActions.verifyImage(repoName, localImageName);

        } catch (EcrException e) {
            System.err.println("An ECR exception occurred: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("An error occurred " + e.getMessage());
            e.printStackTrace();
            return;
        }
        waitForInputToContinue(scanner);
```

```
        System.out.println(DASHES);
        System.out.println("9. As an optional step, you can interact with the image
 in Amazon ECR by using the CLI.");
        System.out.println("Would you like to view instructions on how to use the
 CLI to run the image? (y/n)");
        String ans = scanner.nextLine().trim();
        if (ans.equalsIgnoreCase("y")) {
            String instructions = """
            1. Authenticate with ECR - Before you can pull the image from Amazon
 ECR, you need to authenticate with the registry. You can do this using the AWS CLI:

                aws ecr get-login-password --region us-east-1 | docker login --
username AWS --password-stdin %s.dkr.ecr.us-east-1.amazonaws.com

            2. Describe the image using this command:

               aws ecr describe-images --repository-name %s --image-ids imageTag=%s

            3. Run the Docker container and view the output using this command:

               docker run --rm %s.dkr.ecr.us-east-1.amazonaws.com/%s:%s
            """;

            instructions = String.format(instructions, accountId, repoName,
 localImageName, accountId, repoName, localImageName);
            System.out.println(instructions);
        }
        waitForInputToContinue(scanner);

        System.out.println(DASHES);
        System.out.println("10. Delete the ECR Repository.");
        System.out.println(
        """
        If the repository isn't empty, you must either delete the contents of the
 repository
        or use the force option (used in this scenario) to delete the repository and
 have Amazon ECR delete all of its contents
        on your behalf.
        """);
        System.out.println("Would you like to delete the Amazon ECR Repository? (y/
n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
```

```
            System.out.println("You selected to delete the AWS ECR resources.");

            try {
                ecrActions.deleteECRRepository(repoName);

            } catch (EcrException e) {
                System.err.println("An ECR exception occurred: " + e.getMessage());
                return;
            } catch (RuntimeException e) {
                System.err.println("An error occurred while deleting the Docker
 image: " + e.getMessage());
                e.printStackTrace();
                return;
            }
        }

        System.out.println(DASHES);
        System.out.println("This concludes the Amazon ECR SDK scenario");
        System.out.println(DASHES);
    }

   private static void waitForInputToContinue(Scanner scanner) {
       while (true) {
           System.out.println("");
           System.out.println("Enter 'c' followed by <ENTER> to continue:");
           String input = scanner.nextLine();

           if (input.trim().equalsIgnoreCase("c")) {
               System.out.println("Continuing with the program...");
               System.out.println("");
               break;
           } else {
               // Handle invalid input.
               System.out.println("Invalid input. Please try again.");
           }
       }
   }
}
```

Kelas pembungkus untuk metode Amazon ECR SDK.

```
import com.github.dockerjava.api.DockerClient;
```

```
import com.github.dockerjava.api.exception.DockerClientException;
import com.github.dockerjava.api.model.AuthConfig;
import com.github.dockerjava.api.model.Image;
import com.github.dockerjava.core.DockerClientBuilder;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecr.EcrAsyncClient;
import software.amazon.awssdk.services.ecr.model.AuthorizationData;
import software.amazon.awssdk.services.ecr.model.CreateRepositoryRequest;
import software.amazon.awssdk.services.ecr.model.CreateRepositoryResponse;
import software.amazon.awssdk.services.ecr.model.DeleteRepositoryRequest;
import software.amazon.awssdk.services.ecr.model.DeleteRepositoryResponse;
import software.amazon.awssdk.services.ecr.model.DescribeImagesRequest;
import software.amazon.awssdk.services.ecr.model.DescribeImagesResponse;
import software.amazon.awssdk.services.ecr.model.DescribeRepositoriesRequest;
import software.amazon.awssdk.services.ecr.model.DescribeRepositoriesResponse;
import software.amazon.awssdk.services.ecr.model.EcrException;
import software.amazon.awssdk.services.ecr.model.GetAuthorizationTokenResponse;
import software.amazon.awssdk.services.ecr.model.GetRepositoryPolicyRequest;
import software.amazon.awssdk.services.ecr.model.GetRepositoryPolicyResponse;
import software.amazon.awssdk.services.ecr.model.ImageIdentifier;
import software.amazon.awssdk.services.ecr.model.Repository;
import software.amazon.awssdk.services.ecr.model.RepositoryPolicyNotFoundException;
import software.amazon.awssdk.services.ecr.model.SetRepositoryPolicyRequest;
import software.amazon.awssdk.services.ecr.model.SetRepositoryPolicyResponse;
import software.amazon.awssdk.services.ecr.model.StartLifecyclePolicyPreviewRequest;
import
 software.amazon.awssdk.services.ecr.model.StartLifecyclePolicyPreviewResponse;
import com.github.dockerjava.api.command.DockerCmdExecFactory;
import com.github.dockerjava.netty.NettyDockerCmdExecFactory;
import java.time.Duration;
import java.util.Base64;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

public class ECRActions {
    private static EcrAsyncClient ecrClient;

    private static DockerClient dockerClient;
```

```
   private static Logger logger = LoggerFactory.getLogger(ECRActions.class);

   /**
    * Creates an Amazon Elastic Container Registry (Amazon ECR) repository.
    *
    * @param repoName the name of the repository to create.
    * @return the Amazon Resource Name (ARN) of the created repository, or an empty
string if the operation failed.
    * @throws IllegalArgumentException     If repository name is invalid.
    * @throws RuntimeException             if an error occurs while creating the
repository.
    */
   public String createECRRepository(String repoName) {
       if (repoName == null || repoName.isEmpty()) {
           throw new IllegalArgumentException("Repository name cannot be null or
empty");
       }

       CreateRepositoryRequest request = CreateRepositoryRequest.builder()
           .repositoryName(repoName)
           .build();

       CompletableFuture<CreateRepositoryResponse> response =
getAsyncClient().createRepository(request);
       try {
           CreateRepositoryResponse result = response.join();
           if (result != null) {
               System.out.println("The " + repoName + " repository was created
successfully.");
               return result.repository().repositoryArn();
           } else {
               throw new RuntimeException("Unexpected response type");
           }
       } catch (CompletionException e) {
           Throwable cause = e.getCause();
           if (cause instanceof EcrException ex) {
               if
("RepositoryAlreadyExistsException".equals(ex.awsErrorDetails().errorCode())) {
                   System.out.println("The Amazon ECR repository already exists,
moving on...");
                   DescribeRepositoriesRequest describeRequest =
DescribeRepositoriesRequest.builder()
                       .repositoryNames(repoName)
```

```
                        .build();
                    DescribeRepositoriesResponse describeResponse =
getAsyncClient().describeRepositories(describeRequest).join();
                    return describeResponse.repositories().get(0).repositoryArn();
                } else {
                    throw new RuntimeException(ex);
                }
            } else {
                throw new RuntimeException(e);
            }
        }
    }

    /**
     * Deletes an ECR (Elastic Container Registry) repository.
     *
     * @param repoName the name of the repository to delete.
     * @throws IllegalArgumentException if the repository name is null or empty.
     * @throws EcrException if there is an error deleting the repository.
     * @throws RuntimeException if an unexpected error occurs during the deletion
process.
     */
    public void deleteECRRepository(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        DeleteRepositoryRequest repositoryRequest =
DeleteRepositoryRequest.builder()
            .force(true)
            .repositoryName(repoName)
            .build();

        CompletableFuture<DeleteRepositoryResponse> response =
getAsyncClient().deleteRepository(repositoryRequest);
        response.whenComplete((deleteRepositoryResponse, ex) -> {
            if (deleteRepositoryResponse != null) {
                System.out.println("You have successfully deleted the " + repoName +
" repository");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof EcrException) {
                    throw (EcrException) cause;
```

```
                } else {
                    throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                }
            }
        });

        // Wait for the CompletableFuture to complete
        response.join();
    }



    private static DockerClient getDockerClient() {
        String osName = System.getProperty("os.name");
        if (osName.startsWith("Windows")) {
            // Make sure Docker Desktop is running.
            String dockerHost = "tcp://localhost:2375"; // Use the Docker Desktop
default port.
            DockerCmdExecFactory dockerCmdExecFactory = new
NettyDockerCmdExecFactory().withReadTimeout(20000).withConnectTimeout(20000);
            dockerClient =
DockerClientBuilder.getInstance(dockerHost).withDockerCmdExecFactory(dockerCmdExecFactory).
        } else {
            dockerClient = DockerClientBuilder.getInstance().build();
        }
        return dockerClient;
    }

    /**
     * Retrieves an asynchronous Amazon Elastic Container Registry (ECR) client.
     *
     * @return the configured ECR asynchronous client.
     */
    private static EcrAsyncClient getAsyncClient() {

        /*
         The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
         and it is designed to provide a high-performance, asynchronous HTTP client
for interacting with AWS services.
         It uses the Netty framework to handle the underlying network communication
and the Java NIO API to
```

```
         provide a non-blocking, event-driven approach to HTTP requests and
 responses.
         */
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(50)  // Adjust as needed.
            .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
            .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
            .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
            .build();

        ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
 timeout.
            .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the individual
 call attempt timeout.
            .build();

        if (ecrClient == null) {
            ecrClient = EcrAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return ecrClient;
    }

    /**
     * Sets the lifecycle policy for the specified repository.
     *
     * @param repoName the name of the repository for which to set the lifecycle
 policy.
     */
    public void setLifeCyclePolicy(String repoName) {
        /*
           This policy helps to maintain the size and efficiency of the container
 registry
           by automatically removing older and potentially unused images,
           ensuring that the storage is optimized and the registry remains up-to-
date.
         */
        String polText = """
```

```
            {
            "rules": [
                {
                    "rulePriority": 1,
                    "description": "Expire images older than 14 days",
                    "selection": {
                        "tagStatus": "any",
                        "countType": "sinceImagePushed",
                        "countUnit": "days",
                        "countNumber": 14
                    },
                    "action": {
                        "type": "expire"
                    }
                }
            ]
            }
            """;

        StartLifecyclePolicyPreviewRequest lifecyclePolicyPreviewRequest =
StartLifecyclePolicyPreviewRequest.builder()
            .lifecyclePolicyText(polText)
            .repositoryName(repoName)
            .build();

        CompletableFuture<StartLifecyclePolicyPreviewResponse> response =
getAsyncClient().startLifecyclePolicyPreview(lifecyclePolicyPreviewRequest);
        response.whenComplete((lifecyclePolicyPreviewResponse, ex) -> {
            if (lifecyclePolicyPreviewResponse != null) {
                System.out.println("Lifecycle policy preview started
successfully.");
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex);
                }
            }
        });
        // Wait for the CompletableFuture to complete.
        response.join();
    }
```

```
    /**
     * Verifies the existence of an image in an Amazon Elastic Container Registry
 (Amazon ECR) repository asynchronously.
     *
     * @param repositoryName The name of the Amazon ECR repository.
     * @param imageTag       The tag of the image to verify.
     * @throws EcrException             if there is an error retrieving the image
 information from Amazon ECR.
     * @throws CompletionException      if the asynchronous operation completes
 exceptionally.
     */
    public void verifyImage(String repositoryName, String imageTag) {
        DescribeImagesRequest request = DescribeImagesRequest.builder()
            .repositoryName(repositoryName)
            .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
            .build();

        CompletableFuture<DescribeImagesResponse> response =
 getAsyncClient().describeImages(request);
        response.whenComplete((describeImagesResponse, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof EcrException) {
                        throw (EcrException) cause;
                    } else {
                        throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
                    }
                } else {
                    throw new RuntimeException("Unexpected error: " +
 ex.getCause());
                }
            } else if (describeImagesResponse != null &&
!describeImagesResponse.imageDetails().isEmpty()) {
                System.out.println("Image is present in the repository.");
            } else {
                System.out.println("Image is not present in the repository.");
            }
        });

        // Wait for the CompletableFuture to complete.
        response.join();
```

```
    }

    /**
     * Retrieves the repository URI for the specified repository name.
     *
     * @param repoName the name of the repository to retrieve the URI for.
     * @return the repository URI for the specified repository name.
     * @throws EcrException        if there is an error retrieving the repository
information.
     * @throws CompletionException if the asynchronous operation completes
exceptionally.
     */
    public void getRepositoryURI(String repoName) {
        DescribeRepositoriesRequest request = DescribeRepositoriesRequest.builder()
            .repositoryNames(repoName)
            .build();

        CompletableFuture<DescribeRepositoriesResponse> response =
getAsyncClient().describeRepositories(request);
        response.whenComplete((describeRepositoriesResponse, ex) -> {
            if (ex != null) {
                Throwable cause = ex.getCause();
                if (cause instanceof InterruptedException) {
                    Thread.currentThread().interrupt();
                    String errorMessage = "Thread interrupted while waiting for
asynchronous operation: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                }
            } else {
                if (describeRepositoriesResponse != null) {
                    if (!describeRepositoriesResponse.repositories().isEmpty()) {
                        String repositoryUri =
describeRepositoriesResponse.repositories().get(0).repositoryUri();
                        System.out.println("Repository URI found: " +
repositoryUri);
                    } else {
                        System.out.println("No repositories found for the given
name.");
                    }
```

```
                } else {
                    System.err.println("No response received from
describeRepositories.");
                }
            }
        });
        response.join();
    }

    /**
     * Retrieves the authorization token for Amazon Elastic Container Registry
(ECR).
     * This method makes an asynchronous call to the ECR client to retrieve the
authorization token.
     * If the operation is successful, the method prints the token to the console.
     * If an exception occurs, the method handles the exception and prints the error
message.
     *
     * @throws EcrException     if there is an error retrieving the authorization
token from ECR.
     * @throws RuntimeException if there is an unexpected error during the
operation.
     */
    public void getAuthToken() {
        CompletableFuture<GetAuthorizationTokenResponse> response =
getAsyncClient().getAuthorizationToken();
        response.whenComplete((authorizationTokenResponse, ex) -> {
            if (authorizationTokenResponse != null) {
                AuthorizationData authorizationData =
authorizationTokenResponse.authorizationData().get(0);
                String token = authorizationData.authorizationToken();
                if (!token.isEmpty()) {
                    System.out.println("The token was successfully retrieved.");
                }
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex); // Rethrow the
exception
                }
            }
```

```
        });
        response.join();
    }

    /**
     * Gets the repository policy for the specified repository.
     *
     * @param repoName the name of the repository.
     * @throws EcrException if an AWS error occurs while getting the repository
policy.
     */
    public String getRepoPolicy(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        GetRepositoryPolicyRequest getRepositoryPolicyRequest =
GetRepositoryPolicyRequest.builder()
            .repositoryName(repoName)
            .build();

        CompletableFuture<GetRepositoryPolicyResponse> response =
getAsyncClient().getRepositoryPolicy(getRepositoryPolicyRequest);
        response.whenComplete((resp, ex) -> {
            if (resp != null) {
                System.out.println("Repository policy retrieved successfully.");
            } else {
                if (ex.getCause() instanceof EcrException) {
                    throw (EcrException) ex.getCause();
                } else {
                    String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                    throw new RuntimeException(errorMessage, ex);
                }
            }
        });

        GetRepositoryPolicyResponse result = response.join();
        return result != null ? result.policyText() : null;
    }

    /**
     * Sets the repository policy for the specified ECR repository.
```

```
    *
    * @param repoName the name of the ECR repository.
    * @param iamRole  the IAM role to be granted access to the repository.
    * @throws RepositoryPolicyNotFoundException if the repository policy does not
exist.
    * @throws EcrException                      if there is an unexpected error
setting the repository policy.
    */
   public void setRepoPolicy(String repoName, String iamRole) {
       /*
         This example policy document grants the specified AWS principal the
permission to perform the
         `ecr:BatchGetImage` action. This policy is designed to allow the specified
principal
         to retrieve Docker images from the ECR repository.
        */
       String policyDocumentTemplate = """
            {
             "Version":"2012-10-17",
             "Statement" : [ {
               "Sid" : "new statement",
               "Effect" : "Allow",
               "Principal" : {
                 "AWS" : "%s"
               },
               "Action" : "ecr:BatchGetImage"
             } ]
           }
            """;

       String policyDocument = String.format(policyDocumentTemplate, iamRole);
       SetRepositoryPolicyRequest setRepositoryPolicyRequest =
SetRepositoryPolicyRequest.builder()
           .repositoryName(repoName)
           .policyText(policyDocument)
           .build();

       CompletableFuture<SetRepositoryPolicyResponse> response =
getAsyncClient().setRepositoryPolicy(setRepositoryPolicyRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               System.out.println("Repository policy set successfully.");
           } else {
               Throwable cause = ex.getCause();
```

```
                if (cause instanceof RepositoryPolicyNotFoundException) {
                    throw (RepositoryPolicyNotFoundException) cause;
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                }
            }
        });
        response.join();
    }

    /**
     * Pushes a Docker image to an Amazon Elastic Container Registry (ECR)
repository.
     *
     * @param repoName  the name of the ECR repository to push the image to.
     * @param imageName the name of the Docker image.
     */
    public void pushDockerImage(String repoName, String imageName) {
        System.out.println("Pushing " + imageName + " to Amazon ECR will take a few
seconds.");
        CompletableFuture<AuthConfig> authResponseFuture =
getAsyncClient().getAuthorizationToken()
            .thenApply(response -> {
                String token =
response.authorizationData().get(0).authorizationToken();
                String decodedToken = new String(Base64.getDecoder().decode(token));
                String password = decodedToken.substring(4);

                DescribeRepositoriesResponse descrRepoResponse =
getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
descrRepoResponse.repositories().stream().filter(r ->
r.repositoryName().equals(repoName)).findFirst().orElse(null);
                assert repoData != null;
                String registryURL = repoData.repositoryUri().split("/")[0];

                AuthConfig authConfig = new AuthConfig()
                    .withUsername("AWS")
                    .withPassword(password)
                    .withRegistryAddress(registryURL);
                return authConfig;
```

```
            })
            .thenCompose(authConfig -> {
                DescribeRepositoriesResponse descrRepoResponse =
 getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
 descrRepoResponse.repositories().stream().filter(r ->
 r.repositoryName().equals(repoName)).findFirst().orElse(null);
                getDockerClient().tagImageCmd(imageName + ":latest",
 repoData.repositoryUri() + ":latest", imageName).exec();
                try {

 getDockerClient().pushImageCmd(repoData.repositoryUri()).withTag("echo-
text").withAuthConfig(authConfig).start().awaitCompletion();
                    System.out.println("The " + imageName + " was pushed to ECR");

                } catch (InterruptedException e) {
                    throw (RuntimeException) e.getCause();
                }
                return CompletableFuture.completedFuture(authConfig);
            });

        authResponseFuture.join();
    }

    // Make sure local image echo-text exists.
    public boolean isEchoTextImagePresent() {
        try {
            List<Image> images = getDockerClient().listImagesCmd().exec();
            boolean helloWorldFound = false;
            for (Image image : images) {
                String[] repoTags = image.getRepoTags();
                if (repoTags != null) {
                    for (String tag : repoTags) {
                        if (tag.startsWith("echo-text")) {
                            System.out.println(tag);
                            helloWorldFound = true;
                        }
                    }
                }
            }
            if (helloWorldFound) {
                System.out.println("The local image named echo-text exists.");
                return true;
            } else {
```

```
                System.out.println("The local image named echo-text does not
 exist.");
                return false;
            }
        } catch (DockerClientException ex) {
            logger.error("ERROR: " + ex.getMessage());
            return false;
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateRepository
  - DeleteRepository
  - DescribeImages
  - DescribeRepositories
  - GetAuthorizationToken
  - GetRepositoryPolicy
  - SetRepositoryPolicy
  - StartLifecyclePolicyPreview

## Tindakan

### `CreateRepository`

Contoh kode berikut menunjukkan cara menggunakan`CreateRepository`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an Amazon Elastic Container Registry (Amazon ECR) repository.
```

```
    *
    * @param repoName the name of the repository to create.
    * @return the Amazon Resource Name (ARN) of the created repository, or an empty
string if the operation failed.
    * @throws IllegalArgumentException     If repository name is invalid.
    * @throws RuntimeException             if an error occurs while creating the
repository.
    */
   public String createECRRepository(String repoName) {
       if (repoName == null || repoName.isEmpty()) {
           throw new IllegalArgumentException("Repository name cannot be null or
empty");
       }

       CreateRepositoryRequest request = CreateRepositoryRequest.builder()
           .repositoryName(repoName)
           .build();

       CompletableFuture<CreateRepositoryResponse> response =
getAsyncClient().createRepository(request);
       try {
           CreateRepositoryResponse result = response.join();
           if (result != null) {
               System.out.println("The " + repoName + " repository was created
successfully.");
               return result.repository().repositoryArn();
           } else {
               throw new RuntimeException("Unexpected response type");
           }
       } catch (CompletionException e) {
           Throwable cause = e.getCause();
           if (cause instanceof EcrException ex) {
               if
("RepositoryAlreadyExistsException".equals(ex.awsErrorDetails().errorCode())) {
                   System.out.println("The Amazon ECR repository already exists,
moving on...");
                   DescribeRepositoriesRequest describeRequest =
DescribeRepositoriesRequest.builder()
                       .repositoryNames(repoName)
                       .build();
                   DescribeRepositoriesResponse describeResponse =
getAsyncClient().describeRepositories(describeRequest).join();
                   return describeResponse.repositories().get(0).repositoryArn();
               } else {
```

```
                    throw new RuntimeException(ex);
                }
            } else {
                throw new RuntimeException(e);
            }
        }
    }
```

- Untuk detail API, lihat CreateRepositorydi Referensi AWS SDK for Java 2.x API.

### `DeleteRepository`

Contoh kode berikut menunjukkan cara menggunakan`DeleteRepository`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an ECR (Elastic Container Registry) repository.
     *
     * @param repoName the name of the repository to delete.
     * @throws IllegalArgumentException if the repository name is null or empty.
     * @throws EcrException if there is an error deleting the repository.
     * @throws RuntimeException if an unexpected error occurs during the deletion
process.
     */
    public void deleteECRRepository(String repoName) {
        if (repoName == null || repoName.isEmpty()) {
            throw new IllegalArgumentException("Repository name cannot be null or
empty");
        }

        DeleteRepositoryRequest repositoryRequest =
DeleteRepositoryRequest.builder()
            .force(true)
```

```
            .repositoryName(repoName)
            .build();

        CompletableFuture<DeleteRepositoryResponse> response =
getAsyncClient().deleteRepository(repositoryRequest);
        response.whenComplete((deleteRepositoryResponse, ex) -> {
            if (deleteRepositoryResponse != null) {
                System.out.println("You have successfully deleted the " + repoName +
" repository");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
                }
            }
        });

        // Wait for the CompletableFuture to complete
        response.join();
    }
```

- Untuk detail API, lihat DeleteRepositorydi Referensi AWS SDK for Java 2.x API.

### `DescribeImages`

Contoh kode berikut menunjukkan cara menggunakan`DescribeImages`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Verifies the existence of an image in an Amazon Elastic Container Registry
(Amazon ECR) repository asynchronously.
```

```
     *
     * @param repositoryName The name of the Amazon ECR repository.
     * @param imageTag       The tag of the image to verify.
     * @throws EcrException             if there is an error retrieving the image
 information from Amazon ECR.
     * @throws CompletionException      if the asynchronous operation completes
 exceptionally.
     */
    public void verifyImage(String repositoryName, String imageTag) {
        DescribeImagesRequest request = DescribeImagesRequest.builder()
            .repositoryName(repositoryName)
            .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
            .build();

        CompletableFuture<DescribeImagesResponse> response =
 getAsyncClient().describeImages(request);
        response.whenComplete((describeImagesResponse, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException) {
                    Throwable cause = ex.getCause();
                    if (cause instanceof EcrException) {
                        throw (EcrException) cause;
                    } else {
                        throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
                    }
                } else {
                    throw new RuntimeException("Unexpected error: " +
 ex.getCause());
                }
            } else if (describeImagesResponse != null &&
 !describeImagesResponse.imageDetails().isEmpty()) {
                System.out.println("Image is present in the repository.");
            } else {
                System.out.println("Image is not present in the repository.");
            }
        });

        // Wait for the CompletableFuture to complete.
        response.join();
    }
```

- Untuk detail API, lihat DescribeImagesdi Referensi AWS SDK for Java 2.x API.

### `DescribeRepositories`

Contoh kode berikut menunjukkan cara menggunakan`DescribeRepositories`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves the repository URI for the specified repository name.
    *
    * @param repoName the name of the repository to retrieve the URI for.
    * @return the repository URI for the specified repository name.
    * @throws EcrException        if there is an error retrieving the repository
information.
    * @throws CompletionException if the asynchronous operation completes
exceptionally.
    */
   public void getRepositoryURI(String repoName) {
       DescribeRepositoriesRequest request = DescribeRepositoriesRequest.builder()
           .repositoryNames(repoName)
           .build();

       CompletableFuture<DescribeRepositoriesResponse> response =
getAsyncClient().describeRepositories(request);
       response.whenComplete((describeRepositoriesResponse, ex) -> {
           if (ex != null) {
               Throwable cause = ex.getCause();
               if (cause instanceof InterruptedException) {
                   Thread.currentThread().interrupt();
                   String errorMessage = "Thread interrupted while waiting for
asynchronous operation: " + cause.getMessage();
                   throw new RuntimeException(errorMessage, cause);
               } else if (cause instanceof EcrException) {
                   throw (EcrException) cause;
               } else {
                   String errorMessage = "Unexpected error: " + cause.getMessage();
                   throw new RuntimeException(errorMessage, cause);
               }
```

```
            } else {
                if (describeRepositoriesResponse != null) {
                    if (!describeRepositoriesResponse.repositories().isEmpty()) {
                        String repositoryUri =
describeRepositoriesResponse.repositories().get(0).repositoryUri();
                        System.out.println("Repository URI found: " +
repositoryUri);
                    } else {
                        System.out.println("No repositories found for the given
name.");
                    }
                } else {
                    System.err.println("No response received from
describeRepositories.");
                }
            }
        });
        response.join();
    }
```

- Untuk detail API, lihat DescribeRepositoriesdi Referensi AWS SDK for Java 2.x API.

### `GetAuthorizationToken`

Contoh kode berikut menunjukkan cara menggunakan`GetAuthorizationToken`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the authorization token for Amazon Elastic Container Registry
(ECR).
     * This method makes an asynchronous call to the ECR client to retrieve the
authorization token.
     * If the operation is successful, the method prints the token to the console.
```

```
    * If an exception occurs, the method handles the exception and prints the error
message.
    *
    * @throws EcrException     if there is an error retrieving the authorization
token from ECR.
    * @throws RuntimeException if there is an unexpected error during the
operation.
    */
   public void getAuthToken() {
       CompletableFuture<GetAuthorizationTokenResponse> response =
getAsyncClient().getAuthorizationToken();
       response.whenComplete((authorizationTokenResponse, ex) -> {
           if (authorizationTokenResponse != null) {
               AuthorizationData authorizationData =
authorizationTokenResponse.authorizationData().get(0);
               String token = authorizationData.authorizationToken();
               if (!token.isEmpty()) {
                   System.out.println("The token was successfully retrieved.");
               }
           } else {
               if (ex.getCause() instanceof EcrException) {
                   throw (EcrException) ex.getCause();
               } else {
                   String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                   throw new RuntimeException(errorMessage, ex); // Rethrow the
exception
               }
           }
       });
       response.join();
   }
```

- Untuk detail API, lihat GetAuthorizationTokendi Referensi AWS SDK for Java 2.x API.

### `GetRepositoryPolicy`

Contoh kode berikut menunjukkan cara menggunakan`GetRepositoryPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Gets the repository policy for the specified repository.
    *
    * @param repoName the name of the repository.
    * @throws EcrException if an AWS error occurs while getting the repository
policy.
    */
   public String getRepoPolicy(String repoName) {
       if (repoName == null || repoName.isEmpty()) {
           throw new IllegalArgumentException("Repository name cannot be null or
empty");
       }

       GetRepositoryPolicyRequest getRepositoryPolicyRequest =
GetRepositoryPolicyRequest.builder()
           .repositoryName(repoName)
           .build();

       CompletableFuture<GetRepositoryPolicyResponse> response =
getAsyncClient().getRepositoryPolicy(getRepositoryPolicyRequest);
       response.whenComplete((resp, ex) -> {
           if (resp != null) {
               System.out.println("Repository policy retrieved successfully.");
           } else {
               if (ex.getCause() instanceof EcrException) {
                   throw (EcrException) ex.getCause();
               } else {
                   String errorMessage = "Unexpected error occurred: " +
ex.getMessage();
                   throw new RuntimeException(errorMessage, ex);
               }
           }
       });
```

```
        GetRepositoryPolicyResponse result = response.join();
        return result != null ? result.policyText() : null;
    }
```

- Untuk detail API, lihat GetRepositoryPolicydi Referensi AWS SDK for Java 2.x API.

### `PushImageCmd`

Contoh kode berikut menunjukkan cara menggunakan`PushImageCmd`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Pushes a Docker image to an Amazon Elastic Container Registry (ECR)
repository.
     *
     * @param repoName  the name of the ECR repository to push the image to.
     * @param imageName the name of the Docker image.
     */
    public void pushDockerImage(String repoName, String imageName) {
        System.out.println("Pushing " + imageName + " to Amazon ECR will take a few
seconds.");
        CompletableFuture<AuthConfig> authResponseFuture =
getAsyncClient().getAuthorizationToken()
            .thenApply(response -> {
                String token =
response.authorizationData().get(0).authorizationToken();
                String decodedToken = new String(Base64.getDecoder().decode(token));
                String password = decodedToken.substring(4);

                DescribeRepositoriesResponse descrRepoResponse =
getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
descrRepoResponse.repositories().stream().filter(r ->
r.repositoryName().equals(repoName)).findFirst().orElse(null);
```

```
                assert repoData != null;
                String registryURL = repoData.repositoryUri().split("/")[0];

                AuthConfig authConfig = new AuthConfig()
                    .withUsername("AWS")
                    .withPassword(password)
                    .withRegistryAddress(registryURL);
                return authConfig;
            })
            .thenCompose(authConfig -> {
                DescribeRepositoriesResponse descrRepoResponse =
 getAsyncClient().describeRepositories(b -> b.repositoryNames(repoName)).join();
                Repository repoData =
 descrRepoResponse.repositories().stream().filter(r ->
 r.repositoryName().equals(repoName)).findFirst().orElse(null);
                getDockerClient().tagImageCmd(imageName + ":latest",
 repoData.repositoryUri() + ":latest", imageName).exec();
                try {

 getDockerClient().pushImageCmd(repoData.repositoryUri()).withTag("echo-
text").withAuthConfig(authConfig).start().awaitCompletion();
                    System.out.println("The " + imageName + " was pushed to ECR");

                } catch (InterruptedException e) {
                    throw (RuntimeException) e.getCause();
                }
                return CompletableFuture.completedFuture(authConfig);
            });

        authResponseFuture.join();
    }
```

- Untuk detail API, lihat PushImageCmddi Referensi AWS SDK for Java 2.x API.

### `SetRepositoryPolicy`

Contoh kode berikut menunjukkan cara menggunakan`SetRepositoryPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Sets the repository policy for the specified ECR repository.
    *
    * @param repoName the name of the ECR repository.
    * @param iamRole  the IAM role to be granted access to the repository.
    * @throws RepositoryPolicyNotFoundException if the repository policy does not
exist.
    * @throws EcrException                      if there is an unexpected error
setting the repository policy.
    */
   public void setRepoPolicy(String repoName, String iamRole) {
       /*
         This example policy document grants the specified AWS principal the
permission to perform the
         `ecr:BatchGetImage` action. This policy is designed to allow the specified
principal
         to retrieve Docker images from the ECR repository.
        */
       String policyDocumentTemplate = """
            {
             "Version":"2012-10-17",
             "Statement" : [ {
               "Sid" : "new statement",
               "Effect" : "Allow",
               "Principal" : {
                 "AWS" : "%s"
               },
               "Action" : "ecr:BatchGetImage"
             } ]
           }
            """;

       String policyDocument = String.format(policyDocumentTemplate, iamRole);
```

```
        SetRepositoryPolicyRequest setRepositoryPolicyRequest =
SetRepositoryPolicyRequest.builder()
            .repositoryName(repoName)
            .policyText(policyDocument)
            .build();

        CompletableFuture<SetRepositoryPolicyResponse> response =
getAsyncClient().setRepositoryPolicy(setRepositoryPolicyRequest);
        response.whenComplete((resp, ex) -> {
            if (resp != null) {
                System.out.println("Repository policy set successfully.");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof RepositoryPolicyNotFoundException) {
                    throw (RepositoryPolicyNotFoundException) cause;
                } else if (cause instanceof EcrException) {
                    throw (EcrException) cause;
                } else {
                    String errorMessage = "Unexpected error: " + cause.getMessage();
                    throw new RuntimeException(errorMessage, cause);
                }
            }
        });
        response.join();
    }
```

- Untuk detail API, lihat SetRepositoryPolicydi Referensi AWS SDK for Java 2.x API.

### `StartLifecyclePolicyPreview`

Contoh kode berikut menunjukkan cara menggunakan`StartLifecyclePolicyPreview`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
    * Verifies the existence of an image in an Amazon Elastic Container Registry
 (Amazon ECR) repository asynchronously.
    *
    * @param repositoryName The name of the Amazon ECR repository.
    * @param imageTag       The tag of the image to verify.
    * @throws EcrException             if there is an error retrieving the image
 information from Amazon ECR.
    * @throws CompletionException      if the asynchronous operation completes
 exceptionally.
    */
   public void verifyImage(String repositoryName, String imageTag) {
       DescribeImagesRequest request = DescribeImagesRequest.builder()
           .repositoryName(repositoryName)
           .imageIds(ImageIdentifier.builder().imageTag(imageTag).build())
           .build();

       CompletableFuture<DescribeImagesResponse> response =
 getAsyncClient().describeImages(request);
       response.whenComplete((describeImagesResponse, ex) -> {
           if (ex != null) {
               if (ex instanceof CompletionException) {
                   Throwable cause = ex.getCause();
                   if (cause instanceof EcrException) {
                       throw (EcrException) cause;
                   } else {
                       throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
                   }
               } else {
                   throw new RuntimeException("Unexpected error: " +
 ex.getCause());
               }
           } else if (describeImagesResponse != null &&
!
describeImagesResponse.imageDetails().isEmpty()) {
               System.out.println("Image is present in the repository.");
           } else {
               System.out.println("Image is not present in the repository.");
           }
       });

       // Wait for the CompletableFuture to complete.
       response.join();
   }
```

- Untuk detail API, lihat StartLifecyclePolicyPreviewdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon ECS menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan menerapkan skenario umum AWS SDK for Java 2.x dengan menggunakan Amazon ECS.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `CreateCluster`

Contoh kode berikut menunjukkan cara menggunakan`CreateCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.ExecuteCommandConfiguration;
import software.amazon.awssdk.services.ecs.model.ExecuteCommandLogging;
import software.amazon.awssdk.services.ecs.model.ClusterConfiguration;
import software.amazon.awssdk.services.ecs.model.CreateClusterResponse;
```

```
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.CreateClusterRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateCluster {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <clusterName>\s

                Where:
                   clusterName - The name of the ECS cluster to create.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        String clusterArn = createGivenCluster(ecsClient, clusterName);
        System.out.println("The cluster ARN is " + clusterArn);
        ecsClient.close();
    }

    public static String createGivenCluster(EcsClient ecsClient, String clusterName)
 {
        try {
            ExecuteCommandConfiguration commandConfiguration =
 ExecuteCommandConfiguration.builder()
                    .logging(ExecuteCommandLogging.DEFAULT)
```

```
                    .build();

            ClusterConfiguration clusterConfiguration =
 ClusterConfiguration.builder()
                    .executeCommandConfiguration(commandConfiguration)
                    .build();

            CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
                    .clusterName(clusterName)
                    .configuration(clusterConfiguration)
                    .build();

            CreateClusterResponse response =
 ecsClient.createCluster(clusterRequest);
            return response.cluster().clusterArn();

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateClusterdi Referensi AWS SDK for Java 2.x API.

### `CreateService`

Contoh kode berikut menunjukkan cara menggunakan`CreateService`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.AwsVpcConfiguration;
```

```
import software.amazon.awssdk.services.ecs.model.NetworkConfiguration;
import software.amazon.awssdk.services.ecs.model.CreateServiceRequest;
import software.amazon.awssdk.services.ecs.model.LaunchType;
import software.amazon.awssdk.services.ecs.model.CreateServiceResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateService {
        public static void main(String[] args) {
                final String usage = """

                                Usage:
                                  <clusterName> <serviceName> <securityGroups>
 <subnets> <taskDefinition>

                                Where:
                                  clusterName - The name of the ECS cluster.
                                  serviceName - The name of the ECS service to
 create.
                                  securityGroups - The name of the security group.
                                  subnets - The name of the subnet.
                                  taskDefinition - The name of the task definition.
                                """;

                if (args.length != 5) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String clusterName = args[0];
                String serviceName = args[1];
                String securityGroups = args[2];
                String subnets = args[3];
                String taskDefinition = args[4];
                Region region = Region.US_EAST_1;
                EcsClient ecsClient = EcsClient.builder()
                                .region(region)
```

```
                                .build();

                String serviceArn = createNewService(ecsClient, clusterName,
serviceName, securityGroups, subnets,
                                taskDefinition);
                System.out.println("The ARN of the service is " + serviceArn);
                ecsClient.close();
        }

        public static String createNewService(EcsClient ecsClient,
                        String clusterName,
                        String serviceName,
                        String securityGroups,
                        String subnets,
                        String taskDefinition) {

                try {
                        AwsVpcConfiguration vpcConfiguration =
AwsVpcConfiguration.builder()
                                        .securityGroups(securityGroups)
                                        .subnets(subnets)
                                        .build();

                        NetworkConfiguration configuration =
NetworkConfiguration.builder()
                                        .awsvpcConfiguration(vpcConfiguration)
                                        .build();

                        CreateServiceRequest serviceRequest =
CreateServiceRequest.builder()
                                        .cluster(clusterName)
                                        .networkConfiguration(configuration)
                                        .desiredCount(1)
                                        .launchType(LaunchType.FARGATE)
                                        .serviceName(serviceName)
                                        .taskDefinition(taskDefinition)
                                        .build();

                        CreateServiceResponse response =
ecsClient.createService(serviceRequest);
                        return response.service().serviceArn();

                } catch (EcsException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
```

```
                    System.exit(1);
                }
                return "";
        }
}
```

- Untuk detail API, lihat CreateServicedi Referensi AWS SDK for Java 2.x API.

### `DeleteService`

Contoh kode berikut menunjukkan cara menggunakan`DeleteService`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DeleteServiceRequest;
import software.amazon.awssdk.services.ecs.model.EcsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteService {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterName> <serviceArn>\s
```

```
                Where:
                  clusterName - The name of the ECS cluster.
                  serviceArn - The ARN of the ECS service.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        String serviceArn = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        deleteSpecificService(ecsClient, clusterName, serviceArn);
        ecsClient.close();
    }

    public static void deleteSpecificService(EcsClient ecsClient, String
 clusterName, String serviceArn) {
        try {
            DeleteServiceRequest serviceRequest = DeleteServiceRequest.builder()
                    .cluster(clusterName)
                    .service(serviceArn)
                    .build();

            ecsClient.deleteService(serviceRequest);
            System.out.println("The Service was successfully deleted");

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteServicedi Referensi AWS SDK for Java 2.x API.

### `DescribeClusters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeClusters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DescribeClustersRequest;
import software.amazon.awssdk.services.ecs.model.DescribeClustersResponse;
import software.amazon.awssdk.services.ecs.model.Cluster;
import software.amazon.awssdk.services.ecs.model.EcsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeClusters {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterArn> \s

                Where:
                  clusterArn - The ARN of the ECS cluster to describe.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String clusterArn = args[0];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        descCluster(ecsClient, clusterArn);
    }

    public static void descCluster(EcsClient ecsClient, String clusterArn) {
        try {
            DescribeClustersRequest clustersRequest =
 DescribeClustersRequest.builder()
                    .clusters(clusterArn)
                    .build();

            DescribeClustersResponse response =
 ecsClient.describeClusters(clustersRequest);
            List<Cluster> clusters = response.clusters();
            for (Cluster cluster : clusters) {
                System.out.println("The cluster name is " + cluster.clusterName());
            }

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeClustersdi Referensi AWS SDK for Java 2.x API.

### `DescribeTasks`

Contoh kode berikut menunjukkan cara menggunakan`DescribeTasks`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.DescribeTasksRequest;
import software.amazon.awssdk.services.ecs.model.DescribeTasksResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.Task;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTaskDefinitions {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                  <clusterArn> <taskId>\s

                Where:
                  clusterArn - The ARN of an ECS cluster.
                  taskId - The task Id value.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterArn = args[0];
```

```
        String taskId = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        getAllTasks(ecsClient, clusterArn, taskId);
        ecsClient.close();
    }

    public static void getAllTasks(EcsClient ecsClient, String clusterArn, String
 taskId) {
        try {
            DescribeTasksRequest tasksRequest = DescribeTasksRequest.builder()
                    .cluster(clusterArn)
                    .tasks(taskId)
                    .build();

            DescribeTasksResponse response = ecsClient.describeTasks(tasksRequest);
            List<Task> tasks = response.tasks();
            for (Task task : tasks) {
                System.out.println("The task ARN is " + task.taskDefinitionArn());
            }

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeTasksdi Referensi AWS SDK for Java 2.x API.

### `ListClusters`

Contoh kode berikut menunjukkan cara menggunakan`ListClusters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.ListClustersResponse;
import software.amazon.awssdk.services.ecs.model.EcsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ListClusters {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        listAllClusters(ecsClient);
        ecsClient.close();
    }

    public static void listAllClusters(EcsClient ecsClient) {
        try {
            ListClustersResponse response = ecsClient.listClusters();
            List<String> clusters = response.clusterArns();
            for (String cluster : clusters) {
                System.out.println("The cluster arn is " + cluster);
            }
```

```
        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListClustersdi Referensi AWS SDK for Java 2.x API.

### `UpdateService`

Contoh kode berikut menunjukkan cara menggunakan`UpdateService`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ecs.EcsClient;
import software.amazon.awssdk.services.ecs.model.EcsException;
import software.amazon.awssdk.services.ecs.model.UpdateServiceRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class UpdateService {

    public static void main(String[] args) {

        final String usage = """
```

```
                Usage:
                   <clusterName> <serviceArn>\s

                Where:
                  clusterName - The cluster name.
                  serviceArn - The service ARN value.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String clusterName = args[0];
        String serviceArn = args[1];
        Region region = Region.US_EAST_1;
        EcsClient ecsClient = EcsClient.builder()
                .region(region)
                .build();

        updateSpecificService(ecsClient, clusterName, serviceArn);
        ecsClient.close();
    }

    public static void updateSpecificService(EcsClient ecsClient, String
 clusterName, String serviceArn) {
        try {
            UpdateServiceRequest serviceRequest = UpdateServiceRequest.builder()
                    .cluster(clusterName)
                    .service(serviceArn)
                    .desiredCount(0)
                    .build();

            ecsClient.updateService(serviceRequest);
            System.out.println("The service was modified");

        } catch (EcsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat UpdateServicedi Referensi AWS SDK for Java 2.x API.

# Elastic Load Balancing - Contoh Versi 2 menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Elastic Load Balancing - Versi 2.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Tindakan
- Skenario


## Memulai

Halo Elastic Load Balancing

Contoh kode berikut menunjukkan bagaimana memulai menggunakan Elastic Load Balancing.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class HelloLoadBalancer {

        public static void main(String[] args) {
                ElasticLoadBalancingV2Client loadBalancingV2Client =
 ElasticLoadBalancingV2Client.builder()
                                .region(Region.US_EAST_1)
                                .build();

                DescribeLoadBalancersResponse loadBalancersResponse =
 loadBalancingV2Client
                                .describeLoadBalancers(r -> r.pageSize(10));
                List<LoadBalancer> loadBalancerList =
 loadBalancersResponse.loadBalancers();
                for (LoadBalancer lb : loadBalancerList)
                        System.out.println("Load Balancer DNS name = " +
 lb.dnsName());
        }
}
```

- Untuk detail API, lihat DescribeLoadBalancersdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `CreateListener`

Contoh kode berikut menunjukkan cara menggunakan`CreateListener`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
```

```
   public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
           String protocol) {
       try {
           List<String> subnetIdStrings = subnetIds.stream()
                   .map(Subnet::subnetId)
                   .collect(Collectors.toList());

           CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                   .subnets(subnetIdStrings)
                   .name(lbName)
                   .scheme("internet-facing")
                   .build();

           // Create and wait for the load balancer to become available.
           CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
           String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(lbARN)
                   .build();

           System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
           WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                   .waitUntilLoadBalancerAvailable(request);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("Load Balancer " + lbName + " is available.");

           // Get the DNS name (endpoint) of the load balancer.
           String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
           System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

           // Create a listener for the load balance.
           Action action = Action.builder()
                   .targetGroupArn(targetGroupARN)
                   .type("forward")
                   .build();
```

```
            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

.loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
```

- Untuk detail API, lihat CreateListenerdi Referensi AWS SDK for Java 2.x API.

### `CreateLoadBalancer`

Contoh kode berikut menunjukkan cara menggunakan`CreateLoadBalancer`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
```

```
    */
   public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
           String protocol) {
       try {
           List<String> subnetIdStrings = subnetIds.stream()
                   .map(Subnet::subnetId)
                   .collect(Collectors.toList());

           CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                   .subnets(subnetIdStrings)
                   .name(lbName)
                   .scheme("internet-facing")
                   .build();

           // Create and wait for the load balancer to become available.
           CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
           String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

           ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
           DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                   .loadBalancerArns(lbARN)
                   .build();

           System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
           WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                   .waitUntilLoadBalancerAvailable(request);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("Load Balancer " + lbName + " is available.");

           // Get the DNS name (endpoint) of the load balancer.
           String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
           System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

           // Create a listener for the load balance.
           Action action = Action.builder()
                   .targetGroupArn(targetGroupARN)
                   .type("forward")
```

```
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

.loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
```

- Untuk detail API, lihat CreateLoadBalancerdi Referensi AWS SDK for Java 2.x API.

### `CreateTargetGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateTargetGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
```

```
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }
```

- Untuk detail API, lihat CreateTargetGroupdi Referensi AWS SDK for Java 2.x API.

### `DeleteLoadBalancer`

Contoh kode berikut menunjukkan cara menggunakan`DeleteLoadBalancer`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Deletes a load balancer.
```

```
    public void deleteLoadBalancer(String lbName) {
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }
```

- Untuk detail API, lihat DeleteLoadBalancerdi Referensi AWS SDK for Java 2.x API.

### `DeleteTargetGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteTargetGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Deletes the target group.
```

```
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }
```

- Untuk detail API, lihat DeleteTargetGroupdi Referensi AWS SDK for Java 2.x API.

### `DescribeTargetHealth`

Contoh kode berikut menunjukkan cara menggunakan`DescribeTargetHealth`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
```

```
                .build();

        DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }
```

- Untuk detail API, lihat DescribeTargetHealthdi Referensi AWS SDK for Java 2.x API.

## Skenario

Membangun dan mengelola layanan yang tangguh

Contoh kode berikut menunjukkan cara membuat layanan web load-balanced yang mengembalikan rekomendasi buku, film, dan lagu. Contoh ini menunjukkan cara layanan tersebut merespons kegagalan, serta cara merestrukturisasi layanan agar lebih tangguh ketika terjadi kegagalan.

- Menggunakan grup Amazon EC2 Auto Scaling untuk membuat instans Amazon Elastic Compute Cloud (Amazon EC2) berdasarkan templat peluncuran dan menyimpan sejumlah instans dalam rentang yang ditentukan.
- Menangani dan mendistribusikan permintaan HTTP dengan Elastic Load Balancing.
- Memantau kondisi instans dalam grup Auto Scaling dan meneruskan permintaan hanya ke instans yang sehat.
- Menjalankan server web Python pada setiap instans EC2 untuk menangani permintaan HTTP. Server web merespons dengan memberikan rekomendasi dan melakukan pemeriksaan kondisi.
- Menyimulasikan layanan yang direkomendasikan dengan tabel Amazon DynamoDB.
- Kontrol respons server web terhadap permintaan dan pemeriksaan kesehatan dengan memperbarui AWS Systems Manager parameter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario interaktif di prompt perintah.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
```

```
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
```

```
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
```

```
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
```

```
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }

        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
```

```
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                        """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();
```

```
        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");
```

```
        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
```

```
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
```

```
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();

                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
```

```
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
    }
}
```

Membuat kelas yang menggabungkan tindakan Penskalaan Otomatis dan Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
```

```
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
```

```
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                                // name.
                .build();

        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
```

```
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
```

```
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
                    .build();

            GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
            String name = response.instanceProfile().instanceProfileName();
            System.out.println(name);

            RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .roleName(roleName)
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(profileRequest);
            DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                    .instanceProfileName(profileName)
                    .build();

            getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
            System.out.println("Deleted instance profile " + profileName);

            DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            // List attached role policies.
            ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                    .listAttachedRolePolicies(role -> role.roleName(roleName));
            List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
            for (AttachedPolicy attachedPolicy : attachedPolicies) {
                DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(attachedPolicy.policyArn())
```

```
                        .build();

                getIAMClient().detachRolePolicy(request);
                System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
            }

            getIAMClient().deleteRole(deleteRoleRequest);
            System.out.println("Instance profile and role deleted.");

        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
```

```
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
                    .build();

            Filter filter1 = Filter.builder()
                    .name("vpc-id")
                    .values(VPC)
                    .build();

            DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                    .filters(filter, filter1)
                    .build();

            DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                    .describeSecurityGroups(securityGroupsRequest);
            String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
            groupInfo.setGroupName(securityGroup);

            for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
                System.out.println("Found security group: " + secGroup.groupId());

                for (IpPermission ipPermission : secGroup.ipPermissions()) {
                    if (ipPermission.fromPort() == port) {
                        System.out.println("Found inbound rule: " + ipPermission);
                        for (IpRange ipRange : ipPermission.ipRanges()) {
                            String cidrIp = ipRange.cidrIp();
                            if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                                System.out.println(cidrIp + " is applicable");
                                portIsOpen = true;
                            }
                        }

                        if (!ipPermission.prefixListIds().isEmpty()) {
                            System.out.println("Prefix lList is applicable");
```

```
                            portIsOpen = true;
                        }

                        if (!portIsOpen) {
                            System.out
                                    .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                            + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {

        // Get availability zones.
        software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
                .builder()
                .build();

        DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
        List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
                .collect(Collectors.toList());

        String availabilityZones = String.join(",", availabilityZoneNames);
        LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
                .launchTemplateName(templateName)
                .version("$Default")
                .build();

        String[] zones = availabilityZones.split(",");
        CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
                .launchTemplate(specification)
                .availabilityZones(zones)
                .maxSize(groupSize)
                .minSize(groupSize)
                .autoScalingGroupName(autoScalingGroupName)
                .build();

        try {
            getAutoScalingClient().createAutoScalingGroup(groupRequest);
```

```
        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
        return zones;
    }

    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();
```

```
        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }

    // Gets data about the instances in the EC2 Auto Scaling group.
    public String getBadInstance(String groupName) {
        DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
                .autoScalingGroupNames(groupName)
                .build();

        DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
        AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
        List<String> instanceIds = autoScalingGroup.instances().stream()
                .map(instance -> instance.instanceId())
                .collect(Collectors.toList());

        String[] instanceIdArray = instanceIds.toArray(new String[0]);
        for (String instanceId : instanceIdArray) {
            System.out.println("Instance ID: " + instanceId);
            return instanceId;
        }
        return "";
    }

    // Gets data about the profile associated with an instance.
    public String getInstanceProfile(String instanceId) {
        Filter filter = Filter.builder()
                .name("instance-id")
                .values(instanceId)
                .build();

        DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
                .builder()
                .filters(filter)
                .build();
```

```
        DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
                .describeIamInstanceProfileAssociations(associationsRequest);
        return response.iamInstanceProfileAssociations().get(0).associationId();
    }

    public void deleteRolesPolicies(String policyName, String roleName, String
 InstanceProfile) {
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();
```

```
                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Membuat kelas yang menggabungkan tindakan Penyeimbangan Beban Elastis.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
 DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
 getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
 DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
 getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
```

```
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
```

```
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
```

```
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
 available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
 loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Membuat kelas yang menggunakan DynamoDB untuk menyimulasikan layanan yang direkomendasikan.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;

    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
 DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
```

```
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();
```

```
            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }

    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
```

```
        System.out.println("Added all records to the " + tableName);
    }
}
```

Membuat kelas yang mengabungkan tindakan Systems Manager.

```
public class ParameterHelper {

    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile

- CreateLaunchTemplate
- CreateListener
- CreateLoadBalancer
- CreateTargetGroup
- DeleteAutoScalingGroup
- DeleteInstanceProfile
- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

# MediaStore contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with MediaStore.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


# Tindakan

### `CreateContainer`

Contoh kode berikut menunjukkan cara menggunakan`CreateContainer`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.model.CreateContainerRequest;
import software.amazon.awssdk.services.mediastore.model.CreateContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateContainer {
    public static long sleepTime = 10;

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>
```

```
                Where:
                   containerName - The name of the container to create.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        createMediaContainer(mediaStoreClient, containerName);
        mediaStoreClient.close();
    }


    public static void createMediaContainer(MediaStoreClient mediaStoreClient,
String containerName) {
        try {
            CreateContainerRequest containerRequest =
CreateContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            CreateContainerResponse containerResponse =
mediaStoreClient.createContainer(containerRequest);
            String status = containerResponse.container().status().toString();
            while (!status.equalsIgnoreCase("Active")) {
                status = DescribeContainer.checkContainer(mediaStoreClient,
containerName);
                System.out.println("Status - " + status);
                Thread.sleep(sleepTime * 1000);
            }

            System.out.println("The container ARN value is " +
containerResponse.container().arn());
            System.out.println("Finished ");

        } catch (MediaStoreException | InterruptedException e) {
```

```
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateContainerdi Referensi AWS SDK for Java 2.x API.

### `DeleteContainer`

Contoh kode berikut menunjukkan cara menggunakan`DeleteContainer`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.model.CreateContainerRequest;
import software.amazon.awssdk.services.mediastore.model.CreateContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateContainer {
    public static long sleepTime = 10;

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>
```

```
                Where:
                   containerName - The name of the container to create.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        createMediaContainer(mediaStoreClient, containerName);
        mediaStoreClient.close();
    }


    public static void createMediaContainer(MediaStoreClient mediaStoreClient,
String containerName) {
        try {
            CreateContainerRequest containerRequest =
CreateContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            CreateContainerResponse containerResponse =
mediaStoreClient.createContainer(containerRequest);
            String status = containerResponse.container().status().toString();
            while (!status.equalsIgnoreCase("Active")) {
                status = DescribeContainer.checkContainer(mediaStoreClient,
containerName);
                System.out.println("Status - " + status);
                Thread.sleep(sleepTime * 1000);
            }

            System.out.println("The container ARN value is " +
containerResponse.container().arn());
            System.out.println("Finished ");

        } catch (MediaStoreException | InterruptedException e) {
```

```
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteContainerdi Referensi AWS SDK for Java 2.x API.

### `DeleteObject`

Contoh kode berikut menunjukkan cara menggunakan`DeleteObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.services.mediastoredata.model.DeleteObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import java.net.URI;
import java.net.URISyntaxException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteObject {
    public static void main(String[] args) throws URISyntaxException {
        final String usage = """
```

```
                Usage:    <completePath> <containerName>

                Where:
                   completePath - The path (including the container) of the item to
delete.
                   containerName - The name of the container.
                """;

       if (args.length != 2) {
           System.out.println(usage);
           System.exit(1);
       }

       String completePath = args[0];
       String containerName = args[1];
       Region region = Region.US_EAST_1;
       URI uri = new URI(getEndpoint(containerName));

       MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
               .endpointOverride(uri)
               .region(region)
               .build();

       deleteMediaObject(mediaStoreData, completePath);
       mediaStoreData.close();
   }

   public static void deleteMediaObject(MediaStoreDataClient mediaStoreData, String
completePath) {
       try {
           DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
                   .path(completePath)
                   .build();

           mediaStoreData.deleteObject(deleteObjectRequest);

       } catch (MediaStoreDataException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   private static String getEndpoint(String containerName) {
```

```
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        mediaStoreClient.close();
        return response.container().endpoint();
    }
}
```

- Untuk detail API, lihat DeleteObjectdi Referensi AWS SDK for Java 2.x API.

### `DescribeContainer`

Contoh kode berikut menunjukkan cara menggunakan`DescribeContainer`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeContainer {

    public static void main(String[] args) {
        final String usage = """

                Usage:    <containerName>

                Where:
                   containerName - The name of the container to describe.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String containerName = args[0];
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        System.out.println("Status is " + checkContainer(mediaStoreClient,
 containerName));
        mediaStoreClient.close();
    }

    public static String checkContainer(MediaStoreClient mediaStoreClient, String
 containerName) {
        try {
            DescribeContainerRequest describeContainerRequest =
 DescribeContainerRequest.builder()
                    .containerName(containerName)
                    .build();

            DescribeContainerResponse containerResponse =
 mediaStoreClient.describeContainer(describeContainerRequest);
            System.out.println("The container name is " +
 containerResponse.container().name());
```

```
            System.out.println("The container ARN is " +
 containerResponse.container().arn());
            return containerResponse.container().status().toString();

        } catch (MediaStoreException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat DescribeContainerdi Referensi AWS SDK for Java 2.x API.

### `GetObject`

Contoh kode berikut menunjukkan cara menggunakan`GetObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.ResponseInputStream;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.services.mediastoredata.model.GetObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.GetObjectResponse;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;
import java.net.URI;
import java.net.URISyntaxException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObject {
    public static void main(String[] args) throws URISyntaxException {
        final String usage = """

                Usage:    <completePath> <containerName> <savePath>

                Where:
                   completePath - The path of the object in the container (for
 example, Videos5/sampleVideo.mp4).
                   containerName - The name of the container.
                   savePath - The path on the local drive where the file is saved,
 including the file name (for example, C:/AWS/myvid.mp4).
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String completePath = args[0];
        String containerName = args[1];
        String savePath = args[2];

        Region region = Region.US_EAST_1;
        URI uri = new URI(getEndpoint(containerName));
        MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
                .endpointOverride(uri)
                .region(region)
                .build();

        getMediaObject(mediaStoreData, completePath, savePath);
        mediaStoreData.close();
    }
```

```
    public static void getMediaObject(MediaStoreDataClient mediaStoreData, String
 completePath, String savePath) {

        try {
            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .path(completePath)
                    .build();

            // Write out the data to a file.
            ResponseInputStream<GetObjectResponse> data =
 mediaStoreData.getObject(objectRequest);
            byte[] buffer = new byte[data.available()];
            data.read(buffer);

            File targetFile = new File(savePath);
            OutputStream outStream = new FileOutputStream(targetFile);
            outStream.write(buffer);
            System.out.println("The data was written to " + savePath);

        } catch (MediaStoreDataException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    private static String getEndpoint(String containerName) {
        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        return response.container().endpoint();
    }
}
```

- Untuk detail API, lihat GetObjectdi Referensi AWS SDK for Java 2.x API.

### `ListContainers`

Contoh kode berikut menunjukkan cara menggunakan`ListContainers`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastore.model.Container;
import software.amazon.awssdk.services.mediastore.model.ListContainersResponse;
import software.amazon.awssdk.services.mediastore.model.MediaStoreException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListContainers {

    public static void main(String[] args) {

        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        listAllContainers(mediaStoreClient);
        mediaStoreClient.close();
    }

    public static void listAllContainers(MediaStoreClient mediaStoreClient) {
        try {
```

```
            ListContainersResponse containersResponse =
 mediaStoreClient.listContainers();
            List<Container> containers = containersResponse.containers();
            for (Container container : containers) {
                System.out.println("Container name is " + container.name());
            }

        } catch (MediaStoreException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListContainersdi Referensi AWS SDK for Java 2.x API.

### `PutObject`

Contoh kode berikut menunjukkan cara menggunakan`PutObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediastore.MediaStoreClient;
import software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.mediastoredata.model.PutObjectRequest;
import software.amazon.awssdk.services.mediastoredata.model.MediaStoreDataException;
import software.amazon.awssdk.services.mediastoredata.model.PutObjectResponse;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerRequest;
import software.amazon.awssdk.services.mediastore.model.DescribeContainerResponse;
import java.io.File;
import java.net.URI;
import java.net.URISyntaxException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutObject {
    public static void main(String[] args) throws URISyntaxException {
        final String USAGE = """

                To run this example, supply the name of a container, a file location
 to use, and path in the container\s

                Ex: <containerName> <filePath> <completePath>
                """;

        if (args.length < 3) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String containerName = args[0];
        String filePath = args[1];
        String completePath = args[2];

        Region region = Region.US_EAST_1;
        URI uri = new URI(getEndpoint(containerName));
        MediaStoreDataClient mediaStoreData = MediaStoreDataClient.builder()
                .endpointOverride(uri)
                .region(region)
                .build();

        putMediaObject(mediaStoreData, filePath, completePath);
        mediaStoreData.close();
    }

    public static void putMediaObject(MediaStoreDataClient mediaStoreData, String
 filePath, String completePath) {
        try {
            File myFile = new File(filePath);
            RequestBody requestBody = RequestBody.fromFile(myFile);
```

```
            PutObjectRequest objectRequest = PutObjectRequest.builder()
                    .path(completePath)
                    .contentType("video/mp4")
                    .build();

            PutObjectResponse response = mediaStoreData.putObject(objectRequest,
 requestBody);
            System.out.println("The saved object is " +
 response.storageClass().toString());

        } catch (MediaStoreDataException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getEndpoint(String containerName) {

        Region region = Region.US_EAST_1;
        MediaStoreClient mediaStoreClient = MediaStoreClient.builder()
                .region(region)
                .build();

        DescribeContainerRequest containerRequest =
 DescribeContainerRequest.builder()
                .containerName(containerName)
                .build();

        DescribeContainerResponse response =
 mediaStoreClient.describeContainer(containerRequest);
        return response.container().endpoint();
    }
}
```

- Untuk detail API, lihat PutObjectdi Referensi AWS SDK for Java 2.x API.

# Resolusi Entitas AWS contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Resolusi Entitas AWS.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

Halo Resolusi Entitas AWS

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan Resolusi Entitas AWS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloEntityResoultion {
```

```
   private static final Logger logger =
LoggerFactory.getLogger(HelloEntityResoultion.class);

   private static EntityResolutionAsyncClient entityResolutionAsyncClient;
   public static void main(String[] args) {
       listMatchingWorkflows();
   }

   public static EntityResolutionAsyncClient getResolutionAsyncClient() {
       if (entityResolutionAsyncClient == null) {
           /*
           The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
           and it is designed to provide a high-performance, asynchronous HTTP
client for interacting with AWS services.
            It uses the Netty framework to handle the underlying network
communication and the Java NIO API to
            provide a non-blocking, event-driven approach to HTTP requests and
responses.
            */

           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(50)  // Adjust as needed.
               .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
               .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
               .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
               .build();

           ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
               .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
               .retryStrategy(RetryMode.STANDARD)
               .build();

           entityResolutionAsyncClient = EntityResolutionAsyncClient.builder()
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return entityResolutionAsyncClient;
```

```
    }

    /**
     * Lists all matching workflows using an asynchronous paginator.
     * <p>
     * This method requests a paginated list of matching workflows from the
     * AWS Entity Resolution service and logs the names of the retrieved workflows.
     * It uses an asynchronous approach with a paginator and waits for the operation
     * to complete using {@code CompletableFuture#join()}.
     * </p>
     */
    public static void listMatchingWorkflows() {
        ListMatchingWorkflowsRequest request =
 ListMatchingWorkflowsRequest.builder().build();

        ListMatchingWorkflowsPublisher paginator =
            getResolutionAsyncClient().listMatchingWorkflowsPaginator(request);

        // Iterate through the paginated results asynchronously
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            response.workflowSummaries().forEach(workflow ->
                logger.info("Matching Workflow Name: " + workflow.workflowName())
            );
        });

        // Wait for the asynchronous operation to complete
        future.join();
    }
}
```

- Untuk detail API, lihat ListMatchingWorkflowsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat Pemetaan Skema.
- Buat Resolusi Entitas AWS alur kerja.
- Mulai pekerjaan yang cocok untuk alur kerja.

- Dapatkan detail untuk pekerjaan yang cocok.
- Dapatkan Pemetaan Skema.
- Daftar semua Pemetaan Skema.
- Tandai sumber daya Pemetaan Skema.
- Hapus Resolusi Entitas AWS Aset.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan Resolusi Entitas AWS fitur.

```
public class EntityResScenario {
    private static final Logger logger =
 LoggerFactory.getLogger(EntityResScenario.class);
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String STACK_NAME = "EntityResolutionCdkStack2";
    private static final String ENTITY_RESOLUTION_ROLE_ARN_KEY =
 "EntityResolutionRoleArn";
    private static final String GLUE_DATA_BUCKET_NAME_KEY = "GlueDataBucketName";
    private static final String JSON_GLUE_TABLE_ARN_KEY = "JsonErGlueTableArn";
    private static final String CSV_GLUE_TABLE_ARN_KEY = "CsvErGlueTableArn";
    private static String glueBucketName;
    private static String workflowName = "workflow-" + UUID.randomUUID();

    private static String jsonSchemaMappingName = "jsonschema-" + UUID.randomUUID();
    private static String jsonSchemaMappingArn = null;
    private static String csvSchemaMappingName = "csv-" + UUID.randomUUID();
    private static String roleARN;
    private static String csvGlueTableArn;
    private static String jsonGlueTableArn;
    private static Scanner scanner = new Scanner(System.in);

    private static EntityResActions actions = new EntityResActions();

    public static void main(String[] args) throws InterruptedException {
```

```
        logger.info("Welcome to the AWS Entity Resolution Scenario.");
        logger.info("""
            AWS Entity Resolution is a fully-managed machine learning service
provided by
            Amazon Web Services (AWS) that helps organizations extract, link, and
            organize information from multiple data sources. It leverages natural
            language processing and deep learning models to identify and resolve
            entities, such as people, places, organizations, and products,
            across structured and unstructured data.

            With Entity Resolution, customers can build robust data integration
            pipelines to combine and reconcile data from multiple systems,
databases,
            and documents. The service can handle ambiguous, incomplete, or
conflicting
            information, and provide a unified view of entities and their
relationships.
            This can be particularly valuable in applications such as customer 360,
            fraud detection, supply chain management, and knowledge management,
where
            accurate entity identification is crucial.

            The `EntityResolutionAsyncClient` interface in the AWS SDK for Java 2.x
            provides a set of methods to programmatically interact with the AWS
Entity
            Resolution service. This allows developers to automate the entity
extraction,
            linking, and deduplication process as part of their data processing
workflows.
            With Entity Resolution, organizations can unlock the value of their
data,
            improve decision-making, and enhance customer experiences by having a
reliable,
            comprehensive view of their key entities.
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("""
            To prepare the AWS resources needed for this scenario application, the
next step uploads
```

```
            a CloudFormation template whose resulting stack creates the following
resources:
            - An AWS Glue Data Catalog table
            - An AWS IAM role
            - An AWS S3 bucket
            - An AWS Entity Resolution Schema

            It can take a couple minutes for the Stack to finish creating the
resources.
            """);
        waitForInputToContinue(scanner);
        logger.info("Generating resources...");
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME);
        Map<String, String> outputsMap =
CloudFormationHelper.getStackOutputsAsync(STACK_NAME).join();
        roleARN = outputsMap.get(ENTITY_RESOLUTION_ROLE_ARN_KEY);
        glueBucketName = outputsMap.get(GLUE_DATA_BUCKET_NAME_KEY);
        csvGlueTableArn = outputsMap.get(CSV_GLUE_TABLE_ARN_KEY);
        jsonGlueTableArn = outputsMap.get(JSON_GLUE_TABLE_ARN_KEY);
        logger.info(DASHES);
        waitForInputToContinue(scanner);

        try {
            runScenario();

        } catch (Exception ce) {
            Throwable cause = ce.getCause();
            logger.error("An exception happened: " + (cause != null ?
cause.getMessage() : ce.getMessage()));
        }
    }

    private static void runScenario() throws InterruptedException {
        /*
         This JSON is a valid input for the AWS Entity Resolution service.
         The JSON represents an array of three objects, each containing an "id",
"name", and "email"
         property. This format aligns with the expected input structure for the
         Entity Resolution service.
         */
        String json = """
            {"id":"1","name":"Jane Doe","email":"jane.doe@example.com"}
            {"id":"2","name":"John Doe","email":"john.doe@example.com"}
            {"id":"3","name":"Jorge Souza","email":"jorge_souza@example.com"}
```

```
            """;
        logger.info("Upload the following JSON objects to the {} S3 bucket.",
glueBucketName);
        logger.info(json);
        String csv = """
            id,name,email,phone
            1,Jane B.,Doe,jane.doe@example.com,555-876-9846
            2,John Doe Jr.,john.doe@example.com,555-654-3210
            3,María García,maría_garcia@company.com,555-567-1234
            4,Mary Major,mary_major@company.com,555-222-3333
            """;
        logger.info("Upload the following CSV data to the {} S3 bucket.",
glueBucketName);
        logger.info(csv);
        waitForInputToContinue(scanner);
        try {
            actions.uploadInputData(glueBucketName, json, csv);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
                logger.error("Failed to upload input data: {}", ce.getMessage(),
ce);
            }

            if (cause instanceof ResourceNotFoundException) {
                logger.error("Failed to upload input data as the resource was not
found: {}", cause.getMessage(), cause);
            }
            return;
        }
        logger.info("The JSON and CSV objects have been uploaded to the S3
bucket.");
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create Schema Mapping");
        logger.info("""
            Entity Resolution schema mapping aligns and integrates data from
            multiple sources by identifying and matching corresponding entities
            like customers or products. It unifies schemas, resolves conflicts,
            and uses machine learning to link related entities, enabling a
```

```
            consolidated, accurate view for improved data quality and decision-
making.

            In this example, the schema mapping lines up with the fields in the JSON
 and CSV objects. That is,
            it contains these fields: id, name, and email.
            """);
        try {
            CreateSchemaMappingResponse response =
actions.createSchemaMappingAsync(jsonSchemaMappingName).join();
            jsonSchemaMappingName = response.schemaName();
            logger.info("The JSON schema mapping name is " + jsonSchemaMappingName);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
                logger.error("Failed to create JSON schema mapping: {}",
ce.getMessage(), ce);
            }

            if (cause instanceof ConflictException) {
                logger.error("Schema mapping conflict detected: {}",
cause.getMessage(), cause);
            } else {
                logger.error("Unexpected error while creating schema mapping: {}",
cause.getMessage(), cause);
            }
            return;
        }

        try {
            CreateSchemaMappingResponse response =
actions.createSchemaMappingAsync(csvSchemaMappingName).join();
            csvSchemaMappingName = response.schemaName();
            logger.info("The CSV schema mapping name is " + csvSchemaMappingName);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause == null) {
                logger.error("Failed to create CSV schema mapping: {}",
ce.getMessage(), ce);
            }

            if (cause instanceof ConflictException) {
```

```
                logger.error("Schema mapping conflict detected: {}",
cause.getMessage(), cause);
            } else {
                logger.error("Unexpected error while creating CSV schema mapping:
{}", cause.getMessage(), cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Create an AWS Entity Resolution Workflow. ");
        logger.info("""
            An Entity Resolution matching workflow identifies and links records
            across datasets that represent the same real-world entity, such as
            customers or products. Using techniques like schema mapping,
            data profiling, and machine learning algorithms,
            it evaluates attributes like names or emails to detect duplicates
            or relationships, even with variations or inconsistencies.
            The workflow outputs consolidated, de-duplicated data.

            We will use the machine learning-based matching technique.
            """);
        waitForInputToContinue(scanner);
        try {
            String workflowArn = actions.createMatchingWorkflowAsync(
                roleARN, workflowName, glueBucketName, jsonGlueTableArn,
                jsonSchemaMappingName, csvGlueTableArn,
csvSchemaMappingName).join();

            logger.info("The workflow ARN is: " + workflowArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause == null) {
                logger.error("An unexpected error occurred: {}", ce.getMessage(),
ce);
            }

            if (cause instanceof ValidationException) {
                logger.error("Validation error: {}", cause.getMessage(), cause);
            } else if (cause instanceof ConflictException) {
```

```
                logger.error("Workflow conflict detected: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Unexpected error: {}", cause.getMessage(), cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);
        logger.info("3. Start the matching job of the " + workflowName + "
workflow.");
        waitForInputToContinue(scanner);
        String jobId = null;
        try {
            jobId = actions.startMatchingJobAsync(workflowName).join();
            logger.info("The matching job was successfully started.");
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("Job conflict detected: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Unexpected error while starting the job: {}",
ce.getMessage(), ce);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. While the matching job is running, let's look at other API
methods. First, let's get details for job " + jobId);
        waitForInputToContinue(scanner);
        try {
            actions.getMatchingJobAsync(jobId, workflowName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The matching job not found: {}", cause.getMessage(),
cause);
            } else {
```

```
                logger.error("Failed to start matching job: " + (cause != null ?
cause.getMessage() : ce.getMessage()));
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Get the schema mapping for the JSON data.");
        waitForInputToContinue(scanner);
        try {
            GetSchemaMappingResponse response =
actions.getSchemaMappingAsync(jsonSchemaMappingName).join();
            jsonSchemaMappingArn = response.schemaArn();
            logger.info("Schema mapping ARN is " + jsonSchemaMappingArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("Schema mapping not found: {}", cause.getMessage(),
cause);
            } else {
                logger.error("Error retrieving the specific schema mapping: " +
ce.getCause().getMessage());
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. List Schema Mappings.");
        try {
            actions.ListSchemaMappings();
        } catch (CompletionException ce) {
            logger.error("Error retrieving schema mappings: " +
ce.getCause().getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Tag the {} resource.", jsonSchemaMappingName);
        logger.info("""
```

```
            Tags can help you organize and categorize your Entity Resolution
resources.
            You can also use them to scope user permissions by granting a user
permission
            to access or change only resources with certain tag values.
            In Entity Resolution, SchemaMapping and MatchingWorkflow can be tagged.
For this example,
            the SchemaMapping is tagged.
                """);
        try {
            actions.tagEntityResource(jsonSchemaMappingArn).join();
        } catch (CompletionException ce) {
            logger.error("Error tagging the resource: " +
ce.getCause().getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. View the results of the AWS Entity Resolution Workflow.");
        logger.info("""
            You cannot view the result of the workflow that is in a running state.
            In order to view the results, you need to wait for the workflow that we
started in step 3 to complete.

            If you choose not to wait, you cannot view the results. You can perform

            this task manually in the AWS Management Console.

            This can take up to 30 mins (y/n).
            """);
        String viewAns = scanner.nextLine().trim();
        boolean isComplete = false;
        if (viewAns.equalsIgnoreCase("y")) {
            logger.info("You selected to view the Entity Resolution Workflow
results.");
            countdownWithWorkflowCheck(actions, 1800, jobId, workflowName);
            isComplete = true;
            try {
                JobMetrics metrics = actions.getJobInfo(workflowName, jobId).join();
                logger.info("Number of input records: {}", metrics.inputRecords());
                logger.info("Number of match ids: {}", metrics.matchIDs());
```

```
                logger.info("Number of records not processed: {}",
metrics.recordsNotProcessed());
                logger.info("Number of total records processed: {}",
metrics.totalRecordsProcessed());
                logger.info("The following represents the output data generated by
the Entity Resolution workflow based on the JSON and CSV input data. The output
data is stored in the {} bucket.", glueBucketName);
                actions.printData(glueBucketName);

                logger.info("""

                    Note that each of the last 2 records are considered a match even
though the 'name' differs between the records;
                    For example 'John Doe Jr.' compared to 'John Doe'.
                    The confidence level is a value between 0 and 1, where 1
indicates a perfect match.

                    """);

            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.error("The job not found: {}", cause.getMessage(),
cause);
                } else {
                    logger.error("Error retrieving job information: " +
ce.getCause().getMessage());
                }
                return;
            }
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Do you want to delete the resources, including the workflow?
(y/n)");
        logger.info("""
            You cannot delete the workflow that is in a running state.
            In order to delete the workflow, you need to wait for the workflow to
complete.
```

```
            You can delete the workflow manually in the AWS Management Console at a
later time.

            If you already waited for the workflow to complete in the previous
step,
            the workflow is completed and you can delete it.

            If the workflow is not completed, this can take up to 30 mins (y/n).
            """);
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            try {
                if (!isComplete) {
                    countdownWithWorkflowCheck(actions, 1800, jobId, workflowName);
                }
                actions.deleteMatchingWorkflowAsync(workflowName).join();
                logger.info("Workflow deleted successfully!");
            } catch (CompletionException ce) {
                logger.info("Error deleting the workflow: {} ", ce.getMessage());
                return;
            }

            try {
                // Delete both schema mappings.
                actions.deleteSchemaMappingAsync(jsonSchemaMappingName).join();
                actions.deleteSchemaMappingAsync(csvSchemaMappingName).join();
                logger.info("Both schema mappings were deleted successfully!");
            } catch (CompletionException ce) {
                logger.error("Error deleting schema mapping: {}", ce.getMessage());
                return;
            }

            waitForInputToContinue(scanner);
            logger.info(DASHES);
            logger.info("""
                Now we delete the CloudFormation stack, which deletes
                the resources that were created at the beginning of this scenario.
                """);
            waitForInputToContinue(scanner);
            logger.info(DASHES);
            try {
                deleteCloudFormationStack();
            } catch (RuntimeException e) {
                logger.error("Failed to delete the stack: {}", e.getMessage());
```

```
                return;
            }

        } else {
            logger.info("You can delete the AWS resources in the AWS Management
Console.");
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("This concludes the AWS Entity Resolution scenario.");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdownWithWorkflowCheck(EntityResActions actions, int
totalSeconds, String jobId, String workflowName) throws InterruptedException {
        int secondsElapsed = 0;

        while (true) {
            // Calculate display minutes and seconds.
            int remainingTime = totalSeconds - secondsElapsed;
            int displayMinutes = remainingTime / 60;
            int displaySeconds = remainingTime % 60;

            // Print the countdown.
```

```
            System.out.printf("\r%02d:%02d", displayMinutes, displaySeconds);
            Thread.sleep(1000); // Wait for 1 second
            secondsElapsed++;

            // Check workflow status every 60 seconds.
            if (secondsElapsed % 60 == 0 || remainingTime <= 0) {
                GetMatchingJobResponse response =
 actions.checkWorkflowStatusCompleteAsync(jobId, workflowName).join();
                if (response != null &&
 "SUCCEEDED".equalsIgnoreCase(String.valueOf(response.status()))) {
                    logger.info(""); // Move to the next line after countdown.
                    logger.info("Countdown complete: Workflow is in Completed
 state!");
                    break; // Break out of the loop if the status is "SUCCEEDED"
                }
            }

            // If countdown reaches zero, reset it for continuous countdown.
            if (remainingTime <= 0) {
                secondsElapsed = 0;
            }
        }
    }

    private static void deleteCloudFormationStack() {
        try {
            CloudFormationHelper.emptyS3Bucket(glueBucketName);
            CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
            logger.info("Resources deleted successfully!");
        } catch (CloudFormationException e) {
            throw new RuntimeException("Failed to delete CloudFormation stack: " +
 e.getMessage(), e);
        } catch (S3Exception e) {
            throw new RuntimeException("Failed to empty S3 bucket: " +
 e.getMessage(), e);
        }
    }
}
```

Kelas pembungkus untuk metode Resolusi Entitas AWS SDK.

```
public class EntityResActions {
```

```
   private static final String PREFIX = "eroutput/";
   private static final Logger logger =
LoggerFactory.getLogger(EntityResActions.class);

   private static EntityResolutionAsyncClient entityResolutionAsyncClient;

   private static S3AsyncClient s3AsyncClient;

   public static EntityResolutionAsyncClient getResolutionAsyncClient() {
       if (entityResolutionAsyncClient == null) {
           /*
           The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
           and it is designed to provide a high-performance, asynchronous HTTP
client for interacting with AWS services.
            It uses the Netty framework to handle the underlying network
communication and the Java NIO API to
            provide a non-blocking, event-driven approach to HTTP requests and
responses.
            */

           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(50)  // Adjust as needed.
               .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
               .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
               .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
               .build();

           ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
               .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
               .retryStrategy(RetryMode.STANDARD)
               .build();

           entityResolutionAsyncClient = EntityResolutionAsyncClient.builder()
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
```

```
        return entityResolutionAsyncClient;
    }

    public static S3AsyncClient getS3AsyncClient() {
        if (s3AsyncClient == null) {
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return s3AsyncClient;
    }

    /**
     * Deletes the schema mapping asynchronously.
     *
```

```
    * @param schemaName the name of the schema to delete
    * @return a {@link CompletableFuture} that completes when the schema mapping is
deleted successfully,
    * or throws a {@link RuntimeException} if the deletion fails
    */
   public CompletableFuture<DeleteSchemaMappingResponse>
deleteSchemaMappingAsync(String schemaName) {
       DeleteSchemaMappingRequest request = DeleteSchemaMappingRequest.builder()
           .schemaName(schemaName)
           .build();

       return getResolutionAsyncClient().deleteSchemaMapping(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   // Successfully deleted the schema mapping, log the success
message.
                   logger.info("Schema mapping '{}' deleted successfully.",
schemaName);
               } else {
                   // Ensure exception is not null before accessing its cause.
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while deleting the schema mapping.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The schema mapping was not
found to delete: " + schemaName, cause);
                   }

                   // Wrap other AWS exceptions in a CompletionException.
                   throw new CompletionException("Failed to delete schema mapping:
" + schemaName, exception);
               }
           });
   }

   /**
    * Lists the schema mappings associated with the current AWS account. This
method uses an asynchronous paginator to
    * retrieve the schema mappings, and prints the name of each schema mapping to
the console.
    */
```

```
   public void ListSchemaMappings() {
       ListSchemaMappingsRequest mappingsRequest =
ListSchemaMappingsRequest.builder()
           .build();

       ListSchemaMappingsPublisher paginator =
getResolutionAsyncClient().listSchemaMappingsPaginator(mappingsRequest);

       // Iterate through the pages of results
       CompletableFuture<Void> future = paginator.subscribe(response -> {
           response.schemaList().forEach(schemaMapping ->
               logger.info("Schema Mapping Name: " + schemaMapping.schemaName())
           );
       });

       // Wait for the asynchronous operation to complete
       future.join();
   }

   /**
    * Asynchronously deletes a workflow with the specified name.
    *
    * @param workflowName the name of the workflow to be deleted
    * @return a {@link CompletableFuture} that completes when the workflow has been
deleted
    * @throws RuntimeException if the deletion of the workflow fails
    */
   public CompletableFuture<DeleteMatchingWorkflowResponse>
deleteMatchingWorkflowAsync(String workflowName) {
       DeleteMatchingWorkflowRequest request =
DeleteMatchingWorkflowRequest.builder()
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().deleteMatchingWorkflow(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   logger.info("{} was deleted", workflowName );
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while deleting the workflow.", null);
                   }
```

```
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The workflow to delete was
not found.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete workflow: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Creates a schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to create
     * @return a {@link CompletableFuture} that represents the asynchronous creation
of the schema mapping
     */
    public CompletableFuture<CreateSchemaMappingResponse>
createSchemaMappingAsync(String schemaName) {
        List<SchemaInputAttribute> schemaAttributes = null;
        if (schemaName.startsWith("json")) {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp
            );
        } else {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp

SchemaInputAttribute.builder().fieldName("phone").type(SchemaAttributeType.PROVIDER_ID).sub
            );
        }
```

```
        CreateSchemaMappingRequest request = CreateSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .mappedInputFields(schemaAttributes)
            .build();

        return getResolutionAsyncClient().createSchemaMapping(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("[{}] schema mapping Created Successfully!",
schemaName);
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while creating the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting schema mapping
already exists. Resolve conflicts before proceeding.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to create schema mapping:
" + exception.getMessage(), exception);
                }
            });
    }

    /**
     * Retrieves the schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to retrieve the mapping for
     * @return a {@link CompletableFuture} that completes with the {@link
GetSchemaMappingResponse} when the operation
     * is complete
     * @throws RuntimeException if the schema mapping retrieval fails
     */
    public CompletableFuture<GetSchemaMappingResponse> getSchemaMappingAsync(String
schemaName) {
        GetSchemaMappingRequest mappingRequest = GetSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .build();
```

```
        return getResolutionAsyncClient().getSchemaMapping(mappingRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    response.mappedInputFields().forEach(attribute ->
                        logger.info("Attribute Name: " + attribute.fieldName() +
                            ", Attribute Type: " + attribute.type().toString()));
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while getting schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested schema mapping
was not found.", cause);
                    }

                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Failed to get schema mapping: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Asynchronously retrieves a matching job based on the provided job ID and
workflow name.
     *
     * @param jobId        the ID of the job to retrieve
     * @param workflowName the name of the workflow associated with the job
     * @return a {@link CompletableFuture} that completes when the job information
is available or an exception occurs
     */
    public CompletableFuture<GetMatchingJobResponse> getMatchingJobAsync(String
jobId, String workflowName) {
        GetMatchingJobRequest request = GetMatchingJobRequest.builder()
            .jobId(jobId)
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().getMatchingJob(request)
```

```
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully fetched the matching job details, log the job
status.
                    logger.info("Job status: " + response.status());
                    logger.info("Job details: " + response.toString());
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while fetching the matching job.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested job could not
be found.", cause);
                    }

                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Error fetching matching job: " +
exception.getMessage(), exception);
                }
            });
    }


    /**
     * Starts a matching job asynchronously for the specified workflow name.
     *
     * @param workflowName the name of the workflow for which to start the matching
job
     * @return a {@link CompletableFuture} that completes with the job ID of the
started matching job, or an empty
     * string if the operation fails
     */
    public CompletableFuture<String> startMatchingJobAsync(String workflowName) {
        StartMatchingJobRequest jobRequest = StartMatchingJobRequest.builder()
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().startMatchingJob(jobRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
```

```
                    String jobId = response.jobId();
                    logger.info("Job ID: " + jobId);
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while starting the job.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The job is already running.
Resolve conflicts before starting a new job.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to start the job: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response != null ? response.jobId() : "");
    }

    /**
     * Checks the status of a workflow asynchronously.
     *
     * @param jobId        the ID of the job to check
     * @param workflowName the name of the workflow to check
     * @return a CompletableFuture that resolves to a boolean value indicating
whether the workflow has completed
     * successfully
     */
    public CompletableFuture<GetMatchingJobResponse>
checkWorkflowStatusCompleteAsync(String jobId, String workflowName) {
        GetMatchingJobRequest request = GetMatchingJobRequest.builder()
            .jobId(jobId)
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().getMatchingJob(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Process the response and log the job status.
                    logger.info("Job status: " + response.status());
                } else {
```

```
                    // Ensure exception is not null before accessing its cause.
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while checking job status.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested resource was
not found while checking the job status.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to check job status: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Creates an asynchronous CompletableFuture to manage the creation of a
matching workflow.
     *
     * @param roleARN                the AWS IAM role ARN to be used for the
workflow execution
     * @param workflowName           the name of the workflow to be created
     * @param outputBucket           the S3 bucket path where the workflow output
will be stored
     * @param jsonGlueTableArn       the ARN of the Glue Data Catalog table to be
used as the input source
     * @param jsonErSchemaMappingName the name of the schema to be used for the
input source
     * @return a CompletableFuture that, when completed, will return the ARN of the
created workflow
     */
    public CompletableFuture<String> createMatchingWorkflowAsync(
        String roleARN
        , String workflowName
        , String outputBucket
        , String jsonGlueTableArn
        , String jsonErSchemaMappingName
        , String csvGlueTableArn
        , String csvErSchemaMappingName) {
```

```
        InputSource jsonInputSource = InputSource.builder()
            .inputSourceARN(jsonGlueTableArn)
            .schemaName(jsonErSchemaMappingName)
            .applyNormalization(false)
            .build();

        InputSource csvInputSource = InputSource.builder()
            .inputSourceARN(csvGlueTableArn)
            .schemaName(csvErSchemaMappingName)
            .applyNormalization(false)
            .build();

        OutputAttribute idOutputAttribute = OutputAttribute.builder()
            .name("id")
            .build();

        OutputAttribute nameOutputAttribute = OutputAttribute.builder()
            .name("name")
            .build();

        OutputAttribute emailOutputAttribute = OutputAttribute.builder()
            .name("email")
            .build();

        OutputAttribute phoneOutputAttribute = OutputAttribute.builder()
            .name("phone")
            .build();

        OutputSource outputSource = OutputSource.builder()
            .outputS3Path("s3://" + outputBucket + "/eroutput")
            .output(idOutputAttribute, nameOutputAttribute, emailOutputAttribute,
phoneOutputAttribute)
            .applyNormalization(false)
            .build();

        ResolutionTechniques resolutionType = ResolutionTechniques.builder()
            .resolutionType(ResolutionType.ML_MATCHING)
            .build();

        CreateMatchingWorkflowRequest workflowRequest =
CreateMatchingWorkflowRequest.builder()
            .roleArn(roleARN)
            .description("Created by using the AWS SDK for Java")
            .workflowName(workflowName)
```

```
            .inputSourceConfig(List.of(jsonInputSource, csvInputSource))
            .outputSourceConfig(List.of(outputSource))
            .resolutionTechniques(resolutionType)
            .build();

        return getResolutionAsyncClient().createMatchingWorkflow(workflowRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Workflow created successfully.");
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Invalid request: Please check
input parameters.", cause);
                    }

                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting workflow
already exists. Resolve conflicts before proceeding.", cause);
                    }
                    throw new CompletionException("Failed to create workflow: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateMatchingWorkflowResponse::workflowArn);
    }

    /**
     * Tags the specified schema mapping ARN.
     *
     * @param schemaMappingARN the ARN of the schema mapping to tag
     */
    public CompletableFuture<TagResourceResponse> tagEntityResource(String
schemaMappingARN) {
        Map<String, String> tags = new HashMap<>();
        tags.put("tag1", "tag1Value");
        tags.put("tag2", "tag2Value");

        TagResourceRequest request = TagResourceRequest.builder()
            .resourceArn(schemaMappingARN)
            .tags(tags)
            .build();

        return getResolutionAsyncClient().tagResource(request)
```

```
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully tagged the resource, log the success message.
                    logger.info("Successfully tagged the resource.");
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while tagging the resource.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The resource to tag was not
found.", cause);
                    }
                    throw new CompletionException("Failed to tag the resource: " +
exception.getMessage(), exception);
                }
            });
   }

   public CompletableFuture<JobMetrics> getJobInfo(String workflowName, String
jobId) {
       return getResolutionAsyncClient().getMatchingJob(b -> b
                .workflowName(workflowName)
                .jobId(jobId))
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Job metrics fetched successfully for jobId: " +
jobId);
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("Invalid request: Job id was
not found.", cause);
                    }
                    throw new CompletionException("Failed to fetch job info: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.metrics()); // Extract job metrics
   }

   /**
```

```
    * Uploads data to an Amazon S3 bucket asynchronously.
    *
    * @param bucketName the name of the S3 bucket to upload the data to
    * @param jsonData   the JSON data to be uploaded
    * @param csvData    the CSV data to be uploaded
    * @return a {@link CompletableFuture} representing both asynchronous operation
of uploading the data
    * @throws RuntimeException if an error occurs during the file upload
    */

   public void uploadInputData(String bucketName, String jsonData, String csvData)
{
       // Upload JSON data.
       String jsonKey = "jsonData/data.json";
       PutObjectRequest jsonUploadRequest = PutObjectRequest.builder()
           .bucket(bucketName)
           .key(jsonKey)
           .contentType("application/json")
           .build();

       CompletableFuture<PutObjectResponse> jsonUploadResponse =
getS3AsyncClient().putObject(jsonUploadRequest,
AsyncRequestBody.fromString(jsonData));

       // Upload CSV data.
       String csvKey = "csvData/data.csv";
       PutObjectRequest csvUploadRequest = PutObjectRequest.builder()
           .bucket(bucketName)
           .key(csvKey)
           .contentType("text/csv")
           .build();
       CompletableFuture<PutObjectResponse> csvUploadResponse =
getS3AsyncClient().putObject(csvUploadRequest,
AsyncRequestBody.fromString(csvData));

       CompletableFuture.allOf(jsonUploadResponse, csvUploadResponse)
           .whenComplete((result, ex) -> {
               if (ex != null) {
                   // Wrap an AWS exception.
                   throw new CompletionException("Failed to upload files", ex);
               }
           }).join();

   }
```

```
   /**
    * Finds the latest file in the S3 bucket that starts with "run-" in any depth
of subfolders
    */
   private CompletableFuture<String> findLatestMatchingFile(String bucketName) {
       ListObjectsV2Request request = ListObjectsV2Request.builder()
           .bucket(bucketName)
           .prefix(PREFIX) // Searches within the given folder
           .build();

       return getS3AsyncClient().listObjectsV2(request)
           .thenApply(response -> response.contents().stream()
               .map(S3Object::key)
               .filter(key -> key.matches(".*?/run-[0-9a-zA-Z\\-]+")) // Matches
files like run-XXXXX in any subfolder
               .max(String::compareTo) // Gets the latest file
               .orElse(null))
           .whenComplete((result, exception) -> {
               if (exception == null) {
                   if (result != null) {
                       logger.info("Latest matching file found: " + result);
                   } else {
                       logger.info("No matching files found.");
                   }
               } else {
                   throw new CompletionException("Failed to find latest matching
file: " + exception.getMessage(), exception);
               }
           });
   }

   /**
    * Prints the data located in the file in the S3 bucket that starts with "run-"
in any depth of subfolders
    */
   public void printData(String bucketName) {
       try {
           // Find the latest file with "run-" prefix in any depth of subfolders.
           String s3Key = findLatestMatchingFile(bucketName).join();
           if (s3Key == null) {
               logger.error("No matching files found in S3.");
               return;
           }
```

```
            logger.info("Downloading file: " + s3Key);

            // Read CSV file as String.
            String csvContent = readCSVFromS3Async(bucketName, s3Key).join();
            if (csvContent.isEmpty()) {
                logger.error("File is empty.");
                return;
            }

            // Process CSV content.
            List<String[]> records = parseCSV(csvContent);
            printTable(records);

        } catch (RuntimeException | IOException | CsvException e) {
            logger.error("Error processing CSV file from S3: " + e.getMessage());
            e.printStackTrace();
        }
    }

    /**
     * Reads a CSV file from S3 and returns it as a String.
     */
    private static CompletableFuture<String> readCSVFromS3Async(String bucketName,
String s3Key) {
        GetObjectRequest getObjectRequest = GetObjectRequest.builder()
            .bucket(bucketName)
            .key(s3Key)
            .build();

        // Initiating the asynchronous request to get the file as bytes
        return getS3AsyncClient().getObject(getObjectRequest,
AsyncResponseTransformer.toBytes())
            .thenApply(responseBytes -> responseBytes.asUtf8String()) // Convert
bytes to UTF-8 string
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    throw new CompletionException("Failed to read CSV from S3: " +
exception.getMessage(), exception);
                } else {
                    logger.info("Successfully fetched CSV file content from S3.");
                }
            });
    }
```

```
   /**
    * Parses CSV content from a String into a list of records.
    */
   private static List<String[]> parseCSV(String csvContent) throws IOException,
CsvException {
       try (CSVReader csvReader = new CSVReader(new StringReader(csvContent))) {
           return csvReader.readAll();
       }
   }

   /**
    * Prints the given CSV data in a formatted table
    */
   private static void printTable(List<String[]> records) {
       if (records.isEmpty()) {
           System.out.println("No records found.");
           return;
       }

       String[] headers = records.get(0);
       List<String[]> rows = records.subList(1, records.size());

       // Determine column widths dynamically based on longest content
       int[] columnWidths = new int[headers.length];
       for (int i = 0; i < headers.length; i++) {
           final int columnIndex = i;
           int maxWidth = Math.max(headers[i].length(), rows.stream()
               .map(row -> row.length > columnIndex ? row[columnIndex].length() :
0)
               .max(Integer::compareTo)
               .orElse(0));
           columnWidths[i] = Math.min(maxWidth, 25); // Limit max width for better
readability
       }

       // Enable ANSI Console for colored output
       AnsiConsole.systemInstall();

       // Print table header
       System.out.println(ansi().fgYellow().a("=== CSV Data from S3 ===").reset());
       printRow(headers, columnWidths, true);

       // Print rows
```

```
        rows.forEach(row -> printRow(row, columnWidths, false));

        // Restore console to normal
        AnsiConsole.systemUninstall();
    }

    private static void printRow(String[] row, int[] columnWidths, boolean isHeader)
 {
        String border = IntStream.range(0, columnWidths.length)
            .mapToObj(i -> "-".repeat(columnWidths[i] + 2))
            .collect(Collectors.joining("+", "+", "+"));

        if (isHeader) {
            System.out.println(border);
        }

        System.out.print("|");
        for (int i = 0; i < columnWidths.length; i++) {
            String cell = (i < row.length && row[i] != null) ? row[i] : "";
            System.out.printf(" %-" + columnWidths[i] + "s |", isHeader ?
 ansi().fgBrightBlue().a(cell).reset() : cell);
        }
        System.out.println();

        if (isHeader) {
            System.out.println(border);
        }
    }
}
```

# Tindakan

## `CreateMatchingWorkflow`

Contoh kode berikut menunjukkan cara menggunakan`CreateMatchingWorkflow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates an asynchronous CompletableFuture to manage the creation of a
matching workflow.
    *
    * @param roleARN                the AWS IAM role ARN to be used for the
workflow execution
    * @param workflowName           the name of the workflow to be created
    * @param outputBucket           the S3 bucket path where the workflow output
will be stored
    * @param jsonGlueTableArn       the ARN of the Glue Data Catalog table to be
used as the input source
    * @param jsonErSchemaMappingName the name of the schema to be used for the
input source
    * @return a CompletableFuture that, when completed, will return the ARN of the
created workflow
    */
   public CompletableFuture<String> createMatchingWorkflowAsync(
       String roleARN
       , String workflowName
       , String outputBucket
       , String jsonGlueTableArn
       , String jsonErSchemaMappingName
       , String csvGlueTableArn
       , String csvErSchemaMappingName) {

       InputSource jsonInputSource = InputSource.builder()
           .inputSourceARN(jsonGlueTableArn)
           .schemaName(jsonErSchemaMappingName)
           .applyNormalization(false)
           .build();

       InputSource csvInputSource = InputSource.builder()
           .inputSourceARN(csvGlueTableArn)
           .schemaName(csvErSchemaMappingName)
```

```
            .applyNormalization(false)
            .build();

        OutputAttribute idOutputAttribute = OutputAttribute.builder()
            .name("id")
            .build();

        OutputAttribute nameOutputAttribute = OutputAttribute.builder()
            .name("name")
            .build();

        OutputAttribute emailOutputAttribute = OutputAttribute.builder()
            .name("email")
            .build();

        OutputAttribute phoneOutputAttribute = OutputAttribute.builder()
            .name("phone")
            .build();

        OutputSource outputSource = OutputSource.builder()
            .outputS3Path("s3://" + outputBucket + "/eroutput")
            .output(idOutputAttribute, nameOutputAttribute, emailOutputAttribute,
phoneOutputAttribute)
            .applyNormalization(false)
            .build();

        ResolutionTechniques resolutionType = ResolutionTechniques.builder()
            .resolutionType(ResolutionType.ML_MATCHING)
            .build();

        CreateMatchingWorkflowRequest workflowRequest =
CreateMatchingWorkflowRequest.builder()
            .roleArn(roleARN)
            .description("Created by using the AWS SDK for Java")
            .workflowName(workflowName)
            .inputSourceConfig(List.of(jsonInputSource, csvInputSource))
            .outputSourceConfig(List.of(outputSource))
            .resolutionTechniques(resolutionType)
            .build();

        return getResolutionAsyncClient().createMatchingWorkflow(workflowRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Workflow created successfully.");
```

```
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException("Invalid request: Please check
input parameters.", cause);
                    }

                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting workflow
already exists. Resolve conflicts before proceeding.", cause);
                    }
                    throw new CompletionException("Failed to create workflow: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateMatchingWorkflowResponse::workflowArn);
    }
```

- Untuk detail API, lihat CreateMatchingWorkflowdi Referensi AWS SDK for Java 2.x API.

### `CreateSchemaMapping`

Contoh kode berikut menunjukkan cara menggunakan`CreateSchemaMapping`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to create
     * @return a {@link CompletableFuture} that represents the asynchronous creation
of the schema mapping
     */
    public CompletableFuture<CreateSchemaMappingResponse>
createSchemaMappingAsync(String schemaName) {
```

```
        List<SchemaInputAttribute> schemaAttributes = null;
        if (schemaName.startsWith("json")) {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp
            );
        } else {
            schemaAttributes = List.of(

SchemaInputAttribute.builder().matchKey("id").fieldName("id").type(SchemaAttributeType.UNIQ

SchemaInputAttribute.builder().matchKey("name").fieldName("name").type(SchemaAttributeType.

SchemaInputAttribute.builder().matchKey("email").fieldName("email").type(SchemaAttributeTyp

SchemaInputAttribute.builder().fieldName("phone").type(SchemaAttributeType.PROVIDER_ID).sub
            );
        }

        CreateSchemaMappingRequest request = CreateSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .mappedInputFields(schemaAttributes)
            .build();

        return getResolutionAsyncClient().createSchemaMapping(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("[{}] schema mapping Created Successfully!",
schemaName);
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while creating the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflicting schema mapping
already exists. Resolve conflicts before proceeding.", cause);
                    }
```

```
                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to create schema mapping:
" + exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat CreateSchemaMappingdi Referensi AWS SDK for Java 2.x API.

### `DeleteMatchingWorkflow`

Contoh kode berikut menunjukkan cara menggunakan`DeleteMatchingWorkflow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously deletes a workflow with the specified name.
     *
     * @param workflowName the name of the workflow to be deleted
     * @return a {@link CompletableFuture} that completes when the workflow has been
deleted
     * @throws RuntimeException if the deletion of the workflow fails
     */
    public CompletableFuture<DeleteMatchingWorkflowResponse>
deleteMatchingWorkflowAsync(String workflowName) {
        DeleteMatchingWorkflowRequest request =
DeleteMatchingWorkflowRequest.builder()
            .workflowName(workflowName)
            .build();

        return getResolutionAsyncClient().deleteMatchingWorkflow(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
```

```
                    logger.info("{} was deleted", workflowName );
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while deleting the workflow.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The workflow to delete was
not found.", cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete workflow: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat DeleteMatchingWorkflowdi Referensi AWS SDK for Java 2.x API.

### `DeleteSchemaMapping`

Contoh kode berikut menunjukkan cara menggunakan`DeleteSchemaMapping`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes the schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to delete
     * @return a {@link CompletableFuture} that completes when the schema mapping is
deleted successfully,
```

```
     * or throws a {@link RuntimeException} if the deletion fails
     */
    public CompletableFuture<DeleteSchemaMappingResponse>
deleteSchemaMappingAsync(String schemaName) {
        DeleteSchemaMappingRequest request = DeleteSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .build();

        return getResolutionAsyncClient().deleteSchemaMapping(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    // Successfully deleted the schema mapping, log the success
message.
                    logger.info("Schema mapping '{}' deleted successfully.",
schemaName);
                } else {
                    // Ensure exception is not null before accessing its cause.
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while deleting the schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The schema mapping was not
found to delete: " + schemaName, cause);
                    }

                    // Wrap other AWS exceptions in a CompletionException.
                    throw new CompletionException("Failed to delete schema mapping:
" + schemaName, exception);
                }
            });
    }
```

- Untuk detail API, lihat DeleteSchemaMappingdi Referensi AWS SDK for Java 2.x API.

### `GetMatchingJob`

Contoh kode berikut menunjukkan cara menggunakan`GetMatchingJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously retrieves a matching job based on the provided job ID and
workflow name.
    *
    * @param jobId        the ID of the job to retrieve
    * @param workflowName the name of the workflow associated with the job
    * @return a {@link CompletableFuture} that completes when the job information
is available or an exception occurs
    */
   public CompletableFuture<GetMatchingJobResponse> getMatchingJobAsync(String
jobId, String workflowName) {
       GetMatchingJobRequest request = GetMatchingJobRequest.builder()
           .jobId(jobId)
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().getMatchingJob(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   // Successfully fetched the matching job details, log the job
status.
                   logger.info("Job status: " + response.status());
                   logger.info("Job details: " + response.toString());
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while fetching the matching job.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested job could not
be found.", cause);
                   }
```

```
                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Error fetching matching job: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat GetMatchingJobdi Referensi AWS SDK for Java 2.x API.

### `GetSchemaMapping`

Contoh kode berikut menunjukkan cara menggunakan`GetSchemaMapping`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the schema mapping asynchronously.
     *
     * @param schemaName the name of the schema to retrieve the mapping for
     * @return a {@link CompletableFuture} that completes with the {@link
GetSchemaMappingResponse} when the operation
     * is complete
     * @throws RuntimeException if the schema mapping retrieval fails
     */
    public CompletableFuture<GetSchemaMappingResponse> getSchemaMappingAsync(String
schemaName) {
        GetSchemaMappingRequest mappingRequest = GetSchemaMappingRequest.builder()
            .schemaName(schemaName)
            .build();

        return getResolutionAsyncClient().getSchemaMapping(mappingRequest)
            .whenComplete((response, exception) -> {
```

```
                if (response != null) {
                    response.mappedInputFields().forEach(attribute ->
                        logger.info("Attribute Name: " + attribute.fieldName() +
                            ", Attribute Type: " + attribute.type().toString()));
                } else {
                    if (exception == null) {
                        throw new CompletionException("An unknown error occurred
while getting schema mapping.", null);
                    }

                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested schema mapping
was not found.", cause);
                    }

                    // Wrap other exceptions in a CompletionException with the
message.
                    throw new CompletionException("Failed to get schema mapping: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat GetSchemaMappingdi Referensi AWS SDK for Java 2.x API.

### `ListSchemaMappings`

Contoh kode berikut menunjukkan cara menggunakan`ListSchemaMappings`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists the schema mappings associated with the current AWS account. This
method uses an asynchronous paginator to
```

```
    * retrieve the schema mappings, and prints the name of each schema mapping to
the console.
    */
   public void ListSchemaMappings() {
       ListSchemaMappingsRequest mappingsRequest =
ListSchemaMappingsRequest.builder()
           .build();

       ListSchemaMappingsPublisher paginator =
getResolutionAsyncClient().listSchemaMappingsPaginator(mappingsRequest);

       // Iterate through the pages of results
       CompletableFuture<Void> future = paginator.subscribe(response -> {
           response.schemaList().forEach(schemaMapping ->
               logger.info("Schema Mapping Name: " + schemaMapping.schemaName())
           );
       });

       // Wait for the asynchronous operation to complete
       future.join();
   }
```

- Untuk detail API, lihat ListSchemaMappingsdi Referensi AWS SDK for Java 2.x API.

### `StartMatchingJob`

Contoh kode berikut menunjukkan cara menggunakan`StartMatchingJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Starts a matching job asynchronously for the specified workflow name.
    *
```

```
    * @param workflowName the name of the workflow for which to start the matching
job
    * @return a {@link CompletableFuture} that completes with the job ID of the
started matching job, or an empty
    * string if the operation fails
    */
   public CompletableFuture<String> startMatchingJobAsync(String workflowName) {
       StartMatchingJobRequest jobRequest = StartMatchingJobRequest.builder()
           .workflowName(workflowName)
           .build();

       return getResolutionAsyncClient().startMatchingJob(jobRequest)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   String jobId = response.jobId();
                   logger.info("Job ID: " + jobId);
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while starting the job.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ConflictException) {
                       throw new CompletionException("The job is already running.
Resolve conflicts before starting a new job.", cause);
                   }

                   // Wrap other AWS exceptions in a CompletionException.
                   throw new CompletionException("Failed to start the job: " +
exception.getMessage(), exception);
               }
           })
           .thenApply(response -> response != null ? response.jobId() : "");
   }
```

- Untuk detail API, lihat StartMatchingJobdi Referensi AWS SDK for Java 2.x API.

### `TagResource`

Contoh kode berikut menunjukkan cara menggunakan`TagResource`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Tags the specified schema mapping ARN.
    *
    * @param schemaMappingARN the ARN of the schema mapping to tag
    */
   public CompletableFuture<TagResourceResponse> tagEntityResource(String
schemaMappingARN) {
       Map<String, String> tags = new HashMap<>();
       tags.put("tag1", "tag1Value");
       tags.put("tag2", "tag2Value");

       TagResourceRequest request = TagResourceRequest.builder()
           .resourceArn(schemaMappingARN)
           .tags(tags)
           .build();

       return getResolutionAsyncClient().tagResource(request)
           .whenComplete((response, exception) -> {
               if (response != null) {
                   // Successfully tagged the resource, log the success message.
                   logger.info("Successfully tagged the resource.");
               } else {
                   if (exception == null) {
                       throw new CompletionException("An unknown error occurred
while tagging the resource.", null);
                   }

                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The resource to tag was not
found.", cause);
                   }
                   throw new CompletionException("Failed to tag the resource: " +
exception.getMessage(), exception);
```

```
                }
            });
    }
```

- Untuk detail API, lihat TagResourcedi Referensi AWS SDK for Java 2.x API.

# OpenSearch Contoh layanan menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan OpenSearch Layanan AWS SDK for Java 2.x with.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan

## Memulai

OpenSearch Layanan Halo

Contoh kode berikut menunjukkan bagaimana untuk memulai menggunakan OpenSearch Service.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.opensearch.OpenSearchAsyncClient;
import software.amazon.awssdk.services.opensearch.model.ListVersionsRequest;
import java.util.List;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloOpenSearch {
    public static void main(String[] args) {
        try {
            CompletableFuture<Void> future = listVersionsAsync();
            future.join();
            System.out.println("Versions listed successfully.");
        } catch (RuntimeException e) {
            System.err.println("Error occurred while listing versions: " +
 e.getMessage());
        }
    }

    private static OpenSearchAsyncClient getAsyncClient() {
        return OpenSearchAsyncClient.builder().build();
    }

    public static CompletableFuture<Void> listVersionsAsync() {
        ListVersionsRequest request = ListVersionsRequest.builder()
            .maxResults(10)
            .build();
```

```
        return getAsyncClient().listVersions(request).thenAccept(response -> {
            List<String> versionList = response.versions();
            for (String version : versionList) {
                System.out.println("Version info: " + version);
            }
        }).exceptionally(ex -> {
            // Handle the exception, or propagate it as a RuntimeException
            throw new RuntimeException("Failed to list versions", ex);
        });
    }
}
```

- Untuk detail API, lihat ListVersionsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari operasi inti OpenSearch Layanan

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat domain OpenSearch Layanan.
- Memberikan informasi rinci tentang domain OpenSearch Layanan tertentu.
- Daftar semua domain OpenSearch Layanan yang dimiliki oleh akun.
- Menunggu hingga status perubahan domain OpenSearch Layanan mencapai status selesai.
- Memodifikasi konfigurasi domain OpenSearch Layanan yang ada.
- Tambahkan tag ke domain OpenSearch Layanan.
- Daftar tag yang terkait dengan domain OpenSearch Layanan.
- Menghapus tag dari domain OpenSearch Layanan.
- Menghapus domain OpenSearch Layanan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan fitur OpenSearch Layanan.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.opensearch.model.*;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;

public class OpenSearchScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(OpenSearchScenario.class);
    static Scanner scanner = new Scanner(System.in);

    static OpenSearchActions openSearchActions = new OpenSearchActions();

    public static void main(String[] args) throws Throwable {
        logger.info("""
            Welcome to the Amazon OpenSearch Service Basics Scenario.

            Use the Amazon OpenSearch Service API to create, configure, and manage
 OpenSearch Service domains.

            The operations exposed by the AWS OpenSearch Service client are focused
 on managing the OpenSearch Service domains
            and their configurations, not the data within the domains (such as
 indexing or querying documents).
            For document management, you typically interact directly with the
 OpenSearch REST API or use other libraries,
            such as the OpenSearch Java client (https://opensearch.org/docs/latest/
clients/java/).

            Let's get started...
        """);
        waitForInputToContinue(scanner);
        try {
            runScenario();
        } catch (RuntimeException e) {
            e.printStackTrace();
        }
    }
```

```
   private static void waitForInputToContinue(Scanner scanner) {
       while (true) {
           logger.info("");
           logger.info("Enter 'c' followed by <ENTER> to continue:");
           String input = scanner.nextLine();

           if (input.trim().equalsIgnoreCase("c")) {
               logger.info("Continuing with the program...");
               logger.info("");
               break;
           } else {
               logger.info("Invalid input. Please try again.");
           }
       }
   }

   private static void runScenario() throws Throwable {
       String currentTimestamp = String.valueOf(System.currentTimeMillis());
       String domainName = "test-domain-" + currentTimestamp;

       logger.info(DASHES);
       logger.info("1. Create an Amazon OpenSearch domain");
       logger.info("""
           An Amazon OpenSearch domain is a managed instance of the OpenSearch
engine,
           which is an open-source search and analytics engine derived from
Elasticsearch.
           An OpenSearch domain is essentially a cluster of compute resources and
storage that hosts
           one or more OpenSearch indexes, enabling you to perform full-text
searches, data analysis, and
           visualizations.

           In this step, we'll initiate the creation of the domain. We'll check on
the progress in a later step.
       """);
       waitForInputToContinue(scanner);

       try {
           CompletableFuture<String> future =
openSearchActions.createNewDomainAsync(domainName);
           String domainId = future.join();
           logger.info("Domain successfully created with ID: {}", domainId);
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause != null) {
                if (cause instanceof OpenSearchException openSearchEx) {
                    logger.error("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
                } else {
                    logger.error("An unexpected error occurred: " +
cause.getMessage(), cause);
                }
            } else {
                logger.error("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("2. Describe the Amazon OpenSearch domain");
        logger.info("In this step, we get back the Domain ARN which is used in an
upcoming step.");
        waitForInputToContinue(scanner);

        String arn = "";
        try {
            CompletableFuture<String> future =
openSearchActions.describeDomainAsync(domainName);
            arn = future.join();
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("3. List the domains in your account");
```

```
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<List<DomainInfo>> future =
openSearchActions.listAllDomainsAsync();
            List<DomainInfo> domainInfoList = future.join();
            for (DomainInfo domain : domainInfoList) {
                logger.info("Domain name is: " + domain.domainName());
            }
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("4. Wait until the domain's change status reaches a completed
state");
        logger.info("""
            In this step, we check on the change status of the domain that we
initiated in Step 1.
            Until we reach a COMPLETED state, we stay in a loop by sending a
DescribeDomainChangeProgressRequest.

            The time it takes for a change to an OpenSearch domain to reach a
completed state can range
            from a few minutes to several hours. In this case the change is creating
a new domain that we initiated in Step 1.
            The time varies depending on the complexity of the change and the
current load on
            the OpenSearch service. In general, simple changes, such as scaling the
number of data nodes or
```

```
            updating the OpenSearch version, may take 10-30 minutes.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
openSearchActions.domainChangeProgressAsync(domainName);
            future.join();
            logger.info("Domain change progress completed successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
ResourceNotFoundException)) {
                cause = cause.getCause();
            }
            if (cause instanceof ResourceNotFoundException
resourceNotFoundException) {
                logger.info("The specific AWS resource was not found: Error message:
{}, Error code {}", resourceNotFoundException.awsErrorDetails().errorMessage(),
resourceNotFoundException.awsErrorDetails().errorCode());

                if (cause instanceof OpenSearchException ex) {
                    logger.info("An OpenSearch error occurred: Error message: " +
ex.getMessage());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
                throw cause;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("5. Modify the domain");
        logger.info("""
            You can change your OpenSearch domain's settings, like the number of
instances, without starting over from scratch.
            This makes it easy to adjust your domain as your needs change, allowing
you to scale up or
            down quickly without recreating everything.

            We modify the domain in this step by changing the number of instances.
        """);
```

```
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<UpdateDomainConfigResponse> future =
openSearchActions.updateSpecificDomainAsync(domainName);
            UpdateDomainConfigResponse updateResponse = future.join();
            logger.info("Domain update status: " +
updateResponse.domainConfig().changeProgressDetails().configChangeStatusAsString());
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("6. Wait until the domain's change status reaches a completed
state");
        logger.info("""
            In this step, we poll the status until the domain's change status
reaches a completed state.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
openSearchActions.domainChangeProgressAsync(domainName);
            future.join();
            logger.info("Domain change progress completed successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof OpenSearchException ex) {
                logger.info("EC2 error occurred: Error message: " +ex.getMessage());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
```

```
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("7. Tag the Domain");
        logger.info("""
            Tags let you assign arbitrary information to an Amazon OpenSearch
Service domain so you can
            categorize and filter on that information. A tag is a key-value pair
that you define and
            associate with an OpenSearch Service domain. You can use these tags to
track costs by grouping
            expenses for similarly tagged resources.

            In this scenario, we create tags with keys "service" and "instances".
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<AddTagsResponse> future =
openSearchActions.addDomainTagsAsync(arn);
            future.join();
            logger.info("Domain tags added successfully.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
                if (cause != null) {
                    if (cause instanceof OpenSearchException) {
                        logger.error("OpenSearch error occurred: Error message: " +
cause.getMessage(), cause);
                    } else {
                        logger.error("An unexpected error occurred: " +
cause.getMessage(), cause);
```

```
                    }
                } else {
                    logger.error("An unexpected error occurred: " + rt.getMessage(),
rt);
                }
                throw cause;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("8. List Domain tags");
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<ListTagsResponse> future =
openSearchActions.listDomainTagsAsync(arn);
            ListTagsResponse listTagsResponse = future.join();
            listTagsResponse.tagList().forEach(tag -> logger.info("Tag Key: " +
tag.key() + ", Tag Value: " + tag.value()));
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("9. Delete the domain");
        logger.info("""
            In this step, we'll delete the Amazon OpenSearch domain that we created
in Step 1.
```

```
            Deleting a domain will remove all data and configuration for that
domain.
        """);

        waitForInputToContinue(scanner);

        try {
            CompletableFuture<DeleteDomainResponse> future =
openSearchActions.deleteSpecificDomainAsync(domainName);
            future.join();
            logger.info("Domain successfully deleted.");
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            while (cause.getCause() != null && !(cause instanceof
OpenSearchException)) {
                cause = cause.getCause();
            }
            if (cause instanceof OpenSearchException openSearchEx) {
                logger.info("OpenSearch error occurred: Error message:
{}, Error code {}", openSearchEx.awsErrorDetails().errorMessage(),
openSearchEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("Scenario complete!");
    }
}
```

Kelas pembungkus untuk metode OpenSearch Service SDK.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.opensearch.OpenSearchAsyncClient;
import software.amazon.awssdk.services.opensearch.model.AddTagsRequest;
import software.amazon.awssdk.services.opensearch.model.AddTagsResponse;
import software.amazon.awssdk.services.opensearch.model.ClusterConfig;
import software.amazon.awssdk.services.opensearch.model.CreateDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DeleteDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DeleteDomainResponse;
import
 software.amazon.awssdk.services.opensearch.model.DescribeDomainChangeProgressRequest;
import
 software.amazon.awssdk.services.opensearch.model.DescribeDomainChangeProgressResponse;
import software.amazon.awssdk.services.opensearch.model.DescribeDomainRequest;
import software.amazon.awssdk.services.opensearch.model.DomainInfo;
import software.amazon.awssdk.services.opensearch.model.DomainStatus;
import software.amazon.awssdk.services.opensearch.model.EBSOptions;
import software.amazon.awssdk.services.opensearch.model.ListDomainNamesRequest;
import software.amazon.awssdk.services.opensearch.model.ListTagsRequest;
import software.amazon.awssdk.services.opensearch.model.ListTagsResponse;
import software.amazon.awssdk.services.opensearch.model.NodeToNodeEncryptionOptions;
import software.amazon.awssdk.services.opensearch.model.Tag;
import software.amazon.awssdk.services.opensearch.model.UpdateDomainConfigRequest;
import software.amazon.awssdk.services.opensearch.model.UpdateDomainConfigResponse;
import software.amazon.awssdk.services.opensearch.model.VolumeType;
import java.time.Duration;
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;

public class OpenSearchActions {
    private static final Logger logger =
 LoggerFactory.getLogger(OpenSearchActions.class);
    private static OpenSearchAsyncClient openSearchClientAsyncClient;
    private static OpenSearchAsyncClient getAsyncClient() {
        if (openSearchClientAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
```

```
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            openSearchClientAsyncClient = OpenSearchAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return openSearchClientAsyncClient;
    }

    /**
     * Creates a new OpenSearch domain asynchronously.
     * @param domainName the name of the new OpenSearch domain to create
     * @return a {@link CompletableFuture} containing the domain ID of the newly
created domain
     */
    public CompletableFuture<String> createNewDomainAsync(String domainName) {
        ClusterConfig clusterConfig = ClusterConfig.builder()
            .dedicatedMasterEnabled(true)
            .dedicatedMasterCount(3)
            .dedicatedMasterType("t2.small.search")
            .instanceType("t2.small.search")
            .instanceCount(5)
            .build();

        EBSOptions ebsOptions = EBSOptions.builder()
            .ebsEnabled(true)
            .volumeSize(10)
            .volumeType(VolumeType.GP2)
            .build();

        NodeToNodeEncryptionOptions encryptionOptions =
NodeToNodeEncryptionOptions.builder()
            .enabled(true)
            .build();

        CreateDomainRequest domainRequest = CreateDomainRequest.builder()
            .domainName(domainName)
```

```
            .engineVersion("OpenSearch_1.0")
            .clusterConfig(clusterConfig)
            .ebsOptions(ebsOptions)
            .nodeToNodeEncryptionOptions(encryptionOptions)
            .build();
        logger.info("Sending domain creation request...");
        return getAsyncClient().createDomain(domainRequest)
                .handle( (createResponse, throwable) -> {
                    if (createResponse != null) {
                        logger.info("Domain status is {}",
createResponse.domainStatus().changeProgressDetails().configChangeStatusAsString());
                        logger.info("Domain Id is {}",
createResponse.domainStatus().domainId());
                        return createResponse.domainStatus().domainId();
                    }
                    throw new RuntimeException("Failed to create domain",
throwable);
                });
    }

    /**
     * Deletes a specific domain asynchronously.
     * @param domainName the name of the domain to be deleted
     * @return a {@link CompletableFuture} that completes when the domain has been
deleted
     * or throws a {@link RuntimeException} if the deletion fails
     */
    public CompletableFuture<DeleteDomainResponse> deleteSpecificDomainAsync(String
domainName) {
        DeleteDomainRequest domainRequest = DeleteDomainRequest.builder()
            .domainName(domainName)
            .build();

        // Delete domain asynchronously
        return getAsyncClient().deleteDomain(domainRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to delete the domain: " +
domainName, exception);
                }
            });
    }

    /**
```

```
    * Describes the specified domain asynchronously.
    *
    * @param domainName the name of the domain to describe
    * @return a {@link CompletableFuture} that completes with the ARN of the domain
    * @throws RuntimeException if the domain description fails
    */
   public CompletableFuture<String> describeDomainAsync(String domainName) {
       DescribeDomainRequest request = DescribeDomainRequest.builder()
           .domainName(domainName)
           .build();

       return getAsyncClient().describeDomain(request)
           .handle((response, exception) -> {  // Handle both response and
exception
               if (exception != null) {
                   throw new RuntimeException("Failed to describe domain",
exception);
               }
               DomainStatus domainStatus = response.domainStatus();
               String endpoint = domainStatus.endpoint();
               String arn = domainStatus.arn();
               String engineVersion = domainStatus.engineVersion();
               logger.info("Domain endpoint is: " + endpoint);
               logger.info("ARN: " + arn);
               System.out.println("Engine version: " + engineVersion);

               return arn;  // Return ARN when successful
           });
   }

   /**
    * Asynchronously lists all the domains in the current AWS account.
    * @return a {@link CompletableFuture} that, when completed, contains a list of
{@link DomainInfo} objects representing
    *         the domains in the account.
    * @throws RuntimeException if there was a failure while listing the domains.
    */
   public CompletableFuture<List<DomainInfo>> listAllDomainsAsync() {
       ListDomainNamesRequest namesRequest = ListDomainNamesRequest.builder()
           .engineType("OpenSearch")
           .build();

       return getAsyncClient().listDomainNames(namesRequest)
           .handle((response, exception) -> {
```

```
                if (exception != null) {
                    throw new RuntimeException("Failed to list all domains",
exception);
                }
                return response.domainNames();  // Return the list of domain names
on success
            });
    }

    /**
     * Updates the configuration of a specific domain asynchronously.
     * @param domainName the name of the domain to update
     * @return a {@link CompletableFuture} that represents the asynchronous
operation of updating the domain configuration
     */
    public CompletableFuture<UpdateDomainConfigResponse>
updateSpecificDomainAsync(String domainName) {
        ClusterConfig clusterConfig = ClusterConfig.builder()
            .instanceCount(3)
            .build();

        UpdateDomainConfigRequest updateDomainConfigRequest =
UpdateDomainConfigRequest.builder()
            .domainName(domainName)
            .clusterConfig(clusterConfig)
            .build();

        return getAsyncClient().updateDomainConfig(updateDomainConfigRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to update the domain
configuration", exception);
                }
                // Handle success if needed (e.g., logging or additional actions)
            });
    }

    /**
     * Asynchronously checks the progress of a domain change operation in Amazon
OpenSearch Service.
     * @param domainName the name of the OpenSearch domain to check the progress for
     * @return a {@link CompletableFuture} that completes when the domain change
operation is completed
     */
```

```
   public CompletableFuture<Void> domainChangeProgressAsync(String domainName) {
       DescribeDomainChangeProgressRequest request =
DescribeDomainChangeProgressRequest.builder()
           .domainName(domainName)
           .build();

       return CompletableFuture.runAsync(() -> {
           boolean isCompleted = false;
           long startTime = System.currentTimeMillis();

           while (!isCompleted) {
               try {
                   // Handle the async client call using `join` to block
synchronously for the result
                   DescribeDomainChangeProgressResponse response = getAsyncClient()
                       .describeDomainChangeProgress(request)
                       .handle((resp, ex) -> {
                           if (ex != null) {
                               throw new RuntimeException("Failed to check domain
progress", ex);
                           }
                           return resp;
                       }).join();

                   String state = response.changeProgressStatus().statusAsString();
 // Get the status as string

                   if ("COMPLETED".equals(state)) {
                       logger.info("\nOpenSearch domain status: Completed");
                       isCompleted = true;
                   } else {
                       for (int i = 0; i < 5; i++) {
                           long elapsedTimeInSeconds = (System.currentTimeMillis()
- startTime) / 1000;
                           String formattedTime = String.format("%02d:%02d",
elapsedTimeInSeconds / 60, elapsedTimeInSeconds % 60);
                           System.out.print("\rOpenSearch domain state: " + state +
" | Time Elapsed: " + formattedTime + " ");
                           System.out.flush();
                           Thread.sleep(1_000);
                       }
                   }
               } catch (InterruptedException e) {
                   Thread.currentThread().interrupt();
```

```
                    throw new RuntimeException("Thread was interrupted", e);
                }
            }
        });
    }

    /**
     * Asynchronously adds tags to an Amazon OpenSearch Service domain.
     * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
     * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
     * or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
        Tag tag1 = Tag.builder()
            .key("service")
            .value("OpenSearch")
            .build();

        Tag tag2 = Tag.builder()
            .key("instances")
            .value("m3.2xlarge")
            .build();

        List<Tag> tagList = new ArrayList<>();
        tagList.add(tag1);
        tagList.add(tag2);

        AddTagsRequest addTagsRequest = AddTagsRequest.builder()
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }
```

```
    /**
     * Asynchronously lists the tags associated with the specified Amazon Resource
 Name (ARN).
     * @param arn the Amazon Resource Name (ARN) of the resource for which to list
 the tags
     * @return a {@link CompletableFuture} that, when completed, will contain a list
 of the tags associated with the
     * specified ARN
     * @throws RuntimeException if there is an error listing the tags
     */
    public CompletableFuture<ListTagsResponse> listDomainTagsAsync(String arn) {
        ListTagsRequest tagsRequest = ListTagsRequest.builder()
            .arn(arn)
            .build();

        return getAsyncClient().listTags(tagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to list domain tags",
 exception);
                }

                List<Tag> tagList = response.tagList();
                for (Tag tag : tagList) {
                    logger.info("Tag key is " + tag.key());
                    logger.info("Tag value is " + tag.value());
                }
            });
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AddTags
  - CreateDomain
  - DeleteDomain
  - DescribeDomain
  - DescribeDomainChangeProgress
  - ListDomainNames

- ListTags
- UpdateDomainConfig

## Tindakan

### `AddTags`

Contoh kode berikut menunjukkan cara menggunakan`AddTags`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously adds tags to an Amazon OpenSearch Service domain.
    * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
    * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
    * or throws a {@link RuntimeException} if the operation fails
    */
   public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
       Tag tag1 = Tag.builder()
           .key("service")
           .value("OpenSearch")
           .build();

       Tag tag2 = Tag.builder()
           .key("instances")
           .value("m3.2xlarge")
           .build();

       List<Tag> tagList = new ArrayList<>();
       tagList.add(tag1);
       tagList.add(tag2);

       AddTagsRequest addTagsRequest = AddTagsRequest.builder()
```

```
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }
```

- Untuk detail API, lihat AddTagsdi Referensi AWS SDK for Java 2.x API.

### `ChangeProgress`

Contoh kode berikut menunjukkan cara menggunakan`ChangeProgress`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously checks the progress of a domain change operation in Amazon
OpenSearch Service.
     * @param domainName the name of the OpenSearch domain to check the progress for
     * @return a {@link CompletableFuture} that completes when the domain change
operation is completed
     */
    public CompletableFuture<Void> domainChangeProgressAsync(String domainName) {
        DescribeDomainChangeProgressRequest request =
DescribeDomainChangeProgressRequest.builder()
            .domainName(domainName)
```

```
            .build();

        return CompletableFuture.runAsync(() -> {
            boolean isCompleted = false;
            long startTime = System.currentTimeMillis();

            while (!isCompleted) {
                try {
                    // Handle the async client call using `join` to block
synchronously for the result
                    DescribeDomainChangeProgressResponse response = getAsyncClient()
                        .describeDomainChangeProgress(request)
                        .handle((resp, ex) -> {
                            if (ex != null) {
                                throw new RuntimeException("Failed to check domain
progress", ex);
                            }
                            return resp;
                        }).join();

                    String state = response.changeProgressStatus().statusAsString();
 // Get the status as string

                    if ("COMPLETED".equals(state)) {
                        logger.info("\nOpenSearch domain status: Completed");
                        isCompleted = true;
                    } else {
                        for (int i = 0; i < 5; i++) {
                            long elapsedTimeInSeconds = (System.currentTimeMillis()
- startTime) / 1000;
                            String formattedTime = String.format("%02d:%02d",
elapsedTimeInSeconds / 60, elapsedTimeInSeconds % 60);
                            System.out.print("\rOpenSearch domain state: " + state +
" | Time Elapsed: " + formattedTime + " ");
                            System.out.flush();
                            Thread.sleep(1_000);
                        }
                    }
                } catch (InterruptedException e) {
                    Thread.currentThread().interrupt();
                    throw new RuntimeException("Thread was interrupted", e);
                }
            }
        });
```

```
    }
```

- Untuk detail API, lihat ChangeProgressdi Referensi AWS SDK for Java 2.x API.

### `CreateDomain`

Contoh kode berikut menunjukkan cara menggunakan`CreateDomain`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new OpenSearch domain asynchronously.
    * @param domainName the name of the new OpenSearch domain to create
    * @return a {@link CompletableFuture} containing the domain ID of the newly
created domain
    */
   public CompletableFuture<String> createNewDomainAsync(String domainName) {
       ClusterConfig clusterConfig = ClusterConfig.builder()
           .dedicatedMasterEnabled(true)
           .dedicatedMasterCount(3)
           .dedicatedMasterType("t2.small.search")
           .instanceType("t2.small.search")
           .instanceCount(5)
           .build();

       EBSOptions ebsOptions = EBSOptions.builder()
           .ebsEnabled(true)
           .volumeSize(10)
           .volumeType(VolumeType.GP2)
           .build();

       NodeToNodeEncryptionOptions encryptionOptions =
NodeToNodeEncryptionOptions.builder()
           .enabled(true)
```

```
            .build();

        CreateDomainRequest domainRequest = CreateDomainRequest.builder()
            .domainName(domainName)
            .engineVersion("OpenSearch_1.0")
            .clusterConfig(clusterConfig)
            .ebsOptions(ebsOptions)
            .nodeToNodeEncryptionOptions(encryptionOptions)
            .build();
        logger.info("Sending domain creation request...");
        return getAsyncClient().createDomain(domainRequest)
                .handle( (createResponse, throwable) -> {
                    if (createResponse != null) {
                        logger.info("Domain status is {}",
createResponse.domainStatus().changeProgressDetails().configChangeStatusAsString());
                        logger.info("Domain Id is {}",
createResponse.domainStatus().domainId());
                        return createResponse.domainStatus().domainId();
                    }
                    throw new RuntimeException("Failed to create domain",
throwable);
                });
    }
```

- Untuk detail API, lihat CreateDomaindi Referensi AWS SDK for Java 2.x API.

### `DeleteDomain`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDomain`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a specific domain asynchronously.
```

```
    * @param domainName the name of the domain to be deleted
    * @return a {@link CompletableFuture} that completes when the domain has been
deleted
    * or throws a {@link RuntimeException} if the deletion fails
    */
   public CompletableFuture<DeleteDomainResponse> deleteSpecificDomainAsync(String
domainName) {
       DeleteDomainRequest domainRequest = DeleteDomainRequest.builder()
           .domainName(domainName)
           .build();

       // Delete domain asynchronously
       return getAsyncClient().deleteDomain(domainRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to delete the domain: " +
domainName, exception);
               }
           });
   }
```

- Untuk detail API, lihat DeleteDomaindi Referensi AWS SDK for Java 2.x API.

### `DescribeDomain`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDomain`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Describes the specified domain asynchronously.
    *
    * @param domainName the name of the domain to describe
    * @return a {@link CompletableFuture} that completes with the ARN of the domain
```

```
     * @throws RuntimeException if the domain description fails
     */
    public CompletableFuture<String> describeDomainAsync(String domainName) {
        DescribeDomainRequest request = DescribeDomainRequest.builder()
            .domainName(domainName)
            .build();

        return getAsyncClient().describeDomain(request)
            .handle((response, exception) -> {  // Handle both response and
exception
                if (exception != null) {
                    throw new RuntimeException("Failed to describe domain",
exception);
                }
                DomainStatus domainStatus = response.domainStatus();
                String endpoint = domainStatus.endpoint();
                String arn = domainStatus.arn();
                String engineVersion = domainStatus.engineVersion();
                logger.info("Domain endpoint is: " + endpoint);
                logger.info("ARN: " + arn);
                System.out.println("Engine version: " + engineVersion);

                return arn;  // Return ARN when successful
            });
    }
```

- Untuk detail API, lihat DescribeDomaindi Referensi AWS SDK for Java 2.x API.

### `ListDomainNames`

Contoh kode berikut menunjukkan cara menggunakan`ListDomainNames`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
    * Asynchronously lists all the domains in the current AWS account.
    * @return a {@link CompletableFuture} that, when completed, contains a list of
{@link DomainInfo} objects representing
    *         the domains in the account.
    * @throws RuntimeException if there was a failure while listing the domains.
    */
   public CompletableFuture<List<DomainInfo>> listAllDomainsAsync() {
       ListDomainNamesRequest namesRequest = ListDomainNamesRequest.builder()
           .engineType("OpenSearch")
           .build();

       return getAsyncClient().listDomainNames(namesRequest)
           .handle((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to list all domains",
exception);
               }
               return response.domainNames();  // Return the list of domain names
on success
           });
   }
```

- Untuk detail API, lihat ListDomainNamesdi Referensi AWS SDK for Java 2.x API.

### `ListTags`

Contoh kode berikut menunjukkan cara menggunakan`ListTags`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously adds tags to an Amazon OpenSearch Service domain.
    * @param domainARN the Amazon Resource Name (ARN) of the Amazon OpenSearch
Service domain to add tags to
```

```
     * @return a {@link CompletableFuture} that completes when the tags have been
successfully added to the domain,
     * or throws a {@link RuntimeException} if the operation fails
     */
    public CompletableFuture<AddTagsResponse> addDomainTagsAsync(String domainARN) {
        Tag tag1 = Tag.builder()
            .key("service")
            .value("OpenSearch")
            .build();

        Tag tag2 = Tag.builder()
            .key("instances")
            .value("m3.2xlarge")
            .build();

        List<Tag> tagList = new ArrayList<>();
        tagList.add(tag1);
        tagList.add(tag2);

        AddTagsRequest addTagsRequest = AddTagsRequest.builder()
            .arn(domainARN)
            .tagList(tagList)
            .build();

        return getAsyncClient().addTags(addTagsRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    throw new RuntimeException("Failed to add tags to the domain: "
+ domainARN, exception);
                } else {
                    logger.info("Added Tags");
                }
            });
    }
```

- Untuk detail API, lihat ListTagsdi Referensi AWS SDK for Java 2.x API.

### `UpdateDomainConfig`

Contoh kode berikut menunjukkan cara menggunakan`UpdateDomainConfig`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Updates the configuration of a specific domain asynchronously.
    * @param domainName the name of the domain to update
    * @return a {@link CompletableFuture} that represents the asynchronous
operation of updating the domain configuration
    */
   public CompletableFuture<UpdateDomainConfigResponse>
updateSpecificDomainAsync(String domainName) {
       ClusterConfig clusterConfig = ClusterConfig.builder()
           .instanceCount(3)
           .build();

       UpdateDomainConfigRequest updateDomainConfigRequest =
UpdateDomainConfigRequest.builder()
           .domainName(domainName)
           .clusterConfig(clusterConfig)
           .build();

       return getAsyncClient().updateDomainConfig(updateDomainConfigRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Failed to update the domain
configuration", exception);
               }
               // Handle success if needed (e.g., logging or additional actions)
           });
   }
```

- Untuk detail API, lihat UpdateDomainConfigdi Referensi AWS SDK for Java 2.x API.

# EventBridge contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with EventBridge.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


## Memulai

Halo EventBridge

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan EventBridge.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class HelloEventBridge {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        EventBridgeClient eventBrClient = EventBridgeClient.builder()
                .region(region)
                .build();

        listBuses(eventBrClient);
        eventBrClient.close();
    }

    public static void listBuses(EventBridgeClient eventBrClient) {
        try {
            ListEventBusesRequest busesRequest = ListEventBusesRequest.builder()
                    .limit(10)
                    .build();

            ListEventBusesResponse response =
 eventBrClient.listEventBuses(busesRequest);
            List<EventBus> buses = response.eventBuses();
            for (EventBus bus : buses) {
                System.out.println("The name of the event bus is: " + bus.name());
                System.out.println("The ARN of the event bus is: " + bus.arn());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListEventBusesdi Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat aturan dan tambahkan target ke dalamnya.
- Aktifkan dan nonaktifkan aturan.
- Daftar dan perbarui aturan dan target.
- Kirim acara, lalu bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code example performs the following tasks:
 *
 * This Java V2 example performs the following tasks with Amazon EventBridge:
 *
 * 1. Creates an AWS Identity and Access Management (IAM) role to use with
 * Amazon EventBridge.
 * 2. Amazon Simple Storage Service (Amazon S3) bucket with EventBridge events
 * enabled.
 * 3. Creates a rule that triggers when an object is uploaded to Amazon S3.
 * 4. Lists rules on the event bus.
 * 5. Creates a new Amazon Simple Notification Service (Amazon SNS) topic and
 * lets the user subscribe to it.
 * 6. Adds a target to the rule that sends an email to the specified topic.
```

```
 * 7. Creates an EventBridge event that sends an email when an Amazon S3 object
 * is created.
 * 8. Lists Targets.
 * 9. Lists the rules for the same target.
 * 10. Triggers the rule by uploading a file to the Amazon S3 bucket.
 * 11. Disables a specific rule.
 * 12. Checks and print the state of the rule.
 * 13. Adds a transform to the rule to change the text of the email.
 * 14. Enables a specific rule.
 * 15. Triggers the updated rule by uploading a file to the Amazon S3 bucket.
 * 16. Updates the rule to be a custom rule pattern.
 * 17. Sending an event to trigger the rule.
 * 18. Cleans up resources.
 *
 */
public class EventbridgeMVP {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException, IOException
 {
        final String usage = """

                Usage:
                    <roleName> <bucketName> <topicName> <eventRuleName>

                Where:
                    roleName - The name of the role to create.
                    bucketName - The Amazon Simple Storage Service (Amazon S3)
 bucket name to create.
                    topicName - The name of the Amazon Simple Notification Service
 (Amazon SNS) topic to create.
                    eventRuleName - The Amazon EventBridge rule name to create.
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String polJSON = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
```

```
                "\"Service\": \"events.amazonaws.com\"" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        Scanner sc = new Scanner(System.in);
        String roleName = args[0];
        String bucketName = args[1];
        String topicName = args[2];
        String eventRuleName = args[3];

        Region region = Region.US_EAST_1;
        EventBridgeClient eventBrClient = EventBridgeClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();

        Region regionGl = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(regionGl)
                .build();

        SnsClient snsClient = SnsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon EventBridge example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out
                .println("1. Create an AWS Identity and Access Management (IAM) role
to use with Amazon EventBridge.");
        String roleArn = createIAMRole(iam, roleName, polJSON);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create an S3 bucket with EventBridge events
enabled.");
```

```
        if (checkBucket(s3Client, bucketName)) {
            System.out.println("Bucket " + bucketName + " already exists. Ending
this scenario.");
            System.exit(1);
        }

        createBucket(s3Client, bucketName);
        Thread.sleep(3000);
        setBucketNotification(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Create a rule that triggers when an object is
uploaded to Amazon S3.");
        Thread.sleep(10000);
        addEventRule(eventBrClient, roleArn, bucketName, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. List rules on the event bus.");
        listRules(eventBrClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Create a new SNS topic for testing and let the user
subscribe to the topic.");
        String topicArn = createSnsTopic(snsClient, topicName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Add a target to the rule that sends an email to the
specified topic.");
        System.out.println("Enter your email to subscribe to the Amazon SNS
topic:");
        String email = sc.nextLine();
        subEmail(snsClient, topicArn, email);
        System.out.println(
                "Use the link in the email you received to confirm your
subscription. Then, press Enter to continue.");
        sc.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("7. Create an EventBridge event that sends an email when
an Amazon S3 object is created.");
        addSnsEventRule(eventBrClient, eventRuleName, topicArn, topicName,
eventRuleName, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 8. List Targets.");
        listTargets(eventBrClient, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 9. List the rules for the same target.");
        listTargetRules(eventBrClient, topicArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 10. Trigger the rule by uploading a file to the S3
bucket.");
        System.out.println("Press Enter to continue.");
        sc.nextLine();
        uploadTextFiletoS3(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Disable a specific rule.");
        changeRuleState(eventBrClient, eventRuleName, false);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Check and print the state of the rule.");
        checkRule(eventBrClient, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Add a transform to the rule to change the text of
the email.");
        updateSnsEventRule(eventBrClient, topicArn, eventRuleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Enable a specific rule.");
        changeRuleState(eventBrClient, eventRuleName, true);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println(" 15. Trigger the updated rule by uploading a file to the
S3 bucket.");
        System.out.println("Press Enter to continue.");
        sc.nextLine();
        uploadTextFiletoS3(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 16. Update the rule to be a custom rule pattern.");
        updateToCustomRule(eventBrClient, eventRuleName);
        System.out.println("Updated event rule " + eventRuleName + " to use a custom
pattern.");
        updateCustomRuleTargetWithTransform(eventBrClient, topicArn, eventRuleName);
        System.out.println("Updated event target " + topicArn + ".");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("17. Sending an event to trigger the rule. This will
trigger a subscription email.");
        triggerCustomRule(eventBrClient, email);
        System.out.println("Events have been sent. Press Enter to continue.");
        sc.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("18. Clean up resources.");
        System.out.println("Do you want to clean up resources (y/n)");
        String ans = sc.nextLine();
        if (ans.compareTo("y") == 0) {
            cleanupResources(eventBrClient, snsClient, s3Client, iam, topicArn,
eventRuleName, bucketName, roleName);
        } else {
            System.out.println("The resources will not be cleaned up. ");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Amazon EventBridge example scenario has successfully
completed.");
        System.out.println(DASHES);
    }
```

```
    public static void cleanupResources(EventBridgeClient eventBrClient, SnsClient
snsClient, S3Client s3Client,
            IamClient iam, String topicArn, String eventRuleName, String bucketName,
String roleName) {
        System.out.println("Removing all targets from the event rule.");
        deleteTargetsFromRule(eventBrClient, eventRuleName);
        deleteRuleByName(eventBrClient, eventRuleName);
        deleteSNSTopic(snsClient, topicArn);
        deleteS3Bucket(s3Client, bucketName);
        deleteRole(iam, roleName);
    }

    public static void deleteRole(IamClient iam, String roleName) {
        String policyArn = "arn:aws:iam::aws:policy/AmazonEventBridgeFullAccess";
        DetachRolePolicyRequest policyRequest = DetachRolePolicyRequest.builder()
                .policyArn(policyArn)
                .roleName(roleName)
                .build();

        iam.detachRolePolicy(policyRequest);
        System.out.println("Successfully detached policy " + policyArn + " from role
" + roleName);

        // Delete the role.
        DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        iam.deleteRole(roleRequest);
        System.out.println("*** Successfully deleted " + roleName);
    }

    public static void deleteS3Bucket(S3Client s3Client, String bucketName) {
        // Remove all the objects from the S3 bucket.
        ListObjectsRequest listObjects = ListObjectsRequest.builder()
                .bucket(bucketName)
                .build();

        ListObjectsResponse res = s3Client.listObjects(listObjects);
        List<S3Object> objects = res.contents();
        ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();

        for (S3Object myValue : objects) {
            toDelete.add(ObjectIdentifier.builder()
```

```
                    .key(myValue.key())
                    .build());
        }

        DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
                .bucket(bucketName)
                .delete(Delete.builder()
                        .objects(toDelete).build())
                .build();

        s3Client.deleteObjects(dor);

        // Delete the S3 bucket.
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();

        s3Client.deleteBucket(deleteBucketRequest);
        System.out.println("You have deleted the bucket and the objects");
    }

    // Delete the SNS topic.
    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                    .topicArn(topicArn)
                    .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteRuleByName(EventBridgeClient eventBrClient, String
ruleName) {
        DeleteRuleRequest ruleRequest = DeleteRuleRequest.builder()
                .name(ruleName)
                .build();
```

```
        eventBrClient.deleteRule(ruleRequest);
        System.out.println("Successfully deleted the rule");
    }

    public static void deleteTargetsFromRule(EventBridgeClient eventBrClient, String
eventRuleName) {
        // First, get all targets that will be deleted.
        ListTargetsByRuleRequest request = ListTargetsByRuleRequest.builder()
                .rule(eventRuleName)
                .build();

        ListTargetsByRuleResponse response =
eventBrClient.listTargetsByRule(request);
        List<Target> allTargets = response.targets();

        // Get all targets and delete them.
        for (Target myTarget : allTargets) {
            RemoveTargetsRequest removeTargetsRequest =
RemoveTargetsRequest.builder()
                    .rule(eventRuleName)
                    .ids(myTarget.id())
                    .build();

            eventBrClient.removeTargets(removeTargetsRequest);
            System.out.println("Successfully removed the target");
        }
    }

    public static void triggerCustomRule(EventBridgeClient eventBrClient, String
email) {
        String json = "{" +
                "\"UserEmail\": \"" + email + "\"," +
                "\"Message\": \"This event was generated by example code.\"," +
                "\"UtcTime\": \"Now.\"" +
                "}";

        PutEventsRequestEntry entry = PutEventsRequestEntry.builder()
                .source("ExampleSource")
                .detail(json)
                .detailType("ExampleType")
                .build();

        PutEventsRequest eventsRequest = PutEventsRequest.builder()
                .entries(entry)
```

```
                .build();

        eventBrClient.putEvents(eventsRequest);
    }

    public static void updateCustomRuleTargetWithTransform(EventBridgeClient
eventBrClient, String topicArn,
            String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: sample event was received.\"")
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);
        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void updateToCustomRule(EventBridgeClient eventBrClient, String
ruleName) {
        String customEventsPattern = "{" +
                "\"source\": [\"ExampleSource\"]," +
                "\"detail-type\": [\"ExampleType\"]" +
                "}";

        PutRuleRequest request = PutRuleRequest.builder()
                .name(ruleName)
                .description("Custom test rule")
                .eventPattern(customEventsPattern)
```

```
                .build();

        eventBrClient.putRule(request);
    }

    // Update an Amazon S3 object created rule with a transform on the target.
    public static void updateSnsEventRule(EventBridgeClient eventBrClient, String
topicArn, String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        Map<String, String> myMap = new HashMap<>();
        myMap.put("bucket", "$.detail.bucket.name");
        myMap.put("time", "$.time");

        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: an object was uploaded to bucket
<bucket> at <time>.\"")
                .inputPathsMap(myMap)
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkRule(EventBridgeClient eventBrClient, String
eventRuleName) {
        try {
            DescribeRuleRequest ruleRequest = DescribeRuleRequest.builder()
```

```
                    .name(eventRuleName)
                    .build();

            DescribeRuleResponse response = eventBrClient.describeRule(ruleRequest);
            System.out.println("The state of the rule is " +
response.stateAsString());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
        try {
            if (!isEnabled) {
                System.out.println("Disabling the rule: " + eventRuleName);
                DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                        .name(eventRuleName)
                        .build();

                eventBrClient.disableRule(ruleRequest);
            } else {
                System.out.println("Enabling the rule: " + eventRuleName);
                EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                        .name(eventRuleName)
                        .build();
                eventBrClient.enableRule(ruleRequest);
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Create and upload a file to an S3 bucket to trigger an event.
    public static void uploadTextFiletoS3(S3Client s3Client, String bucketName)
throws IOException {
        // Create a unique file name.
        String fileSuffix = new SimpleDateFormat("yyyyMMddHHmmss").format(new
Date());
        String fileName = "TextFile" + fileSuffix + ".txt";
```

```
        File myFile = new File(fileName);
        FileWriter fw = new FileWriter(myFile.getAbsoluteFile());
        BufferedWriter bw = new BufferedWriter(fw);
        bw.write("This is a sample file for testing uploads.");
        bw.close();

        try {
            PutObjectRequest putOb = PutObjectRequest.builder()
                    .bucket(bucketName)
                    .key(fileName)
                    .build();

            s3Client.putObject(putOb, RequestBody.fromFile(myFile));

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listTargetRules(EventBridgeClient eventBrClient, String
topicArn) {
        ListRuleNamesByTargetRequest ruleNamesByTargetRequest =
ListRuleNamesByTargetRequest.builder()
                .targetArn(topicArn)
                .build();

        ListRuleNamesByTargetResponse response =
eventBrClient.listRuleNamesByTarget(ruleNamesByTargetRequest);
        List<String> rules = response.ruleNames();
        for (String rule : rules) {
            System.out.println("The rule name is " + rule);
        }
    }

    public static void listTargets(EventBridgeClient eventBrClient, String ruleName)
{
        ListTargetsByRuleRequest ruleRequest = ListTargetsByRuleRequest.builder()
                .rule(ruleName)
                .build();

        ListTargetsByRuleResponse res =
eventBrClient.listTargetsByRule(ruleRequest);
```

```
        List<Target> targetsList = res.targets();
        for (Target target: targetsList) {
            System.out.println("Target ARN: "+target.arn());
        }
    }

    // Add a rule which triggers an SNS target when a file is uploaded to an S3
    // bucket.
    public static void addSnsEventRule(EventBridgeClient eventBrClient, String
 ruleName, String topicArn,
            String topicName, String eventRuleName, String bucketName) {
        String targetID = java.util.UUID.randomUUID().toString();
        Target myTarget = Target.builder()
                .id(targetID)
                .arn(topicArn)
                .build();

        List<Target> targets = new ArrayList<>();
        targets.add(myTarget);
        PutTargetsRequest request = PutTargetsRequest.builder()
                .eventBusName(null)
                .targets(targets)
                .rule(ruleName)
                .build();

        eventBrClient.putTargets(request);
        System.out.println("Added event rule " + eventRuleName + " with Amazon SNS
 target " + topicName + " for bucket "
                + bucketName + ".");
    }

    public static void subEmail(SnsClient snsClient, String topicArn, String email)
 {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("email")
                    .endpoint(email)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
```

```
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listRules(EventBridgeClient eventBrClient) {
        try {
            ListRulesRequest rulesRequest = ListRulesRequest.builder()
                    .eventBusName("default")
                    .limit(10)
                    .build();

            ListRulesResponse response = eventBrClient.listRules(rulesRequest);
            List<Rule> rules = response.rules();
            for (Rule rule : rules) {
                System.out.println("The rule name is : " + rule.name());
                System.out.println("The rule description is : " +
rule.description());
                System.out.println("The rule state is : " + rule.stateAsString());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String createSnsTopic(SnsClient snsClient, String topicName) {
        String topicPolicy = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Sid\": \"EventBridgePublishTopic\"," +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": \"events.amazonaws.com\"" +
                "}," +
                "\"Resource\": \"*\"," +
                "\"Action\": \"sns:Publish\"" +
                "}]" +
                "}";
```

```
        Map<String, String> topicAttributes = new HashMap<>();
        topicAttributes.put("Policy", topicPolicy);
        CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

        CreateTopicResponse response = snsClient.createTopic(topicRequest);
        System.out.println("Added topic " + topicName + " for email
subscriptions.");
        return response.topicArn();
    }

    // Create a new event rule that triggers when an Amazon S3 object is created in
    // a bucket.
    public static void addEventRule(EventBridgeClient eventBrClient, String roleArn,
String bucketName,
            String eventRuleName) {
        String pattern = "{\n" +
                "  \"source\": [\"aws.s3\"],\n" +
                "  \"detail-type\": [\"Object Created\"],\n" +
                "  \"detail\": {\n" +
                "    \"bucket\": {\n" +
                "      \"name\": [\"" + bucketName + "\"]\n" +
                "    }\n" +
                "  }\n" +
                "}";

        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .description("Created by using the AWS SDK for Java v2")
                    .name(eventRuleName)
                    .eventPattern(pattern)
                    .roleArn(roleArn)
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }

    // Determine if the S3 bucket exists.
    public static Boolean checkBucket(S3Client s3Client, String bucketName) {
        try {
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3Client.headBucket(headBucketRequest);
            return true;
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        return false;
    }

    // Set the S3 bucket notification configuration.
    public static void setBucketNotification(S3Client s3Client, String bucketName) {
        try {
            EventBridgeConfiguration eventBridgeConfiguration =
EventBridgeConfiguration.builder()
                    .build();

            NotificationConfiguration configuration =
NotificationConfiguration.builder()
                    .eventBridgeConfiguration(eventBridgeConfiguration)
                    .build();

            PutBucketNotificationConfigurationRequest configurationRequest =
PutBucketNotificationConfigurationRequest
                    .builder()
                    .bucket(bucketName)
                    .notificationConfiguration(configuration)
                    .skipDestinationValidation(true)
                    .build();

            s3Client.putBucketNotificationConfiguration(configurationRequest);
            System.out.println("Added bucket " + bucketName + " with EventBridge
events enabled.");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }

    public static void createBucket(S3Client s3Client, String bucketName) {
        try {
            S3Waiter s3Waiter = s3Client.waiter();
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3Client.createBucket(bucketRequest);
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Wait until the bucket is created and print out the response.
            WaiterResponse<HeadBucketResponse> waiterResponse =
 s3Waiter.waitUntilBucketExists(bucketRequestWait);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println(bucketName + " is ready");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String createIAMRole(IamClient iam, String rolename, String
 polJSON) {
        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(polJSON)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            AttachRolePolicyRequest rolePolicyRequest =
 AttachRolePolicyRequest.builder()
                    .roleName(rolename)
                    .policyArn("arn:aws:iam::aws:policy/
AmazonEventBridgeFullAccess")
                    .build();
```

```
            iam.attachRolePolicy(rolePolicyRequest);
            return response.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteRule
  - DescribeRule
  - DisableRule
  - EnableRule
  - ListRuleNamesByTarget
  - ListRules
  - ListTargetsByRule
  - PutEvents
  - PutRule
  - PutTargets

## Tindakan

### `DeleteRule`

Contoh kode berikut menunjukkan cara menggunakan`DeleteRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteRuleByName(EventBridgeClient eventBrClient, String
ruleName) {
       DeleteRuleRequest ruleRequest = DeleteRuleRequest.builder()
               .name(ruleName)
               .build();

       eventBrClient.deleteRule(ruleRequest);
       System.out.println("Successfully deleted the rule");
   }
```

- Untuk detail API, lihat DeleteRuledi Referensi AWS SDK for Java 2.x API.

### `DescribeRule`

Contoh kode berikut menunjukkan cara menggunakan`DescribeRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void checkRule(EventBridgeClient eventBrClient, String
eventRuleName) {
       try {
           DescribeRuleRequest ruleRequest = DescribeRuleRequest.builder()
                   .name(eventRuleName)
                   .build();

           DescribeRuleResponse response = eventBrClient.describeRule(ruleRequest);
           System.out.println("The state of the rule is " +
response.stateAsString());

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeRuledi Referensi AWS SDK for Java 2.x API.

### `DisableRule`

Contoh kode berikut menunjukkan cara menggunakan`DisableRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Nonaktifkan aturan dengan menggunakan nama aturannya.

```
   public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
       try {
           if (!isEnabled) {
               System.out.println("Disabling the rule: " + eventRuleName);
               DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();

               eventBrClient.disableRule(ruleRequest);
           } else {
               System.out.println("Enabling the rule: " + eventRuleName);
               EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();
               eventBrClient.enableRule(ruleRequest);
           }

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DisableRuledi Referensi AWS SDK for Java 2.x API.

### `EnableRule`

Contoh kode berikut menunjukkan cara menggunakan`EnableRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Aktifkan aturan dengan menggunakan nama aturannya.

```
   public static void changeRuleState(EventBridgeClient eventBrClient, String
eventRuleName, Boolean isEnabled) {
       try {
           if (!isEnabled) {
               System.out.println("Disabling the rule: " + eventRuleName);
               DisableRuleRequest ruleRequest = DisableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();

               eventBrClient.disableRule(ruleRequest);
           } else {
               System.out.println("Enabling the rule: " + eventRuleName);
               EnableRuleRequest ruleRequest = EnableRuleRequest.builder()
                       .name(eventRuleName)
                       .build();
               eventBrClient.enableRule(ruleRequest);
           }

       } catch (EventBridgeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat EnableRuledi Referensi AWS SDK for Java 2.x API.

### `ListRuleNamesByTarget`

Contoh kode berikut menunjukkan cara menggunakan`ListRuleNamesByTarget`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat daftar semua nama aturan dengan menggunakan target.

```
   public static void listTargetRules(EventBridgeClient eventBrClient, String
topicArn) {
       ListRuleNamesByTargetRequest ruleNamesByTargetRequest =
ListRuleNamesByTargetRequest.builder()
               .targetArn(topicArn)
               .build();

       ListRuleNamesByTargetResponse response =
eventBrClient.listRuleNamesByTarget(ruleNamesByTargetRequest);
       List<String> rules = response.ruleNames();
       for (String rule : rules) {
           System.out.println("The rule name is " + rule);
       }
   }
```

- Untuk detail API, lihat ListRuleNamesByTargetdi Referensi AWS SDK for Java 2.x API.

### `ListRules`

Contoh kode berikut menunjukkan cara menggunakan`ListRules`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Aktifkan aturan dengan menggunakan nama aturannya.

```
    public static void listRules(EventBridgeClient eventBrClient) {
        try {
            ListRulesRequest rulesRequest = ListRulesRequest.builder()
                    .eventBusName("default")
                    .limit(10)
                    .build();

            ListRulesResponse response = eventBrClient.listRules(rulesRequest);
            List<Rule> rules = response.rules();
            for (Rule rule : rules) {
                System.out.println("The rule name is : " + rule.name());
                System.out.println("The rule description is : " +
rule.description());
                System.out.println("The rule state is : " + rule.stateAsString());
            }

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListRulesdi Referensi AWS SDK for Java 2.x API.

### `ListTargetsByRule`

Contoh kode berikut menunjukkan cara menggunakan`ListTargetsByRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Daftar semua target untuk aturan dengan menggunakan nama aturan.

```
   public static void listTargets(EventBridgeClient eventBrClient, String ruleName)
{
       ListTargetsByRuleRequest ruleRequest = ListTargetsByRuleRequest.builder()
               .rule(ruleName)
               .build();

       ListTargetsByRuleResponse res =
eventBrClient.listTargetsByRule(ruleRequest);
       List<Target> targetsList = res.targets();
       for (Target target: targetsList) {
           System.out.println("Target ARN: "+target.arn());
       }
   }
```

- Untuk detail API, lihat ListTargetsByRuledi Referensi AWS SDK for Java 2.x API.

### `PutEvents`

Contoh kode berikut menunjukkan cara menggunakan`PutEvents`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void triggerCustomRule(EventBridgeClient eventBrClient, String
email) {
```

```
        String json = "{" +
                "\"UserEmail\": \"" + email + "\"," +
                "\"Message\": \"This event was generated by example code.\"," +
                "\"UtcTime\": \"Now.\"" +
                "}";

        PutEventsRequestEntry entry = PutEventsRequestEntry.builder()
                .source("ExampleSource")
                .detail(json)
                .detailType("ExampleType")
                .build();

        PutEventsRequest eventsRequest = PutEventsRequest.builder()
                .entries(entry)
                .build();

        eventBrClient.putEvents(eventsRequest);
    }
```

- Untuk detail API, lihat PutEventsdi Referensi AWS SDK for Java 2.x API.

### `PutRule`

Contoh kode berikut menunjukkan cara menggunakan`PutRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat aturan terjadwal.

```
   public static void createEBRule(EventBridgeClient eventBrClient, String
ruleName, String cronExpression) {
        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .name(ruleName)
                    .eventBusName("default")
```

```
                    .scheduleExpression(cronExpression)
                    .state("ENABLED")
                    .description("A test rule that runs on a schedule created by the
Java API")
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Buat aturan yang dipicu saat objek ditambahkan ke bucket Amazon Simple Storage Service.

```
    // Create a new event rule that triggers when an Amazon S3 object is created in
    // a bucket.
    public static void addEventRule(EventBridgeClient eventBrClient, String roleArn,
String bucketName,
            String eventRuleName) {
        String pattern = "{\n" +
                "  \"source\": [\"aws.s3\"],\n" +
                "  \"detail-type\": [\"Object Created\"],\n" +
                "  \"detail\": {\n" +
                "    \"bucket\": {\n" +
                "      \"name\": [\"" + bucketName + "\"]\n" +
                "    }\n" +
                "  }\n" +
                "}";

        try {
            PutRuleRequest ruleRequest = PutRuleRequest.builder()
                    .description("Created by using the AWS SDK for Java v2")
                    .name(eventRuleName)
                    .eventPattern(pattern)
                    .roleArn(roleArn)
                    .build();

            PutRuleResponse ruleResponse = eventBrClient.putRule(ruleRequest);
```

```
            System.out.println("The ARN of the new rule is " +
ruleResponse.ruleArn());

        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat PutRuledi Referensi AWS SDK for Java 2.x API.

### `PutTargets`

Contoh kode berikut menunjukkan cara menggunakan`PutTargets`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Tambahkan topik Amazon SNS sebagai target aturan.

```
    // Add a rule which triggers an SNS target when a file is uploaded to an S3
    // bucket.
    public static void addSnsEventRule(EventBridgeClient eventBrClient, String
ruleName, String topicArn,
            String topicName, String eventRuleName, String bucketName) {
        String targetID = java.util.UUID.randomUUID().toString();
        Target myTarget = Target.builder()
                .id(targetID)
                .arn(topicArn)
                .build();

        List<Target> targets = new ArrayList<>();
        targets.add(myTarget);
        PutTargetsRequest request = PutTargetsRequest.builder()
                .eventBusName(null)
```

```
                .targets(targets)
                .rule(ruleName)
                .build();

        eventBrClient.putTargets(request);
        System.out.println("Added event rule " + eventRuleName + " with Amazon SNS
target " + topicName + " for bucket "
                + bucketName + ".");
    }
```

Tambahkan transformator input ke target untuk aturan.

```
    public static void updateCustomRuleTargetWithTransform(EventBridgeClient
eventBrClient, String topicArn,
            String ruleName) {
        String targetId = java.util.UUID.randomUUID().toString();
        InputTransformer inputTransformer = InputTransformer.builder()
                .inputTemplate("\"Notification: sample event was received.\"")
                .build();

        Target target = Target.builder()
                .id(targetId)
                .arn(topicArn)
                .inputTransformer(inputTransformer)
                .build();

        try {
            PutTargetsRequest targetsRequest = PutTargetsRequest.builder()
                    .rule(ruleName)
                    .targets(target)
                    .eventBusName(null)
                    .build();

            eventBrClient.putTargets(targetsRequest);
        } catch (EventBridgeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat PutTargetsdi Referensi AWS SDK for Java 2.x API.

### `RemoveTargets`

Contoh kode berikut menunjukkan cara menggunakan`RemoveTargets`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus semua target untuk aturan dengan menggunakan nama aturan.

```
   public static void deleteTargetsFromRule(EventBridgeClient eventBrClient, String
eventRuleName) {
       // First, get all targets that will be deleted.
       ListTargetsByRuleRequest request = ListTargetsByRuleRequest.builder()
               .rule(eventRuleName)
               .build();

       ListTargetsByRuleResponse response =
eventBrClient.listTargetsByRule(request);
       List<Target> allTargets = response.targets();

       // Get all targets and delete them.
       for (Target myTarget : allTargets) {
           RemoveTargetsRequest removeTargetsRequest =
RemoveTargetsRequest.builder()
                   .rule(eventRuleName)
                   .ids(myTarget.id())
                   .build();

           eventBrClient.removeTargets(removeTargetsRequest);
           System.out.println("Successfully removed the target");
       }
   }
```

- Untuk detail API, lihat RemoveTargetsdi Referensi AWS SDK for Java 2.x API.

# Skenario

Kirim pemberitahuan acara ke EventBridge

Contoh kode berikut menunjukkan cara mengaktifkan bucket untuk mengirim notifikasi peristiwa S3 ke EventBridge dan merutekan notifikasi ke topik Amazon SNS dan antrean Amazon SQS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
   /** This method configures a bucket to send events to AWS EventBridge and
creates a rule
    * to route the S3 object created events to a topic and a queue.
    *
    * @param bucketName Name of existing bucket
    * @param topicArn ARN of existing topic to receive S3 event notifications
    * @param queueArn ARN of existing queue to receive S3 event notifications
    *
    *  An AWS CloudFormation stack sets up the bucket, queue, topic before the
method runs.
    */
   public static String setBucketNotificationToEventBridge(String bucketName,
String topicArn, String queueArn) {
       try {
           // Enable bucket to emit S3 Event notifications to EventBridge.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .bucket(bucketName)
                   .notificationConfiguration(b1 -> b1
                           .eventBridgeConfiguration(
                                   SdkBuilder::build)
                   ).build()).join();

           // Create an EventBridge rule to route Object Created notifications.
           PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                   .name(RULE_NAME)
                   .eventPattern("""
                           {
```

```
                            "source": ["aws.s3"],
                            "detail-type": ["Object Created"],
                            "detail": {
                              "bucket": {
                                "name": ["%s"]
                              }
                            }
                          }
                          """.formatted(bucketName))
                  .build();

          // Add the rule to the default event bus.
          PutRuleResponse putRuleResponse =
eventBridgeClient.putRule(putRuleRequest)
                  .whenComplete((r, t) -> {
                      if (t != null) {
                          logger.error("Error creating event bus rule: " +
t.getMessage(), t);
                          throw new RuntimeException(t.getCause().getMessage(),
t);
                      }
                      logger.info("Event bus rule creation request sent
successfully. ARN is: {}", r.ruleArn());
                  }).join();

          // Add the existing SNS topic and SQS queue as targets to the rule.
          eventBridgeClient.putTargets(b -> b
                  .eventBusName("default")
                  .rule(RULE_NAME)
                  .targets(List.of (
                          Target.builder()
                                  .arn(queueArn)
                                  .id("Queue")
                                  .build(),
                          Target.builder()
                                  .arn(topicArn)
                                  .id("Topic")
                                  .build())
                          )
                  ).join();
          return putRuleResponse.ruleArn();
      } catch (S3Exception e) {
          System.err.println(e.awsErrorDetails().errorMessage());
          System.exit(1);
```

```
        }
        return null;
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - PutBucketNotificationConfiguration
  - PutRule
  - PutTargets

Menggunakan peristiwa terjadwal untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh acara EventBridge terjadwal Amazon.

SDK untuk Java 2.x

Menunjukkan cara membuat acara EventBridge terjadwal Amazon yang memanggil AWS Lambda fungsi. Konfigurasikan EventBridge untuk menggunakan ekspresi cron untuk menjadwalkan saat fungsi Lambda dipanggil. Dalam contoh ini, Anda membuat fungsi Lambda menggunakan API runtime Java Lambda. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat aplikasi yang mengirimkan pesan teks seluler kepada karyawan Anda berisi ucapan selamat pada hari jadi setahun kerja mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch Log
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

# EventBridge Contoh penjadwal menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with EventBridge Scheduler.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Tindakan
- Skenario


## Memulai

Halo EventBridge Penjadwal

Contoh kode berikut menunjukkan bagaimana memulai menggunakan EventBridge Scheduler.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.scheduler.SchedulerAsyncClient;
import software.amazon.awssdk.services.scheduler.model.ListSchedulesRequest;
import software.amazon.awssdk.services.scheduler.model.ScheduleSummary;
import software.amazon.awssdk.services.scheduler.paginators.ListSchedulesPublisher;
```

```
import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.CompletableFuture;

public class HelloScheduler {

    public static void main(String [] args) {
        listSchedulesAsync();
    }

    /**
     * Lists all the schedules available.
     * <p>
     * This method uses the {@link SchedulerAsyncClient} to make an asynchronous
 request to
     * list all the schedules available. The method uses the {@link
 ListSchedulesPublisher}
     * to fetch the schedules in a paginated manner, and then processes the
 responses
     * asynchronously.
     */
    public static void listSchedulesAsync() {
        SchedulerAsyncClient schedulerAsyncClient = SchedulerAsyncClient.create();

        // Build the request to list schedules
        ListSchedulesRequest listSchedulesRequest =
 ListSchedulesRequest.builder().build();

        // Use the paginator to fetch all schedules asynchronously.
        ListSchedulesPublisher paginator =
 schedulerAsyncClient.listSchedulesPaginator(listSchedulesRequest);
        List<ScheduleSummary> results = new ArrayList<>();

        // Subscribe to the paginator to process the response asynchronously
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            response.schedules().forEach(schedule -> {
                results.add(schedule);
                System.out.printf("Schedule: %s%n", schedule.name());
            });
        });

        // Wait for the asynchronous operation to complete.
        future.join();
```

```
        // After all schedules are fetched, print the total count.
        System.out.printf("Total of %d schedule(s) available.%n", results.size());
    }
}
```

- Untuk detail API, lihat ListSchedulesdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `CreateSchedule`

Contoh kode berikut menunjukkan cara menggunakan`CreateSchedule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new schedule for a target task.
     *
     * @param name                  the name of the schedule
     * @param scheduleExpression    The schedule expression that defines when the
schedule should run.
     * @param scheduleGroupName     the name of the schedule group to which the
schedule belongs
     * @param targetArn             the Amazon Resource Name (ARN) of the target
task
     * @param roleArn               the ARN of the IAM role to be used for the
schedule
     * @param input                 the input data for the target task
     * @param deleteAfterCompletion whether to delete the schedule after it's
executed
     * @param useFlexibleTimeWindow whether to use a flexible time window for the
schedule execution
     * @return true if the schedule was successfully created, false otherwise
```

```
     */
    public CompletableFuture<Boolean> createScheduleAsync(
        String name,
        String scheduleExpression,
        String scheduleGroupName,
        String targetArn,
        String roleArn,
        String input,
        boolean deleteAfterCompletion,
        boolean useFlexibleTimeWindow) {

        int hoursToRun = 1;
        int flexibleTimeWindowMinutes = 10;

        Target target = Target.builder()
            .arn(targetArn)
            .roleArn(roleArn)
            .input(input)
            .build();

        FlexibleTimeWindow flexibleTimeWindow = FlexibleTimeWindow.builder()
            .mode(useFlexibleTimeWindow
                ? FlexibleTimeWindowMode.FLEXIBLE
                : FlexibleTimeWindowMode.OFF)
            .maximumWindowInMinutes(useFlexibleTimeWindow
                ? flexibleTimeWindowMinutes
                : null)
            .build();

        Instant startDate = Instant.now();
        Instant endDate = startDate.plus(Duration.ofHours(hoursToRun));

        CreateScheduleRequest request = CreateScheduleRequest.builder()
            .name(name)
            .scheduleExpression(scheduleExpression)
            .groupName(scheduleGroupName)
            .target(target)
            .actionAfterCompletion(deleteAfterCompletion
                ? ActionAfterCompletion.DELETE
                : ActionAfterCompletion.NONE)
            .startDate(startDate)
            .endDate(endDate)
            .flexibleTimeWindow(flexibleTimeWindow)
            .build();
```

```
        return getAsyncClient().createSchedule(request)
            .thenApply(response -> {
                logger.info("Successfully created schedule {} in schedule group {},
The ARN is {} ", name, scheduleGroupName, response.scheduleArn());
                return true;
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
                    if (ex instanceof ConflictException) {
                        // Handle ConflictException
                        logger.error("A conflict exception occurred while creating
the schedule: {}", ex.getMessage());
                        throw new CompletionException("A conflict exception occurred
while creating the schedule: " + ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error creating schedule: " +
ex.getMessage(), ex);
                    }
                }
            });
    }
```

- Untuk detail API, lihat CreateScheduledi Referensi AWS SDK for Java 2.x API.

### `CreateScheduleGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateScheduleGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new schedule group.
```

```
     *
     * @param name the name of the schedule group to be created
     * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the schedule group
     */
    public CompletableFuture<CreateScheduleGroupResponse> createScheduleGroup(String
name) {
        CreateScheduleGroupRequest request = CreateScheduleGroupRequest.builder()
            .name(name)
            .build();

        logger.info("Initiating createScheduleGroup call for group: {}", name);
        CompletableFuture<CreateScheduleGroupResponse> futureResponse =
getAsyncClient().createScheduleGroup(request);
        futureResponse.whenComplete((response, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException && ex.getCause() instanceof
ConflictException) {
                    // Rethrow the ConflictException
                    throw (ConflictException) ex.getCause();
                } else {
                    throw new CompletionException("Failed to create schedule group:
" + name, ex);
                }
            } else if (response == null) {
                throw new RuntimeException("Failed to create schedule group:
response was null");
            } else {
                logger.info("Successfully created schedule group '{}': {}", name,
response.scheduleGroupArn());
            }
        });

        return futureResponse;
    }
```

- Untuk detail API, lihat CreateScheduleGroupdi Referensi AWS SDK for Java 2.x API.

### `DeleteSchedule`

Contoh kode berikut menunjukkan cara menggunakan`DeleteSchedule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a schedule with the specified name and group name.
    *
    * @param name      the name of the schedule to be deleted
    * @param groupName the group name of the schedule to be deleted
    * @return a {@link CompletableFuture} that, when completed, indicates whether
the schedule was successfully deleted
    * @throws CompletionException if an error occurs while deleting the schedule,
except for the case where the schedule is not found
    */
   public CompletableFuture<Boolean> deleteScheduleAsync(String name, String
groupName) {
       DeleteScheduleRequest request = DeleteScheduleRequest.builder()
           .name(name)
           .groupName(groupName)
           .build();

       CompletableFuture<DeleteScheduleResponse> response =
getAsyncClient().deleteSchedule(request);
       return response.handle((result, ex) -> {
           if (ex != null) {
               if (ex instanceof ResourceNotFoundException) {
                   throw new CompletionException("Resource not found while deleting
schedule with ID: " + name, ex);
               } else {
                   throw new CompletionException("Failed to delete schedule.", ex);
               }
           }
           logger.info("Successfully deleted schedule with name {}.", name);
           return true;
       });
   }
```

- Untuk detail API, lihat DeleteScheduledi Referensi AWS SDK for Java 2.x API.

### `DeleteScheduleGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteScheduleGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes the specified schedule group.
    *
    * @param name the name of the schedule group to delete
    * @return a {@link CompletableFuture} that completes when the schedule group
has been deleted
    * @throws CompletionException if an error occurs while deleting the schedule
group
    */
   public CompletableFuture<Void> deleteScheduleGroupAsync(String name) {
       DeleteScheduleGroupRequest request = DeleteScheduleGroupRequest.builder()
           .name(name)
           .build();

       return getAsyncClient().deleteScheduleGroup(request)
           .thenRun(() -> {
               logger.info("Successfully deleted schedule group {}", name);
           })
           .whenComplete((result, ex) -> {
               if (ex != null) {
                   if (ex instanceof ResourceNotFoundException) {
                       throw new CompletionException("The resource was not found: "
+ ex.getMessage(), ex);
                   } else {
                       throw new CompletionException("Error deleting schedule
group: " + ex.getMessage(), ex);
                   }
```

```
                }
            });
    }
```

- Untuk detail API, lihat DeleteScheduleGroupdi Referensi AWS SDK for Java 2.x API.

## Skenario

Acara Terjadwal

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Menyebarkan CloudFormation tumpukan dengan sumber daya yang diperlukan.
- Buat grup EventBridge jadwal Scheduler.
- Buat jadwal EventBridge Penjadwal satu kali dengan jendela waktu yang fleksibel.
- Buat jadwal EventBridge Scheduler berulang dengan tarif tertentu.
- Hapus EventBridge Penjadwal jadwal dan jadwal grup.
- Bersihkan sumber daya dan hapus tumpukan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.scheduler.model.SchedulerException;
import javax.mail.internet.AddressException;
import javax.mail.internet.InternetAddress;
import java.time.LocalDateTime;
import java.time.format.DateTimeFormatter;
import java.util.Map;
import java.util.Scanner;
```

```
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * This Java code example performs the following tasks for the Amazon EventBridge
 Scheduler workflow:
 * <p>
 * 1. Prepare the Application:
 * - Prompt the user for an email address to use for the subscription for the SNS
 topic subscription.
 * - Deploy the Cloud Formation template in resources/cfn_template.yaml for resource
 creation.
 * - Store the outputs of the stack into variables for use in the workflow.
 * - Create a schedule group for all workflow schedules.
 * <p>
 * 2. Create one-time Schedule:
 * - Create a one-time schedule to send an initial event.
 * - Use a Flexible Time Window and set the schedule to delete after completion.
 * - Wait for the user to receive the event email from SNS.
 * <p>
 * 3. Create a time-based schedule:
 * - Prompt the user for how many X times per Y hours a recurring event should be
 scheduled.
 * - Create the scheduled event for X times per hour for Y hours.
 * - Wait for the user to receive the event email from SNS.
 * - Delete the schedule when the user is finished.
 * <p>
 * 4. Clean up:
 * - Prompt the user for y/n answer if they want to destroy the stack and clean up
 all resources.
 * - Delete the schedule group.
 * - Destroy the Cloud Formation stack and wait until the stack has been removed.
 */

public class EventbridgeSchedulerScenario {

    private static final Logger logger =
 LoggerFactory.getLogger(EventbridgeSchedulerScenario.class);
    private static final Scanner scanner = new Scanner(System.in);
    private static String STACK_NAME = "workflow-stack-name";
    private static final String scheduleGroupName = "schedules-group";

    private static String recurringScheduleName = "";
```

```
   private static String oneTimeScheduleName = "";

   private static final EventbridgeSchedulerActions eventbridgeActions = new
EventbridgeSchedulerActions();

   public static final String DASHES = new String(new char[80]).replace("\0", "-");

   public static String roleArn = "";
   public static String snsTopicArn = "";

   public static void main(String[] args) {
       logger.info(DASHES);
       logger.info("Welcome to the Amazon EventBridge Scheduler Workflow.");
       logger.info("""
           Amazon EventBridge Scheduler is a fully managed service that helps you
schedule and execute
           a wide range of tasks and events in the cloud. It's designed to simplify
the process of
           scheduling and managing recurring or one-time events, making it easier
for developers and
           businesses to automate various workflows and processes.

           One of the key features of Amazon EventBridge Scheduler is its ability
to schedule events
           based on a variety of triggers, including time-based schedules, custom
event patterns, or
           even integration with other AWS services. For example, you can use
EventBridge Scheduler
           to schedule a report generation task to run every weekday at 9 AM, or to
trigger a
           Lambda function when a specific Amazon S3 object is created.

           This flexibility allows you to build complex and dynamic event-driven
architectures
           that adapt to your business needs.

           Lets get started...
           """);
       waitForInputToContinue();
       logger.info(DASHES);

       logger.info(DASHES);
       logger.info("1. Prepare the application.");
       waitForInputToContinue();
```

```
        try {
            boolean prepareSuccess = prepareApplication();
            logger.info(DASHES);

            if (prepareSuccess) {
                logger.info("2. Create one-time schedule.");
                logger.info("""
                    A one-time schedule in Amazon EventBridge Scheduler is an event
trigger that allows
                    you to schedule a one-time event to run at a specific date and
time. This is useful for
                    executing a specific task or workflow at a predetermined time,
without the need for recurring
                    or complex scheduling.
                    """);
                waitForInputToContinue();
                createOneTimeSchedule();
                logger.info("Do you want to delete the schedule {} (y/n) ?",
oneTimeScheduleName);
                String ans = scanner.nextLine().trim();
                if (ans.equalsIgnoreCase("y")) {

eventbridgeActions.deleteScheduleAsync(oneTimeScheduleName,scheduleGroupName);
                }
                logger.info(DASHES);

                logger.info("3. Create a recurring schedule.");
                logger.info("""
                    A recurring schedule is a feature that allows you to schedule
and manage the execution
                    of your serverless applications or workloads on a recurring
basis. For example,
                    with EventBridge Scheduler, you can create custom schedules for
your AWS Lambda functions,
                    AWS Step Functions, and other supported event sources, enabling
you to automate tasks and
                    workflows without the need for complex infrastructure
management.
                    """);
                waitForInputToContinue();
                createRecurringSchedule();
                logger.info("Do you want to delete the schedule {} (y/n) ?",
oneTimeScheduleName);
                String ans2 = scanner.nextLine().trim();
```

```
                if (ans2.equalsIgnoreCase("y")) {

eventbridgeActions.deleteScheduleAsync(recurringScheduleName,scheduleGroupName);
                }
                logger.info(DASHES);
            }
        } catch (Exception ex) {
            logger.info("There was a problem with the workflow {}, initiating
cleanup...", ex.getMessage());
            cleanUp();
        }

        logger.info(DASHES);
        logger.info("4. Clean up the resources.");
        logger.info("Do you want to delete these AWS resources (y/n) ?");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanUp();
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
        logger.info("Amazon EventBridge Scheduler workflow completed.");
        logger.info(DASHES);
    }

    /**
     * Cleans up the resources associated with the EventBridge scheduler.
     * If any errors occur during the cleanup process, the corresponding error
messages are logged.
     */
    public static void cleanUp() {
        logger.info("First, delete the schedule group.");
        logger.info("When the schedule group is deleted, schedules that are part of
that group are deleted.");
        waitForInputToContinue();
        try {
            eventbridgeActions.deleteScheduleGroupAsync(scheduleGroupName).join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof SchedulerException schedulerException) {
                logger.error("Scheduler error occurred: Error message: {}, Error
code {}",
```

```
                    schedulerException.getMessage(),
schedulerException.awsErrorDetails().errorCode(), schedulerException);
            } else {
                logger.error("An unexpected error occurred: {}",
cause.getMessage());
            }
            return;
        }

        logger.info("Destroy the CloudFormation stack");
        waitForInputToContinue();
        CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
    }

    /**
     * Prepares the application by creating resources in a CloudFormation stack,
including an SNS topic
     * that will be subscribed to the EventBridge Scheduler events. The user will
need to confirm the subscription
     * in order to receive event emails.
     *
     * @return true if the application preparation was successful, false otherwise
     */
    public static boolean prepareApplication() {
        logger.info("""
            This example creates resources in a CloudFormation stack, including an
SNS topic
            that will be subscribed to the EventBridge Scheduler events.
            You will need to confirm the subscription in order to receive event
emails.
             """);

        String emailAddress = promptUserForEmail();
        logger.info("You entered {}", emailAddress);

        logger.info("Do you want to use a custom Stack name (y/n) ?");
        String ans = scanner.nextLine().trim();
        if (ans.equalsIgnoreCase("y")) {
            String newStackName = scanner.nextLine();
            logger.info("You entered {} for the new stack name", newStackName);
            waitForInputToContinue();
            STACK_NAME = newStackName;
        }
```

```
        logger.info("Get the roleArn and snsTopicArn values using a Cloudformation
template.");
        waitForInputToContinue();
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME, emailAddress);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputs(STACK_NAME);
        roleArn = stackOutputs.get("RoleARN");
        snsTopicArn = stackOutputs.get("SNStopicARN");

        logger.info("The roleARN is {}", roleArn);
        logger.info("The snsTopicArn is {}", snsTopicArn);

        try {
            eventbridgeActions.createScheduleGroup(scheduleGroupName).join();
            logger.info("createScheduleGroupAsync completed successfully.");

        } catch (RuntimeException e) {
            logger.error("Error occurred: {} ", e.getMessage());
            return false;
        }
        logger.info("Application preparation complete.");
        return true;
    }

    /**
     * Waits for the user to enter 'c' followed by <ENTER> to continue the program.
     * This method is used to pause the program execution and wait for user input
before
     * proceeding.
     */
    private static void waitForInputToContinue() {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
```

```
        }
    }

    /**
     * Prompts the user to enter an email address and validates the input.
     * If the provided email address is invalid, the method will prompt the user to
try again.
     *
     * @return the valid email address entered by the user
     */
    private static String promptUserForEmail() {
        logger.info("Enter an email address to use for event subscriptions: ");
        String email = scanner.nextLine();
        if (!isValidEmail(email)) {
            logger.info("Invalid email address. Please try again.");
            return promptUserForEmail();
        }
        return email;
    }

    /**
     * Checks if the given email address is valid.
     *
     * @param email the email address to be validated
     * @return {@code true} if the email address is valid, {@code false} otherwise
     */
    private static boolean isValidEmail(String email) {
        try {
            InternetAddress emailAddress = new InternetAddress(email);
            emailAddress.validate();
            return true;

        } catch (AddressException e) {
            return false;
        }
    }

    /**
     * Creates a one-time schedule to send an initial event in 1 minute with a
flexible time window.
     *
     * @return {@code true} if the schedule was created successfully, {@code false}
otherwise
     */
```

```
    public static Boolean createOneTimeSchedule() {
        oneTimeScheduleName = promptUserForResourceName("Enter a name for the one-
time schedule:");
        logger.info("Creating a one-time schedule named {} to send an initial event
 in 1 minute with a flexible time window...", oneTimeScheduleName);
        LocalDateTime scheduledTime = LocalDateTime.now();
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-
dd'T'HH:mm:ss");

        String scheduleExpression = "at(" + scheduledTime.format(formatter) + ")";
        return eventbridgeActions.createScheduleAsync(
            oneTimeScheduleName,
            scheduleExpression,
            scheduleGroupName,
            snsTopicArn,
            roleArn,
            "One time scheduled event test from schedule",
            true,
            true).join();
    }


    /**
     * Creates a recurring schedule to send events based on a specific time.
     *
     * @return A {@link CompletableFuture} that completes with a boolean value
 indicating the success or failure of the operation.
     */
    public static Boolean createRecurringSchedule() {
        logger.info("Creating a recurring schedule to send events for one hour...");
        recurringScheduleName = promptUserForResourceName("Enter a name for the
 recurring schedule:");

        // Prompt the user for the schedule rate (in minutes).
        int scheduleRateInMinutes = promptUserForInteger("Enter the desired schedule
 rate (in minutes): ");
        String scheduleExpression = "rate(" + scheduleRateInMinutes + " minutes)";
        return eventbridgeActions.createScheduleAsync(
            recurringScheduleName,
            scheduleExpression,
            scheduleGroupName,
            snsTopicArn,
            roleArn,
            "Recurrent event test from schedule " + recurringScheduleName,
```

```
            true,
            true).join();
    }

    /**
     * Prompts the user for a resource name and validates the input.
     *
     * @param prompt the message to display to the user when prompting for the
 resource name
     * @return the valid resource name entered by the user
     */
    private static String promptUserForResourceName(String prompt) {
        logger.info(prompt);
        String resourceName = scanner.nextLine();
        String regex = "[0-9a-zA-Z-_.]+";
        if (!resourceName.matches(regex)) {
            logger.info("Invalid resource name. Please use a name that matches the
 pattern " + regex + ".");
            return promptUserForResourceName(prompt);
        }
        return resourceName;
    }

    /**
     * Prompts the user for an integer input and returns the integer value.
     *
     * @param prompt the message to be displayed to the user when prompting for
 input
     * @return the integer value entered by the user
     */
    private static int promptUserForInteger(String prompt) {
        logger.info(prompt);
        String stringResponse = scanner.nextLine();
        if (stringResponse == null || stringResponse.trim().isEmpty() || !
isInteger(stringResponse)) {
            logger.info("Invalid integer.");
            return promptUserForInteger(prompt);
        }
        return Integer.parseInt(stringResponse);
    }

    /**
     * Checks if the given string represents a valid integer.
     *
```

```
     * @param str the string to be checked
     * @return {@code true} if the string represents a valid integer, {@code false}
 otherwise
     */
    private static boolean isInteger(String str) {
        try {
            Integer.parseInt(str);
            return true;
        } catch (NumberFormatException e) {
            return false;
        }
    }
}
```

Pembungkus untuk operasi layanan.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryMode;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.scheduler.SchedulerAsyncClient;
import software.amazon.awssdk.services.scheduler.model.ActionAfterCompletion;
import software.amazon.awssdk.services.scheduler.model.ConflictException;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleGroupRequest;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleGroupResponse;
import software.amazon.awssdk.services.scheduler.model.CreateScheduleRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleGroupRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleRequest;
import software.amazon.awssdk.services.scheduler.model.DeleteScheduleResponse;
import software.amazon.awssdk.services.scheduler.model.FlexibleTimeWindow;
import software.amazon.awssdk.services.scheduler.model.FlexibleTimeWindowMode;
import software.amazon.awssdk.services.scheduler.model.ResourceNotFoundException;
import software.amazon.awssdk.services.scheduler.model.Target;

import java.time.Instant;
import java.util.concurrent.CompletableFuture;
import java.time.Duration;
import java.util.concurrent.CompletionException;
```

```
public class EventbridgeSchedulerActions {

   private static SchedulerAsyncClient schedulerClient;
   private static final Logger logger =
 LoggerFactory.getLogger(EventbridgeSchedulerActions.class);

   public static SchedulerAsyncClient getAsyncClient() {
       if (schedulerClient == null) {
           /*
           The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
 version 2,
           and it is designed to provide a high-performance, asynchronous HTTP
 client for interacting with AWS services.
            It uses the Netty framework to handle the underlying network
 communication and the Java NIO API to
            provide a non-blocking, event-driven approach to HTTP requests and
 responses.
            */

           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(50)  // Adjust as needed.
               .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
 timeout.
               .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
               .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
               .build();

           ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
 timeout.
               .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
 individual call attempt timeout.
               .retryStrategy(RetryMode.STANDARD)
               .build();

           schedulerClient = SchedulerAsyncClient.builder()
               .region(Region.US_EAST_1)
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return schedulerClient;
```

```
    }


    /**
     * Creates a new schedule group.
     *
     * @param name the name of the schedule group to be created
     * @return a {@link CompletableFuture} representing the asynchronous operation
of creating the schedule group
     */
    public CompletableFuture<CreateScheduleGroupResponse> createScheduleGroup(String
name) {
        CreateScheduleGroupRequest request = CreateScheduleGroupRequest.builder()
            .name(name)
            .build();

        logger.info("Initiating createScheduleGroup call for group: {}", name);
        CompletableFuture<CreateScheduleGroupResponse> futureResponse =
getAsyncClient().createScheduleGroup(request);
        futureResponse.whenComplete((response, ex) -> {
            if (ex != null) {
                if (ex instanceof CompletionException && ex.getCause() instanceof
ConflictException) {
                    // Rethrow the ConflictException
                    throw (ConflictException) ex.getCause();
                } else {
                    throw new CompletionException("Failed to create schedule group:
" + name, ex);
                }
            } else if (response == null) {
                throw new RuntimeException("Failed to create schedule group:
response was null");
            } else {
                logger.info("Successfully created schedule group '{}': {}", name,
response.scheduleGroupArn());
            }
        });

        return futureResponse;
    }


    /**
     * Creates a new schedule for a target task.
```

```
    *
    * @param name                   the name of the schedule
    * @param scheduleExpression    The schedule expression that defines when the
schedule should run.
    * @param scheduleGroupName     the name of the schedule group to which the
schedule belongs
    * @param targetArn             the Amazon Resource Name (ARN) of the target
task
    * @param roleArn               the ARN of the IAM role to be used for the
schedule
    * @param input                 the input data for the target task
    * @param deleteAfterCompletion whether to delete the schedule after it's
executed
    * @param useFlexibleTimeWindow whether to use a flexible time window for the
schedule execution
    * @return true if the schedule was successfully created, false otherwise
    */
   public CompletableFuture<Boolean> createScheduleAsync(
       String name,
       String scheduleExpression,
       String scheduleGroupName,
       String targetArn,
       String roleArn,
       String input,
       boolean deleteAfterCompletion,
       boolean useFlexibleTimeWindow) {

       int hoursToRun = 1;
       int flexibleTimeWindowMinutes = 10;

       Target target = Target.builder()
           .arn(targetArn)
           .roleArn(roleArn)
           .input(input)
           .build();

       FlexibleTimeWindow flexibleTimeWindow = FlexibleTimeWindow.builder()
           .mode(useFlexibleTimeWindow
               ? FlexibleTimeWindowMode.FLEXIBLE
               : FlexibleTimeWindowMode.OFF)
           .maximumWindowInMinutes(useFlexibleTimeWindow
               ? flexibleTimeWindowMinutes
               : null)
           .build();
```

```
        Instant startDate = Instant.now();
        Instant endDate = startDate.plus(Duration.ofHours(hoursToRun));

        CreateScheduleRequest request = CreateScheduleRequest.builder()
            .name(name)
            .scheduleExpression(scheduleExpression)
            .groupName(scheduleGroupName)
            .target(target)
            .actionAfterCompletion(deleteAfterCompletion
                ? ActionAfterCompletion.DELETE
                : ActionAfterCompletion.NONE)
            .startDate(startDate)
            .endDate(endDate)
            .flexibleTimeWindow(flexibleTimeWindow)
            .build();

        return getAsyncClient().createSchedule(request)
            .thenApply(response -> {
                logger.info("Successfully created schedule {} in schedule group {},
The ARN is {} ", name, scheduleGroupName, response.scheduleArn());
                return true;
            })
            .whenComplete((result, ex) -> {
                if (ex != null) {
                    if (ex instanceof ConflictException) {
                        // Handle ConflictException
                        logger.error("A conflict exception occurred while creating
the schedule: {}", ex.getMessage());
                        throw new CompletionException("A conflict exception occurred
while creating the schedule: " + ex.getMessage(), ex);
                    } else {
                        throw new CompletionException("Error creating schedule: " +
ex.getMessage(), ex);
                    }
                }
            });
    }


    /**
     * Deletes the specified schedule group.
     *
     * @param name the name of the schedule group to delete
```

```
    * @return a {@link CompletableFuture} that completes when the schedule group
has been deleted
    * @throws CompletionException if an error occurs while deleting the schedule
group
    */
   public CompletableFuture<Void> deleteScheduleGroupAsync(String name) {
       DeleteScheduleGroupRequest request = DeleteScheduleGroupRequest.builder()
           .name(name)
           .build();

       return getAsyncClient().deleteScheduleGroup(request)
           .thenRun(() -> {
               logger.info("Successfully deleted schedule group {}", name);
           })
           .whenComplete((result, ex) -> {
               if (ex != null) {
                   if (ex instanceof ResourceNotFoundException) {
                       throw new CompletionException("The resource was not found: "
+ ex.getMessage(), ex);
                   } else {
                       throw new CompletionException("Error deleting schedule
group: " + ex.getMessage(), ex);
                   }
               }
           });
   }


   /**
    * Deletes a schedule with the specified name and group name.
    *
    * @param name      the name of the schedule to be deleted
    * @param groupName the group name of the schedule to be deleted
    * @return a {@link CompletableFuture} that, when completed, indicates whether
the schedule was successfully deleted
    * @throws CompletionException if an error occurs while deleting the schedule,
except for the case where the schedule is not found
    */
   public CompletableFuture<Boolean> deleteScheduleAsync(String name, String
groupName) {
       DeleteScheduleRequest request = DeleteScheduleRequest.builder()
           .name(name)
           .groupName(groupName)
           .build();
```

```
        CompletableFuture<DeleteScheduleResponse> response =
 getAsyncClient().deleteSchedule(request);
        return response.handle((result, ex) -> {
            if (ex != null) {
                if (ex instanceof ResourceNotFoundException) {
                    throw new CompletionException("Resource not found while deleting
 schedule with ID: " + name, ex);
                } else {
                    throw new CompletionException("Failed to delete schedule.", ex);
                }
            }
            logger.info("Successfully deleted schedule with name {}.", name);
            return true;
        });
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateSchedule
  - CreateScheduleGroup
  - DeleteSchedule
  - DeleteScheduleGroups

# Contoh Forecast menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan AWS SDK for Java 2.x with Forecast.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

# Tindakan

## `CreateDataset`

Contoh kode berikut menunjukkan cara menggunakan`CreateDataset`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.CreateDatasetRequest;
import software.amazon.awssdk.services.forecast.model.Schema;
import software.amazon.awssdk.services.forecast.model.SchemaAttribute;
import software.amazon.awssdk.services.forecast.model.CreateDatasetResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateDataSet {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <name>\s

                Where:
                    name - The name of the data set.\s
                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String name = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        String myDataSetARN = createForecastDataSet(forecast, name);
        System.out.println("The ARN of the new data set is " + myDataSetARN);
        forecast.close();
    }

    public static String createForecastDataSet(ForecastClient forecast, String name)
{
        try {
            Schema schema = Schema.builder()
                    .attributes(getSchema())
                    .build();

            CreateDatasetRequest datasetRequest = CreateDatasetRequest.builder()
                    .datasetName(name)
                    .domain("CUSTOM")
                    .datasetType("RELATED_TIME_SERIES")
                    .dataFrequency("D")
                    .schema(schema)
                    .build();

            CreateDatasetResponse response = forecast.createDataset(datasetRequest);
            return response.datasetArn();

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }

    // Create a SchemaAttribute list required to create a data set.
```

```
    private static List<SchemaAttribute> getSchema() {

        List<SchemaAttribute> schemaList = new ArrayList<>();
        SchemaAttribute att1 = SchemaAttribute.builder()
                .attributeName("item_id")
                .attributeType("string")
                .build();

        SchemaAttribute att2 = SchemaAttribute.builder()
                .attributeName("timestamp")
                .attributeType("timestamp")
                .build();

        SchemaAttribute att3 = SchemaAttribute.builder()
                .attributeName("target_value")
                .attributeType("float")
                .build();

        // Push the SchemaAttribute objects to the List.
        schemaList.add(att1);
        schemaList.add(att2);
        schemaList.add(att3);
        return schemaList;
    }
}
```

- Untuk detail API, lihat CreateDatasetdi Referensi AWS SDK for Java 2.x API.

### `CreateForecast`

Contoh kode berikut menunjukkan cara menggunakan`CreateForecast`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.CreateForecastRequest;
import software.amazon.awssdk.services.forecast.model.CreateForecastResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateForecast {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <name> <predictorArn>\s

                Where:
                    name - The name of the forecast.\s
                    predictorArn - The arn of the predictor to use.\s

                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String name = args[0];
        String predictorArn = args[1];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        String forecastArn = createNewForecast(forecast, name, predictorArn);
        System.out.println("The ARN of the new forecast is " + forecastArn);
        forecast.close();
    }
```

```
    public static String createNewForecast(ForecastClient forecast, String name,
 String predictorArn) {
        try {
            CreateForecastRequest forecastRequest = CreateForecastRequest.builder()
                    .forecastName(name)
                    .predictorArn(predictorArn)
                    .build();

            CreateForecastResponse response =
 forecast.createForecast(forecastRequest);
            return response.forecastArn();

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateForecastdi Referensi AWS SDK for Java 2.x API.

### `DeleteDataset`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDataset`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DeleteDatasetRequest;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataset {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <datasetARN>\s

                Where:
                    datasetARN - The ARN of the data set to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String datasetARN = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        deleteForecastDataSet(forecast, datasetARN);
        forecast.close();
    }

    public static void deleteForecastDataSet(ForecastClient forecast, String
 myDataSetARN) {
        try {
            DeleteDatasetRequest deleteRequest = DeleteDatasetRequest.builder()
                    .datasetArn(myDataSetARN)
                    .build();

            forecast.deleteDataset(deleteRequest);
            System.out.println("The Data Set was deleted");

        } catch (ForecastException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteDatasetdi Referensi AWS SDK for Java 2.x API.

### `DeleteForecast`

Contoh kode berikut menunjukkan cara menggunakan`DeleteForecast`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DeleteDatasetRequest;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataset {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <datasetARN>\s
```

```
                Where:
                    datasetARN - The ARN of the data set to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String datasetARN = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        deleteForecastDataSet(forecast, datasetARN);
        forecast.close();
    }

    public static void deleteForecastDataSet(ForecastClient forecast, String
 myDataSetARN) {
        try {
            DeleteDatasetRequest deleteRequest = DeleteDatasetRequest.builder()
                    .datasetArn(myDataSetARN)
                    .build();

            forecast.deleteDataset(deleteRequest);
            System.out.println("The Data Set was deleted");

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteForecastdi Referensi AWS SDK for Java 2.x API.

### `DescribeForecast`

Contoh kode berikut menunjukkan cara menggunakan`DescribeForecast`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DescribeForecastRequest;
import software.amazon.awssdk.services.forecast.model.DescribeForecastResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeForecast {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <forecastarn>\s

                Where:
                    forecastarn - The arn of the forecast (for example,
 "arn:aws:forecast:us-west-2:xxxxx322:forecast/my_forecast)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String forecastarn = args[0];
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
```

```
                .region(region)
                .build();

        describe(forecast, forecastarn);
        forecast.close();
    }

    public static void describe(ForecastClient forecast, String forecastarn) {
        try {
            DescribeForecastRequest request = DescribeForecastRequest.builder()
                    .forecastArn(forecastarn)
                    .build();

            DescribeForecastResponse response = forecast.describeForecast(request);
            System.out.println("The name of the forecast is " +
 response.forecastName());

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeForecastdi Referensi AWS SDK for Java 2.x API.

### `ListDatasetGroups`

Contoh kode berikut menunjukkan cara menggunakan`ListDatasetGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.DatasetGroupSummary;
```

```
import software.amazon.awssdk.services.forecast.model.ListDatasetGroupsRequest;
import software.amazon.awssdk.services.forecast.model.ListDatasetGroupsResponse;
import software.amazon.awssdk.services.forecast.model.ForecastException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListDataSetGroups {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        listDataGroups(forecast);
        forecast.close();
    }

    public static void listDataGroups(ForecastClient forecast) {
        try {
            ListDatasetGroupsRequest group = ListDatasetGroupsRequest.builder()
                    .maxResults(10)
                    .build();

            ListDatasetGroupsResponse response = forecast.listDatasetGroups(group);
            List<DatasetGroupSummary> groups = response.datasetGroups();
            for (DatasetGroupSummary myGroup : groups) {
                System.out.println("The Data Set name is " +
 myGroup.datasetGroupName());
            }

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListDatasetGroupsdi Referensi AWS SDK for Java 2.x API.

### `ListForecasts`

Contoh kode berikut menunjukkan cara menggunakan`ListForecasts`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.forecast.ForecastClient;
import software.amazon.awssdk.services.forecast.model.ListForecastsResponse;
import software.amazon.awssdk.services.forecast.model.ListForecastsRequest;
import software.amazon.awssdk.services.forecast.model.ForecastSummary;
import software.amazon.awssdk.services.forecast.model.ForecastException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListForecasts {

    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        ForecastClient forecast = ForecastClient.builder()
                .region(region)
                .build();

        listAllForeCasts(forecast);
```

```
        forecast.close();
    }

    public static void listAllForeCasts(ForecastClient forecast) {
        try {
            ListForecastsRequest request = ListForecastsRequest.builder()
                    .maxResults(10)
                    .build();

            ListForecastsResponse response = forecast.listForecasts(request);
            List<ForecastSummary> forecasts = response.forecasts();
            for (ForecastSummary forecastSummary : forecasts) {
                System.out.println("The name of the forecast is " +
 forecastSummary.forecastName());
            }

        } catch (ForecastException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListForecastsdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Glacier menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon Glacier. AWS SDK for Java 2.x

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

# Tindakan

## `CreateVault`

Contoh kode berikut menunjukkan cara menggunakan`CreateVault`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.CreateVaultRequest;
import software.amazon.awssdk.services.glacier.model.CreateVaultResponse;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateVault {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <vaultName>

                Where:
                   vaultName - The name of the vault to create.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
```

```
        }

        String vaultName = args[0];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createGlacierVault(glacier, vaultName);
        glacier.close();
    }

    public static void createGlacierVault(GlacierClient glacier, String vaultName) {
        try {
            CreateVaultRequest vaultRequest = CreateVaultRequest.builder()
                    .vaultName(vaultName)
                    .build();

            CreateVaultResponse createVaultResult =
 glacier.createVault(vaultRequest);
            System.out.println("The URI of the new vault is " +
 createVaultResult.location());

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateVaultdi Referensi AWS SDK for Java 2.x API.

### `DeleteArchive`

Contoh kode berikut menunjukkan cara menggunakan`DeleteArchive`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.DeleteArchiveRequest;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteArchive {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <vaultName> <accountId> <archiveId>

                Where:
                   vaultName - The name of the vault that contains the archive to
 delete.
                   accountId - The account ID value.
                   archiveId - The archive ID value.
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        String accountId = args[1];
        String archiveId = args[2];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteGlacierArchive(glacier, vaultName, accountId, archiveId);
        glacier.close();
    }
```

```
    public static void deleteGlacierArchive(GlacierClient glacier, String vaultName,
 String accountId,
            String archiveId) {
        try {
            DeleteArchiveRequest delArcRequest = DeleteArchiveRequest.builder()
                    .vaultName(vaultName)
                    .accountId(accountId)
                    .archiveId(archiveId)
                    .build();

            glacier.deleteArchive(delArcRequest);
            System.out.println("The archive was deleted.");

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteArchivedi Referensi AWS SDK for Java 2.x API.

### `DeleteVault`

Contoh kode berikut menunjukkan cara menggunakan`DeleteVault`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.DeleteVaultRequest;
import software.amazon.awssdk.services.glacier.model.GlacierException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteVault {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <vaultName>

                Where:
                   vaultName - The name of the vault to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deleteGlacierVault(glacier, vaultName);
        glacier.close();
    }

    public static void deleteGlacierVault(GlacierClient glacier, String vaultName) {
        try {
            DeleteVaultRequest delVaultRequest = DeleteVaultRequest.builder()
                    .vaultName(vaultName)
                    .build();

            glacier.deleteVault(delVaultRequest);
            System.out.println("The vault was deleted!");

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Untuk detail API, lihat DeleteVaultdi Referensi AWS SDK for Java 2.x API.

### `InitiateJob`

Contoh kode berikut menunjukkan cara menggunakan`InitiateJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Ambil inventaris lemari besi.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.JobParameters;
import software.amazon.awssdk.services.glacier.model.InitiateJobResponse;
import software.amazon.awssdk.services.glacier.model.GlacierException;
import software.amazon.awssdk.services.glacier.model.InitiateJobRequest;
import software.amazon.awssdk.services.glacier.model.DescribeJobRequest;
import software.amazon.awssdk.services.glacier.model.DescribeJobResponse;
import software.amazon.awssdk.services.glacier.model.GetJobOutputRequest;
import software.amazon.awssdk.services.glacier.model.GetJobOutputResponse;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ArchiveDownload {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <vaultName> <accountId> <path>

                Where:
                   vaultName - The name of the vault.
                   accountId - The account ID value.
                   path - The path where the file is written to.
                """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String vaultName = args[0];
        String accountId = args[1];
        String path = args[2];
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String jobNum = createJob(glacier, vaultName, accountId);
        checkJob(glacier, jobNum, vaultName, accountId, path);
        glacier.close();
    }

    public static String createJob(GlacierClient glacier, String vaultName, String
 accountId) {
        try {
            JobParameters job = JobParameters.builder()
                    .type("inventory-retrieval")
                    .build();

            InitiateJobRequest initJob = InitiateJobRequest.builder()
                    .jobParameters(job)
                    .accountId(accountId)
                    .vaultName(vaultName)
                    .build();
```

```
            InitiateJobResponse response = glacier.initiateJob(initJob);
            System.out.println("The job ID is: " + response.jobId());
            System.out.println("The relative URI path of the job is: " +
response.location());
            return response.jobId();

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);

        }
        return "";
    }

    // Poll S3 Glacier = Polling a Job may take 4-6 hours according to the
    // Documentation.
    public static void checkJob(GlacierClient glacier, String jobId, String name,
String account, String path) {
        try {
            boolean finished = false;
            String jobStatus;
            int yy = 0;

            while (!finished) {
                DescribeJobRequest jobRequest = DescribeJobRequest.builder()
                        .jobId(jobId)
                        .accountId(account)
                        .vaultName(name)
                        .build();

                DescribeJobResponse response = glacier.describeJob(jobRequest);
                jobStatus = response.statusCodeAsString();

                if (jobStatus.compareTo("Succeeded") == 0)
                    finished = true;
                else {
                    System.out.println(yy + " status is: " + jobStatus);
                    Thread.sleep(1000);
                }
                yy++;
            }

            System.out.println("Job has Succeeded");
```

```
            GetJobOutputRequest jobOutputRequest = GetJobOutputRequest.builder()
                    .jobId(jobId)
                    .vaultName(name)
                    .accountId(account)
                    .build();

            ResponseBytes<GetJobOutputResponse> objectBytes =
 glacier.getJobOutputAsBytes(jobOutputRequest);
            // Write the data to a local file.
            byte[] data = objectBytes.asByteArray();
            File myFile = new File(path);
            OutputStream os = new FileOutputStream(myFile);
            os.write(data);
            System.out.println("Successfully obtained bytes from a Glacier vault");
            os.close();

        } catch (GlacierException | InterruptedException | IOException e) {
            System.out.println(e.getMessage());
            System.exit(1);

        }
    }
}
```

- Untuk detail API, lihat InitiateJobdi Referensi AWS SDK for Java 2.x API.

### `ListVaults`

Contoh kode berikut menunjukkan cara menggunakan`ListVaults`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.model.ListVaultsRequest;
import software.amazon.awssdk.services.glacier.model.ListVaultsResponse;
```

```
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.DescribeVaultOutput;
import software.amazon.awssdk.services.glacier.model.GlacierException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListVaults {
    public static void main(String[] args) {
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllVault(glacier);
        glacier.close();
    }

    public static void listAllVault(GlacierClient glacier) {
        boolean listComplete = false;
        String newMarker = null;
        int totalVaults = 0;
        System.out.println("Your Amazon Glacier vaults:");
        try {
            while (!listComplete) {
                ListVaultsResponse response = null;
                if (newMarker != null) {
                    ListVaultsRequest request = ListVaultsRequest.builder()
                            .marker(newMarker)
                            .build();

                    response = glacier.listVaults(request);
                } else {
                    ListVaultsRequest request = ListVaultsRequest.builder()
                            .build();
                    response = glacier.listVaults(request);
                }

                List<DescribeVaultOutput> vaultList = response.vaultList();
```

```
                for (DescribeVaultOutput v : vaultList) {
                    totalVaults += 1;
                    System.out.println("* " + v.vaultName());
                }

                // Check for further results.
                newMarker = response.marker();
                if (newMarker == null) {
                    listComplete = true;
                }
            }

            if (totalVaults == 0) {
                System.out.println("No vaults found.");
            }

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListVaultsdi Referensi AWS SDK for Java 2.x API.

### `UploadArchive`

Contoh kode berikut menunjukkan cara menggunakan`UploadArchive`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glacier.GlacierClient;
import software.amazon.awssdk.services.glacier.model.UploadArchiveRequest;
import software.amazon.awssdk.services.glacier.model.UploadArchiveResponse;
```

```
import software.amazon.awssdk.services.glacier.model.GlacierException;
import java.io.File;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.io.FileInputStream;
import java.io.IOException;
import java.security.MessageDigest;
import java.security.NoSuchAlgorithmException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UploadArchive {

    static final int ONE_MB = 1024 * 1024;

    public static void main(String[] args) {
        final String usage = """

                Usage:   <strPath> <vaultName>\s

                Where:
                   strPath - The path to the archive to upload (for example, C:\\AWS
\\test.pdf).
                   vaultName - The name of the vault.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String strPath = args[0];
        String vaultName = args[1];
        File myFile = new File(strPath);
        Path path = Paths.get(strPath);
        GlacierClient glacier = GlacierClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        String archiveId = uploadContent(glacier, path, vaultName, myFile);
        System.out.println("The ID of the archived item is " + archiveId);
        glacier.close();
    }

    public static String uploadContent(GlacierClient glacier, Path path, String
vaultName, File myFile) {
        // Get an SHA-256 tree hash value.
        String checkVal = computeSHA256(myFile);
        try {
            UploadArchiveRequest uploadRequest = UploadArchiveRequest.builder()
                    .vaultName(vaultName)
                    .checksum(checkVal)
                    .build();

            UploadArchiveResponse res = glacier.uploadArchive(uploadRequest, path);
            return res.archiveId();

        } catch (GlacierException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    private static String computeSHA256(File inputFile) {
        try {
            byte[] treeHash = computeSHA256TreeHash(inputFile);
            System.out.printf("SHA-256 tree hash = %s\n", toHex(treeHash));
            return toHex(treeHash);

        } catch (IOException ioe) {
            System.err.format("Exception when reading from file %s: %s", inputFile,
ioe.getMessage());
            System.exit(-1);

        } catch (NoSuchAlgorithmException nsae) {
            System.err.format("Cannot locate MessageDigest algorithm for SHA-256:
%s", nsae.getMessage());
            System.exit(-1);
        }
        return "";
    }
```

```
public static byte[] computeSHA256TreeHash(File inputFile) throws IOException,
        NoSuchAlgorithmException {

    byte[][] chunkSHA256Hashes = getChunkSHA256Hashes(inputFile);
    return computeSHA256TreeHash(chunkSHA256Hashes);
}

/**
 * Computes an SHA256 checksum for each 1 MB chunk of the input file. This
 * includes the checksum for the last chunk, even if it's smaller than 1 MB.
 */
public static byte[][] getChunkSHA256Hashes(File file) throws IOException,
        NoSuchAlgorithmException {

    MessageDigest md = MessageDigest.getInstance("SHA-256");
    long numChunks = file.length() / ONE_MB;
    if (file.length() % ONE_MB > 0) {
        numChunks++;
    }

    if (numChunks == 0) {
        return new byte[][] { md.digest() };
    }

    byte[][] chunkSHA256Hashes = new byte[(int) numChunks][];
    FileInputStream fileStream = null;

    try {
        fileStream = new FileInputStream(file);
        byte[] buff = new byte[ONE_MB];

        int bytesRead;
        int idx = 0;

        while ((bytesRead = fileStream.read(buff, 0, ONE_MB)) > 0) {
            md.reset();
            md.update(buff, 0, bytesRead);
            chunkSHA256Hashes[idx++] = md.digest();
        }

        return chunkSHA256Hashes;

    } finally {
```

```
            if (fileStream != null) {
                try {
                    fileStream.close();
                } catch (IOException ioe) {
                    System.err.printf("Exception while closing %s.\n %s",
file.getName(),
                            ioe.getMessage());
                }
            }
        }
    }

    /**
     * Computes the SHA-256 tree hash for the passed array of 1 MB chunk
     * checksums.
     */
    public static byte[] computeSHA256TreeHash(byte[][] chunkSHA256Hashes)
            throws NoSuchAlgorithmException {

        MessageDigest md = MessageDigest.getInstance("SHA-256");
        byte[][] prevLvlHashes = chunkSHA256Hashes;
        while (prevLvlHashes.length > 1) {
            int len = prevLvlHashes.length / 2;
            if (prevLvlHashes.length % 2 != 0) {
                len++;
            }

            byte[][] currLvlHashes = new byte[len][];
            int j = 0;
            for (int i = 0; i < prevLvlHashes.length; i = i + 2, j++) {

                // If there are at least two elements remaining.
                if (prevLvlHashes.length - i > 1) {

                    // Calculate a digest of the concatenated nodes.
                    md.reset();
                    md.update(prevLvlHashes[i]);
                    md.update(prevLvlHashes[i + 1]);
                    currLvlHashes[j] = md.digest();

                } else { // Take care of the remaining odd chunk
                    currLvlHashes[j] = prevLvlHashes[i];
                }
            }
```

```
            prevLvlHashes = currLvlHashes;
        }

        return prevLvlHashes[0];
    }

    /**
     * Returns the hexadecimal representation of the input byte array
     */
    public static String toHex(byte[] data) {
        StringBuilder sb = new StringBuilder(data.length * 2);
        for (byte datum : data) {
            String hex = Integer.toHexString(datum & 0xFF);

            if (hex.length() == 1) {
                // Append leading zero.
                sb.append("0");
            }
            sb.append(hex);
        }
        return sb.toString().toLowerCase();
    }
}
```

- Untuk detail API, lihat UploadArchivedi Referensi AWS SDK for Java 2.x API.

# AWS Glue contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS Glue.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


# Memulai

## Halo AWS Glue

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS Glue.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
package com.example.glue;

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.glue.GlueClient;
import software.amazon.awssdk.services.glue.model.ListJobsRequest;
import software.amazon.awssdk.services.glue.model.ListJobsResponse;
import java.util.List;

public class HelloGlue {
    public static void main(String[] args) {
        GlueClient glueClient = GlueClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listJobs(glueClient);
    }

    public static void listJobs(GlueClient glueClient) {
        ListJobsRequest request = ListJobsRequest.builder()
                .maxResults(10)
                .build();
```

```
        ListJobsResponse response = glueClient.listJobs(request);
        List<String> jobList = response.jobNames();
        jobList.forEach(job -> {
            System.out.println("Job Name: " + job);
        });
    }
}
```

- Untuk detail API, lihat ListJobsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat crawler yang merayapi bucket Amazon S3 publik dan membuat database metadata berformat CSV.
- Daftar informasi tentang database dan tabel di Anda AWS Glue Data Catalog.
- Buat pekerjaan untuk mengekstrak data CSV dari bucket S3, mengubah data, dan memuat output berformat JSON ke bucket S3 lain.
- Buat daftar informasi tentang menjalankan pekerjaan, melihat data yang diubah, dan membersihkan sumber daya.

Untuk informasi selengkapnya, lihat Tutorial: Memulai AWS Glue Studio.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 * <p>
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * To set up the resources, see this documentation topic:
 *
 * https://docs.aws.amazon.com/glue/latest/ug/tutorial-add-crawler.html
 *
 * This example performs the following tasks:
 *
 * 1. Create a database.
 * 2. Create a crawler.
 * 3. Get a crawler.
 * 4. Start a crawler.
 * 5. Get a database.
 * 6. Get tables.
 * 7. Create a job.
 * 8. Start a job run.
 * 9. List all jobs.
 * 10. Get job runs.
 * 11. Delete a job.
 * 12. Delete a database.
 * 13. Delete a crawler.
 */

public class GlueScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = """

            Usage:
                <iam> <s3Path> <cron> <dbName> <crawlerName> <jobName>
 <scriptLocation> <locationUri> <bucketNameSc>\s

            Where:
                iam - The ARN of the IAM role that has AWS Glue and S3 permissions.
\s
                s3Path - The Amazon Simple Storage Service (Amazon S3) target that
 contains data (for example, s3://<bucket name>/read).
                cron - A cron expression used to specify the schedule  (i.e.,
 cron(15 12 * * ? *).
                dbName - The database name.\s
```

```
                crawlerName - The name of the crawler.\s
                jobName - The name you assign to this job definition.
                scriptLocation - The Amazon S3 path to a script that runs a job.
                locationUri - The location of the database (you can find this file
in resources folder).
                bucketNameSc - The Amazon S3 bucket name used when creating a job
                """;

        if (args.length != 9) {
            System.out.println(usage);
            return;
        }
        Scanner scanner = new Scanner(System.in);
        String iam = args[0];
        String s3Path = args[1];
        String cron = args[2];
        String dbName = args[3];
        String crawlerName = args[4];
        String jobName = args[5];
        String scriptLocation = args[6];
        String locationUri = args[7];
        String bucketNameSc = args[8];

        Region region = Region.US_EAST_1;
        GlueClient glueClient = GlueClient.builder()
            .region(region)
            .build();
        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Glue scenario.");
        System.out.println("""
            AWS Glue is a fully managed extract, transform, and load (ETL) service
provided by Amazon
            Web Services (AWS). It is designed to simplify the process of building,
running, and maintaining
            ETL pipelines, which are essential for data integration and data
warehousing tasks.

            One of the key features of AWS Glue is its ability to automatically
discover and catalog data
            stored in various sources, such as Amazon S3, Amazon RDS, Amazon
Redshift, and other databases.
            This cataloging process creates a central metadata repository, known as
the AWS Glue Data Catalog,
```

```
            which provides a unified view of an organization's data assets. This
metadata can then be used to
            create ETL jobs, which can be scheduled and run on-demand or on a
regular basis.

            Lets get started.

            """);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a database.");
        try {
            createDatabase(glueClient, dbName, locationUri);
        } catch (GlueException e) {
            if (e.awsErrorDetails().errorMessage().equals("Database already
exists.")) {
                System.out.println("Database " + dbName + " already exists. Skipping
creation.");
            } else {
                System.err.println(e.awsErrorDetails().errorMessage());
                return;
            }
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a crawler.");
        try {
            createGlueCrawler(glueClient, iam, s3Path, cron, dbName, crawlerName);
        } catch (GlueException e) {
            if (e.awsErrorDetails().errorMessage().contains("already exists")) {
                System.out.println("Crawler " + crawlerName + " already exists.
Skipping creation.");
            } else {
                System.err.println(e.awsErrorDetails().errorMessage());
                System.exit(1);
            }
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("3. Get a crawler.");
        try {
            getSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Start a crawler.");
        try {
            startSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Get a database.");
        try {
            getSpecificDatabase(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Wait 5 min for the tables to become available");
        TimeUnit.MINUTES.sleep(5);
        System.out.println("6. Get tables.");
        String myTableName;
        try {
            myTableName = getGlueTables(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
```

```
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Create a job.");
        try {
            createJob(glueClient, jobName, iam, scriptLocation);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Start a Job run.");
        try {
            startJob(glueClient, jobName, dbName, myTableName, bucketNameSc);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. List all jobs.");
        try {
            getAllJobs(glueClient);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get job runs.");
        try {
            getJobRuns(glueClient, jobName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
```

```
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete a job.");
        try {
            deleteJob(glueClient, jobName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        System.out.println("*** Wait 5 MIN for the " + crawlerName + " to stop");
        TimeUnit.MINUTES.sleep(5);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Delete a database.");
        try {
            deleteDatabase(glueClient, dbName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Delete a crawler.");
        try {
            deleteSpecificCrawler(glueClient, crawlerName);
        } catch (GlueException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Successfully completed the AWS Glue Scenario");
        System.out.println(DASHES);
    }
```

```
   /**
    * Creates a Glue database with the specified name and location URI.
    *
    * @param glueClient  The Glue client to use for the database creation.
    * @param dbName      The name of the database to create.
    * @param locationUri The location URI for the database.
    */
   public static void createDatabase(GlueClient glueClient, String dbName, String
locationUri) {
       try {
           DatabaseInput input = DatabaseInput.builder()
               .description("Built with the AWS SDK for Java V2")
               .name(dbName)
               .locationUri(locationUri)
               .build();

           CreateDatabaseRequest request = CreateDatabaseRequest.builder()
               .databaseInput(input)
               .build();

           glueClient.createDatabase(request);
           System.out.println(dbName + " was successfully created");

       } catch (GlueException e) {
           throw e;
       }
   }


   /**
    * Creates a new AWS Glue crawler using the AWS Glue Java API.
    *
    * @param glueClient  the AWS Glue client used to interact with the AWS Glue
service
    * @param iam         the IAM role that the crawler will use to access the data
source
    * @param s3Path      the S3 path that the crawler will scan for data
    * @param cron        the cron expression that defines the crawler's schedule
    * @param dbName      the name of the AWS Glue database where the crawler will
store the metadata
    * @param crawlerName the name of the crawler to be created
    */
   public static void createGlueCrawler(GlueClient glueClient,
```

```
                                        String iam,
                                        String s3Path,
                                        String cron,
                                        String dbName,
                                        String crawlerName) {

        try {
            S3Target s3Target = S3Target.builder()
                .path(s3Path)
                .build();

            List<S3Target> targetList = new ArrayList<>();
            targetList.add(s3Target);
            CrawlerTargets targets = CrawlerTargets.builder()
                .s3Targets(targetList)
                .build();

            CreateCrawlerRequest crawlerRequest = CreateCrawlerRequest.builder()
                .databaseName(dbName)
                .name(crawlerName)
                .description("Created by the AWS Glue Java API")
                .targets(targets)
                .role(iam)
                .schedule(cron)
                .build();

            glueClient.createCrawler(crawlerRequest);
            System.out.println(crawlerName + " was successfully created");

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
     * Retrieves a specific crawler from the AWS Glue service and waits for it to be
in the "READY" state.
     *
     * @param glueClient  the AWS Glue client used to interact with the Glue service
     * @param crawlerName the name of the crawler to be retrieved
     */
    public static void getSpecificCrawler(GlueClient glueClient, String crawlerName)
throws InterruptedException {
        try {
```

```
            GetCrawlerRequest crawlerRequest = GetCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            boolean ready = false;
            while (!ready) {
                GetCrawlerResponse response = glueClient.getCrawler(crawlerRequest);
                String status = response.crawler().stateAsString();
                if (status.compareTo("READY") == 0) {
                    ready = true;
                }
                Thread.sleep(3000);
            }

            System.out.println("The crawler is now ready");

        } catch (GlueException | InterruptedException e) {
            throw e;
        }
    }

    /**
     * Starts a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client to use for the crawler operation
     * @param crawlerName the name of the crawler to start
     * @throws GlueException if there is an error starting the crawler
     */
    public static void startSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
            StartCrawlerRequest crawlerRequest = StartCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.startCrawler(crawlerRequest);
            System.out.println(crawlerName + " was successfully started!");

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
```

```
    * Retrieves the specific database from the AWS Glue service.
    *
    * @param glueClient   an instance of the AWS Glue client used to interact with
the service
    * @param databaseName the name of the database to retrieve
    * @throws GlueException if there is an error retrieving the database from the
AWS Glue service
    */
   public static void getSpecificDatabase(GlueClient glueClient, String
databaseName) {
       try {
           GetDatabaseRequest databasesRequest = GetDatabaseRequest.builder()
               .name(databaseName)
               .build();

           GetDatabaseResponse response = glueClient.getDatabase(databasesRequest);
           Instant createDate = response.database().createTime();

           // Convert the Instant to readable date.
           DateTimeFormatter formatter =
DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
               .withLocale(Locale.US)
               .withZone(ZoneId.systemDefault());

           formatter.format(createDate);
           System.out.println("The create date of the database is " + createDate);

       } catch (GlueException e) {
           throw e;
       }
   }


   /**
    * Retrieves the names of the tables in the specified Glue database.
    *
    * @param glueClient the Glue client to use for the operation
    * @param dbName     the name of the Glue database to retrieve the table names
from
    * @return the name of the first table retrieved, or an empty string if no
tables were found
    */
   public static String getGlueTables(GlueClient glueClient, String dbName) {
       String myTableName = "";
```

```
        try {
            GetTablesRequest tableRequest = GetTablesRequest.builder()
                .databaseName(dbName)
                .build();

            GetTablesResponse response = glueClient.getTables(tableRequest);
            List<Table> tables = response.tableList();
            if (tables.isEmpty()) {
                System.out.println("No tables were returned");
            } else {
                for (Table table : tables) {
                    myTableName = table.name();
                    System.out.println("Table name is: " + myTableName);
                }
            }

        } catch (GlueException e) {
            throw e;
        }
        return myTableName;
    }


    /**
     * Starts a job run in AWS Glue.
     *
     * @param glueClient    the AWS Glue client to use for the job run
     * @param jobName       the name of the Glue job to run
     * @param inputDatabase the name of the input database
     * @param inputTable    the name of the input table
     * @param outBucket     the URL of the output S3 bucket
     * @throws GlueException if there is an error starting the job run
     */
    public static void startJob(GlueClient glueClient, String jobName, String
inputDatabase, String inputTable,
                                String outBucket) {
        try {
            Map<String, String> myMap = new HashMap<>();
            myMap.put("--input_database", inputDatabase);
            myMap.put("--input_table", inputTable);
            myMap.put("--output_bucket_url", outBucket);

            StartJobRunRequest runRequest = StartJobRunRequest.builder()
                .workerType(WorkerType.G_1_X)
```

```
                .numberOfWorkers(10)
                .arguments(myMap)
                .jobName(jobName)
                .build();

            StartJobRunResponse response = glueClient.startJobRun(runRequest);
            System.out.println("The request Id of the job is " +
response.responseMetadata().requestId());

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
     * Creates a new AWS Glue job.
     *
     * @param glueClient     the AWS Glue client to use for the operation
     * @param jobName        the name of the job to create
     * @param iam            the IAM role to associate with the job
     * @param scriptLocation the location of the script to be used by the job
     * @throws GlueException if there is an error creating the job
     */
    public static void createJob(GlueClient glueClient, String jobName, String iam,
String scriptLocation) {
        try {
            JobCommand command = JobCommand.builder()
                .pythonVersion("3")
                .name("glueetl")
                .scriptLocation(scriptLocation)
                .build();

            CreateJobRequest jobRequest = CreateJobRequest.builder()
                .description("A Job created by using the AWS SDK for Java V2")
                .glueVersion("2.0")
                .workerType(WorkerType.G_1_X)
                .numberOfWorkers(10)
                .name(jobName)
                .role(iam)
                .command(command)
                .build();

            glueClient.createJob(jobRequest);
```

```
            System.out.println(jobName + " was successfully created.");

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
     * Retrieves and prints information about all the jobs in the Glue data catalog.
     *
     * @param glueClient the Glue client used to interact with the AWS Glue service
     */
    public static void getAllJobs(GlueClient glueClient) {
        try {
            GetJobsRequest jobsRequest = GetJobsRequest.builder()
                .maxResults(10)
                .build();

            GetJobsResponse jobsResponse = glueClient.getJobs(jobsRequest);
            List<Job> jobs = jobsResponse.jobs();
            for (Job job : jobs) {
                System.out.println("Job name is : " + job.name());
                System.out.println("The job worker type is : " +
job.workerType().name());
            }

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
     * Retrieves the job runs for a given Glue job and prints the status of the job
runs.
     *
     * @param glueClient the Glue client used to make API calls
     * @param jobName    the name of the Glue job to retrieve the job runs for
     */
    public static void getJobRuns(GlueClient glueClient, String jobName) {
        try {
            GetJobRunsRequest runsRequest = GetJobRunsRequest.builder()
                .jobName(jobName)
                .maxResults(20)
```

```
                .build();

            boolean jobDone = false;
            while (!jobDone) {
                GetJobRunsResponse response = glueClient.getJobRuns(runsRequest);
                List<JobRun> jobRuns = response.jobRuns();
                for (JobRun jobRun : jobRuns) {
                    String jobState = jobRun.jobRunState().name();
                    if (jobState.compareTo("SUCCEEDED") == 0) {
                        System.out.println(jobName + " has succeeded");
                        jobDone = true;

                    } else if (jobState.compareTo("STOPPED") == 0) {
                        System.out.println("Job run has stopped");
                        jobDone = true;

                    } else if (jobState.compareTo("FAILED") == 0) {
                        System.out.println("Job run has failed");
                        jobDone = true;

                    } else if (jobState.compareTo("TIMEOUT") == 0) {
                        System.out.println("Job run has timed out");
                        jobDone = true;

                    } else {
                        System.out.println("*** Job run state is " +
jobRun.jobRunState().name());
                        System.out.println("Job run Id is " + jobRun.id());
                        System.out.println("The Glue version is " +
jobRun.glueVersion());
                    }
                    TimeUnit.SECONDS.sleep(5);
                }
            }

        } catch (GlueException e) {
            throw e;
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
    }


    /**
```

```
     * Deletes a Glue job.
     *
     * @param glueClient the Glue client to use for the operation
     * @param jobName    the name of the job to be deleted
     * @throws GlueException if there is an error deleting the job
     */
    public static void deleteJob(GlueClient glueClient, String jobName) {
        try {
            DeleteJobRequest jobRequest = DeleteJobRequest.builder()
                .jobName(jobName)
                .build();

            glueClient.deleteJob(jobRequest);
            System.out.println(jobName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }

    /**
     * Deletes a AWS Glue Database.
     *
     * @param glueClient   An instance of the AWS Glue client used to interact with
the AWS Glue service.
     * @param databaseName The name of the database to be deleted.
     * @throws GlueException If an error occurs while deleting the database.
     */
    public static void deleteDatabase(GlueClient glueClient, String databaseName) {
        try {
            DeleteDatabaseRequest request = DeleteDatabaseRequest.builder()
                .name(databaseName)
                .build();

            glueClient.deleteDatabase(request);
            System.out.println(databaseName + " was successfully deleted");

        } catch (GlueException e) {
            throw e;
        }
    }


    /**
```

```
     * Deletes a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client object
     * @param crawlerName the name of the crawler to be deleted
     * @throws GlueException if an error occurs during the deletion process
     */
    public static void deleteSpecificCrawler(GlueClient glueClient, String
 crawlerName) {
        try {
            DeleteCrawlerRequest deleteCrawlerRequest =
 DeleteCrawlerRequest.builder()
                .name(crawlerName)
                .build();

            glueClient.deleteCrawler(deleteCrawlerRequest);
            System.out.println(crawlerName + " was deleted");

        } catch (GlueException e) {
            throw e;
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateCrawler

- CreateJob
- DeleteCrawler
- DeleteDatabase
- DeleteJob
- DeleteTable
- GetCrawler
- GetDatabase
- GetDatabases
- GetJob
- GetJobRun
- GetJobRuns
- GetTables
- ListJobs
- StartCrawler
- StartJobRun

## Tindakan

### `CreateCrawler`

Contoh kode berikut menunjukkan cara menggunakan`CreateCrawler`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Creates a new AWS Glue crawler using the AWS Glue Java API.
 *
```

```
    * @param glueClient  the AWS Glue client used to interact with the AWS Glue
service
    * @param iam         the IAM role that the crawler will use to access the data
source
    * @param s3Path      the S3 path that the crawler will scan for data
    * @param cron        the cron expression that defines the crawler's schedule
    * @param dbName      the name of the AWS Glue database where the crawler will
store the metadata
    * @param crawlerName the name of the crawler to be created
    */
   public static void createGlueCrawler(GlueClient glueClient,
                                        String iam,
                                        String s3Path,
                                        String cron,
                                        String dbName,
                                        String crawlerName) {

       try {
           S3Target s3Target = S3Target.builder()
               .path(s3Path)
               .build();

           List<S3Target> targetList = new ArrayList<>();
           targetList.add(s3Target);
           CrawlerTargets targets = CrawlerTargets.builder()
               .s3Targets(targetList)
               .build();

           CreateCrawlerRequest crawlerRequest = CreateCrawlerRequest.builder()
               .databaseName(dbName)
               .name(crawlerName)
               .description("Created by the AWS Glue Java API")
               .targets(targets)
               .role(iam)
               .schedule(cron)
               .build();

           glueClient.createCrawler(crawlerRequest);
           System.out.println(crawlerName + " was successfully created");

       } catch (GlueException e) {
           throw e;
       }
   }
```

- Untuk detail API, lihat CreateCrawlerdi Referensi AWS SDK for Java 2.x API.

### `CreateJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new AWS Glue job.
    *
    * @param glueClient     the AWS Glue client to use for the operation
    * @param jobName        the name of the job to create
    * @param iam            the IAM role to associate with the job
    * @param scriptLocation the location of the script to be used by the job
    * @throws GlueException if there is an error creating the job
    */
   public static void createJob(GlueClient glueClient, String jobName, String iam,
String scriptLocation) {
       try {
           JobCommand command = JobCommand.builder()
               .pythonVersion("3")
               .name("glueetl")
               .scriptLocation(scriptLocation)
               .build();

           CreateJobRequest jobRequest = CreateJobRequest.builder()
               .description("A Job created by using the AWS SDK for Java V2")
               .glueVersion("2.0")
               .workerType(WorkerType.G_1_X)
               .numberOfWorkers(10)
               .name(jobName)
```

```
                .role(iam)
                .command(command)
                .build();

            glueClient.createJob(jobRequest);
            System.out.println(jobName + " was successfully created.");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Untuk detail API, lihat CreateJobdi Referensi AWS SDK for Java 2.x API.

### `DeleteCrawler`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCrawler`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a specific AWS Glue crawler.
     *
     * @param glueClient  the AWS Glue client object
     * @param crawlerName the name of the crawler to be deleted
     * @throws GlueException if an error occurs during the deletion process
     */
    public static void deleteSpecificCrawler(GlueClient glueClient, String
crawlerName) {
        try {
            DeleteCrawlerRequest deleteCrawlerRequest =
DeleteCrawlerRequest.builder()
                .name(crawlerName)
                .build();
```

```
            glueClient.deleteCrawler(deleteCrawlerRequest);
            System.out.println(crawlerName + " was deleted");

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteCrawlerdi Referensi AWS SDK for Java 2.x API.

### `DeleteDatabase`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDatabase`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a AWS Glue Database.
     *
     * @param glueClient   An instance of the AWS Glue client used to interact with
the AWS Glue service.
     * @param databaseName The name of the database to be deleted.
     * @throws GlueException If an error occurs while deleting the database.
     */
    public static void deleteDatabase(GlueClient glueClient, String databaseName) {
        try {
            DeleteDatabaseRequest request = DeleteDatabaseRequest.builder()
                .name(databaseName)
                .build();

            glueClient.deleteDatabase(request);
            System.out.println(databaseName + " was successfully deleted");

        } catch (GlueException e) {
```

```
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteDatabasedi Referensi AWS SDK for Java 2.x API.

### `DeleteJob`

Contoh kode berikut menunjukkan cara menggunakan`DeleteJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Deletes a Glue job.
 *
 * @param glueClient the Glue client to use for the operation
 * @param jobName    the name of the job to be deleted
 * @throws GlueException if there is an error deleting the job
 */
public static void deleteJob(GlueClient glueClient, String jobName) {
    try {
        DeleteJobRequest jobRequest = DeleteJobRequest.builder()
            .jobName(jobName)
            .build();

        glueClient.deleteJob(jobRequest);
        System.out.println(jobName + " was successfully deleted");

    } catch (GlueException e) {
        throw e;
    }
}
```

- Untuk detail API, lihat DeleteJobdi Referensi AWS SDK for Java 2.x API.

### `GetCrawler`

Contoh kode berikut menunjukkan cara menggunakan`GetCrawler`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves a specific crawler from the AWS Glue service and waits for it to be
in the "READY" state.
    *
    * @param glueClient  the AWS Glue client used to interact with the Glue service
    * @param crawlerName the name of the crawler to be retrieved
    */
   public static void getSpecificCrawler(GlueClient glueClient, String crawlerName)
throws InterruptedException {
       try {
           GetCrawlerRequest crawlerRequest = GetCrawlerRequest.builder()
               .name(crawlerName)
               .build();

           boolean ready = false;
           while (!ready) {
               GetCrawlerResponse response = glueClient.getCrawler(crawlerRequest);
               String status = response.crawler().stateAsString();
               if (status.compareTo("READY") == 0) {
                   ready = true;
               }
               Thread.sleep(3000);
           }

           System.out.println("The crawler is now ready");

       } catch (GlueException | InterruptedException e) {
           throw e;
```

```
        }
    }
```

- Untuk detail API, lihat GetCrawlerdi Referensi AWS SDK for Java 2.x API.

### `GetDatabase`

Contoh kode berikut menunjukkan cara menggunakan`GetDatabase`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the specific database from the AWS Glue service.
     *
     * @param glueClient   an instance of the AWS Glue client used to interact with
the service
     * @param databaseName the name of the database to retrieve
     * @throws GlueException if there is an error retrieving the database from the
AWS Glue service
     */
    public static void getSpecificDatabase(GlueClient glueClient, String
databaseName) {
        try {
            GetDatabaseRequest databasesRequest = GetDatabaseRequest.builder()
                .name(databaseName)
                .build();

            GetDatabaseResponse response = glueClient.getDatabase(databasesRequest);
            Instant createDate = response.database().createTime();

            // Convert the Instant to readable date.
            DateTimeFormatter formatter =
DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
                .withLocale(Locale.US)
```

```
                .withZone(ZoneId.systemDefault());

            formatter.format(createDate);
            System.out.println("The create date of the database is " + createDate);

        } catch (GlueException e) {
            throw e;
        }
    }
```

- Untuk detail API, lihat GetDatabasedi Referensi AWS SDK for Java 2.x API.

### `GetJobRuns`

Contoh kode berikut menunjukkan cara menggunakan`GetJobRuns`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the job runs for a given Glue job and prints the status of the job
runs.
     *
     * @param glueClient the Glue client used to make API calls
     * @param jobName    the name of the Glue job to retrieve the job runs for
     */
    public static void getJobRuns(GlueClient glueClient, String jobName) {
        try {
            GetJobRunsRequest runsRequest = GetJobRunsRequest.builder()
                .jobName(jobName)
                .maxResults(20)
                .build();

            boolean jobDone = false;
            while (!jobDone) {
                GetJobRunsResponse response = glueClient.getJobRuns(runsRequest);
```

```
                List<JobRun> jobRuns = response.jobRuns();
                for (JobRun jobRun : jobRuns) {
                    String jobState = jobRun.jobRunState().name();
                    if (jobState.compareTo("SUCCEEDED") == 0) {
                        System.out.println(jobName + " has succeeded");
                        jobDone = true;

                    } else if (jobState.compareTo("STOPPED") == 0) {
                        System.out.println("Job run has stopped");
                        jobDone = true;

                    } else if (jobState.compareTo("FAILED") == 0) {
                        System.out.println("Job run has failed");
                        jobDone = true;

                    } else if (jobState.compareTo("TIMEOUT") == 0) {
                        System.out.println("Job run has timed out");
                        jobDone = true;

                    } else {
                        System.out.println("*** Job run state is " +
jobRun.jobRunState().name());
                        System.out.println("Job run Id is " + jobRun.id());
                        System.out.println("The Glue version is " +
jobRun.glueVersion());
                    }
                    TimeUnit.SECONDS.sleep(5);
                }
            }

        } catch (GlueException e) {
            throw e;
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat GetJobRunsdi Referensi AWS SDK for Java 2.x API.

### `GetTables`

Contoh kode berikut menunjukkan cara menggunakan`GetTables`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves the names of the tables in the specified Glue database.
    *
    * @param glueClient the Glue client to use for the operation
    * @param dbName     the name of the Glue database to retrieve the table names
from
    * @return the name of the first table retrieved, or an empty string if no
tables were found
    */
   public static String getGlueTables(GlueClient glueClient, String dbName) {
       String myTableName = "";
       try {
           GetTablesRequest tableRequest = GetTablesRequest.builder()
               .databaseName(dbName)
               .build();

           GetTablesResponse response = glueClient.getTables(tableRequest);
           List<Table> tables = response.tableList();
           if (tables.isEmpty()) {
               System.out.println("No tables were returned");
           } else {
               for (Table table : tables) {
                   myTableName = table.name();
                   System.out.println("Table name is: " + myTableName);
               }
           }

       } catch (GlueException e) {
           throw e;
       }
       return myTableName;
   }
```

- Untuk detail API, lihat GetTablesdi Referensi AWS SDK for Java 2.x API.

### `StartCrawler`

Contoh kode berikut menunjukkan cara menggunakan`StartCrawler`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Starts a specific AWS Glue crawler.
    *
    * @param glueClient  the AWS Glue client to use for the crawler operation
    * @param crawlerName the name of the crawler to start
    * @throws GlueException if there is an error starting the crawler
    */
   public static void startSpecificCrawler(GlueClient glueClient, String
crawlerName) {
       try {
           StartCrawlerRequest crawlerRequest = StartCrawlerRequest.builder()
               .name(crawlerName)
               .build();

           glueClient.startCrawler(crawlerRequest);
           System.out.println(crawlerName + " was successfully started!");

       } catch (GlueException e) {
           throw e;
       }
   }
```

- Untuk detail API, lihat StartCrawlerdi Referensi AWS SDK for Java 2.x API.

### `StartJobRun`

Contoh kode berikut menunjukkan cara menggunakan`StartJobRun`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Starts a job run in AWS Glue.
    *
    * @param glueClient    the AWS Glue client to use for the job run
    * @param jobName       the name of the Glue job to run
    * @param inputDatabase the name of the input database
    * @param inputTable    the name of the input table
    * @param outBucket     the URL of the output S3 bucket
    * @throws GlueException if there is an error starting the job run
    */
   public static void startJob(GlueClient glueClient, String jobName, String
inputDatabase, String inputTable,
                               String outBucket) {
       try {
           Map<String, String> myMap = new HashMap<>();
           myMap.put("--input_database", inputDatabase);
           myMap.put("--input_table", inputTable);
           myMap.put("--output_bucket_url", outBucket);

           StartJobRunRequest runRequest = StartJobRunRequest.builder()
               .workerType(WorkerType.G_1_X)
               .numberOfWorkers(10)
               .arguments(myMap)
               .jobName(jobName)
               .build();

           StartJobRunResponse response = glueClient.startJobRun(runRequest);
           System.out.println("The request Id of the job is " +
response.responseMetadata().requestId());
```

```
        } catch (GlueException e) {
            throw e;
        }
    }
```

- Untuk detail API, lihat StartJobRundi Referensi AWS SDK for Java 2.x API.

# HealthImaging contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with HealthImaging.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario

## Tindakan

### `CopyImageSet`

Contoh kode berikut menunjukkan cara menggunakan`CopyImageSet`.

SDK untuk Java 2.x

```
/**
 * Copy an AWS HealthImaging image set.
 *
```

```
    * @param medicalImagingClient  - The AWS HealthImaging client object.
    * @param datastoreId           - The datastore ID.
    * @param imageSetId            - The image set ID.
    * @param latestVersionId       - The version ID.
    * @param destinationImageSetId - The optional destination image set ID, ignored
if null.
    * @param destinationVersionId  - The optional destination version ID, ignored
if null.
    * @param force                 - The force flag.
    * @param subsets               - The optional subsets to copy, ignored if null.
    * @return                      - The image set ID of the copy.
    * @throws MedicalImagingException - Base exception for all service exceptions
thrown by AWS HealthImaging.
    */
   public static String copyMedicalImageSet(MedicalImagingClient
medicalImagingClient,
                                            String datastoreId,
                                            String imageSetId,
                                            String latestVersionId,
                                            String destinationImageSetId,
                                            String destinationVersionId,
                                            boolean force,
                                            Vector<String> subsets) {

       try {
           CopySourceImageSetInformation.Builder copySourceImageSetInformation =
CopySourceImageSetInformation.builder()
                   .latestVersionId(latestVersionId);

           // Optionally copy a subset of image instances.
           if (subsets != null) {
               String subsetInstanceToCopy = getCopiableAttributesJSON(imageSetId,
subsets);
               copySourceImageSetInformation.dicomCopies(MetadataCopies.builder()
                       .copiableAttributes(subsetInstanceToCopy)
                       .build());
           }

           CopyImageSetInformation.Builder copyImageSetBuilder =
CopyImageSetInformation.builder()
                   .sourceImageSet(copySourceImageSetInformation.build());

           // Optionally designate a destination image set.
           if (destinationImageSetId != null) {
```

```
                copyImageSetBuilder =
copyImageSetBuilder.destinationImageSet(CopyDestinationImageSet.builder()
                        .imageSetId(destinationImageSetId)
                        .latestVersionId(destinationVersionId)
                        .build());
            }

            CopyImageSetRequest copyImageSetRequest = CopyImageSetRequest.builder()
                    .datastoreId(datastoreId)
                    .sourceImageSetId(imageSetId)
                    .copyImageSetInformation(copyImageSetBuilder.build())
                    .force(force)
                    .build();

            CopyImageSetResponse response =
medicalImagingClient.copyImageSet(copyImageSetRequest);

            return response.destinationImageSetProperties().imageSetId();
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            throw e;
        }
    }
```

Fungsi utilitas untuk membuat atribut yang dapat disalin.

```
    /**
     * Create a JSON string of copiable image instances.
     *
     * @param imageSetId - The image set ID.
     * @param subsets    - The subsets to copy.
     * @return A JSON string of copiable image instances.
     */
    private static String getCopiableAttributesJSON(String imageSetId,
Vector<String> subsets) {
        StringBuilder subsetInstanceToCopy = new StringBuilder(
                """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "Series": {
```

```
                                "
                                 """
        );

        subsetInstanceToCopy.append(imageSetId);

        subsetInstanceToCopy.append(
                """
                                ": {
                                "Instances": {
                        """
        );

        for (String subset : subsets) {
            subsetInstanceToCopy.append('"' + subset + "\": {},");
        }
        subsetInstanceToCopy.deleteCharAt(subsetInstanceToCopy.length() - 1);
        subsetInstanceToCopy.append("""
                          }
                        }
                      }
                    }
                  }
                """);
        return subsetInstanceToCopy.toString();
    }
```

- Untuk detail API, lihat CopyImageSetdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `CreateDatastore`

Contoh kode berikut menunjukkan cara menggunakan`CreateDatastore`.

SDK untuk Java 2.x

```
   public static String createMedicalImageDatastore(MedicalImagingClient
medicalImagingClient,
           String datastoreName) {
       try {
           CreateDatastoreRequest datastoreRequest =
CreateDatastoreRequest.builder()
                   .datastoreName(datastoreName)
                   .build();
           CreateDatastoreResponse response =
medicalImagingClient.createDatastore(datastoreRequest);
           return response.datastoreId();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return "";
   }
```

- Untuk detail API, lihat CreateDatastoredi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `DeleteDatastore`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDatastore`.

SDK untuk Java 2.x

```
   public static void deleteMedicalImagingDatastore(MedicalImagingClient
medicalImagingClient,
           String datastoreID) {
       try {
           DeleteDatastoreRequest datastoreRequest =
DeleteDatastoreRequest.builder()
```

```
                    .datastoreId(datastoreID)
                    .build();
            medicalImagingClient.deleteDatastore(datastoreRequest);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DeleteDatastoredi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `DeleteImageSet`

Contoh kode berikut menunjukkan cara menggunakan`DeleteImageSet`.

SDK untuk Java 2.x

```
   public static void deleteMedicalImageSet(MedicalImagingClient
medicalImagingClient,
            String datastoreId,
            String imagesetId) {
        try {
            DeleteImageSetRequest deleteImageSetRequest =
DeleteImageSetRequest.builder()
                    .datastoreId(datastoreId)
                    .imageSetId(imagesetId)
                    .build();

            medicalImagingClient.deleteImageSet(deleteImageSetRequest);

            System.out.println("The image set was deleted.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
```

- Untuk detail API, lihat DeleteImageSetdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `GetDICOMImportJob`

Contoh kode berikut menunjukkan cara menggunakan`GetDICOMImportJob`.

SDK untuk Java 2.x

```
   public static DICOMImportJobProperties getDicomImportJob(MedicalImagingClient
medicalImagingClient,
           String datastoreId,
           String jobId) {

       try {
           GetDicomImportJobRequest getDicomImportJobRequest =
GetDicomImportJobRequest.builder()
                   .datastoreId(datastoreId)
                   .jobId(jobId)
                   .build();
           GetDicomImportJobResponse response =
medicalImagingClient.getDICOMImportJob(getDicomImportJobRequest);
           return response.jobProperties();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat Mendapatkan DICOMImport Job di Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `GetDatastore`

Contoh kode berikut menunjukkan cara menggunakan`GetDatastore`.

SDK untuk Java 2.x

```
   public static DatastoreProperties getMedicalImageDatastore(MedicalImagingClient
medicalImagingClient,
           String datastoreID) {
       try {
           GetDatastoreRequest datastoreRequest = GetDatastoreRequest.builder()
                   .datastoreId(datastoreID)
                   .build();
           GetDatastoreResponse response =
medicalImagingClient.getDatastore(datastoreRequest);
           return response.datastoreProperties();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat GetDatastoredi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `GetImageFrame`

Contoh kode berikut menunjukkan cara menggunakan`GetImageFrame`.

SDK untuk Java 2.x

```
       public static void getMedicalImageSetFrame(MedicalImagingClient
medicalImagingClient,
                        String destinationPath,
                        String datastoreId,
                        String imagesetId,
                        String imageFrameId) {

                try {
                        GetImageFrameRequest getImageSetMetadataRequest =
GetImageFrameRequest.builder()
                                        .datastoreId(datastoreId)
                                        .imageSetId(imagesetId)

.imageFrameInformation(ImageFrameInformation.builder()
                                                        .imageFrameId(imageFrameId)
                                                        .build())
                                        .build();

medicalImagingClient.getImageFrame(getImageSetMetadataRequest,

FileSystems.getDefault().getPath(destinationPath));

                        System.out.println("Image frame downloaded to " +
destinationPath);
                } catch (MedicalImagingException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
        }
```

- Untuk detail API, lihat GetImageFramedi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `GetImageSet`

Contoh kode berikut menunjukkan cara menggunakan`GetImageSet`.

SDK untuk Java 2.x

```
   public static GetImageSetResponse getMedicalImageSet(MedicalImagingClient
medicalImagingClient,
           String datastoreId,
           String imagesetId,
           String versionId) {
       try {
           GetImageSetRequest.Builder getImageSetRequestBuilder =
GetImageSetRequest.builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imagesetId);

           if (versionId != null) {
               getImageSetRequestBuilder =
getImageSetRequestBuilder.versionId(versionId);
           }

           return
medicalImagingClient.getImageSet(getImageSetRequestBuilder.build());
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat GetImageSetdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `GetImageSetMetadata`

Contoh kode berikut menunjukkan cara menggunakan`GetImageSetMetadata`.

SDK untuk Java 2.x

```
   public static void getMedicalImageSetMetadata(MedicalImagingClient
medicalImagingClient,
            String destinationPath,
            String datastoreId,
            String imagesetId,
            String versionId) {

        try {
            GetImageSetMetadataRequest.Builder getImageSetMetadataRequestBuilder =
GetImageSetMetadataRequest.builder()
                    .datastoreId(datastoreId)
                    .imageSetId(imagesetId);

            if (versionId != null) {
                getImageSetMetadataRequestBuilder =
getImageSetMetadataRequestBuilder.versionId(versionId);
            }


medicalImagingClient.getImageSetMetadata(getImageSetMetadataRequestBuilder.build(),
                    FileSystems.getDefault().getPath(destinationPath));

            System.out.println("Metadata downloaded to " + destinationPath);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat GetImageSetMetadatadi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `ListDICOMImportJobs`

Contoh kode berikut menunjukkan cara menggunakan`ListDICOMImportJobs`.

SDK untuk Java 2.x

```
   public static List<DICOMImportJobSummary>
listDicomImportJobs(MedicalImagingClient medicalImagingClient,
           String datastoreId) {

       try {
           ListDicomImportJobsRequest listDicomImportJobsRequest =
ListDicomImportJobsRequest.builder()
                   .datastoreId(datastoreId)
                   .build();
           ListDicomImportJobsResponse response =
medicalImagingClient.listDICOMImportJobs(listDicomImportJobsRequest);
           return response.jobSummaries();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return new ArrayList<>();
   }
```

- Untuk detail API, lihat Daftar DICOMImport Pekerjaan di Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `ListDatastores`

Contoh kode berikut menunjukkan cara menggunakan`ListDatastores`.

SDK untuk Java 2.x

```
   public static List<DatastoreSummary>
listMedicalImagingDatastores(MedicalImagingClient medicalImagingClient) {
       try {
           ListDatastoresRequest datastoreRequest = ListDatastoresRequest.builder()
                   .build();
           ListDatastoresIterable responses =
medicalImagingClient.listDatastoresPaginator(datastoreRequest);
           List<DatastoreSummary> datastoreSummaries = new ArrayList<>();

           responses.stream().forEach(response ->
datastoreSummaries.addAll(response.datastoreSummaries()));

           return datastoreSummaries;
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat ListDatastoresdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `ListImageSetVersions`

Contoh kode berikut menunjukkan cara menggunakan`ListImageSetVersions`.

SDK untuk Java 2.x

```
   public static List<ImageSetProperties>
listMedicalImageSetVersions(MedicalImagingClient medicalImagingClient,
           String datastoreId,
           String imagesetId) {
       try {
           ListImageSetVersionsRequest getImageSetRequest =
ListImageSetVersionsRequest.builder()
                   .datastoreId(datastoreId)
                   .imageSetId(imagesetId)
                   .build();

           ListImageSetVersionsIterable responses = medicalImagingClient
                   .listImageSetVersionsPaginator(getImageSetRequest);
           List<ImageSetProperties> imageSetProperties = new ArrayList<>();
           responses.stream().forEach(response ->
imageSetProperties.addAll(response.imageSetPropertiesList()));

           return imageSetProperties;
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat ListImageSetVersionsdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `ListTagsForResource`

Contoh kode berikut menunjukkan cara menggunakan`ListTagsForResource`.

SDK untuk Java 2.x

```
   public static ListTagsForResourceResponse
listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
           String resourceArn) {
       try {
           ListTagsForResourceRequest listTagsForResourceRequest =
ListTagsForResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .build();

           return
medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

- Untuk detail API, lihat ListTagsForResourcedi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `SearchImageSets`

Contoh kode berikut menunjukkan cara menggunakan`SearchImageSets`.

SDK untuk Java 2.x

Fungsi utilitas untuk mencari set gambar.

```
   public static List<ImageSetsMetadataSummary> searchMedicalImagingImageSets(
           MedicalImagingClient medicalImagingClient,
           String datastoreId, SearchCriteria searchCriteria) {
       try {
```

```
            SearchImageSetsRequest datastoreRequest =
SearchImageSetsRequest.builder()
                    .datastoreId(datastoreId)
                    .searchCriteria(searchCriteria)
                    .build();
            SearchImageSetsIterable responses = medicalImagingClient
                    .searchImageSetsPaginator(datastoreRequest);
            List<ImageSetsMetadataSummary> imageSetsMetadataSummaries = new
ArrayList<>();

            responses.stream().forEach(response -> imageSetsMetadataSummaries
                    .addAll(response.imageSetsMetadataSummaries()));

            return imageSetsMetadataSummaries;
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
```

Kasus penggunaan #1: operator EQUAL.

```
        List<SearchFilter> searchFilters =
Collections.singletonList(SearchFilter.builder()
                .operator(Operator.EQUAL)
                .values(SearchByAttributeValue.builder()
                        .dicomPatientId(patientId)
                        .build())
                .build());

        SearchCriteria searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .build();

        List<ImageSetsMetadataSummary> imageSetsMetadataSummaries =
searchMedicalImagingImageSets(
                medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets for patient " + patientId + " are:\n"
```

```
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

Kasus penggunaan #2: ANTARA operator menggunakan DICOMStudy Tanggal dan DICOMStudy Waktu.

```
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyyMMdd");
        searchFilters = Collections.singletonList(SearchFilter.builder()
                .operator(Operator.BETWEEN)
                .values(SearchByAttributeValue.builder()

.dicomStudyDateAndTime(DICOMStudyDateAndTime.builder()
                                        .dicomStudyDate("19990101")
                                        .dicomStudyTime("000000.000")
                                        .build())
                                .build(),
                        SearchByAttributeValue.builder()

.dicomStudyDateAndTime(DICOMStudyDateAndTime.builder()
                                        .dicomStudyDate((LocalDate.now()
                                                .format(formatter)))
                                        .dicomStudyTime("000000.000")
                                        .build())
                                .build())
                .build());

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .build();

        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println(
                    "The image sets searched with BETWEEN operator using
DICOMStudyDate and DICOMStudyTime are:\n"
                            +
                            imageSetsMetadataSummaries);
            System.out.println();
        }
```

Kasus penggunaan #3: ANTARA operator menggunakan createDat. Studi waktu sebelumnya bertahan.

```
        searchFilters = Collections.singletonList(SearchFilter.builder()
                .operator(Operator.BETWEEN)
                .values(SearchByAttributeValue.builder()
                                .createdAt(Instant.parse("1985-04-12T23:20:50.52Z"))
                                .build(),
                        SearchByAttributeValue.builder()
                                .createdAt(Instant.now())
                                .build())
                .build());

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .build();
        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets searched with BETWEEN operator using
createdAt are:\n "
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

Kasus penggunaan #4: Operator EQUAL di DICOMSeries InstanceUID dan BETWEEN di UpdateDAT dan mengurutkan respons dalam urutan ASC di bidang UpdateDAT.

```
        Instant startDate = Instant.parse("1985-04-12T23:20:50.52Z");
        Instant endDate = Instant.now();

        searchFilters = Arrays.asList(
                SearchFilter.builder()
                        .operator(Operator.EQUAL)
                        .values(SearchByAttributeValue.builder()
                                .dicomSeriesInstanceUID(seriesInstanceUID)
                                .build())
                        .build(),
```

```
                SearchFilter.builder()
                        .operator(Operator.BETWEEN)
                        .values(

SearchByAttributeValue.builder().updatedAt(startDate).build(),

SearchByAttributeValue.builder().updatedAt(endDate).build()
                        ).build());

        Sort sort =
Sort.builder().sortOrder(SortOrder.ASC).sortField(SortField.UPDATED_AT).build();

        searchCriteria = SearchCriteria.builder()
                .filters(searchFilters)
                .sort(sort)
                .build();

        imageSetsMetadataSummaries =
searchMedicalImagingImageSets(medicalImagingClient,
                datastoreId, searchCriteria);
        if (imageSetsMetadataSummaries != null) {
            System.out.println("The image sets searched with EQUAL operator on
DICOMSeriesInstanceUID and BETWEEN on updatedAt and sort response\n" +
                    "in ASC order on updatedAt field are:\n "
                    + imageSetsMetadataSummaries);
            System.out.println();
        }
```

- Untuk detail API, lihat SearchImageSetsdi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `StartDICOMImportJob`

Contoh kode berikut menunjukkan cara menggunakan`StartDICOMImportJob`.

SDK untuk Java 2.x

```
   public static String startDicomImportJob(MedicalImagingClient
medicalImagingClient,
           String jobName,
           String datastoreId,
           String dataAccessRoleArn,
           String inputS3Uri,
           String outputS3Uri) {

       try {
           StartDicomImportJobRequest startDicomImportJobRequest =
StartDicomImportJobRequest.builder()
                   .jobName(jobName)
                   .datastoreId(datastoreId)
                   .dataAccessRoleArn(dataAccessRoleArn)
                   .inputS3Uri(inputS3Uri)
                   .outputS3Uri(outputS3Uri)
                   .build();
           StartDicomImportJobResponse response =
medicalImagingClient.startDICOMImportJob(startDicomImportJobRequest);
           return response.jobId();
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return "";
   }
```

- Untuk detail API, lihat Memulai DICOMImport Job di Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `TagResource`

Contoh kode berikut menunjukkan cara menggunakan`TagResource`.

SDK untuk Java 2.x

```
   public static void tagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Map<String, String> tags) {
       try {
           TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .tags(tags)
                   .build();

           medicalImagingClient.tagResource(tagResourceRequest);

           System.out.println("Tags have been added to the resource.");
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat TagResourcedi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `UntagResource`

Contoh kode berikut menunjukkan cara menggunakan`UntagResource`.

SDK untuk Java 2.x

```
   public static void untagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Collection<String> tagKeys) {
       try {
```

```
            UntagResourceRequest untagResourceRequest =
UntagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tagKeys(tagKeys)
                    .build();

            medicalImagingClient.untagResource(untagResourceRequest);

            System.out.println("Tags have been removed from the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat UntagResourcedi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

### `UpdateImageSetMetadata`

Contoh kode berikut menunjukkan cara menggunakan`UpdateImageSetMetadata`.

SDK untuk Java 2.x

```
    /**
     * Update the metadata of an AWS HealthImaging image set.
     *
     * @param medicalImagingClient - The AWS HealthImaging client object.
     * @param datastoreId          - The datastore ID.
     * @param imageSetId           - The image set ID.
     * @param versionId            - The version ID.
     * @param metadataUpdates      - A MetadataUpdates object containing the
updates.
     * @param force                - The force flag.
     * @throws MedicalImagingException - Base exception for all service exceptions
thrown by AWS HealthImaging.
```

```
     */
    public static void updateMedicalImageSetMetadata(MedicalImagingClient
medicalImagingClient,
                                                     String datastoreId,
                                                     String imageSetId,
                                                     String versionId,
                                                     MetadataUpdates
metadataUpdates,
                                                     boolean force) {
        try {
            UpdateImageSetMetadataRequest updateImageSetMetadataRequest =
UpdateImageSetMetadataRequest
                    .builder()
                    .datastoreId(datastoreId)
                    .imageSetId(imageSetId)
                    .latestVersionId(versionId)
                    .updateImageSetMetadataUpdates(metadataUpdates)
                    .force(force)
                    .build();

            UpdateImageSetMetadataResponse response =
medicalImagingClient.updateImageSetMetadata(updateImageSetMetadataRequest);

            System.out.println("The image set metadata was updated" + response);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            throw e;
        }
    }
```

Kasus penggunaan #1: Menyisipkan atau memperbarui atribut.

```
                final String insertAttributes = """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "DICOM": {
                              "StudyDescription": "CT CHEST"
                            }
                          }
                        }
                        """;
```

```
                MetadataUpdates metadataInsertUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .updatableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(insertAttributes
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();

                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataInsertUpdates, force);
```

Use case #2: Hapus atribut.

```
                final String removeAttributes = """
                        {
                          "SchemaVersion": 1.1,
                          "Study": {
                            "DICOM": {
                              "StudyDescription": "CT CHEST"
                            }
                          }
                        }
                        """;
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .removableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(removeAttributes
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();

                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

Use case #3: Hapus sebuah instance.

```
                final String removeInstance = """
                        {
                          "SchemaVersion": 1.1,
```

```
                        "Study": {
                          "Series": {
                            "1.1.1.1.1.1.12345.123456789012.123.12345678901234.1":
{
                              "Instances": {

"1.1.1.1.1.1.12345.123456789012.123.12345678901234.1": {}
                              }
                            }
                          }
                        }
                        """;
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .dicomUpdates(DICOMUpdates.builder()
                                .removableAttributes(SdkBytes.fromByteBuffer(
                                        ByteBuffer.wrap(removeInstance
                                                .getBytes(StandardCharsets.UTF_8))))
                                .build())
                        .build();

                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

Kasus penggunaan #4: Kembalikan ke versi sebelumnya.

```
                // In this case, revert to previous version.
                String revertVersionId =
Integer.toString(Integer.parseInt(versionid) - 1);
                MetadataUpdates metadataRemoveUpdates = MetadataUpdates.builder()
                        .revertToVersionId(revertVersionId)
                        .build();
                updateMedicalImageSetMetadata(medicalImagingClient, datastoreId,
imagesetId,
                        versionid, metadataRemoveUpdates, force);
```

- Untuk detail API, lihat UpdateImageSetMetadatadi Referensi AWS SDK for Java 2.x API.

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

## Skenario

Menandai penyimpanan data

Contoh kode berikut menunjukkan cara menandai penyimpanan HealthImaging data.

SDK untuk Java 2.x

Untuk menandai penyimpanan data.

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                TagResource.tagMedicalImagingResource(medicalImagingClient,
 datastoreArn,
                                ImmutableMap.of("Deployment", "Development"));
```

Fungsi utilitas untuk menandai sumber daya.

```
   public static void tagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
            String resourceArn,
            Map<String, String> tags) {
        try {
            TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tags(tags)
                    .build();

            medicalImagingClient.tagResource(tagResourceRequest);

            System.out.println("Tags have been added to the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
```

```
            System.exit(1);
        }
    }
```

Untuk daftar tag untuk penyimpanan data.

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                ListTagsForResourceResponse result =
 ListTagsForResource.listMedicalImagingResourceTags(
                                medicalImagingClient,
                                datastoreArn);
                if (result != null) {
                        System.out.println("Tags for resource: " + result.tags());
                }
```

Fungsi utilitas untuk daftar tag sumber daya.

```
    public static ListTagsForResourceResponse
 listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
            String resourceArn) {
        try {
            ListTagsForResourceRequest listTagsForResourceRequest =
 ListTagsForResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .build();

            return
 medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
```

Untuk menghapus tag penyimpanan data.

```
                final String datastoreArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012";

                UntagResource.untagMedicalImagingResource(medicalImagingClient,
 datastoreArn,
                                Collections.singletonList("Deployment"));
```

Fungsi utilitas untuk membuka tag sumber daya.

```
   public static void untagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
            String resourceArn,
            Collection<String> tagKeys) {
        try {
            UntagResourceRequest untagResourceRequest =
 UntagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tagKeys(tagKeys)
                    .build();

            medicalImagingClient.untagResource(untagResourceRequest);

            System.out.println("Tags have been removed from the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - ListTagsForResource
  - TagResource
  - UntagResource

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menandai set gambar

Contoh kode berikut menunjukkan cara menandai set HealthImaging gambar.

SDK untuk Java 2.x

Untuk menandai set gambar.

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";

                TagResource.tagMedicalImagingResource(medicalImagingClient,
 imageSetArn,
                                ImmutableMap.of("Deployment", "Development"));
```

Fungsi utilitas untuk menandai sumber daya.

```
    public static void tagMedicalImagingResource(MedicalImagingClient
 medicalImagingClient,
            String resourceArn,
            Map<String, String> tags) {
        try {
            TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                    .resourceArn(resourceArn)
                    .tags(tags)
                    .build();

            medicalImagingClient.tagResource(tagResourceRequest);

            System.out.println("Tags have been added to the resource.");
        } catch (MedicalImagingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Untuk mencantumkan tag untuk kumpulan gambar.

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";

                ListTagsForResourceResponse result =
 ListTagsForResource.listMedicalImagingResourceTags(
                                medicalImagingClient,
                                imageSetArn);
                if (result != null) {
                        System.out.println("Tags for resource: " + result.tags());
                }
```

Fungsi utilitas untuk daftar tag sumber daya.

```
   public static ListTagsForResourceResponse
 listMedicalImagingResourceTags(MedicalImagingClient medicalImagingClient,
           String resourceArn) {
       try {
           ListTagsForResourceRequest listTagsForResourceRequest =
 ListTagsForResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .build();

           return
 medicalImagingClient.listTagsForResource(listTagsForResourceRequest);
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }

       return null;
   }
```

Untuk menghapus tag set gambar.

```
                final String imageSetArn = "arn:aws:medical-imaging:us-
east-1:123456789012:datastore/12345678901234567890123456789012/
imageset/12345678901234567890123456789012";
```

```
                UntagResource.untagMedicalImagingResource(medicalImagingClient,
imageSetArn,
                                Collections.singletonList("Deployment"));
```

Fungsi utilitas untuk membuka tag sumber daya.

```
   public static void untagMedicalImagingResource(MedicalImagingClient
medicalImagingClient,
           String resourceArn,
           Collection<String> tagKeys) {
       try {
           UntagResourceRequest untagResourceRequest =
UntagResourceRequest.builder()
                   .resourceArn(resourceArn)
                   .tagKeys(tagKeys)
                   .build();

           medicalImagingClient.untagResource(untagResourceRequest);

           System.out.println("Tags have been removed from the resource.");
       } catch (MedicalImagingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - ListTagsForResource
  - TagResource
  - UntagResource

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

# Contoh IAM menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with IAM.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


## Memulai

Halo IAM

Contoh kode berikut menunjukkan bagaimana memulai menggunakan IAM.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.ListPoliciesResponse;
import software.amazon.awssdk.services.iam.model.Policy;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloIAM {
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listPolicies(iam);
    }

    public static void listPolicies(IamClient iam) {
        ListPoliciesResponse response = iam.listPolicies();
        List<Policy> polList = response.policies();
        polList.forEach(policy -> {
            System.out.println("Policy Name: " + policy.policyName());
        });
    }
}
```

- Untuk detail API, lihat ListPoliciesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

### Pelajari dasar-dasarnya

Contoh kode berikut menunjukkan cara membuat pengguna dan mengambil peran.

> **Warning**
>
> Untuk menghindari risiko keamanan, jangan gunakan pengguna IAM untuk otentikasi saat mengembangkan perangkat lunak yang dibuat khusus atau bekerja dengan data nyata. Sebaliknya, gunakan federasi dengan penyedia identitas seperti AWS IAM Identity Center.

- Buat pengguna tanpa izin.
- Buat peran yang memberikan izin untuk mencantumkan bucket Amazon S3 untuk akun tersebut.
- Tambahkan kebijakan agar pengguna dapat mengambil peran tersebut.
- Asumsikan peran dan daftar bucket S3 menggunakan kredenal sementara, lalu bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat fungsi yang membungkus tindakan pengguna IAM.

```
/*
  To run this Java V2 code example, set up your development environment, including
 your credentials.

  For information, see this documentation topic:

  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html

  This example performs these operations:

  1. Creates a user that has no permissions.
  2. Creates a role and policy that grants Amazon S3 permissions.
  3. Creates a role.
  4. Grants the user permissions.
  5. Gets temporary credentials by assuming the role.  Creates an Amazon S3 Service
 client object with the temporary credentials.
```

```
  6. Deletes the resources.
 */

public class IAMScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    public static final String PolicyDocument = "{" +
            "  \"Version\": \"2012-10-17\"," +
            "  \"Statement\": [" +
            "    {" +
            "        \"Effect\": \"Allow\"," +
            "        \"Action\": [" +
            "            \"s3:*\"" +
            "       ]," +
            "       \"Resource\": \"*\"" +
            "    }" +
            "   ]" +
            "}";

    public static String userArn;

    public static void main(String[] args) throws Exception {

        final String usage = """

                Usage:
                    <username> <policyName> <roleName> <roleSessionName>
 <bucketName>\s

                Where:
                    username - The name of the IAM user to create.\s
                    policyName - The name of the policy to create.\s
                    roleName - The name of the role to create.\s
                    roleSessionName - The name of the session required for the
 assumeRole operation.\s
                    bucketName - The name of the Amazon S3 bucket from which objects
 are read.\s
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String userName = args[0];
```

```
        String policyName = args[1];
        String roleName = args[2];
        String roleSessionName = args[3];
        String bucketName = args[4];

        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS IAM example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(" 1. Create the IAM user.");
        User createUser = createIAMUser(iam, userName);

        System.out.println(DASHES);
        userArn = createUser.arn();

        AccessKey myKey = createIAMAccessKey(iam, userName);
        String accessKey = myKey.accessKeyId();
        String secretKey = myKey.secretAccessKey();
        String assumeRolePolicyDocument = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                " \"AWS\": \"" + userArn + "\"" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        System.out.println(assumeRolePolicyDocument);
        System.out.println(userName + " was successfully created.");
        System.out.println(DASHES);
        System.out.println("2. Creates a policy.");
        String polArn = createIAMPolicy(iam, policyName);
        System.out.println("The policy " + polArn + " was successfully created.");
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("3. Creates a role.");
        TimeUnit.SECONDS.sleep(30);
        String roleArn = createIAMRole(iam, roleName, assumeRolePolicyDocument);
        System.out.println(roleArn + " was successfully created.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Grants the user permissions.");
        attachIAMRolePolicy(iam, roleName, polArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("*** Wait for 30 secs so the resource is available");
        TimeUnit.SECONDS.sleep(30);
        System.out.println("5. Gets temporary credentials by assuming the role.");
        System.out.println("Perform an Amazon S3 Service operation using the
temporary credentials.");
        assumeRole(roleArn, roleSessionName, bucketName, accessKey, secretKey);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6 Getting ready to delete the AWS resources");
        deleteKey(iam, userName, accessKey);
        deleteRole(iam, roleName, polArn);
        deleteIAMUser(iam, userName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("This IAM Scenario has successfully completed");
        System.out.println(DASHES);
    }

    public static AccessKey createIAMAccessKey(IamClient iam, String user) {
        try {
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                    .userName(user)
                    .build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
            return response.accessKey();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
        return null;
    }

    public static User createIAMUser(IamClient iam, String username) {
        try {
            // Create an IamWaiter object
            IamWaiter iamWaiter = iam.waiter();
            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();

            // Wait until the user is created.
            CreateUserResponse response = iam.createUser(request);
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static String createIAMRole(IamClient iam, String rolename, String json)
{

        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(json)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            System.out.println("The ARN of the role is " + response.role().arn());
            return response.role().arn();
```

```
        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createIAMPolicy(IamClient iam, String policyName) {
        try {
            // Create an IamWaiter object.
            IamWaiter iamWaiter = iam.waiter();
            CreatePolicyRequest request = CreatePolicyRequest.builder()
                    .policyName(policyName)
                    .policyDocument(PolicyDocument).build();

            CreatePolicyResponse response = iam.createPolicy(request);
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
iamWaiter.waitUntilPolicyExists(polRequest);

waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn) {
        try {
            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                    .roleName(roleName)
                    .build();

            ListAttachedRolePoliciesResponse response =
iam.listAttachedRolePolicies(request);
            List<AttachedPolicy> attachedPolicies = response.attachedPolicies();
```

```
            String polArn;
            for (AttachedPolicy policy : attachedPolicies) {
                polArn = policy.policyArn();
                if (polArn.compareTo(policyArn) == 0) {
                    System.out.println(roleName + " policy is already attached to
this role.");
                    return;
                }
            }

            AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.attachRolePolicy(attachRequest);
            System.out.println("Successfully attached policy " + policyArn + " to
role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Invoke an Amazon S3 operation using the Assumed Role.
    public static void assumeRole(String roleArn, String roleSessionName, String
bucketName, String keyVal,
            String keySecret) {

        // Use the creds of the new IAM user that was created in this code example.
        AwsBasicCredentials credentials = AwsBasicCredentials.create(keyVal,
keySecret);
        StsClient stsClient = StsClient.builder()
                .region(Region.US_EAST_1)
                .credentialsProvider(StaticCredentialsProvider.create(credentials))
                .build();

        try {
            AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                    .roleArn(roleArn)
                    .roleSessionName(roleSessionName)
                    .build();
```

```
            AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
            Credentials myCreds = roleResponse.credentials();
            String key = myCreds.accessKeyId();
            String secKey = myCreds.secretAccessKey();
            String secToken = myCreds.sessionToken();

            // List all objects in an Amazon S3 bucket using the temp creds
retrieved by
            // invoking assumeRole.
            Region region = Region.US_EAST_1;
            S3Client s3 = S3Client.builder()
                    .credentialsProvider(

StaticCredentialsProvider.create(AwsSessionCredentials.create(key, secKey,
secToken)))
                    .region(region)
                    .build();

            System.out.println("Created a S3Client using temp credentials.");
            System.out.println("Listing objects in " + bucketName);
            ListObjectsRequest listObjects = ListObjectsRequest.builder()
                    .bucket(bucketName)
                    .build();

            ListObjectsResponse res = s3.listObjects(listObjects);
            List<S3Object> objects = res.contents();
            for (S3Object myValue : objects) {
                System.out.println("The name of the key is " + myValue.key());
                System.out.println("The owner is " + myValue.owner());
            }

        } catch (StsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void deleteRole(IamClient iam, String roleName, String polArn) {

        try {
            // First the policy needs to be detached.
            DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
```

```
                .policyArn(polArn)
                .roleName(roleName)
                .build();

        iam.detachRolePolicy(rolePolicyRequest);

        // Delete the policy.
        DeletePolicyRequest request = DeletePolicyRequest.builder()
                .policyArn(polArn)
                .build();

        iam.deletePolicy(request);
        System.out.println("*** Successfully deleted " + polArn);

        // Delete the role.
        DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        iam.deleteRole(roleRequest);
        System.out.println("*** Successfully deleted " + roleName);

    } catch (IamException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
}

public static void deleteKey(IamClient iam, String username, String accessKey) {
    try {
        DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                .accessKeyId(accessKey)
                .userName(username)
                .build();

        iam.deleteAccessKey(request);
        System.out.println("Successfully deleted access key " + accessKey +
                " from user " + username);

    } catch (IamException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
}
```

```
    public static void deleteIAMUser(IamClient iam, String userName) {
        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("*** Successfully deleted " + userName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AttachRolePolicy
  - CreateAccessKey
  - CreatePolicy
  - CreateRole
  - CreateUser
  - DeleteAccessKey
  - DeletePolicy
  - DeleteRole
  - DeleteUser
  - DeleteUserPolicy
  - DetachRolePolicy
  - PutUserPolicy

## Tindakan

### `AttachRolePolicy`

Contoh kode berikut menunjukkan cara menggunakan`AttachRolePolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.AttachRolePolicyRequest;
import software.amazon.awssdk.services.iam.model.AttachedPolicy;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesRequest;
import software.amazon.awssdk.services.iam.model.ListAttachedRolePoliciesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AttachRolePolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <roleName> <policyArn>\s

                Where:
                    roleName - A role name that you can obtain from the AWS
 Management Console.\s
                    policyArn - A policy ARN that you can obtain from the AWS
 Management Console.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
```

```
        }

        String roleName = args[0];
        String policyArn = args[1];

        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        attachIAMRolePolicy(iam, roleName, policyArn);
        iam.close();
    }

    public static void attachIAMRolePolicy(IamClient iam, String roleName, String
policyArn) {
        try {
            ListAttachedRolePoliciesRequest request =
ListAttachedRolePoliciesRequest.builder()
                    .roleName(roleName)
                    .build();

            ListAttachedRolePoliciesResponse response =
iam.listAttachedRolePolicies(request);
            List<AttachedPolicy> attachedPolicies = response.attachedPolicies();

            // Ensure that the policy is not attached to this role
            String polArn = "";
            for (AttachedPolicy policy : attachedPolicies) {
                polArn = policy.policyArn();
                if (polArn.compareTo(policyArn) == 0) {
                    System.out.println(roleName + " policy is already attached to
this role.");
                    return;
                }
            }

            AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(policyArn)
                    .build();

            iam.attachRolePolicy(attachRequest);
```

```
            System.out.println("Successfully attached policy " + policyArn +
                    " to role " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Untuk detail API, lihat AttachRolePolicydi Referensi AWS SDK for Java 2.x API.

### `CreateAccessKey`

Contoh kode berikut menunjukkan cara menggunakan`CreateAccessKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.CreateAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.CreateAccessKeyResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAccessKey {
```

```
    public static void main(String[] args) {
        final String usage = """

                Usage:
                   <user>\s

                Where:
                   user - An AWS IAM user that you can obtain from the AWS
 Management Console.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String user = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String keyId = createIAMAccessKey(iam, user);
        System.out.println("The Key Id is " + keyId);
        iam.close();
    }

    public static String createIAMAccessKey(IamClient iam, String user) {
        try {
            CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
                    .userName(user)
                    .build();

            CreateAccessKeyResponse response = iam.createAccessKey(request);
            return response.accessKey().accessKeyId();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateAccessKeydi Referensi AWS SDK for Java 2.x API.

### `CreateAccountAlias`

Contoh kode berikut menunjukkan cara menggunakan`CreateAccountAlias`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.CreateAccountAliasRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateAccountAlias {
    public static void main(String[] args) {
        final String usage = """
                Usage:
                    <alias>\s

                Where:
                    alias - The account alias to create (for example, myawsaccount).
\s
                """;

        if (args.length != 1) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String alias = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        createIAMAccountAlias(iam, alias);
        iam.close();
        System.out.println("Done");
    }

    public static void createIAMAccountAlias(IamClient iam, String alias) {
        try {
            CreateAccountAliasRequest request = CreateAccountAliasRequest.builder()
                    .accountAlias(alias)
                    .build();

            iam.createAccountAlias(request);
            System.out.println("Successfully created account alias: " + alias);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateAccountAliasdi Referensi AWS SDK for Java 2.x API.

### `CreatePolicy`

Contoh kode berikut menunjukkan cara menggunakan`CreatePolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreatePolicyRequest;
import software.amazon.awssdk.services.iam.model.CreatePolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyRequest;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreatePolicy {

    public static final String PolicyDocument = "{" +
            "  \"Version\": \"2012-10-17\"," +
            "  \"Statement\": [" +
            "    {" +
            "        \"Effect\": \"Allow\"," +
            "        \"Action\": [" +
            "            \"dynamodb:DeleteItem\"," +
            "            \"dynamodb:GetItem\"," +
            "            \"dynamodb:PutItem\"," +
            "            \"dynamodb:Scan\"," +
            "            \"dynamodb:UpdateItem\"" +
            "       ]," +
            "       \"Resource\": \"*\"" +
            "    }" +
```

```
            "   ]" +
            "}";

    public static void main(String[] args) {

        final String usage = """
                Usage:
                    CreatePolicy <policyName>\s

                Where:
                    policyName - A unique policy name.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String policyName = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String result = createIAMPolicy(iam, policyName);
        System.out.println("Successfully created a policy with this ARN value: " +
result);
        iam.close();
    }

    public static String createIAMPolicy(IamClient iam, String policyName) {
        try {
            // Create an IamWaiter object.
            IamWaiter iamWaiter = iam.waiter();

            CreatePolicyRequest request = CreatePolicyRequest.builder()
                    .policyName(policyName)
                    .policyDocument(PolicyDocument)
                    .build();

            CreatePolicyResponse response = iam.createPolicy(request);

            // Wait until the policy is created.
            GetPolicyRequest polRequest = GetPolicyRequest.builder()
```

```
                    .policyArn(response.policy().arn())
                    .build();

            WaiterResponse<GetPolicyResponse> waitUntilPolicyExists =
 iamWaiter.waitUntilPolicyExists(polRequest);

 waitUntilPolicyExists.matched().response().ifPresent(System.out::println);
            return response.policy().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreatePolicydi Referensi AWS SDK for Java 2.x API.

### `CreateRole`

Contoh kode berikut menunjukkan cara menggunakan`CreateRole`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import org.json.simple.JSONObject;
import org.json.simple.parser.JSONParser;
import software.amazon.awssdk.services.iam.model.CreateRoleRequest;
import software.amazon.awssdk.services.iam.model.CreateRoleResponse;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import java.io.FileReader;

/*
```

```
*   This example requires a trust policy document. For more information, see:
*   https://aws.amazon.com/blogs/security/how-to-use-trust-policies-with-iam-roles/
*
*
*  In addition, set up your development environment, including your credentials.
*
*  For information, see this documentation topic:
*
*  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class CreateRole {
    public static void main(String[] args) throws Exception {
        final String usage = """
                Usage:
                    <rolename> <fileLocation>\s

                Where:
                    rolename - The name of the role to create.\s
                    fileLocation - The location of the JSON document that represents
 the trust policy.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String rolename = args[0];
        String fileLocation = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String result = createIAMRole(iam, rolename, fileLocation);
        System.out.println("Successfully created user: " + result);
        iam.close();
    }

    public static String createIAMRole(IamClient iam, String rolename, String
 fileLocation) throws Exception {
        try {
            JSONObject jsonObject = (JSONObject) readJsonSimpleDemo(fileLocation);
```

```
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(rolename)
                    .assumeRolePolicyDocument(jsonObject.toJSONString())
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse response = iam.createRole(request);
            System.out.println("The ARN of the role is " + response.role().arn());

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static Object readJsonSimpleDemo(String filename) throws Exception {
        FileReader reader = new FileReader(filename);
        JSONParser jsonParser = new JSONParser();
        return jsonParser.parse(reader);
    }
}
```

- Untuk detail API, lihat CreateRoledi Referensi AWS SDK for Java 2.x API.

### `CreateUser`

Contoh kode berikut menunjukkan cara menggunakan`CreateUser`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.waiters.WaiterResponse;
import software.amazon.awssdk.services.iam.model.CreateUserRequest;
import software.amazon.awssdk.services.iam.model.CreateUserResponse;
import software.amazon.awssdk.services.iam.model.IamException;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.waiters.IamWaiter;
import software.amazon.awssdk.services.iam.model.GetUserRequest;
import software.amazon.awssdk.services.iam.model.GetUserResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username>\s

                Where:
                    username - The name of the user to create.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String username = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        String result = createIAMUser(iam, username);
        System.out.println("Successfully created user: " + result);
        iam.close();
    }

    public static String createIAMUser(IamClient iam, String username) {
        try {
            // Create an IamWaiter object.
```

```
            IamWaiter iamWaiter = iam.waiter();

            CreateUserRequest request = CreateUserRequest.builder()
                    .userName(username)
                    .build();

            CreateUserResponse response = iam.createUser(request);

            // Wait until the user is created.
            GetUserRequest userRequest = GetUserRequest.builder()
                    .userName(response.user().userName())
                    .build();

            WaiterResponse<GetUserResponse> waitUntilUserExists =
 iamWaiter.waitUntilUserExists(userRequest);
            waitUntilUserExists.matched().response().ifPresent(System.out::println);
            return response.user().userName();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateUserdi Referensi AWS SDK for Java 2.x API.

### `DeleteAccessKey`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAccessKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteAccessKeyRequest;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteAccessKey {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username> <accessKey>\s

                Where:
                    username - The name of the user.\s
                    accessKey - The access key ID for the secret access key you want
 to delete.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String username = args[0];
        String accessKey = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();
        deleteKey(iam, username, accessKey);
        iam.close();
    }

    public static void deleteKey(IamClient iam, String username, String accessKey) {
        try {
            DeleteAccessKeyRequest request = DeleteAccessKeyRequest.builder()
                    .accessKeyId(accessKey)
```

```
                    .userName(username)
                    .build();

            iam.deleteAccessKey(request);
            System.out.println("Successfully deleted access key " + accessKey +
                    " from user " + username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteAccessKeydi Referensi AWS SDK for Java 2.x API.

### `DeleteAccountAlias`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAccountAlias`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.DeleteAccountAliasRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
```

```
public class DeleteAccountAlias {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <alias>\s

                Where:
                    alias - The account alias to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String alias = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMAccountAlias(iam, alias);
        iam.close();
    }

    public static void deleteIAMAccountAlias(IamClient iam, String alias) {
        try {
            DeleteAccountAliasRequest request = DeleteAccountAliasRequest.builder()
                    .accountAlias(alias)
                    .build();

            iam.deleteAccountAlias(request);
            System.out.println("Successfully deleted account alias " + alias);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Untuk detail API, lihat DeleteAccountAliasdi Referensi AWS SDK for Java 2.x API.

### `DeletePolicy`

Contoh kode berikut menunjukkan cara menggunakan`DeletePolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.DeletePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeletePolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <policyARN>\s

                Where:
                    policyARN - A policy ARN value to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String policyARN = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMPolicy(iam, policyARN);
        iam.close();
    }

    public static void deleteIAMPolicy(IamClient iam, String policyARN) {
        try {
            DeletePolicyRequest request = DeletePolicyRequest.builder()
                    .policyArn(policyARN)
                    .build();

            iam.deletePolicy(request);
            System.out.println("Successfully deleted the policy");

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
}
```

- Untuk detail API, lihat DeletePolicydi Referensi AWS SDK for Java 2.x API.

### `DeleteUser`

Contoh kode berikut menunjukkan cara menggunakan`DeleteUser`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.DeleteUserRequest;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <userName>\s

                Where:
                    userName - The name of the user to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userName = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        deleteIAMUser(iam, userName);
        System.out.println("Done");
        iam.close();
    }

    public static void deleteIAMUser(IamClient iam, String userName) {
        try {
            DeleteUserRequest request = DeleteUserRequest.builder()
```

```
                    .userName(userName)
                    .build();

            iam.deleteUser(request);
            System.out.println("Successfully deleted IAM user " + userName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteUserdi Referensi AWS SDK for Java 2.x API.

### `DetachRolePolicy`

Contoh kode berikut menunjukkan cara menggunakan`DetachRolePolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.DetachRolePolicyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetachRolePolicy {
```

```
   public static void main(String[] args) {
       final String usage = """

               Usage:
                   <roleName> <policyArn>\s

               Where:
                   roleName - A role name that you can obtain from the AWS
Management Console.\s
                   policyArn - A policy ARN that you can obtain from the AWS
Management Console.\s
               """;

       if (args.length != 2) {
           System.out.println(usage);
           System.exit(1);
       }

       String roleName = args[0];
       String policyArn = args[1];
       Region region = Region.AWS_GLOBAL;
       IamClient iam = IamClient.builder()
               .region(region)
               .build();
       detachPolicy(iam, roleName, policyArn);
       System.out.println("Done");
       iam.close();
   }

   public static void detachPolicy(IamClient iam, String roleName, String
policyArn) {
       try {
           DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                   .roleName(roleName)
                   .policyArn(policyArn)
                   .build();

           iam.detachRolePolicy(request);
           System.out.println("Successfully detached policy " + policyArn +
                   " from role " + roleName);

       } catch (IamException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
```

```
        }
    }
}
```

- Untuk detail API, lihat DetachRolePolicydi Referensi AWS SDK for Java 2.x API.

### `ListAccessKeys`

Contoh kode berikut menunjukkan cara menggunakan`ListAccessKeys`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.AccessKeyMetadata;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccessKeysRequest;
import software.amazon.awssdk.services.iam.model.ListAccessKeysResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListAccessKeys {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <userName>\s

                Where:
```

```
                    userName - The name of the user for which access keys are
retrieved.\s
                """";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String userName = args[0];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listKeys(iam, userName);
        System.out.println("Done");
        iam.close();
    }

    public static void listKeys(IamClient iam, String userName) {
        try {
            boolean done = false;
            String newMarker = null;

            while (!done) {
                ListAccessKeysResponse response;

                if (newMarker == null) {
                    ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                            .userName(userName)
                            .build();

                    response = iam.listAccessKeys(request);

                } else {
                    ListAccessKeysRequest request = ListAccessKeysRequest.builder()
                            .userName(userName)
                            .marker(newMarker)
                            .build();

                    response = iam.listAccessKeys(request);
                }
```

```
                for (AccessKeyMetadata metadata : response.accessKeyMetadata()) {
                    System.out.format("Retrieved access key %s",
 metadata.accessKeyId());
                }

                if (!response.isTruncated()) {
                    done = true;
                } else {
                    newMarker = response.marker();
                }
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListAccessKeysdi Referensi AWS SDK for Java 2.x API.

### `ListAccountAliases`

Contoh kode berikut menunjukkan cara menggunakan`ListAccountAliases`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListAccountAliasesResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListAccountAliases {
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listAliases(iam);
        System.out.println("Done");
        iam.close();
    }

    public static void listAliases(IamClient iam) {
        try {
            ListAccountAliasesResponse response = iam.listAccountAliases();
            for (String alias : response.accountAliases()) {
                System.out.printf("Retrieved account alias %s", alias);
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListAccountAliasesdi Referensi AWS SDK for Java 2.x API.

### `ListUsers`

Contoh kode berikut menunjukkan cara menggunakan`ListUsers`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.AttachedPermissionsBoundary;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.ListUsersRequest;
import software.amazon.awssdk.services.iam.model.ListUsersResponse;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.User;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListUsers {
    public static void main(String[] args) {
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        listAllUsers(iam);
        System.out.println("Done");
        iam.close();
    }

    public static void listAllUsers(IamClient iam) {
        try {
            boolean done = false;
            String newMarker = null;
            while (!done) {
                ListUsersResponse response;
```

```
                if (newMarker == null) {
                    ListUsersRequest request = ListUsersRequest.builder().build();
                    response = iam.listUsers(request);
                } else {
                    ListUsersRequest request = ListUsersRequest.builder()
                            .marker(newMarker)
                            .build();

                    response = iam.listUsers(request);
                }

                for (User user : response.users()) {
                    System.out.format("\n Retrieved user %s", user.userName());
                    AttachedPermissionsBoundary permissionsBoundary =
 user.permissionsBoundary();
                    if (permissionsBoundary != null)
                        System.out.format("\n Permissions boundary details %s",

 permissionsBoundary.permissionsBoundaryTypeAsString());
                }

                if (!response.isTruncated()) {
                    done = true;
                } else {
                    newMarker = response.marker();
                }
            }

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListUsersdi Referensi AWS SDK for Java 2.x API.

### `UpdateAccessKey`

Contoh kode berikut menunjukkan cara menggunakan`UpdateAccessKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.StatusType;
import software.amazon.awssdk.services.iam.model.UpdateAccessKeyRequest;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateAccessKey {

    private static StatusType statusType;

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <username> <accessId> <status>\s

                Where:
                    username - The name of the user whose key you want to update.\s
                    accessId - The access key ID of the secret access key you want
 to update.\s
                    status - The status you want to assign to the secret access key.
\s
                """;

        if (args.length != 3) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String username = args[0];
        String accessId = args[1];
        String status = args[2];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        updateKey(iam, username, accessId, status);
        System.out.println("Done");
        iam.close();
    }

    public static void updateKey(IamClient iam, String username, String accessId,
 String status) {
        try {
            if (status.toLowerCase().equalsIgnoreCase("active")) {
                statusType = StatusType.ACTIVE;
            } else if (status.toLowerCase().equalsIgnoreCase("inactive")) {
                statusType = StatusType.INACTIVE;
            } else {
                statusType = StatusType.UNKNOWN_TO_SDK_VERSION;
            }

            UpdateAccessKeyRequest request = UpdateAccessKeyRequest.builder()
                    .accessKeyId(accessId)
                    .userName(username)
                    .status(statusType)
                    .build();

            iam.updateAccessKey(request);
            System.out.printf("Successfully updated the status of access key %s to"
 +
                    "status %s for user %s", accessId, status, username);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat UpdateAccessKeydi Referensi AWS SDK for Java 2.x API.

### `UpdateUser`

Contoh kode berikut menunjukkan cara menggunakan`UpdateUser`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.IamException;
import software.amazon.awssdk.services.iam.model.UpdateUserRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateUser {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <curName> <newName>\s

                Where:
                    curName - The current user name.\s
                    newName - An updated user name.\s
                """;
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String curName = args[0];
        String newName = args[1];
        Region region = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        updateIAMUser(iam, curName, newName);
        System.out.println("Done");
        iam.close();
    }

    public static void updateIAMUser(IamClient iam, String curName, String newName)
 {
        try {
            UpdateUserRequest request = UpdateUserRequest.builder()
                    .userName(curName)
                    .newUserName(newName)
                    .build();

            iam.updateUser(request);
            System.out.printf("Successfully updated user to username %s", newName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat UpdateUserdi Referensi AWS SDK for Java 2.x API.

# Skenario

Membangun dan mengelola layanan yang tangguh

Contoh kode berikut menunjukkan cara membuat layanan web load-balanced yang mengembalikan rekomendasi buku, film, dan lagu. Contoh ini menunjukkan cara layanan tersebut merespons kegagalan, serta cara merestrukturisasi layanan agar lebih tangguh ketika terjadi kegagalan.

- Menggunakan grup Amazon EC2 Auto Scaling untuk membuat instans Amazon Elastic Compute Cloud (Amazon EC2) berdasarkan templat peluncuran dan menyimpan sejumlah instans dalam rentang yang ditentukan.
- Menangani dan mendistribusikan permintaan HTTP dengan Elastic Load Balancing.
- Memantau kondisi instans dalam grup Auto Scaling dan meneruskan permintaan hanya ke instans yang sehat.
- Menjalankan server web Python pada setiap instans EC2 untuk menangani permintaan HTTP. Server web merespons dengan memberikan rekomendasi dan melakukan pemeriksaan kondisi.
- Menyimulasikan layanan yang direkomendasikan dengan tabel Amazon DynamoDB.
- Kontrol respons server web terhadap permintaan dan pemeriksaan kesehatan dengan memperbarui AWS Systems Manager parameter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario interaktif di prompt perintah.

```
public class Main {

    public static final String fileName = "C:\\AWS\\resworkflow\
\recommendations.json"; // Modify file location.
    public static final String tableName = "doc-example-recommendation-service";
    public static final String startScript = "C:\\AWS\\resworkflow\
\server_startup_script.sh"; // Modify file location.
```

```
    public static final String policyFile = "C:\\AWS\\resworkflow\
\instance_policy.json"; // Modify file location.
    public static final String ssmJSON = "C:\\AWS\\resworkflow\
\ssm_only_policy.json"; // Modify file location.
    public static final String failureResponse = "doc-example-resilient-
architecture-failure-response";
    public static final String healthCheck = "doc-example-resilient-architecture-
health-check";
    public static final String templateName = "doc-example-resilience-template";
    public static final String roleName = "doc-example-resilience-role";
    public static final String policyName = "doc-example-resilience-pol";
    public static final String profileName = "doc-example-resilience-prof";

    public static final String badCredsProfileName = "doc-example-resilience-prof-
bc";

    public static final String targetGroupName = "doc-example-resilience-tg";
    public static final String autoScalingGroupName = "doc-example-resilience-
group";
    public static final String lbName = "doc-example-resilience-lb";
    public static final String protocol = "HTTP";
    public static final int port = 80;

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws IOException, InterruptedException
 {
        Scanner in = new Scanner(System.in);
        Database database = new Database();
        AutoScaler autoScaler = new AutoScaler();
        LoadBalancer loadBalancer = new LoadBalancer();

        System.out.println(DASHES);
        System.out.println("Welcome to the demonstration of How to Build and Manage
 a Resilient Service!");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("A - SETUP THE RESOURCES");
        System.out.println("Press Enter when you're ready to start deploying
 resources.");
        in.nextLine();
        deploy(loadBalancer);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("B - DEMO THE RESILIENCE FUNCTIONALITY");
        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        demo(loadBalancer);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("C - DELETE THE RESOURCES");
        System.out.println("""
                This concludes the demo of how to build and manage a resilient
service.
                To keep things tidy and to avoid unwanted charges on your account,
we can clean up all AWS resources
                that were created for this demo.
                """);

        System.out.println("\n Do you want to delete the resources (y/n)? ");
        String userInput = in.nextLine().trim().toLowerCase(); // Capture user input

        if (userInput.equals("y")) {
            // Delete resources here
            deleteResources(loadBalancer, autoScaler, database);
            System.out.println("Resources deleted.");
        } else {
            System.out.println("""
                    Okay, we'll leave the resources intact.
                    Don't forget to delete them when you're done with them or you
might incur unexpected charges.
                    """);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The example has completed. ");
        System.out.println("\n Thanks for watching!");
        System.out.println(DASHES);
    }

    // Deletes the AWS resources used in this example.
    private static void deleteResources(LoadBalancer loadBalancer, AutoScaler
autoScaler, Database database)
            throws IOException, InterruptedException {
        loadBalancer.deleteLoadBalancer(lbName);
```

```
        System.out.println("*** Wait 30 secs for resource to be deleted");
        TimeUnit.SECONDS.sleep(30);
        loadBalancer.deleteTargetGroup(targetGroupName);
        autoScaler.deleteAutoScaleGroup(autoScalingGroupName);
        autoScaler.deleteRolesPolicies(policyName, roleName, profileName);
        autoScaler.deleteTemplate(templateName);
        database.deleteTable(tableName);
    }

    private static void deploy(LoadBalancer loadBalancer) throws
InterruptedException, IOException {
        Scanner in = new Scanner(System.in);
        System.out.println(
                """
                        For this demo, we'll use the AWS SDK for Java (v2) to create
several AWS resources
                        to set up a load-balanced web service endpoint and explore
some ways to make it resilient
                        against various kinds of failures.

                        Some of the resources create by this demo are:
                        \t* A DynamoDB table that the web service depends on to
provide book, movie, and song recommendations.
                        \t* An EC2 launch template that defines EC2 instances that
each contain a Python web server.
                        \t* An EC2 Auto Scaling group that manages EC2 instances
across several Availability Zones.
                        \t* An Elastic Load Balancing (ELB) load balancer that
targets the Auto Scaling group to distribute requests.
                        """);

        System.out.println("Press Enter when you're ready.");
        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Creating and populating a DynamoDB table named " +
tableName);
        Database database = new Database();
        database.createTable(tableName, fileName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
```

```
                Creating an EC2 launch template that runs '{startup_script}' when an
instance starts.
                This script starts a Python web server defined in the `server.py`
script. The web server
                listens to HTTP requests on port 80 and responds to requests to '/'
and to '/healthcheck'.
                For demo purposes, this server is run as the root user. In
production, the best practice is to
                run a web server, such as Apache, with least-privileged credentials.

                The template also defines an IAM policy that each instance uses to
assume a role that grants
                permissions to access the DynamoDB recommendation table and Systems
Manager parameters
                that control the flow of the demo.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        templateCreator.createTemplate(policyFile, policyName, profileName,
startScript, templateName, roleName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "Creating an EC2 Auto Scaling group that maintains three EC2
instances, each in a different Availability Zone.");
        System.out.println("*** Wait 30 secs for the VPC to be created");
        TimeUnit.SECONDS.sleep(30);
        AutoScaler autoScaler = new AutoScaler();
        String[] zones = autoScaler.createGroup(3, templateName,
autoScalingGroupName);

        System.out.println("""
                At this point, you have EC2 instances created. Once each instance
starts, it listens for
                HTTP requests. You can see these instances in the console or
continue with the demo.
                Press Enter when you're ready to continue.
                """);

        in.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("Creating variables that control the flow of the demo.");
        ParameterHelper paramHelper = new ParameterHelper();
        paramHelper.reset();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
                Creating an Elastic Load Balancing target group and load balancer.
The target group
                defines how the load balancer connects to instances. The load
balancer provides a
                single endpoint where clients connect and dispatches requests to
instances in the group.
                """);

        String vpcId = autoScaler.getDefaultVPC();
        List<Subnet> subnets = autoScaler.getSubnets(vpcId, zones);
        System.out.println("You have retrieved a list with " + subnets.size() + "
subnets");
        String targetGroupArn = loadBalancer.createTargetGroup(protocol, port,
vpcId, targetGroupName);
        String elbDnsName = loadBalancer.createLoadBalancer(subnets, targetGroupArn,
lbName, port, protocol);
        autoScaler.attachLoadBalancerTargetGroup(autoScalingGroupName,
targetGroupArn);
        System.out.println("Verifying access to the load balancer endpoint...");
        boolean wasSuccessul = loadBalancer.verifyLoadBalancerEndpoint(elbDnsName);
        if (!wasSuccessul) {
            System.out.println("Couldn't connect to the load balancer, verifying
that the port is open...");
            CloseableHttpClient httpClient = HttpClients.createDefault();

            // Create an HTTP GET request to "http://checkip.amazonaws.com"
            HttpGet httpGet = new HttpGet("http://checkip.amazonaws.com");
            try {
                // Execute the request and get the response
                HttpResponse response = httpClient.execute(httpGet);

                // Read the response content.
                String ipAddress =
IOUtils.toString(response.getEntity().getContent(), StandardCharsets.UTF_8).trim();

                // Print the public IP address.
                System.out.println("Public IP Address: " + ipAddress);
```

```
                GroupInfo groupInfo = autoScaler.verifyInboundPort(vpcId, port,
ipAddress);
                if (!groupInfo.isPortOpen()) {
                    System.out.println("""
                            For this example to work, the default security group for
your default VPC must
                            allow access from this computer. You can either add it
automatically from this
                            example or add it yourself using the AWS Management
Console.
                            """);

                    System.out.println(
                            "Do you want to add a rule to security group " +
groupInfo.getGroupName() + " to allow");
                    System.out.println("inbound traffic on port " + port + " from
your computer's IP address (y/n) ");
                    String ans = in.nextLine();
                    if ("y".equalsIgnoreCase(ans)) {
                        autoScaler.openInboundPort(groupInfo.getGroupName(),
String.valueOf(port), ipAddress);
                        System.out.println("Security group rule added.");
                    } else {
                        System.out.println("No security group rule added.");
                    }
                }

            } catch (AutoScalingException e) {
                e.printStackTrace();
            }
        } else if (wasSuccessul) {
            System.out.println("Your load balancer is ready. You can access it by
browsing to:");
            System.out.println("\t http://" + elbDnsName);
        } else {
            System.out.println("Couldn't get a successful response from the load
balancer endpoint. Troubleshoot by");
            System.out.println("manually verifying that your VPC and security group
are configured correctly and that");
            System.out.println("you can successfully make a GET request to the load
balancer.");
        }
```

```
        System.out.println("Press Enter when you're ready to continue with the
demo.");
        in.nextLine();
    }

    // A method that controls the demo part of the Java program.
    public static void demo(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        ParameterHelper paramHelper = new ParameterHelper();
        System.out.println("Read the ssm_only_policy.json file");
        String ssmOnlyPolicy = readFileAsString(ssmJSON);

        System.out.println("Resetting parameters to starting values for demo.");
        paramHelper.reset();

        System.out.println(
                """
                        This part of the demonstration shows how to toggle
different parts of the system
                        to create situations where the web service fails, and shows
how using a resilient
                        architecture can keep the web service running in spite of
these failures.

                        At the start, the load balancer endpoint returns
recommendations and reports that all targets are healthy.
                       """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        The web service running on the EC2 instances gets
recommendations by querying a DynamoDB table.
                        The table name is contained in a Systems Manager parameter
named self.param_helper.table.
                        To simulate a failure of the recommendation service, let's
set this parameter to name a non-existent table.
                       """);
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        System.out.println(
                """
                        \nNow, sending a GET request to the load balancer endpoint
returns a failure code. But, the service reports as
```

```
                        healthy to the load balancer because shallow health checks
don't check for failure of the recommendation service.
                        """);
        demoChoices(loadBalancer);

        System.out.println(
                """
                        Instead of failing when the recommendation service fails,
the web service can return a static response.
                        While this is not a perfect solution, it presents the
customer with a somewhat better experience than failure.
                        """);
        paramHelper.put(paramHelper.failureResponse, "static");

        System.out.println("""
                Now, sending a GET request to the load balancer endpoint returns a
static response.
                The service still reports as healthy because health checks are still
shallow.
                """);
        demoChoices(loadBalancer);

        System.out.println("Let's reinstate the recommendation service.");
        paramHelper.put(paramHelper.tableName, paramHelper.dyntable);

        System.out.println("""
                Let's also substitute bad credentials for one of the instances in
the target group so that it can't
                access the DynamoDB recommendation table. We will get an instance id
value.
                """);

        LaunchTemplateCreator templateCreator = new LaunchTemplateCreator();
        AutoScaler autoScaler = new AutoScaler();

        // Create a new instance profile based on badCredsProfileName.
        templateCreator.createInstanceProfile(policyFile, policyName,
badCredsProfileName, roleName);
        String badInstanceId = autoScaler.getBadInstance(autoScalingGroupName);
        System.out.println("The bad instance id values used for this demo is " +
badInstanceId);

        String profileAssociationId = autoScaler.getInstanceProfile(badInstanceId);
        System.out.println("The association Id value is " + profileAssociationId);
```

```
        System.out.println("Replacing the profile for instance " + badInstanceId
                + " with a profile that contains bad credentials");
        autoScaler.replaceInstanceProfile(badInstanceId, badCredsProfileName,
profileAssociationId);

        System.out.println(
                """
                        Now, sending a GET request to the load balancer endpoint
returns either a recommendation or a static response,
                        depending on which instance is selected by the load
balancer.
                        """);

        demoChoices(loadBalancer);

        System.out.println("""
                Let's implement a deep health check. For this demo, a deep health
check tests whether
                the web service can access the DynamoDB table that it depends on for
recommendations. Note that
                the deep health check is only for ELB routing and not for Auto
Scaling instance health.
                This kind of deep health check is not recommended for Auto Scaling
instance health, because it
                risks accidental termination of all instances in the Auto Scaling
group when a dependent service fails.
                """);

        System.out.println("""
                By implementing deep health checks, the load balancer can detect
when one of the instances is failing
                and take that instance out of rotation.
                """);

        paramHelper.put(paramHelper.healthCheck, "deep");

        System.out.println("""
                Now, checking target health indicates that the instance with bad
credentials
                is unhealthy. Note that it might take a minute or two for the load
balancer to detect the unhealthy
                instance. Sending a GET request to the load balancer endpoint always
returns a recommendation, because
                the load balancer takes unhealthy instances out of its rotation.
```

```
                """);

        demoChoices(loadBalancer);

        System.out.println(
                """
                        Because the instances in this demo are controlled by an auto
scaler, the simplest way to fix an unhealthy
                        instance is to terminate it and let the auto scaler start a
new instance to replace it.
                        """);
        autoScaler.terminateInstance(badInstanceId);

        System.out.println("""
                Even while the instance is terminating and the new instance is
starting, sending a GET
                request to the web service continues to get a successful
recommendation response because
                the load balancer routes requests to the healthy instances. After
the replacement instance
                starts and reports as healthy, it is included in the load balancing
rotation.
                Note that terminating and replacing an instance typically takes
several minutes, during which time you
                can see the changing health check status until the new instance is
running and healthy.
                """);

        demoChoices(loadBalancer);
        System.out.println(
                "If the recommendation service fails now, deep health checks mean
all instances report as unhealthy.");
        paramHelper.put(paramHelper.tableName, "this-is-not-a-table");

        demoChoices(loadBalancer);
        paramHelper.reset();
    }

    public static void demoChoices(LoadBalancer loadBalancer) throws IOException,
InterruptedException {
        String[] actions = {
                "Send a GET request to the load balancer endpoint.",
                "Check the health of load balancer targets.",
                "Go to the next part of the demo."
```

```
        };
        Scanner scanner = new Scanner(System.in);

        while (true) {
            System.out.println("-".repeat(88));
            System.out.println("See the current state of the service by selecting
one of the following choices:");
            for (int i = 0; i < actions.length; i++) {
                System.out.println(i + ": " + actions[i]);
            }

            try {
                System.out.print("\nWhich action would you like to take? ");
                int choice = scanner.nextInt();
                System.out.println("-".repeat(88));

                switch (choice) {
                    case 0 -> {
                        System.out.println("Request:\n");
                        System.out.println("GET http://" +
loadBalancer.getEndpoint(lbName));
                        CloseableHttpClient httpClient =
HttpClients.createDefault();

                        // Create an HTTP GET request to the ELB.
                        HttpGet httpGet = new HttpGet("http://" +
loadBalancer.getEndpoint(lbName));

                        // Execute the request and get the response.
                        HttpResponse response = httpClient.execute(httpGet);
                        int statusCode = response.getStatusLine().getStatusCode();
                        System.out.println("HTTP Status Code: " + statusCode);

                        // Display the JSON response
                        BufferedReader reader = new BufferedReader(
                                new
InputStreamReader(response.getEntity().getContent()));
                        StringBuilder jsonResponse = new StringBuilder();
                        String line;
                        while ((line = reader.readLine()) != null) {
                            jsonResponse.append(line);
                        }
                        reader.close();
```

```
                        // Print the formatted JSON response.
                        System.out.println("Full Response:\n");
                        System.out.println(jsonResponse.toString());

                        // Close the HTTP client.
                        httpClient.close();

                    }
                    case 1 -> {
                        System.out.println("\nChecking the health of load balancer
targets:\n");
                        List<TargetHealthDescription> health =
loadBalancer.checkTargetHealth(targetGroupName);
                        for (TargetHealthDescription target : health) {
                            System.out.printf("\tTarget %s on port %d is %s%n",
target.target().id(),
                                    target.target().port(),
target.targetHealth().stateAsString());
                        }
                        System.out.println("""
                                Note that it can take a minute or two for the health
check to update
                                after changes are made.
                                """);
                    }
                    case 2 -> {
                        System.out.println("\nOkay, let's move on.");
                        System.out.println("-".repeat(88));
                        return; // Exit the method when choice is 2
                    }
                    default -> System.out.println("You must choose a value between
0-2. Please select again.");
                }

            } catch (java.util.InputMismatchException e) {
                System.out.println("Invalid input. Please select again.");
                scanner.nextLine(); // Clear the input buffer.
            }
        }
    }

    public static String readFileAsString(String filePath) throws IOException {
        byte[] bytes = Files.readAllBytes(Paths.get(filePath));
        return new String(bytes);
```

```
    }
}
```

Membuat kelas yang menggabungkan tindakan Penskalaan Otomatis dan Amazon EC2.

```
public class AutoScaler {

    private static Ec2Client ec2Client;
    private static AutoScalingClient autoScalingClient;
    private static IamClient iamClient;

    private static SsmClient ssmClient;

    private IamClient getIAMClient() {
        if (iamClient == null) {
            iamClient = IamClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return iamClient;
    }

    private SsmClient getSSMClient() {
        if (ssmClient == null) {
            ssmClient = SsmClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ssmClient;
    }

    private Ec2Client getEc2Client() {
        if (ec2Client == null) {
            ec2Client = Ec2Client.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return ec2Client;
    }

    private AutoScalingClient getAutoScalingClient() {
        if (autoScalingClient == null) {
```

```
            autoScalingClient = AutoScalingClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return autoScalingClient;
    }

    /**
     * Terminates and instances in an EC2 Auto Scaling group. After an instance is
     * terminated, it can no longer be accessed.
     */
    public void terminateInstance(String instanceId) {
        TerminateInstanceInAutoScalingGroupRequest terminateInstanceIRequest =
TerminateInstanceInAutoScalingGroupRequest
                .builder()
                .instanceId(instanceId)
                .shouldDecrementDesiredCapacity(false)
                .build();


getAutoScalingClient().terminateInstanceInAutoScalingGroup(terminateInstanceIRequest);
        System.out.format("Terminated instance %s.", instanceId);
    }

    /**
     * Replaces the profile associated with a running instance. After the profile is
     * replaced, the instance is rebooted to ensure that it uses the new profile.
     * When
     * the instance is ready, Systems Manager is used to restart the Python web
     * server.
     */
    public void replaceInstanceProfile(String instanceId, String
newInstanceProfileName, String profileAssociationId)
            throws InterruptedException {
        // Create an IAM instance profile specification.
        software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
iamInstanceProfile =
software.amazon.awssdk.services.ec2.model.IamInstanceProfileSpecification
                .builder()
                .name(newInstanceProfileName) // Make sure 'newInstanceProfileName'
is a valid IAM Instance Profile
                                              // name.
                .build();
```

```
        // Replace the IAM instance profile association for the EC2 instance.
        ReplaceIamInstanceProfileAssociationRequest replaceRequest =
ReplaceIamInstanceProfileAssociationRequest
                .builder()
                .iamInstanceProfile(iamInstanceProfile)
                .associationId(profileAssociationId) // Make sure
'profileAssociationId' is a valid association ID.
                .build();

        try {
            getEc2Client().replaceIamInstanceProfileAssociation(replaceRequest);
            // Handle the response as needed.
        } catch (Ec2Exception e) {
            // Handle exceptions, log, or report the error.
            System.err.println("Error: " + e.getMessage());
        }
        System.out.format("Replaced instance profile for association %s with profile
%s.", profileAssociationId,
                newInstanceProfileName);
        TimeUnit.SECONDS.sleep(15);
        boolean instReady = false;
        int tries = 0;

        // Reboot after 60 seconds
        while (!instReady) {
            if (tries % 6 == 0) {
                getEc2Client().rebootInstances(RebootInstancesRequest.builder()
                        .instanceIds(instanceId)
                        .build());
                System.out.println("Rebooting instance " + instanceId + " and
waiting for it to be ready.");
            }
            tries++;
            try {
                TimeUnit.SECONDS.sleep(10);
            } catch (InterruptedException e) {
                e.printStackTrace();
            }

            DescribeInstanceInformationResponse informationResponse =
getSSMClient().describeInstanceInformation();
            List<InstanceInformation> instanceInformationList =
informationResponse.instanceInformationList();
            for (InstanceInformation info : instanceInformationList) {
```

```
                if (info.instanceId().equals(instanceId)) {
                    instReady = true;
                    break;
                }
            }
        }

        SendCommandRequest sendCommandRequest = SendCommandRequest.builder()
                .instanceIds(instanceId)
                .documentName("AWS-RunShellScript")
                .parameters(Collections.singletonMap("commands",
                        Collections.singletonList("cd / && sudo python3 server.py
80")))
                .build();

        getSSMClient().sendCommand(sendCommandRequest);
        System.out.println("Restarted the Python web server on instance " +
instanceId + ".");
    }

    public void openInboundPort(String secGroupId, String port, String ipAddress) {
        AuthorizeSecurityGroupIngressRequest ingressRequest =
AuthorizeSecurityGroupIngressRequest.builder()
                .groupName(secGroupId)
                .cidrIp(ipAddress)
                .fromPort(Integer.parseInt(port))
                .build();

        getEc2Client().authorizeSecurityGroupIngress(ingressRequest);
        System.out.format("Authorized ingress to %s on port %s from %s.",
secGroupId, port, ipAddress);
    }

    /**
     * Detaches a role from an instance profile, detaches policies from the role,
     * and deletes all the resources.
     */
    public void deleteInstanceProfile(String roleName, String profileName) {
        try {
            software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
getInstanceProfileRequest =
software.amazon.awssdk.services.iam.model.GetInstanceProfileRequest
                    .builder()
                    .instanceProfileName(profileName)
```

```
                .build();

        GetInstanceProfileResponse response =
getIAMClient().getInstanceProfile(getInstanceProfileRequest);
        String name = response.instanceProfile().instanceProfileName();
        System.out.println(name);

        RemoveRoleFromInstanceProfileRequest profileRequest =
RemoveRoleFromInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .roleName(roleName)
                .build();

        getIAMClient().removeRoleFromInstanceProfile(profileRequest);
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
DeleteInstanceProfileRequest.builder()
                .instanceProfileName(profileName)
                .build();

        getIAMClient().deleteInstanceProfile(deleteInstanceProfileRequest);
        System.out.println("Deleted instance profile " + profileName);

        DeleteRoleRequest deleteRoleRequest = DeleteRoleRequest.builder()
                .roleName(roleName)
                .build();

        // List attached role policies.
        ListAttachedRolePoliciesResponse rolesResponse = getIAMClient()
                .listAttachedRolePolicies(role -> role.roleName(roleName));
        List<AttachedPolicy> attachedPolicies =
rolesResponse.attachedPolicies();
        for (AttachedPolicy attachedPolicy : attachedPolicies) {
            DetachRolePolicyRequest request = DetachRolePolicyRequest.builder()
                    .roleName(roleName)
                    .policyArn(attachedPolicy.policyArn())
                    .build();

            getIAMClient().detachRolePolicy(request);
            System.out.println("Detached and deleted policy " +
attachedPolicy.policyName());
        }

        getIAMClient().deleteRole(deleteRoleRequest);
        System.out.println("Instance profile and role deleted.");
```

```
        } catch (IamException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public void deleteTemplate(String templateName) {
        getEc2Client().deleteLaunchTemplate(name ->
name.launchTemplateName(templateName));
        System.out.format(templateName + " was deleted.");
    }

    public void deleteAutoScaleGroup(String groupName) {
        DeleteAutoScalingGroupRequest deleteAutoScalingGroupRequest =
DeleteAutoScalingGroupRequest.builder()
                .autoScalingGroupName(groupName)
                .forceDelete(true)
                .build();


getAutoScalingClient().deleteAutoScalingGroup(deleteAutoScalingGroupRequest);
        System.out.println(groupName + " was deleted.");
    }

    /*
     * Verify the default security group of the specified VPC allows ingress from
     * this
     * computer. This can be done by allowing ingress from this computer's IP
     * address. In some situations, such as connecting from a corporate network, you
     * must instead specify a prefix list ID. You can also temporarily open the port
     * to
     * any IP address while running this example. If you do, be sure to remove
     * public
     * access when you're done.
     *
     */
    public GroupInfo verifyInboundPort(String VPC, int port, String ipAddress) {
        boolean portIsOpen = false;
        GroupInfo groupInfo = new GroupInfo();
        try {
            Filter filter = Filter.builder()
                    .name("group-name")
                    .values("default")
```

```
                .build();

        Filter filter1 = Filter.builder()
                .name("vpc-id")
                .values(VPC)
                .build();

        DescribeSecurityGroupsRequest securityGroupsRequest =
DescribeSecurityGroupsRequest.builder()
                .filters(filter, filter1)
                .build();

        DescribeSecurityGroupsResponse securityGroupsResponse = getEc2Client()
                .describeSecurityGroups(securityGroupsRequest);
        String securityGroup =
securityGroupsResponse.securityGroups().get(0).groupName();
        groupInfo.setGroupName(securityGroup);

        for (SecurityGroup secGroup : securityGroupsResponse.securityGroups()) {
            System.out.println("Found security group: " + secGroup.groupId());

            for (IpPermission ipPermission : secGroup.ipPermissions()) {
                if (ipPermission.fromPort() == port) {
                    System.out.println("Found inbound rule: " + ipPermission);
                    for (IpRange ipRange : ipPermission.ipRanges()) {
                        String cidrIp = ipRange.cidrIp();
                        if (cidrIp.startsWith(ipAddress) ||
cidrIp.equals("0.0.0.0/0")) {
                            System.out.println(cidrIp + " is applicable");
                            portIsOpen = true;
                        }
                    }

                    if (!ipPermission.prefixListIds().isEmpty()) {
                        System.out.println("Prefix lList is applicable");
                        portIsOpen = true;
                    }

                    if (!portIsOpen) {
                        System.out
                                .println("The inbound rule does not appear to be
open to either this computer's IP,"
                                        + " all IP addresses (0.0.0.0/0), or to
a prefix list ID.");
```

```
                        } else {
                            break;
                        }
                    }
                }
            }

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }

        groupInfo.setPortOpen(portIsOpen);
        return groupInfo;
    }

    /*
     * Attaches an Elastic Load Balancing (ELB) target group to this EC2 Auto
     * Scaling group.
     * The target group specifies how the load balancer forward requests to the
     * instances
     * in the group.
     */
    public void attachLoadBalancerTargetGroup(String asGroupName, String
targetGroupARN) {
        try {
            AttachLoadBalancerTargetGroupsRequest targetGroupsRequest =
AttachLoadBalancerTargetGroupsRequest.builder()
                    .autoScalingGroupName(asGroupName)
                    .targetGroupARNs(targetGroupARN)
                    .build();


getAutoScalingClient().attachLoadBalancerTargetGroups(targetGroupsRequest);
            System.out.println("Attached load balancer to " + asGroupName);

        } catch (AutoScalingException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Creates an EC2 Auto Scaling group with the specified size.
    public String[] createGroup(int groupSize, String templateName, String
autoScalingGroupName) {
```

```
       // Get availability zones.
       software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
zonesRequest =
software.amazon.awssdk.services.ec2.model.DescribeAvailabilityZonesRequest
               .builder()
               .build();

       DescribeAvailabilityZonesResponse zonesResponse =
getEc2Client().describeAvailabilityZones(zonesRequest);
       List<String> availabilityZoneNames =
zonesResponse.availabilityZones().stream()

.map(software.amazon.awssdk.services.ec2.model.AvailabilityZone::zoneName)
               .collect(Collectors.toList());

       String availabilityZones = String.join(",", availabilityZoneNames);
       LaunchTemplateSpecification specification =
LaunchTemplateSpecification.builder()
               .launchTemplateName(templateName)
               .version("$Default")
               .build();

       String[] zones = availabilityZones.split(",");
       CreateAutoScalingGroupRequest groupRequest =
CreateAutoScalingGroupRequest.builder()
               .launchTemplate(specification)
               .availabilityZones(zones)
               .maxSize(groupSize)
               .minSize(groupSize)
               .autoScalingGroupName(autoScalingGroupName)
               .build();

       try {
           getAutoScalingClient().createAutoScalingGroup(groupRequest);

       } catch (AutoScalingException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       System.out.println("Created an EC2 Auto Scaling group named " +
autoScalingGroupName);
       return zones;
   }
```

```
    public String getDefaultVPC() {
        // Define the filter.
        Filter defaultFilter = Filter.builder()
                .name("is-default")
                .values("true")
                .build();

        software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest request =
software.amazon.awssdk.services.ec2.model.DescribeVpcsRequest
                .builder()
                .filters(defaultFilter)
                .build();

        DescribeVpcsResponse response = getEc2Client().describeVpcs(request);
        return response.vpcs().get(0).vpcId();
    }

    // Gets the default subnets in a VPC for a specified list of Availability Zones.
    public List<Subnet> getSubnets(String vpcId, String[] availabilityZones) {
        List<Subnet> subnets = null;
        Filter vpcFilter = Filter.builder()
                .name("vpc-id")
                .values(vpcId)
                .build();

        Filter azFilter = Filter.builder()
                .name("availability-zone")
                .values(availabilityZones)
                .build();

        Filter defaultForAZ = Filter.builder()
                .name("default-for-az")
                .values("true")
                .build();

        DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                .filters(vpcFilter, azFilter, defaultForAZ)
                .build();

        DescribeSubnetsResponse response = getEc2Client().describeSubnets(request);
        subnets = response.subnets();
        return subnets;
    }
```

```
   // Gets data about the instances in the EC2 Auto Scaling group.
   public String getBadInstance(String groupName) {
       DescribeAutoScalingGroupsRequest request =
DescribeAutoScalingGroupsRequest.builder()
               .autoScalingGroupNames(groupName)
               .build();

       DescribeAutoScalingGroupsResponse response =
getAutoScalingClient().describeAutoScalingGroups(request);
       AutoScalingGroup autoScalingGroup = response.autoScalingGroups().get(0);
       List<String> instanceIds = autoScalingGroup.instances().stream()
               .map(instance -> instance.instanceId())
               .collect(Collectors.toList());

       String[] instanceIdArray = instanceIds.toArray(new String[0]);
       for (String instanceId : instanceIdArray) {
           System.out.println("Instance ID: " + instanceId);
           return instanceId;
       }
       return "";
   }

   // Gets data about the profile associated with an instance.
   public String getInstanceProfile(String instanceId) {
       Filter filter = Filter.builder()
               .name("instance-id")
               .values(instanceId)
               .build();

       DescribeIamInstanceProfileAssociationsRequest associationsRequest =
DescribeIamInstanceProfileAssociationsRequest
               .builder()
               .filters(filter)
               .build();

       DescribeIamInstanceProfileAssociationsResponse response = getEc2Client()
               .describeIamInstanceProfileAssociations(associationsRequest);
       return response.iamInstanceProfileAssociations().get(0).associationId();
   }

   public void deleteRolesPolicies(String policyName, String roleName, String
InstanceProfile) {
```

```
        ListPoliciesRequest listPoliciesRequest =
 ListPoliciesRequest.builder().build();
        ListPoliciesResponse listPoliciesResponse =
 getIAMClient().listPolicies(listPoliciesRequest);
        for (Policy policy : listPoliciesResponse.policies()) {
            if (policy.policyName().equals(policyName)) {
                // List the entities (users, groups, roles) that are attached to the
 policy.

 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
 listEntitiesRequest =
 software.amazon.awssdk.services.iam.model.ListEntitiesForPolicyRequest
                        .builder()
                        .policyArn(policy.arn())
                        .build();
                ListEntitiesForPolicyResponse listEntitiesResponse = iamClient
                        .listEntitiesForPolicy(listEntitiesRequest);
                if (!listEntitiesResponse.policyGroups().isEmpty() || !
listEntitiesResponse.policyUsers().isEmpty()
                        || !listEntitiesResponse.policyRoles().isEmpty()) {
                    // Detach the policy from any entities it is attached to.
                    DetachRolePolicyRequest detachPolicyRequest =
 DetachRolePolicyRequest.builder()
                            .policyArn(policy.arn())
                            .roleName(roleName) // Specify the name of the IAM role
                            .build();

                    getIAMClient().detachRolePolicy(detachPolicyRequest);
                    System.out.println("Policy detached from entities.");
                }

                // Now, you can delete the policy.
                DeletePolicyRequest deletePolicyRequest =
 DeletePolicyRequest.builder()
                        .policyArn(policy.arn())
                        .build();

                getIAMClient().deletePolicy(deletePolicyRequest);
                System.out.println("Policy deleted successfully.");
                break;
            }
        }

        // List the roles associated with the instance profile
```

```
        ListInstanceProfilesForRoleRequest listRolesRequest =
 ListInstanceProfilesForRoleRequest.builder()
                .roleName(roleName)
                .build();

        // Detach the roles from the instance profile
        ListInstanceProfilesForRoleResponse listRolesResponse =
 iamClient.listInstanceProfilesForRole(listRolesRequest);
        for (software.amazon.awssdk.services.iam.model.InstanceProfile profile :
 listRolesResponse.instanceProfiles()) {
            RemoveRoleFromInstanceProfileRequest removeRoleRequest =
 RemoveRoleFromInstanceProfileRequest.builder()
                    .instanceProfileName(InstanceProfile)
                    .roleName(roleName) // Remove the extra dot here
                    .build();

            getIAMClient().removeRoleFromInstanceProfile(removeRoleRequest);
            System.out.println("Role " + roleName + " removed from instance profile
 " + InstanceProfile);
        }

        // Delete the instance profile after removing all roles
        DeleteInstanceProfileRequest deleteInstanceProfileRequest =
 DeleteInstanceProfileRequest.builder()
                .instanceProfileName(InstanceProfile)
                .build();

        getIAMClient().deleteInstanceProfile(r ->
 r.instanceProfileName(InstanceProfile));
        System.out.println(InstanceProfile + " Deleted");
        System.out.println("All roles and policies are deleted.");
    }
}
```

Membuat kelas yang menggabungkan tindakan Penyeimbangan Beban Elastis.

```
public class LoadBalancer {
    public ElasticLoadBalancingV2Client elasticLoadBalancingV2Client;

    public ElasticLoadBalancingV2Client getLoadBalancerClient() {
        if (elasticLoadBalancingV2Client == null) {
            elasticLoadBalancingV2Client = ElasticLoadBalancingV2Client.builder()
```

```
                    .region(Region.US_EAST_1)
                    .build();
        }

        return elasticLoadBalancingV2Client;
    }

    // Checks the health of the instances in the target group.
    public List<TargetHealthDescription> checkTargetHealth(String targetGroupName) {
        DescribeTargetGroupsRequest targetGroupsRequest =
DescribeTargetGroupsRequest.builder()
                .names(targetGroupName)
                .build();

        DescribeTargetGroupsResponse tgResponse =
getLoadBalancerClient().describeTargetGroups(targetGroupsRequest);

        DescribeTargetHealthRequest healthRequest =
DescribeTargetHealthRequest.builder()
                .targetGroupArn(tgResponse.targetGroups().get(0).targetGroupArn())
                .build();

        DescribeTargetHealthResponse healthResponse =
getLoadBalancerClient().describeTargetHealth(healthRequest);
        return healthResponse.targetHealthDescriptions();
    }

    // Gets the HTTP endpoint of the load balancer.
    public String getEndpoint(String lbName) {
        DescribeLoadBalancersResponse res = getLoadBalancerClient()
                .describeLoadBalancers(describe -> describe.names(lbName));
        return res.loadBalancers().get(0).dnsName();
    }

    // Deletes a load balancer.
    public void deleteLoadBalancer(String lbName) {
        try {
            // Use a waiter to delete the Load Balancer.
            DescribeLoadBalancersResponse res = getLoadBalancerClient()
                    .describeLoadBalancers(describe -> describe.names(lbName));
            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
```

```
                    .loadBalancerArns(res.loadBalancers().get(0).loadBalancerArn())
                    .build();

            getLoadBalancerClient().deleteLoadBalancer(
                    builder ->
builder.loadBalancerArn(res.loadBalancers().get(0).loadBalancerArn()));
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancersDeleted(request);
            waiterResponse.matched().response().ifPresent(System.out::println);

        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(lbName + " was deleted.");
    }

    // Deletes the target group.
    public void deleteTargetGroup(String targetGroupName) {
        try {
            DescribeTargetGroupsResponse res = getLoadBalancerClient()
                    .describeTargetGroups(describe ->
describe.names(targetGroupName));
            getLoadBalancerClient()
                    .deleteTargetGroup(builder ->
builder.targetGroupArn(res.targetGroups().get(0).targetGroupArn()));
        } catch (ElasticLoadBalancingV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        System.out.println(targetGroupName + " was deleted.");
    }

    // Verify this computer can successfully send a GET request to the load balancer
    // endpoint.
    public boolean verifyLoadBalancerEndpoint(String elbDnsName) throws IOException,
InterruptedException {
        boolean success = false;
        int retries = 3;
        CloseableHttpClient httpClient = HttpClients.createDefault();

        // Create an HTTP GET request to the ELB.
        HttpGet httpGet = new HttpGet("http://" + elbDnsName);
        try {
            while ((!success) && (retries > 0)) {
```

```
                // Execute the request and get the response.
                HttpResponse response = httpClient.execute(httpGet);
                int statusCode = response.getStatusLine().getStatusCode();
                System.out.println("HTTP Status Code: " + statusCode);
                if (statusCode == 200) {
                    success = true;
                } else {
                    retries--;
                    System.out.println("Got connection error from load balancer
endpoint, retrying...");
                    TimeUnit.SECONDS.sleep(15);
                }
            }

        } catch (org.apache.http.conn.HttpHostConnectException e) {
            System.out.println(e.getMessage());
        }

        System.out.println("Status.." + success);
        return success;
    }

    /*
     * Creates an Elastic Load Balancing target group. The target group specifies
     * how
     * the load balancer forward requests to instances in the group and how instance
     * health is checked.
     */
    public String createTargetGroup(String protocol, int port, String vpcId, String
targetGroupName) {
        CreateTargetGroupRequest targetGroupRequest =
CreateTargetGroupRequest.builder()
                .healthCheckPath("/healthcheck")
                .healthCheckTimeoutSeconds(5)
                .port(port)
                .vpcId(vpcId)
                .name(targetGroupName)
                .protocol(protocol)
                .build();

        CreateTargetGroupResponse targetGroupResponse =
getLoadBalancerClient().createTargetGroup(targetGroupRequest);
        String targetGroupArn =
targetGroupResponse.targetGroups().get(0).targetGroupArn();
```

```
        String targetGroup =
targetGroupResponse.targetGroups().get(0).targetGroupName();
        System.out.println("The " + targetGroup + " was created with ARN" +
targetGroupArn);
        return targetGroupArn;
    }

    /*
     * Creates an Elastic Load Balancing load balancer that uses the specified
     * subnets
     * and forwards requests to the specified target group.
     */
    public String createLoadBalancer(List<Subnet> subnetIds, String targetGroupARN,
String lbName, int port,
            String protocol) {
        try {
            List<String> subnetIdStrings = subnetIds.stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());

            CreateLoadBalancerRequest balancerRequest =
CreateLoadBalancerRequest.builder()
                    .subnets(subnetIdStrings)
                    .name(lbName)
                    .scheme("internet-facing")
                    .build();

            // Create and wait for the load balancer to become available.
            CreateLoadBalancerResponse lsResponse =
getLoadBalancerClient().createLoadBalancer(balancerRequest);
            String lbARN = lsResponse.loadBalancers().get(0).loadBalancerArn();

            ElasticLoadBalancingV2Waiter loadBalancerWaiter =
getLoadBalancerClient().waiter();
            DescribeLoadBalancersRequest request =
DescribeLoadBalancersRequest.builder()
                    .loadBalancerArns(lbARN)
                    .build();

            System.out.println("Waiting for Load Balancer " + lbName + " to become
available.");
            WaiterResponse<DescribeLoadBalancersResponse> waiterResponse =
loadBalancerWaiter
                    .waitUntilLoadBalancerAvailable(request);
```

```
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Load Balancer " + lbName + " is available.");

            // Get the DNS name (endpoint) of the load balancer.
            String lbDNSName = lsResponse.loadBalancers().get(0).dnsName();
            System.out.println("*** Load Balancer DNS Name: " + lbDNSName);

            // Create a listener for the load balance.
            Action action = Action.builder()
                    .targetGroupArn(targetGroupARN)
                    .type("forward")
                    .build();

            CreateListenerRequest listenerRequest = CreateListenerRequest.builder()

 .loadBalancerArn(lsResponse.loadBalancers().get(0).loadBalancerArn())
                    .defaultActions(action)
                    .port(port)
                    .protocol(protocol)
                    .build();

            getLoadBalancerClient().createListener(listenerRequest);
            System.out.println("Created listener to forward traffic from load
 balancer " + lbName + " to target group "
                    + targetGroupARN);

            // Return the load balancer DNS name.
            return lbDNSName;

        } catch (ElasticLoadBalancingV2Exception e) {
            e.printStackTrace();
        }
        return "";
    }
}
```

Membuat kelas yang menggunakan DynamoDB untuk menyimulasikan layanan yang direkomendasikan.

```
public class Database {

    private static DynamoDbClient dynamoDbClient;
```

```
    public static DynamoDbClient getDynamoDbClient() {
        if (dynamoDbClient == null) {
            dynamoDbClient = DynamoDbClient.builder()
                    .region(Region.US_EAST_1)
                    .build();
        }
        return dynamoDbClient;
    }

    // Checks to see if the Amazon DynamoDB table exists.
    private boolean doesTableExist(String tableName) {
        try {
            // Describe the table and catch any exceptions.
            DescribeTableRequest describeTableRequest =
DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            getDynamoDbClient().describeTable(describeTableRequest);
            System.out.println("Table '" + tableName + "' exists.");
            return true;

        } catch (ResourceNotFoundException e) {
            System.out.println("Table '" + tableName + "' does not exist.");
        } catch (DynamoDbException e) {
            System.err.println("Error checking table existence: " + e.getMessage());
        }
        return false;
    }

    /*
     * Creates a DynamoDB table to use a recommendation service. The table has a
     * hash key named 'MediaType' that defines the type of media recommended, such
     * as
     * Book or Movie, and a range key named 'ItemId' that, combined with the
     * MediaType,
     * forms a unique identifier for the recommended item.
     */
    public void createTable(String tableName, String fileName) throws IOException {
        // First check to see if the table exists.
        boolean doesExist = doesTableExist(tableName);
        if (!doesExist) {
            DynamoDbWaiter dbWaiter = getDynamoDbClient().waiter();
```

```
            CreateTableRequest createTableRequest = CreateTableRequest.builder()
                    .tableName(tableName)
                    .attributeDefinitions(
                            AttributeDefinition.builder()
                                    .attributeName("MediaType")
                                    .attributeType(ScalarAttributeType.S)
                                    .build(),
                            AttributeDefinition.builder()
                                    .attributeName("ItemId")
                                    .attributeType(ScalarAttributeType.N)
                                    .build())
                    .keySchema(
                            KeySchemaElement.builder()
                                    .attributeName("MediaType")
                                    .keyType(KeyType.HASH)
                                    .build(),
                            KeySchemaElement.builder()
                                    .attributeName("ItemId")
                                    .keyType(KeyType.RANGE)
                                    .build())
                    .provisionedThroughput(
                            ProvisionedThroughput.builder()
                                    .readCapacityUnits(5L)
                                    .writeCapacityUnits(5L)
                                    .build())
                    .build();

            getDynamoDbClient().createTable(createTableRequest);
            System.out.println("Creating table " + tableName + "...");

            // Wait until the Amazon DynamoDB table is created.
            DescribeTableRequest tableRequest = DescribeTableRequest.builder()
                    .tableName(tableName)
                    .build();

            WaiterResponse<DescribeTableResponse> waiterResponse =
dbWaiter.waitUntilTableExists(tableRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("Table " + tableName + " created.");

            // Add records to the table.
            populateTable(fileName, tableName);
        }
    }
```

```
    public void deleteTable(String tableName) {
        getDynamoDbClient().deleteTable(table -> table.tableName(tableName));
        System.out.println("Table " + tableName + " deleted.");
    }

    // Populates the table with data located in a JSON file using the DynamoDB
    // enhanced client.
    public void populateTable(String fileName, String tableName) throws IOException
{
        DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()
                .dynamoDbClient(getDynamoDbClient())
                .build();
        ObjectMapper objectMapper = new ObjectMapper();
        File jsonFile = new File(fileName);
        JsonNode rootNode = objectMapper.readTree(jsonFile);

        DynamoDbTable<Recommendation> mappedTable = enhancedClient.table(tableName,
                TableSchema.fromBean(Recommendation.class));
        for (JsonNode currentNode : rootNode) {
            String mediaType = currentNode.path("MediaType").path("S").asText();
            int itemId = currentNode.path("ItemId").path("N").asInt();
            String title = currentNode.path("Title").path("S").asText();
            String creator = currentNode.path("Creator").path("S").asText();

            // Create a Recommendation object and set its properties.
            Recommendation rec = new Recommendation();
            rec.setMediaType(mediaType);
            rec.setItemId(itemId);
            rec.setTitle(title);
            rec.setCreator(creator);

            // Put the item into the DynamoDB table.
            mappedTable.putItem(rec); // Add the Recommendation to the list.
        }
        System.out.println("Added all records to the " + tableName);
    }
}
```

Membuat kelas yang mengabungkan tindakan Systems Manager.

```
public class ParameterHelper {
```

```
    String tableName = "doc-example-resilient-architecture-table";
    String dyntable = "doc-example-recommendation-service";
    String failureResponse = "doc-example-resilient-architecture-failure-response";
    String healthCheck = "doc-example-resilient-architecture-health-check";

    public void reset() {
        put(dyntable, tableName);
        put(failureResponse, "none");
        put(healthCheck, "shallow");
    }

    public void put(String name, String value) {
        SsmClient ssmClient = SsmClient.builder()
                .region(Region.US_EAST_1)
                .build();

        PutParameterRequest parameterRequest = PutParameterRequest.builder()
                .name(name)
                .value(value)
                .overwrite(true)
                .type("String")
                .build();

        ssmClient.putParameter(parameterRequest);
        System.out.printf("Setting demo parameter %s to '%s'.", name, value);
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AttachLoadBalancerTargetGroups
  - CreateAutoScalingGroup
  - CreateInstanceProfile
  - CreateLaunchTemplate
  - CreateListener
  - CreateLoadBalancer
  - CreateTargetGroup
  - DeleteAutoScalingGroup
  - DeleteInstanceProfile

- DeleteLaunchTemplate
- DeleteLoadBalancer
- DeleteTargetGroup
- DescribeAutoScalingGroups
- DescribeAvailabilityZones
- DescribeIamInstanceProfileAssociations
- DescribeInstances
- DescribeLoadBalancers
- DescribeSubnets
- DescribeTargetGroups
- DescribeTargetHealth
- DescribeVpcs
- RebootInstances
- ReplaceIamInstanceProfileAssociation
- TerminateInstanceInAutoScalingGroup
- UpdateAutoScalingGroup

Bekerja dengan API Pembuat Kebijakan IAM

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat kebijakan IAM dengan menggunakan API berorientasi objek.
- Gunakan API Pembuat Kebijakan IAM dengan layanan IAM.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh menggunakan impor berikut.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.policybuilder.iam.IamConditionOperator;
import software.amazon.awssdk.policybuilder.iam.IamEffect;
import software.amazon.awssdk.policybuilder.iam.IamPolicy;
import software.amazon.awssdk.policybuilder.iam.IamPolicyWriter;
import software.amazon.awssdk.policybuilder.iam.IamPrincipal;
import software.amazon.awssdk.policybuilder.iam.IamPrincipalType;
import software.amazon.awssdk.policybuilder.iam.IamResource;
import software.amazon.awssdk.policybuilder.iam.IamStatement;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iam.IamClient;
import software.amazon.awssdk.services.iam.model.GetPolicyResponse;
import software.amazon.awssdk.services.iam.model.GetPolicyVersionResponse;
import software.amazon.awssdk.services.sts.StsClient;

import java.net.URLDecoder;
import java.nio.charset.StandardCharsets;
import java.util.Arrays;
import java.util.List;
```

Buat kebijakan berbasis waktu.

```
        public String timeBasedPolicyExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:GetItem")
                                                .addResource(IamResource.ALL)
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.DATE_GREATER_THAN)

 .key("aws:CurrentTime")

 .value("2020-04-01T00:00:00Z"))
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.DATE_LESS_THAN)

 .key("aws:CurrentTime")
```

```
 .value("2020-06-30T23:59:59Z")))
                                .build();

                // Use an IamPolicyWriter to write out the JSON string to a more
 readable
                // format.
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true)
                                .build());
        }
```

Buat kebijakan dengan beberapa kondisi.

```
        public String multipleConditionsExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:GetItem")
                                                .addAction("dynamodb:BatchGetItem")
                                                .addAction("dynamodb:Query")
                                                .addAction("dynamodb:PutItem")
                                                .addAction("dynamodb:UpdateItem")
                                                .addAction("dynamodb:DeleteItem")

 .addAction("dynamodb:BatchWriteItem")

 .addResource("arn:aws:dynamodb:*:*:table/table-name")

 .addConditions(IamConditionOperator.STRING_EQUALS

 .addPrefix("ForAllValues:"),

 "dynamodb:Attributes",
                                                                        List.of("column-
name1", "column-name2", "column-name3"))
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.STRING_EQUALS

 .addSuffix("IfExists"))
```

```
 .key("dynamodb:Select")

 .value("SPECIFIC_ATTRIBUTES")))
                                .build();

                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true).build());
        }
```

Gunakan prinsip dalam kebijakan.

```
        public String specifyPrincipalsExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.DENY)
                                                .addAction("s3:*")
                                                .addPrincipal(IamPrincipal.ALL)
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket/*")
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket")
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.ARN_NOT_EQUALS)

 .key("aws:PrincipalArn")

 .value("arn:aws:iam::444455556666:user/user-name")))
                                .build();
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true).build());
        }
```

Izinkan akses lintas akun.

```
        public String allowCrossAccountAccessExample() {
                IamPolicy policy = IamPolicy.builder()
                                .addStatement(b -> b
                                                .effect(IamEffect.ALLOW)
```

```
                                                .addPrincipal(IamPrincipalType.AWS,
 "111122223333")
                                                .addAction("s3:PutObject")
                                                .addResource("arn:aws:s3:::amzn-s3-
demo-bucket/*")
                                                .addCondition(b1 -> b1

 .operator(IamConditionOperator.STRING_EQUALS)
                                                                    .key("s3:x-amz-acl")
                                                                    .value("bucket-
owner-full-control")))
                                .build();
                return policy.toJson(IamPolicyWriter.builder()
                                .prettyPrint(true).build());
        }
```

Bangun dan unggah file`IamPolicy`.

```
        public String createAndUploadPolicyExample(IamClient iam, String accountID,
 String policyName) {
                // Build the policy.
                IamPolicy policy = IamPolicy.builder() // 'version' defaults to
 "2012-10-17".
                                .addStatement(IamStatement.builder()
                                                .effect(IamEffect.ALLOW)
                                                .addAction("dynamodb:PutItem")
                                                .addResource("arn:aws:dynamodb:us-
east-1:" + accountID
                                                                    + ":table/
exampleTableName")
                                                .build())
                                .build();
                // Upload the policy.
                iam.createPolicy(r ->
 r.policyName(policyName).policyDocument(policy.toJson()));
                return
 policy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
        }
```

Unduh dan bekerja dengan file`IamPolicy`.

```
       public String createNewBasedOnExistingPolicyExample(IamClient iam, String
accountID, String policyName,
                       String newPolicyName) {

               String policyArn = "arn:aws:iam::" + accountID + ":policy/" +
policyName;
               GetPolicyResponse getPolicyResponse = iam.getPolicy(r ->
r.policyArn(policyArn));

               String policyVersion =
getPolicyResponse.policy().defaultVersionId();
               GetPolicyVersionResponse getPolicyVersionResponse = iam
                               .getPolicyVersion(r ->
r.policyArn(policyArn).versionId(policyVersion));

               // Create an IamPolicy instance from the JSON string returned from
IAM.
               String decodedPolicy =
URLDecoder.decode(getPolicyVersionResponse.policyVersion().document(),
                               StandardCharsets.UTF_8);
               IamPolicy policy = IamPolicy.fromJson(decodedPolicy);

               /*
                * All IamPolicy components are immutable, so use the copy method
that creates a
                * new instance that
                * can be altered in the same method call.
                *
                * Add the ability to get an item from DynamoDB as an additional
action.
                */
               IamStatement newStatement = policy.statements().get(0).copy(s ->
s.addAction("dynamodb:GetItem"));

               // Create a new statement that replaces the original statement.
               IamPolicy newPolicy = policy.copy(p ->
p.statements(Arrays.asList(newStatement)));

               // Upload the new policy. IAM now has both policies.
               iam.createPolicy(r -> r.policyName(newPolicyName)
                               .policyDocument(newPolicy.toJson()));
```

```
                return
newPolicy.toJson(IamPolicyWriter.builder().prettyPrint(true).build());
        }
```

- Untuk informasi selengkapnya, silakan lihat Panduan Developer AWS SDK for Java 2.x.
- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreatePolicy
  - GetPolicy
  - GetPolicyVersion

# Contoh Amazon Inspector menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon Inspector.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan

## Memulai

Halo

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloInspector {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloInspector.class);

    public static void main(String[] args) {
        logger.info("Hello Amazon Inspector!");

        try (Inspector2Client inspectorClient = Inspector2Client.builder().build())
 {

            logger.info("Listing member accounts for this Inspector administrator
 account...");
            listMembers(inspectorClient);

            logger.info("The Hello Inspector example completed successfully.");

        } catch (Inspector2Exception e) {
            logger.error("Error: {}", e.getMessage());
            logger.info("Troubleshooting:");
            logger.info("1. Verify AWS credentials are configured");
            logger.info("2. Check IAM permissions for Inspector2");
            logger.info("3. Ensure Inspector2 is enabled in your account");
            logger.info("4. Verify you're using a supported region");
        }
    }
```

```
    /**
     * Lists all member accounts associated with the current Inspector administrator
 account.
     *
     * @param inspectorClient The Inspector2Client used to interact with AWS
 Inspector.
     */
    public static void listMembers(Inspector2Client inspectorClient) {
        try {
            ListMembersRequest request = ListMembersRequest.builder()
                    .maxResults(50) // optional: limit results
                    .build();

            ListMembersResponse response = inspectorClient.listMembers(request);
            List<Member> members = response.members();

            if (members == null || members.isEmpty()) {
                logger.info("No member accounts found for this Inspector
 administrator account.");
                return;
            }

            logger.info("Found {} member account(s):", members.size());
            for (Member member : members) {
                logger.info(" - Account ID: {}, Status: {}",
                        member.accountId(),
                        member.relationshipStatusAsString());
            }

        } catch (Inspector2Exception e) {
            logger.error("Failed to list members: {}",
 e.awsErrorDetails().errorMessage());
        }
    }
}
```

- Untuk detail API, lihat ListMembersdi Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Periksa status akun Inspector.
- Pastikan Inspector diaktifkan.
- Menganalisis temuan keamanan.
- Periksa cakupan pemindaian.
- Buat filter temuan.
- Daftar filter yang ada.
- Periksa penggunaan dan biaya.
- Dapatkan statistik cakupan.
- Hapus filter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan fitur.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class InspectorScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
```

```
   private static final Logger logger =
LoggerFactory.getLogger(InspectorScenario.class);
   private static final Scanner scanner = new Scanner(System.in);

   public static void main(String[] args) {
       InspectorActions inspectorActions = new InspectorActions();
       logger.info("Amazon Inspector Basics Scenario");

       logger.info("""
                   Amazon Inspector is a security assessment service provided by
Amazon Web Services (AWS) that helps
                   improve the security and compliance of applications deployed on
AWS. It automatically assesses
                   applications for vulnerabilities or deviations from best
practices. By leveraging Amazon Inspector,
                   users can gain insights into the overall security state of their
application and identify potential
                   security risks.

                   This service operates by conducting both network and host-based
assessments, allowing it to detect a
                   wide range of security issues, including those related to
operating systems, network configurations,
                   and application dependencies.
                   """);

       waitForInputToContinue();

       try {
           runScenario(inspectorActions);

           logger.info("");
           logger.info("Scenario completed successfully!");
           logger.info("");
           logger.info("What you learned:");
           logger.info("  - How to check Inspector account status");
           logger.info("  - How to enable Inspector");
           logger.info("  - How to list and analyze findings");
           logger.info("  - How to check coverage information");
           logger.info("  - How to create and manage filters");
           logger.info("  - How to track usage and costs");
           logger.info("  - How to clean up resources");
           logger.info("");
```

```
        } catch (Exception ex) {
            logger.error("Scenario failed due to unexpected error: {}",
ex.getMessage(), ex);

        } finally {
            scanner.close();
            logger.info("Exiting...");
        }
    }

    /**
     * Runs the Inspector scenario in a step-by-step sequence.
     *
     * All InspectorActions methods are asynchronous and return CompletableFutures.
     * Each step ends with .join(). Any async exception thrown during .join() will
bubble up
     *
     */
    public static void runScenario(InspectorActions actions) {
        String filterArn = null;
        boolean inspectorEnabled = false;

        try {
            // Step 1
            logger.info(DASHES);
            logger.info("Step 1: Checking Inspector account status...");
            String status = actions.getAccountStatusAsync().join();
            logger.info(status);
            waitForInputToContinue();

            // Step 2
            logger.info(DASHES);
            logger.info("Step 2: Enabling Inspector...");
            String message = actions.enableInspectorAsync(null).join();
            logger.info(message);
            inspectorEnabled = true;  // track that Inspector was enabled
            waitForInputToContinue();

            // Step 3
            logger.info(DASHES);
            logger.info("Step 3: Listing LOW severity findings...");

            // Call the service method
```

```
            List<String> allFindings =
actions.listLowSeverityFindingsAsync().join();

            if (!allFindings.isEmpty()) {
                // Only proceed if there are findings
                String lastArn = allFindings.get(allFindings.size() - 1);
                logger.info("Look up details on: {}", lastArn);
                waitForInputToContinue();
                String details = actions.getFindingDetailsAsync(lastArn).join();
                logger.info(details);
            } else {
                logger.info("No LOW severity findings found.");
            }

            waitForInputToContinue();

            // Step 4
            logger.info(DASHES);
            logger.info("Step 4: Listing coverage...");
            String coverage = actions.listCoverageAsync(5).join();
            logger.info(coverage);
            waitForInputToContinue();

            // Step 5
            logger.info(DASHES);
            logger.info("Step 5: Creating filter...");
            String filterName = "suppress-low-" + System.currentTimeMillis();
            filterArn = actions.createLowSeverityFilterAsync(filterName, "Suppress
low severity findings").join();
            logger.info("Created filter: {}", filterArn);
            waitForInputToContinue();

            // Step 6
            logger.info(DASHES);
            logger.info("Step 6: Listing filters...");
            String filters = actions.listFiltersAsync(10).join();
            logger.info(filters);
            waitForInputToContinue();

            // Step 7
            logger.info(DASHES);
            logger.info("Step 7: Usage totals...");
            String usage = actions.listUsageTotalsAsync(null, 10).join();
            logger.info(usage);
```

```
            waitForInputToContinue();

            // Step 8
            logger.info(DASHES);
            logger.info("Step 8: Coverage statistics...");
            String stats = actions.listCoverageStatisticsAsync().join();
            logger.info(stats);
            waitForInputToContinue();

            // Step 9
            logger.info(DASHES);
            logger.info("Step 9: Delete filter?");
            logger.info("Filter ARN: {}", filterArn);
            logger.info("Delete the filter and disable Inspector? (y/n)");

            if (scanner.nextLine().trim().equalsIgnoreCase("y")) {
                actions.deleteFilterAsync(filterArn).join();
                logger.info("Filter deleted.");
                String disableMsg = actions.disableInspectorAsync(null).join();
                logger.info(disableMsg);
                inspectorEnabled = false; // track that Inspector was disabled
            }

            waitForInputToContinue();

        } catch (Exception ex) {
            logger.error("Scenario encountered an error: {}", ex.getMessage(), ex);
            // Rethrow the exception
            throw ex;

        } finally {
            // Cleanup in case of an exception
            if (filterArn != null) {
                try {
                    actions.deleteFilterAsync(filterArn).join();
                    logger.info("Cleanup: Filter deleted.");
                } catch (Exception e) {
                    logger.warn("Failed to delete filter during cleanup: {}",
e.getMessage(), e);
                }
            }

            if (inspectorEnabled) {
                try {
```

```
                    actions.disableInspectorAsync(null).join();
                    logger.info("Cleanup: Inspector disabled.");
                } catch (Exception e) {
                    logger.warn("Failed to disable Inspector during cleanup: {}",
 e.getMessage(), e);
                }
            }
        }
    }

    // Utility Method
    private static void waitForInputToContinue() {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' to continue:");
            String input = scanner.nextLine().trim();
            if (input.equalsIgnoreCase("c")) break;
            logger.info("Invalid input, try again.");
        }
    }
}
```

Kelas pembungkus untuk metode SDK.

```
public class InspectorActions {
    private static Inspector2AsyncClient inspectorAsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(InspectorActions.class);

    private static Inspector2AsyncClient getAsyncClient() {
        if (inspectorAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
```

```
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            inspectorAsyncClient = Inspector2AsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return inspectorAsyncClient;
    }


    /**
     * Enables AWS Inspector for the provided account(s) and default resource types.
     *
     * @param accountIds Optional list of AWS account IDs.
     */
    public CompletableFuture<String> enableInspectorAsync(List<String> accountIds) {

        // The resource types to enable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        EnableRequest.Builder requestBuilder = EnableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }

        EnableRequest request = requestBuilder.build();
        return getAsyncClient().enable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be enabled for this
account: %s".formatted(cause.getMessage()),
```

```
                                cause
                        );

                    }

                    if (cause instanceof Inspector2Exception) {
                        Inspector2Exception e = (Inspector2Exception) cause;
                        throw new CompletionException(
                                "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                cause
                        );
                    }

                    throw new CompletionException(
                            "Failed to enable Inspector:
%s".formatted(exception.getMessage()),
                            exception
                    );
                }
            })
            .thenApply(response -> {
                StringBuilder summary = new StringBuilder("Enable results:\n");

                if (response.accounts() == null ||
response.accounts().isEmpty()) {
                    summary.append("Inspector may already be enabled for all
target accounts.");
                    return summary.toString();
                }

                for (Account account : response.accounts()) {
                    String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                    String status = account.status() != null ?
account.statusAsString() : "Unknown";
                    summary.append(" • Account: ").append(accountId)
                            .append(" # Status: ").append(status).append("\n");
                }

                return summary.toString();
            });
    }
```

```
   /**
    * Retrieves and prints the coverage statistics using a paginator.
    */
   public CompletableFuture<String> listCoverageStatisticsAsync() {
       ListCoverageStatisticsRequest request =
ListCoverageStatisticsRequest.builder()
               .build();

       return getAsyncClient().listCoverageStatistics(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();

                       if (cause instanceof ValidationException) {
                           throw new CompletionException(
                                   "Validation error listing coverage statistics:
%s".formatted(cause.getMessage()),
                                   cause
                           );
                       }

                       if (cause instanceof Inspector2Exception) {
                           Inspector2Exception e = (Inspector2Exception) cause;

                           throw new CompletionException(
                                   "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                   e
                           );
                       }

                       throw new CompletionException(
                               "Unexpected error listing coverage statistics:
%s".formatted(exception.getMessage()),
                               exception
                       );
                   }
               })
               .thenApply(response -> {
                   List<Counts> countsList = response.countsByGroup();
                   StringBuilder sb = new StringBuilder();

                   if (countsList == null || countsList.isEmpty()) {
```

```
                        sb.append("No coverage statistics available.\n");
                        return sb.toString();
                    }

                    sb.append("Coverage Statistics:\n");

                    for (Counts c : countsList) {
                        sb.append("  Group: ").append(c.groupKey()).append("\n")
                                .append("    Total Count:
").append(c.count()).append("\n\n");
                    }

                    return sb.toString();
                });
    }


    /**
     * Asynchronously lists Inspector2 usage totals using a paginator.
     *
     * @param accountIds optional list of account IDs
     * @param maxResults maximum results per page
     * @return CompletableFuture completed with formatted summary text
     */
    public CompletableFuture<String> listUsageTotalsAsync(
            List<String> accountIds,
            int maxResults) {

        logger.info("Starting usage totals paginator…");

        ListUsageTotalsRequest.Builder builder = ListUsageTotalsRequest.builder()
                .maxResults(maxResults);

        if (accountIds != null && !accountIds.isEmpty()) {
            builder.accountIds(accountIds);
        }

        ListUsageTotalsRequest request = builder.build();
        ListUsageTotalsPublisher paginator =
getAsyncClient().listUsageTotalsPaginator(request);
        StringBuilder summaryBuilder = new StringBuilder();

        return paginator.subscribe(response -> {
                    if (response.totals() != null && !response.totals().isEmpty()) {
```

```
                        response.totals().forEach(total -> {
                            if (total.usage() != null) {
                                total.usage().forEach(usage -> {
                                    logger.info("Usage: {} = {}",
usage.typeAsString(), usage.total());
                                    summaryBuilder.append(usage.typeAsString())
                                            .append(": ")
                                            .append(usage.total())
                                            .append("\n");
                                });
                            }
                        });
                    } else {
                        logger.info("Page contained no usage totals.");
                    }
                }).thenRun(() -> logger.info("Successfully listed usage totals."))
                .thenApply(v -> {
                    String summary = summaryBuilder.toString();
                    return summary.isEmpty() ? "No usage totals found." : summary;
                }).exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing usage totals:
%s".formatted(ve.getMessage()),
                                ve
                        );
                    }

                    throw new CompletionException("Failed to list usage totals",
cause);
                });
    }



    /**
     * Retrieves the account status using the Inspector2Client.
     */
    public CompletableFuture<String> getAccountStatusAsync() {
        BatchGetAccountStatusRequest request =
BatchGetAccountStatusRequest.builder()
                .accountIds(Collections.emptyList())
```

```
                .build();

        return getAsyncClient().batchGetAccountStatus(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof AccessDeniedException) {
                            throw new CompletionException(
                                    "You do not have sufficient access:
%s".formatted(cause.getMessage()),
                                    cause
                            );

                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;

                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Unexpected error getting account status:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {

                    StringBuilder sb = new StringBuilder();
                    List<AccountState> accounts = response.accounts();

                    if (accounts == null || accounts.isEmpty()) {
                        sb.append("No account status returned.\n");
                        return sb.toString();
                    }

                    sb.append("Inspector Account Status:\n");
                    for (AccountState account : accounts) {
```

```
                        String accountId = account.accountId() != null
                                ? account.accountId()
                                : "Unknown";

                        sb.append("  Account ID: ").append(accountId).append("\n");

                        // Overall account state
                        if (account.state() != null && account.state().status() !=
null) {
                            sb.append("  Overall State: ")
                                    .append(account.state().status())
                                    .append("\n");
                        } else {
                            sb.append("  Overall State: Unknown\n");
                        }

                        // Resource state (only status available)
                        ResourceState resources = account.resourceState();
                        if (resources != null) {
                            sb.append("  Resource Status: available\n");
                        }

                        sb.append("\n");
                    }

                    return sb.toString();
                });
    }


    /**
     * Asynchronously lists Inspector2 filters using a paginator.
     *
     * @param maxResults maximum filters per page (nullable)
     * @return CompletableFuture completed with summary text
     */
    public CompletableFuture<String> listFiltersAsync(Integer maxResults) {
        logger.info("Starting async filters paginator…");

        ListFiltersRequest.Builder builder = ListFiltersRequest.builder();
        if (maxResults != null) {
            builder.maxResults(maxResults);
        }
```

```
        ListFiltersRequest request = builder.build();

        // Paginator from SDK
        ListFiltersPublisher paginator =
getAsyncClient().listFiltersPaginator(request);
        StringBuilder collectedFilterIds = new StringBuilder();

        return paginator.subscribe(response -> {
            response.filters().forEach(filter -> {
                logger.info("Filter: " + filter.arn());
                collectedFilterIds.append(filter.arn()).append("\n");
            });
        }).thenApply(v -> {
            String result = collectedFilterIds.toString();
            logger.info("Successfully listed all filters.");
            return result.isEmpty() ? "No filters found." : result;
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

            if (cause instanceof ValidationException ve) {
                throw new CompletionException(
                        "Validation error listing filters:
%s".formatted(ve.getMessage()),
                        ve
                );
            }

            throw new RuntimeException("Failed to list filters", ex);
        });
    }


    /**
     * Creates a new LOW severity filter in AWS Inspector2 to suppress findings.
     *
     * @param filterName  the name of the filter to create
     * @param description a descriptive string explaining the purpose of the filter
     * @return a CompletableFuture that completes with the ARN of the created filter
     * @throws CompletionException wraps any validation, Inspector2 service, or
unexpected errors
     */
    public CompletableFuture<String> createLowSeverityFilterAsync(
            String filterName,
```

```
            String description) {

        // Define a filter to match LOW severity findings.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        // Create filter criteria.
        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the filter creation request.
        CreateFilterRequest request = CreateFilterRequest.builder()
                .name(filterName)
                .filterCriteria(filterCriteria)
                .action(FilterAction.SUPPRESS)
                .description(description)
                .build();

        return getAsyncClient().createFilter(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ValidationException ve) {
                            throw new CompletionException(
                                    "Validation error creating filter:
%s".formatted(ve.getMessage()),
                                    ve
                            );
                        }

                        if (cause instanceof Inspector2Exception e) {
                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        // Unexpected async error
```

```
                        throw new CompletionException(
                                "Unexpected error creating filter:
 %s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                // Extract and return the ARN of the created filter.
                .thenApply(CreateFilterResponse::arn);
    }


    /**
     * Lists all AWS Inspector findings of LOW severity asynchronously.
     *
     * @return CompletableFuture containing a List of finding ARNs.
     * Returns an empty list if no LOW severity findings are found.
     */
    public CompletableFuture<ArrayList<String>> listLowSeverityFindingsAsync() {
        logger.info("Starting async LOW severity findings paginator…");

        // Build a filter criteria for LOW severity.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the request.
        ListFindingsRequest request = ListFindingsRequest.builder()
                .filterCriteria(filterCriteria)
                .build();

        ListFindingsPublisher paginator =
 getAsyncClient().listFindingsPaginator(request);
        List<String> allArns = Collections.synchronizedList(new ArrayList<>());

        return paginator.subscribe(response -> {
                    if (response.findings() != null && !
response.findings().isEmpty()) {
                        response.findings().forEach(finding -> {
```

```
                            logger.info("Finding ARN: {}", finding.findingArn());
                            allArns.add(finding.findingArn());
                        });
                    } else {
                        logger.info("Page contained no findings.");
                    }
                })
                .thenRun(() -> logger.info("Successfully listed all LOW severity
findings."))
                .thenApply(v -> new ArrayList<>(allArns)) // Return list instead of
a formatted string
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing LOW severity findings:
%s".formatted(ve.getMessage()),
                                ve
                        );
                    }
                    throw new RuntimeException("Failed to list LOW severity
findings", ex);
                });
    }



    /**
     * Lists AWS Inspector2 coverage details for scanned resources using a
paginator.
     *
     * @param maxResults Maximum number of resources to return.
     */
    public CompletableFuture<String> listCoverageAsync(int maxResults) {
        ListCoverageRequest initialRequest = ListCoverageRequest.builder()
                .maxResults(maxResults)
                .build();

        ListCoveragePublisher paginator =
getAsyncClient().listCoveragePaginator(initialRequest);
        StringBuilder summary = new StringBuilder();

        return paginator.subscribe(response -> {
            List<CoveredResource> coveredResources = response.coveredResources();
```

```
            if (coveredResources == null || coveredResources.isEmpty()) {
                summary.append("No coverage information available for this page.
\n");
                return;
            }

            Map<String, List<CoveredResource>> byType = coveredResources.stream()

 .collect(Collectors.groupingBy(CoveredResource::resourceTypeAsString));

            byType.forEach((type, list) ->
                    summary.append("  ").append(type)
                            .append(": ").append(list.size())
                            .append(" resource(s)\n")
            );

            // Include up to 3 sample resources per page
            for (int i = 0; i < Math.min(coveredResources.size(), 3); i++) {
                CoveredResource r = coveredResources.get(i);
                summary.append("  - ").append(r.resourceTypeAsString())
                        .append(": ").append(r.resourceId()).append("\n");
                summary.append("    Scan Type:
 ").append(r.scanTypeAsString()).append("\n");
                if (r.scanStatus() != null) {
                    summary.append("    Status:
 ").append(r.scanStatus().statusCodeAsString()).append("\n");
                }
                if (r.accountId() != null) {
                    summary.append("    Account ID:
 ").append(r.accountId()).append("\n");
                }
                summary.append("\n");
            }

        }).thenApply(v -> {
            if (summary.length() == 0) {
                return "No coverage information found across all pages.";
            } else {
                return "Coverage Information:\n" + summary.toString();
            }
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause();
            if (cause instanceof ValidationException) {
```

```
                throw new CompletionException(
                        "Validation error listing coverage: " + cause.getMessage(),
cause);
            } else if (cause instanceof Inspector2Exception e) {
                throw new CompletionException(
                        "Inspector2 service error: " +
e.awsErrorDetails().errorMessage(), e);
            }
            throw new CompletionException("Unexpected error listing coverage: " +
ex.getMessage(), ex);
        });
    }


    /**
     * Deletes an AWS Inspector2 filter.
     *
     * @param filterARN The ARN of the filter to delete.
     */
    public CompletableFuture<Void> deleteFilterAsync(String filterARN) {
        return getAsyncClient().deleteFilter(
                        DeleteFilterRequest.builder()
                                .arn(filterARN)
                                .build()
                )
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException rnfe) {
                            String msg = "Filter not found for ARN:
%s".formatted(filterARN);
                            logger.warn(msg, rnfe);
                            throw new CompletionException(msg, rnfe);
                        }

                        throw new RuntimeException("Failed to delete the filter: " +
cause, cause);
                    }
                    return null;
                });
    }
```

```
   /**
    * Retrieves detailed information about a specific AWS Inspector2 finding
asynchronously.
    *
    * @param findingArn The ARN of the finding to look up.
    * @return A {@link CompletableFuture} that, when completed, provides a
formatted string
    * containing all available details for the finding.
    * @throws RuntimeException if the async call to Inspector2 fails.
    */
   public CompletableFuture<String> getFindingDetailsAsync(String findingArn) {
       BatchGetFindingDetailsRequest request =
BatchGetFindingDetailsRequest.builder()
               .findingArns(findingArn)
               .build();

       return getAsyncClient().batchGetFindingDetails(request)
               .thenApply(response -> {
                   if (response.findingDetails() == null ||
response.findingDetails().isEmpty()) {
                       return String.format("No details found for ARN: ",
findingArn);
                   }

                   StringBuilder sb = new StringBuilder();
                   response.findingDetails().forEach(detail -> {
                       sb.append("Finding ARN:
").append(detail.findingArn()).append("\n")
                                .append("Risk Score:
").append(detail.riskScore()).append("\n");

                       // ExploitObserved timings
                       if (detail.exploitObserved() != null) {
                           sb.append("Exploit First Seen:
").append(detail.exploitObserved().firstSeen()).append("\n")
                                    .append("Exploit Last Seen:
").append(detail.exploitObserved().lastSeen()).append("\n");
                       }

                       // Reference URLs
                       if (detail.hasReferenceUrls()) {
                           sb.append("Reference URLs:\n");
                           detail.referenceUrls().forEach(url -> sb.append("  •
").append(url).append("\n"));
```

```
                        }

                        // Tools
                        if (detail.hasTools()) {
                            sb.append("Tools:\n");
                            detail.tools().forEach(tool -> sb.append("  •
").append(tool).append("\n"));
                        }

                        // TTPs
                        if (detail.hasTtps()) {
                            sb.append("TTPs:\n");
                            detail.ttps().forEach(ttp -> sb.append("  •
").append(ttp).append("\n"));
                        }

                        // CWEs
                        if (detail.hasCwes()) {
                            sb.append("CWEs:\n");
                            detail.cwes().forEach(cwe -> sb.append("  •
").append(cwe).append("\n"));
                        }

                        // Evidence
                        if (detail.hasEvidences()) {
                            sb.append("Evidence:\n");
                            detail.evidences().forEach(ev -> {
                                sb.append("  - Severity:
").append(ev.severity()).append("\n");

                            });
                        }

                        sb.append("\n");
                    });

                    return sb.toString();
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException rnfe) {
                        return "Finding not found: %s".formatted(findingArn);
                    }
```

```
                    // Fallback for other exceptions
                    throw new RuntimeException("Failed to get finding details for
 ARN: " + findingArn, cause);
                });
    }


    /**
     * Asynchronously disables AWS Inspector for the specified accounts and resource
 types.
     *
     * @param accountIds a {@link List} of AWS account IDs for which to disable
 Inspector;
     *                   may be {@code null} or empty to target the current account
     * @return a {@link CompletableFuture} that, when completed, returns a {@link
 String}
     *         summarizing the disable results for each account
     * @throws CompletionException if the disable operation fails due to validation
 errors,
     *                             service errors, or other exceptions
     * @see <a href="https://docs.aws.amazon.com/inspector/latest/APIReference/
API_Disable.html">
     *      AWS Inspector2 Disable API</a>
     */
    public CompletableFuture<String> disableInspectorAsync(List<String> accountIds)
 {

        // The resource types to disable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        DisableRequest.Builder requestBuilder = DisableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }
```

```
        DisableRequest request = requestBuilder.build();

        return getAsyncClient().disable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be disabled for this
account: %s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to disable Inspector:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Disable results:\n");

                    if (response.accounts() == null ||
response.accounts().isEmpty()) {
                        summary.append("Inspector may already be disabled for all
target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
```

```
                        String status = account.status() != null ?
 account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
                    }

                    return summary.toString();
                });
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - BatchGetAccountStatus
  - BatchGetFindingDetails
  - CreateFilter
  - DeleteFilter
  - Aktifkan
  - ListCoverage
  - ListCoverageStatistics
  - ListFilters
  - ListFindings
  - ListUsageTotals

## Tindakan

### `BatchGetAccountStatus`

Contoh kode berikut menunjukkan cara menggunakan`BatchGetAccountStatus`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves the account status using the Inspector2Client.
    */
   public CompletableFuture<String> getAccountStatusAsync() {
       BatchGetAccountStatusRequest request =
BatchGetAccountStatusRequest.builder()
               .accountIds(Collections.emptyList())
               .build();

       return getAsyncClient().batchGetAccountStatus(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof AccessDeniedException) {
                           throw new CompletionException(
                                   "You do not have sufficient access:
%s".formatted(cause.getMessage()),
                                   cause
                           );

                       }

                       if (cause instanceof Inspector2Exception) {
                           Inspector2Exception e = (Inspector2Exception) cause;

                           throw new CompletionException(
                                   "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                   e
                           );
                       }

                       throw new CompletionException(
                               "Unexpected error getting account status:
%s".formatted(exception.getMessage()),
                               exception
                       );
                   }
               })
               .thenApply(response -> {

                   StringBuilder sb = new StringBuilder();
```

```
                    List<AccountState> accounts = response.accounts();

                    if (accounts == null || accounts.isEmpty()) {
                        sb.append("No account status returned.\n");
                        return sb.toString();
                    }

                    sb.append("Inspector Account Status:\n");
                    for (AccountState account : accounts) {

                        String accountId = account.accountId() != null
                                ? account.accountId()
                                : "Unknown";

                        sb.append("  Account ID: ").append(accountId).append("\n");

                        // Overall account state
                        if (account.state() != null && account.state().status() !=
null) {
                            sb.append("  Overall State: ")
                                    .append(account.state().status())
                                    .append("\n");
                        } else {
                            sb.append("  Overall State: Unknown\n");
                        }

                        // Resource state (only status available)
                        ResourceState resources = account.resourceState();
                        if (resources != null) {
                            sb.append("  Resource Status: available\n");
                        }

                        sb.append("\n");
                    }

                    return sb.toString();
                });
    }
```

- Untuk detail API, lihat BatchGetAccountStatusdi Referensi AWS SDK for Java 2.x API.

### `BatchGetFindingDetails`

Contoh kode berikut menunjukkan cara menggunakan`BatchGetFindingDetails`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves detailed information about a specific AWS Inspector2 finding
asynchronously.
    *
    * @param findingArn The ARN of the finding to look up.
    * @return A {@link CompletableFuture} that, when completed, provides a
formatted string
    * containing all available details for the finding.
    * @throws RuntimeException if the async call to Inspector2 fails.
    */
   public CompletableFuture<String> getFindingDetailsAsync(String findingArn) {
       BatchGetFindingDetailsRequest request =
BatchGetFindingDetailsRequest.builder()
               .findingArns(findingArn)
               .build();

       return getAsyncClient().batchGetFindingDetails(request)
               .thenApply(response -> {
                   if (response.findingDetails() == null ||
response.findingDetails().isEmpty()) {
                       return String.format("No details found for ARN: ",
findingArn);
                   }

                   StringBuilder sb = new StringBuilder();
                   response.findingDetails().forEach(detail -> {
                       sb.append("Finding ARN:
").append(detail.findingArn()).append("\n")
                               .append("Risk Score:
").append(detail.riskScore()).append("\n");
```

```
                        // ExploitObserved timings
                        if (detail.exploitObserved() != null) {
                            sb.append("Exploit First Seen:
").append(detail.exploitObserved().firstSeen()).append("\n")
                                    .append("Exploit Last Seen:
").append(detail.exploitObserved().lastSeen()).append("\n");
                        }

                        // Reference URLs
                        if (detail.hasReferenceUrls()) {
                            sb.append("Reference URLs:\n");
                            detail.referenceUrls().forEach(url -> sb.append("  •
").append(url).append("\n"));
                        }

                        // Tools
                        if (detail.hasTools()) {
                            sb.append("Tools:\n");
                            detail.tools().forEach(tool -> sb.append("  •
").append(tool).append("\n"));
                        }

                        // TTPs
                        if (detail.hasTtps()) {
                            sb.append("TTPs:\n");
                            detail.ttps().forEach(ttp -> sb.append("  •
").append(ttp).append("\n"));
                        }

                        // CWEs
                        if (detail.hasCwes()) {
                            sb.append("CWEs:\n");
                            detail.cwes().forEach(cwe -> sb.append("  •
").append(cwe).append("\n"));
                        }

                        // Evidence
                        if (detail.hasEvidences()) {
                            sb.append("Evidence:\n");
                            detail.evidences().forEach(ev -> {
                                sb.append("  - Severity:
").append(ev.severity()).append("\n");

                            });
```

```
                        }

                        sb.append("\n");
                    });

                    return sb.toString();
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException rnfe) {
                        return "Finding not found: %s".formatted(findingArn);
                    }

                    // Fallback for other exceptions
                    throw new RuntimeException("Failed to get finding details for
ARN: " + findingArn, cause);
                });
    }
```

- Untuk detail API, lihat BatchGetFindingDetailsdi Referensi AWS SDK for Java 2.x API.

### `CreateFilter`

Contoh kode berikut menunjukkan cara menggunakan`CreateFilter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new LOW severity filter in AWS Inspector2 to suppress findings.
     *
     * @param filterName  the name of the filter to create
     * @param description a descriptive string explaining the purpose of the filter
     * @return a CompletableFuture that completes with the ARN of the created filter
```

```
     * @throws CompletionException wraps any validation, Inspector2 service, or
unexpected errors
     */
    public CompletableFuture<String> createLowSeverityFilterAsync(
            String filterName,
            String description) {

        // Define a filter to match LOW severity findings.
        StringFilter severityFilter = StringFilter.builder()
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        // Create filter criteria.
        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the filter creation request.
        CreateFilterRequest request = CreateFilterRequest.builder()
                .name(filterName)
                .filterCriteria(filterCriteria)
                .action(FilterAction.SUPPRESS)
                .description(description)
                .build();

        return getAsyncClient().createFilter(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ValidationException ve) {
                            throw new CompletionException(
                                    "Validation error creating filter:
%s".formatted(ve.getMessage()),
                                    ve
                            );
                        }

                        if (cause instanceof Inspector2Exception e) {
                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
```

```
                                    e
                            );
                        }

                        // Unexpected async error
                        throw new CompletionException(
                                "Unexpected error creating filter:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                // Extract and return the ARN of the created filter.
                .thenApply(CreateFilterResponse::arn);
    }
```

- Untuk detail API, lihat CreateFilterdi Referensi AWS SDK for Java 2.x API.

### `DeleteFilter`

Contoh kode berikut menunjukkan cara menggunakan`DeleteFilter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an AWS Inspector2 filter.
     *
     * @param filterARN The ARN of the filter to delete.
     */
    public CompletableFuture<Void> deleteFilterAsync(String filterARN) {
        return getAsyncClient().deleteFilter(
                        DeleteFilterRequest.builder()
                                .arn(filterARN)
                                .build()
```

```
                )
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException rnfe) {
                            String msg = "Filter not found for ARN:
%s".formatted(filterARN);
                            logger.warn(msg, rnfe);
                            throw new CompletionException(msg, rnfe);
                        }

                        throw new RuntimeException("Failed to delete the filter: " +
cause, cause);
                    }
                    return null;
                });
    }
```

- Untuk detail API, lihat DeleteFilterdi Referensi AWS SDK for Java 2.x API.

### `Disable`

Contoh kode berikut menunjukkan cara menggunakan`Disable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously disables AWS Inspector for the specified accounts and resource
types.
     *
     * @param accountIds a {@link List} of AWS account IDs for which to disable
Inspector;
     *                   may be {@code null} or empty to target the current account
```

```
     * @return a {@link CompletableFuture} that, when completed, returns a {@link
 String}
     *         summarizing the disable results for each account
     * @throws CompletionException if the disable operation fails due to validation
 errors,
     *                             service errors, or other exceptions
     * @see <a href="https://docs.aws.amazon.com/inspector/latest/APIReference/
API_Disable.html">
     *      AWS Inspector2 Disable API</a>
     */
    public CompletableFuture<String> disableInspectorAsync(List<String> accountIds)
 {

        // The resource types to disable.
        List<ResourceScanType> resourceTypes = List.of(
                ResourceScanType.EC2,
                ResourceScanType.ECR,
                ResourceScanType.LAMBDA,
                ResourceScanType.LAMBDA_CODE
        );

        // Build the request.
        DisableRequest.Builder requestBuilder = DisableRequest.builder()
                .resourceTypes(resourceTypes);

        if (accountIds != null && !accountIds.isEmpty()) {
            requestBuilder.accountIds(accountIds);
        }

        DisableRequest request = requestBuilder.build();

        return getAsyncClient().disable(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Inspector may already be disabled for this
 account: %s".formatted(cause.getMessage()),
                                    cause
                            );
                        }

                        if (cause instanceof Inspector2Exception) {
```

```
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to disable Inspector:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Disable results:\n");

                    if (response.accounts() == null ||
response.accounts().isEmpty()) {
                        summary.append("Inspector may already be disabled for all
target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                        String status = account.status() != null ?
account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
                    }

                    return summary.toString();
                });
    }
```

- Untuk detail API, lihat Nonaktifkan di Referensi AWS SDK for Java 2.x API.

### `Enable`

Contoh kode berikut menunjukkan cara menggunakan`Enable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Enables AWS Inspector for the provided account(s) and default resource types.
 *
 * @param accountIds Optional list of AWS account IDs.
 */
public CompletableFuture<String> enableInspectorAsync(List<String> accountIds) {

    // The resource types to enable.
    List<ResourceScanType> resourceTypes = List.of(
            ResourceScanType.EC2,
            ResourceScanType.ECR,
            ResourceScanType.LAMBDA,
            ResourceScanType.LAMBDA_CODE
    );

    // Build the request.
    EnableRequest.Builder requestBuilder = EnableRequest.builder()
            .resourceTypes(resourceTypes);

    if (accountIds != null && !accountIds.isEmpty()) {
        requestBuilder.accountIds(accountIds);
    }

    EnableRequest request = requestBuilder.build();
    return getAsyncClient().enable(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ValidationException) {
                        throw new CompletionException(
```

```
                                    "Inspector may already be enabled for this
account: %s".formatted(cause.getMessage()),
                                    cause
                            );

                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;
                            throw new CompletionException(
                                    "AWS Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    cause
                            );
                        }

                        throw new CompletionException(
                                "Failed to enable Inspector:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    StringBuilder summary = new StringBuilder("Enable results:\n");

                    if (response.accounts() == null ||
response.accounts().isEmpty()) {
                        summary.append("Inspector may already be enabled for all
target accounts.");
                        return summary.toString();
                    }

                    for (Account account : response.accounts()) {
                        String accountId = account.accountId() != null ?
account.accountId() : "Unknown";
                        String status = account.status() != null ?
account.statusAsString() : "Unknown";
                        summary.append(" • Account: ").append(accountId)
                                .append(" # Status: ").append(status).append("\n");
                    }

                    return summary.toString();
                });
```

```
    }
```

- Untuk detail API, lihat Mengaktifkan di Referensi AWS SDK for Java 2.x API.

### `ListCoverage`

Contoh kode berikut menunjukkan cara menggunakan`ListCoverage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Lists AWS Inspector2 coverage details for scanned resources using a
paginator.
    *
    * @param maxResults Maximum number of resources to return.
    */
   public CompletableFuture<String> listCoverageAsync(int maxResults) {
       ListCoverageRequest initialRequest = ListCoverageRequest.builder()
               .maxResults(maxResults)
               .build();

       ListCoveragePublisher paginator =
getAsyncClient().listCoveragePaginator(initialRequest);
       StringBuilder summary = new StringBuilder();

       return paginator.subscribe(response -> {
           List<CoveredResource> coveredResources = response.coveredResources();

           if (coveredResources == null || coveredResources.isEmpty()) {
               summary.append("No coverage information available for this page.
\n");
               return;
           }
```

```
            Map<String, List<CoveredResource>> byType = coveredResources.stream()

.collect(Collectors.groupingBy(CoveredResource::resourceTypeAsString));

            byType.forEach((type, list) ->
                    summary.append("  ").append(type)
                            .append(": ").append(list.size())
                            .append(" resource(s)\n")
            );

            // Include up to 3 sample resources per page
            for (int i = 0; i < Math.min(coveredResources.size(), 3); i++) {
                CoveredResource r = coveredResources.get(i);
                summary.append("  - ").append(r.resourceTypeAsString())
                        .append(": ").append(r.resourceId()).append("\n");
                summary.append("    Scan Type:
").append(r.scanTypeAsString()).append("\n");
                if (r.scanStatus() != null) {
                    summary.append("    Status:
").append(r.scanStatus().statusCodeAsString()).append("\n");
                }
                if (r.accountId() != null) {
                    summary.append("    Account ID:
").append(r.accountId()).append("\n");
                }
                summary.append("\n");
            }

        }).thenApply(v -> {
            if (summary.length() == 0) {
                return "No coverage information found across all pages.";
            } else {
                return "Coverage Information:\n" + summary.toString();
            }
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause();
            if (cause instanceof ValidationException) {
                throw new CompletionException(
                        "Validation error listing coverage: " + cause.getMessage(),
cause);
            } else if (cause instanceof Inspector2Exception e) {
                throw new CompletionException(
                        "Inspector2 service error: " +
e.awsErrorDetails().errorMessage(), e);
```

```
            }
            throw new CompletionException("Unexpected error listing coverage: " +
ex.getMessage(), ex);
        });
    }
```

- Untuk detail API, lihat ListCoveragedi Referensi AWS SDK for Java 2.x API.

### `ListCoverageStatistics`

Contoh kode berikut menunjukkan cara menggunakan`ListCoverageStatistics`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves and prints the coverage statistics using a paginator.
     */
    public CompletableFuture<String> listCoverageStatisticsAsync() {
        ListCoverageStatisticsRequest request =
ListCoverageStatisticsRequest.builder()
                .build();

        return getAsyncClient().listCoverageStatistics(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();

                        if (cause instanceof ValidationException) {
                            throw new CompletionException(
                                    "Validation error listing coverage statistics:
%s".formatted(cause.getMessage()),
                                    cause
                            );
```

```
                        }

                        if (cause instanceof Inspector2Exception) {
                            Inspector2Exception e = (Inspector2Exception) cause;

                            throw new CompletionException(
                                    "Inspector2 service error:
%s".formatted(e.awsErrorDetails().errorMessage()),
                                    e
                            );
                        }

                        throw new CompletionException(
                                "Unexpected error listing coverage statistics:
%s".formatted(exception.getMessage()),
                                exception
                        );
                    }
                })
                .thenApply(response -> {
                    List<Counts> countsList = response.countsByGroup();
                    StringBuilder sb = new StringBuilder();

                    if (countsList == null || countsList.isEmpty()) {
                        sb.append("No coverage statistics available.\n");
                        return sb.toString();
                    }

                    sb.append("Coverage Statistics:\n");

                    for (Counts c : countsList) {
                        sb.append("  Group: ").append(c.groupKey()).append("\n")
                                .append("    Total Count:
").append(c.count()).append("\n\n");
                    }

                    return sb.toString();
                });
    }
```

- Untuk detail API, lihat ListCoverageStatisticsdi Referensi AWS SDK for Java 2.x API.

### `ListFilters`

Contoh kode berikut menunjukkan cara menggunakan`ListFilters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously lists Inspector2 filters using a paginator.
    *
    * @param maxResults maximum filters per page (nullable)
    * @return CompletableFuture completed with summary text
    */
   public CompletableFuture<String> listFiltersAsync(Integer maxResults) {
       logger.info("Starting async filters paginator…");

       ListFiltersRequest.Builder builder = ListFiltersRequest.builder();
       if (maxResults != null) {
           builder.maxResults(maxResults);
       }

       ListFiltersRequest request = builder.build();

       // Paginator from SDK
       ListFiltersPublisher paginator =
getAsyncClient().listFiltersPaginator(request);
       StringBuilder collectedFilterIds = new StringBuilder();

       return paginator.subscribe(response -> {
           response.filters().forEach(filter -> {
               logger.info("Filter: " + filter.arn());
               collectedFilterIds.append(filter.arn()).append("\n");
           });
       }).thenApply(v -> {
           String result = collectedFilterIds.toString();
           logger.info("Successfully listed all filters.");
           return result.isEmpty() ? "No filters found." : result;
```

```
        }).exceptionally(ex -> {
            Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

            if (cause instanceof ValidationException ve) {
                throw new CompletionException(
                        "Validation error listing filters:
%s".formatted(ve.getMessage()),
                        ve
                );
            }

            throw new RuntimeException("Failed to list filters", ex);
        });
    }
```

- Untuk detail API, lihat ListFiltersdi Referensi AWS SDK for Java 2.x API.

### `ListFindings`

Contoh kode berikut menunjukkan cara menggunakan`ListFindings`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all AWS Inspector findings of LOW severity asynchronously.
     *
     * @return CompletableFuture containing a List of finding ARNs.
     * Returns an empty list if no LOW severity findings are found.
     */
    public CompletableFuture<ArrayList<String>> listLowSeverityFindingsAsync() {
        logger.info("Starting async LOW severity findings paginator…");

        // Build a filter criteria for LOW severity.
        StringFilter severityFilter = StringFilter.builder()
```

```
                .value(Severity.LOW.toString())
                .comparison(StringComparison.EQUALS)
                .build();

        FilterCriteria filterCriteria = FilterCriteria.builder()
                .severity(Collections.singletonList(severityFilter))
                .build();

        // Build the request.
        ListFindingsRequest request = ListFindingsRequest.builder()
                .filterCriteria(filterCriteria)
                .build();

        ListFindingsPublisher paginator =
 getAsyncClient().listFindingsPaginator(request);
        List<String> allArns = Collections.synchronizedList(new ArrayList<>());

        return paginator.subscribe(response -> {
                    if (response.findings() != null && !
response.findings().isEmpty()) {
                        response.findings().forEach(finding -> {
                            logger.info("Finding ARN: {}", finding.findingArn());
                            allArns.add(finding.findingArn());
                        });
                    } else {
                        logger.info("Page contained no findings.");
                    }
                })
                .thenRun(() -> logger.info("Successfully listed all LOW severity
 findings."))
                .thenApply(v -> new ArrayList<>(allArns)) // Return list instead of
 a formatted string
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;
                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing LOW severity findings:
 %s".formatted(ve.getMessage()),
                                ve
                        );
                    }
                    throw new RuntimeException("Failed to list LOW severity
 findings", ex);
                });
```

```
    }
```

- Untuk detail API, lihat ListFindingsdi Referensi AWS SDK for Java 2.x API.

### `ListUsageTotals`

Contoh kode berikut menunjukkan cara menggunakan`ListUsageTotals`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously lists Inspector2 usage totals using a paginator.
     *
     * @param accountIds optional list of account IDs
     * @param maxResults maximum results per page
     * @return CompletableFuture completed with formatted summary text
     */
    public CompletableFuture<String> listUsageTotalsAsync(
            List<String> accountIds,
            int maxResults) {

        logger.info("Starting usage totals paginator…");

        ListUsageTotalsRequest.Builder builder = ListUsageTotalsRequest.builder()
                .maxResults(maxResults);

        if (accountIds != null && !accountIds.isEmpty()) {
            builder.accountIds(accountIds);
        }

        ListUsageTotalsRequest request = builder.build();
        ListUsageTotalsPublisher paginator =
getAsyncClient().listUsageTotalsPaginator(request);
```

```
        StringBuilder summaryBuilder = new StringBuilder();

        return paginator.subscribe(response -> {
                    if (response.totals() != null && !response.totals().isEmpty()) {
                        response.totals().forEach(total -> {
                            if (total.usage() != null) {
                                total.usage().forEach(usage -> {
                                    logger.info("Usage: {} = {}",
usage.typeAsString(), usage.total());
                                    summaryBuilder.append(usage.typeAsString())
                                            .append(": ")
                                            .append(usage.total())
                                            .append("\n");
                                });
                            }
                        });
                    } else {
                        logger.info("Page contained no usage totals.");
                    }
                }).thenRun(() -> logger.info("Successfully listed usage totals."))
                .thenApply(v -> {
                    String summary = summaryBuilder.toString();
                    return summary.isEmpty() ? "No usage totals found." : summary;
                }).exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ValidationException ve) {
                        throw new CompletionException(
                                "Validation error listing usage totals:
%s".formatted(ve.getMessage()),
                                ve
                        );
                    }

                    throw new CompletionException("Failed to list usage totals",
cause);
                });
    }
```

- Untuk detail API, lihat ListUsageTotalsdi Referensi AWS SDK for Java 2.x API.

# AWS IoT contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS IoT.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Halo AWS IoT

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS IoT.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iot.IotClient;
import software.amazon.awssdk.services.iot.model.ListThingsRequest;
import software.amazon.awssdk.services.iot.model.ListThingsResponse;
import software.amazon.awssdk.services.iot.model.ThingAttribute;
```

```
import software.amazon.awssdk.services.iot.paginators.ListThingsIterable;

import java.util.List;

public class HelloIoT {
    public static void main(String[] args) {
        System.out.println("Hello AWS IoT. Here is a listing of your AWS IoT
 Things:");
        IotClient iotClient = IotClient.builder()
            .region(Region.US_EAST_1)
            .build();

        listAllThings(iotClient);
    }

    public static void listAllThings(IotClient iotClient) {
        iotClient.listThingsPaginator(ListThingsRequest.builder()
                .maxResults(10)
                .build())
            .stream()
            .flatMap(response -> response.things().stream())
            .forEach(attribute -> {
                System.out.println("Thing name: " + attribute.thingName());
                System.out.println("Thing ARN: " + attribute.thingArn());
            });
    }
}
```

- Untuk detail API, lihat ListThings di Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat AWS IoT Sesuatu.
- Hasilkan sertifikat perangkat.
- Perbarui AWS IoT Sesuatu dengan Atribut.
- Kembalikan titik akhir yang unik.

- Buat daftar AWS IoT sertifikat Anda.
- Perbarui AWS IoT bayangan.
- Tuliskan informasi negara.
- Membuat aturan.
- Buat daftar aturan Anda.
- Cari sesuatu menggunakan nama Thing.
- Hapus AWS IoT Sesuatu.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan AWS IoT fitur.

```
import java.util.Scanner;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java example performs these tasks:
 *
 * 1. Creates an AWS IoT Thing.
 * 2. Generate and attach a device certificate.
 * 3. Update an AWS IoT Thing with Attributes.
 * 4. Get an AWS IoT Endpoint.
 * 5. List your certificates.
 * 6. Updates the shadow for the specified thing..
 * 7. Write out the state information, in JSON format
 * 8. Creates a rule
 * 9. List rules
```

```
 * 10. Search things
 * 11. Detach amd delete the certificate.
 * 12. Delete Thing.
 */
public class IotScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage =
            """
                Usage:
                    <roleARN> <snsAction>

                Where:
                    roleARN - The ARN of an IAM role that has permission to work
 with AWS IOT.
                    snsAction  - An ARN of an SNS topic.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        IotActions iotActions = new IotActions();
        String thingName;
        String ruleName;
        String roleARN = args[0];
        String snsAction = args[1];
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS IoT basics scenario.");
        System.out.println("""
            This example program demonstrates various interactions with the AWS
 Internet of Things (IoT) Core service. The program guides you through a series of
 steps,
            including creating an IoT Thing, generating a device certificate,
 updating the Thing with attributes, and so on.
            It utilizes the AWS SDK for Java V2 and incorporates functionality for
 creating and managing IoT Things, certificates, rules,
            shadows, and performing searches. The program aims to showcase AWS IoT
 capabilities and provides a comprehensive example for
            developers working with AWS IoT in a Java environment.
```

```
            Let's get started...

            """);
        System.out.println(DASHES);

        System.out.println("1. Create an AWS IoT Thing.");
        System.out.println("""
            An AWS IoT Thing represents a virtual entity in the AWS IoT service that
can be associated with
            a physical device.
            """);
        // Prompt the user for input.
        System.out.print("Enter Thing name: ");
        thingName = scanner.nextLine();
        iotActions.createIoTThing(thingName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Generate a device certificate.");
        System.out.println("""
            A device certificate performs a role in securing the communication
between devices (Things)
            and the AWS IoT platform.
            """);

        System.out.print("Do you want to create a certificate for " +thingName +"?
(y/n)");
        String certAns = scanner.nextLine();
        String certificateArn="" ;
        if (certAns != null && certAns.trim().equalsIgnoreCase("y")) {
            certificateArn = iotActions.createCertificate();
            System.out.println("Attach the certificate to the AWS IoT Thing.");
            iotActions.attachCertificateToThing(thingName, certificateArn);
        } else {
            System.out.println("A device certificate was not created.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Update an AWS IoT Thing with Attributes.");
        System.out.println("""
             IoT Thing attributes, represented as key-value pairs, offer a pivotal
advantage in facilitating efficient data
```

```
             management and retrieval within the AWS IoT ecosystem.
            """);
        waitForInputToContinue(scanner);
        iotActions.updateShadowThing(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Return a unique endpoint specific to the Amazon Web
Services account.");
        System.out.println("""
            An IoT Endpoint refers to a specific URL or Uniform Resource Locator
that serves as the entry point for communication between IoT devices and the AWS
IoT service.
           """);
        waitForInputToContinue(scanner);
        String endpointUrl = iotActions.describeEndpoint();
        System.out.println("The endpoint is "+endpointUrl);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. List your AWS IoT certificates");
        waitForInputToContinue(scanner);
        if (certificateArn.length() > 0) {
            iotActions.listCertificates();
        } else {
            System.out.println("You did not create a certificates. Skipping this
step.");
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Create an IoT shadow that refers to a digital
representation or virtual twin of a physical IoT device");
        System.out.println("""
            A Thing Shadow refers to a feature that enables you to create a virtual
representation, or "shadow,"
            of a physical device or thing. The Thing Shadow allows you to
synchronize and control the state of a device between
            the cloud and the device itself. and the AWS IoT service. For example,
you can write and retrieve JSON data from a Thing Shadow.
           """);
```

```
        waitForInputToContinue(scanner);
        iotActions.updateShadowThing(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Write out the state information, in JSON format.");
        waitForInputToContinue(scanner);
        iotActions.getPayload(thingName);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Creates a rule");
        System.out.println("""
        Creates a rule that is an administrator-level action.
        Any user who has permission to create rules will be able to access data
processed by the rule.
        """);
        System.out.print("Enter Rule name: ");
        ruleName = scanner.nextLine();
        iotActions.createIoTRule(roleARN, ruleName, snsAction);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. List your rules.");
        waitForInputToContinue(scanner);
        iotActions.listIoTRules();
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Search things using the Thing name.");
        waitForInputToContinue(scanner);
        String queryString = "thingName:"+thingName ;
        iotActions.searchThings(queryString);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        if (certificateArn.length() > 0) {
            System.out.print("Do you want to detach and delete the certificate for "
+thingName +"? (y/n)");
```

```
            String delAns = scanner.nextLine();
            if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
                System.out.println("11. You selected to detach amd delete the
certificate.");
                waitForInputToContinue(scanner);
                iotActions.detachThingPrincipal(thingName, certificateArn);
                iotActions.deleteCertificate(certificateArn);
                waitForInputToContinue(scanner);
            } else {
                System.out.println("11. You selected not to delete the
certificate.");
            }
        } else {
            System.out.println("11. You did not create a certificate so there is
nothing to delete.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Delete the AWS IoT Thing.");
        System.out.print("Do you want to delete the IoT Thing? (y/n)");
        String delAns = scanner.nextLine();
        if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
            iotActions.deleteIoTThing(thingName);
        } else {
            System.out.println("The IoT Thing was not deleted.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS IoT workflow has successfully completed.");
        System.out.println(DASHES);
    }


    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
```

```
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode AWS IoT SDK.

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryPolicy;
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.iot.IotAsyncClient;
import software.amazon.awssdk.services.iot.model.Action;
import software.amazon.awssdk.services.iot.model.AttachThingPrincipalRequest;
import software.amazon.awssdk.services.iot.model.AttachThingPrincipalResponse;
import software.amazon.awssdk.services.iot.model.Certificate;
import software.amazon.awssdk.services.iot.model.CreateKeysAndCertificateResponse;
import software.amazon.awssdk.services.iot.model.CreateThingRequest;
import software.amazon.awssdk.services.iot.model.CreateThingResponse;
import software.amazon.awssdk.services.iot.model.CreateTopicRuleRequest;
import software.amazon.awssdk.services.iot.model.CreateTopicRuleResponse;
import software.amazon.awssdk.services.iot.model.DeleteCertificateRequest;
import software.amazon.awssdk.services.iot.model.DeleteCertificateResponse;
import software.amazon.awssdk.services.iot.model.DeleteThingRequest;
import software.amazon.awssdk.services.iot.model.DeleteThingResponse;
import software.amazon.awssdk.services.iot.model.DescribeEndpointRequest;
import software.amazon.awssdk.services.iot.model.DescribeEndpointResponse;
import software.amazon.awssdk.services.iot.model.DescribeThingRequest;
import software.amazon.awssdk.services.iot.model.DescribeThingResponse;
import software.amazon.awssdk.services.iot.model.DetachThingPrincipalRequest;
import software.amazon.awssdk.services.iot.model.DetachThingPrincipalResponse;
import software.amazon.awssdk.services.iot.model.IotException;
import software.amazon.awssdk.services.iot.model.ListCertificatesResponse;
import software.amazon.awssdk.services.iot.model.ListTopicRulesRequest;
```

```
import software.amazon.awssdk.services.iot.model.ListTopicRulesResponse;
import software.amazon.awssdk.services.iot.model.SearchIndexRequest;
import software.amazon.awssdk.services.iot.model.SearchIndexResponse;
import software.amazon.awssdk.services.iot.model.TopicRuleListItem;
import software.amazon.awssdk.services.iot.model.SnsAction;
import software.amazon.awssdk.services.iot.model.TopicRulePayload;
import software.amazon.awssdk.services.iotdataplane.IotDataPlaneAsyncClient;
import software.amazon.awssdk.services.iotdataplane.model.GetThingShadowRequest;
import software.amazon.awssdk.services.iotdataplane.model.GetThingShadowResponse;
import software.amazon.awssdk.services.iotdataplane.model.UpdateThingShadowRequest;
import software.amazon.awssdk.services.iotdataplane.model.UpdateThingShadowResponse;
import java.nio.charset.StandardCharsets;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

public class IotActions {

    private static IotAsyncClient iotAsyncClient;

    private static IotDataPlaneAsyncClient iotAsyncDataPlaneClient;

    private static final String TOPIC = "your-iot-topic";

    private static IotDataPlaneAsyncClient getAsyncDataPlaneClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)
            .connectionTimeout(Duration.ofSeconds(60))
            .readTimeout(Duration.ofSeconds(60))
            .writeTimeout(Duration.ofSeconds(60))
            .build();

        ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))
            .apiCallAttemptTimeout(Duration.ofSeconds(90))
            .retryPolicy(RetryPolicy.builder()
                .numRetries(3)
                .build())
            .build();
```

```
        if (iotAsyncDataPlaneClient == null) {
            iotAsyncDataPlaneClient = IotDataPlaneAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return iotAsyncDataPlaneClient;
    }


    private static IotAsyncClient getAsyncClient() {
        SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
            .maxConcurrency(100)
            .connectionTimeout(Duration.ofSeconds(60))
            .readTimeout(Duration.ofSeconds(60))
            .writeTimeout(Duration.ofSeconds(60))
            .build();

        ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
            .apiCallTimeout(Duration.ofMinutes(2))
            .apiCallAttemptTimeout(Duration.ofSeconds(90))
            .retryPolicy(RetryPolicy.builder()
                .numRetries(3)
                .build())
            .build();

        if (iotAsyncClient == null) {
            iotAsyncClient = IotAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return iotAsyncClient;
    }

    /**
     * Creates an IoT certificate asynchronously.
     *
     * @return The ARN of the created certificate.
     * <p>
     * This method initiates an asynchronous request to create an IoT certificate.
```

```
    * If the request is successful, it prints the certificate details and returns
the certificate ARN.
    * If an exception occurs, it prints the error message.
    */
   public String createCertificate() {
       CompletableFuture<CreateKeysAndCertificateResponse> future =
getAsyncClient().createKeysAndCertificate();
       final String[] certificateArn = {null};
       future.whenComplete((response, ex) -> {
           if (response != null) {
               String certificatePem = response.certificatePem();
               certificateArn[0] = response.certificateArn();

               // Print the details.
               System.out.println("\nCertificate:");
               System.out.println(certificatePem);
               System.out.println("\nCertificate ARN:");
               System.out.println(certificateArn[0]);

           } else {
               Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + cause.getMessage());
               }
           }
       });

       future.join();
       return certificateArn[0];
   }

   /**
    * Creates an IoT Thing with the specified name asynchronously.
    *
    * @param thingName The name of the IoT Thing to create.
    *
    * This method initiates an asynchronous request to create an IoT Thing with the
specified name.
    * If the request is successful, it prints the name of the thing and its ARN
value.
```

```
    * If an exception occurs, it prints the error message.
    */
   public void createIoTThing(String thingName) {
       CreateThingRequest createThingRequest = CreateThingRequest.builder()
           .thingName(thingName)
           .build();

       CompletableFuture<CreateThingResponse> future =
getAsyncClient().createThing(createThingRequest);
       future.whenComplete((createThingResponse, ex) -> {
           if (createThingResponse != null) {
               System.out.println(thingName + " was successfully created. The ARN
value is " + createThingResponse.thingArn());
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + cause.getMessage());
               }
           }
       });

       future.join();
   }

   /**
    * Attaches a certificate to an IoT Thing asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    * @param certificateArn The ARN of the certificate to attach.
    *
    * This method initiates an asynchronous request to attach a certificate to an
IoT Thing.
    * If the request is successful, it prints a confirmation message and additional
information about the Thing.
    * If an exception occurs, it prints the error message.
    */
   public void attachCertificateToThing(String thingName, String certificateArn) {
       AttachThingPrincipalRequest principalRequest =
AttachThingPrincipalRequest.builder()
           .thingName(thingName)
           .principal(certificateArn)
```

```
            .build();

        CompletableFuture<AttachThingPrincipalResponse> future =
getAsyncClient().attachThingPrincipal(principalRequest);
        future.whenComplete((attachResponse, ex) -> {
            if (attachResponse != null &&
attachResponse.sdkHttpResponse().isSuccessful()) {
                System.out.println("Certificate attached to Thing successfully.");

                // Print additional information about the Thing.
                describeThing(thingName);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to attach certificate to Thing. HTTP
Status Code: " +
                            attachResponse.sdkHttpResponse().statusCode());
                }
            }
        });

        future.join();
    }

    /**
     * Describes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to describe an IoT Thing.
     * If the request is successful, it prints the Thing details.
     * If an exception occurs, it prints the error message.
     */
    private void describeThing(String thingName) {
        DescribeThingRequest thingRequest = DescribeThingRequest.builder()
            .thingName(thingName)
            .build();
```

```
        CompletableFuture<DescribeThingResponse> future =
getAsyncClient().describeThing(thingRequest);
        future.whenComplete((describeResponse, ex) -> {
            if (describeResponse != null) {
                System.out.println("Thing Details:");
                System.out.println("Thing Name: " + describeResponse.thingName());
                System.out.println("Thing ARN: " + describeResponse.thingArn());
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to describe Thing.");
                }
            }
        });

        future.join();
    }

    /**
     * Updates the shadow of an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to update the shadow of an IoT
Thing.
     * If the request is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void updateShadowThing(String thingName) {
        // Create Thing Shadow State Document.
        String stateDocument = "{\"state\":{\"reported\":{\"temperature\":25,
\"humidity\":50}}}";
        SdkBytes data = SdkBytes.fromString(stateDocument, StandardCharsets.UTF_8);
        UpdateThingShadowRequest updateThingShadowRequest =
UpdateThingShadowRequest.builder()
            .thingName(thingName)
            .payload(data)
            .build();
```

```
        CompletableFuture<UpdateThingShadowResponse> future =
 getAsyncDataPlaneClient().updateThingShadow(updateThingShadowRequest);
        future.whenComplete((updateResponse, ex) -> {
            if (updateResponse != null) {
                System.out.println("Thing Shadow updated successfully.");
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to update Thing Shadow.");
                }
            }
        });

        future.join();
    }

    /**
     * Describes the endpoint of the IoT service asynchronously.
     *
     * @return A CompletableFuture containing the full endpoint URL.
     *
     * This method initiates an asynchronous request to describe the endpoint of the
 IoT service.
     * If the request is successful, it prints and returns the full endpoint URL.
     * If an exception occurs, it prints the error message.
     */
    public String describeEndpoint() {
        CompletableFuture<DescribeEndpointResponse> future =
 getAsyncClient().describeEndpoint(DescribeEndpointRequest.builder().endpointType("iot:Data-
ATS").build());
        final String[] result = {null};

        future.whenComplete((endpointResponse, ex) -> {
            if (endpointResponse != null) {
                String endpointUrl = endpointResponse.endpointAddress();
                String exString = getValue(endpointUrl);
                String fullEndpoint = "https://" + exString + "-ats.iot.us-
east-1.amazonaws.com";
```

```
                System.out.println("Full Endpoint URL: " + fullEndpoint);
                result[0] = fullEndpoint;
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
 ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
        return result[0];
    }

    /**
     * Extracts a specific value from the endpoint URL.
     *
     * @param input The endpoint URL to process.
     * @return The extracted value from the endpoint URL.
     */
    private static String getValue(String input) {
        // Define a regular expression pattern for extracting the subdomain.
        Pattern pattern = Pattern.compile("^(.*?)\\.iot\\.us-east-1\\.amazonaws\
\.com");

        // Match the pattern against the input string.
        Matcher matcher = pattern.matcher(input);

        // Check if a match is found.
        if (matcher.find()) {
            // Extract the subdomain from the first capturing group.
            String subdomain = matcher.group(1);
            System.out.println("Extracted subdomain: " + subdomain);
            return subdomain ;
        } else {
            System.out.println("No match found");
        }
        return "" ;
    }
```

```
    /**
     * Lists all certificates asynchronously.
     *
     * This method initiates an asynchronous request to list all certificates.
     * If the request is successful, it prints the certificate IDs and ARNs.
     * If an exception occurs, it prints the error message.
     */
    public void listCertificates() {
        CompletableFuture<ListCertificatesResponse> future =
getAsyncClient().listCertificates();
        future.whenComplete((response, ex) -> {
            if (response != null) {
                List<Certificate> certList = response.certificates();
                for (Certificate cert : certList) {
                    System.out.println("Cert id: " + cert.certificateId());
                    System.out.println("Cert Arn: " + cert.certificateArn());
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list certificates.");
                }
            }
        });

        future.join();
    }

    /**
     * Retrieves the payload of a Thing's shadow asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to get the payload of a Thing's
shadow.
     * If the request is successful, it prints the shadow data.
     * If an exception occurs, it prints the error message.
     */
    public void getPayload(String thingName) {
```

```
        GetThingShadowRequest getThingShadowRequest =
GetThingShadowRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<GetThingShadowResponse> future =
getAsyncDataPlaneClient().getThingShadow(getThingShadowRequest);
        future.whenComplete((getThingShadowResponse, ex) -> {
            if (getThingShadowResponse != null) {
                // Extracting payload from response.
                SdkBytes payload = getThingShadowResponse.payload();
                String payloadString = payload.asUtf8String();
                System.out.println("Received Shadow Data: " + payloadString);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to get Thing Shadow payload.");
                }
            }
        });

        future.join();
    }

    /**
     * Creates an IoT rule asynchronously.
     *
     * @param roleARN The ARN of the IAM role that grants access to the rule's
actions.
     * @param ruleName The name of the IoT rule.
     * @param action The ARN of the action to perform when the rule is triggered.
     *
     * This method initiates an asynchronous request to create an IoT rule.
     * If the request is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void createIoTRule(String roleARN, String ruleName, String action) {
        String sql = "SELECT * FROM '" + TOPIC + "'";
        SnsAction action1 = SnsAction.builder()
```

```
            .targetArn(action)
            .roleArn(roleARN)
            .build();

        // Create the action.
        Action myAction = Action.builder()
            .sns(action1)
            .build();

        // Create the topic rule payload.
        TopicRulePayload topicRulePayload = TopicRulePayload.builder()
            .sql(sql)
            .actions(myAction)
            .build();

        // Create the topic rule request.
        CreateTopicRuleRequest topicRuleRequest = CreateTopicRuleRequest.builder()
            .ruleName(ruleName)
            .topicRulePayload(topicRulePayload)
            .build();

        CompletableFuture<CreateTopicRuleResponse> future =
getAsyncClient().createTopicRule(topicRuleRequest);
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("IoT Rule created successfully.");
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to create IoT Rule.");
                }
            }
        });

        future.join();
    }

    /**
     * Lists IoT rules asynchronously.
```

```
     *
     * This method initiates an asynchronous request to list IoT rules.
     * If the request is successful, it prints the names and ARNs of the rules.
     * If an exception occurs, it prints the error message.
     */
    public void listIoTRules() {
        ListTopicRulesRequest listTopicRulesRequest =
ListTopicRulesRequest.builder().build();
        CompletableFuture<ListTopicRulesResponse> future =
getAsyncClient().listTopicRules(listTopicRulesRequest);
        future.whenComplete((listTopicRulesResponse, ex) -> {
            if (listTopicRulesResponse != null) {
                System.out.println("List of IoT Rules:");
                List<TopicRuleListItem> ruleList = listTopicRulesResponse.rules();
                for (TopicRuleListItem rule : ruleList) {
                    System.out.println("Rule Name: " + rule.ruleName());
                    System.out.println("Rule ARN: " + rule.ruleArn());
                    System.out.println("--------------");
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list IoT Rules.");
                }
            }
        });

        future.join();
    }

    /**
     * Searches for IoT Things asynchronously based on a query string.
     *
     * @param queryString The query string to search for Things.
     *
     * This method initiates an asynchronous request to search for IoT Things.
     * If the request is successful and Things are found, it prints their IDs.
     * If no Things are found, it prints a message indicating so.
     * If an exception occurs, it prints the error message.
```

```
     */
    public void searchThings(String queryString) {
        SearchIndexRequest searchIndexRequest = SearchIndexRequest.builder()
            .queryString(queryString)
            .build();

        CompletableFuture<SearchIndexResponse> future =
getAsyncClient().searchIndex(searchIndexRequest);
        future.whenComplete((searchIndexResponse, ex) -> {
            if (searchIndexResponse != null) {
                // Process the result.
                if (searchIndexResponse.things().isEmpty()) {
                    System.out.println("No things found.");
                } else {
                    searchIndexResponse.things().forEach(thing ->
System.out.println("Thing id found using search is " + thing.thingId()));
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to search for IoT Things.");
                }
            }
        });

        future.join();
    }

    /**
     * Detaches a principal (certificate) from an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     * @param certificateArn The ARN of the certificate to detach.
     *
     * This method initiates an asynchronous request to detach a certificate from an
IoT Thing.
     * If the detachment is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
```

```
   public void detachThingPrincipal(String thingName, String certificateArn) {
       DetachThingPrincipalRequest thingPrincipalRequest =
DetachThingPrincipalRequest.builder()
           .principal(certificateArn)
           .thingName(thingName)
           .build();

       CompletableFuture<DetachThingPrincipalResponse> future =
getAsyncClient().detachThingPrincipal(thingPrincipalRequest);
       future.whenComplete((voidResult, ex) -> {
           if (ex == null) {
               System.out.println(certificateArn + " was successfully removed from
" + thingName);
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + ex.getMessage());
               }
           }
       });

       future.join();
   }

   /**
    * Deletes a certificate asynchronously.
    *
    * @param certificateArn The ARN of the certificate to delete.
    *
    * This method initiates an asynchronous request to delete a certificate.
    * If the deletion is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void deleteCertificate(String certificateArn) {
       DeleteCertificateRequest certificateProviderRequest =
DeleteCertificateRequest.builder()
           .certificateId(extractCertificateId(certificateArn))
           .build();

       CompletableFuture<DeleteCertificateResponse> future =
getAsyncClient().deleteCertificate(certificateProviderRequest);
```

```
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println(certificateArn + " was successfully deleted.");
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }

    /**
     * Deletes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing to delete.
     *
     * This method initiates an asynchronous request to delete an IoT Thing.
     * If the deletion is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void deleteIoTThing(String thingName) {
        DeleteThingRequest deleteThingRequest = DeleteThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DeleteThingResponse> future =
getAsyncClient().deleteThing(deleteThingRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println("Deleted Thing " + thingName);
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
```

```
            }
        });

        future.join();
    }

    // Get the cert Id  from the Cert ARN value.
    private String extractCertificateId(String certificateArn) {
        // Example ARN: arn:aws:iot:region:account-id:cert/certificate-id.
        String[] arnParts = certificateArn.split(":");
        String certificateIdPart = arnParts[arnParts.length - 1];
        return certificateIdPart.substring(certificateIdPart.lastIndexOf("/") + 1);
    }
}
```

## Tindakan

### `AttachThingPrincipal`

Contoh kode berikut menunjukkan cara menggunakan`AttachThingPrincipal`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Attaches a certificate to an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     * @param certificateArn The ARN of the certificate to attach.
     *
     * This method initiates an asynchronous request to attach a certificate to an
 IoT Thing.
     * If the request is successful, it prints a confirmation message and additional
 information about the Thing.
     * If an exception occurs, it prints the error message.
```

```
     */
    public void attachCertificateToThing(String thingName, String certificateArn) {
        AttachThingPrincipalRequest principalRequest =
AttachThingPrincipalRequest.builder()
            .thingName(thingName)
            .principal(certificateArn)
            .build();

        CompletableFuture<AttachThingPrincipalResponse> future =
getAsyncClient().attachThingPrincipal(principalRequest);
        future.whenComplete((attachResponse, ex) -> {
            if (attachResponse != null &&
attachResponse.sdkHttpResponse().isSuccessful()) {
                System.out.println("Certificate attached to Thing successfully.");

                // Print additional information about the Thing.
                describeThing(thingName);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to attach certificate to Thing. HTTP
Status Code: " +
                            attachResponse.sdkHttpResponse().statusCode());
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat AttachThingPrincipaldi Referensi AWS SDK for Java 2.x API.

### `CreateKeysAndCertificate`

Contoh kode berikut menunjukkan cara menggunakan`CreateKeysAndCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates an IoT certificate asynchronously.
    *
    * @return The ARN of the created certificate.
    * <p>
    * This method initiates an asynchronous request to create an IoT certificate.
    * If the request is successful, it prints the certificate details and returns
the certificate ARN.
    * If an exception occurs, it prints the error message.
    */
   public String createCertificate() {
       CompletableFuture<CreateKeysAndCertificateResponse> future =
getAsyncClient().createKeysAndCertificate();
       final String[] certificateArn = {null};
       future.whenComplete((response, ex) -> {
           if (response != null) {
               String certificatePem = response.certificatePem();
               certificateArn[0] = response.certificateArn();

               // Print the details.
               System.out.println("\nCertificate:");
               System.out.println(certificatePem);
               System.out.println("\nCertificate ARN:");
               System.out.println(certificateArn[0]);

           } else {
               Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else {
                   System.err.println("Unexpected error: " + cause.getMessage());
               }
```

```
            }
        });

        future.join();
        return certificateArn[0];
    }
```

- Untuk detail API, lihat CreateKeysAndCertificatedi Referensi AWS SDK for Java 2.x API.

### `CreateThing`

Contoh kode berikut menunjukkan cara menggunakan`CreateThing`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an IoT Thing with the specified name asynchronously.
     *
     * @param thingName The name of the IoT Thing to create.
     *
     * This method initiates an asynchronous request to create an IoT Thing with the
specified name.
     * If the request is successful, it prints the name of the thing and its ARN
value.
     * If an exception occurs, it prints the error message.
     */
    public void createIoTThing(String thingName) {
        CreateThingRequest createThingRequest = CreateThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<CreateThingResponse> future =
getAsyncClient().createThing(createThingRequest);
        future.whenComplete((createThingResponse, ex) -> {
            if (createThingResponse != null) {
```

```
                System.out.println(thingName + " was successfully created. The ARN
value is " + createThingResponse.thingArn());
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat CreateThingdi Referensi AWS SDK for Java 2.x API.

### `CreateTopicRule`

Contoh kode berikut menunjukkan cara menggunakan`CreateTopicRule`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an IoT rule asynchronously.
     *
     * @param roleARN The ARN of the IAM role that grants access to the rule's
actions.
     * @param ruleName The name of the IoT rule.
     * @param action The ARN of the action to perform when the rule is triggered.
     *
     * This method initiates an asynchronous request to create an IoT rule.
     * If the request is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
```

```
     */
    public void createIoTRule(String roleARN, String ruleName, String action) {
        String sql = "SELECT * FROM '" + TOPIC + "'";
        SnsAction action1 = SnsAction.builder()
            .targetArn(action)
            .roleArn(roleARN)
            .build();

        // Create the action.
        Action myAction = Action.builder()
            .sns(action1)
            .build();

        // Create the topic rule payload.
        TopicRulePayload topicRulePayload = TopicRulePayload.builder()
            .sql(sql)
            .actions(myAction)
            .build();

        // Create the topic rule request.
        CreateTopicRuleRequest topicRuleRequest = CreateTopicRuleRequest.builder()
            .ruleName(ruleName)
            .topicRulePayload(topicRulePayload)
            .build();

        CompletableFuture<CreateTopicRuleResponse> future =
getAsyncClient().createTopicRule(topicRuleRequest);
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("IoT Rule created successfully.");
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to create IoT Rule.");
                }
            }
        });

        future.join();
```

```
    }
```

- Untuk detail API, lihat CreateTopicRuledi Referensi AWS SDK for Java 2.x API.

### `DeleteCertificate`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCertificate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a certificate asynchronously.
    *
    * @param certificateArn The ARN of the certificate to delete.
    *
    * This method initiates an asynchronous request to delete a certificate.
    * If the deletion is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void deleteCertificate(String certificateArn) {
       DeleteCertificateRequest certificateProviderRequest =
DeleteCertificateRequest.builder()
           .certificateId(extractCertificateId(certificateArn))
           .build();

       CompletableFuture<DeleteCertificateResponse> future =
getAsyncClient().deleteCertificate(certificateProviderRequest);
       future.whenComplete((voidResult, ex) -> {
           if (ex == null) {
               System.out.println(certificateArn + " was successfully deleted.");
           } else {
               Throwable cause = ex.getCause();
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
```

```
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat DeleteCertificatedi Referensi AWS SDK for Java 2.x API.

### `DeleteThing`

Contoh kode berikut menunjukkan cara menggunakan`DeleteThing`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing to delete.
     *
     * This method initiates an asynchronous request to delete an IoT Thing.
     * If the deletion is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void deleteIoTThing(String thingName) {
        DeleteThingRequest deleteThingRequest = DeleteThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DeleteThingResponse> future =
getAsyncClient().deleteThing(deleteThingRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
```

```
                System.out.println("Deleted Thing " + thingName);
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat DeleteThingdi Referensi AWS SDK for Java 2.x API.

### `DescribeEndpoint`

Contoh kode berikut menunjukkan cara menggunakan`DescribeEndpoint`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Describes the endpoint of the IoT service asynchronously.
     *
     * @return A CompletableFuture containing the full endpoint URL.
     *
     * This method initiates an asynchronous request to describe the endpoint of the
IoT service.
     * If the request is successful, it prints and returns the full endpoint URL.
     * If an exception occurs, it prints the error message.
     */
    public String describeEndpoint() {
```

```
        CompletableFuture<DescribeEndpointResponse> future =
 getAsyncClient().describeEndpoint(DescribeEndpointRequest.builder().endpointType("iot:Data-
ATS").build());
        final String[] result = {null};

        future.whenComplete((endpointResponse, ex) -> {
            if (endpointResponse != null) {
                String endpointUrl = endpointResponse.endpointAddress();
                String exString = getValue(endpointUrl);
                String fullEndpoint = "https://" + exString + "-ats.iot.us-
east-1.amazonaws.com";

                System.out.println("Full Endpoint URL: " + fullEndpoint);
                result[0] = fullEndpoint;
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
 ex.getCause() : ex;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
 cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + cause.getMessage());
                }
            }
        });

        future.join();
        return result[0];
    }
```

- Untuk detail API, lihat DescribeEndpointdi Referensi AWS SDK for Java 2.x API.

### `DescribeThing`

Contoh kode berikut menunjukkan cara menggunakan`DescribeThing`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Describes an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     *
     * This method initiates an asynchronous request to describe an IoT Thing.
     * If the request is successful, it prints the Thing details.
     * If an exception occurs, it prints the error message.
     */
    private void describeThing(String thingName) {
        DescribeThingRequest thingRequest = DescribeThingRequest.builder()
            .thingName(thingName)
            .build();

        CompletableFuture<DescribeThingResponse> future =
getAsyncClient().describeThing(thingRequest);
        future.whenComplete((describeResponse, ex) -> {
            if (describeResponse != null) {
                System.out.println("Thing Details:");
                System.out.println("Thing Name: " + describeResponse.thingName());
                System.out.println("Thing ARN: " + describeResponse.thingArn());
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to describe Thing.");
                }
            }
        });
```

```
        future.join();
    }
```

- Untuk detail API, lihat DescribeThingdi Referensi AWS SDK for Java 2.x API.

### `DetachThingPrincipal`

Contoh kode berikut menunjukkan cara menggunakan`DetachThingPrincipal`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Detaches a principal (certificate) from an IoT Thing asynchronously.
     *
     * @param thingName The name of the IoT Thing.
     * @param certificateArn The ARN of the certificate to detach.
     *
     * This method initiates an asynchronous request to detach a certificate from an
IoT Thing.
     * If the detachment is successful, it prints a confirmation message.
     * If an exception occurs, it prints the error message.
     */
    public void detachThingPrincipal(String thingName, String certificateArn) {
        DetachThingPrincipalRequest thingPrincipalRequest =
DetachThingPrincipalRequest.builder()
            .principal(certificateArn)
            .thingName(thingName)
            .build();

        CompletableFuture<DetachThingPrincipalResponse> future =
getAsyncClient().detachThingPrincipal(thingPrincipalRequest);
        future.whenComplete((voidResult, ex) -> {
            if (ex == null) {
                System.out.println(certificateArn + " was successfully removed from
" + thingName);
```

```
            } else {
                Throwable cause = ex.getCause();
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else {
                    System.err.println("Unexpected error: " + ex.getMessage());
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat DetachThingPrincipaldi Referensi AWS SDK for Java 2.x API.

### `ListCertificates`

Contoh kode berikut menunjukkan cara menggunakan`ListCertificates`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists all certificates asynchronously.
     *
     * This method initiates an asynchronous request to list all certificates.
     * If the request is successful, it prints the certificate IDs and ARNs.
     * If an exception occurs, it prints the error message.
     */
    public void listCertificates() {
        CompletableFuture<ListCertificatesResponse> future =
getAsyncClient().listCertificates();
        future.whenComplete((response, ex) -> {
            if (response != null) {
                List<Certificate> certList = response.certificates();
```

```
                for (Certificate cert : certList) {
                    System.out.println("Cert id: " + cert.certificateId());
                    System.out.println("Cert Arn: " + cert.certificateArn());
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to list certificates.");
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat ListCertificatesdi Referensi AWS SDK for Java 2.x API.

### `SearchIndex`

Contoh kode berikut menunjukkan cara menggunakan`SearchIndex`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Searches for IoT Things asynchronously based on a query string.
     *
     * @param queryString The query string to search for Things.
     *
     * This method initiates an asynchronous request to search for IoT Things.
     * If the request is successful and Things are found, it prints their IDs.
```

```
     * If no Things are found, it prints a message indicating so.
     * If an exception occurs, it prints the error message.
     */
    public void searchThings(String queryString) {
        SearchIndexRequest searchIndexRequest = SearchIndexRequest.builder()
            .queryString(queryString)
            .build();

        CompletableFuture<SearchIndexResponse> future =
getAsyncClient().searchIndex(searchIndexRequest);
        future.whenComplete((searchIndexResponse, ex) -> {
            if (searchIndexResponse != null) {
                // Process the result.
                if (searchIndexResponse.things().isEmpty()) {
                    System.out.println("No things found.");
                } else {
                    searchIndexResponse.things().forEach(thing ->
System.out.println("Thing id found using search is " + thing.thingId()));
                }
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to search for IoT Things.");
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat SearchIndexdi Referensi AWS SDK for Java 2.x API.

# AWS IoT data contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS IoT data.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


## Tindakan

### `GetThingShadow`

Contoh kode berikut menunjukkan cara menggunakan`GetThingShadow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves the payload of a Thing's shadow asynchronously.
    *
    * @param thingName The name of the IoT Thing.
    *
    * This method initiates an asynchronous request to get the payload of a Thing's
shadow.
    * If the request is successful, it prints the shadow data.
    * If an exception occurs, it prints the error message.
    */
   public void getPayload(String thingName) {
       GetThingShadowRequest getThingShadowRequest =
GetThingShadowRequest.builder()
           .thingName(thingName)
           .build();
```

```
        CompletableFuture<GetThingShadowResponse> future =
getAsyncDataPlaneClient().getThingShadow(getThingShadowRequest);
        future.whenComplete((getThingShadowResponse, ex) -> {
            if (getThingShadowResponse != null) {
                // Extracting payload from response.
                SdkBytes payload = getThingShadowResponse.payload();
                String payloadString = payload.asUtf8String();
                System.out.println("Received Shadow Data: " + payloadString);
            } else {
                Throwable cause = ex != null ? ex.getCause() : null;
                if (cause instanceof IotException) {
                    System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
                } else if (cause != null) {
                    System.err.println("Unexpected error: " + cause.getMessage());
                } else {
                    System.err.println("Failed to get Thing Shadow payload.");
                }
            }
        });

        future.join();
    }
```

- Untuk detail API, lihat GetThingShadowdi Referensi AWS SDK for Java 2.x API.

### `UpdateThingShadow`

Contoh kode berikut menunjukkan cara menggunakan`UpdateThingShadow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Updates the shadow of an IoT Thing asynchronously.
```

```
    *
    * @param thingName The name of the IoT Thing.
    *
    * This method initiates an asynchronous request to update the shadow of an IoT
Thing.
    * If the request is successful, it prints a confirmation message.
    * If an exception occurs, it prints the error message.
    */
   public void updateShadowThing(String thingName) {
       // Create Thing Shadow State Document.
       String stateDocument = "{\"state\":{\"reported\":{\"temperature\":25,
\"humidity\":50}}}";
       SdkBytes data = SdkBytes.fromString(stateDocument, StandardCharsets.UTF_8);
       UpdateThingShadowRequest updateThingShadowRequest =
UpdateThingShadowRequest.builder()
           .thingName(thingName)
           .payload(data)
           .build();

       CompletableFuture<UpdateThingShadowResponse> future =
getAsyncDataPlaneClient().updateThingShadow(updateThingShadowRequest);
       future.whenComplete((updateResponse, ex) -> {
           if (updateResponse != null) {
               System.out.println("Thing Shadow updated successfully.");
           } else {
               Throwable cause = ex != null ? ex.getCause() : null;
               if (cause instanceof IotException) {
                   System.err.println(((IotException)
cause).awsErrorDetails().errorMessage());
               } else if (cause != null) {
                   System.err.println("Unexpected error: " + cause.getMessage());
               } else {
                   System.err.println("Failed to update Thing Shadow.");
               }
           }
       });

       future.join();
   }
```

- Untuk detail API, lihat UpdateThingShadowdi Referensi AWS SDK for Java 2.x API.

# AWS IoT FleetWise contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS IoT FleetWise.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

Halo AWS IoT FleetWise

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS IoT FleetWise.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class HelloFleetwise {

        public static void main(String[] args) {
            ListSignalCatalogs();
```

```
        }

        public static void  ListSignalCatalogs() {
            try (IoTFleetWiseClient fleetWiseClient = IoTFleetWiseClient.builder()
                    .region(Region.US_EAST_1)
                    .credentialsProvider(DefaultCredentialsProvider.create())
                    .build()) {

                ListSignalCatalogsRequest request =
ListSignalCatalogsRequest.builder()
                        .maxResults(10) // Optional: limit per page
                        .build();

                ListSignalCatalogsIterable paginator =
fleetWiseClient.listSignalCatalogsPaginator(request);
                boolean found = false;

                for (ListSignalCatalogsResponse response : paginator) {
                    for (SignalCatalogSummary summary : response.summaries()) {
                        found = true;
                        System.out.println("Catalog Name: " + summary.name());
                        System.out.println("ARN: " + summary.arn());
                        System.out.println("Created: " + summary.creationTime());
                        System.out.println("Last Modified: " +
summary.lastModificationTime());
                        System.out.println("---------------");
                    }
                }

                if (!found) {
                    System.out.println("No AWS Fleetwise Signal Catalogs were
found.");
                }

            } catch (IoTFleetWiseException e) {
                System.err.println("Error listing signal catalogs: " +
e.awsErrorDetails().errorMessage());
                throw new RuntimeException(e);
            }
        }
    }
```

- Untuk detail API, lihat listSignalCatalogsPaginator di Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat kumpulan sinyal standar.
- Buat armada yang mewakili sekelompok kendaraan.
- Buat manifes model.
- Buat manifes decoder.
- Periksa status manifes model.
- Periksa status decoder.
- Buat IoT Thing.
- Buat kendaraan.
- Tampilkan detail kendaraan.
- Hapus AWS IoT FleetWise Aset.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan AWS IoT SiteWise fitur.

```
public class FleetwiseScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    static FleetwiseActions actions = new FleetwiseActions();
    private static final Logger logger =
 LoggerFactory.getLogger(FleetwiseScenario.class);
    static Scanner scanner = new Scanner(System.in);

    public static void main(String[] args) {
        final String usage =
                """
                Usage:
```

```
                    <signalCatalogName> <manifestName> <fleetId> <vecName> <decName>

                Where:
                    signalCatalogName     - The name of the Signal Catalog to create
(eg, catalog30).
                    manifestName          - The name of the Vehicle Model (Model
Manifest) to create (eg, manifest30).
                    fleetId               - The ID of the Fleet to create (eg,
fleet30).
                    vecName               - The name of the Vehicle to create (eg,
vehicle30).
                    decName               - The name of the Decoder Manifest to
create (eg, decManifest30).
                """;

        if (args.length != 5) {
            logger.info(usage);
            return;
        }

        String signalCatalogName = args[0];
        String manifestName = args[1];
        String fleetId = args[2];
        String vecName = args[3];
        String decName = args[4];

        logger.info(
                """
                 AWS IoT FleetWise is a managed service that simplifies the
                 process of collecting, organizing, and transmitting vehicle
                 data to the cloud in near real-time. Designed for automakers
                 and fleet operators, it allows you to define vehicle models,
                 specify the exact data you want to collect (such as engine
                 temperature, speed, or battery status), and send this data to
                 AWS for analysis. By using intelligent data collection
                 techniques, IoT FleetWise reduces the volume of data
                 transmitted by filtering and transforming it at the edge,
                 helping to minimize bandwidth usage and costs.

                At its core, AWS IoT FleetWise helps organizations build
                scalable systems for vehicle data management and analytics,
                supporting a wide variety of vehicles and sensor configurations.
                You can define signal catalogs and decoder manifests that describe
                how raw CAN bus signals are translated into readable data, making
```

```
                the platform highly flexible and extensible. This allows
                manufacturers to optimize vehicle performance, improve safety,
                and reduce maintenance costs by gaining real-time visibility
                into fleet operations.
                """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);
        try {
            runScenario(signalCatalogName, manifestName, fleetId, vecName, decName);
        } catch (RuntimeException e) {
            logger.info(e.getMessage());
        }
    }

    private static void runScenario(String signalCatalogName,
                                    String manifestName,
                                    String fleetId,
                                    String vecName,
                                    String decName) {
        logger.info(DASHES);
        logger.info("1. Creates a collection of standardized signals that can be
reused to create vehicle models");
        String signalCatalogArn;
        try {
            signalCatalogArn =
actions.createSignalCatalogAsync(signalCatalogName).join();
            logger.info("The collection ARN is " + signalCatalogArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ValidationException) {
                logger.error("The request failed due to a validation issue: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Create a fleet that represents a group of vehicles");
        logger.info(
```

```
                """
                Creating an IoT FleetWise fleet allows you to efficiently collect,
                organize, and transfer vehicle data to the cloud, enabling real-
time
                insights into vehicle performance and health.

                It helps reduce data costs by allowing you to filter and prioritize
                only the most relevant vehicle signals, supporting advanced
 analytics
                and predictive maintenance use cases.
                """);

        waitForInputToContinue(scanner);
        String fleetid;
        try {
            fleetid = actions.createFleetAsync(signalCatalogArn, fleetId).join();
            logger.info("The fleet Id is " + fleetid);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The resource was not found: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a model manifest");
        logger.info(
                """
                An AWS IoT FleetWise manifest defines the structure and
                relationships of vehicle data. The model manifest specifies
                which signals to collect and how they relate to vehicle systems,
                while the decoder manifest defines how to decode raw vehicle data
                into meaningful signals.
                """);
        waitForInputToContinue(scanner);
        String manifestArn;
        try {
            List<Node> nodes =
 actions.listSignalCatalogNodeAsync(signalCatalogName).join();
```

```
            manifestArn = actions.createModelManifestAsync(manifestName,
signalCatalogArn, nodes).join();
            logger.info("The manifest ARN is {}", manifestArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Create a decoder manifest");
        logger.info(
                """
                A decoder manifest in AWS IoT FleetWise defines how raw vehicle
                data (such as CAN signals) should be interpreted and decoded
                into meaningful signals. It acts as a translation layer
                that maps vehicle-specific protocols to standardized data formats
                using decoding rules. This is crucial for extracting usable
                data from different vehicle models, even when their data
                formats vary.

                """);
        waitForInputToContinue(scanner);
        String decArn;
        try {
            decArn = actions.createDecoderManifestAsync(decName,
manifestArn).join();
            logger.info("The decoder manifest ARN is {}", decArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("5. Check the status of the model manifest");
        logger.info(
                """
                The model manifest must be in an ACTIVE state before it can be used
                to create or update a vehicle.
                """);
```

```
        waitForInputToContinue(scanner);
        try {
            actions.updateModelManifestAsync(manifestName);
            actions.waitForModelManifestActiveAsync(manifestName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred while waiting for the model
manifest status.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("6. Check the status of the decoder");
        logger.info(
                """
                The decoder manifest must be in an ACTIVE state before it can be
used
                to create or update a vehicle.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.updateDecoderManifestAsync(decName);
            actions.waitForDecoderManifestActiveAsync(decName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred while waiting for the decoder
manifest status.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Create an IoT Thing");
        logger.info(
                """
                AWS IoT FleetWise expects an existing AWS IoT Thing with the same
                name as the vehicle name you are passing to createVehicle method.
                Before calling createVehicle(), you must create an AWS IoT Thing
                with the same name using the AWS IoT Core service.
                """);
        waitForInputToContinue(scanner);
        try {
```

```
            actions.createThingIfNotExistsAsync(vecName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceAlreadyExistsException) {
                logger.error("The resource exists: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
                return;
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Create a vehicle");
        logger.info(
                """
                Creating a vehicle in AWS IoT FleetWise allows you to digitally
                represent and manage a physical vehicle within the AWS ecosystem.
                This enables efficient ingestion, transformation, and transmission
                of vehicle telemetry data to the cloud for analysis.
                """);
        waitForInputToContinue(scanner);
        try {
            actions.createVehicleAsync(vecName, manifestArn, decArn).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();

            if (cause instanceof ResourceNotFoundException) {
                logger.error("The required resource was not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating vehicle.",
cause);
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Display vehicle details");
        waitForInputToContinue(scanner);
        try {
            actions.getVehicleDetailsAsync(vecName).join();
```

```
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The resource was not found: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("10. Delete the AWS IoT Fleetwise Assets");
        logger.info("Would you like to delete the IoT Fleetwise Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            try {
                actions.deleteVehicleAsync(vecName).join();
                actions.deleteDecoderManifestAsync(decName).join();
                actions.deleteModelManifestAsync(manifestName).join();
                actions.deleteFleetAsync(fleetid).join();
                actions.deleteSignalCatalogAsync(signalCatalogName).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    // Handle the case where the resource is not found.
                    logger.error("The resource was not found: {}",
cause.getMessage());
                } else if (cause instanceof RuntimeException) {
                    // Handle other runtime exceptions.
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                } else {
                    // Catch any other unexpected exceptions.
                    logger.error("An unknown error occurred.", cause);
                }
                return;
            }

            logger.info(DASHES);
            logger.info(
                    """
```

```
                    Thank you for checking out the AWS IoT Fleetwise Service Use
 demo. We hope you
                    learned something new, or got some inspiration for your own apps
 today.
                    For more AWS code examples, have a look at:
                    https://docs.aws.amazon.com/code-library/latest/ug/what-is-code-
library.html
                    """);
            logger.info(DASHES);
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode AWS IoT FleetWise SDK.

```
public class FleetwiseActions {
    private static final Logger logger =
 LoggerFactory.getLogger(FleetwiseActions.class);
    private static IoTFleetWiseAsyncClient ioTFleetWiseAsyncClient;

    private static IoTFleetWiseAsyncClient getAsyncClient() {
        if (ioTFleetWiseAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
```

```
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            ioTFleetWiseAsyncClient = IoTFleetWiseAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return ioTFleetWiseAsyncClient;
    }


    /**
     * Creates a signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to be created
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created signal catalog
     */
    public CompletableFuture<String> createSignalCatalogAsync(String
signalCatalogName) {
        return deleteSignalCatalogIfExistsAsync(signalCatalogName)
                .thenCompose(ignored -> delayAsync(2000)) // Wait for 2 seconds
                .thenCompose(ignored -> {
                    List<Node> nodes = List.of(
                            Node.builder().branch(
                                    Branch.builder()
                                            .fullyQualifiedName("Vehicle")
                                            .description("Root branch")
                                            .build()
                            ).build(),
                            Node.builder().branch(
                                    Branch.builder()

.fullyQualifiedName("Vehicle.Powertrain")
```

```
                                        .description("Powertrain branch")
                                        .build()
                            ).build(),
                            Node.builder().sensor(
                                    Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                                        .description("Engine RPM")
                                        .dataType(NodeDataType.DOUBLE)
                                        .unit("rpm")
                                        .build()
                            ).build(),
                            Node.builder().sensor(
                                    Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                                        .description("Vehicle Speed")
                                        .dataType(NodeDataType.DOUBLE)
                                        .unit("km/h")
                                        .build()
                            ).build()
                    );

                    CreateSignalCatalogRequest request =
CreateSignalCatalogRequest.builder()
                            .name(signalCatalogName)
                            .nodes(nodes)
                            .build();

                    CompletableFuture<String> result = new CompletableFuture<>();

                    getAsyncClient().createSignalCatalog(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                                    if (cause instanceof ValidationException) {
                                        result.completeExceptionally(cause);
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error creating the catalog", cause));
                                    }
                                } else {
```

```
                                    result.complete(response.arn());
                                }
                            });

                    return result;
                });
    }

    /**
     * Delays the execution of the current thread asynchronously for the specified
duration.
     *
     * @param millis the duration of the delay in milliseconds
     * @return a {@link CompletableFuture} that completes after the specified delay
     */
    private static CompletableFuture<Void> delayAsync(long millis) {
        return CompletableFuture.runAsync(() -> {
            try {
                Thread.sleep(millis);
            } catch (InterruptedException e) {
                throw new CompletionException("Sleep interrupted", e);
            }
        });
    }

    /**
     * Deletes the specified signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to delete
     * @return a {@link CompletableFuture} representing the asynchronous operation.
     */
    public static CompletableFuture<Void> deleteSignalCatalogIfExistsAsync(String
signalCatalogName) {
        DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
                .name(signalCatalogName)
                .build();

        return getAsyncClient().deleteSignalCatalog(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
```

```
                            throw new CompletionException(new
RuntimeException("Signal Catalog not found: " + signalCatalogName));
                        }
                        throw new RuntimeException("Failed to delete signal catalog:
" + signalCatalogName, cause);
                    }
                    return null;
                });
    }


    /**
     * Creates a new decoder manifest.
     *
     * @param name             the name of the decoder manifest
     * @param modelManifestArn the ARN of the model manifest
     * @return a {@link CompletableFuture} that completes with the ARN of the
created decoder manifest
     */
    public CompletableFuture<String> createDecoderManifestAsync(String name, String
modelManifestArn) {
        String interfaceId = "can0";
        NetworkInterface networkInterface = NetworkInterface.builder()
                .interfaceId(interfaceId)
                .type(NetworkInterfaceType.CAN_INTERFACE)
                .canInterface(CanInterface.builder()
                        .name("canInterface0")
                        .protocolName("CAN")
                        .protocolVersion("1.0")
                        .build())
                .build();

        // Vehicle.Powertrain.EngineRPM decoder.
        SignalDecoder engineRpmDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(100)
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(0)
                        .length(16)
                        .factor(1.0)
```

```
                        .offset(0.0)
                        .build())
                .build();

        // Vehicle.Powertrain.VehicleSpeed decoder.
        SignalDecoder vehicleSpeedDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(101)
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(16)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        CreateDecoderManifestRequest request =
CreateDecoderManifestRequest.builder()
                .name(name)
                .modelManifestArn(modelManifestArn)
                .networkInterfaces(List.of(networkInterface))
                .signalDecoders(List.of(engineRpmDecoder, vehicleSpeedDecoder))
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();

        getAsyncClient().createDecoderManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof DecoderManifestValidationException) {
                            result.completeExceptionally(new
CompletionException("The request contains signal decoders with validation errors: "
+ cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create decoder manifest: " + exception.getMessage(),
exception));
```

```
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }

    /**
     * Deletes a decoder manifest.
     *
     * @param name the name of the decoder manifest to delete
     * @return a {@link CompletableFuture} that completes when the decoder manifest
has been deleted
     */
    public CompletableFuture<Void> deleteDecoderManifestAsync(String name) {
        return
getAsyncClient().deleteDecoderManifest(DeleteDecoderManifestRequest.builder().name(name).bu
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the decoder
manifest: " + cause);
                    }
                    return null;
                });
    }


    /**
     * Deletes a vehicle with the specified name.
     *
     * @param vecName the name of the vehicle to be deleted
     * @return a {@link CompletableFuture} that completes when the vehicle has been
deleted
     */
    public CompletableFuture<Void> deleteVehicleAsync(String vecName) {
        DeleteVehicleRequest request = DeleteVehicleRequest.builder()
```

```
                .vehicleName(vecName)
                .build();

        return getAsyncClient().deleteVehicle(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the vehicle: "
+ cause);
                    }
                    return null;
                });
    }


    /**
     * Updates the model manifest.
     *
     * @param name the name of the model manifest to update
     */
    public void updateModelManifestAsync(String name) {
        UpdateModelManifestRequest request = UpdateModelManifestRequest.builder()
                .name(name)
                .status(ManifestStatus.ACTIVE)
                .build();

        getAsyncClient().updateModelManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        throw new CompletionException("Failed to update model
manifest: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> null);
    }


    /**
     * Updates the decoder manifest with the given name.
     *
```

```
    * @param name the name of the decoder manifest to update
    * @return a {@link CompletableFuture} that completes when the update operation
is finished
    */
   public CompletableFuture<Void> updateDecoderManifestAsync(String name) {
       UpdateDecoderManifestRequest request =
UpdateDecoderManifestRequest.builder()
               .name(name)
               .status(ManifestStatus.ACTIVE)
               .build();

       return getAsyncClient().updateDecoderManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       throw new CompletionException("Failed to update decoder
manifest: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> null);
   }


   /**
    * Creates a new vehicle in the system.
    *
    * @param vecName     the name of the vehicle to be created
    * @param manifestArn the Amazon Resource Name (ARN) of the model manifest for
the vehicle
    * @param decArn      the Amazon Resource Name (ARN) of the decoder manifest for
the vehicle
    * @return a {@link CompletableFuture} that completes when the vehicle has been
created, or throws a
    */
   public CompletableFuture<Void> createVehicleAsync(String vecName, String
manifestArn, String decArn) {
       CreateVehicleRequest request = CreateVehicleRequest.builder()
               .vehicleName(vecName)
               .modelManifestArn(manifestArn)
               .decoderManifestArn(decArn)
               .build();

       CompletableFuture<Void> result = new CompletableFuture<>();
       getAsyncClient().createVehicle(request)
               .whenComplete((response, exception) -> {
```

```
                    if (exception != null) {
                        Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new
RuntimeException("Failed to create vehicle: " + cause.getMessage(), cause));
                        }
                    } else {
                        logger.info("Vehicle '{}' created successfully.", vecName);
                        result.complete(null); // mark future as complete
                    }
                });

        return result;
    }


    /**
     * Waits for the decoder manifest to become active.
     *
     * @param decoderName the name of the decoder to wait for
     * @return a {@link CompletableFuture} that completes when the decoder manifest
becomes active, or exceptionally if an error occurs or the manifest becomes invalid
     */
    public CompletableFuture<Void> waitForDecoderManifestActiveAsync(String
decoderName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

        logger.info(" Elapsed: 0s | Decoder Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
            public void run() {
                int elapsed = secondsElapsed.incrementAndGet();
```

```
                // Check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetDecoderManifestRequest request =
GetDecoderManifestRequest.builder()
                            .name(decoderName)
                            .build();

                    getAsyncClient().getDecoderManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Decoder manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling decoder manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
ACTIVE", elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
INVALID", elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Decoder manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\r# Elapsed: {}s | Decoder Status:
{}", elapsed, status);
                                }
```

```
                            });
                } else {
                    logger.info("\r Elapsed: {}s | Decoder Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }



    /**
     * Waits for the specified model manifest to become active.
     *
     * @param manifestName the name of the model manifest to wait for
     */
    public CompletableFuture<Void> waitForModelManifestActiveAsync(String
manifestName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

        logger.info("Elapsed: 0s | Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
            public void run() {
                int elapsed = secondsElapsed.incrementAndGet();

                // Only check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetModelManifestRequest request =
GetModelManifestRequest.builder()
                            .name(manifestName)
                            .build();
```

```
                    getAsyncClient().getModelManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Model manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling model manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\rElapsed: {}s | Status: ACTIVE",
elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\rElapsed: {}s | Status: INVALID",
elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Model manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\rElapsed: {}s | Status: {}",
elapsed, status);
                                }
                            });
                } else {
                    logger.info("\rElapsed: {}s | Status: {}", elapsed,
lastStatus.get());
                }
            }
        };
```

```
        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }



    /**
     * Fetches the details of a vehicle.
     *
     * @param vehicleName the name of the vehicle to fetch details for
     * @return a {@link CompletableFuture} that completes when the vehicle details
have been fetched
     */
    public CompletableFuture<Void> getVehicleDetailsAsync(String vehicleName) {
        GetVehicleRequest request = GetVehicleRequest.builder()
                .vehicleName(vehicleName)
                .build();

        CompletableFuture<Void> result = new CompletableFuture<>();

        getAsyncClient().getVehicle(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause); // don't rewrap
                        } else {
                            result.completeExceptionally(new
RuntimeException("Failed to fetch vehicle details: " + cause.getMessage(), cause));
                        }
                    } else {
                        Map<String, Object> details = new HashMap<>();
                        details.put("vehicleName", response.vehicleName());
                        details.put("arn", response.arn());
                        details.put("modelManifestArn",
response.modelManifestArn());
                        details.put("decoderManifestArn",
response.decoderManifestArn());
                        details.put("attributes", response.attributes());
```

```
                        details.put("creationTime",
response.creationTime().toString());
                        details.put("lastModificationTime",
response.lastModificationTime().toString());

                        logger.info("Vehicle Details:");
                        details.forEach((key, value) -> logger.info("• {} : {}",
key, value));

                        result.complete(null); // mark as successful
                    }
                });

        return result;
    }


    /**
     * Creates an IoT Thing if it does not already exist.
     *
     * @param thingName the name of the IoT Thing to create
     * @return a {@link CompletableFuture} that completes when the IoT Thing has
been created or if it already exists
     */
    public CompletableFuture<Void> createThingIfNotExistsAsync(String thingName) {
        IotAsyncClient iotClient = IotAsyncClient.builder()
                .region(Region.US_EAST_1)
                .build();

        CreateThingRequest request = CreateThingRequest.builder()
                .thingName(thingName)
                .build();

        return iotClient.createThing(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        if (exception instanceof ResourceAlreadyExistsException) {
                            logger.info(" IoT Thing already exists: " + thingName);
                        } else {
                            throw new CompletionException("Failed to create IoT
Thing: " + thingName, exception);
                        }
                    } else {
                        logger.info("IoT Thing created: " + response.thingName());
```

```
                    }
                })
                .thenApply(response -> null);
    }


    /**
     * Deletes a model manifest.
     *
     * @param name the name of the model manifest to delete
     * @return a {@link CompletableFuture} that completes when the model manifest
has been deleted
     */
    public CompletableFuture<Void> deleteModelManifestAsync(String name) {
        DeleteModelManifestRequest request = DeleteModelManifestRequest.builder()
                .name(name)
                .build();

        return getAsyncClient().deleteModelManifest(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the model
manifest: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }


    /**
     * Deletes a signal catalog.
     *
     * @param name the name of the signal catalog to delete
     * @return a {@link CompletableFuture} that completes when the signal catalog is
deleted
     */
    public CompletableFuture<Void> deleteSignalCatalogAsync(String name) {
        DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
```

```
                .name(name)
                .build();

        return getAsyncClient().deleteSignalCatalog(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the signal
catalog: " + cause);
                    }
                    logger.info("{} was successfully deleted", name);
                    return null;
                });
    }

    /**
     * Asynchronously retrieves a list of all nodes in the specified signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to retrieve nodes for
     * @return a {@link CompletableFuture} that, when completed, contains a {@link
List} of {@link Node} objects
     * representing all the nodes in the specified signal catalog
     */
    public CompletableFuture<List<Node>> listSignalCatalogNodeAsync(String
signalCatalogName) {
        ListSignalCatalogNodesRequest request =
ListSignalCatalogNodesRequest.builder()
                .name(signalCatalogName)
                .build();

        List<Node> allNodes = new ArrayList<>();

        return getAsyncClient().listSignalCatalogNodesPaginator(request)
                .subscribe(response -> allNodes.addAll(response.nodes()))
                .thenApply(v -> allNodes);
    }



    /**
```

```
    * Creates a model manifest.
    *
    * @param name             the name of the model manifest to create
    * @param signalCatalogArn the Amazon Resource Name (ARN) of the signal catalog
    * @param nodes            a list of nodes to include in the model manifest
    * @return a {@link CompletableFuture} that completes with the ARN of the
created model manifest
    */
   public CompletableFuture<String> createModelManifestAsync(String name,
                                                              String
signalCatalogArn,
                                                              List<Node> nodes) {
       // Extract the fully qualified names (FQNs) from each Node in the provided
list.
       List<String> fqnList = nodes.stream()
               .map(node -> {
                   if (node.sensor() != null) {
                       return node.sensor().fullyQualifiedName();
                   } else if (node.branch() != null) {
                       return node.branch().fullyQualifiedName();
                   } else if (node.attribute() != null) {
                       return node.attribute().fullyQualifiedName();
                   } else {
                       throw new RuntimeException("Unsupported node type");
                   }
               })
               .toList();

       CreateModelManifestRequest request = CreateModelManifestRequest.builder()
               .name(name)
               .signalCatalogArn(signalCatalogArn)
               .nodes(fqnList)
               .build();


       CompletableFuture<String> result = new CompletableFuture<>();
       getAsyncClient().createModelManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                       if (cause instanceof InvalidSignalsException) {
```

```
                            result.completeExceptionally(new
CompletionException("The request contains signals that aren't valid: " +
cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create model manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }


    /**
     * Deletes a fleet based on the provided fleet ID.
     *
     * @param fleetId the ID of the fleet to be deleted
     */
    public CompletableFuture<Void> deleteFleetAsync(String fleetId) {
        DeleteFleetRequest request = DeleteFleetRequest.builder()
                .fleetId(fleetId)
                .build();

        return getAsyncClient().deleteFleet(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the fleet: " +
cause);
                    }
                    logger.info("{} was successfully deleted", fleetId);
                    return null;
                });
    }
```

```
    /**
     * Creates a new fleet.
     *
     * @param catARN  the Amazon Resource Name (ARN) of the signal catalog to
 associate with the fleet
     * @param fleetId the unique identifier for the fleet
     * @return a {@link CompletableFuture} that completes with the ID of the created
 fleet
     */
    public CompletableFuture<String> createFleetAsync(String catARN, String fleetId)
 {
        CreateFleetRequest fleetRequest = CreateFleetRequest.builder()
                .fleetId(fleetId)
                .signalCatalogArn(catARN)
                .description("Built using the AWS For Java V2")
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();
        getAsyncClient().createFleet(fleetRequest)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
 exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new RuntimeException("An
 unexpected error occurred", cause));
                        }
                    } else {
                        result.complete(response.id());
                    }
                });

        return result;
    }
}
```

# Tindakan

## `createDecoderManifest`

Contoh kode berikut menunjukkan cara menggunakan`createDecoderManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new decoder manifest.
    *
    * @param name             the name of the decoder manifest
    * @param modelManifestArn the ARN of the model manifest
    * @return a {@link CompletableFuture} that completes with the ARN of the
created decoder manifest
    */
   public CompletableFuture<String> createDecoderManifestAsync(String name, String
modelManifestArn) {
       String interfaceId = "can0";
       NetworkInterface networkInterface = NetworkInterface.builder()
               .interfaceId(interfaceId)
               .type(NetworkInterfaceType.CAN_INTERFACE)
               .canInterface(CanInterface.builder()
                       .name("canInterface0")
                       .protocolName("CAN")
                       .protocolVersion("1.0")
                       .build())
               .build();

       // Vehicle.Powertrain.EngineRPM decoder.
       SignalDecoder engineRpmDecoder = SignalDecoder.builder()
               .fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
               .interfaceId(interfaceId)
               .type(SignalDecoderType.CAN_SIGNAL)
               .canSignal(CanSignal.builder()
                       .messageId(100)
```

```
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(0)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        // Vehicle.Powertrain.VehicleSpeed decoder.
        SignalDecoder vehicleSpeedDecoder = SignalDecoder.builder()
                .fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                .interfaceId(interfaceId)
                .type(SignalDecoderType.CAN_SIGNAL)
                .canSignal(CanSignal.builder()
                        .messageId(101)
                        .isBigEndian(false)
                        .isSigned(false)
                        .startBit(16)
                        .length(16)
                        .factor(1.0)
                        .offset(0.0)
                        .build())
                .build();

        CreateDecoderManifestRequest request =
CreateDecoderManifestRequest.builder()
                .name(name)
                .modelManifestArn(modelManifestArn)
                .networkInterfaces(List.of(networkInterface))
                .signalDecoders(List.of(engineRpmDecoder, vehicleSpeedDecoder))
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();

        getAsyncClient().createDecoderManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof DecoderManifestValidationException) {
```

```
                            result.completeExceptionally(new
CompletionException("The request contains signal decoders with validation errors: "
+ cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create decoder manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }
```

- Untuk detail API, lihat createDecoderManifestdi Referensi AWS SDK for Java 2.x API.

### `createFleet`

Contoh kode berikut menunjukkan cara menggunakan`createFleet`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new fleet.
     *
     * @param catARN  the Amazon Resource Name (ARN) of the signal catalog to
associate with the fleet
     * @param fleetId the unique identifier for the fleet
     * @return a {@link CompletableFuture} that completes with the ID of the created
fleet
     */
```

```
    public CompletableFuture<String> createFleetAsync(String catARN, String fleetId)
{
        CreateFleetRequest fleetRequest = CreateFleetRequest.builder()
                .fleetId(fleetId)
                .signalCatalogArn(catARN)
                .description("Built using the AWS For Java V2")
                .build();

        CompletableFuture<String> result = new CompletableFuture<>();
        getAsyncClient().createFleet(fleetRequest)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                        if (cause instanceof ResourceNotFoundException) {
                            result.completeExceptionally(cause);
                        } else {
                            result.completeExceptionally(new RuntimeException("An
unexpected error occurred", cause));
                        }
                    } else {
                        result.complete(response.id());
                    }
                });

        return result;
    }
```

- Untuk detail API, lihat createFleet di Referensi API.AWS SDK for Java 2.x

### `createModelManifest`

Contoh kode berikut menunjukkan cara menggunakan`createModelManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a model manifest.
    *
    * @param name             the name of the model manifest to create
    * @param signalCatalogArn the Amazon Resource Name (ARN) of the signal catalog
    * @param nodes            a list of nodes to include in the model manifest
    * @return a {@link CompletableFuture} that completes with the ARN of the
created model manifest
    */
   public CompletableFuture<String> createModelManifestAsync(String name,
                                                              String
signalCatalogArn,
                                                              List<Node> nodes) {
       // Extract the fully qualified names (FQNs) from each Node in the provided
list.
       List<String> fqnList = nodes.stream()
               .map(node -> {
                   if (node.sensor() != null) {
                       return node.sensor().fullyQualifiedName();
                   } else if (node.branch() != null) {
                       return node.branch().fullyQualifiedName();
                   } else if (node.attribute() != null) {
                       return node.attribute().fullyQualifiedName();
                   } else {
                       throw new RuntimeException("Unsupported node type");
                   }
               })
               .toList();

       CreateModelManifestRequest request = CreateModelManifestRequest.builder()
               .name(name)
               .signalCatalogArn(signalCatalogArn)
               .nodes(fqnList)
               .build();


       CompletableFuture<String> result = new CompletableFuture<>();
       getAsyncClient().createModelManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
```

```
                        if (cause instanceof InvalidSignalsException) {
                            result.completeExceptionally(new
CompletionException("The request contains signals that aren't valid: " +
cause.getMessage(), cause));
                        } else {
                            result.completeExceptionally(new
CompletionException("Failed to create model manifest: " + exception.getMessage(),
exception));
                        }
                    } else {
                        result.complete(response.arn()); // Complete successfully
with the ARN
                    }
                });

        return result;
    }
```

- Untuk detail API, lihat createModelManifestdi Referensi AWS SDK for Java 2.x API.

### `createSignalCatalog`

Contoh kode berikut menunjukkan cara menggunakan`createSignalCatalog`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to be created
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created signal catalog
     */
```

```
   public CompletableFuture<String> createSignalCatalogAsync(String
signalCatalogName) {
       return deleteSignalCatalogIfExistsAsync(signalCatalogName)
               .thenCompose(ignored -> delayAsync(2000)) // Wait for 2 seconds
               .thenCompose(ignored -> {
                   List<Node> nodes = List.of(
                           Node.builder().branch(
                                   Branch.builder()
                                           .fullyQualifiedName("Vehicle")
                                           .description("Root branch")
                                           .build()
                           ).build(),
                           Node.builder().branch(
                                   Branch.builder()

.fullyQualifiedName("Vehicle.Powertrain")
                                           .description("Powertrain branch")
                                           .build()
                           ).build(),
                           Node.builder().sensor(
                                   Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.EngineRPM")
                                           .description("Engine RPM")
                                           .dataType(NodeDataType.DOUBLE)
                                           .unit("rpm")
                                           .build()
                           ).build(),
                           Node.builder().sensor(
                                   Sensor.builder()

.fullyQualifiedName("Vehicle.Powertrain.VehicleSpeed")
                                           .description("Vehicle Speed")
                                           .dataType(NodeDataType.DOUBLE)
                                           .unit("km/h")
                                           .build()
                           ).build()
                   );

                   CreateSignalCatalogRequest request =
CreateSignalCatalogRequest.builder()
                           .name(signalCatalogName)
                           .nodes(nodes)
                           .build();
```

```
                    CompletableFuture<String> result = new CompletableFuture<>();

                    getAsyncClient().createSignalCatalog(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;

                                    if (cause instanceof ValidationException) {
                                        result.completeExceptionally(cause);
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error creating the catalog", cause));
                                    }
                                } else {
                                    result.complete(response.arn());
                                }
                            });

                    return result;
                });
    }
```

- Untuk detail API, lihat createSignalCatalogdi Referensi AWS SDK for Java 2.x API.

### `createVehicle`

Contoh kode berikut menunjukkan cara menggunakan`createVehicle`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
    * Creates a new vehicle in the system.
    *
    * @param vecName     the name of the vehicle to be created
    * @param manifestArn the Amazon Resource Name (ARN) of the model manifest for
the vehicle
    * @param decArn      the Amazon Resource Name (ARN) of the decoder manifest for
the vehicle
    * @return a {@link CompletableFuture} that completes when the vehicle has been
created, or throws a
    */
   public CompletableFuture<Void> createVehicleAsync(String vecName, String
manifestArn, String decArn) {
       CreateVehicleRequest request = CreateVehicleRequest.builder()
               .vehicleName(vecName)
               .modelManifestArn(manifestArn)
               .decoderManifestArn(decArn)
               .build();

       CompletableFuture<Void> result = new CompletableFuture<>();
       getAsyncClient().createVehicle(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                       if (cause instanceof ResourceNotFoundException) {
                           result.completeExceptionally(cause);
                       } else {
                           result.completeExceptionally(new
RuntimeException("Failed to create vehicle: " + cause.getMessage(), cause));
                       }
                   } else {
                       logger.info("Vehicle '{}' created successfully.", vecName);
                       result.complete(null); // mark future as complete
                   }
               });

       return result;
   }
```

- Untuk detail API, lihat CreateVehicle di Referensi API.AWS SDK for Java 2.x

### `deleteDecoderManifest`

Contoh kode berikut menunjukkan cara menggunakan`deleteDecoderManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a decoder manifest.
    *
    * @param name the name of the decoder manifest to delete
    * @return a {@link CompletableFuture} that completes when the decoder manifest
has been deleted
    */
   public CompletableFuture<Void> deleteDecoderManifestAsync(String name) {
       return
getAsyncClient().deleteDecoderManifest(DeleteDecoderManifestRequest.builder().name(name).bu
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }
                       throw new RuntimeException("Failed to delete the decoder
manifest: " + cause);
                   }
                   return null;
               });
   }
```

- Untuk detail API, lihat deleteDecoderManifestdi Referensi AWS SDK for Java 2.x API.

### `deleteFleet`

Contoh kode berikut menunjukkan cara menggunakan`deleteFleet`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a fleet based on the provided fleet ID.
     *
     * @param fleetId the ID of the fleet to be deleted
     */
    public CompletableFuture<Void> deleteFleetAsync(String fleetId) {
        DeleteFleetRequest request = DeleteFleetRequest.builder()
                .fleetId(fleetId)
                .build();

        return getAsyncClient().deleteFleet(request)
                .handle((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }
                        throw new RuntimeException("Failed to delete the fleet: " +
cause);
                    }
                    logger.info("{} was successfully deleted", fleetId);
                    return null;
                });
    }
```

- Untuk detail API, lihat DeleteFleet di AWS SDK for Java 2.x Referensi API.

### `deleteModelManifest`

Contoh kode berikut menunjukkan cara menggunakan`deleteModelManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a model manifest.
    *
    * @param name the name of the model manifest to delete
    * @return a {@link CompletableFuture} that completes when the model manifest
has been deleted
    */
   public CompletableFuture<Void> deleteModelManifestAsync(String name) {
       DeleteModelManifestRequest request = DeleteModelManifestRequest.builder()
               .name(name)
               .build();

       return getAsyncClient().deleteModelManifest(request)
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }
                       throw new RuntimeException("Failed to delete the model
manifest: " + cause);
                   }
                   logger.info("{} was successfully deleted", name);
                   return null;
               });
   }
```

- Untuk detail API, lihat deleteModelManifestdi Referensi AWS SDK for Java 2.x API.

### `deleteSignalCatalog`

Contoh kode berikut menunjukkan cara menggunakan`deleteSignalCatalog`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a signal catalog.
    *
    * @param name the name of the signal catalog to delete
    * @return a {@link CompletableFuture} that completes when the signal catalog is
deleted
    */
   public CompletableFuture<Void> deleteSignalCatalogAsync(String name) {
       DeleteSignalCatalogRequest request = DeleteSignalCatalogRequest.builder()
               .name(name)
               .build();

       return getAsyncClient().deleteSignalCatalog(request)
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }
                       throw new RuntimeException("Failed to delete the signal
catalog: " + cause);
                   }
                   logger.info("{} was successfully deleted", name);
                   return null;
               });
   }
```

- Untuk detail API, lihat deleteSignalCatalogdi Referensi AWS SDK for Java 2.x API.

### `deleteVehicle`

Contoh kode berikut menunjukkan cara menggunakan`deleteVehicle`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a vehicle with the specified name.
    *
    * @param vecName the name of the vehicle to be deleted
    * @return a {@link CompletableFuture} that completes when the vehicle has been
deleted
    */
   public CompletableFuture<Void> deleteVehicleAsync(String vecName) {
       DeleteVehicleRequest request = DeleteVehicleRequest.builder()
               .vehicleName(vecName)
               .build();

       return getAsyncClient().deleteVehicle(request)
               .handle((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }
                       throw new RuntimeException("Failed to delete the vehicle: "
+ cause);
                   }
                   return null;
               });
   }
```

- Untuk detail API, lihat DeleteVehicle di Referensi API.AWS SDK for Java 2.x

### `getDecoderManifest`

Contoh kode berikut menunjukkan cara menggunakan`getDecoderManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Waits for the decoder manifest to become active.
    *
    * @param decoderName the name of the decoder to wait for
    * @return a {@link CompletableFuture} that completes when the decoder manifest
becomes active, or exceptionally if an error occurs or the manifest becomes invalid
    */
   public CompletableFuture<Void> waitForDecoderManifestActiveAsync(String
decoderName) {
       CompletableFuture<Void> result = new CompletableFuture<>();

       ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
       AtomicInteger secondsElapsed = new AtomicInteger(0);
       AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);

       logger.info(" Elapsed: 0s | Decoder Status: DRAFT");

       final Runnable pollTask = new Runnable() {
           @Override
           public void run() {
               int elapsed = secondsElapsed.incrementAndGet();

               // Check status every 5 seconds
               if (elapsed % 5 == 0) {
```

```
                    GetDecoderManifestRequest request =
GetDecoderManifestRequest.builder()
                            .name(decoderName)
                            .build();

                    getAsyncClient().getDecoderManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Decoder manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling decoder manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
ACTIVE", elapsed);
                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
                                    logger.info("\r Elapsed: {}s | Decoder Status:
INVALID", elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Decoder manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\r# Elapsed: {}s | Decoder Status:
{}", elapsed, status);
                                }
                            });
                } else {
```

```
                    logger.info("\r Elapsed: {}s | Decoder Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }
```

- Untuk detail API, lihat getDecoderManifestdi Referensi AWS SDK for Java 2.x API.

### `getModelManifest`

Contoh kode berikut menunjukkan cara menggunakan`getModelManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Waits for the specified model manifest to become active.
     *
     * @param manifestName the name of the model manifest to wait for
     */
    public CompletableFuture<Void> waitForModelManifestActiveAsync(String
manifestName) {
        CompletableFuture<Void> result = new CompletableFuture<>();

        ScheduledExecutorService scheduler =
Executors.newSingleThreadScheduledExecutor();
        AtomicInteger secondsElapsed = new AtomicInteger(0);
        AtomicReference<ManifestStatus> lastStatus = new
AtomicReference<>(ManifestStatus.DRAFT);
```

```
        logger.info("Elapsed: 0s | Status: DRAFT");

        final Runnable pollTask = new Runnable() {
            @Override
            public void run() {
                int elapsed = secondsElapsed.incrementAndGet();

                // Only check status every 5 seconds
                if (elapsed % 5 == 0) {
                    GetModelManifestRequest request =
GetModelManifestRequest.builder()
                            .name(manifestName)
                            .build();

                    getAsyncClient().getModelManifest(request)
                            .whenComplete((response, exception) -> {
                                if (exception != null) {
                                    Throwable cause = exception instanceof
CompletionException ? exception.getCause() : exception;

                                    scheduler.shutdown();
                                    if (cause instanceof ResourceNotFoundException)
{
                                        result.completeExceptionally(new
RuntimeException("Model manifest not found: " + cause.getMessage(), cause));
                                    } else {
                                        result.completeExceptionally(new
RuntimeException("Error while polling model manifest status: " +
exception.getMessage(), exception));
                                    }
                                    return;
                                }

                                ManifestStatus status = response.status();
                                lastStatus.set(status);

                                if (status == ManifestStatus.ACTIVE) {
                                    logger.info("\rElapsed: {}s | Status: ACTIVE",
elapsed);

                                    scheduler.shutdown();
                                    result.complete(null);
                                } else if (status == ManifestStatus.INVALID) {
```

```
                                    logger.info("\rElapsed: {}s | Status: INVALID",
elapsed);
                                    scheduler.shutdown();
                                    result.completeExceptionally(new
RuntimeException("Model manifest became INVALID. Cannot proceed."));
                                } else {
                                    logger.info("\rElapsed: {}s | Status: {}",
elapsed, status);
                                }
                            });
                } else {
                    logger.info("\rElapsed: {}s | Status: {}", elapsed,
lastStatus.get());
                }
            }
        };

        // Start the task with an initial delay of 1 second, and repeat every second
        scheduler.scheduleAtFixedRate(pollTask, 1, 1, TimeUnit.SECONDS);
        return result;
    }
```

- Untuk detail API, lihat getModelManifestdi Referensi AWS SDK for Java 2.x API.

### `getVehicle`

Contoh kode berikut menunjukkan cara menggunakan`getVehicle`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Fetches the details of a vehicle.
     *
```

```
    * @param vehicleName the name of the vehicle to fetch details for
    * @return a {@link CompletableFuture} that completes when the vehicle details
have been fetched
    */
   public CompletableFuture<Void> getVehicleDetailsAsync(String vehicleName) {
       GetVehicleRequest request = GetVehicleRequest.builder()
               .vehicleName(vehicleName)
               .build();

       CompletableFuture<Void> result = new CompletableFuture<>();

       getAsyncClient().getVehicle(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception instanceof CompletionException ?
exception.getCause() : exception;

                       if (cause instanceof ResourceNotFoundException) {
                           result.completeExceptionally(cause); // don't rewrap
                       } else {
                           result.completeExceptionally(new
RuntimeException("Failed to fetch vehicle details: " + cause.getMessage(), cause));
                       }
                   } else {
                       Map<String, Object> details = new HashMap<>();
                       details.put("vehicleName", response.vehicleName());
                       details.put("arn", response.arn());
                       details.put("modelManifestArn",
response.modelManifestArn());
                       details.put("decoderManifestArn",
response.decoderManifestArn());
                       details.put("attributes", response.attributes());
                       details.put("creationTime",
response.creationTime().toString());
                       details.put("lastModificationTime",
response.lastModificationTime().toString());

                       logger.info("Vehicle Details:");
                       details.forEach((key, value) -> logger.info("• {} : {}",
key, value));

                       result.complete(null); // mark as successful
                   }
               });
```

```
        return result;
    }
```

- Untuk detail API, lihat GetVehicle di Referensi AWS SDK for Java 2.x API.

### `listSignalCatalogNodes`

Contoh kode berikut menunjukkan cara menggunakan`listSignalCatalogNodes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously retrieves a list of all nodes in the specified signal catalog.
     *
     * @param signalCatalogName the name of the signal catalog to retrieve nodes for
     * @return a {@link CompletableFuture} that, when completed, contains a {@link
List} of {@link Node} objects
     * representing all the nodes in the specified signal catalog
     */
    public CompletableFuture<List<Node>> listSignalCatalogNodeAsync(String
signalCatalogName) {
        ListSignalCatalogNodesRequest request =
ListSignalCatalogNodesRequest.builder()
                .name(signalCatalogName)
                .build();

        List<Node> allNodes = new ArrayList<>();

        return getAsyncClient().listSignalCatalogNodesPaginator(request)
                .subscribe(response -> allNodes.addAll(response.nodes()))
                .thenApply(v -> allNodes);
    }
```

- Untuk detail API, lihat listSignalCatalogNode di Referensi AWS SDK for Java 2.x API.

### `updateDecoderManifest`

Contoh kode berikut menunjukkan cara menggunakan`updateDecoderManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Updates the decoder manifest with the given name.
    *
    * @param name the name of the decoder manifest to update
    * @return a {@link CompletableFuture} that completes when the update operation
is finished
    */
   public CompletableFuture<Void> updateDecoderManifestAsync(String name) {
       UpdateDecoderManifestRequest request =
UpdateDecoderManifestRequest.builder()
               .name(name)
               .status(ManifestStatus.ACTIVE)
               .build();

       return getAsyncClient().updateDecoderManifest(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       throw new CompletionException("Failed to update decoder
manifest: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> null);
   }
```

- Untuk detail API, lihat updateDecoderManifestdi Referensi AWS SDK for Java 2.x API.

### `updateModelManifest`

Contoh kode berikut menunjukkan cara menggunakan`updateModelManifest`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Updates the model manifest.
     *
     * @param name the name of the model manifest to update
     */
    public void updateModelManifestAsync(String name) {
        UpdateModelManifestRequest request = UpdateModelManifestRequest.builder()
                .name(name)
                .status(ManifestStatus.ACTIVE)
                .build();

        getAsyncClient().updateModelManifest(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        throw new CompletionException("Failed to update model
manifest: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> null);
    }
```

- Untuk detail API, lihat updateModelManifestdi Referensi AWS SDK for Java 2.x API.

# AWS IoT SiteWise contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS IoT SiteWise.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

Halo AWS IoT SiteWise

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS IoT SiteWise.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class HelloSitewise {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloSitewise.class);
    public static void main(String[] args) {
```

```
            fetchAssetModels();
        }

        /**
         * Fetches asset models using the provided {@link IoTSiteWiseAsyncClient}.
         */
        public static void fetchAssetModels() {
            IoTSiteWiseAsyncClient siteWiseAsyncClient =
    IoTSiteWiseAsyncClient.create();
            ListAssetModelsRequest assetModelsRequest = ListAssetModelsRequest.builder()
                .assetModelTypes(AssetModelType.ASSET_MODEL)
                .build();

            // Asynchronous paginator - process paginated results.
            ListAssetModelsPublisher listModelsPaginator =
    siteWiseAsyncClient.listAssetModelsPaginator(assetModelsRequest);
            CompletableFuture<Void> future = listModelsPaginator.subscribe(response -> {
                response.assetModelSummaries().forEach(assetSummary ->
                    logger.info("Asset Model Name: {} ", assetSummary.name())
                );
            });

            // Wait for the asynchronous operation to complete
            future.join();
        }
    }
```

- Untuk detail API, lihat ListAssetModelsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat Model AWS IoT SiteWise Aset.
- Buat AWS IoT SiteWise Aset.
- Mengambil nilai ID properti.
- Kirim data ke AWS IoT SiteWise Aset.
- Ambil nilai properti AWS IoT SiteWise Aset.

- Buat AWS IoT SiteWise Portal.
- Buat AWS IoT SiteWise Gateway.
- Jelaskan AWS IoT SiteWise Gateway.
- Hapus AWS IoT SiteWise Aset.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan AWS IoT SiteWise fitur.

```
public class SitewiseScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(SitewiseScenario.class);
    static Scanner scanner = new Scanner(System.in);

    private static final String ROLES_STACK = "RoleSitewise";

    static SitewiseActions sitewiseActions = new SitewiseActions();

    public static void main(String[] args) throws Throwable {
        Scanner scanner = new Scanner(System.in);
        String contactEmail = "user@mydomain.com"; // Change email address.
        String assetModelName = "MyAssetModel1";
        String assetName = "MyAsset1" ;
        String portalName = "MyPortal1" ;
        String gatewayName = "MyGateway1" ;
        String myThing =  "MyThing1" ;

        logger.info("""
            AWS IoT SiteWise is a fully managed software-as-a-service (SaaS) that
            makes it easy to collect, store, organize, and monitor data from
 industrial equipment and processes.
```

```
            It is designed to help industrial and manufacturing organizations
collect data from their equipment and
            processes, and use that data to make informed decisions about their
operations.

            One of the key features of AWS IoT SiteWise is its ability to connect to
a wide range of industrial
            equipment and systems, including programmable logic controllers (PLCs),
sensors, and other
            industrial devices. It can collect data from these devices and organize
it into a unified data model,
            making it easier to analyze and gain insights from the data. AWS IoT
SiteWise also provides tools for
            visualizing the data, setting up alarms and alerts, and generating
reports.

            Another key feature of AWS IoT SiteWise is its ability to scale to
handle large volumes of data.
            It can collect and store data from thousands of devices and process
millions of data points per second,
            making it suitable for large-scale industrial operations. Additionally,
AWS IoT SiteWise is designed
            to be secure and compliant, with features like role-based access
controls, data encryption,
            and integration with other AWS services for additional security and
compliance features.

            Let's get started...
            """);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            runScenario(assetModelName, assetName, portalName, contactEmail,
gatewayName, myThing);
        } catch (RuntimeException e) {
           logger.info(e.getMessage());
        }
    }

    public static void runScenario(String assetModelName, String assetName,  String
portalName, String contactEmail, String gatewayName, String myThing) throws
Throwable {
```

```
        logger.info("Use AWS CloudFormation to create an IAM role that is required
for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String iamRole = stackOutputs.get("SitewiseRoleArn");
        logger.info("The ARN of the IAM role is {}",iamRole);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("1. Create an AWS SiteWise Asset Model");
        logger.info("""
             An AWS IoT SiteWise Asset Model is a way to represent the physical
assets, such as equipment,
             processes, and systems, that exist in an industrial environment. This
model provides a structured and
             hierarchical representation of these assets, allowing users to define
the relationships and properties
             of each asset.

             This scenario creates two asset model properties: temperature and
humidity.
            """);
        waitForInputToContinue(scanner);
        String assetModelId = null;
        try {
            CreateAssetModelResponse response =
sitewiseActions.createAssetModelAsync(assetModelName).join();
            assetModelId = response.assetModelId();
            logger.info("Asset Model successfully created. Asset Model ID: {}. ",
assetModelId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceAlreadyExistsException) {
                try {
                    assetModelId =
sitewiseActions.getAssetModelIdAsync(assetModelName).join();
                    logger.info("The Asset Model {} already exists. The id of the
existing model is {}. Moving on...", assetModelName, assetModelId);
                } catch (CompletionException cex) {
                    logger.error("Exception thrown acquiring the asset model id:
{}", cex.getCause().getCause(), cex);
                    return;
                }
```

```
            } else {
                logger.info("An unexpected error occurred: " + cause.getMessage(),
cause);
                return;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("2. Create an AWS IoT SiteWise Asset");
        logger.info("""
             The IoT SiteWise model that we just created defines the structure and
metadata for your physical assets.
             Now we create an asset from the asset model.

            """);
        logger.info("Let's wait 30 seconds for the asset to be ready.");
        countdown(30);
        waitForInputToContinue(scanner);
        String assetId;
        try {
            CreateAssetResponse response =
sitewiseActions.createAssetAsync(assetName, assetModelId).join();
            assetId = response.assetId();
            logger.info("Asset created with ID: {}", assetId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The asset model id was not found: {}",
cause.getMessage(), cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Retrieve the property ID values");
        logger.info("""
             To send data to an asset, we need to get the property ID values. In
this scenario, we access the
```

```
             temperature and humidity property ID values.
            """);
        waitForInputToContinue(scanner);
        Map<String, String>  propertyIds = null;
        try {
            propertyIds = sitewiseActions.getPropertyIds(assetModelId).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IoTSiteWiseException) {
                logger.error("IoTSiteWiseException occurred: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }
        String humPropId =  propertyIds.get("Humidity");
        logger.info("The Humidity property Id is {}", humPropId);
        String tempPropId = propertyIds.get("Temperature");
        logger.info("The Temperature property Id is {}", tempPropId);

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Send data to an AWS IoT SiteWise Asset");
        logger.info("""
            By sending data to an IoT SiteWise Asset, you can aggregate data from
            multiple sources, normalize the data into a standard format, and store
it in a
            centralized location. This makes it easier to analyze and gain insights
from the data.

            In this example, we generate sample temperature and humidity data and
send it to the AWS IoT SiteWise asset.

            """);
        waitForInputToContinue(scanner);
        try {
            sitewiseActions.sendDataToSiteWiseAsync(assetId, tempPropId,
humPropId).join();
            logger.info("Data sent successfully.");
        } catch (CompletionException ce) {
```

```
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The AWS resource was not found: {}",
cause.getMessage(), cause);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Retrieve the value of the IoT SiteWise Asset property");
        logger.info("""
            IoT SiteWise is an AWS service that allows you to collect, process, and
analyze industrial data
            from connected equipment and sensors. One of the key benefits of reading
an IoT SiteWise property
            is the ability to gain valuable insights from your industrial data.

            """);
        waitForInputToContinue(scanner);
        try {
            Double assetVal = sitewiseActions.getAssetPropValueAsync(tempPropId,
assetId).join();
            logger.info("The property name is: {}", "Temperature");
            logger.info("The value of this property is: {}", assetVal);

            waitForInputToContinue(scanner);

            assetVal = sitewiseActions.getAssetPropValueAsync(humPropId,
assetId).join();
            logger.info("The property name is: {}", "Humidity");
            logger.info("The value of this property is: {}", assetVal);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.info("The AWS resource was not found: {}",
cause.getMessage(), cause);
                } else {
                    logger.info("An unexpected error occurred: {}",
cause.getMessage(), cause);
```

```
                }
                return;
            }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Create an IoT SiteWise Gateway");
        logger.info(
            """
                IoT SiteWise Gateway serves as the bridge between industrial
equipment, sensors, and the
                cloud-based IoT SiteWise service. It is responsible for securely
collecting, processing, and
                transmitting data from various industrial assets to the IoT SiteWise
platform,
                enabling real-time monitoring, analysis, and optimization of
industrial operations.

                """);
        waitForInputToContinue(scanner);
        String gatewayId = "";
        try {
            gatewayId = sitewiseActions.createGatewayAsync(gatewayName,
myThing).join();
            logger.info("Gateway creation completed successfully. id is {}",
gatewayId );
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IoTSiteWiseException siteWiseEx) {
                logger.error("IoT SiteWise error occurred: Error message: {}, Error
code {}",
                        siteWiseEx.getMessage(),
siteWiseEx.awsErrorDetails().errorCode(), siteWiseEx);
            } else {
                logger.error("An unexpected error occurred: {}",
cause.getMessage());
            }
            return;
        }
        logger.info(DASHES);
        logger.info(DASHES);

        logger.info("7. Describe the IoT SiteWise Gateway");
```

```
         waitForInputToContinue(scanner);
        try {
            sitewiseActions.describeGatewayAsync(gatewayId)
                .thenAccept(response -> {
                    logger.info("Gateway Name: {}", response.gatewayName());
                    logger.info("Gateway ARN: {}", response.gatewayArn());
                    logger.info("Gateway Platform: {}", response.gatewayPlatform());
                    logger.info("Gateway Creation Date: {}",
response.creationDate());
                }).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException notFoundException) {
                logger.error("A ResourceNotFoundException occurred: Error message:
{}, Error code {}",
                        notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Delete the AWS IoT SiteWise Assets");
        logger.info(
            """
            Before you can delete the Asset Model, you must delete the assets.

            """);
        logger.info("Would you like to delete the IoT SiteWise Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the SiteWise assets.");

            try {
                sitewiseActions.deleteGatewayAsync(gatewayId).join();
                logger.info("Gateway {} was deleted successfully.", gatewayId);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
```

```
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
            }

            try {
                sitewiseActions.deleteAssetAsync(assetId).join();
                logger.info("Request to delete asset {} sent successfully",
assetId);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
            }
            logger.info("Let's wait 1 minute for the asset to be deleted.");
            countdown(60);
            waitForInputToContinue(scanner);
            logger.info("Delete the AWS IoT SiteWise Asset Model");
            try {
                sitewiseActions.deleteAssetModelAsync(assetModelId).join();
                logger.info("Asset model deleted successfully.");
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException notFoundException) {
                    logger.error("A ResourceNotFoundException occurred: Error
message: {}, Error code {}",
                            notFoundException.getMessage(),
notFoundException.awsErrorDetails().errorCode(), notFoundException);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage());
                }
```

```
            }
            waitForInputToContinue(scanner);

        } else {
            logger.info("The resources will not be deleted.");
        }
        logger.info(DASHES);

        logger.info(DASHES);
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        logger.info("This concludes the AWS IoT SiteWise Scenario");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }

    public static void countdown(int totalSeconds) throws InterruptedException {
        for (int i = totalSeconds; i >= 0; i--) {
            int displayMinutes = i / 60;
            int displaySeconds = i % 60;
            System.out.printf("\r%02d:%02d", displayMinutes, displaySeconds);
            Thread.sleep(1000); // Wait for 1 second
        }
        System.out.println(); // Move to the next line after countdown
        logger.info("Countdown complete!");
    }
}
```

Kelas pembungkus untuk metode AWS IoT SiteWise SDK.

```
public class SitewiseActions {

   private static final Logger logger =
 LoggerFactory.getLogger(SitewiseActions.class);

   private static IoTSiteWiseAsyncClient ioTSiteWiseAsyncClient;

   private static IoTSiteWiseAsyncClient getAsyncClient() {
       if (ioTSiteWiseAsyncClient == null) {
           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(100)
               .connectionTimeout(Duration.ofSeconds(60))
               .readTimeout(Duration.ofSeconds(60))
               .writeTimeout(Duration.ofSeconds(60))
               .build();

           ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))
               .apiCallAttemptTimeout(Duration.ofSeconds(90))
               .retryStrategy(RetryMode.STANDARD)
               .build();

           ioTSiteWiseAsyncClient = IoTSiteWiseAsyncClient.builder()
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return ioTSiteWiseAsyncClient;
   }


   /**
    * Creates an asset model.
    *
    * @param name the name of the asset model to create.
    * @return a {@link CompletableFuture} that represents a {@link
 CreateAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
 {@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
```

```
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<CreateAssetModelResponse> createAssetModelAsync(String
name) {
       PropertyType humidity = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       PropertyType temperaturePropertyType = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       AssetModelPropertyDefinition temperatureProperty =
AssetModelPropertyDefinition.builder()
           .name("Temperature")
           .dataType(PropertyDataType.DOUBLE)
           .type(temperaturePropertyType)
           .build();

       AssetModelPropertyDefinition humidityProperty =
AssetModelPropertyDefinition.builder()
           .name("Humidity")
           .dataType(PropertyDataType.DOUBLE)
           .type(humidity)
           .build();

       CreateAssetModelRequest createAssetModelRequest =
CreateAssetModelRequest.builder()
           .assetModelName(name)
           .assetModelDescription("This is my asset model")
           .assetModelProperties(temperatureProperty, humidityProperty)
           .build();

       return getAsyncClient().createAssetModel(createAssetModelRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to create asset model: {} ",
exception.getCause().getMessage());
               }
```

```
            });
    }


    /**
     * Creates an asset with the specified name and asset model Id.
     *
     * @param assetName    the name of the asset to create.
     * @param assetModelId the Id of the asset model to associate with the asset.
     * @return a {@link CompletableFuture} that represents a {@link
CreateAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
     *         available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<CreateAssetResponse> createAssetAsync(String assetName,
String assetModelId) {
        CreateAssetRequest createAssetRequest = CreateAssetRequest.builder()
            .assetModelId(assetModelId)
            .assetDescription("Created using the AWS SDK for Java")
            .assetName(assetName)
            .build();

        return getAsyncClient().createAsset(createAssetRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to create asset: {}",
exception.getCause().getMessage());
                }
            });
    }

    /**
     * Sends data to the SiteWise service.
     *
     * @param assetId        the ID of the asset to which the data will be sent.
     * @param tempPropertyId the ID of the temperature property.
```

```
    * @param humidityPropId the ID of the humidity property.
    * @return a {@link CompletableFuture} that represents a {@link
BatchPutAssetPropertyValueResponse} result. The
    *         calling code can attach callbacks, then handle the result or
exception by calling
    *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<BatchPutAssetPropertyValueResponse>
sendDataToSiteWiseAsync(String assetId, String tempPropertyId, String
humidityPropId) {
       Map<String, Double> sampleData = generateSampleData();
       long timestamp = Instant.now().toEpochMilli();

       TimeInNanos time = TimeInNanos.builder()
           .timeInSeconds(timestamp / 1000)
           .offsetInNanos((int) ((timestamp % 1000) * 1000000))
           .build();

       BatchPutAssetPropertyValueRequest request =
BatchPutAssetPropertyValueRequest.builder()
           .entries(Arrays.asList(
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-3")
                   .assetId(assetId)
                   .propertyId(tempPropertyId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Temperature"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
                   .build(),
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-4")
                   .assetId(assetId)
```

```
                    .propertyId(humidityPropId)
                    .propertyValues(Arrays.asList(
                        AssetPropertyValue.builder()
                            .value(Variant.builder()
                                .doubleValue(sampleData.get("Humidity"))
                                .build())
                            .timestamp(time)
                            .build()
                    ))
                    .build()
            ))
            .build();

        return getAsyncClient().batchPutAssetPropertyValue(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An exception occurred: {}",
exception.getCause().getMessage());
                }
            });
    }

    /**
     * Fetches the value of an asset property.
     *
     * @param propId  the ID of the asset property to fetch.
     * @param assetId the ID of the asset to fetch the property value for.
     * @return a {@link CompletableFuture} that represents a {@link Double} result.
The calling code can attach
     *         callbacks, then handle the result or exception by calling {@link
CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<Double> getAssetPropValueAsync(String propId, String
assetId) {
        GetAssetPropertyValueRequest assetPropertyValueRequest =
GetAssetPropertyValueRequest.builder()
```

```
                .propertyId(propId)
                .assetId(assetId)
                .build();

        return getAsyncClient().getAssetPropertyValue(assetPropertyValueRequest)
                .handle((response, exception) -> {
                    if (exception != null) {
                        logger.error("Error occurred while fetching property value:
{}.", exception.getCause().getMessage());
                        throw (CompletionException) exception;
                    }
                    return response.propertyValue().value().doubleValue();
                });
    }

    /**
     * Retrieves the property IDs associated with a specific asset model.
     *
     * @param assetModelId the ID of the asset model that defines the properties.
     * @return a {@link CompletableFuture} that represents a {@link Map} result that
associates the property name to the
     *         propert ID. The calling code can attach callbacks, then handle the
result or exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<Map<String, String>> getPropertyIds(String
assetModelId) {
        ListAssetModelPropertiesRequest modelPropertiesRequest =
ListAssetModelPropertiesRequest.builder().assetModelId(assetModelId).build();
        return getAsyncClient().listAssetModelProperties(modelPropertiesRequest)
            .handle((response, throwable) -> {
                if (response != null) {
                    return response.assetModelPropertySummaries().stream()
                        .collect(Collectors
                            .toMap(AssetModelPropertySummary::name,
AssetModelPropertySummary::id));
                } else {
```

```
                    logger.error("Error occurred while fetching property IDs: {}.",
throwable.getCause().getMessage());
                    throw (CompletionException) throwable;
                }
            });
    }

    /**
     * Deletes an asset.
     *
     * @param assetId the ID of the asset to be deleted.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<DeleteAssetResponse> deleteAssetAsync(String assetId) {
        DeleteAssetRequest deleteAssetRequest = DeleteAssetRequest.builder()
            .assetId(assetId)
            .build();

        return getAsyncClient().deleteAsset(deleteAssetRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An error occurred deleting asset with id: {}",
assetId);
                }
            });
    }

    /**
     * Deletes an Asset Model with the specified ID.
     *
     * @param assetModelId the ID of the Asset Model to delete.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetModelResponse} result. The calling code
```

```
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetModelResponse> deleteAssetModelAsync(String
assetModelId) {
       DeleteAssetModelRequest deleteAssetModelRequest =
DeleteAssetModelRequest.builder()
           .assetModelId(assetModelId)
           .build();

       return getAsyncClient().deleteAssetModel(deleteAssetModelRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to delete asset model with ID:{}.",
exception.getMessage());
               }
           });
   }

   /**
    * Retrieves the asset model ID for the given asset model name.
    *
    * @param assetModelName the name of the asset model for the ID.
    * @return a {@link CompletableFuture} that represents a {@link String} result
of the asset model ID or null if the
    *         asset model cannot be found. The calling code can attach callbacks,
then handle the result or exception
    *         by calling {@link CompletableFuture#join()} or {@link
CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
```

```
    */
   public CompletableFuture<String> getAssetModelIdAsync(String assetModelName) {
       ListAssetModelsRequest listAssetModelsRequest =
ListAssetModelsRequest.builder().build();
       return getAsyncClient().listAssetModels(listAssetModelsRequest)
               .handle((listAssetModelsResponse, exception) -> {
                   if (exception != null) {
                       logger.error("Failed to retrieve Asset Model ID: {}",
exception.getCause().getMessage());
                       throw (CompletionException) exception;
                   }
                   for (AssetModelSummary assetModelSummary :
listAssetModelsResponse.assetModelSummaries()) {
                       if (assetModelSummary.name().equals(assetModelName)) {
                           return assetModelSummary.id();
                       }
                   }
                   return null;
               });
   }


   /**
    * Creates a new IoT Sitewise gateway.
    *
    * @param gatewayName The name of the gateway to create.
    * @param myThing     The name of the core device thing to associate with the
gateway.
    * @return a {@link CompletableFuture} that represents a {@link String} result
of the gateways ID. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<String> createGatewayAsync(String gatewayName, String
myThing) {
       GreengrassV2 gg = GreengrassV2.builder()
```

```
            .coreDeviceThingName(myThing)
            .build();

        GatewayPlatform platform = GatewayPlatform.builder()
            .greengrassV2(gg)
            .build();

        Map<String, String> tag = new HashMap<>();
        tag.put("Environment", "Production");

        CreateGatewayRequest createGatewayRequest = CreateGatewayRequest.builder()
            .gatewayName(gatewayName)
            .gatewayPlatform(platform)
            .tags(tag)
            .build();

        return getAsyncClient().createGateway(createGatewayRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.error("Error creating the gateway.");
                    throw (CompletionException) exception;
                }
                logger.info("The ARN of the gateway is {}" ,
response.gatewayArn());
                return response.gatewayId();
            });
    }

    /**
     * Deletes the specified gateway.
     *
     * @param gatewayId the ID of the gateway to delete.
     * @return a {@link CompletableFuture} that represents a {@link
DeleteGatewayResponse} result.. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
```

```
     */
    public CompletableFuture<DeleteGatewayResponse> deleteGatewayAsync(String
gatewayId) {
        DeleteGatewayRequest deleteGatewayRequest = DeleteGatewayRequest.builder()
            .gatewayId(gatewayId)
            .build();

        return getAsyncClient().deleteGateway(deleteGatewayRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to delete gateway: {}",
exception.getCause().getMessage());
                }
            });
    }

    /**
     * Describes the specified gateway.
     *
     * @param gatewayId the ID of the gateway to describe.
     * @return a {@link CompletableFuture} that represents a {@link
DescribeGatewayResponse} result. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<DescribeGatewayResponse> describeGatewayAsync(String
gatewayId) {
        DescribeGatewayRequest request = DescribeGatewayRequest.builder()
            .gatewayId(gatewayId)
            .build();

        return getAsyncClient().describeGateway(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An error occurred during the describeGateway
method: {}", exception.getCause().getMessage());
```

```
                }
            });
    }

    private static Map<String, Double> generateSampleData() {
        Map<String, Double> data = new HashMap<>();
        data.put("Temperature", 23.5);
        data.put("Humidity", 65.0);
        return data;
    }
}
```

## Tindakan

### `BatchPutAssetPropertyValue`

Contoh kode berikut menunjukkan cara menggunakan`BatchPutAssetPropertyValue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Sends data to the SiteWise service.
     *
     * @param assetId        the ID of the asset to which the data will be sent.
     * @param tempPropertyId the ID of the temperature property.
     * @param humidityPropId the ID of the humidity property.
     * @return a {@link CompletableFuture} that represents a {@link
BatchPutAssetPropertyValueResponse} result. The
     *         calling code can attach callbacks, then handle the result or
exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
```

```
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<BatchPutAssetPropertyValueResponse>
sendDataToSiteWiseAsync(String assetId, String tempPropertyId, String
humidityPropId) {
       Map<String, Double> sampleData = generateSampleData();
       long timestamp = Instant.now().toEpochMilli();

       TimeInNanos time = TimeInNanos.builder()
           .timeInSeconds(timestamp / 1000)
           .offsetInNanos((int) ((timestamp % 1000) * 1000000))
           .build();

       BatchPutAssetPropertyValueRequest request =
BatchPutAssetPropertyValueRequest.builder()
           .entries(Arrays.asList(
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-3")
                   .assetId(assetId)
                   .propertyId(tempPropertyId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Temperature"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
                   .build(),
               PutAssetPropertyValueEntry.builder()
                   .entryId("entry-4")
                   .assetId(assetId)
                   .propertyId(humidityPropId)
                   .propertyValues(Arrays.asList(
                       AssetPropertyValue.builder()
                           .value(Variant.builder()
                               .doubleValue(sampleData.get("Humidity"))
                               .build())
                           .timestamp(time)
                           .build()
                   ))
```

```
                    .build()
            ))
            .build();

        return getAsyncClient().batchPutAssetPropertyValue(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An exception occurred: {}",
exception.getCause().getMessage());
                }
            });
    }
```

- Untuk detail API, lihat BatchPutAssetPropertyValuedi Referensi AWS SDK for Java 2.x API.

### `CreateAsset`

Contoh kode berikut menunjukkan cara menggunakan`CreateAsset`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an asset with the specified name and asset model Id.
     *
     * @param assetName    the name of the asset to create.
     * @param assetModelId the Id of the asset model to associate with the asset.
     * @return a {@link CompletableFuture} that represents a {@link
CreateAssetResponse} result. The calling code can
     *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
```

```
     *         available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<CreateAssetResponse> createAssetAsync(String assetName,
String assetModelId) {
        CreateAssetRequest createAssetRequest = CreateAssetRequest.builder()
            .assetModelId(assetModelId)
            .assetDescription("Created using the AWS SDK for Java")
            .assetName(assetName)
            .build();

        return getAsyncClient().createAsset(createAssetRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to create asset: {}",
exception.getCause().getMessage());
                }
            });
    }
```

- Untuk detail API, lihat CreateAssetdi Referensi AWS SDK for Java 2.x API.

### `CreateAssetModel`

Contoh kode berikut menunjukkan cara menggunakan`CreateAssetModel`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an asset model.
     *
     * @param name the name of the asset model to create.
```

```
    * @return a {@link CompletableFuture} that represents a {@link
CreateAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps it
    *         available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<CreateAssetModelResponse> createAssetModelAsync(String
name) {
       PropertyType humidity = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       PropertyType temperaturePropertyType = PropertyType.builder()
           .measurement(Measurement.builder().build())
           .build();

       AssetModelPropertyDefinition temperatureProperty =
AssetModelPropertyDefinition.builder()
           .name("Temperature")
           .dataType(PropertyDataType.DOUBLE)
           .type(temperaturePropertyType)
           .build();

       AssetModelPropertyDefinition humidityProperty =
AssetModelPropertyDefinition.builder()
           .name("Humidity")
           .dataType(PropertyDataType.DOUBLE)
           .type(humidity)
           .build();

       CreateAssetModelRequest createAssetModelRequest =
CreateAssetModelRequest.builder()
           .assetModelName(name)
           .assetModelDescription("This is my asset model")
           .assetModelProperties(temperatureProperty, humidityProperty)
           .build();
```

```
        return getAsyncClient().createAssetModel(createAssetModelRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("Failed to create asset model: {} ",
exception.getCause().getMessage());
                }
            });
    }
```

- Untuk detail API, lihat CreateAssetModeldi Referensi AWS SDK for Java 2.x API.

### `CreateGateway`

Contoh kode berikut menunjukkan cara menggunakan`CreateGateway`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new IoT Sitewise gateway.
     *
     * @param gatewayName The name of the gateway to create.
     * @param myThing     The name of the core device thing to associate with the
gateway.
     * @return a {@link CompletableFuture} that represents a {@link String} result
of the gateways ID. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
```

```
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<String> createGatewayAsync(String gatewayName, String
myThing) {
        GreengrassV2 gg = GreengrassV2.builder()
            .coreDeviceThingName(myThing)
            .build();

        GatewayPlatform platform = GatewayPlatform.builder()
            .greengrassV2(gg)
            .build();

        Map<String, String> tag = new HashMap<>();
        tag.put("Environment", "Production");

        CreateGatewayRequest createGatewayRequest = CreateGatewayRequest.builder()
            .gatewayName(gatewayName)
            .gatewayPlatform(platform)
            .tags(tag)
            .build();

        return getAsyncClient().createGateway(createGatewayRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.error("Error creating the gateway.");
                    throw (CompletionException) exception;
                }
                logger.info("The ARN of the gateway is {}" ,
response.gatewayArn());
                return response.gatewayId();
            });
    }
```

- Untuk detail API, lihat CreateGatewaydi Referensi AWS SDK for Java 2.x API.

### `DeleteAsset`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAsset`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes an asset.
    *
    * @param assetId the ID of the asset to be deleted.
    * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetResponse} result. The calling code can
    *         attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetResponse> deleteAssetAsync(String assetId) {
       DeleteAssetRequest deleteAssetRequest = DeleteAssetRequest.builder()
           .assetId(assetId)
           .build();

       return getAsyncClient().deleteAsset(deleteAssetRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("An error occurred deleting asset with id: {}",
assetId);
               }
           });
   }
```

- Untuk detail API, lihat DeleteAssetdi Referensi AWS SDK for Java 2.x API.

### `DeleteAssetModel`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAssetModel`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes an Asset Model with the specified ID.
    *
    * @param assetModelId the ID of the Asset Model to delete.
    * @return a {@link CompletableFuture} that represents a {@link
DeleteAssetModelResponse} result. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteAssetModelResponse> deleteAssetModelAsync(String
assetModelId) {
       DeleteAssetModelRequest deleteAssetModelRequest =
DeleteAssetModelRequest.builder()
           .assetModelId(assetModelId)
           .build();

       return getAsyncClient().deleteAssetModel(deleteAssetModelRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   logger.error("Failed to delete asset model with ID:{}.",
exception.getMessage());
               }
           });
```

```
    }
```

- Untuk detail API, lihat DeleteAssetModeldi Referensi AWS SDK for Java 2.x API.

### `DeleteGateway`

Contoh kode berikut menunjukkan cara menggunakan`DeleteGateway`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes the specified gateway.
    *
    * @param gatewayId the ID of the gateway to delete.
    * @return a {@link CompletableFuture} that represents a {@link
DeleteGatewayResponse} result.. The calling code
    *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<DeleteGatewayResponse> deleteGatewayAsync(String
gatewayId) {
       DeleteGatewayRequest deleteGatewayRequest = DeleteGatewayRequest.builder()
           .gatewayId(gatewayId)
           .build();

       return getAsyncClient().deleteGateway(deleteGatewayRequest)
           .whenComplete((response, exception) -> {
```

```
                if (exception != null) {
                    logger.error("Failed to delete gateway: {}",
exception.getCause().getMessage());
                }
            });
    }
```

- Untuk detail API, lihat DeleteGatewaydi Referensi AWS SDK for Java 2.x API.

### `DescribeAssetModel`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAssetModel`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the property IDs associated with a specific asset model.
     *
     * @param assetModelId the ID of the asset model that defines the properties.
     * @return a {@link CompletableFuture} that represents a {@link Map} result that
associates the property name to the
     *         propert ID. The calling code can attach callbacks, then handle the
result or exception by calling
     *         {@link CompletableFuture#join()} or {@link CompletableFuture#get()}.
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<Map<String, String>> getPropertyIds(String
assetModelId) {
```

```
        ListAssetModelPropertiesRequest modelPropertiesRequest =
ListAssetModelPropertiesRequest.builder().assetModelId(assetModelId).build();
        return getAsyncClient().listAssetModelProperties(modelPropertiesRequest)
            .handle((response, throwable) -> {
                if (response != null) {
                    return response.assetModelPropertySummaries().stream()
                        .collect(Collectors
                            .toMap(AssetModelPropertySummary::name,
AssetModelPropertySummary::id));
                } else {
                    logger.error("Error occurred while fetching property IDs: {}.",
throwable.getCause().getMessage());
                    throw (CompletionException) throwable;
                }
            });
    }
```

- Untuk detail API, lihat DescribeAssetModeldi Referensi AWS SDK for Java 2.x API.

### `DescribeGateway`

Contoh kode berikut menunjukkan cara menggunakan`DescribeGateway`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Describes the specified gateway.
     *
     * @param gatewayId the ID of the gateway to describe.
     * @return a {@link CompletableFuture} that represents a {@link
DescribeGatewayResponse} result. The calling code
     *         can attach callbacks, then handle the result or exception by calling
{@link CompletableFuture#join()} or
     *         {@link CompletableFuture#get()}.
```

```
     *         <p>
     *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
     *         it available to the calling code as a {@link CompletionException}. By
calling
     *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
     */
    public CompletableFuture<DescribeGatewayResponse> describeGatewayAsync(String
gatewayId) {
        DescribeGatewayRequest request = DescribeGatewayRequest.builder()
            .gatewayId(gatewayId)
            .build();

        return getAsyncClient().describeGateway(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    logger.error("An error occurred during the describeGateway
method: {}", exception.getCause().getMessage());
                }
            });
    }
```

- Untuk detail API, lihat DescribeGatewaydi Referensi AWS SDK for Java 2.x API.

### `GetAssetPropertyValue`

Contoh kode berikut menunjukkan cara menggunakan`GetAssetPropertyValue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Fetches the value of an asset property.
     *
```

```
    * @param propId  the ID of the asset property to fetch.
    * @param assetId the ID of the asset to fetch the property value for.
    * @return a {@link CompletableFuture} that represents a {@link Double} result.
The calling code can attach
    *         callbacks, then handle the result or exception by calling {@link
CompletableFuture#join()} or
    *         {@link CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<Double> getAssetPropValueAsync(String propId, String
assetId) {
       GetAssetPropertyValueRequest assetPropertyValueRequest =
GetAssetPropertyValueRequest.builder()
               .propertyId(propId)
               .assetId(assetId)
               .build();

       return getAsyncClient().getAssetPropertyValue(assetPropertyValueRequest)
               .handle((response, exception) -> {
                   if (exception != null) {
                       logger.error("Error occurred while fetching property value:
{}.", exception.getCause().getMessage());
                       throw (CompletionException) exception;
                   }
                   return response.propertyValue().value().doubleValue();
               });
   }
```

- Untuk detail API, lihat GetAssetPropertyValuedi Referensi AWS SDK for Java 2.x API.

### `ListAssetModels`

Contoh kode berikut menunjukkan cara menggunakan`ListAssetModels`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves the asset model ID for the given asset model name.
    *
    * @param assetModelName the name of the asset model for the ID.
    * @return a {@link CompletableFuture} that represents a {@link String} result
of the asset model ID or null if the
    *         asset model cannot be found. The calling code can attach callbacks,
then handle the result or exception
    *         by calling {@link CompletableFuture#join()} or {@link
CompletableFuture#get()}.
    *         <p>
    *         If any completion stage in this method throws an exception, the
method logs the exception cause and keeps
    *         it available to the calling code as a {@link CompletionException}. By
calling
    *         {@link CompletionException#getCause()}, the calling code can access
the original exception.
    */
   public CompletableFuture<String> getAssetModelIdAsync(String assetModelName) {
       ListAssetModelsRequest listAssetModelsRequest =
ListAssetModelsRequest.builder().build();
       return getAsyncClient().listAssetModels(listAssetModelsRequest)
               .handle((listAssetModelsResponse, exception) -> {
                   if (exception != null) {
                       logger.error("Failed to retrieve Asset Model ID: {}",
exception.getCause().getMessage());
                       throw (CompletionException) exception;
                   }
                   for (AssetModelSummary assetModelSummary :
listAssetModelsResponse.assetModelSummaries()) {
                       if (assetModelSummary.name().equals(assetModelName)) {
                           return assetModelSummary.id();
                       }
                   }
```

```
                    return null;
                });
    }
```

- Untuk detail API, lihat ListAssetModelsdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Keyspaces menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Amazon Keyspaces.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan

## Memulai

Halo Amazon Keyspaces

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon Keyspaces.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.keyspaces.KeyspacesClient;
import software.amazon.awssdk.services.keyspaces.model.KeyspaceSummary;
import software.amazon.awssdk.services.keyspaces.model.KeyspacesException;
import software.amazon.awssdk.services.keyspaces.model.ListKeyspacesRequest;
import software.amazon.awssdk.services.keyspaces.model.ListKeyspacesResponse;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKeyspaces {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        KeyspacesClient keyClient = KeyspacesClient.builder()
                .region(region)
                .build();

        listKeyspaces(keyClient);
    }

    public static void listKeyspaces(KeyspacesClient keyClient) {
        try {
            ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                    .maxResults(10)
                    .build();

            ListKeyspacesResponse response =
 keyClient.listKeyspaces(keyspacesRequest);
```

```
            List<KeyspaceSummary> keyspaces = response.keyspaces();
            for (KeyspaceSummary keyspace : keyspaces) {
                System.out.println("The name of the keyspace is " +
 keyspace.keyspaceName());
            }

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListKeyspacesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat keyspace dan tabel. Skema tabel menyimpan data film dan mengaktifkan point-in-time pemulihan.
- Connect ke keyspace menggunakan koneksi TLS aman dengan otentikasi SiGv4.
- Kueri tabel. Tambahkan, ambil, dan perbarui data film.
- Perbarui tabel. Tambahkan kolom untuk melacak film yang ditonton.
- Kembalikan tabel ke keadaan sebelumnya dan bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java (v2) code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Before running this Java code example, you must create a
 * Java keystore (JKS) file and place it in your project's resources folder.
 *
 * This file is a secure file format used to hold certificate information for
 * Java applications. This is required to make a connection to Amazon Keyspaces.
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/keyspaces/latest/devguide/using_java_driver.html
 *
 * This Java example performs the following tasks:
 *
 * 1. Create a keyspace.
 * 2. Check for keyspace existence.
 * 3. List keyspaces using a paginator.
 * 4. Create a table with a simple movie data schema and enable point-in-time
 * recovery.
 * 5. Check for the table to be in an Active state.
 * 6. List all tables in the keyspace.
 * 7. Use a Cassandra driver to insert some records into the Movie table.
 * 8. Get all records from the Movie table.
 * 9. Get a specific Movie.
 * 10. Get a UTC timestamp for the current time.
 * 11. Update the table schema to add a ‘watched’ Boolean column.
 * 12. Update an item as watched.
 * 13. Query for items with watched = True.
 * 14. Restore the table back to the previous state using the timestamp.
 * 15. Check for completion of the restore action.
 * 16. Delete the table.
 * 17. Confirm that both tables are deleted.
 * 18. Delete the keyspace.
 */

public class ScenarioKeyspaces {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    /*
     * Usage:
     * fileName - The name of the JSON file that contains movie data. (Get this file
```

```
     * from the GitHub repo at resources/sample_file.)
     * keyspaceName - The name of the keyspace to create.
     */
    public static void main(String[] args) throws InterruptedException, IOException
{
        String fileName = "<Replace with the JSON file that contains movie data>";
        String keyspaceName = "<Replace with the name of the keyspace to create>";
        String titleUpdate = "The Family";
        int yearUpdate = 2013;
        String tableName = "Movie";
        String tableNameRestore = "MovieRestore";
        Region region = Region.US_EAST_1;
        KeyspacesClient keyClient = KeyspacesClient.builder()
                .region(region)
                .build();

        DriverConfigLoader loader =
DriverConfigLoader.fromClasspath("application.conf");
        CqlSession session = CqlSession.builder()
                .withConfigLoader(loader)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Keyspaces example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a keyspace.");
        createKeySpace(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        Thread.sleep(5000);
        System.out.println("2. Check for keyspace existence.");
        checkKeyspaceExistence(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. List keyspaces using a paginator.");
        listKeyspacesPaginator(keyClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("4. Create a table with a simple movie data schema and
enable point-in-time recovery.");
        createTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Check for the table to be in an Active state.");
        Thread.sleep(6000);
        checkTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. List all tables in the keyspace.");
        listTables(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Use a Cassandra driver to insert some records into
the Movie table.");
        Thread.sleep(6000);
        loadData(session, fileName, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Get all records from the Movie table.");
        getMovieData(session, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get a specific Movie.");
        getSpecificMovie(session, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a UTC timestamp for the current time.");
        ZonedDateTime utc = ZonedDateTime.now(ZoneOffset.UTC);
        System.out.println("DATETIME = " + Date.from(utc.toInstant()));
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Update the table schema to add a watched Boolean
column.");
        updateTable(keyClient, keyspaceName, tableName);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("12. Update an item as watched.");
        Thread.sleep(10000); // Wait 10 secs for the update.
        updateRecord(session, keyspaceName, titleUpdate, yearUpdate);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Query for items with watched = True.");
        getWatchedData(session, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Restore the table back to the previous state using
the timestamp.");
        System.out.println("Note that the restore operation can take up to 20
minutes.");
        restoreTable(keyClient, keyspaceName, utc);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("15. Check for completion of the restore action.");
        Thread.sleep(5000);
        checkRestoredTable(keyClient, keyspaceName, "MovieRestore");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("16. Delete both tables.");
        deleteTable(keyClient, keyspaceName, tableName);
        deleteTable(keyClient, keyspaceName, tableNameRestore);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("17. Confirm that both tables are deleted.");
        checkTableDelete(keyClient, keyspaceName, tableName);
        checkTableDelete(keyClient, keyspaceName, tableNameRestore);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("18. Delete the keyspace.");
        deleteKeyspace(keyClient, keyspaceName);
        System.out.println(DASHES);

        System.out.println(DASHES);
```

```
        System.out.println("The scenario has completed successfully.");
        System.out.println(DASHES);
    }

    public static void deleteKeyspace(KeyspacesClient keyClient, String
keyspaceName) {
        try {
            DeleteKeyspaceRequest deleteKeyspaceRequest =
DeleteKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            keyClient.deleteKeyspace(deleteKeyspaceRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkTableDelete(KeyspacesClient keyClient, String
keyspaceName, String tableName)
            throws InterruptedException {
        try {
            String status;
            GetTableResponse response;
            GetTableRequest tableRequest = GetTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            // Keep looping until table cannot be found and a
ResourceNotFoundException is
            // thrown.
            while (true) {
                response = keyClient.getTable(tableRequest);
                status = response.statusAsString();
                System.out.println(". The table status is " + status);
                Thread.sleep(500);
            }

        } catch (ResourceNotFoundException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
```

```
        System.out.println("The table is deleted");
    }

    public static void deleteTable(KeyspacesClient keyClient, String keyspaceName,
String tableName) {
        try {
            DeleteTableRequest tableRequest = DeleteTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            keyClient.deleteTable(tableRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkRestoredTable(KeyspacesClient keyClient, String
keyspaceName, String tableName)
            throws InterruptedException {
        try {
            boolean tableStatus = false;
            String status;
            GetTableResponse response = null;
            GetTableRequest tableRequest = GetTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            while (!tableStatus) {
                response = keyClient.getTable(tableRequest);
                status = response.statusAsString();
                System.out.println("The table status is " + status);

                if (status.compareTo("ACTIVE") == 0) {
                    tableStatus = true;
                }
                Thread.sleep(500);
            }

            List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
            for (ColumnDefinition def : cols) {
```

```
                System.out.println("The column name is " + def.name());
                System.out.println("The column type is " + def.type());
            }

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void restoreTable(KeyspacesClient keyClient, String keyspaceName,
ZonedDateTime utc) {
        try {
            Instant myTime = utc.toInstant();
            RestoreTableRequest restoreTableRequest = RestoreTableRequest.builder()
                    .restoreTimestamp(myTime)
                    .sourceTableName("Movie")
                    .targetKeyspaceName(keyspaceName)
                    .targetTableName("MovieRestore")
                    .sourceKeyspaceName(keyspaceName)
                    .build();

            RestoreTableResponse response =
keyClient.restoreTable(restoreTableRequest);
            System.out.println("The ARN of the restored table is " +
response.restoredTableARN());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void getWatchedData(CqlSession session, String keyspaceName) {
        ResultSet resultSet = session
                .execute("SELECT * FROM \"" + keyspaceName + "\".\"Movie\" WHERE
watched = true ALLOW FILTERING;");
        resultSet.forEach(item -> {
            System.out.println("The Movie title is " + item.getString("title"));
            System.out.println("The Movie year is " + item.getInt("year"));
            System.out.println("The plot is " + item.getString("plot"));
        });
    }
```

```
   public static void updateRecord(CqlSession session, String keySpace, String
titleUpdate, int yearUpdate) {
       String sqlStatement = "UPDATE \"" + keySpace
               + "\".\"Movie\" SET watched=true WHERE title = :k0 AND year = :k1;";
       BatchStatementBuilder builder =
BatchStatement.builder(DefaultBatchType.UNLOGGED);
       builder.setConsistencyLevel(ConsistencyLevel.LOCAL_QUORUM);
       PreparedStatement preparedStatement = session.prepare(sqlStatement);
       builder.addStatement(preparedStatement.boundStatementBuilder()
               .setString("k0", titleUpdate)
               .setInt("k1", yearUpdate)
               .build());

       BatchStatement batchStatement = builder.build();
       session.execute(batchStatement);
   }

   public static void updateTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           ColumnDefinition def = ColumnDefinition.builder()
                   .name("watched")
                   .type("boolean")
                   .build();

           UpdateTableRequest tableRequest = UpdateTableRequest.builder()
                   .keyspaceName(keySpace)
                   .tableName(tableName)
                   .addColumns(def)
                   .build();

           keyClient.updateTable(tableRequest);

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   public static void getSpecificMovie(CqlSession session, String keyspaceName) {
       ResultSet resultSet = session.execute(
               "SELECT * FROM \"" + keyspaceName + "\".\"Movie\" WHERE title = 'The
Family' ALLOW FILTERING ;");
       resultSet.forEach(item -> {
```

```
            System.out.println("The Movie title is " + item.getString("title"));
            System.out.println("The Movie year is " + item.getInt("year"));
            System.out.println("The plot is " + item.getString("plot"));
        });
    }

    // Get records from the Movie table.
    public static void getMovieData(CqlSession session, String keyspaceName) {
        ResultSet resultSet = session.execute("SELECT * FROM \"" + keyspaceName +
"\".\"Movie\";");
        resultSet.forEach(item -> {
            System.out.println("The Movie title is " + item.getString("title"));
            System.out.println("The Movie year is " + item.getInt("year"));
            System.out.println("The plot is " + item.getString("plot"));
        });
    }

    // Load data into the table.
    public static void loadData(CqlSession session, String fileName, String
keySpace) throws IOException {
        String sqlStatement = "INSERT INTO \"" + keySpace + "\".\"Movie\" (title,
year, plot) values (:k0, :k1, :k2)";
        JsonParser parser = new JsonFactory().createParser(new File(fileName));
        com.fasterxml.jackson.databind.JsonNode rootNode = new
ObjectMapper().readTree(parser);
        Iterator<JsonNode> iter = rootNode.iterator();
        ObjectNode currentNode;
        int t = 0;
        while (iter.hasNext()) {

            // Add 20 movies to the table.
            if (t == 20)
                break;
            currentNode = (ObjectNode) iter.next();

            int year = currentNode.path("year").asInt();
            String title = currentNode.path("title").asText();
            String plot = currentNode.path("info").path("plot").toString();

            // Insert the data into the Amazon Keyspaces table.
            BatchStatementBuilder builder =
BatchStatement.builder(DefaultBatchType.UNLOGGED);
            builder.setConsistencyLevel(ConsistencyLevel.LOCAL_QUORUM);
            PreparedStatement preparedStatement = session.prepare(sqlStatement);
```

```
            builder.addStatement(preparedStatement.boundStatementBuilder()
                    .setString("k0", title)
                    .setInt("k1", year)
                    .setString("k2", plot)
                    .build());

            BatchStatement batchStatement = builder.build();
            session.execute(batchStatement);
            t++;
        }

        System.out.println("You have added " + t + " records successfully!");
    }

    public static void listTables(KeyspacesClient keyClient, String keyspaceName) {
        try {
            ListTablesRequest tablesRequest = ListTablesRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            ListTablesIterable listRes =
keyClient.listTablesPaginator(tablesRequest);
            listRes.stream()
                    .flatMap(r -> r.tables().stream())
                    .forEach(content -> System.out.println(" ARN: " +
content.resourceArn() +
                            " Table name: " + content.tableName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkTable(KeyspacesClient keyClient, String keyspaceName,
String tableName)
            throws InterruptedException {
        try {
            boolean tableStatus = false;
            String status;
            GetTableResponse response = null;
            GetTableRequest tableRequest = GetTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
```

```
                .build();

            while (!tableStatus) {
                response = keyClient.getTable(tableRequest);
                status = response.statusAsString();
                System.out.println(". The table status is " + status);

                if (status.compareTo("ACTIVE") == 0) {
                    tableStatus = true;
                }
                Thread.sleep(500);
            }

            List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
            for (ColumnDefinition def : cols) {
                System.out.println("The column name is " + def.name());
                System.out.println("The column type is " + def.type());
            }

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
        try {
            // Set the columns.
            ColumnDefinition defTitle = ColumnDefinition.builder()
                    .name("title")
                    .type("text")
                    .build();

            ColumnDefinition defYear = ColumnDefinition.builder()
                    .name("year")
                    .type("int")
                    .build();

            ColumnDefinition defReleaseDate = ColumnDefinition.builder()
                    .name("release_date")
                    .type("timestamp")
                    .build();
```

```
            ColumnDefinition defPlot = ColumnDefinition.builder()
                    .name("plot")
                    .type("text")
                    .build();

            List<ColumnDefinition> colList = new ArrayList<>();
            colList.add(defTitle);
            colList.add(defYear);
            colList.add(defReleaseDate);
            colList.add(defPlot);

            // Set the keys.
            PartitionKey yearKey = PartitionKey.builder()
                    .name("year")
                    .build();

            PartitionKey titleKey = PartitionKey.builder()
                    .name("title")
                    .build();

            List<PartitionKey> keyList = new ArrayList<>();
            keyList.add(yearKey);
            keyList.add(titleKey);

            SchemaDefinition schemaDefinition = SchemaDefinition.builder()
                    .partitionKeys(keyList)
                    .allColumns(colList)
                    .build();

            PointInTimeRecovery timeRecovery = PointInTimeRecovery.builder()
                    .status(PointInTimeRecoveryStatus.ENABLED)
                    .build();

            CreateTableRequest tableRequest = CreateTableRequest.builder()
                    .keyspaceName(keySpace)
                    .tableName(tableName)
                    .schemaDefinition(schemaDefinition)
                    .pointInTimeRecovery(timeRecovery)
                    .build();

            CreateTableResponse response = keyClient.createTable(tableRequest);
            System.out.println("The table ARN is " + response.resourceArn());

        } catch (KeyspacesException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listKeyspacesPaginator(KeyspacesClient keyClient) {
        try {
            ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                    .maxResults(10)
                    .build();

            ListKeyspacesIterable listRes =
keyClient.listKeyspacesPaginator(keyspacesRequest);
            listRes.stream()
                    .flatMap(r -> r.keyspaces().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.keyspaceName()));

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void checkKeyspaceExistence(KeyspacesClient keyClient, String
keyspaceName) {
        try {
            GetKeyspaceRequest keyspaceRequest = GetKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            GetKeyspaceResponse response = keyClient.getKeyspace(keyspaceRequest);
            String name = response.keyspaceName();
            System.out.println("The " + name + " KeySpace is ready");

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void createKeySpace(KeyspacesClient keyClient, String
keyspaceName) {
        try {
```

```
            CreateKeyspaceRequest keyspaceRequest = CreateKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            CreateKeyspaceResponse response =
 keyClient.createKeyspace(keyspaceRequest);
            System.out.println("The ARN of the KeySpace is " +
 response.resourceArn());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateKeyspace
  - CreateTable
  - DeleteKeyspace
  - DeleteTable
  - GetKeyspace
  - GetTable
  - ListKeyspaces
  - ListTables
  - RestoreTable
  - UpdateTable

## Tindakan

### `CreateKeyspace`

Contoh kode berikut menunjukkan cara menggunakan`CreateKeyspace`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void createKeySpace(KeyspacesClient keyClient, String
keyspaceName) {
       try {
           CreateKeyspaceRequest keyspaceRequest = CreateKeyspaceRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           CreateKeyspaceResponse response =
keyClient.createKeyspace(keyspaceRequest);
           System.out.println("The ARN of the KeySpace is " +
response.resourceArn());

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat CreateKeyspacedi Referensi AWS SDK for Java 2.x API.

### `CreateTable`

Contoh kode berikut menunjukkan cara menggunakan`CreateTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void createTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           // Set the columns.
           ColumnDefinition defTitle = ColumnDefinition.builder()
                   .name("title")
                   .type("text")
                   .build();

           ColumnDefinition defYear = ColumnDefinition.builder()
                   .name("year")
                   .type("int")
                   .build();

           ColumnDefinition defReleaseDate = ColumnDefinition.builder()
                   .name("release_date")
                   .type("timestamp")
                   .build();

           ColumnDefinition defPlot = ColumnDefinition.builder()
                   .name("plot")
                   .type("text")
                   .build();

           List<ColumnDefinition> colList = new ArrayList<>();
           colList.add(defTitle);
           colList.add(defYear);
           colList.add(defReleaseDate);
           colList.add(defPlot);

           // Set the keys.
           PartitionKey yearKey = PartitionKey.builder()
                   .name("year")
                   .build();

           PartitionKey titleKey = PartitionKey.builder()
                   .name("title")
                   .build();

           List<PartitionKey> keyList = new ArrayList<>();
           keyList.add(yearKey);
           keyList.add(titleKey);
```

```
            SchemaDefinition schemaDefinition = SchemaDefinition.builder()
                    .partitionKeys(keyList)
                    .allColumns(colList)
                    .build();

            PointInTimeRecovery timeRecovery = PointInTimeRecovery.builder()
                    .status(PointInTimeRecoveryStatus.ENABLED)
                    .build();

            CreateTableRequest tableRequest = CreateTableRequest.builder()
                    .keyspaceName(keySpace)
                    .tableName(tableName)
                    .schemaDefinition(schemaDefinition)
                    .pointInTimeRecovery(timeRecovery)
                    .build();

            CreateTableResponse response = keyClient.createTable(tableRequest);
            System.out.println("The table ARN is " + response.resourceArn());

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat CreateTabledi Referensi AWS SDK for Java 2.x API.

### `DeleteKeyspace`

Contoh kode berikut menunjukkan cara menggunakan`DeleteKeyspace`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteKeyspace(KeyspacesClient keyClient, String
keyspaceName) {
```

```
        try {
            DeleteKeyspaceRequest deleteKeyspaceRequest =
DeleteKeyspaceRequest.builder()
                    .keyspaceName(keyspaceName)
                    .build();

            keyClient.deleteKeyspace(deleteKeyspaceRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DeleteKeyspacedi Referensi AWS SDK for Java 2.x API.

### `DeleteTable`

Contoh kode berikut menunjukkan cara menggunakan`DeleteTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteTable(KeyspacesClient keyClient, String keyspaceName,
String tableName) {
        try {
            DeleteTableRequest tableRequest = DeleteTableRequest.builder()
                    .keyspaceName(keyspaceName)
                    .tableName(tableName)
                    .build();

            keyClient.deleteTable(tableRequest);

        } catch (KeyspacesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
    }
```

- Untuk detail API, lihat DeleteTabledi Referensi AWS SDK for Java 2.x API.

### `GetKeyspace`

Contoh kode berikut menunjukkan cara menggunakan`GetKeyspace`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void checkKeyspaceExistence(KeyspacesClient keyClient, String
keyspaceName) {
       try {
           GetKeyspaceRequest keyspaceRequest = GetKeyspaceRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           GetKeyspaceResponse response = keyClient.getKeyspace(keyspaceRequest);
           String name = response.keyspaceName();
           System.out.println("The " + name + " KeySpace is ready");

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetKeyspacedi Referensi AWS SDK for Java 2.x API.

### `GetTable`

Contoh kode berikut menunjukkan cara menggunakan`GetTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void checkTable(KeyspacesClient keyClient, String keyspaceName,
String tableName)
           throws InterruptedException {
       try {
           boolean tableStatus = false;
           String status;
           GetTableResponse response = null;
           GetTableRequest tableRequest = GetTableRequest.builder()
                   .keyspaceName(keyspaceName)
                   .tableName(tableName)
                   .build();

           while (!tableStatus) {
               response = keyClient.getTable(tableRequest);
               status = response.statusAsString();
               System.out.println(". The table status is " + status);

               if (status.compareTo("ACTIVE") == 0) {
                   tableStatus = true;
               }
               Thread.sleep(500);
           }

           List<ColumnDefinition> cols = response.schemaDefinition().allColumns();
           for (ColumnDefinition def : cols) {
               System.out.println("The column name is " + def.name());
               System.out.println("The column type is " + def.type());
           }

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetTabledi Referensi AWS SDK for Java 2.x API.

### `ListKeyspaces`

Contoh kode berikut menunjukkan cara menggunakan`ListKeyspaces`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listKeyspacesPaginator(KeyspacesClient keyClient) {
       try {
           ListKeyspacesRequest keyspacesRequest = ListKeyspacesRequest.builder()
                   .maxResults(10)
                   .build();

           ListKeyspacesIterable listRes =
keyClient.listKeyspacesPaginator(keyspacesRequest);
           listRes.stream()
                   .flatMap(r -> r.keyspaces().stream())
                   .forEach(content -> System.out.println(" Name: " +
content.keyspaceName()));

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ListKeyspacesdi Referensi AWS SDK for Java 2.x API.

### `ListTables`

Contoh kode berikut menunjukkan cara menggunakan`ListTables`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listTables(KeyspacesClient keyClient, String keyspaceName) {
       try {
           ListTablesRequest tablesRequest = ListTablesRequest.builder()
                   .keyspaceName(keyspaceName)
                   .build();

           ListTablesIterable listRes =
keyClient.listTablesPaginator(tablesRequest);
           listRes.stream()
                   .flatMap(r -> r.tables().stream())
                   .forEach(content -> System.out.println(" ARN: " +
content.resourceArn() +
                           " Table name: " + content.tableName()));

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ListTablesdi Referensi AWS SDK for Java 2.x API.

### `RestoreTable`

Contoh kode berikut menunjukkan cara menggunakan`RestoreTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void restoreTable(KeyspacesClient keyClient, String keyspaceName,
ZonedDateTime utc) {
       try {
           Instant myTime = utc.toInstant();
           RestoreTableRequest restoreTableRequest = RestoreTableRequest.builder()
                   .restoreTimestamp(myTime)
                   .sourceTableName("Movie")
                   .targetKeyspaceName(keyspaceName)
                   .targetTableName("MovieRestore")
                   .sourceKeyspaceName(keyspaceName)
                   .build();

           RestoreTableResponse response =
keyClient.restoreTable(restoreTableRequest);
           System.out.println("The ARN of the restored table is " +
response.restoredTableARN());

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat RestoreTabledi Referensi AWS SDK for Java 2.x API.

### `UpdateTable`

Contoh kode berikut menunjukkan cara menggunakan`UpdateTable`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void updateTable(KeyspacesClient keyClient, String keySpace,
String tableName) {
       try {
           ColumnDefinition def = ColumnDefinition.builder()
                   .name("watched")
                   .type("boolean")
                   .build();

           UpdateTableRequest tableRequest = UpdateTableRequest.builder()
                   .keyspaceName(keySpace)
                   .tableName(tableName)
                   .addColumns(def)
                   .build();

           keyClient.updateTable(tableRequest);

       } catch (KeyspacesException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat UpdateTabledi Referensi AWS SDK for Java 2.x API.

# Contoh Kinesis menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x Kinesis with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Contoh nirserver


# Tindakan

### `CreateStream`

Contoh kode berikut menunjukkan cara menggunakan`CreateStream`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.CreateStreamRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateDataStream {
    public static void main(String[] args) {
```

```
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream (for example,
 StockTradeStream).
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();
        createStream(kinesisClient, streamName);
        System.out.println("Done");
        kinesisClient.close();
    }

    public static void createStream(KinesisClient kinesisClient, String streamName)
 {
        try {
            CreateStreamRequest streamReq = CreateStreamRequest.builder()
                    .streamName(streamName)
                    .shardCount(1)
                    .build();

            kinesisClient.createStream(streamReq);

        } catch (KinesisException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateStreamdi Referensi AWS SDK for Java 2.x API.

### `DeleteStream`

Contoh kode berikut menunjukkan cara menggunakan`DeleteStream`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.DeleteStreamRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDataStream {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream (for example,
 StockTradeStream)
                """;

        if (args.length != 1) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        deleteStream(kinesisClient, streamName);
        kinesisClient.close();
        System.out.println("Done");
    }

    public static void deleteStream(KinesisClient kinesisClient, String streamName)
 {
        try {
            DeleteStreamRequest delStream = DeleteStreamRequest.builder()
                    .streamName(streamName)
                    .build();

            kinesisClient.deleteStream(delStream);

        } catch (KinesisException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteStreamdi Referensi AWS SDK for Java 2.x API.

### `GetRecords`

Contoh kode berikut menunjukkan cara menggunakan`GetRecords`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.Shard;
import software.amazon.awssdk.services.kinesis.model.GetShardIteratorRequest;
import software.amazon.awssdk.services.kinesis.model.GetShardIteratorResponse;
import software.amazon.awssdk.services.kinesis.model.Record;
import software.amazon.awssdk.services.kinesis.model.GetRecordsRequest;
import software.amazon.awssdk.services.kinesis.model.GetRecordsResponse;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetRecords {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream to read from (for
 example, StockTradeStream).
                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        getStockTrades(kinesisClient, streamName);
        kinesisClient.close();
    }

    public static void getStockTrades(KinesisClient kinesisClient, String
streamName) {
        String shardIterator;
        String lastShardId = null;
        DescribeStreamRequest describeStreamRequest =
DescribeStreamRequest.builder()
                .streamName(streamName)
                .build();

        List<Shard> shards = new ArrayList<>();
        DescribeStreamResponse streamRes;
        do {
            streamRes = kinesisClient.describeStream(describeStreamRequest);
            shards.addAll(streamRes.streamDescription().shards());

            if (shards.size() > 0) {
                lastShardId = shards.get(shards.size() - 1).shardId();
            }
        } while (streamRes.streamDescription().hasMoreShards());

        GetShardIteratorRequest itReq = GetShardIteratorRequest.builder()
                .streamName(streamName)
                .shardIteratorType("TRIM_HORIZON")
                .shardId(lastShardId)
                .build();

        GetShardIteratorResponse shardIteratorResult =
kinesisClient.getShardIterator(itReq);
        shardIterator = shardIteratorResult.shardIterator();
```

```
        // Continuously read data records from shard.
        List<Record> records;

        // Create new GetRecordsRequest with existing shardIterator.
        // Set maximum records to return to 1000.
        GetRecordsRequest recordsRequest = GetRecordsRequest.builder()
                .shardIterator(shardIterator)
                .limit(1000)
                .build();

        GetRecordsResponse result = kinesisClient.getRecords(recordsRequest);

        // Put result into record list. Result may be empty.
        records = result.records();

        // Print records
        for (Record record : records) {
            SdkBytes byteBuffer = record.data();
            System.out.printf("Seq No: %s - %s%n", record.sequenceNumber(), new
 String(byteBuffer.asByteArray()));
        }
    }
}
```

- Untuk detail API, lihat GetRecordsdi Referensi AWS SDK for Java 2.x API.

### `PutRecord`

Contoh kode berikut menunjukkan cara menggunakan`PutRecord`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.kinesis.KinesisClient;
import software.amazon.awssdk.services.kinesis.model.PutRecordRequest;
import software.amazon.awssdk.services.kinesis.model.KinesisException;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamRequest;
import software.amazon.awssdk.services.kinesis.model.DescribeStreamResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StockTradesWriter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <streamName>

                Where:
                    streamName - The Amazon Kinesis data stream to which records are
 written (for example, StockTradeStream)
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String streamName = args[0];
        Region region = Region.US_EAST_1;
        KinesisClient kinesisClient = KinesisClient.builder()
                .region(region)
                .build();

        // Ensure that the Kinesis Stream is valid.
        validateStream(kinesisClient, streamName);
        setStockData(kinesisClient, streamName);
        kinesisClient.close();
    }
```

```
   public static void setStockData(KinesisClient kinesisClient, String streamName)
{
       try {
           // Repeatedly send stock trades with a 100 milliseconds wait in between.
           StockTradeGenerator stockTradeGenerator = new StockTradeGenerator();

           // Put in 50 Records for this example.
           int index = 50;
           for (int x = 0; x < index; x++) {
               StockTrade trade = stockTradeGenerator.getRandomTrade();
               sendStockTrade(trade, kinesisClient, streamName);
               Thread.sleep(100);
           }

       } catch (KinesisException | InterruptedException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
       System.out.println("Done");
   }

   private static void sendStockTrade(StockTrade trade, KinesisClient
kinesisClient,
           String streamName) {
       byte[] bytes = trade.toJsonAsBytes();

       // The bytes could be null if there is an issue with the JSON serialization
by
       // the Jackson JSON library.
       if (bytes == null) {
           System.out.println("Could not get JSON bytes for stock trade");
           return;
       }

       System.out.println("Putting trade: " + trade);
       PutRecordRequest request = PutRecordRequest.builder()
               .partitionKey(trade.getTickerSymbol()) // We use the ticker symbol
as the partition key, explained in
                                                      // the Supplemental
Information section below.
               .streamName(streamName)
               .data(SdkBytes.fromByteArray(bytes))
               .build();
```

```
        try {
            kinesisClient.putRecord(request);
        } catch (KinesisException e) {
            System.err.println(e.getMessage());
        }
    }

    private static void validateStream(KinesisClient kinesisClient, String
 streamName) {
        try {
            DescribeStreamRequest describeStreamRequest =
 DescribeStreamRequest.builder()
                    .streamName(streamName)
                    .build();

            DescribeStreamResponse describeStreamResponse =
 kinesisClient.describeStream(describeStreamRequest);

            if (!
describeStreamResponse.streamDescription().streamStatus().toString().equals("ACTIVE"))
 {
                System.err.println("Stream " + streamName + " is not active. Please
 wait a few moments and try again.");
                System.exit(1);
            }

        } catch (KinesisException e) {
            System.err.println("Error found while describing the stream " +
 streamName);
            System.err.println(e);
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutRecorddi Referensi AWS SDK for Java 2.x API.

# Contoh nirserver

Memanggil fungsi Lambda dari pemicu Kinesis

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima catatan dari aliran Kinesis. Fungsi mengambil payload Kinesis, mendekode dari Base64, dan mencatat konten rekaman.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara Kinesis dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;

public class Handler implements RequestHandler<KinesisEvent, Void> {
    @Override
    public Void handleRequest(final KinesisEvent event, final Context context) {
        LambdaLogger logger = context.getLogger();
        if (event.getRecords().isEmpty()) {
            logger.log("Empty Kinesis Event received");
            return null;
        }
        for (KinesisEvent.KinesisEventRecord record : event.getRecords()) {
            try {
                logger.log("Processed Event with EventId: "+record.getEventID());
                String data = new String(record.getKinesis().getData().array());
                logger.log("Data:"+ data);
                // TODO: Do interesting work based on the new data
            }
```

```
            catch (Exception ex) {
                logger.log("An error occurred:"+ex.getMessage());
                throw ex;
            }
        }
        logger.log("Successfully processed:"+event.getRecords().size()+" records");
        return null;
    }

}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu Kinesis

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari aliran Kinesis. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch Kinesis dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;

import java.io.Serializable;
import java.util.ArrayList;
import java.util.List;

public class ProcessKinesisRecords implements RequestHandler<KinesisEvent,
 StreamsEventResponse> {
```

```
    @Override
    public StreamsEventResponse handleRequest(KinesisEvent input, Context context) {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (KinesisEvent.KinesisEventRecord kinesisEventRecord :
 input.getRecords()) {
            try {
                //Process your record
                KinesisEvent.Record kinesisRecord = kinesisEventRecord.getKinesis();
                curRecordSequenceNumber = kinesisRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse(batchItemFailures);
    }
}
```

# AWS KMS contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS KMS.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Halo AWS KMS

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan AWS Key Management Service.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.kms.KmsAsyncClient;
import software.amazon.awssdk.services.kms.model.ListKeysRequest;
import software.amazon.awssdk.services.kms.paginators.ListKeysPublisher;
import java.util.concurrent.CompletableFuture;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKMS {
    public static void main(String[] args) {
        listAllKeys();
```

```
    }

    public static void listAllKeys() {
        KmsAsyncClient kmsAsyncClient = KmsAsyncClient.builder()
            .build();
        ListKeysRequest listKeysRequest = ListKeysRequest.builder()
            .limit(15)
            .build();

        /*
         * The `subscribe` method is required when using paginator methods in the
AWS SDK
         * because paginator methods return an instance of a `ListKeysPublisher`,
which is
         * based on a reactive stream. This allows asynchronous retrieval of
paginated
         * results as they become available. By subscribing to the stream, we can
process
         * each page of results as they are emitted.
         */
        ListKeysPublisher keysPublisher =
kmsAsyncClient.listKeysPaginator(listKeysRequest);
        CompletableFuture<Void> future = keysPublisher
            .subscribe(r -> r.keys().forEach(key ->
                System.out.println("The key ARN is: " + key.keyArn() + ". The key Id
is: " + key.keyId())))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    System.err.println("Error occurred: " + exception.getMessage());
                } else {
                    System.out.println("Successfully listed all keys.");
                }
            });

        try {
            future.join();
        } catch (Exception e) {
            System.err.println("Failed to list keys: " + e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat ListKeysdi Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

## Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat kunci KMS.
- Buat daftar kunci KMS untuk akun Anda dan dapatkan detailnya.
- Aktifkan dan nonaktifkan tombol KMS.
- Hasilkan kunci data simetris yang dapat digunakan untuk enkripsi sisi klien.
- Hasilkan kunci asimetris yang digunakan untuk menandatangani data secara digital.
- Tombol tag.
- Hapus kunci KMS.

### SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menjalankan skenario di prompt perintah.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.kms.model.AlreadyExistsException;
import software.amazon.awssdk.services.kms.model.DisabledException;
import software.amazon.awssdk.services.kms.model.EnableKeyRotationResponse;
import software.amazon.awssdk.services.kms.model.KmsException;
import software.amazon.awssdk.services.kms.model.NotFoundException;
import software.amazon.awssdk.services.kms.model.RevokeGrantResponse;
import java.util.List;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class KMSScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String accountId = "";

    private static final Logger logger = LoggerFactory.getLogger(KMSScenario.class);

    static KMSActions kmsActions = new KMSActions();

    static Scanner scanner = new Scanner(System.in);

    static String aliasName = "alias/dev-encryption-key";

    public static void main(String[] args) {
        final String usage = """
            Usage: <granteePrincipal>

            Where:
               granteePrincipal - The principal (user, service account, or group) to
 whom the grant or permission is being given.
            """;

        if (args.length != 1) {
            logger.info(usage);
            return;
        }
        String granteePrincipal = args[0];
        String policyName = "default";

        accountId = kmsActions.getAccountId();
        String keyDesc = "Created by the AWS KMS API";

        logger.info(DASHES);
        logger.info("""
            Welcome to the AWS Key Management SDK Basics scenario.
```

```
            This program demonstrates how to interact with AWS Key Management using
the AWS SDK for Java (v2).
            The AWS Key Management Service (KMS) is a secure and highly available
service that allows you to create
            and manage AWS KMS keys and control their use across a wide range of AWS
services and applications.
            KMS provides a centralized and unified approach to managing encryption
keys, making it easier to meet your
            data protection and regulatory compliance requirements.

            This Basics scenario creates two key types:

            - A symmetric encryption key is used to encrypt and decrypt data.
            - An asymmetric key used to digitally sign data.

            Let's get started...
            """);
        waitForInputToContinue(scanner);

        try {
        // Run the methods that belong to this scenario.
        String targetKeyId = runScenario(granteePrincipal, keyDesc, policyName);
        requestDeleteResources(aliasName, targetKeyId);

        } catch (Throwable rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static String runScenario(String granteePrincipal, String keyDesc,
String policyName) throws Throwable {
        logger.info(DASHES);
        logger.info("1. Create a symmetric KMS key\n");
        logger.info("First, the program will creates a symmetric KMS key that you
can used to encrypt and decrypt data.");
        waitForInputToContinue(scanner);
        String targetKeyId;
        try {
```

```
            CompletableFuture<String> futureKeyId =
kmsActions.createKeyAsync(keyDesc);
            targetKeyId = futureKeyId.join();
            logger.info("A symmetric key was successfully created " + targetKeyId);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("""
            2. Enable a KMS key

            By default, when the SDK creates an AWS key, it is enabled. The next bit
of code checks to
            determine if the key is enabled.
             """);
        waitForInputToContinue(scanner);
        boolean isEnabled;
        try {
            CompletableFuture<Boolean> futureIsKeyEnabled =
kmsActions.isKeyEnabledAsync(targetKeyId);
            isEnabled = futureIsKeyEnabled.join();
            logger.info("Is the key enabled? {}", isEnabled);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
```

```
        if (!isEnabled)
            try {
                CompletableFuture<Void> future =
kmsActions.enableKeyAsync(targetKeyId);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
                throw cause;
            }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("3. Encrypt data using the symmetric KMS key");
        String plaintext = "Hello, AWS KMS!";
        logger.info("""
            One of the main uses of symmetric keys is to encrypt and decrypt data.
            Next, the code encrypts the string {} with the SYMMETRIC_DEFAULT
encryption algorithm.
            """, plaintext);
        waitForInputToContinue(scanner);
        SdkBytes encryptedData;
        try {
            CompletableFuture<SdkBytes> future =
kmsActions.encryptDataAsync(targetKeyId, plaintext);
            encryptedData = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof DisabledException kmsDisabledEx) {
                logger.info("KMS error occurred due to a disabled
key: Error message: {}, Error code {}", kmsDisabledEx.getMessage(),
kmsDisabledEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteKey(targetKeyId);
            throw cause;
```

```
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("4. Create an alias");
        logger.info("""

            The alias name should be prefixed with 'alias/'.
            The default, 'alias/dev-encryption-key'.
             """);
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<Void> future =
kmsActions.createCustomAliasAsync(targetKeyId, aliasName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof AlreadyExistsException kmsExistsEx) {
                if (kmsExistsEx.getMessage().contains("already exists")) {
                    logger.info("The alias '" + aliasName + "' already exists.
Moving on...");
                }
            } else {
                logger.error("An unexpected error occurred: " + rt.getMessage(),
rt);
                deleteKey(targetKeyId);
                throw cause;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("5. List all of your aliases");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future = kmsActions.listAllAliasesAsync();
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
```

```
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("6. Enable automatic rotation of the KMS key");
        logger.info("""

            By default, when the SDK enables automatic rotation of a KMS key,
            KMS rotates the key material of the KMS key one year (approximately 365
days) from the enable date and every year
            thereafter.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<EnableKeyRotationResponse> future =
kmsActions.enableKeyRotationAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("""
            7. Create a grant
```

```
            A grant is a policy instrument that allows Amazon Web Services
principals to use KMS keys.
            It also can allow them to view a KMS key (DescribeKey) and create and
manage grants.
            When authorizing access to a KMS key, grants are considered along with
key policies and IAM policies.
            """);

        waitForInputToContinue(scanner);
        String grantId = null;
        try {
            CompletableFuture<String> futureGrantId =
kmsActions.grantKeyAsync(targetKeyId, granteePrincipal);
            grantId = futureGrantId.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. List grants for the KMS key");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Object> future =
kmsActions.displayGrantIdsAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
```

```
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("9. Revoke the grant");
        logger.info("""
            The revocation of a grant immediately removes the permissions and access
that the grant had provided.
            This means that any principal (user, role, or service) that was granted
access to perform specific
            KMS operations on a KMS key will no longer be able to perform those
operations.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<RevokeGrantResponse> future =
kmsActions.revokeKeyGrantAsync(targetKeyId, grantId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                if (kmsEx.getMessage().contains("Grant does not exist")) {
                    logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                } else {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                    throw cause;
                }
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
                deleteAliasName(aliasName);
                deleteKey(targetKeyId);
                throw cause;
            }
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
```

```
        logger.info("10. Decrypt the data\n");
        logger.info("""
            Lets decrypt the data that was encrypted in an early step.
            The code uses the same key to decrypt the string that we encrypted
earlier in the program.
            """);
        waitForInputToContinue(scanner);
        String decryptedData = "";
        try {
            CompletableFuture<String> future =
kmsActions.decryptDataAsync(encryptedData, targetKeyId);
            decryptedData = future.join();
            logger.info("Decrypted data: " + decryptedData);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        logger.info("Decrypted text is: " + decryptedData);
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("11. Replace a key policy\n");
        logger.info("""
            A key policy is a resource policy for a KMS key. Key policies are the
primary way to control
            access to KMS keys. Every KMS key must have exactly one key policy. The
statements in the key policy
            determine who has permission to use the KMS key and how they can use
it.
            You can also use IAM policies and grants to control access to the KMS
key, but every KMS key
            must have a key policy.

            By default, when you create a key by using the SDK, a policy is created
that
```

```
            gives the AWS account that owns the KMS key full access to the KMS key.

            Let's try to replace the automatically created policy with the following
policy.

                "Version":"2012-10-17",
                "Statement": [{
                "Effect": "Allow",
                "Principal": {"AWS": "arn:aws:iam::0000000000:root"},
                "Action": "kms:*",
                "Resource": "*"
                }]
            """);

        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Boolean> future =
kmsActions.replacePolicyAsync(targetKeyId, policyName, accountId);
            boolean success = future.join();
            if (success) {
                logger.info("Key policy replacement succeeded.");
            } else {
                logger.error("Key policy replacement failed.");
            }

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("12. Get the key policy\n");
        logger.info("The next bit of code that runs gets the key policy to make sure
it exists.");
        waitForInputToContinue(scanner);
```

```
        try {
            CompletableFuture<String> future =
kmsActions.getKeyPolicyAsync(targetKeyId, policyName);
            String policy = future.join();
            if (!policy.isEmpty()) {
                logger.info("Retrieved policy: " + policy);
            }

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("13. Create an asymmetric KMS key and sign your data\n");
        logger.info("""
             Signing your data with an AWS key can provide several benefits that
make it an attractive option
             for your data signing needs. By using an AWS KMS key, you can leverage
the
             security controls and compliance features provided by AWS,
             which can help you meet various regulatory requirements and enhance the
overall security posture
             of your organization.
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Boolean> future = kmsActions.signVerifyDataAsync();
            boolean success = future.join();
            if (success) {
                logger.info("Sign and verify data operation succeeded.");
            } else {
                logger.error("Sign and verify data operation failed.");
            }
```

```
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);

        logger.info(DASHES);
        logger.info("14. Tag your symmetric KMS Key\n");
        logger.info("""
            By using tags, you can improve the overall management, security, and
governance of your
            KMS keys, making it easier to organize, track, and control access to
your encrypted data within
            your AWS environment
            """);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = kmsActions.tagKMSKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            deleteAliasName(aliasName);
            deleteKey(targetKeyId);
            throw cause;
        }
        waitForInputToContinue(scanner);
        return targetKeyId;
    }
```

```
   // Deletes KMS resources with user input.
   private static void requestDeleteResources(String aliasName, String targetKeyId)
{
       logger.info(DASHES);
       logger.info("15. Schedule the deletion of the KMS key\n");
       logger.info("""
           By default, KMS applies a waiting period of 30 days,
           but you can specify a waiting period of 7-30 days. When this operation
is successful,
           the key state of the KMS key changes to PendingDeletion and the key
can't be used in any
           cryptographic operations. It remains in this state for the duration of
the waiting period.

           Deleting a KMS key is a destructive and potentially dangerous operation.
When a KMS key is deleted,
           all data that was encrypted under the KMS key is unrecoverable.
           """);
       logger.info("Would you like to delete the Key Management resources? (y/n)");
       String delAns = scanner.nextLine().trim();
       if (delAns.equalsIgnoreCase("y")) {
           logger.info("You selected to delete the AWS KMS resources.");
           waitForInputToContinue(scanner);
           try {
               CompletableFuture<Void> future =
kmsActions.deleteSpecificAliasAsync(aliasName);
               future.join();

           } catch (RuntimeException rt) {
               Throwable cause = rt.getCause();
               if (cause instanceof KmsException kmsEx) {
                   logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
               } else {
                   logger.info("An unexpected error occurred: " + rt.getMessage());
               }
           }
           waitForInputToContinue(scanner);
           try {
               CompletableFuture<Void> future =
kmsActions.disableKeyAsync(targetKeyId);
               future.join();

           } catch (RuntimeException rt) {
```

```
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
            }

            try {
                CompletableFuture<Void> future =
kmsActions.deleteKeyAsync(targetKeyId);
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof KmsException kmsEx) {
                    logger.info("KMS error occurred: Error message: {}, Error code
{}", kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: " + rt.getMessage());
                }
            }

        } else {
            logger.info("The Key Management resources will not be deleted");
        }

        logger.info(DASHES);
        logger.info("This concludes the AWS Key Management SDK scenario");
        logger.info(DASHES);
    }

    // This method is invoked from Exceptions to clean up the resources.
    private static void deleteKey(String targetKeyId) {
        try {
            CompletableFuture<Void> future =
kmsActions.disableKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
```

```
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }

        try {
            CompletableFuture<Void> future = kmsActions.deleteKeyAsync(targetKeyId);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    // This method is invoked from Exceptions to clean up the resources.
    private static void deleteAliasName(String aliasName) {
        try {
            CompletableFuture<Void> future =
kmsActions.deleteSpecificAliasAsync(aliasName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof KmsException kmsEx) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
```

```
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Tentukan kelas yang membungkus tindakan KMS.

```
public class KMSActions {
    private static final Logger logger = LoggerFactory.getLogger(KMSActions.class);
    private static KmsAsyncClient kmsAsyncClient;

    /**
     * Retrieves an asynchronous AWS Key Management Service (KMS) client.
     * <p>
     * This method creates and returns a singleton instance of the KMS async client,
 with the following configurations:
     * <ul>
     *   <li>Max concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: up to 3 retries</li>
     *   <li>Credentials provider: environment variable credentials provider</li>
     * </ul>
     * <p>
     * If the client instance has already been created, it is returned instead of
 creating a new one.
     *
     * @return the KMS async client instance
     */
    private static KmsAsyncClient getAsyncClient() {
```

```
        if (kmsAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            kmsAsyncClient = KmsAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return kmsAsyncClient;
    }

    /**
     * Creates a new symmetric encryption key asynchronously.
     *
     * @param keyDesc the description of the key to be created
     * @return a {@link CompletableFuture} that completes with the ID of the newly
created key
     * @throws RuntimeException if an error occurs while creating the key
     */
    public CompletableFuture<String> createKeyAsync(String keyDesc) {
        CreateKeyRequest keyRequest = CreateKeyRequest.builder()
            .description(keyDesc)
            .keySpec(KeySpec.SYMMETRIC_DEFAULT)
            .keyUsage(KeyUsageType.ENCRYPT_DECRYPT)
            .build();

        return getAsyncClient().createKey(keyRequest)
            .thenApply(resp -> resp.keyMetadata().keyId())
            .exceptionally(ex -> {
```

```
                throw new RuntimeException("An error occurred while creating the
key: " + ex.getMessage(), ex);
            });
    }

    /**
     * Asynchronously checks if a specified key is enabled.
     *
     * @param keyId the ID of the key to check
     * @return a {@link CompletableFuture} that, when completed, indicates whether
the key is enabled or not
     *
     * @throws RuntimeException if an exception occurs while checking the key state
     */
    public CompletableFuture<Boolean> isKeyEnabledAsync(String keyId) {
        DescribeKeyRequest keyRequest = DescribeKeyRequest.builder()
            .keyId(keyId)
            .build();

        CompletableFuture<DescribeKeyResponse> responseFuture =
getAsyncClient().describeKey(keyRequest);
        return responseFuture.whenComplete((resp, ex) -> {
            if (resp != null) {
                KeyState keyState = resp.keyMetadata().keyState();
                if (keyState == KeyState.ENABLED) {
                    logger.info("The key is enabled.");
                } else {
                    logger.info("The key is not enabled. Key state: {}", keyState);
                }
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(resp -> resp.keyMetadata().keyState() == KeyState.ENABLED);
    }

    /**
     * Asynchronously enables the specified key.
     *
     * @param keyId the ID of the key to enable
     * @return a {@link CompletableFuture} that completes when the key has been
enabled
     */
    public CompletableFuture<Void> enableKeyAsync(String keyId) {
        EnableKeyRequest enableKeyRequest = EnableKeyRequest.builder()
```

```
            .keyId(keyId)
            .build();

        CompletableFuture<EnableKeyResponse> responseFuture =
getAsyncClient().enableKey(enableKeyRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("Key with ID [{}] has been enabled.", keyId);
            } else {
                if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("KMS error occurred while enabling
key: " + kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred while
enabling key: " + exception.getMessage(), exception);
                }
            }
        });

        return responseFuture.thenApply(response -> null);
    }

    /**
     * Encrypts the given text asynchronously using the specified KMS client and key
ID.
     *
     * @param keyId the ID of the KMS key to use for encryption
     * @param text the text to encrypt
     * @return a CompletableFuture that completes with the encrypted data as an
SdkBytes object
     */
    public CompletableFuture<SdkBytes> encryptDataAsync(String keyId, String text) {
        SdkBytes myBytes = SdkBytes.fromUtf8String(text);
        EncryptRequest encryptRequest = EncryptRequest.builder()
            .keyId(keyId)
            .plaintext(myBytes)
            .build();

        CompletableFuture<EncryptResponse> responseFuture =
getAsyncClient().encrypt(encryptRequest).toCompletableFuture();
        return responseFuture.whenComplete((response, ex) -> {
            if (response != null) {
                String algorithm = response.encryptionAlgorithm().toString();
```

```
                logger.info("The string was encrypted with algorithm {}.",
algorithm);
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(EncryptResponse::ciphertextBlob);
    }

    /**
     * Creates a custom alias for the specified target key asynchronously.
     *
     * @param targetKeyId the ID of the target key for the alias
     * @param aliasName   the name of the alias to create
     * @return a {@link CompletableFuture} that completes when the alias creation
operation is finished
     */
    public CompletableFuture<Void> createCustomAliasAsync(String targetKeyId, String
aliasName) {
        CreateAliasRequest aliasRequest = CreateAliasRequest.builder()
            .aliasName(aliasName)
            .targetKeyId(targetKeyId)
            .build();

        CompletableFuture<CreateAliasResponse> responseFuture =
getAsyncClient().createAlias(aliasRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("{} was successfully created.", aliasName);
            } else {
                if (exception instanceof ResourceExistsException) {
                    logger.info("Alias [{}] already exists. Moving on...",
aliasName);
                } else if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("KMS error occurred while creating
alias: " + kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred while
creating alias: " + exception.getMessage(), exception);
                }
            }
        });

        return responseFuture.thenApply(response -> null);
    }
```

```
   /**
    * Asynchronously lists all the aliases in the current AWS account.
    *
    * @return a {@link CompletableFuture} that completes when the list of aliases
has been processed
    */
   public CompletableFuture<Object> listAllAliasesAsync() {
       ListAliasesRequest aliasesRequest = ListAliasesRequest.builder()
           .limit(15)
           .build();

       ListAliasesPublisher paginator =
getAsyncClient().listAliasesPaginator(aliasesRequest);
       return paginator.subscribe(response -> {
               response.aliases().forEach(alias ->
                   logger.info("The alias name is: " + alias.aliasName())
               );
           })
           .thenApply(v -> null)
           .exceptionally(ex -> {
               if (ex.getCause() instanceof KmsException) {
                   KmsException e = (KmsException) ex.getCause();
                   throw new RuntimeException("A KMS exception occurred: " +
e.getMessage());
               } else {
                   throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage());
               }
           });
   }

   /**
    * Enables key rotation asynchronously for the specified key ID.
    *
    * @param keyId the ID of the key for which to enable key rotation
    * @return a CompletableFuture that represents the asynchronous operation of
enabling key rotation
    * @throws RuntimeException if there was an error enabling key rotation, either
due to a KMS exception or an unexpected error
    */
   public CompletableFuture<EnableKeyRotationResponse>
enableKeyRotationAsync(String keyId) {
```

```
        EnableKeyRotationRequest enableKeyRotationRequest =
EnableKeyRotationRequest.builder()
            .keyId(keyId)
            .build();

        CompletableFuture<EnableKeyRotationResponse> responseFuture =
getAsyncClient().enableKeyRotation(enableKeyRotationRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("Key rotation has been enabled for key with id [{}]",
keyId);
            } else {
                if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("Failed to enable key rotation: " +
kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
                }
            }
        });

        return responseFuture;
    }

    /**
     * Grants permissions to a specified principal on a customer master key (CMK)
asynchronously.
     *
     * @param keyId             The unique identifier for the customer master key
(CMK) that the grant applies to.
     * @param granteePrincipal  The principal that is given permission to perform
the operations that the grant permits on the CMK.
     * @return A {@link CompletableFuture} that, when completed, contains the ID of
the created grant.
     * @throws RuntimeException If an error occurs during the grant creation
process.
     */
    public CompletableFuture<String> grantKeyAsync(String keyId, String
granteePrincipal) {
        List<GrantOperation> grantPermissions = List.of(
            GrantOperation.ENCRYPT,
            GrantOperation.DECRYPT,
            GrantOperation.DESCRIBE_KEY
```

```
        );

        CreateGrantRequest grantRequest = CreateGrantRequest.builder()
            .keyId(keyId)
            .name("grant1")
            .granteePrincipal(granteePrincipal)
            .operations(grantPermissions)
            .build();

        CompletableFuture<CreateGrantResponse> responseFuture =
getAsyncClient().createGrant(grantRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex == null) {
                logger.info("Grant created successfully with ID: " +
response.grantId());
            } else {
                if (ex instanceof KmsException kmsEx) {
                    throw new RuntimeException("Failed to create grant: " +
kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage(), ex);
                }
            }
        });

        return responseFuture.thenApply(CreateGrantResponse::grantId);
    }

    /**
     * Asynchronously displays the grant IDs for the specified key ID.
     *
     * @param keyId the ID of the AWS KMS key for which to list the grants
     * @return a {@link CompletableFuture} that, when completed, will be null if
the operation succeeded, or will throw a {@link RuntimeException} if the operation
failed
     * @throws RuntimeException if there was an error listing the grants, either due
to an {@link KmsException} or an unexpected error
     */
    public CompletableFuture<Object> displayGrantIdsAsync(String keyId) {
        ListGrantsRequest grantsRequest = ListGrantsRequest.builder()
            .keyId(keyId)
            .limit(15)
            .build();
```

```
       ListGrantsPublisher paginator =
getAsyncClient().listGrantsPaginator(grantsRequest);
       return paginator.subscribe(response -> {
               response.grants().forEach(grant -> {
                   logger.info("The grant Id is: " + grant.grantId());
               });
           })
           .thenApply(v -> null)
           .exceptionally(ex -> {
               Throwable cause = ex.getCause();
               if (cause instanceof KmsException) {
                   throw new RuntimeException("Failed to list grants: " +
cause.getMessage(), cause);
               } else {
                   throw new RuntimeException("An unexpected error occurred: " +
cause.getMessage(), cause);
               }
           });
   }

   /**
    * Revokes a grant for the specified AWS KMS key asynchronously.
    *
    * @param keyId   The ID or key ARN of the AWS KMS key.
    * @param grantId The identifier of the grant to be revoked.
    * @return A {@link CompletableFuture} representing the asynchronous operation
of revoking the grant.
    *         The {@link CompletableFuture} will complete with a {@link
RevokeGrantResponse} object
    *         if the operation is successful, or with a {@code null} value if an
error occurs.
    */
   public CompletableFuture<RevokeGrantResponse> revokeKeyGrantAsync(String keyId,
String grantId) {
       RevokeGrantRequest grantRequest = RevokeGrantRequest.builder()
           .keyId(keyId)
           .grantId(grantId)
           .build();

       CompletableFuture<RevokeGrantResponse> responseFuture =
getAsyncClient().revokeGrant(grantRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
```

```
                logger.info("Grant ID: [" + grantId + "] was successfully
revoked!");
            } else {
                if (exception instanceof KmsException kmsEx) {
                    if (kmsEx.getMessage().contains("Grant does not exist")) {
                        logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                    } else {
                        throw new RuntimeException("KMS error occurred: " +
kmsEx.getMessage(), kmsEx);
                    }
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
                }
            }
        });

        return responseFuture;
    }


    /**
     * Asynchronously decrypts the given encrypted data using the specified key ID.
     *
     * @param encryptedData The encrypted data to be decrypted.
     * @param keyId The ID of the key to be used for decryption.
     * @return A CompletableFuture that, when completed, will contain the decrypted
data as a String.
     *         If an error occurs during the decryption process, the
CompletableFuture will complete
     *         exceptionally with the error, and the method will return an empty
String.
     */
    public CompletableFuture<String> decryptDataAsync(SdkBytes encryptedData, String
keyId) {
        DecryptRequest decryptRequest = DecryptRequest.builder()
            .ciphertextBlob(encryptedData)
            .keyId(keyId)
            .build();

        CompletableFuture<DecryptResponse> responseFuture =
getAsyncClient().decrypt(decryptRequest);
        responseFuture.whenComplete((decryptResponse, exception) -> {
```

```
            if (exception == null) {
                logger.info("Data decrypted successfully for key ID: " + keyId);
            } else {
                if (exception instanceof KmsException kmsEx) {
                    throw new RuntimeException("KMS error occurred while decrypting
data: " + kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred while
decrypting data: " + exception.getMessage(), exception);
                }
            }
        });

        return responseFuture.thenApply(decryptResponse ->
decryptResponse.plaintext().asString(StandardCharsets.UTF_8));
    }

    /**
     * Asynchronously replaces the policy for the specified KMS key.
     *
     * @param keyId       the ID of the KMS key to replace the policy for
     * @param policyName  the name of the policy to be replaced
     * @param accountId   the AWS account ID to be used in the policy
     * @return a {@link CompletableFuture} that completes with a boolean indicating
     *         whether the policy replacement was successful or not
     */
    public CompletableFuture<Boolean> replacePolicyAsync(String keyId, String
policyName, String accountId) {
        String policy = """
    {
      "Version":"2012-10-17",
      "Statement": [{
        "Effect": "Allow",
        "Principal": {"AWS": "arn:aws:iam::%s:root"},
        "Action": "kms:*",
        "Resource": "*"
      }]
    }
    """.formatted(accountId);

        PutKeyPolicyRequest keyPolicyRequest = PutKeyPolicyRequest.builder()
            .keyId(keyId)
            .policyName(policyName)
            .policy(policy)
```

```
            .build();

        // First, get the current policy to check if it exists
        return getAsyncClient().getKeyPolicy(r ->
r.keyId(keyId).policyName(policyName))
            .thenCompose(response -> {
                logger.info("Current policy exists. Replacing it...");
                return getAsyncClient().putKeyPolicy(keyPolicyRequest);
            })
            .thenApply(putPolicyResponse -> {
                logger.info("The key policy has been replaced.");
                return true;
            })
            .exceptionally(throwable -> {
                if (throwable.getCause() instanceof LimitExceededException) {
                    logger.error("Cannot replace policy, as only one policy is
allowed per key.");
                    return false;
                }
                throw new RuntimeException("Error replacing policy", throwable);
            });
    }


    /**
     * Asynchronously retrieves the key policy for the specified key ID and policy
name.
     *
     * @param keyId       the ID of the AWS KMS key for which to retrieve the policy
     * @param policyName the name of the key policy to retrieve
     * @return a {@link CompletableFuture} that, when completed, contains the key
policy as a {@link String}
     */
    public CompletableFuture<String> getKeyPolicyAsync(String keyId, String
policyName) {
        GetKeyPolicyRequest policyRequest = GetKeyPolicyRequest.builder()
            .keyId(keyId)
            .policyName(policyName)
            .build();

        return getAsyncClient().getKeyPolicy(policyRequest)
            .thenApply(response -> {
                String policy = response.policy();
                logger.info("The response is: " + policy);
```

```
                return policy;
            })
            .exceptionally(ex -> {
                throw new RuntimeException("Failed to get key policy", ex);
            });
    }

    /**
     * Asynchronously signs and verifies data using AWS KMS.
     *
     * <p>The method performs the following steps:
     * <ol>
     *     <li>Creates an AWS KMS key with the specified key spec, key usage, and
 origin.</li>
     *     <li>Signs the provided message using the created KMS key and the RSASSA-
PSS-SHA-256 algorithm.</li>
     *     <li>Verifies the signature of the message using the created KMS key and
 the RSASSA-PSS-SHA-256 algorithm.</li>
     * </ol>
     *
     * @return a {@link CompletableFuture} that completes with the result of the
 signature verification,
     *         {@code true} if the signature is valid, {@code false} otherwise.
     * @throws KmsException if any error occurs during the KMS operations.
     * @throws RuntimeException if an unexpected error occurs.
     */
    public CompletableFuture<Boolean> signVerifyDataAsync() {
        String signMessage = "Here is the message that will be digitally signed";

        // Create an AWS KMS key used to digitally sign data.
        CreateKeyRequest createKeyRequest = CreateKeyRequest.builder()
            .keySpec(KeySpec.RSA_2048)
            .keyUsage(KeyUsageType.SIGN_VERIFY)
            .origin(OriginType.AWS_KMS)
            .build();

        return getAsyncClient().createKey(createKeyRequest)
            .thenCompose(createKeyResponse -> {
                String keyId = createKeyResponse.keyMetadata().keyId();

                SdkBytes messageBytes = SdkBytes.fromString(signMessage,
 Charset.defaultCharset());
                SignRequest signRequest = SignRequest.builder()
                    .keyId(keyId)
```

```
                    .message(messageBytes)
                    .signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                    .build();

                return getAsyncClient().sign(signRequest)
                    .thenCompose(signResponse -> {
                        byte[] signedBytes = signResponse.signature().asByteArray();

                        VerifyRequest verifyRequest = VerifyRequest.builder()
                            .keyId(keyId)

.message(SdkBytes.fromByteArray(signMessage.getBytes(Charset.defaultCharset())))

.signature(SdkBytes.fromByteBuffer(ByteBuffer.wrap(signedBytes)))

.signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                            .build();

                        return getAsyncClient().verify(verifyRequest)
                            .thenApply(verifyResponse -> {
                                return (boolean) verifyResponse.signatureValid();
                            });
                    });
            })
            .exceptionally(throwable -> {
               throw new RuntimeException("Failed to sign or verify data",
throwable);
            });
    }

    /**
     * Asynchronously tags a KMS key with a specific tag.
     *
     * @param keyId the ID of the KMS key to be tagged
     * @return a {@link CompletableFuture} that completes when the tagging operation
is finished
     */
    public CompletableFuture<Void> tagKMSKeyAsync(String keyId) {
        Tag tag = Tag.builder()
            .tagKey("Environment")
            .tagValue("Production")
            .build();

        TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
```

```
            .keyId(keyId)
            .tags(tag)
            .build();

        return getAsyncClient().tagResource(tagResourceRequest)
            .thenRun(() -> {
                logger.info("{} key was tagged", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to tag the KMS key", throwable);
            });
    }

    /**
     * Deletes a specific KMS alias asynchronously.
     *
     * @param aliasName the name of the alias to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the specified alias
     */
    public CompletableFuture<Void> deleteSpecificAliasAsync(String aliasName) {
        DeleteAliasRequest deleteAliasRequest = DeleteAliasRequest.builder()
            .aliasName(aliasName)
            .build();

        return getAsyncClient().deleteAlias(deleteAliasRequest)
            .thenRun(() -> {
                logger.info("Alias {} has been deleted successfully", aliasName);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to delete alias: " + aliasName,
throwable);
            });
    }

    /**
     * Asynchronously disables the specified AWS Key Management Service (KMS) key.
     *
     * @param keyId the ID or Amazon Resource Name (ARN) of the KMS key to be
disabled
     * @return a CompletableFuture that, when completed, indicates that the key has
been disabled successfully
     */
    public CompletableFuture<Void> disableKeyAsync(String keyId) {
```

```
        DisableKeyRequest keyRequest = DisableKeyRequest.builder()
            .keyId(keyId)
            .build();

        return getAsyncClient().disableKey(keyRequest)
            .thenRun(() -> {
                logger.info("Key {} has been disabled successfully",keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to disable key: " + keyId,
throwable);
            });
    }

    /**
     * Deletes a KMS key asynchronously.
     *
     * <p><strong>Warning:</strong> Deleting a KMS key is a destructive and
potentially dangerous operation.
     * When a KMS key is deleted, all data that was encrypted under the KMS key
becomes unrecoverable.
     * This means that any files, databases, or other data that were encrypted using
the deleted KMS key
     * will become permanently inaccessible. Exercise extreme caution when deleting
KMS keys.</p>
     *
     * @param keyId the ID of the KMS key to delete
     * @return a {@link CompletableFuture} that completes when the key deletion is
scheduled
     */
    public CompletableFuture<Void> deleteKeyAsync(String keyId) {
        ScheduleKeyDeletionRequest deletionRequest =
ScheduleKeyDeletionRequest.builder()
            .keyId(keyId)
            .pendingWindowInDays(7)
            .build();

        return getAsyncClient().scheduleKeyDeletion(deletionRequest)
            .thenRun(() -> {
                logger.info("Key {} will be deleted in 7 days", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to schedule key deletion for key
ID: " + keyId, throwable);
```

```
            });
    }


    public String getAccountId(){
        try (StsClient stsClient = StsClient.create()){
            GetCallerIdentityResponse callerIdentity =
 stsClient.getCallerIdentity();
            return callerIdentity.account();
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateAlias
  - CreateGrant
  - CreateKey
  - Dekripsi
  - DescribeKey
  - DisableKey
  - EnableKey
  - Enkripsi
  - GetKeyPolicy
  - ListAliases
  - ListGrants
  - ListKeys
  - RevokeGrant
  - ScheduleKeyDeletion
  - Tanda
  - TagResource

# Tindakan

## `CreateAlias`

Contoh kode berikut menunjukkan cara menggunakan`CreateAlias`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a custom alias for the specified target key asynchronously.
    *
    * @param targetKeyId the ID of the target key for the alias
    * @param aliasName   the name of the alias to create
    * @return a {@link CompletableFuture} that completes when the alias creation
operation is finished
    */
   public CompletableFuture<Void> createCustomAliasAsync(String targetKeyId, String
aliasName) {
       CreateAliasRequest aliasRequest = CreateAliasRequest.builder()
           .aliasName(aliasName)
           .targetKeyId(targetKeyId)
           .build();

       CompletableFuture<CreateAliasResponse> responseFuture =
getAsyncClient().createAlias(aliasRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("{} was successfully created.", aliasName);
           } else {
               if (exception instanceof ResourceExistsException) {
                   logger.info("Alias [{}] already exists. Moving on...",
aliasName);
               } else if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while creating
alias: " + kmsEx.getMessage(), kmsEx);
               } else {
```

```
                    throw new RuntimeException("An unexpected error occurred while
creating alias: " + exception.getMessage(), exception);
                }
            }
        });

        return responseFuture.thenApply(response -> null);
    }
```

- Untuk detail API, lihat CreateAliasdi Referensi AWS SDK for Java 2.x API.

### `CreateGrant`

Contoh kode berikut menunjukkan cara menggunakan`CreateGrant`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Grants permissions to a specified principal on a customer master key (CMK)
asynchronously.
     *
     * @param keyId             The unique identifier for the customer master key
(CMK) that the grant applies to.
     * @param granteePrincipal  The principal that is given permission to perform
the operations that the grant permits on the CMK.
     * @return A {@link CompletableFuture} that, when completed, contains the ID of
the created grant.
     * @throws RuntimeException If an error occurs during the grant creation
process.
     */
    public CompletableFuture<String> grantKeyAsync(String keyId, String
granteePrincipal) {
        List<GrantOperation> grantPermissions = List.of(
            GrantOperation.ENCRYPT,
```

```
            GrantOperation.DECRYPT,
            GrantOperation.DESCRIBE_KEY
        );

        CreateGrantRequest grantRequest = CreateGrantRequest.builder()
            .keyId(keyId)
            .name("grant1")
            .granteePrincipal(granteePrincipal)
            .operations(grantPermissions)
            .build();

        CompletableFuture<CreateGrantResponse> responseFuture =
getAsyncClient().createGrant(grantRequest);
        responseFuture.whenComplete((response, ex) -> {
            if (ex == null) {
                logger.info("Grant created successfully with ID: " +
response.grantId());
            } else {
                if (ex instanceof KmsException kmsEx) {
                    throw new RuntimeException("Failed to create grant: " +
kmsEx.getMessage(), kmsEx);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage(), ex);
                }
            }
        });

        return responseFuture.thenApply(CreateGrantResponse::grantId);
    }
```

- Untuk detail API, lihat CreateGrantdi Referensi AWS SDK for Java 2.x API.

### `CreateKey`

Contoh kode berikut menunjukkan cara menggunakan`CreateKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new symmetric encryption key asynchronously.
     *
     * @param keyDesc the description of the key to be created
     * @return a {@link CompletableFuture} that completes with the ID of the newly
created key
     * @throws RuntimeException if an error occurs while creating the key
     */
    public CompletableFuture<String> createKeyAsync(String keyDesc) {
        CreateKeyRequest keyRequest = CreateKeyRequest.builder()
            .description(keyDesc)
            .keySpec(KeySpec.SYMMETRIC_DEFAULT)
            .keyUsage(KeyUsageType.ENCRYPT_DECRYPT)
            .build();

        return getAsyncClient().createKey(keyRequest)
            .thenApply(resp -> resp.keyMetadata().keyId())
            .exceptionally(ex -> {
                throw new RuntimeException("An error occurred while creating the
key: " + ex.getMessage(), ex);
            });
    }
```

- Untuk detail API, lihat CreateKeydi Referensi AWS SDK for Java 2.x API.

### `Decrypt`

Contoh kode berikut menunjukkan cara menggunakan`Decrypt`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously decrypts the given encrypted data using the specified key ID.
    *
    * @param encryptedData The encrypted data to be decrypted.
    * @param keyId The ID of the key to be used for decryption.
    * @return A CompletableFuture that, when completed, will contain the decrypted
data as a String.
    *         If an error occurs during the decryption process, the
CompletableFuture will complete
    *         exceptionally with the error, and the method will return an empty
String.
    */
   public CompletableFuture<String> decryptDataAsync(SdkBytes encryptedData, String
keyId) {
       DecryptRequest decryptRequest = DecryptRequest.builder()
           .ciphertextBlob(encryptedData)
           .keyId(keyId)
           .build();

       CompletableFuture<DecryptResponse> responseFuture =
getAsyncClient().decrypt(decryptRequest);
       responseFuture.whenComplete((decryptResponse, exception) -> {
           if (exception == null) {
               logger.info("Data decrypted successfully for key ID: " + keyId);
           } else {
               if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while decrypting
data: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
decrypting data: " + exception.getMessage(), exception);
               }
           }
       });
```

```
        return responseFuture.thenApply(decryptResponse ->
decryptResponse.plaintext().asString(StandardCharsets.UTF_8));
    }
```

- Untuk detail API, lihat Mendekripsi di Referensi AWS SDK for Java 2.x API.

### `DeleteAlias`

Contoh kode berikut menunjukkan cara menggunakan`DeleteAlias`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a specific KMS alias asynchronously.
     *
     * @param aliasName the name of the alias to be deleted
     * @return a {@link CompletableFuture} representing the asynchronous operation
of deleting the specified alias
     */
    public CompletableFuture<Void> deleteSpecificAliasAsync(String aliasName) {
        DeleteAliasRequest deleteAliasRequest = DeleteAliasRequest.builder()
            .aliasName(aliasName)
            .build();

        return getAsyncClient().deleteAlias(deleteAliasRequest)
            .thenRun(() -> {
                logger.info("Alias {} has been deleted successfully", aliasName);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to delete alias: " + aliasName,
throwable);
            });
    }
```

- Untuk detail API, lihat DeleteAliasdi Referensi AWS SDK for Java 2.x API.

### `DescribeKey`

Contoh kode berikut menunjukkan cara menggunakan`DescribeKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously checks if a specified key is enabled.
    *
    * @param keyId the ID of the key to check
    * @return a {@link CompletableFuture} that, when completed, indicates whether
the key is enabled or not
    *
    * @throws RuntimeException if an exception occurs while checking the key state
    */
   public CompletableFuture<Boolean> isKeyEnabledAsync(String keyId) {
       DescribeKeyRequest keyRequest = DescribeKeyRequest.builder()
           .keyId(keyId)
           .build();

       CompletableFuture<DescribeKeyResponse> responseFuture =
getAsyncClient().describeKey(keyRequest);
       return responseFuture.whenComplete((resp, ex) -> {
           if (resp != null) {
               KeyState keyState = resp.keyMetadata().keyState();
               if (keyState == KeyState.ENABLED) {
                   logger.info("The key is enabled.");
               } else {
                   logger.info("The key is not enabled. Key state: {}", keyState);
               }
           } else {
```

```
                throw new RuntimeException(ex);
            }
        }).thenApply(resp -> resp.keyMetadata().keyState() == KeyState.ENABLED);
    }
```

- Untuk detail API, lihat DescribeKeydi Referensi AWS SDK for Java 2.x API.

### `DisableKey`

Contoh kode berikut menunjukkan cara menggunakan`DisableKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously disables the specified AWS Key Management Service (KMS) key.
     *
     * @param keyId the ID or Amazon Resource Name (ARN) of the KMS key to be
disabled
     * @return a CompletableFuture that, when completed, indicates that the key has
been disabled successfully
     */
    public CompletableFuture<Void> disableKeyAsync(String keyId) {
        DisableKeyRequest keyRequest = DisableKeyRequest.builder()
            .keyId(keyId)
            .build();

        return getAsyncClient().disableKey(keyRequest)
            .thenRun(() -> {
                logger.info("Key {} has been disabled successfully",keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to disable key: " + keyId,
throwable);
            });
```

```
    }
```

- Untuk detail API, lihat DisableKeydi Referensi AWS SDK for Java 2.x API.

### `EnableKey`

Contoh kode berikut menunjukkan cara menggunakan`EnableKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously enables the specified key.
    *
    * @param keyId the ID of the key to enable
    * @return a {@link CompletableFuture} that completes when the key has been
enabled
    */
   public CompletableFuture<Void> enableKeyAsync(String keyId) {
       EnableKeyRequest enableKeyRequest = EnableKeyRequest.builder()
           .keyId(keyId)
           .build();

       CompletableFuture<EnableKeyResponse> responseFuture =
getAsyncClient().enableKey(enableKeyRequest);
       responseFuture.whenComplete((response, exception) -> {
           if (exception == null) {
               logger.info("Key with ID [{}] has been enabled.", keyId);
           } else {
               if (exception instanceof KmsException kmsEx) {
                   throw new RuntimeException("KMS error occurred while enabling
key: " + kmsEx.getMessage(), kmsEx);
               } else {
                   throw new RuntimeException("An unexpected error occurred while
enabling key: " + exception.getMessage(), exception);
               }
```

```
            }
        });

        return responseFuture.thenApply(response -> null);
    }
```

- Untuk detail API, lihat EnableKeydi Referensi AWS SDK for Java 2.x API.

### `Encrypt`

Contoh kode berikut menunjukkan cara menggunakan`Encrypt`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Encrypts the given text asynchronously using the specified KMS client and key
ID.
     *
     * @param keyId the ID of the KMS key to use for encryption
     * @param text the text to encrypt
     * @return a CompletableFuture that completes with the encrypted data as an
SdkBytes object
     */
    public CompletableFuture<SdkBytes> encryptDataAsync(String keyId, String text) {
        SdkBytes myBytes = SdkBytes.fromUtf8String(text);
        EncryptRequest encryptRequest = EncryptRequest.builder()
            .keyId(keyId)
            .plaintext(myBytes)
            .build();

        CompletableFuture<EncryptResponse> responseFuture =
getAsyncClient().encrypt(encryptRequest).toCompletableFuture();
        return responseFuture.whenComplete((response, ex) -> {
            if (response != null) {
                String algorithm = response.encryptionAlgorithm().toString();
```

```
                logger.info("The string was encrypted with algorithm {}.",
algorithm);
            } else {
                throw new RuntimeException(ex);
            }
        }).thenApply(EncryptResponse::ciphertextBlob);
    }
```

- Untuk detail API, lihat Enkripsi di Referensi AWS SDK for Java 2.x API.

### `ListAliases`

Contoh kode berikut menunjukkan cara menggunakan`ListAliases`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously lists all the aliases in the current AWS account.
     *
     * @return a {@link CompletableFuture} that completes when the list of aliases
has been processed
     */
    public CompletableFuture<Object> listAllAliasesAsync() {
        ListAliasesRequest aliasesRequest = ListAliasesRequest.builder()
            .limit(15)
            .build();

        ListAliasesPublisher paginator =
getAsyncClient().listAliasesPaginator(aliasesRequest);
        return paginator.subscribe(response -> {
                response.aliases().forEach(alias ->
                    logger.info("The alias name is: " + alias.aliasName())
                );
            })
            .thenApply(v -> null)
```

```
            .exceptionally(ex -> {
                if (ex.getCause() instanceof KmsException) {
                    KmsException e = (KmsException) ex.getCause();
                    throw new RuntimeException("A KMS exception occurred: " +
e.getMessage());
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
ex.getMessage());
                }
            });
    }
```

- Untuk detail API, lihat ListAliasesdi Referensi AWS SDK for Java 2.x API.

### `ListGrants`

Contoh kode berikut menunjukkan cara menggunakan`ListGrants`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously displays the grant IDs for the specified key ID.
     *
     * @param keyId the ID of the AWS KMS key for which to list the grants
     * @return a {@link CompletableFuture} that, when completed, will be null if
the operation succeeded, or will throw a {@link RuntimeException} if the operation
failed
     * @throws RuntimeException if there was an error listing the grants, either due
to an {@link KmsException} or an unexpected error
     */
    public CompletableFuture<Object> displayGrantIdsAsync(String keyId) {
        ListGrantsRequest grantsRequest = ListGrantsRequest.builder()
            .keyId(keyId)
            .limit(15)
            .build();
```

```
        ListGrantsPublisher paginator =
getAsyncClient().listGrantsPaginator(grantsRequest);
        return paginator.subscribe(response -> {
                response.grants().forEach(grant -> {
                    logger.info("The grant Id is: " + grant.grantId());
                });
            })
            .thenApply(v -> null)
            .exceptionally(ex -> {
                Throwable cause = ex.getCause();
                if (cause instanceof KmsException) {
                    throw new RuntimeException("Failed to list grants: " +
cause.getMessage(), cause);
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
cause.getMessage(), cause);
                }
            });
    }
```

- Untuk detail API, lihat ListGrantsdi Referensi AWS SDK for Java 2.x API.

### `ListKeyPolicies`

Contoh kode berikut menunjukkan cara menggunakan`ListKeyPolicies`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously retrieves the key policy for the specified key ID and policy
name.
     *
     * @param keyId       the ID of the AWS KMS key for which to retrieve the policy
     * @param policyName the name of the key policy to retrieve
```

```
     * @return a {@link CompletableFuture} that, when completed, contains the key
 policy as a {@link String}
     */
    public CompletableFuture<String> getKeyPolicyAsync(String keyId, String
 policyName) {
        GetKeyPolicyRequest policyRequest = GetKeyPolicyRequest.builder()
            .keyId(keyId)
            .policyName(policyName)
            .build();

        return getAsyncClient().getKeyPolicy(policyRequest)
            .thenApply(response -> {
                String policy = response.policy();
                logger.info("The response is: " + policy);
                return policy;
            })
            .exceptionally(ex -> {
                throw new RuntimeException("Failed to get key policy", ex);
            });
    }
```

- Untuk detail API, lihat ListKeyPoliciesdi Referensi AWS SDK for Java 2.x API.

### `ListKeys`

Contoh kode berikut menunjukkan cara menggunakan`ListKeys`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.kms.KmsAsyncClient;
import software.amazon.awssdk.services.kms.model.ListKeysRequest;
import software.amazon.awssdk.services.kms.paginators.ListKeysPublisher;
import java.util.concurrent.CompletableFuture;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloKMS {
    public static void main(String[] args) {
        listAllKeys();
    }

    public static void listAllKeys() {
        KmsAsyncClient kmsAsyncClient = KmsAsyncClient.builder()
            .build();
        ListKeysRequest listKeysRequest = ListKeysRequest.builder()
            .limit(15)
            .build();

        /*
         * The `subscribe` method is required when using paginator methods in the
 AWS SDK
         * because paginator methods return an instance of a `ListKeysPublisher`,
 which is
         * based on a reactive stream. This allows asynchronous retrieval of
 paginated
         * results as they become available. By subscribing to the stream, we can
 process
         * each page of results as they are emitted.
         */
        ListKeysPublisher keysPublisher =
 kmsAsyncClient.listKeysPaginator(listKeysRequest);
        CompletableFuture<Void> future = keysPublisher
            .subscribe(r -> r.keys().forEach(key ->
                System.out.println("The key ARN is: " + key.keyArn() + ". The key Id
 is: " + key.keyId())))
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    System.err.println("Error occurred: " + exception.getMessage());
                } else {
                    System.out.println("Successfully listed all keys.");
                }
            });
```

```
        try {
            future.join();
        } catch (Exception e) {
            System.err.println("Failed to list keys: " + e.getMessage());
        }
    }
}
```

- Untuk detail API, lihat ListKeysdi Referensi AWS SDK for Java 2.x API.

### `RevokeGrant`

Contoh kode berikut menunjukkan cara menggunakan`RevokeGrant`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Revokes a grant for the specified AWS KMS key asynchronously.
    *
    * @param keyId   The ID or key ARN of the AWS KMS key.
    * @param grantId The identifier of the grant to be revoked.
    * @return A {@link CompletableFuture} representing the asynchronous operation
of revoking the grant.
    *         The {@link CompletableFuture} will complete with a {@link
RevokeGrantResponse} object
    *         if the operation is successful, or with a {@code null} value if an
error occurs.
    */
   public CompletableFuture<RevokeGrantResponse> revokeKeyGrantAsync(String keyId,
String grantId) {
       RevokeGrantRequest grantRequest = RevokeGrantRequest.builder()
           .keyId(keyId)
           .grantId(grantId)
           .build();
```

```
        CompletableFuture<RevokeGrantResponse> responseFuture =
getAsyncClient().revokeGrant(grantRequest);
        responseFuture.whenComplete((response, exception) -> {
            if (exception == null) {
                logger.info("Grant ID: [" + grantId + "] was successfully
revoked!");
            } else {
                if (exception instanceof KmsException kmsEx) {
                    if (kmsEx.getMessage().contains("Grant does not exist")) {
                        logger.info("The grant ID '" + grantId + "' does not exist.
Moving on...");
                    } else {
                        throw new RuntimeException("KMS error occurred: " +
kmsEx.getMessage(), kmsEx);
                    }
                } else {
                    throw new RuntimeException("An unexpected error occurred: " +
exception.getMessage(), exception);
                }
            }
        });

        return responseFuture;
    }
```

- Untuk detail API, lihat RevokeGrantdi Referensi AWS SDK for Java 2.x API.

### `ScheduleKeyDeletion`

Contoh kode berikut menunjukkan cara menggunakan`ScheduleKeyDeletion`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
    * Deletes a KMS key asynchronously.
    *
    * <p><strong>Warning:</strong> Deleting a KMS key is a destructive and
potentially dangerous operation.
    * When a KMS key is deleted, all data that was encrypted under the KMS key
becomes unrecoverable.
    * This means that any files, databases, or other data that were encrypted using
the deleted KMS key
    * will become permanently inaccessible. Exercise extreme caution when deleting
KMS keys.</p>
    *
    * @param keyId the ID of the KMS key to delete
    * @return a {@link CompletableFuture} that completes when the key deletion is
scheduled
    */
   public CompletableFuture<Void> deleteKeyAsync(String keyId) {
       ScheduleKeyDeletionRequest deletionRequest =
ScheduleKeyDeletionRequest.builder()
           .keyId(keyId)
           .pendingWindowInDays(7)
           .build();

       return getAsyncClient().scheduleKeyDeletion(deletionRequest)
           .thenRun(() -> {
               logger.info("Key {} will be deleted in 7 days", keyId);
           })
           .exceptionally(throwable -> {
               throw new RuntimeException("Failed to schedule key deletion for key
ID: " + keyId, throwable);
           });
   }
```

- Untuk detail API, lihat ScheduleKeyDeletiondi Referensi AWS SDK for Java 2.x API.

### `Sign`

Contoh kode berikut menunjukkan cara menggunakan`Sign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously signs and verifies data using AWS KMS.
     *
     * <p>The method performs the following steps:
     * <ol>
     *     <li>Creates an AWS KMS key with the specified key spec, key usage, and
 origin.</li>
     *     <li>Signs the provided message using the created KMS key and the RSASSA-
PSS-SHA-256 algorithm.</li>
     *     <li>Verifies the signature of the message using the created KMS key and
 the RSASSA-PSS-SHA-256 algorithm.</li>
     * </ol>
     *
     * @return a {@link CompletableFuture} that completes with the result of the
 signature verification,
     *         {@code true} if the signature is valid, {@code false} otherwise.
     * @throws KmsException if any error occurs during the KMS operations.
     * @throws RuntimeException if an unexpected error occurs.
     */
    public CompletableFuture<Boolean> signVerifyDataAsync() {
        String signMessage = "Here is the message that will be digitally signed";

        // Create an AWS KMS key used to digitally sign data.
        CreateKeyRequest createKeyRequest = CreateKeyRequest.builder()
            .keySpec(KeySpec.RSA_2048)
            .keyUsage(KeyUsageType.SIGN_VERIFY)
            .origin(OriginType.AWS_KMS)
            .build();

        return getAsyncClient().createKey(createKeyRequest)
            .thenCompose(createKeyResponse -> {
                String keyId = createKeyResponse.keyMetadata().keyId();
```

```
                SdkBytes messageBytes = SdkBytes.fromString(signMessage,
Charset.defaultCharset());
                SignRequest signRequest = SignRequest.builder()
                    .keyId(keyId)
                    .message(messageBytes)
                    .signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                    .build();

                return getAsyncClient().sign(signRequest)
                    .thenCompose(signResponse -> {
                        byte[] signedBytes = signResponse.signature().asByteArray();

                        VerifyRequest verifyRequest = VerifyRequest.builder()
                            .keyId(keyId)

.message(SdkBytes.fromByteArray(signMessage.getBytes(Charset.defaultCharset())))

.signature(SdkBytes.fromByteBuffer(ByteBuffer.wrap(signedBytes)))

.signingAlgorithm(SigningAlgorithmSpec.RSASSA_PSS_SHA_256)
                            .build();

                        return getAsyncClient().verify(verifyRequest)
                            .thenApply(verifyResponse -> {
                                return (boolean) verifyResponse.signatureValid();
                            });
                    });
            })
            .exceptionally(throwable -> {
               throw new RuntimeException("Failed to sign or verify data",
throwable);
            });
   }
```

- Untuk detail API, lihat Referensi AWS SDK for Java 2.x API Masuk.

### `TagResource`

Contoh kode berikut menunjukkan cara menggunakan`TagResource`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously tags a KMS key with a specific tag.
     *
     * @param keyId the ID of the KMS key to be tagged
     * @return a {@link CompletableFuture} that completes when the tagging operation
is finished
     */
    public CompletableFuture<Void> tagKMSKeyAsync(String keyId) {
        Tag tag = Tag.builder()
            .tagKey("Environment")
            .tagValue("Production")
            .build();

        TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
            .keyId(keyId)
            .tags(tag)
            .build();

        return getAsyncClient().tagResource(tagResourceRequest)
            .thenRun(() -> {
                logger.info("{} key was tagged", keyId);
            })
            .exceptionally(throwable -> {
                throw new RuntimeException("Failed to tag the KMS key", throwable);
            });
    }
```

- Untuk detail API, lihat TagResourcedi Referensi AWS SDK for Java 2.x API.

# Contoh Lambda menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Lambda AWS SDK for Java 2.x with.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

AWS kontribusi komunitas adalah contoh yang dibuat dan dikelola oleh banyak tim AWS. Untuk memberikan umpan balik, gunakan mekanisme yang disediakan di repositori terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario
- Contoh nirserver
- AWS kontribusi komunitas


## Memulai

### Halo Lambda

Contoh kode berikut menunjukkan cara memulai menggunakan Lambda.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Lists the AWS Lambda functions associated with the current AWS account.
     *
     * @param awsLambda an instance of the {@link LambdaClient} class, which is used
to interact with the AWS Lambda service
     *
     * @throws LambdaException if an error occurs while interacting with the AWS
Lambda service
     */
    public static void listFunctions(LambdaClient awsLambda) {
        try {
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();
            for (FunctionConfiguration config : list) {
                System.out.println("The function name is " + config.functionName());
            }

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListFunctionsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat peran IAM dan fungsi Lambda, lalu unggah kode handler.

- Panggil fungsi dengan satu parameter dan dapatkan hasil.
- Perbarui kode fungsi dan konfigurasikan dengan variabel lingkungan.
- Panggil fungsi dengan parameter baru dan dapatkan hasil. Tampilkan log eksekusi yang dikembalikan.
- Buat daftar fungsi untuk akun Anda, lalu bersihkan sumber daya.

Untuk informasi selengkapnya, lihat Membuat fungsi Lambda dengan konsol.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/*
 *  Lambda function names appear as:
 *
 *  arn:aws:lambda:us-west-2:335556666777:function:HelloFunction
 *
 *  To find this value, look at the function in the AWS Management Console.
 *
 *  Before running this Java code example, set up your development environment,
including your credentials.
 *
 *  For more information, see this documentation topic:
 *
 *  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 *  This example performs the following tasks:
 *
 * 1. Creates an AWS Lambda function.
 * 2. Gets a specific AWS Lambda function.
 * 3. Lists all Lambda functions.
 * 4. Invokes a Lambda function.
 * 5. Updates the Lambda function code and invokes it again.
 * 6. Updates a Lambda function's configuration value.
 * 7. Deletes a Lambda function.
 */
```

```
public class LambdaScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = """

            Usage:
                <functionName> <role> <handler> <bucketName> <key>\s

            Where:
                functionName - The name of the Lambda function.\s
                role - The AWS Identity and Access Management (IAM) service role
 that has Lambda permissions.\s
                handler - The fully qualified method name (for example,
 example.Handler::handleRequest).\s
                bucketName - The Amazon Simple Storage Service (Amazon S3) bucket
 name that contains the .zip or .jar used to update the Lambda function's code.\s
                key - The Amazon S3 key name that represents the .zip or .jar (for
 example, LambdaHello-1.0-SNAPSHOT.jar).
                """;

       if (args.length != 5) {
             System.out.println(usage);
             return;
       }

       String functionName = args[0];
       String role = args[1];
       String handler = args[2];
       String bucketName = args[3];
       String key = args[4];
       LambdaClient awsLambda = LambdaClient.builder()
           .build();

       System.out.println(DASHES);
       System.out.println("Welcome to the AWS Lambda Basics scenario.");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("1. Create an AWS Lambda function.");
       String funArn = createLambdaFunction(awsLambda, functionName, key,
 bucketName, role, handler);
       System.out.println("The AWS Lambda ARN is " + funArn);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Get the " + functionName + " AWS Lambda function.");
        getFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. List all AWS Lambda functions.");
        listFunctions(awsLambda);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Invoke the Lambda function.");
        System.out.println("*** Sleep for 1 min to get Lambda function ready.");
        Thread.sleep(60000);
        invokeFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Update the Lambda function code and invoke it
again.");
        updateFunctionCode(awsLambda, functionName, bucketName, key);
        System.out.println("*** Sleep for 1 min to get Lambda function ready.");
        Thread.sleep(60000);
        invokeFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Update a Lambda function's configuration value.");
        updateFunctionConfiguration(awsLambda, functionName, handler);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the AWS Lambda function.");
        LambdaScenario.deleteLambdaFunction(awsLambda, functionName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS Lambda scenario completed successfully");
        System.out.println(DASHES);
        awsLambda.close();
    }
```

```
    /**
     * Creates a new Lambda function in AWS using the AWS Lambda Java API.
     *
     * @param awsLambda    the AWS Lambda client used to interact with the AWS
Lambda service
     * @param functionName the name of the Lambda function to create
     * @param key          the S3 key of the function code
     * @param bucketName   the name of the S3 bucket containing the function code
     * @param role         the IAM role to assign to the Lambda function
     * @param handler      the fully qualified class name of the function handler
     * @return the Amazon Resource Name (ARN) of the created Lambda function
     */
    public static String createLambdaFunction(LambdaClient awsLambda,
                                               String functionName,
                                               String key,
                                               String bucketName,
                                               String role,
                                               String handler) {

        try {
            LambdaWaiter waiter = awsLambda.waiter();
            FunctionCode code = FunctionCode.builder()
                .s3Key(key)
                .s3Bucket(bucketName)
                .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                .functionName(functionName)
                .description("Created by the Lambda Java API")
                .code(code)
                .handler(handler)
                .runtime(Runtime.JAVA17)
                .role(role)
                .build();

            // Create a Lambda function using a waiter
            CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
            GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();
            WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
```

```
            return functionResponse.functionArn();

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    /**
     * Retrieves information about an AWS Lambda function.
     *
     * @param awsLambda    an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
     * @param functionName the name of the AWS Lambda function to retrieve
information about
     */
    public static void getFunction(LambdaClient awsLambda, String functionName) {
        try {
            GetFunctionRequest functionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();

            GetFunctionResponse response = awsLambda.getFunction(functionRequest);
            System.out.println("The runtime of this Lambda function is " +
response.configuration().runtime());

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Lists the AWS Lambda functions associated with the current AWS account.
     *
     * @param awsLambda an instance of the {@link LambdaClient} class, which is used
to interact with the AWS Lambda service
     *
     * @throws LambdaException if an error occurs while interacting with the AWS
Lambda service
     */
    public static void listFunctions(LambdaClient awsLambda) {
        try {
```

```
            ListFunctionsResponse functionResult = awsLambda.listFunctions();
            List<FunctionConfiguration> list = functionResult.functions();
            for (FunctionConfiguration config : list) {
                System.out.println("The function name is " + config.functionName());
            }

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Invokes a specific AWS Lambda function.
     *
     * @param awsLambda    an instance of {@link LambdaClient} to interact with the
AWS Lambda service
     * @param functionName the name of the AWS Lambda function to be invoked
     */
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {
        InvokeResponse res;
        try {
            // Need a SdkBytes instance for the payload.
            JSONObject jsonObj = new JSONObject();
            jsonObj.put("inputValue", "2000");
            String json = jsonObj.toString();
            SdkBytes payload = SdkBytes.fromUtf8String(json);

            InvokeRequest request = InvokeRequest.builder()
                .functionName(functionName)
                .payload(payload)
                .build();

            res = awsLambda.invoke(request);
            String value = res.payload().asUtf8String();
            System.out.println(value);

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
```

```
    * Updates the code for an AWS Lambda function.
    *
    * @param awsLambda  the AWS Lambda client
    * @param functionName the name of the Lambda function to update
    * @param bucketName the name of the S3 bucket where the function code is
located
    * @param key the key (file name) of the function code in the S3 bucket
    * @throws LambdaException if there is an error updating the function code
    */
   public static void updateFunctionCode(LambdaClient awsLambda, String
functionName, String bucketName, String key) {
       try {
           LambdaWaiter waiter = awsLambda.waiter();
           UpdateFunctionCodeRequest functionCodeRequest =
UpdateFunctionCodeRequest.builder()
                .functionName(functionName)
                .publish(true)
                .s3Bucket(bucketName)
                .s3Key(key)
                .build();

           UpdateFunctionCodeResponse response =
awsLambda.updateFunctionCode(functionCodeRequest);
           GetFunctionConfigurationRequest getFunctionConfigRequest =
GetFunctionConfigurationRequest.builder()
                .functionName(functionName)
                .build();

           WaiterResponse<GetFunctionConfigurationResponse> waiterResponse = waiter
                .waitUntilFunctionUpdated(getFunctionConfigRequest);
           waiterResponse.matched().response().ifPresent(System.out::println);
           System.out.println("The last modified value is " +
response.lastModified());

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Updates the configuration of an AWS Lambda function.
    *
```

```
    * @param awsLambda     the {@link LambdaClient} instance to use for the AWS
Lambda operation
    * @param functionName  the name of the AWS Lambda function to update
    * @param handler       the new handler for the AWS Lambda function
    *
    * @throws LambdaException if there is an error while updating the function
configuration
    */
   public static void updateFunctionConfiguration(LambdaClient awsLambda, String
functionName, String handler) {
       try {
           UpdateFunctionConfigurationRequest configurationRequest =
UpdateFunctionConfigurationRequest.builder()
               .functionName(functionName)
               .handler(handler)
               .runtime(Runtime.JAVA17)
               .build();

           awsLambda.updateFunctionConfiguration(configurationRequest);

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Deletes an AWS Lambda function.
    *
    * @param awsLambda     an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
    * @param functionName  the name of the Lambda function to be deleted
    *
    * @throws LambdaException if an error occurs while deleting the Lambda function
    */
   public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
       try {
           DeleteFunctionRequest request = DeleteFunctionRequest.builder()
               .functionName(functionName)
               .build();

           awsLambda.deleteFunction(request);
           System.out.println("The " + functionName + " function was deleted");
```

```
        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateFunction
  - DeleteFunction
  - GetFunction
  - Memohon
  - ListFunctions
  - UpdateFunctionCode
  - UpdateFunctionConfiguration

## Tindakan

### `CreateFunction`

Contoh kode berikut menunjukkan cara menggunakan`CreateFunction`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new Lambda function in AWS using the AWS Lambda Java API.
     *
     * @param awsLambda    the AWS Lambda client used to interact with the AWS
Lambda service
     * @param functionName the name of the Lambda function to create
```

```
     * @param key          the S3 key of the function code
     * @param bucketName   the name of the S3 bucket containing the function code
     * @param role         the IAM role to assign to the Lambda function
     * @param handler      the fully qualified class name of the function handler
     * @return the Amazon Resource Name (ARN) of the created Lambda function
     */
    public static String createLambdaFunction(LambdaClient awsLambda,
                                               String functionName,
                                               String key,
                                               String bucketName,
                                               String role,
                                               String handler) {

        try {
            LambdaWaiter waiter = awsLambda.waiter();
            FunctionCode code = FunctionCode.builder()
                .s3Key(key)
                .s3Bucket(bucketName)
                .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
                .functionName(functionName)
                .description("Created by the Lambda Java API")
                .code(code)
                .handler(handler)
                .runtime(Runtime.JAVA17)
                .role(role)
                .build();

            // Create a Lambda function using a waiter
            CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
            GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
                .functionName(functionName)
                .build();
            WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            return functionResponse.functionArn();

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
        return "";
    }
```

- Untuk detail API, lihat CreateFunctiondi Referensi AWS SDK for Java 2.x API.

### `DeleteFunction`

Contoh kode berikut menunjukkan cara menggunakan`DeleteFunction`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an AWS Lambda function.
     *
     * @param awsLambda     an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
     * @param functionName  the name of the Lambda function to be deleted
     *
     * @throws LambdaException if an error occurs while deleting the Lambda function
     */
    public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
        try {
            DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                .functionName(functionName)
                .build();

            awsLambda.deleteFunction(request);
            System.out.println("The " + functionName + " function was deleted");

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }
```

- Untuk detail API, lihat DeleteFunctiondi Referensi AWS SDK for Java 2.x API.

### `GetFunction`

Contoh kode berikut menunjukkan cara menggunakan`GetFunction`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Retrieves information about an AWS Lambda function.
    *
    * @param awsLambda    an instance of the {@link LambdaClient} class, which is
used to interact with the AWS Lambda service
    * @param functionName the name of the AWS Lambda function to retrieve
information about
    */
   public static void getFunction(LambdaClient awsLambda, String functionName) {
       try {
           GetFunctionRequest functionRequest = GetFunctionRequest.builder()
               .functionName(functionName)
               .build();

           GetFunctionResponse response = awsLambda.getFunction(functionRequest);
           System.out.println("The runtime of this Lambda function is " +
response.configuration().runtime());

       } catch (LambdaException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetFunctiondi Referensi AWS SDK for Java 2.x API.

### `Invoke`

Contoh kode berikut menunjukkan cara menggunakan`Invoke`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Invokes a specific AWS Lambda function.
     *
     * @param awsLambda    an instance of {@link LambdaClient} to interact with the
AWS Lambda service
     * @param functionName the name of the AWS Lambda function to be invoked
     */
    public static void invokeFunction(LambdaClient awsLambda, String functionName) {
        InvokeResponse res;
        try {
            // Need a SdkBytes instance for the payload.
            JSONObject jsonObj = new JSONObject();
            jsonObj.put("inputValue", "2000");
            String json = jsonObj.toString();
            SdkBytes payload = SdkBytes.fromUtf8String(json);

            InvokeRequest request = InvokeRequest.builder()
                .functionName(functionName)
                .payload(payload)
                .build();

            res = awsLambda.invoke(request);
            String value = res.payload().asUtf8String();
            System.out.println(value);

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
```

- Untuk detail API, lihat Memanggil di Referensi AWS SDK for Java 2.x API.

### `UpdateFunctionCode`

Contoh kode berikut menunjukkan cara menggunakan`UpdateFunctionCode`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Updates the code for an AWS Lambda function.
     *
     * @param awsLambda  the AWS Lambda client
     * @param functionName the name of the Lambda function to update
     * @param bucketName the name of the S3 bucket where the function code is
located
     * @param key the key (file name) of the function code in the S3 bucket
     * @throws LambdaException if there is an error updating the function code
     */
    public static void updateFunctionCode(LambdaClient awsLambda, String
functionName, String bucketName, String key) {
        try {
            LambdaWaiter waiter = awsLambda.waiter();
            UpdateFunctionCodeRequest functionCodeRequest =
UpdateFunctionCodeRequest.builder()
                .functionName(functionName)
                .publish(true)
                .s3Bucket(bucketName)
                .s3Key(key)
                .build();

            UpdateFunctionCodeResponse response =
awsLambda.updateFunctionCode(functionCodeRequest);
```

```
            GetFunctionConfigurationRequest getFunctionConfigRequest =
GetFunctionConfigurationRequest.builder()
                .functionName(functionName)
                .build();

            WaiterResponse<GetFunctionConfigurationResponse> waiterResponse = waiter
                .waitUntilFunctionUpdated(getFunctionConfigRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("The last modified value is " +
response.lastModified());

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat UpdateFunctionCodedi Referensi AWS SDK for Java 2.x API.

### `UpdateFunctionConfiguration`

Contoh kode berikut menunjukkan cara menggunakan`UpdateFunctionConfiguration`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Updates the configuration of an AWS Lambda function.
     *
     * @param awsLambda     the {@link LambdaClient} instance to use for the AWS
Lambda operation
     * @param functionName  the name of the AWS Lambda function to update
     * @param handler       the new handler for the AWS Lambda function
     *
     * @throws LambdaException if there is an error while updating the function
configuration
```

```
     */
    public static void updateFunctionConfiguration(LambdaClient awsLambda, String
functionName, String handler) {
        try {
            UpdateFunctionConfigurationRequest configurationRequest =
UpdateFunctionConfigurationRequest.builder()
                .functionName(functionName)
                .handler(handler)
                .runtime(Runtime.JAVA17)
                .build();

            awsLambda.updateFunctionConfiguration(configurationRequest);

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat UpdateFunctionConfigurationdi Referensi AWS SDK for Java 2.x API.

## Skenario

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB

- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

### Buat aplikasi untuk menganalisis umpan balik pelanggan

Contoh kode berikut menunjukkan cara membuat aplikasi yang menganalisis kartu komentar pelanggan, menerjemahkannya dari bahasa aslinya, menentukan sentimen mereka, dan menghasilkan file audio dari teks yang diterjemahkan.

SDK untuk Java 2.x

Aplikasi contoh ini menganalisis dan menyimpan kartu umpan balik pelanggan. Secara khusus, ini memenuhi kebutuhan hotel fiktif di New York City. Hotel menerima umpan balik dari para tamu dalam berbagai bahasa dalam bentuk kartu komentar fisik. Umpan balik itu diunggah ke aplikasi melalui klien web. Setelah gambar kartu komentar diunggah, langkah-langkah berikut terjadi:

- Teks diekstraksi dari gambar menggunakan Amazon Textract.
- Amazon Comprehend menentukan sentimen teks yang diekstraksi dan bahasanya.
- Teks yang diekstraksi diterjemahkan ke bahasa Inggris menggunakan Amazon Translate.
- Amazon Polly mensintesis file audio dari teks yang diekstraksi.

Aplikasi lengkap dapat digunakan dengan. AWS CDK Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

### Menggunakan API Gateway untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh Amazon API Gateway.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi dengan menggunakan Lambda Java runtime API. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat fungsi Lambda yang diinvokasi oleh Amazon API Gateway yang memindai peringatan hari jadi kerja di tabel Amazon DynamoDB dan menggunakan Amazon Simple Notification Service (Amazon SNS) untuk mengirim pesan teks berisi ucapan selamat kepada karyawan Anda pada tanggal hari jadi kerja satu tahun mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

Menggunakan Step Functions untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat mesin AWS Step Functions status yang memanggil AWS Lambda fungsi secara berurutan.

SDK untuk Java 2.x

Menunjukkan cara membuat alur kerja AWS tanpa server dengan menggunakan AWS Step Functions dan. AWS SDK for Java 2.x Setiap langkah alur kerja diimplementasikan menggunakan AWS Lambda fungsi.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

Menggunakan peristiwa terjadwal untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh acara EventBridge terjadwal Amazon.

SDK untuk Java 2.x

Menunjukkan cara membuat acara EventBridge terjadwal Amazon yang memanggil AWS Lambda fungsi. Konfigurasikan EventBridge untuk menggunakan ekspresi cron untuk menjadwalkan saat fungsi Lambda dipanggil. Dalam contoh ini, Anda membuat fungsi Lambda menggunakan API runtime Java Lambda. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat aplikasi yang mengirimkan pesan teks seluler kepada karyawan Anda berisi ucapan selamat pada hari jadi setahun kerja mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch Log
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

Gunakan Neptunus API untuk menanyakan data grafik

Contoh kode berikut menunjukkan cara menggunakan Neptunus API untuk query data grafik.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Neptune Java API untuk membuat fungsi Lambda yang menanyakan data grafik dalam VPC.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Lambda
- Neptune

# Contoh nirserver

Menghubungkan ke database Amazon RDS dalam fungsi Lambda

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menghubungkan ke database RDS. Fungsi membuat permintaan database sederhana dan mengembalikan hasilnya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Menghubungkan ke database Amazon RDS dalam fungsi Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyRequestEvent;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyResponseEvent;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rdsdata.RdsDataClient;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementRequest;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.rdsdata.model.Field;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

public class RdsLambdaHandler implements RequestHandler<APIGatewayProxyRequestEvent,
 APIGatewayProxyResponseEvent> {

    @Override
    public APIGatewayProxyResponseEvent handleRequest(APIGatewayProxyRequestEvent
 event, Context context) {
        APIGatewayProxyResponseEvent response = new APIGatewayProxyResponseEvent();

        try {
```

```
            // Obtain auth token
            String token = createAuthToken();

            // Define connection configuration
            String connectionString = String.format("jdbc:mysql://%s:%s/%s?
useSSL=true&requireSSL=true",
                    System.getenv("ProxyHostName"),
                    System.getenv("Port"),
                    System.getenv("DBName"));

            // Establish a connection to the database
            try (Connection connection =
 DriverManager.getConnection(connectionString, System.getenv("DBUserName"), token);
                 PreparedStatement statement = connection.prepareStatement("SELECT ?
 + ? AS sum")) {

                statement.setInt(1, 3);
                statement.setInt(2, 2);

                try (ResultSet resultSet = statement.executeQuery()) {
                    if (resultSet.next()) {
                        int sum = resultSet.getInt("sum");
                        response.setStatusCode(200);
                        response.setBody("The selected sum is: " + sum);
                    }
                }
            }

        } catch (Exception e) {
            response.setStatusCode(500);
            response.setBody("Error: " + e.getMessage());
        }

        return response;
    }

    private String createAuthToken() {
        // Create RDS Data Service client
        RdsDataClient rdsDataClient = RdsDataClient.builder()
                .region(Region.of(System.getenv("AWS_REGION")))
                .credentialsProvider(DefaultCredentialsProvider.create())
                .build();

        // Define authentication request
```

```
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
                .resourceArn(System.getenv("ProxyHostName"))
                .secretArn(System.getenv("DBUserName"))
                .database(System.getenv("DBName"))
                .sql("SELECT 'RDS IAM Authentication'")
                .build();

        // Execute request and obtain authentication token
        ExecuteStatementResponse response = rdsDataClient.executeStatement(request);
        Field tokenField = response.records().get(0).get(0);

        return tokenField.stringValue();
    }
}
```

Memanggil fungsi Lambda dari pemicu Kinesis

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima catatan dari aliran Kinesis. Fungsi mengambil payload Kinesis, mendekode dari Base64, dan mencatat konten rekaman.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara Kinesis dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;
```

```
public class Handler implements RequestHandler<KinesisEvent, Void> {
    @Override
    public Void handleRequest(final KinesisEvent event, final Context context) {
        LambdaLogger logger = context.getLogger();
        if (event.getRecords().isEmpty()) {
            logger.log("Empty Kinesis Event received");
            return null;
        }
        for (KinesisEvent.KinesisEventRecord record : event.getRecords()) {
            try {
                logger.log("Processed Event with EventId: "+record.getEventID());
                String data = new String(record.getKinesis().getData().array());
                logger.log("Data:"+ data);
                // TODO: Do interesting work based on the new data
            }
            catch (Exception ex) {
                logger.log("An error occurred:"+ex.getMessage());
                throw ex;
            }
        }
        logger.log("Successfully processed:"+event.getRecords().size()+" records");
        return null;
    }

}
```

Memanggil fungsi Lambda dari pemicu DynamoDB

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima catatan dari aliran DynamoDB. Fungsi mengambil payload DynamoDB dan mencatat isi catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara DynamoDB dengan Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import
 com.amazonaws.services.lambda.runtime.events.DynamodbEvent.DynamodbStreamRecord;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;

public class example implements RequestHandler<DynamodbEvent, Void> {

    private static final Gson GSON = new GsonBuilder().setPrettyPrinting().create();

    @Override
    public Void handleRequest(DynamodbEvent event, Context context) {
        System.out.println(GSON.toJson(event));
        event.getRecords().forEach(this::logDynamoDBRecord);
        return null;
    }

    private void logDynamoDBRecord(DynamodbStreamRecord record) {
        System.out.println(record.getEventID());
        System.out.println(record.getEventName());
        System.out.println("DynamoDB Record: " + GSON.toJson(record.getDynamodb()));
    }
}
```

Memanggil fungsi Lambda dari pemicu Amazon DocumentDB

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima catatan dari aliran perubahan DocumentDB. Fungsi mengambil payload DocumentDB dan mencatat isi catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara Amazon DocumentDB dengan Lambda menggunakan Java.

```
import java.util.List;
import java.util.Map;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;

public class Example implements RequestHandler<Map<String, Object>, String> {

    @SuppressWarnings("unchecked")
    @Override
    public String handleRequest(Map<String, Object> event, Context context) {
        List<Map<String, Object>> events = (List<Map<String, Object>>)
 event.get("events");
        for (Map<String, Object> record : events) {
            Map<String, Object> eventData = (Map<String, Object>)
 record.get("event");
            processEventData(eventData);
        }

        return "OK";
    }

    @SuppressWarnings("unchecked")
    private void processEventData(Map<String, Object> eventData) {
        String operationType = (String) eventData.get("operationType");
        System.out.println("operationType: %s".formatted(operationType));

        Map<String, Object> ns = (Map<String, Object>) eventData.get("ns");

        String db = (String) ns.get("db");
        System.out.println("db: %s".formatted(db));
        String coll = (String) ns.get("coll");
        System.out.println("coll: %s".formatted(coll));

        Map<String, Object> fullDocument = (Map<String, Object>)
 eventData.get("fullDocument");
        System.out.println("fullDocument: %s".formatted(fullDocument));
    }

}
```

Memanggil fungsi Lambda dari pemicu MSK Amazon

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima catatan dari kluster MSK Amazon. Fungsi mengambil muatan MSK dan mencatat konten catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara MSK Amazon dengan Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent.KafkaEventRecord;

import java.util.Base64;
import java.util.Map;

public class Example implements RequestHandler<KafkaEvent, Void> {

    @Override
    public Void handleRequest(KafkaEvent event, Context context) {
        for (Map.Entry<String, java.util.List<KafkaEventRecord>> entry :
 event.getRecords().entrySet()) {
            String key = entry.getKey();
            System.out.println("Key: " + key);

            for (KafkaEventRecord record : entry.getValue()) {
                System.out.println("Record: " + record);

                byte[] value = Base64.getDecoder().decode(record.getValue());
                String message = new String(value);
                System.out.println("Message: " + message);
            }
        }
```

```
        return null;
    }
}
```

Menginvokasi fungsi Lambda dari pemicu Amazon S3

Contoh kode berikut menunjukkan cara mengimplementasikan fungsi Lambda yang menerima peristiwa yang dipicu dengan mengunggah objek ke bucket S3. Fungsi ini mengambil nama bucket S3 dan kunci objek dari parameter peristiwa dan memanggil Amazon S3 API untuk mengambil dan mencatat jenis konten objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Menggunakan peristiwa S3 dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.S3Client;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.S3Event;
import
 com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification.S3EventNotificat

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Handler implements RequestHandler<S3Event, String> {
```

```
    private static final Logger logger = LoggerFactory.getLogger(Handler.class);
    @Override
    public String handleRequest(S3Event s3event, Context context) {
        try {
          S3EventNotificationRecord record = s3event.getRecords().get(0);
          String srcBucket = record.getS3().getBucket().getName();
          String srcKey = record.getS3().getObject().getUrlDecodedKey();

          S3Client s3Client = S3Client.builder().build();
          HeadObjectResponse headObject = getHeadObject(s3Client, srcBucket,
 srcKey);

          logger.info("Successfully retrieved " + srcBucket + "/" + srcKey + " of
 type " + headObject.contentType());

          return "Ok";
        } catch (Exception e) {
          throw new RuntimeException(e);
        }
    }

    private HeadObjectResponse getHeadObject(S3Client s3Client, String bucket,
 String key) {
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(bucket)
                .key(key)
                .build();
        return s3Client.headObject(headObjectRequest);
    }
}
```

Memanggil fungsi Lambda dari pemicu Amazon SNS

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima pesan dari topik SNS. Fungsi mengambil pesan dari parameter peristiwa dan mencatat konten setiap pesan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara SNS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SNSEvent;
import com.amazonaws.services.lambda.runtime.events.SNSEvent.SNSRecord;


import java.util.Iterator;
import java.util.List;

public class SNSEventHandler implements RequestHandler<SNSEvent, Boolean> {
    LambdaLogger logger;

    @Override
    public Boolean handleRequest(SNSEvent event, Context context) {
        logger = context.getLogger();
        List<SNSRecord> records = event.getRecords();
        if (!records.isEmpty()) {
            Iterator<SNSRecord> recordsIter = records.iterator();
            while (recordsIter.hasNext()) {
                processRecord(recordsIter.next());
            }
        }
        return Boolean.TRUE;
    }

    public void processRecord(SNSRecord record) {
        try {
            String message = record.getSNS().getMessage();
```

```
            logger.log("message: " + message);
        } catch (Exception e) {
            throw new RuntimeException(e);
        }
    }

}
```

Memanggil fungsi Lambda dari pemicu Amazon SQS

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima pesan dari antrian SQS. Fungsi mengambil pesan dari parameter peristiwa dan mencatat konten setiap pesan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara SQS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSEvent.SQSMessage;

public class Function implements RequestHandler<SQSEvent, Void> {
    @Override
    public Void handleRequest(SQSEvent sqsEvent, Context context) {
        for (SQSMessage msg : sqsEvent.getRecords()) {
            processMessage(msg, context);
        }
```

```
        context.getLogger().log("done");
        return null;
    }

    private void processMessage(SQSMessage msg, Context context) {
        try {
            context.getLogger().log("Processed message " + msg.getBody());

            // TODO: Do interesting work based on the new message

        } catch (Exception e) {
            context.getLogger().log("An error occurred");
            throw e;
        }

    }
}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu Kinesis

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari aliran Kinesis. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch Kinesis dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KinesisEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;
```

```
import java.io.Serializable;
import java.util.ArrayList;
import java.util.List;

public class ProcessKinesisRecords implements RequestHandler<KinesisEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(KinesisEvent input, Context context) {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (KinesisEvent.KinesisEventRecord kinesisEventRecord :
 input.getRecords()) {
            try {
                //Process your record
                KinesisEvent.Record kinesisRecord = kinesisEventRecord.getKinesis();
                curRecordSequenceNumber = kinesisRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
                   Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

       return new StreamsEventResponse(batchItemFailures);
    }
}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu DynamoDB

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari aliran DynamoDB. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch DynamoDB dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.DynamodbEvent;
import com.amazonaws.services.lambda.runtime.events.StreamsEventResponse;
import com.amazonaws.services.lambda.runtime.events.models.dynamodb.StreamRecord;

import java.util.ArrayList;
import java.util.List;

public class ProcessDynamodbRecords implements RequestHandler<DynamodbEvent,
 StreamsEventResponse> {

    @Override
    public StreamsEventResponse handleRequest(DynamodbEvent input, Context context)
 {

        List<StreamsEventResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<>();
        String curRecordSequenceNumber = "";

        for (DynamodbEvent.DynamodbStreamRecord dynamodbStreamRecord :
 input.getRecords()) {
          try {
                //Process your record
                StreamRecord dynamodbRecord = dynamodbStreamRecord.getDynamodb();
                curRecordSequenceNumber = dynamodbRecord.getSequenceNumber();

            } catch (Exception e) {
                /* Since we are working with streams, we can return the failed item
 immediately.
```

```
                    Lambda will immediately begin to retry processing from this
 failed item onwards. */
                batchItemFailures.add(new
 StreamsEventResponse.BatchItemFailure(curRecordSequenceNumber));
                return new StreamsEventResponse(batchItemFailures);
            }
        }

        return new StreamsEventResponse();
    }
}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu Amazon SQS

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari antrian SQS. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch SQS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSBatchResponse;

import java.util.ArrayList;
import java.util.List;

public class ProcessSQSMessageBatch implements RequestHandler<SQSEvent,
 SQSBatchResponse> {
```

```
    @Override
    public SQSBatchResponse handleRequest(SQSEvent sqsEvent, Context context) {
         List<SQSBatchResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<SQSBatchResponse.BatchItemFailure>();

         for (SQSEvent.SQSMessage message : sqsEvent.getRecords()) {
             try {
                 //process your message
             } catch (Exception e) {
                 //Add failed message identifier to the batchItemFailures list
                 batchItemFailures.add(new
 SQSBatchResponse.BatchItemFailure(message.getMessageId()));
             }
         }
         return new SQSBatchResponse(batchItemFailures);
     }
}
```

## AWS kontribusi komunitas

Membangun dan menguji aplikasi tanpa server

Contoh kode berikut menunjukkan cara membangun dan menguji aplikasi tanpa server menggunakan API Gateway dengan Lambda dan DynamoDB

SDK untuk Java 2.x

> Menunjukkan cara membangun dan menguji aplikasi tanpa server yang terdiri dari API Gateway dengan Lambda dan DynamoDB menggunakan Java SDK.
>
> Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.
>
> Layanan yang digunakan dalam contoh ini
>
> - API Gateway
> - DynamoDB
> - Lambda

# Contoh Amazon Lex menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon Lex. AWS SDK for Java 2.x

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Skenario


## Skenario

Membangun chatbot Amazon Lex

Contoh kode berikut menunjukkan cara membuat chatbot untuk melibatkan pengunjung situs web Anda.

SDK untuk Java 2.x

> Menunjukkan cara menggunakan Amazon Lex API untuk membuat Chatbot dalam aplikasi web untuk melibatkan pengunjung situs web Anda.
>
> Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.
>
> Layanan yang digunakan dalam contoh ini
>
> - Amazon Comprehend
> - Amazon Lex
> - Amazon Translate

# Contoh Lokasi Amazon menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Lokasi AWS SDK for Java 2.x with Amazon.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Halo Lokasi Amazon

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon Location Service.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you need to create a collection using the AWS Management
 * console. For information, see the following documentation.
 *
 * https://docs.aws.amazon.com/location/latest/developerguide/geofence-gs.html

 */
public class HelloLocation {

    private static LocationAsyncClient locationAsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(HelloLocation.class);

    // This Singleton pattern ensures that only one `LocationClient`
    // instance.
    private static LocationAsyncClient getClient() {
        if (locationAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            locationAsyncClient = LocationAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return locationAsyncClient;
    }

    public static void main(String[] args) {
        final String usage = """
```

```
            Usage:
                <collectionName>

            Where:
                collectionName - The Amazon location collection name.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionName = args[0];
        listGeofences(collectionName);
    }

    /**
     * Lists geofences from a specified geofence collection asynchronously.
     *
     * @param collectionName The name of the geofence collection to list geofences
from.
     * @return A {@link CompletableFuture} representing the result of the
asynchronous operation.
     *         The future completes when all geofences have been processed and
logged.
     */
    public static CompletableFuture<Void> listGeofences(String collectionName) {
        ListGeofencesRequest geofencesRequest = ListGeofencesRequest.builder()
                .collectionName(collectionName)
                .build();

        ListGeofencesPublisher paginator =
getClient().listGeofencesPaginator(geofencesRequest);
        CompletableFuture<Void> future = paginator.subscribe(response -> {
            if (response.entries().isEmpty()) {
                logger.info("No Geofences were found in the collection.");
            } else {
                response.entries().forEach(geofence ->
                        logger.info("Geofence ID: " + geofence.geofenceId())
                );
            }
        });
        return future;
    }
```

```
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - ListGeofenceCollections
  - ListGeofences

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat peta Lokasi Amazon.
- Buat kunci API Lokasi Amazon.
- Tampilkan URL Peta.
- Buat koleksi geofence.
- Simpan geometri geofence.
- Buat sumber daya pelacak.
- Perbarui posisi perangkat.
- Ambil pembaruan posisi terbaru untuk perangkat tertentu.
- Buat kalkulator rute.
- Tentukan jarak antara Seattle dan Vancouver.
- Gunakan Lokasi Amazon tingkat yang lebih tinggi APIs.
- Hapus Aset Lokasi Amazon.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang mendemonstrasikan fitur Amazon Location Service.

```
/*
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class LocationScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(LocationScenario.class);
    static Scanner scanner = new Scanner(System.in);

    static LocationActions locationActions = new LocationActions();

    public static void main(String[] args) {
        final String usage = """

            Usage:    <mapName> <keyName> <collectionName> <geoId> <trackerName>
 <calculatorName> <deviceId>

            Where:
              mapName - The name of the map to be create (e.g., "AWSMap").
              keyName - The name of the API key to create (e.g., "AWSApiKey").
              collectionName - The name of the geofence collection (e.g.,
 "AWSLocationCollection").
              geoId - The geographic identifier used for the geofence or map (e.g.,
 "geoId").
              trackerName - The name of the tracker (e.g., "geoTracker").
              calculatorName - The name of the route calculator (e.g.,
 "AWSRouteCalc").
              deviceId - The ID of the device (e.g., "iPhone-112356").
            """;

        if (args.length != 7) {
            logger.info(usage);
            return;
        }
```

```
        String mapName = args[0];
        String keyName = args[1];
        String collectionName = args[2];
        String geoId = args[3];
        String trackerName = args[4];
        String calculatorName = args[5];
        String deviceId = args[6];

        logger.info("""
            AWS Location Service is a fully managed service offered by Amazon Web
Services (AWS) that
            provides location-based services for developers. This service simplifies
            the integration of location-based features into applications, making it
            easier to build and deploy location-aware applications.

            The AWS Location Service offers a range of location-based services,
            including:

            Maps: The service provides access to high-quality maps, satellite
imagery,\s
            and geospatial data from various providers, allowing developers to\s
            easily embed maps into their applications.

            Tracking: The Location Service enables real-time tracking of mobile
devices,\s
            assets, or other entities, allowing developers to build applications\s
            that can monitor the location of people, vehicles, or other objects.

            Geocoding: The service provides the ability to convert addresses or\s
            location names into geographic coordinates (latitude and longitude),\s
            and vice versa, enabling developers to integrate location-based search\s
            and routing functionality into their applications.
            """);
        waitForInputToContinue(scanner);
        try {
            runScenario(mapName, keyName, collectionName, geoId, trackerName,
calculatorName, deviceId);
        } catch (RuntimeException e) {
            // Clean up AWS Resources.
            cleanUp(mapName, keyName, collectionName, trackerName, calculatorName);
            logger.info(e.getMessage());
        }
    }
```

```
   public static void runScenario(String mapName, String keyName, String
collectionName, String geoId, String trackerName, String calculatorName, String
deviceId) {
       logger.info(DASHES);
       logger.info("1. Create a map");
       logger.info("""
            An AWS Location map can enhance the user experience of your
            application by providing accurate and personalized location-based
            features. For example, you could use the geocoding capabilities to
            allow users to search for and locate businesses, landmarks, or
            other points of interest within a specific region.
           """);

       waitForInputToContinue(scanner);
       String mapArn;
       try {
           mapArn = locationActions.createMap(mapName).join();
           logger.info("The Map ARN is: {}", mapArn);  // Log success in calling
code
       } catch (CompletionException ce) {
           Throwable cause = ce.getCause();
           if (cause instanceof ServiceQuotaExceededException) {
               logger.error("The request exceeded the maximum quota: {}",
cause.getMessage());
           } else {
               logger.error("An unexpected error occurred while creating the map.",
cause);
           }
           return;
       }
       waitForInputToContinue(scanner);
       logger.info(DASHES);

       logger.info(DASHES);
       logger.info("2. Create an AWS Location API key");
       logger.info("""
           When you embed a map in a web app or website, the API key is
           included in the map tile URL to authenticate requests. You can
           restrict API keys to specific AWS Location operations (e.g., only
           maps, not geocoding). API keys can expire, ensuring temporary
           access control.
           """);

       try {
```

```
            String keyArn = locationActions.createKey(keyName, mapArn).join();
            logger.info("The API key was successfully created: {}", keyArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof AccessDeniedException) {
                logger.error("Request was denied: {}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred while creating the API
 key.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Display Map URL");
        logger.info("""
            In order to get the MAP URL, you need to get the API Key value.
            You can get the key value using the AWS Management Console under
            Location Services. This operation cannot be completed using the
            AWS SDK. For more information about getting the key value, see
            the AWS Location Documentation.
            """);
        String mapUrl = "https://maps.geo.aws.amazon.com/maps/v0/maps/"+mapName+"/
tiles/{z}/{x}/{y}?key={KeyValue}";
        logger.info("Embed this URL in your Web app: " + mapUrl);
        logger.info("");
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Create a geofence collection, which manages and stores
 geofences.");
        waitForInputToContinue(scanner);
        try {
            String collectionArn =
 locationActions.createGeofenceCollection(collectionName).join();
            logger.info("The geofence collection was successfully created: {}",
 collectionArn);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("A conflict occurred: {}", cause.getMessage());
```

```
            } else {
                logger.error("An unexpected error occurred while creating the
geofence collection.", cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. Store a geofence geometry in a given geofence collection.");
        logger.info("""
            An AWS Location geofence is a virtual boundary that defines a geographic
area
            on a map. It is a useful feature for tracking the location of
            assets or monitoring the movement of objects within a specific region.

            To define a geofence, you need to specify the coordinates of a
            polygon that represents the area of interest. The polygon must be
            defined in a counter-clockwise direction, meaning that the points of
            the polygon must be listed in a counter-clockwise order.

            This is a requirement for the AWS Location service to correctly
            interpret the geofence and ensure that the location data is
            accurately processed within the defined area.
            """);

        waitForInputToContinue(scanner);
        try {
            locationActions.putGeofence(collectionName, geoId).join();
            logger.info("Successfully created geofence: {}", geoId);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ValidationException) {
                logger.error("A validation error occurred while creating geofence:
{}", cause.getMessage());
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
```

```
        logger.info(DASHES);

        logger.info("6. Create a tracker resource which lets you retrieve current
and historical location of devices..");
        waitForInputToContinue(scanner);
        try {
            String trackerArn = locationActions.createTracker(trackerName).join();
            logger.info("Successfully created tracker. ARN: {}", trackerArn);  //
Log success
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.error("A conflict occurred while creating the tracker: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Update the position of a device in the location tracking
system.");
        logger.info("""
            The AWS location service does not enforce a strict format for deviceId,
but it must:
              - Be a string (case-sensitive).
              - Be 1-100 characters long.
              - Contain only:
                - Alphanumeric characters (A-Z, a-z, 0-9)
                - Underscores (_)
                - Hyphens (-)
                - Be the same ID used when sending and retrieving positions.
            """);

        waitForInputToContinue(scanner);
        try {
            CompletableFuture<BatchUpdateDevicePositionResponse> future =
locationActions.updateDevicePosition(trackerName, deviceId);
            future.join();
```

```
            logger.info(deviceId + " was successfully updated in the location
tracking system.");
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("8. Retrieve the most recent position update for a specified
device..");
        waitForInputToContinue(scanner);
        try {
            GetDevicePositionResponse response =
locationActions.getDevicePosition(trackerName, deviceId).join();
            logger.info("Successfully fetched device position: {}",
response.position());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("9. Create a route calculator.");
        waitForInputToContinue(scanner);
        try {
            CreateRouteCalculatorResponse response =
locationActions.createRouteCalculator(calculatorName).join();
```

```
            logger.info("Route calculator created successfully: {}",
response.calculatorArn());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ConflictException) {
                logger.info("A conflict occurred: {}", cause.getMessage(), cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("10. Determine the distance between Seattle and Vancouver using
the route calculator.");
        waitForInputToContinue(scanner);
        try {
            CalculateRouteResponse response =
locationActions.calcDistanceAsync(calculatorName).join();
            logger.info("Successfully calculated route. The distance in kilometers
is {}", response.summary().distance());
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info("11. Use the GeoPlacesAsyncClient to perform additional
operations.");
        logger.info("""
            This scenario will show use of the GeoPlacesClient that enables
            location search and geocoding capabilities for your applications.\s

            We are going to use this client to perform these AWS Location tasks:
```

```
             - Reverse Geocoding (reverseGeocode): Converts geographic coordinates
into addresses.
             - Place Search (searchText): Finds places based on search queries.
             - Nearby Search (searchNearby): Finds places near a specific location.
            """);

        logger.info("First we will perform a Reverse Geocoding operation");
        waitForInputToContinue(scanner);
        try {
            locationActions.reverseGeocode().join();
            logger.info("Now we are going to perform a text search using coffee
shop.");
            waitForInputToContinue(scanner);
            locationActions.searchText("coffee shop").join();
            waitForInputToContinue(scanner);

            logger.info("Now we are going to perform a nearby Search.");
            //waitForInputToContinue(scanner);
            locationActions.searchNearBy().join();
            waitForInputToContinue(scanner);
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                logger.error("A validation error occurred: {}", cause.getMessage(),
cause);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info("12. Delete the AWS Location Services resources.");
        logger.info("Would you like to delete the AWS Location Services resources?
(y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanUp(mapName, keyName, collectionName, trackerName, calculatorName);
        } else {
            logger.info("The AWS resources will not be deleted.");
        }
        waitForInputToContinue(scanner);
```

```
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info(" This concludes the AWS Location Service scenario.");
        logger.info(DASHES);
    }

    /**
     * Cleans up resources by deleting the specified map, key, geofence collection,
tracker, and route calculator.
     *
     * @param mapName The name of the map to delete.
     * @param keyName The name of the key to delete.
     * @param collectionName The name of the geofence collection to delete.
     * @param trackerName The name of the tracker to delete.
     * @param calculatorName The name of the route calculator to delete.
     */
    private static void cleanUp(String mapName, String keyName, String
collectionName, String trackerName, String calculatorName) {
        try {
            locationActions.deleteMap(mapName).join();
            locationActions.deleteKey(keyName).join();
            locationActions.deleteGeofenceCollectionAsync(collectionName).join();
            locationActions.deleteTracker(trackerName).join();
            locationActions.deleteRouteCalculator(calculatorName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.info("The resource was not found: {}", cause.getMessage(),
cause);
            } else {
                logger.info("An unexpected error occurred: {}", cause.getMessage(),
cause);
            }
            return;
        }
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();
```

```
            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode Amazon Location Service SDK.

```
public class LocationActions {

    private static LocationAsyncClient locationAsyncClient;

    private static GeoPlacesAsyncClient geoPlacesAsyncClient;
    private static final Logger logger =
 LoggerFactory.getLogger(LocationActions.class);

    // This Singleton pattern ensures that only one `LocationClient`
    // instance is used throughout the application.
    private LocationAsyncClient getClient() {
        if (locationAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            locationAsyncClient = LocationAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
```

```
                .build();
        }
        return locationAsyncClient;
    }

    private static GeoPlacesAsyncClient getGeoPlacesClient() {
        if (geoPlacesAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            geoPlacesAsyncClient = GeoPlacesAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return geoPlacesAsyncClient;
    }


    /**
     * Performs a nearby places search based on the provided geographic coordinates
 (latitude and longitude).
     * The method sends an asynchronous request to search for places within a 1-
kilometer radius of the specified location.
     * The results are processed and printed once the search completes successfully.
     */
    public CompletableFuture<SearchNearbyResponse> searchNearBy() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        // Set up the request for searching nearby places.
        SearchNearbyRequest request = SearchNearbyRequest.builder()
```

```
            .queryPosition(queryPosition)  // Set the position
            .queryRadius(1000L)  // Radius in meters (1000 meters = 1 km).
            .build();

        return getGeoPlacesClient().searchNearby(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
" + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
exception);
                }

                // Process the response and print the results.
                response.resultItems().forEach(result -> {
                    logger.info("Place Name: " + result.placeType().name());
                    logger.info("Address: " + result.address().label());
                    logger.info("Distance: " + result.distance() + " meters");
                    logger.info("-------------------------");
                });
            });
    }


    /**
     * Searches for a place using the provided search query and prints the detailed
information of the first result.
     *
     * @param searchQuery the search query to be used for the place search (ex,
coffee shop)
     */
    public CompletableFuture<Void> searchText(String searchQuery) {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        SearchTextRequest request = SearchTextRequest.builder()
                .queryText(searchQuery)
                .biasPosition(queryPosition)
                .build();
```

```
        return getGeoPlacesClient().searchText(request)
                .thenCompose(response -> {
                    if (response.resultItems().isEmpty()) {
                        logger.info("No places found.");
                        return CompletableFuture.completedFuture(null);
                    }

                    // Get the first place ID
                    String placeId = response.resultItems().get(0).placeId();
                    logger.info("Found Place with id: " + placeId);

                    // Fetch detailed info using getPlace
                    GetPlaceRequest getPlaceRequest = GetPlaceRequest.builder()
                            .placeId(placeId)
                            .build();

                    return getGeoPlacesClient().getPlace(getPlaceRequest)
                            .thenAccept(placeResponse -> {
                                logger.info("Detailed Place Information:");
                                logger.info("Name: " +
 placeResponse.placeType().name());
                                logger.info("Address: " +
 placeResponse.address().label());

                                if (placeResponse.foodTypes() != null && !
placeResponse.foodTypes().isEmpty()) {
                                    logger.info("Food Types:");
                                    placeResponse.foodTypes().forEach(foodType -> {
                                        logger.info("  - " + foodType);
                                    });
                                } else {
                                    logger.info("No food types available.");
                                }
                                logger.info("------------------------");
                            });
                })
                .exceptionally(exception -> {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
```

```
                    throw new CompletionException("Error performing place search",
exception);
                });
    }



    /**
     * Performs reverse geocoding using the AWS Geo Places API.
     * Reverse geocoding is the process of converting geographic coordinates
(latitude and longitude) to a human-readable address.
     * This method uses the latitude and longitude of San Francisco as the input,
and prints the resulting address.
     */
    public CompletableFuture<ReverseGeocodeResponse> reverseGeocode() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        logger.info("Use latitude 37.7749 and longitude -122.4194");

        // AWS expects [longitude, latitude].
        List<Double> queryPosition = List.of(longitude, latitude);
        ReverseGeocodeRequest request = ReverseGeocodeRequest.builder()
            .queryPosition(queryPosition)
            .build();
        CompletableFuture<ReverseGeocodeResponse> futureResponse =
            getGeoPlacesClient().reverseGeocode(request);

        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                    throw new CompletionException("A validation error occurred: " +
cause.getMessage(), cause);
                }
                throw new CompletionException("Error performing reverse geocoding",
exception);
            }

            response.resultItems().forEach(result ->
                logger.info("The address is: " + result.address().label())
            );
        });
    }
```

```
   /**
    * Calculates the distance between two locations asynchronously.
    *
    * @param routeCalcName the name of the route calculator to use
    * @return a {@link CompletableFuture} that will complete with a {@link
CalculateRouteResponse} containing the distance and estimated duration of the route
    */
   public CompletableFuture<CalculateRouteResponse> calcDistanceAsync(String
routeCalcName) {
       // Define coordinates for Seattle, WA and Vancouver, BC.
       List<Double> departurePosition = Arrays.asList(-122.3321, 47.6062);
       List<Double> arrivePosition = Arrays.asList(-123.1216, 49.2827);

       CalculateRouteRequest request = CalculateRouteRequest.builder()
           .calculatorName(routeCalcName)
           .departurePosition(departurePosition)
           .destinationPosition(arrivePosition)
           .travelMode("Car") // Options: Car, Truck, Walking, Bicycle
           .distanceUnit("Kilometers") // Options: Meters, Kilometers, Miles
           .build();

       return getClient().calculateRoute(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                   }
                   throw new CompletionException("Failed to calculate route: " +
exception.getMessage(), exception);
               }
           });
   }


   /**
    * Creates a new route calculator with the specified name and data source.
    *
    * @param routeCalcName the name of the route calculator to be created
    */
```

```
   public CompletableFuture<CreateRouteCalculatorResponse>
createRouteCalculator(String routeCalcName) {
       String dataSource = "Esri"; // or "Here"
       CreateRouteCalculatorRequest request =
CreateRouteCalculatorRequest.builder()
           .calculatorName(routeCalcName)
           .dataSource(dataSource)
           .build();

       return getClient().createRouteCalculator(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ConflictException) {
                       throw new CompletionException("A conflict error occurred: "
+ cause.getMessage(), cause);
                   }
                   throw new CompletionException("Failed to create route
calculator: " + exception.getMessage(), exception);
               }
           });
   }


   /**
    * Retrieves the position of a device using the provided LocationClient.
    *
    * @param trackerName The name of the tracker associated with the device.
    * @param deviceId    The ID of the device to retrieve the position for.
    * @throws RuntimeException If there is an error fetching the device position.
    */
   public CompletableFuture<GetDevicePositionResponse> getDevicePosition(String
trackerName, String deviceId) {
       GetDevicePositionRequest request = GetDevicePositionRequest.builder()
           .trackerName(trackerName)
           .deviceId(deviceId)
           .build();

       return getClient().getDevicePosition(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
```

```
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error fetching device position: "
+ exception.getMessage(), exception);
                }
            });
    }


    /**
     * Updates the position of a device in the location tracking system.
     *
     * @param trackerName the name of the tracker associated with the device
     * @param deviceId    the unique identifier of the device
     * @throws RuntimeException if an error occurs while updating the device
position
     */
    public CompletableFuture<BatchUpdateDevicePositionResponse>
updateDevicePosition(String trackerName, String deviceId) {
        double latitude = 37.7749;  // Example: San Francisco
        double longitude = -122.4194;

        DevicePositionUpdate positionUpdate = DevicePositionUpdate.builder()
            .deviceId(deviceId)
            .sampleTime(Instant.now()) // Timestamp of position update.
            .position(Arrays.asList(longitude, latitude)) // AWS requires
[longitude, latitude]
            .build();

        BatchUpdateDevicePositionRequest request =
BatchUpdateDevicePositionRequest.builder()
            .trackerName(trackerName)
            .updates(positionUpdate)
            .build();

        CompletableFuture<BatchUpdateDevicePositionResponse> futureResponse =
getClient().batchUpdateDevicePosition(request);
        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    throw new CompletionException("The resource was not found: " +
cause.getMessage(), cause);
```

```
                } else {
                    throw new CompletionException("Error updating device position: "
+ exception.getMessage(), exception);
                }
            }
        });
    }


    /**
     * Creates a new tracker resource in your AWS account, which you can use to
track the location of devices.
     *
     * @param trackerName the name of the tracker to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created tracker
     */
    public CompletableFuture<String> createTracker(String trackerName) {
        CreateTrackerRequest trackerRequest = CreateTrackerRequest.builder()
            .description("Created using the Java V2 SDK")
            .trackerName(trackerName)
            .positionFiltering("TimeBased") // Options: TimeBased, DistanceBased,
AccuracyBased
            .build();

        return getClient().createTracker(trackerRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("Conflict occurred while
creating tracker: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating tracker: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateTrackerResponse::trackerArn); // Return only the
tracker ARN
    }



    /**
```

```
    * Adds a new geofence to the specified collection.
    *
    * @param collectionName the name of the geofence collection to add the geofence
to
    * @param geoId          the unique identifier for the geofence
    */
   public CompletableFuture<PutGeofenceResponse> putGeofence(String collectionName,
String geoId) {
       // Define the geofence geometry (polygon).
       GeofenceGeometry geofenceGeometry = GeofenceGeometry.builder()
           .polygon(List.of(
               List.of(
                   List.of(-122.3381, 47.6101), // First point
                   List.of(-122.3281, 47.6101),
                   List.of(-122.3281, 47.6201),
                   List.of(-122.3381, 47.6201),
                   List.of(-122.3381, 47.6101) // Closing the polygon
               )
           ))
           .build();

       PutGeofenceRequest geofenceRequest = PutGeofenceRequest.builder()
           .collectionName(collectionName) // Specify the collection.
           .geofenceId(geoId) // Unique ID for the geofence.
           .geometry(geofenceGeometry)
           .build();

       return getClient().putGeofence(geofenceRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ValidationException) {
                       throw new CompletionException("Validation error while
creating geofence: " + cause.getMessage(), cause);
                   }
                   throw new CompletionException("Error creating geofence: " +
exception.getMessage(), exception);
               }
           });
   }


   /**
    * Creates a new geofence collection.
```

```
     *
     * @param collectionName the name of the geofence collection to be created
     */
    public CompletableFuture<String> createGeofenceCollection(String collectionName)
{
        CreateGeofenceCollectionRequest collectionRequest =
CreateGeofenceCollectionRequest.builder()
            .collectionName(collectionName)
            .description("Created by using the AWS SDK for Java")
            .build();

        return getClient().createGeofenceCollection(collectionRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("The geofence collection was
not created due to ConflictException.", cause);
                    }
                    throw new CompletionException("Failed to create geofence
collection: " + exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.collectionArn()); // Return only the ARN
    }




    /**
     * Creates a new API key with the specified name and restrictions.
     *
     * @param keyName the name of the API key to be created
     * @param mapArn  the Amazon Resource Name (ARN) of the map resource to which
the API key will be associated
     * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created API key,
     * or {@code null} if the operation failed
     */
    public CompletableFuture<String> createKey(String keyName, String mapArn) {
        ApiKeyRestrictions keyRestrictions = ApiKeyRestrictions.builder()
            .allowActions("geo:GetMap*")
            .allowResources(mapArn)
            .build();
```

```
        CreateKeyRequest request = CreateKeyRequest.builder()
            .keyName(keyName)
            .restrictions(keyRestrictions)
            .noExpiry(true)
            .build();

        return getClient().createKey(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof AccessDeniedException) {
                        throw new CompletionException("The request was denied
because of insufficient access or permissions.", cause);
                    }
                    throw new CompletionException("Failed to create API key: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.keyArn()); // This will never return
null if the response reaches here
    }



    /**
     * Creates a new map with the specified name and configuration.
     *
     * @param mapName the name of the map to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created map
     * @throws CompletionException if an error occurs while creating the map, such
as exceeding the service quota
     */
    public CompletableFuture<String> createMap(String mapName) {
        MapConfiguration configuration = MapConfiguration.builder()
            .style("VectorEsriNavigation")
            .build();

        CreateMapRequest mapRequest = CreateMapRequest.builder()
            .mapName(mapName)
            .configuration(configuration)
            .description("A map created using the Java V2 API")
            .build();
```

```
        return getClient().createMap(mapRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ServiceQuotaExceededException) {
                        throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                    }
                    throw new CompletionException("Failed to create map: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.mapArn()); // Return the map ARN
    }



    /**
     * Deletes a geofence collection asynchronously.
     *
     * @param collectionName the name of the geofence collection to be deleted
     * @return a {@link CompletableFuture} that completes when the geofence
collection has been deleted
     */
    public CompletableFuture<Void> deleteGeofenceCollectionAsync(String
collectionName) {
        DeleteGeofenceCollectionRequest collectionRequest =
DeleteGeofenceCollectionRequest.builder()
            .collectionName(collectionName)
            .build();

        return getClient().deleteGeofenceCollection(collectionRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The requested geofence
collection was not found.", cause);
                    }
                    throw new CompletionException("Failed to delete geofence
collection: " + exception.getMessage(), exception);
                }
```

```
                logger.info("The geofence collection {} was deleted.",
collectionName);
            })
            .thenApply(response -> null);
    }



    /**
     * Deletes the specified key from the key-value store.
     *
     * @param keyName the name of the key to be deleted
     * @return a {@link CompletableFuture} that completes when the key has been
deleted
     * @throws CompletionException if the key was not found or if an error occurred
during the deletion process
     */
    public CompletableFuture<Void> deleteKey(String keyName) {
        DeleteKeyRequest keyRequest = DeleteKeyRequest.builder()
            .keyName(keyName)
            .build();

        return getClient().deleteKey(keyRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The key was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete key: " +
exception.getMessage(), exception);
                }
                logger.info("The key {} was deleted.", keyName);
            })
            .thenApply(response -> null);
    }



    /**
     * Deletes a map with the specified name.
     *
     * @param mapName the name of the map to be deleted
```

```
    * @return a {@link CompletableFuture} that completes when the map deletion is
successful, or throws a {@link CompletionException} if an error occurs
    */
   public CompletableFuture<Void> deleteMap(String mapName) {
       DeleteMapRequest mapRequest = DeleteMapRequest.builder()
           .mapName(mapName)
           .build();

       return getClient().deleteMap(mapRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The map was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete map: " +
exception.getMessage(), exception);
               }
               logger.info("The map {} was deleted.", mapName);
           })
           .thenApply(response -> null);
   }


   /**
    * Deletes a tracker with the specified name.
    *
    * @param trackerName the name of the tracker to be deleted
    * @return a {@link CompletableFuture} that completes when the tracker has been
deleted
    * @throws CompletionException if an error occurs while deleting the tracker
    *                             - if the tracker was not found, a {@link
ResourceNotFoundException} is thrown wrapped in the CompletionException
    *                             - if any other error occurs, a generic
CompletionException is thrown with the error message
    */
   public CompletableFuture<Void> deleteTracker(String trackerName) {
       DeleteTrackerRequest trackerRequest = DeleteTrackerRequest.builder()
           .trackerName(trackerName)
           .build();

       return getClient().deleteTracker(trackerRequest)
           .whenComplete((response, exception) -> {
```

```
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The tracker was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete the tracker: " +
exception.getMessage(), exception);
                }
                logger.info("The tracker {} was deleted.", trackerName);
            })
            .thenApply(response -> null); // Ensures CompletableFuture<Void>
    }


    /**
     * Deletes a route calculator from the system.
     *
     * @param calcName the name of the route calculator to delete
     * @return a {@link CompletableFuture} that completes when the route calculator
has been deleted
     * @throws CompletionException if an error occurs while deleting the route
calculator
     *                             - If the route calculator was not found, a {@link
ResourceNotFoundException} will be thrown
     *                             - If any other error occurs, a generic {@link
CompletionException} will be thrown
     */
    public CompletableFuture<Void> deleteRouteCalculator(String calcName) {
        DeleteRouteCalculatorRequest calculatorRequest =
DeleteRouteCalculatorRequest.builder()
            .calculatorName(calcName)
            .build();

        return getClient().deleteRouteCalculator(calculatorRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The route calculator was not
found.", cause);
                    }
                    throw new CompletionException("Failed to delete the route
calculator: " + exception.getMessage(), exception);
```

```
                }
                logger.info("The route calculator {} was deleted.", calcName);
            })
            .thenApply(response -> null);
    }
}
```

## Tindakan

### `BatchUpdateDevicePosition`

Contoh kode berikut menunjukkan cara menggunakan`BatchUpdateDevicePosition`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Updates the position of a device in the location tracking system.
    *
    * @param trackerName the name of the tracker associated with the device
    * @param deviceId    the unique identifier of the device
    * @throws RuntimeException if an error occurs while updating the device
position
    */
   public CompletableFuture<BatchUpdateDevicePositionResponse>
updateDevicePosition(String trackerName, String deviceId) {
       double latitude = 37.7749;  // Example: San Francisco
       double longitude = -122.4194;

       DevicePositionUpdate positionUpdate = DevicePositionUpdate.builder()
           .deviceId(deviceId)
           .sampleTime(Instant.now()) // Timestamp of position update.
           .position(Arrays.asList(longitude, latitude)) // AWS requires
[longitude, latitude]
```

```
            .build();

        BatchUpdateDevicePositionRequest request =
BatchUpdateDevicePositionRequest.builder()
            .trackerName(trackerName)
            .updates(positionUpdate)
            .build();

        CompletableFuture<BatchUpdateDevicePositionResponse> futureResponse =
getClient().batchUpdateDevicePosition(request);
        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    throw new CompletionException("The resource was not found: " +
cause.getMessage(), cause);
                } else {
                    throw new CompletionException("Error updating device position: "
+ exception.getMessage(), exception);
                }
            }
        });
    }
```

- Untuk detail API, lihat BatchUpdateDevicePositiondi Referensi AWS SDK for Java 2.x API.

### `CalculateRoute`

Contoh kode berikut menunjukkan cara menggunakan`CalculateRoute`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
```

```
    * Calculates the distance between two locations asynchronously.
    *
    * @param routeCalcName the name of the route calculator to use
    * @return a {@link CompletableFuture} that will complete with a {@link
CalculateRouteResponse} containing the distance and estimated duration of the route
    */
   public CompletableFuture<CalculateRouteResponse> calcDistanceAsync(String
routeCalcName) {
       // Define coordinates for Seattle, WA and Vancouver, BC.
       List<Double> departurePosition = Arrays.asList(-122.3321, 47.6062);
       List<Double> arrivePosition = Arrays.asList(-123.1216, 49.2827);

       CalculateRouteRequest request = CalculateRouteRequest.builder()
           .calculatorName(routeCalcName)
           .departurePosition(departurePosition)
           .destinationPosition(arrivePosition)
           .travelMode("Car") // Options: Car, Truck, Walking, Bicycle
           .distanceUnit("Kilometers") // Options: Meters, Kilometers, Miles
           .build();

       return getClient().calculateRoute(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                   }
                   throw new CompletionException("Failed to calculate route: " +
exception.getMessage(), exception);
               }
           });
   }
```

- Untuk detail API, lihat CalculateRoutedi Referensi AWS SDK for Java 2.x API.

### `CreateGeofenceCollection`

Contoh kode berikut menunjukkan cara menggunakan`CreateGeofenceCollection`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new geofence collection.
    *
    * @param collectionName the name of the geofence collection to be created
    */
   public CompletableFuture<String> createGeofenceCollection(String collectionName)
{
       CreateGeofenceCollectionRequest collectionRequest =
CreateGeofenceCollectionRequest.builder()
           .collectionName(collectionName)
           .description("Created by using the AWS SDK for Java")
           .build();

       return getClient().createGeofenceCollection(collectionRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ConflictException) {
                       throw new CompletionException("The geofence collection was
not created due to ConflictException.", cause);
                   }
                   throw new CompletionException("Failed to create geofence
collection: " + exception.getMessage(), exception);
               }
           })
           .thenApply(response -> response.collectionArn()); // Return only the ARN
   }
```

- Untuk detail API, lihat CreateGeofenceCollectiondi Referensi AWS SDK for Java 2.x API.

### `CreateKey`

Contoh kode berikut menunjukkan cara menggunakan`CreateKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new API key with the specified name and restrictions.
    *
    * @param keyName the name of the API key to be created
    * @param mapArn  the Amazon Resource Name (ARN) of the map resource to which
the API key will be associated
    * @return a {@link CompletableFuture} that completes with the Amazon Resource
Name (ARN) of the created API key,
    * or {@code null} if the operation failed
    */
   public CompletableFuture<String> createKey(String keyName, String mapArn) {
       ApiKeyRestrictions keyRestrictions = ApiKeyRestrictions.builder()
           .allowActions("geo:GetMap*")
           .allowResources(mapArn)
           .build();

       CreateKeyRequest request = CreateKeyRequest.builder()
           .keyName(keyName)
           .restrictions(keyRestrictions)
           .noExpiry(true)
           .build();

       return getClient().createKey(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof AccessDeniedException) {
                       throw new CompletionException("The request was denied
because of insufficient access or permissions.", cause);
                   }
```

```
                    throw new CompletionException("Failed to create API key: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.keyArn()); // This will never return
null if the response reaches here
    }
```

- Untuk detail API, lihat CreateKeydi Referensi AWS SDK for Java 2.x API.

### `CreateMap`

Contoh kode berikut menunjukkan cara menggunakan`CreateMap`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new map with the specified name and configuration.
     *
     * @param mapName the name of the map to be created
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created map
     * @throws CompletionException if an error occurs while creating the map, such
as exceeding the service quota
     */
    public CompletableFuture<String> createMap(String mapName) {
        MapConfiguration configuration = MapConfiguration.builder()
            .style("VectorEsriNavigation")
            .build();

        CreateMapRequest mapRequest = CreateMapRequest.builder()
            .mapName(mapName)
            .configuration(configuration)
```

```
            .description("A map created using the Java V2 API")
            .build();

        return getClient().createMap(mapRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ServiceQuotaExceededException) {
                        throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                    }
                    throw new CompletionException("Failed to create map: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(response -> response.mapArn()); // Return the map ARN
    }
```

- Untuk detail API, lihat CreateMapdi Referensi AWS SDK for Java 2.x API.

### `CreateRouteCalculator`

Contoh kode berikut menunjukkan cara menggunakan`CreateRouteCalculator`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new route calculator with the specified name and data source.
     *
     * @param routeCalcName the name of the route calculator to be created
     */
    public CompletableFuture<CreateRouteCalculatorResponse>
createRouteCalculator(String routeCalcName) {
```

```
        String dataSource = "Esri"; // or "Here"
        CreateRouteCalculatorRequest request =
CreateRouteCalculatorRequest.builder()
            .calculatorName(routeCalcName)
            .dataSource(dataSource)
            .build();

        return getClient().createRouteCalculator(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("A conflict error occurred: "
+ cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to create route
calculator: " + exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat CreateRouteCalculatordi Referensi AWS SDK for Java 2.x API.

### `CreateTracker`

Contoh kode berikut menunjukkan cara menggunakan`CreateTracker`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new tracker resource in your AWS account, which you can use to
track the location of devices.
     *
     * @param trackerName the name of the tracker to be created
```

```
     * @return a {@link CompletableFuture} that, when completed, will contain the
Amazon Resource Name (ARN) of the created tracker
     */
    public CompletableFuture<String> createTracker(String trackerName) {
        CreateTrackerRequest trackerRequest = CreateTrackerRequest.builder()
            .description("Created using the Java V2 SDK")
            .trackerName(trackerName)
            .positionFiltering("TimeBased") // Options: TimeBased, DistanceBased,
AccuracyBased
            .build();

        return getClient().createTracker(trackerRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ConflictException) {
                        throw new CompletionException("Conflict occurred while
creating tracker: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error creating tracker: " +
exception.getMessage(), exception);
                }
            })
            .thenApply(CreateTrackerResponse::trackerArn); // Return only the
tracker ARN
    }
```

- Untuk detail API, lihat CreateTrackerdi Referensi AWS SDK for Java 2.x API.

### `DeleteGeofenceCollection`

Contoh kode berikut menunjukkan cara menggunakan`DeleteGeofenceCollection`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a geofence collection asynchronously.
    *
    * @param collectionName the name of the geofence collection to be deleted
    * @return a {@link CompletableFuture} that completes when the geofence
collection has been deleted
    */
   public CompletableFuture<Void> deleteGeofenceCollectionAsync(String
collectionName) {
       DeleteGeofenceCollectionRequest collectionRequest =
DeleteGeofenceCollectionRequest.builder()
           .collectionName(collectionName)
           .build();

       return getClient().deleteGeofenceCollection(collectionRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The requested geofence
collection was not found.", cause);
                   }
                   throw new CompletionException("Failed to delete geofence
collection: " + exception.getMessage(), exception);
               }
               logger.info("The geofence collection {} was deleted.",
collectionName);
           })
           .thenApply(response -> null);
   }
```

- Untuk detail API, lihat DeleteGeofenceCollectiondi Referensi AWS SDK for Java 2.x API.

### `DeleteKey`

Contoh kode berikut menunjukkan cara menggunakan`DeleteKey`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes the specified key from the key-value store.
    *
    * @param keyName the name of the key to be deleted
    * @return a {@link CompletableFuture} that completes when the key has been
deleted
    * @throws CompletionException if the key was not found or if an error occurred
during the deletion process
    */
   public CompletableFuture<Void> deleteKey(String keyName) {
       DeleteKeyRequest keyRequest = DeleteKeyRequest.builder()
           .keyName(keyName)
           .build();

       return getClient().deleteKey(keyRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The key was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete key: " +
exception.getMessage(), exception);
               }
               logger.info("The key {} was deleted.", keyName);
           })
           .thenApply(response -> null);
   }
```

- Untuk detail API, lihat DeleteKeydi Referensi AWS SDK for Java 2.x API.

### `DeleteMap`

Contoh kode berikut menunjukkan cara menggunakan`DeleteMap`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a map with the specified name.
    *
    * @param mapName the name of the map to be deleted
    * @return a {@link CompletableFuture} that completes when the map deletion is
successful, or throws a {@link CompletionException} if an error occurs
    */
   public CompletableFuture<Void> deleteMap(String mapName) {
       DeleteMapRequest mapRequest = DeleteMapRequest.builder()
           .mapName(mapName)
           .build();

       return getClient().deleteMap(mapRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The map was not found.",
cause);
                   }
                   throw new CompletionException("Failed to delete map: " +
exception.getMessage(), exception);
               }
               logger.info("The map {} was deleted.", mapName);
           })
           .thenApply(response -> null);
   }
```

- Untuk detail API, lihat DeleteMapdi Referensi AWS SDK for Java 2.x API.

### `DeleteRouteCalculator`

Contoh kode berikut menunjukkan cara menggunakan`DeleteRouteCalculator`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a route calculator from the system.
    *
    * @param calcName the name of the route calculator to delete
    * @return a {@link CompletableFuture} that completes when the route calculator
has been deleted
    * @throws CompletionException if an error occurs while deleting the route
calculator
    *                             - If the route calculator was not found, a {@link
ResourceNotFoundException} will be thrown
    *                             - If any other error occurs, a generic {@link
CompletionException} will be thrown
    */
   public CompletableFuture<Void> deleteRouteCalculator(String calcName) {
       DeleteRouteCalculatorRequest calculatorRequest =
DeleteRouteCalculatorRequest.builder()
           .calculatorName(calcName)
           .build();

       return getClient().deleteRouteCalculator(calculatorRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ResourceNotFoundException) {
                       throw new CompletionException("The route calculator was not
found.", cause);
                   }
```

```
                    throw new CompletionException("Failed to delete the route
calculator: " + exception.getMessage(), exception);
                }
                logger.info("The route calculator {} was deleted.", calcName);
            })
            .thenApply(response -> null);
    }
```

- Untuk detail API, lihat DeleteRouteCalculatordi Referensi AWS SDK for Java 2.x API.

### `DeleteTracker`

Contoh kode berikut menunjukkan cara menggunakan`DeleteTracker`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a tracker with the specified name.
     *
     * @param trackerName the name of the tracker to be deleted
     * @return a {@link CompletableFuture} that completes when the tracker has been
deleted
     * @throws CompletionException if an error occurs while deleting the tracker
     *                             - if the tracker was not found, a {@link
ResourceNotFoundException} is thrown wrapped in the CompletionException
     *                             - if any other error occurs, a generic
CompletionException is thrown with the error message
     */
    public CompletableFuture<Void> deleteTracker(String trackerName) {
        DeleteTrackerRequest trackerRequest = DeleteTrackerRequest.builder()
            .trackerName(trackerName)
            .build();

        return getClient().deleteTracker(trackerRequest)
```

```
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The tracker was not found.",
cause);
                    }
                    throw new CompletionException("Failed to delete the tracker: " +
exception.getMessage(), exception);
                }
                logger.info("The tracker {} was deleted.", trackerName);
            })
            .thenApply(response -> null); // Ensures CompletableFuture<Void>
    }
```

- Untuk detail API, lihat DeleteTrackerdi Referensi AWS SDK for Java 2.x API.

### `GetDevicePosition`

Contoh kode berikut menunjukkan cara menggunakan`GetDevicePosition`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the position of a device using the provided LocationClient.
     *
     * @param trackerName The name of the tracker associated with the device.
     * @param deviceId    The ID of the device to retrieve the position for.
     * @throws RuntimeException If there is an error fetching the device position.
     */
    public CompletableFuture<GetDevicePositionResponse> getDevicePosition(String
trackerName, String deviceId) {
        GetDevicePositionRequest request = GetDevicePositionRequest.builder()
```

```
            .trackerName(trackerName)
            .deviceId(deviceId)
            .build();

        return getClient().getDevicePosition(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof ResourceNotFoundException) {
                        throw new CompletionException("The AWS resource was not
found: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error fetching device position: "
+ exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat GetDevicePositiondi Referensi AWS SDK for Java 2.x API.

### `PutGeofence`

Contoh kode berikut menunjukkan cara menggunakan`PutGeofence`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Adds a new geofence to the specified collection.
     *
     * @param collectionName the name of the geofence collection to add the geofence
to
     * @param geoId          the unique identifier for the geofence
     */
```

```
   public CompletableFuture<PutGeofenceResponse> putGeofence(String collectionName,
String geoId) {
       // Define the geofence geometry (polygon).
       GeofenceGeometry geofenceGeometry = GeofenceGeometry.builder()
           .polygon(List.of(
               List.of(
                   List.of(-122.3381, 47.6101), // First point
                   List.of(-122.3281, 47.6101),
                   List.of(-122.3281, 47.6201),
                   List.of(-122.3381, 47.6201),
                   List.of(-122.3381, 47.6101) // Closing the polygon
               )
           ))
           .build();

       PutGeofenceRequest geofenceRequest = PutGeofenceRequest.builder()
           .collectionName(collectionName) // Specify the collection.
           .geofenceId(geoId) // Unique ID for the geofence.
           .geometry(geofenceGeometry)
           .build();

       return getClient().putGeofence(geofenceRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof ValidationException) {
                       throw new CompletionException("Validation error while
creating geofence: " + cause.getMessage(), cause);
                   }
                   throw new CompletionException("Error creating geofence: " +
exception.getMessage(), exception);
               }
           });
   }
```

- Untuk detail API, lihat PutGeofencedi Referensi AWS SDK for Java 2.x API.

## Contoh Location Service Places menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Location Service Places.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


## Tindakan

### `ReverseGeocode`

Contoh kode berikut menunjukkan cara menggunakan`ReverseGeocode`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Performs reverse geocoding using the AWS Geo Places API.
    * Reverse geocoding is the process of converting geographic coordinates
(latitude and longitude) to a human-readable address.
    * This method uses the latitude and longitude of San Francisco as the input,
and prints the resulting address.
    */
   public CompletableFuture<ReverseGeocodeResponse> reverseGeocode() {
       double latitude = 37.7749;  // San Francisco
       double longitude = -122.4194;
       logger.info("Use latitude 37.7749 and longitude -122.4194");

       // AWS expects [longitude, latitude].
       List<Double> queryPosition = List.of(longitude, latitude);
       ReverseGeocodeRequest request = ReverseGeocodeRequest.builder()
```

```
            .queryPosition(queryPosition)
            .build();
        CompletableFuture<ReverseGeocodeResponse> futureResponse =
            getGeoPlacesClient().reverseGeocode(request);

        return futureResponse.whenComplete((response, exception) -> {
            if (exception != null) {
                Throwable cause = exception.getCause();
                if (cause instanceof
software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                    throw new CompletionException("A validation error occurred: " +
cause.getMessage(), cause);
                }
                throw new CompletionException("Error performing reverse geocoding",
exception);
            }

            response.resultItems().forEach(result ->
                logger.info("The address is: " + result.address().label())
            );
        });
    }
```

- Untuk detail API, lihat ReverseGeocodedi Referensi AWS SDK for Java 2.x API.

### `SearchNearby`

Contoh kode berikut menunjukkan cara menggunakan`SearchNearby`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Performs a nearby places search based on the provided geographic coordinates
(latitude and longitude).
```

```
     * The method sends an asynchronous request to search for places within a 1-
kilometer radius of the specified location.
     * The results are processed and printed once the search completes successfully.
     */
    public CompletableFuture<SearchNearbyResponse> searchNearBy() {
        double latitude = 37.7749;  // San Francisco
        double longitude = -122.4194;
        List<Double> queryPosition = List.of(longitude, latitude);

        // Set up the request for searching nearby places.
        SearchNearbyRequest request = SearchNearbyRequest.builder()
            .queryPosition(queryPosition)  // Set the position
            .queryRadius(1000L)  // Radius in meters (1000 meters = 1 km).
            .build();

        return getGeoPlacesClient().searchNearby(request)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
 exception);
                }

                // Process the response and print the results.
                response.resultItems().forEach(result -> {
                    logger.info("Place Name: " + result.placeType().name());
                    logger.info("Address: " + result.address().label());
                    logger.info("Distance: " + result.distance() + " meters");
                    logger.info("-------------------------");
                });
            });
    }
```

- Untuk detail API, lihat SearchNearbydi Referensi AWS SDK for Java 2.x API.

### `SearchText`

Contoh kode berikut menunjukkan cara menggunakan`SearchText`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Searches for a place using the provided search query and prints the detailed
information of the first result.
    *
    * @param searchQuery the search query to be used for the place search (ex,
coffee shop)
    */
   public CompletableFuture<Void> searchText(String searchQuery) {
       double latitude = 37.7749;  // San Francisco
       double longitude = -122.4194;
       List<Double> queryPosition = List.of(longitude, latitude);

       SearchTextRequest request = SearchTextRequest.builder()
               .queryText(searchQuery)
               .biasPosition(queryPosition)
               .build();

       return getGeoPlacesClient().searchText(request)
               .thenCompose(response -> {
                   if (response.resultItems().isEmpty()) {
                       logger.info("No places found.");
                       return CompletableFuture.completedFuture(null);
                   }

                   // Get the first place ID
                   String placeId = response.resultItems().get(0).placeId();
                   logger.info("Found Place with id: " + placeId);

                   // Fetch detailed info using getPlace
                   GetPlaceRequest getPlaceRequest = GetPlaceRequest.builder()
```

```
                            .placeId(placeId)
                            .build();

                    return getGeoPlacesClient().getPlace(getPlaceRequest)
                            .thenAccept(placeResponse -> {
                                logger.info("Detailed Place Information:");
                                logger.info("Name: " +
 placeResponse.placeType().name());
                                logger.info("Address: " +
 placeResponse.address().label());

                                if (placeResponse.foodTypes() != null && !
placeResponse.foodTypes().isEmpty()) {
                                    logger.info("Food Types:");
                                    placeResponse.foodTypes().forEach(foodType -> {
                                        logger.info("  - " + foodType);
                                    });
                                } else {
                                    logger.info("No food types available.");
                                }
                                logger.info("------------------------");
                            });
                })
                .exceptionally(exception -> {
                    Throwable cause = exception.getCause();
                    if (cause instanceof
 software.amazon.awssdk.services.geoplaces.model.ValidationException) {
                        throw new CompletionException("A validation error occurred:
 " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Error performing place search",
 exception);
                });
    }
```

- Untuk detail API, lihat SearchTextdi Referensi AWS SDK for Java 2.x API.

# AWS Marketplace Contoh API Katalog menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS Marketplace Catalog API.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Produk AMI
- Penawaran mitra saluran
- Produk kontainer
- Entitas
- Penawaran
- Produk
- Otorisasi penjualan kembali
- Produk SaaS
- Utilitas


## Produk AMI

Tambahkan dimensi ke produk AMI yang ada dan perbarui ketentuan harga penawaran

Contoh kode berikut menunjukkan cara menambahkan dimensi ke produk AMI yang ada dan memperbarui ketentuan harga penawaran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Identifier": "prod-1111111111111",
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": [
                {
                    "Key": "m7g.8xlarge",
                    "Description": "m7g.8xlarge",
                    "Name": "m7g.8xlarge",
                    "Types": [
                        "Metered"
                    ],
                    "Unit": "Hrs"
                }
            ]
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "0.15"
                                    },
```

```
                                {
                                    "DimensionKey": "m7g.4xlarge",
                                    "Price": "0.45"
                                },
                                {
                                    "DimensionKey": "m7g.2xlarge",
                                    "Price": "0.45"
                                },
                                {
                                    "DimensionKey": "m7g.8xlarge",
                                    "Price": "0.55"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Menambahkan wilayah tempat produk AMI digunakan

Contoh kode berikut menunjukkan cara menambahkan wilayah tempat produk AMI dikerahkan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
```

```
    "ChangeSet": [
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-2",
                    "us-west-2"
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk AMI publik atau terbatas dan penawaran umum dengan harga tahunan per jam

Contoh kode berikut menunjukkan cara membuat produk AMI publik atau terbatas dan penawaran umum dengan harga tahunan per jam. Contoh ini menciptakan EULA standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
```

```
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
                ]
```

```
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Version": {
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
                                },
                                "UsageInstructions": "Test AMI Version",
                                "RecommendedInstanceType": "t2.micro",
                                "SecurityGroups": [
                                    {
                                        "IpProtocol": "tcp",
                                        "IpRanges": [
```

```
                                        "0.0.0.0/0"
                                    ],
                                    "FromPort": 10,
                                    "ToPort": 22
                                }
                            ]
                        }
                    }
                }
            ]
        }
    },
    {
        "ChangeType": "AddDimensions",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": [
            {
                "Key": "t2.micro",
                "Description": "t2.micro",
                "Name": "t2.micro",
                "Types": [
                    "Metered"
                ],
                "Unit": "Hrs"
            }
        ]
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
```

```
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly-annual pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
```

```
                    "RateCards": [
                        {
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "0.15"
                                }
                            ]
                        }
                    ]
                },
                {
                    "Type": "ConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P365D"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "150"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
```

```
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk AMI publik atau terbatas dan penawaran umum dengan harga bulanan per jam

Contoh kode berikut menunjukkan cara membuat produk AMI publik atau terbatas dan penawaran umum dengan harga bulanan per jam. Contoh ini menciptakan EULA standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
```

```
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
                ]
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Version": {
```

```
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
                                },
                                "UsageInstructions": "Test AMI Version",
                                "RecommendedInstanceType": "t2.micro",
                                "SecurityGroups": [
                                    {
                                        "IpProtocol": "tcp",
                                        "IpRanges": [
                                            "0.0.0.0/0"
                                        ],
                                        "FromPort": 10,
                                        "ToPort": 22
                                    }
                                ]
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "t2.micro",
                    "Description": "t2.micro",
```

```
                "Name": "t2.micro",
                "Types": [
                    "Metered"
                ],
                "Unit": "Hrs"
            }
        ]
    },
    {
        "ChangeType": "UpdateTargeting",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
    },
    {
        "ChangeType": "ReleaseProduct",
        "Entity": {
            "Type": "AmiProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "CreateOffer",
        "ChangeName": "CreateOfferChange",
        "Entity": {
            "Type": "Offer@1.0"
        },
        "DetailsDocument": {
            "ProductId": "$CreateProductChange.Entity.Identifier"
        }
    },
    {
        "ChangeType": "UpdateInformation",
        "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly-monthly pricing for
AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.15"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "RecurringPaymentTerm",
                        "CurrencyCode": "USD",
                        "BillingPeriod": "Monthly",
                        "Price": "15.0"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk AMI publik atau terbatas dan penawaran umum dengan harga per jam

Contoh kode berikut menunjukkan cara membuat produk AMI publik atau terbatas dan penawaran umum dengan harga per jam. Contoh ini menciptakan EULA dan standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
```

```
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Operating Systems"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-east-1"
                ]
            }
        },
        {
            "ChangeType": "AddInstanceTypes",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "InstanceTypes": [
                    "t2.micro"
                ]
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "Version": {
                    "VersionTitle": "Test AMI Version1.0",
                    "ReleaseNotes": "Test AMI Version"
                },
                "DeliveryOptions": [
                    {
                        "Details": {
                            "AmiDeliveryOptionDetails": {
                                "AmiSource": {
                                    "AmiId": "ami-1111111111111111",
                                    "AccessRoleArn":
"arn:aws:iam::111111111111:role/AWSMarketplaceAmiIngestion",
                                    "UserName": "ec2-user",
                                    "OperatingSystemName": "AMAZONLINUX",
                                    "OperatingSystemVersion": "10.0.14393",
                                    "ScanningPort": 22
                                },
                                "UsageInstructions": "Test AMI Version",
                                "RecommendedInstanceType": "t2.micro",
                                "SecurityGroups": [
                                    {
                                        "IpProtocol": "tcp",
                                        "IpRanges": [
                                            "0.0.0.0/0"
                                        ],
                                        "FromPort": 10,
                                        "ToPort": 22
                                    }
                                ]
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
```

```
                {
                    "Key": "t2.micro",
                    "Description": "t2.micro",
                    "Name": "t2.micro",
                    "Types": [
                        "Metered"
                    ],
                    "Unit": "Hrs"
                }
            ]
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
```

```
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for AmiProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with hourly pricing for AmiProduct
using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.15"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat draf produk AMI dengan draf penawaran umum

Contoh kode berikut menunjukkan cara membuat draf produk AMI dengan draf penawaran umum.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "AmiProduct@1.0"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Batasi wilayah tempat produk AMI digunakan

Contoh kode berikut menunjukkan cara membatasi wilayah tempat produk AMI digunakan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "RestrictRegions",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "Regions": [
                    "us-west-2"
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Batasi visibilitas produk

Contoh kode berikut menunjukkan cara membatasi visibilitas produk.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateVisibility",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "TargetVisibility": "Restricted"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Tentukan apakah aset AMI digunakan di wilayah baru

Contoh kode berikut menunjukkan cara menentukan apakah aset AMI dikerahkan di wilayah baru yang dibangun oleh AWS untuk mendukung wilayah masa depan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateFutureRegionSupport",
            "Entity": {
                "Type": "AmiProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "FutureRegionSupport": {
                    "SupportedRegions": [
                        "All"
                    ]
                }
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Penawaran mitra saluran

Buat draf CPPO untuk semua jenis produk

Contoh kode berikut menunjukkan cara membuat draf CPPO untuk semua jenis produk sehingga Anda dapat meninjaunya secara internal sebelum dipublikasikan ke pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOfferUsingResaleAuthorization",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ResaleAuthorizationId": "11111111-1111-1111-1111-111111111111",
                "Name": "Test Offer",
                "Description": "Test product"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi pengganti otorisasi penjualan kembali dengan harga kontrak

Contoh kode berikut menunjukkan cara membuat penawaran pribadi pengganti otorisasi penjualan kembali dari perjanjian yang ada dengan harga kontrak.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateReplacementOfferUsingResaleAuthorization",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateReplacementOfferResaleAuth",
            "DetailsDocument": {
                "AgreementId": "agmt-11111111111111111111111",
                "ResaleAuthorizationId": "resaleauthz-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test replacement offer for SaaSProduct using AWS
 Marketplace API Reference Codes",
                "Description": "Test private resale replacement offer with contract
 pricing for SaaSProduct"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
```

```
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Duration": "P12M",
                        "Grants": [
                            {
                                "DimensionKey": "BasicService",
                                "MaxQuantity": 2
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementEndDate": "2024-01-30"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
```

```
                {
                    "Type": "PaymentScheduleTerm",
                    "CurrencyCode": "USD",
                    "Schedule": [
                        {
                            "ChargeDate": "2024-01-01",
                            "ChargeAmount": "0"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateAvailability",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
        },
        "DetailsDocument": {
            "AvailabilityEndDate": "2023-12-31"
        }
    },
    {
```

```
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOfferResaleAuth.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Daftar semua CPPOs yang dibuat oleh mitra saluran

Contoh kode berikut menunjukkan cara membuat daftar semua yang CPPOs dibuat oleh mitra saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;

public class ListAllCppoOffers {

 /*
  * List all CPPOs created by a channel partner
  */
 public static void main(String[] args) {

  List<String> cppoOfferIds = getAllCppoOfferIds();

  ReferenceCodesUtils.formatOutput(cppoOfferIds);
 }

 public static List<String> getAllCppoOfferIds() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // get all offer entity ids
  List<String> entityIdList = new ArrayList<String>();

  ListEntitiesRequest listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER)
    .maxResults(10)
    .nextToken(null)
    .build();

  ListEntitiesResponse listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

  for (EntitySummary entitySummary : listEntitiesResponse.entitySummaryList()) {
   entityIdList.add(entitySummary.entityId());
  }
```

```
  while (listEntitiesResponse.nextToken() != null) {
   listEntitiesRequest =
     ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_OFFER)
     .maxResults(10)
     .nextToken(listEntitiesResponse.nextToken())
     .build();
   listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

   for (EntitySummary entitySummary : listEntitiesResponse.entitySummaryList()) {
    entityIdList.add(entitySummary.entityId());
   }
  }

  // filter for CPPO offers: ResaleAuthorizationId exists in Details

  List<String> cppoOfferIds = new ArrayList<String>();

  for (String entityId : entityIdList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entityId)
     .build();
   DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);

   Document resaleAuthorizationDocument =
 describeEntityResponse.detailsDocument().asMap().get(ATTRIBUTE_RESALE_AUTHORIZATION_ID);
   String resaleAuthorizationId = resaleAuthorizationDocument != null ?
 resaleAuthorizationDocument.asString() : "";

   if (!resaleAuthorizationId.isEmpty()) {
       cppoOfferIds.add(resaleAuthorizationId);
   }
  }
  return cppoOfferIds;
 }

}
```

- Untuk detail API, lihat ListEntitiesdi Referensi AWS SDK for Java 2.x API.

Buat daftar semua otorisasi penjualan kembali bersama yang tersedia untuk mitra saluran

Contoh kode berikut menunjukkan cara mencantumkan semua otorisasi penjualan kembali bersama yang tersedia untuk mitra saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;

public class ListAllSharedResaleAuthorizations {

 /*
  * list all resale authorizations shared to an account
  */
 public static void main(String[] args) {

  List<ListEntitiesResponse> responseList = getListEntityResponseList();
  ReferenceCodesUtils.formatOutput(responseList);
 }
```

```
 public static List<ListEntitiesResponse> getListEntityResponseList() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  List<ListEntitiesResponse> responseList = new ArrayList<ListEntitiesResponse>();

  ListEntitiesRequest listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_RESALE_AUTHORIZATION)
    .maxResults(10)
    .ownershipType(OWNERSHIP_TYPE_SHARED)
    .nextToken(null)
    .build();

  ListEntitiesResponse listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

  responseList.add(listEntitiesResponse);

  while (listEntitiesResponse.nextToken() != null) {
   listEntitiesRequest = ListEntitiesRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityType(ENTITY_TYPE_RESALE_AUTHORIZATION)
     .maxResults(10)
     .ownershipType(OWNERSHIP_TYPE_SHARED)
     .nextToken(listEntitiesResponse.nextToken())
     .build();

   listEntitiesResponse =
 marketplaceCatalogClient.listEntities(listEntitiesRequest);

   responseList.add(listEntitiesResponse);
  }
  return responseList;
 }

}
```

- Untuk detail API, lihat ListEntitiesdi Referensi AWS SDK for Java 2.x API.

Publikasikan CPPO dan tambahkan EULA pembeli

Contoh kode berikut menunjukkan cara mempublikasikan CPPO dan menambahkan EULA pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
           {
```

```
                "Type": "LegalTerm",
                "Documents": [
                 {
                  "Type": "CustomEula",
                  "Url": "https://s3.amazonaws.com/sample-bucket/custom-eula.pdf"
                 }
                ]
            }
        ]
          }
         },
         {
             "ChangeType": "UpdateTargeting",
             "Entity": {
                 "Type": "Offer@1.0",
                 "Identifier": "$CreateCPPOoffer.Entity.Identifier"
             },
             "DetailsDocument": {
                 "PositiveTargeting": {
                     "BuyerAccounts": ["222222222222"]
                     }
             }
         },
         {
             "ChangeType": "UpdateAvailability",
             "Entity": {
                 "Type": "Offer@1.0",
                 "Identifier": "$CreateCPPOoffer.Entity.Identifier"
             },
             "DetailsDocument": {
                 "AvailabilityEndDate": "2023-07-31"
                 }
         },
         {
             "ChangeType": "UpdateValidityTerms",
             "Entity": {
                 "Type": "Offer@1.0",
                 "Identifier": "$CreateCPPOoffer.Entity.Identifier"
             },
             "DetailsDocument": {
                 "Terms": [
                     {
                         "Type": "ValidityTerm",
                         "AgreementDuration": "P450D"
```

```
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan CPPO menggunakan otorisasi penjualan kembali satu kali dan perbarui markup harga

Contoh kode berikut menunjukkan cara mempublikasikan CPPO menggunakan otorisasi penjualan kembali satu kali pada produk AMI, SaaS, atau Container dan memperbarui markup harga.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
```

```
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateMarkup",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Percentage" : "5.0"
        }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": ["222222222222"]
                    }
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-07-31"
                }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P450D"
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan draf CPPO dan perbarui markup harga

Contoh kode berikut menunjukkan cara mempublikasikan draf CPPO dan memperbarui markup harga.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateOfferUsingResaleAuthorization",
            "Entity": {
            "Type": "Offer@1.0"
            },
            "ChangeName": "CreateCPPOoffer",
            "DetailsDocument": {
                "ResaleAuthorizationId":"resaleauthz-1111111111111",
                "Name": "Test Offer",
                "Description":"Test product"
            }
        },
        {
            "ChangeType": "UpdateMarkup",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Percentage" : "5.0"
        }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": ["222222222222"]
                    }
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-07-31"
                }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P450D"
                    }
                ]
             }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateCPPOoffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Perbarui tanggal kedaluwarsa CPPO

Contoh kode berikut menunjukkan cara memperbarui tanggal kedaluwarsa CPPO untuk memberi pembeli lebih banyak waktu untuk mengevaluasi dan menerima penawaran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2025-07-31"
                }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Produk kontainer

Buat produk kontainer draf dengan draf penawaran umum

Contoh kode berikut menunjukkan cara membuat produk kontainer draf dengan draf penawaran umum.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog":"AWSMarketplace",
    "changeSet":[
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "ContainerProduct@1.0"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk kontainer terbatas dengan penawaran umum dan harga kontrak

Contoh kode berikut menunjukkan cara membuat produk kontainer terbatas dengan penawaran umum, harga kontrak, dan EULA standar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "ContainerProduct@1.0"
            },
            "DetailsDocument": {},
            "ChangeName": "CreateProductChange"
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "Categories": [
                    "Streaming solutions"
                ],
                "ProductTitle": "ContainerProduct",
                "AdditionalResources": [],
                "LongDescription": "Long description goes here",
```

```
                "SearchKeywords": [
                    "container streaming"
                ],
                "ShortDescription": "Description1",
                "Highlights": [
                    "Highlight 1",
                    "Highlight 2"
                ],
                "SupportDescription": "No support available",
                "VideoUrls": []
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "Cores",
                    "Description": "Cores per cluster",
                    "Name": "Cores",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
```

```
        {
            "ChangeType": "AddRepositories",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Repositories": [
                    {
                        "RepositoryName": "uniquerepositoryname",
                        "RepositoryType": "ECR"
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "ContainerProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            },
            "ChangeName": "CreateOfferChange"
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
```

```
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "Constraints": {
                                "MultipleDimensionSelection": "Disallowed",
                                "QuantityConfiguration": "Disallowed"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "Cores",
                                    "Price": "0.25"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
```

```
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "No refunds"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Some container offer Name",
                "Description": "Some interesting container offer description"
            }
        },
        {
            "ChangeType": "UpdateRenewalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "RenewalTerm"
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Entitas

Jelaskan semua entitas dalam satu panggilan

Contoh kode berikut menunjukkan bagaimana mendeskripsikan semua entitas dalam satu panggilan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeEntitiesRequest;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityDetail;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.BatchDescribeErrorDetail;

import java.util.Arrays;
import java.util.Map;

public class BatchDescribeEntities {

    /*
     * BatchDescribe my entities in a single call and
     *  check if it contains all the information I need to know about the entities.
     */
    public static void main(String[] args) {

        MarketplaceCatalogClient marketplaceCatalogClient =
                MarketplaceCatalogClient.builder()
                        .httpClient(ApacheHttpClient.builder().build())
                        .credentialsProvider(ProfileCredentialsProvider.create())
                        .build();

        BatchDescribeEntitiesRequest batchDescribeEntitiesRequest =
                BatchDescribeEntitiesRequest.builder()
                        .entityRequestList(Arrays.asList(
                                EntityRequest.builder()
                                        .catalog(AWS_MP_CATALOG).entityId(OFFER_ID)
                                        .build(),
                                EntityRequest.builder()

 .catalog(AWS_MP_CATALOG).entityId(PRODUCT_ID)
                                        .build()))
                        .build();

        BatchDescribeEntitiesResponse batchDescribeEntitiesResponse =
 marketplaceCatalogClient.batchDescribeEntities(batchDescribeEntitiesRequest);

        // Reading the successful entities response
        Map<String, EntityDetail> entityDetailsMap =
 batchDescribeEntitiesResponse.entityDetails();
        for (Map.Entry<String, EntityDetail> entry : entityDetailsMap.entrySet()) {
            System.out.println("EntityId: " + entry.getKey());
            ReferenceCodesUtils.formatOutput(entry.getValue());
        }

        // Logging the failed entities error details
```

```
        Map<String, BatchDescribeErrorDetail> entityErrorsMap =
 batchDescribeEntitiesResponse.errors();
        for (Map.Entry<String, BatchDescribeErrorDetail> entry :
 entityErrorsMap.entrySet()) {
            System.out.println(String.format("EntityId: %s, ErrorCode: %s,
 ErrorMessage: %s", entry.getKey(),
                    entry.getValue().errorCode(), entry.getValue().errorMessage()));
        }
    }
}
```

- Untuk detail API, lihat BatchDescribeEntitiesdi Referensi AWS SDK for Java 2.x API.

Buat daftar dan jelaskan semua penawaran yang terkait dengan suatu produk

Contoh kode berikut menunjukkan cara membuat daftar dan menjelaskan semua penawaran yang terkait dengan suatu produk.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListProductPrivateOffers {

 private static MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();
 /*
  * retrieve all private offer information related to a single product
  */
 public static void main(String[] args) {

  List<EntitySummary> entitySummaryList = getEntitySummaryList();

  // for each offer id, output the offer detail using DescribeEntity API

  for (EntitySummary entitySummary : entitySummaryList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entitySummary.entityId())
     .build();
   DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
   ReferenceCodesUtils.formatOutput(describeEntityResponse);
  }
 }
 public static List<EntitySummary> getEntitySummaryList() {
  // define list entities filters

  EntityTypeFilters entityTypeFilters =
```

```
    EntityTypeFilters.builder()
    .offerFilters(OfferFilters.builder()
      .targeting(OfferTargetingFilter.builder()
        .valueListWithStrings(OFFER_TARGETING_BUYERACCOUNTS)
        .build())
      .productId(OfferProductIdFilter.builder()
        .valueList(PRODUCT_ID)
        .build())
      .build())
    .build();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(ENTITY_TYPE_OFFER).maxResults(50)
   .entityTypeFilters(entityTypeFilters)
   .nextToken(null)
   .build();

 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

 // save all entitySummary of the results into entitySummaryList

 List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

 entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

 while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER).maxResults(50)
    .entityTypeFilters(entityTypeFilters)
    .nextToken(listEntitiesResponse.nextToken())
    .build();
  listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
  entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
 }
 return entitySummaryList;
}
```

```
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DescribeEntity
  - ListEntities

## Penawaran

Buat dimensi khusus untuk produk SaaS dan buat penawaran pribadi

Contoh kode berikut menunjukkan cara membuat dimensi khusus untuk produk SaaS dan membuat penawaran pribadi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": [
                {
                    "Types": [
                        "Entitled"
                    ],
```

```
                    "Description": "Custom Pricing 4 w/ terms and coverage to be
defined in Private Offer",
                    "Unit": "Units",
                    "Key": "Custom4",
                    "Name": "Custom Pricing 4"
                }
            ]
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            },
            "ChangeName": "CreateOfferChange"
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Private Test Offer - SaaS Contract Product",
                "Description": "Private Test Offer - SaaS Contract Product"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
        {
```

```
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Constraints": {
```

```
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "Custom4",
                                    "Price": "300.0"
                                }
                            ],
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P36M"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "ReleaseOffer",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {}
    }
],
"ChangeSetName": "PrivateOfferWithCustomDimension"
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Buat draf penawaran pribadi untuk produk AMI atau SaaS

Contoh kode berikut menunjukkan cara membuat draf penawaran pribadi untuk produk AMI atau SaaS sehingga Anda dapat memeriksanya secara internal sebelum dipublikasikan ke pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "Test Private Offer"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan kontrak dan Pay-As-You-Go harga untuk produk SaaS

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan kontrak dan Pay-As-You-Go harga untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
```

```
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "150"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "300"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "CustomEula",
                            "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                        }
                    ]
                }
            ]
        }
    },
```

```
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga kontrak dan jadwal pembayaran yang fleksibel untuk produk SaaS

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga kontrak dan jadwal pembayaran yang fleksibel untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Grants": [
                            {
                                "DimensionKey": "BasicService",
                                "MaxQuantity": 1
                            },
                            {
                                "DimensionKey": "PremiumService",
                                "MaxQuantity": 1
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P12M"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "PaymentScheduleTerm",
                        "CurrencyCode": "USD",
                        "Schedule": [
                            {
                                "ChargeDate": "2024-01-01",
                                "ChargeAmount": "200.00"
                            },
                            {
                                "ChargeDate": "2024-02-01",
                                "ChargeAmount": "170.00"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga kontrak untuk produk Container

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga kontrak untuk produk Container.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
```

```
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for Container product using AWS
Marketplace API Reference Code",
                "Description": "Test private offer for Container product with
contract pricing using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "Constraints": {
                                    "MultipleDimensionSelection": "Disallowed",
                                    "QuantityConfiguration": "Disallowed"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "ReqPerHour",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
```

```
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga kontrak untuk produk AMI

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga kontrak untuk produk AMI.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly annual pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
```

```
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
```

```
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "ReadOnlyUsers",
                                        "Price": "220.00"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga tahunan per jam dan jadwal pembayaran yang fleksibel untuk produk AMI

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga tahunan per jam dan jadwal pembayaran yang fleksibel untuk produk AMI.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly annual pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.17"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Duration": "P365D",
                        "Grants": [
                            {
                                "DimensionKey": "t2.micro",
                                "MaxQuantity": 1
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
```

```
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P650D"
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePaymentScheduleTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "PaymentScheduleTerm",
                        "CurrencyCode": "USD",
                        "Schedule": [
                            {
                                "ChargeDate": "2024-01-01",
                                "ChargeAmount": "200.00"
                            },
                            {
                                "ChargeDate": "2024-02-01",
                                "ChargeAmount": "170.00"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga tahunan per jam untuk produk AMI

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga tahunan per jam untuk produk AMI.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly annual pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
```

```
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "0.17"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P365D"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.micro",
                                        "Price": "220.00"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
```

```
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "ValidityTerm",
                        "AgreementDuration": "P650D"
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga per jam untuk produk AMI

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga per jam untuk produk AMI.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for AmiProduct using AWS Marketplace API
 Reference Code",
                "Description": "Test private offer with hourly pricing for
 AmiProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
```

```
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PositiveTargeting": {
                "BuyerAccounts": [
                    "111111111111",
                    "222222222222"
                ]
            }
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateAvailability",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "AvailabilityEndDate": "2025-01-01"
        }
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
```

```
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Usage",
            "Terms": [
                {
                    "Type": "UsageBasedPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.micro",
                                    "Price": "0.15"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "ValidityTerm",
                    "AgreementDuration": "P30D"
                }
            ]
        }
    },
    {
        "ChangeType": "ReleaseOffer",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
```

```
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga berlangganan untuk produk SaaS

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga berlangganan untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
API Reference Code",
                "Description": "Test private offer with subscription pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.13"
                                    },
                                    {
```

```
                                    "DimensionKey": "WorkloadMedium",
                                    "Price": "0.22"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateValidityTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "ValidityTerm",
                    "AgreementDuration": "P30D"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "CustomEula",
                            "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                        }
                    ]
                }
            ]
```

```
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AavailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi dengan harga kontrak berjenjang untuk produk SaaS

Contoh kode berikut menunjukkan cara membuat penawaran pribadi dengan harga kontrak berjenjang untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test private offer for SaaSProduct using AWS Marketplace
 API Reference Code",
                "Description": "Test private offer with subscription pricing for
 SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
```

```
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "120.00"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "200.00"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Disallowed",
                                    "QuantityConfiguration": "Disallowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
```

```
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran uji coba gratis publik dengan harga berlangganan untuk produk SaaS

Contoh kode berikut menunjukkan cara membuat penawaran uji coba gratis publik dengan harga berlangganan untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "prod-1111111111111"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public free trial offer for SaaSProduct using AWS
 Marketplace API Reference Code",
                "Description": "Test public free trial offer with subscription
 pricing for SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Free",
                "Terms": [
                    {
                        "Type": "FreeTrialPricingTerm",
                        "Duration": "P20D",
                        "Grants": [
                            {
                                "DimensionKey": "WorkloadSmall"
                            },
                            {
                                "DimensionKey": "WorkloadMedium"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat penawaran pribadi pengganti dengan harga kontrak

Contoh kode berikut menunjukkan cara membuat penawaran pribadi pengganti dari perjanjian yang ada dengan harga kontrak.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType" : "CreateReplacementOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateReplacementOffer",
            "DetailsDocument": {
                "AgreementId": "agmt-11111111111111111111111"
            }
        },
        {
```

```
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test replacement offer for SaaSProduct using AWS
Marketplace API Reference Codes",
                "Description": "Test private replacement offer with contract pricing
for SaaSProduct"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "FixedUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "Price": "0.0",
                        "Grants": [
                            {
                                "DimensionKey": "BasicService",
                                "MaxQuantity": 2
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateValidityTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
```

```
                    "Type": "ValidityTerm",
                    "AgreementEndDate": "2024-01-30"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdatePaymentScheduleTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOffer.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "PaymentScheduleTerm",
                    "CurrencyCode": "USD",
                    "Schedule": [
                        {
                            "ChargeDate": "2024-01-01",
                            "ChargeAmount": "0"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateReplacementOffer.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
```

```
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-12-31"
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateReplacementOffer.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

### Jelaskan penawaran umum

Contoh kode berikut menunjukkan bagaimana menggambarkan penawaran umum.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;
```

```
import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {

  String offerId = args.length > 0 ? args[0] : OFFER_ID;

  DescribeEntityResponse describeEntityResponse =
 getDescribeEntityResponse(offerId);

  ReferenceCodesUtils.formatOutput(describeEntityResponse);
 }

 public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeEntityRequest describeEntityRequest =
    DescribeEntityRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityId(offerId)
    .build();

  DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
  return describeEntityResponse;
```

```
 }
}
```

- Untuk detail API, lihat DescribeEntitydi Referensi AWS SDK for Java 2.x API.

Kedaluwarsa draf penawaran pribadi

Contoh kode berikut menunjukkan cara mengatur tanggal kedaluwarsa penawaran pribadi ke tanggal di masa lalu sehingga pembeli tidak lagi melihat penawaran tersebut.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-01-01"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Daftar semua penawaran pribadi

Contoh kode berikut menunjukkan cara membuat daftar semua penawaran pribadi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferAvailabilityEndDateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferAvailabilityEndDateFilterDate
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferBuyerAccountsFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferReleaseDateFilter;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferReleaseDateFilterDateRange;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListAllPrivateOffers {

 /*
  * List all my private offers and sort or filter them by Offer Publish Date, Offer
 Expiry Date and Buyer IDs
  *
  * OfferTargetingFilter = BuyerAccounts (private offer);
  * OfferBuyerAccountsFilter: Buyer IDs filter
  * OfferAvailabilityEndDateFilter : Offer Expiry Date filter
  * OfferReleaseDateFilter : Offer Publish Date filter
  */

 private static MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 public static void main(String[] args) {

  String offerReleaseDateAfterValue = "2023-01-01T23:59:59Z";
  String offerAvailableEndDateAfterValue = "2040-12-24T23:59:59Z";

  List<EntitySummary> entitySummaryList =
 getEntitySummaryList(offerReleaseDateAfterValue, offerAvailableEndDateAfterValue);

  // for each offer id, output the offer detail using DescribeEntity API


  for (EntitySummary entitySummary : entitySummaryList) {
   DescribeEntityRequest describeEntityRequest =
     DescribeEntityRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .entityId(entitySummary.entityId())
     .build();
   DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
   ReferenceCodesUtils.formatOutput(describeEntityResponse);
  }
```

```
}

public static List<EntitySummary> getEntitySummaryList (String
offerReleaseDateAfterValue, String offerAvailableEndDateAfterValue) {

 EntityTypeFilters entityTypeFilters =
   EntityTypeFilters.builder()
   .offerFilters(OfferFilters.builder()
     .targeting(OfferTargetingFilter.builder()
       .valueListWithStrings(OFFER_TARGETING_BUYERACCOUNTS)
       .build())
     .buyerAccounts(OfferBuyerAccountsFilter.builder()
       .wildCardValue(BUYER_ACCOUNT_ID)
       .build())
     .availabilityEndDate(OfferAvailabilityEndDateFilter.builder()
       .dateRange(OfferAvailabilityEndDateFilterDateRange.builder()
         .afterValue(offerAvailableEndDateAfterValue).build())
       .build())
     .releaseDate(OfferReleaseDateFilter.builder()
       .dateRange(OfferReleaseDateFilterDateRange.builder()
         .afterValue(offerReleaseDateAfterValue)
         .build())
       .build())
     .build())
   .build();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(ENTITY_TYPE_OFFER).maxResults(10)
   .entityTypeFilters(entityTypeFilters)
   .nextToken(null)
   .build();

 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
 List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

 entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

 while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
```

```
        .catalog(AWS_MP_CATALOG)
        .entityType(ENTITY_TYPE_OFFER)
        .maxResults(10)
        .entityTypeFilters(entityTypeFilters)
        .nextToken(listEntitiesResponse.nextToken())
        .build();
      listEntitiesResponse =
    marketplaceCatalogClient.listEntities(listEntitiesRequest);
      entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
     }

     return entitySummaryList;
    }

}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Daftar penawaran publik dan pribadi yang dirilis untuk ID produk tertentu

Contoh kode berikut menunjukkan cara membuat daftar penawaran publik dan pribadi yang dirilis untuk ID produk tertentu.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;
```

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferStateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListProductPublicOrPrivateReleasedOffers {

 /*
  * List released Public/Private offers for a specific product id.
  * Example below is to list released public offers.
  * To change to released private offers, change OFFER_TARGETING_NONE (None) to
 OFFER_TARGETING_BUYERACCOUNTS(BuyerAccounts)
  */
 public static void main(String[] args) {

  List<EntitySummary> entitySummaryList = getEntitySummaryLIst();
  ReferenceCodesUtils.formatOutput(entitySummaryList);
 }

 public static List<EntitySummary> getEntitySummaryLIst() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // define list entities filters

  EntityTypeFilters entityTypeFilters =
    EntityTypeFilters.builder()
    .offerFilters(OfferFilters.builder()
      .targeting(OfferTargetingFilter.builder()
        .valueListWithStrings(OFFER_TARGETING_NONE)
        .build())
```

```
      .state(OfferStateFilter.builder()
        .valueListWithStrings(OFFER_STATE_RELEASED)
        .build())
      .productId(OfferProductIdFilter.builder()
        .valueList(PRODUCT_ID)
        .build())
      .build())
    .build();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(ENTITY_TYPE_OFFER)
   .maxResults(10)
   .entityTypeFilters(entityTypeFilters)
   .nextToken(null)
   .build();

 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

 // save all entitySummary of the results into entitySummaryList

 List<EntitySummary> entitySummaryList = new ArrayList<EntitySummary>();

 entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

 while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(ENTITY_TYPE_OFFER)
    .maxResults(10)
    .entityTypeFilters(entityTypeFilters)
    .nextToken(listEntitiesResponse.nextToken())
    .build();
  listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
  entitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
 }
 return entitySummaryList;
}
```

```
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui penawaran untuk menerapkan kontrak dengan Pay-As-You-Go harga

Contoh kode berikut menunjukkan cara memperbarui penawaran untuk menerapkan kontrak dengan Pay-As-You-Go harga.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
```

```
                                    "DimensionKey": "WorkloadSmall",
                                    "Price": "0.15"
                                },
                                {
                                    "DimensionKey": "WorkloadMedium",
                                    "Price": "0.25"
                                }
                            ]
                        }
                    ]
                },
                {
                    "Type": "ConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "150"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "300"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui penawaran untuk menerapkan harga tahunan per jam

Contoh kode berikut menunjukkan cara memperbarui penawaran untuk menerapkan harga tahunan per jam.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "0.13"
                                    }
                                ]
                            }
                        ]
```

```
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P365D"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "m5.large",
                                        "Price": "20.03"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Memperbarui penawaran untuk menerapkan penargetan ke wilayah geografis tertentu

Contoh kode berikut menunjukkan cara memperbarui penawaran untuk menerapkan penargetan ke wilayah geografis tertentu.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "CountryCodes": [
                        "US",
                        "ES",
                        "FR",
                        "AU"
                    ]
                }
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui nama dan deskripsi penawaran umum

Contoh kode berikut menunjukkan cara memperbarui nama dan deskripsi penawaran umum.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui EULA penawaran

Contoh kode berikut menunjukkan cara memperbarui EULA penawaran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Name": "New offer name",
                "Description": "New offer description"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui tanggal kedaluwarsa penawaran pribadi ke tanggal yang akan datang

Contoh kode berikut menunjukkan cara memperbarui tanggal kedaluwarsa penawaran pribadi ke tanggal di masa depan untuk memberi pembeli lebih banyak waktu untuk mengevaluasi dan menerima penawaran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2026-01-01"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui durasi uji coba gratis dari penawaran uji coba gratis publik untuk produk SaaS

Contoh kode berikut menunjukkan cara memperbarui durasi uji coba gratis dari penawaran uji coba gratis publik untuk produk SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "FreeTrialPricingTerm",
                        "Duration": "P21D",
                        "Grants": [
                            {
                                "DimensionKey": "WorkloadSmall"
                            },
                            {
                                "DimensionKey": "WorkloadMedium"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui kebijakan pengembalian dana dari suatu penawaran

Contoh kode berikut menunjukkan cara memperbarui kebijakan pengembalian dana penawaran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "offer-1111111111111"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Updated refund policy description"
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

# Produk

Jelaskan produk AMI, SaaS, atau Kontainer

Contoh kode berikut menunjukkan cara mendeskripsikan produk AMI, SaaS, atau Container dan periksa apakah produk tersebut berisi semua informasi yang ingin Anda ketahui tentang produk tersebut.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {

  String offerId = args.length > 0 ? args[0] : OFFER_ID;
```

```
 DescribeEntityResponse describeEntityResponse =
getDescribeEntityResponse(offerId);

 ReferenceCodesUtils.formatOutput(describeEntityResponse);
}

public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeEntityRequest describeEntityRequest =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId)
   .build();

 DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
 return describeEntityResponse;
}
}
```

- Untuk detail API, lihat DescribeEntitydi Referensi AWS SDK for Java 2.x API.

Cantumkan semua produk AMI, SaaS, atau Container dan penawaran publik terkait

Contoh kode berikut menunjukkan cara mencantumkan semua produk AMI, SaaS, atau Container dan penawaran publik terkait.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
package com.example.awsmarketplace.catalogapi;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.EntitySummary;
import software.amazon.awssdk.services.marketplacecatalog.model.EntityTypeFilters;
import software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.ListEntitiesResponse;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferFilters;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferProductIdFilter;
import software.amazon.awssdk.services.marketplacecatalog.model.OfferStateFilter;
import
 software.amazon.awssdk.services.marketplacecatalog.model.OfferTargetingFilter;

public class ListEntities {

 /*
  * List all my AMI or SaaS or Container products and associated public offers
  */
 public static void main(String[] args) {

  Map<String, List<EntitySummary>> allProductsWithOffers =
 getAllProductsWithOffers();

  ReferenceCodesUtils.formatOutput(allProductsWithOffers);
 }

 public static Map<String, List<EntitySummary>> getAllProductsWithOffers() {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
```

```
    .build();

 Map<String, List<EntitySummary>> allProductsWithOffers = new HashMap<String,
List<EntitySummary>> ();

 // get all product entities
 List<EntitySummary> productEntityList = new ArrayList<EntitySummary>();

 ListEntitiesRequest listEntitiesRequest =
   ListEntitiesRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityType(PRODUCT_TYPE_AMI)
   .maxResults(10)
   .nextToken(null)
   .build();


 ListEntitiesResponse listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

 productEntityList.addAll(listEntitiesResponse.entitySummaryList());


 while (listEntitiesResponse.nextToken() != null) {
  listEntitiesRequest =
    ListEntitiesRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityType(PRODUCT_TYPE_AMI)
    .maxResults(10)
    .nextToken(listEntitiesResponse.nextToken())
    .build();
  listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
  productEntityList.addAll(listEntitiesResponse.entitySummaryList());
 }

 // loop through each product entity and get the public released offers associated
using product id filter

 for ( EntitySummary productEntitySummary : productEntityList) {
  EntityTypeFilters entityTypeFilters =
    EntityTypeFilters.builder()
    .offerFilters(OfferFilters.builder()
      .targeting(OfferTargetingFilter.builder()
```

```
          .valueListWithStrings(OFFER_TARGETING_NONE)
          .build())
        .state(OfferStateFilter.builder()
          .valueListWithStrings(OFFER_STATE_RELEASED)
          .build())
        .productId(OfferProductIdFilter.builder()
          .valueList(productEntitySummary.entityId())
          .build())
        .build())
      .build();

    listEntitiesRequest =
      ListEntitiesRequest.builder()
      .catalog(AWS_MP_CATALOG)
      .entityType(ENTITY_TYPE_OFFER)
      .maxResults(10)
      .entityTypeFilters(entityTypeFilters)
      .nextToken(null)
      .build();

    listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);

    // save all entitySummary of the results into entitySummaryList

    List<EntitySummary> offerEntitySummaryList = new ArrayList<EntitySummary>();

    offerEntitySummaryList.addAll(listEntitiesResponse.entitySummaryList());

    while ( listEntitiesResponse.nextToken() != null &&
listEntitiesResponse.nextToken().length() > 0) {
     listEntitiesRequest =
       ListEntitiesRequest.builder()
       .catalog(AWS_MP_CATALOG)
       .entityType(ENTITY_TYPE_OFFER)
       .maxResults(10)
       .entityTypeFilters(entityTypeFilters)
       .nextToken(listEntitiesResponse.nextToken())
       .build();
     listEntitiesResponse =
marketplaceCatalogClient.listEntities(listEntitiesRequest);
     offerEntitySummaryList.addAll(listEntitiesResponse.entitySummaryList());
    }
```

```
    // save final results into map; key = product id; value = offer entity summary
 list

    allProductsWithOffers.put(productEntitySummary.entityId(),
 offerEntitySummaryList);
  }
  return allProductsWithOffers;
 }

}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DescribeEntity
  - ListEntities

## Otorisasi penjualan kembali

Buat draf otorisasi penjualan kembali

Contoh kode berikut menunjukkan cara membuat draf otorisasi penjualan kembali untuk semua jenis produk sehingga Anda dapat memeriksanya secara internal sebelum memublikasikan ke Mitra Saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
```

```
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Jelaskan otorisasi penjualan kembali

Contoh kode berikut menunjukkan bagaimana menggambarkan otorisasi penjualan kembali.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.catalogapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
```

```
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class DescribeEntity {

 /*
  * Describe my AMI or SaaS or Container product and check if it contains all the
 information I need to know about the product
  */
 public static void main(String[] args) {

  String offerId = args.length > 0 ? args[0] : OFFER_ID;

  DescribeEntityResponse describeEntityResponse =
 getDescribeEntityResponse(offerId);

  ReferenceCodesUtils.formatOutput(describeEntityResponse);
 }

 public static DescribeEntityResponse getDescribeEntityResponse(String offerId) {
  MarketplaceCatalogClient marketplaceCatalogClient =
    MarketplaceCatalogClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeEntityRequest describeEntityRequest =
    DescribeEntityRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityId(offerId)
    .build();

  DescribeEntityResponse describeEntityResponse =
 marketplaceCatalogClient.describeEntity(describeEntityRequest);
  return describeEntityResponse;
 }
}
```

- Untuk detail API, lihat DescribeEntitydi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dengan penawaran pribadi

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali satu kali dengan penawaran pribadi sehingga Mitra Saluran dapat menggunakannya untuk membuat Penawaran Pribadi Mitra Saluran (CPPO).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
```

```
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
```

```
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa untuk produk AMI dengan harga tahunan per jam sehingga Mitra Saluran dapat menggunakannya untuk membuat CPPO.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa dan EULA

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa untuk semua jenis produk dan menambahkan EULA khusus untuk dikirim ke pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
```

```
            "ResellerAccountId": "111111111111"
        }
    },
    {
        "ChangeType": "ReleaseResaleAuthorization",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "UpdateAvailability",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "AvailabilityEndDate": "2023-05-31"
        }
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "ResaleConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.small",
                                    "Price": "150"
                                }
```

```
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa dan dokumentasi kontrak pengecer

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa untuk semua jenis produk dan menambahkan dokumentasi kontrak pengecer antara ISV dan Mitra Saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
```

```
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    },
                    {
                        "Type": "ResaleLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomResellerContract",
                                "Url": "https://s3.amazonaws.com/aws-mp-standard-
contracts/Standard-Contact-for-AWS-Marketplace-2022-07-14.pdf"}
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna dengan kedaluwarsa dan tambahkan akun pembeli tertentu

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali multi-guna dengan tanggal kedaluwarsa untuk semua jenis produk dan menambahkan akun pembeli tertentu untuk penjualan kembali.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-05-31"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "111111111111"
                            ]
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa untuk produk AMI dengan harga tahunan per jam sehingga CP dapat menggunakannya untuk membuat CPPO.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
```

```
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
```

```
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa dan EULA

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa untuk jenis produk apa pun dan menambahkan EULA khusus untuk dikirim ke pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
```

```
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa dan dokumentasi kontrak pengecer

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa untuk jenis produk apa pun dan menambahkan dokumentasi kontrak pengecer antara ISV dan Mitra Saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
```

```
                        ]
                    },
                    {
                        "Type": "ResaleLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomResellerContract",
                                "Url": "https://s3.amazonaws.com/aws-mp-standard-
contracts/Standard-Contact-for-AWS-Marketplace-2022-07-14.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali multi-guna tanpa kedaluwarsa dan tambahkan akun pembeli tertentu

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali multi-guna tanpa tanggal kedaluwarsa untuk jenis produk apa pun dan menambahkan akun pembeli tertentu untuk penjualan kembali.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
```

```
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
```

```
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateBuyerTargetingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "BuyerTargetingTerm",
                    "PositiveTargeting": {
                        "BuyerAccounts": [
                            "111111111111"
                        ]
                    }
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "BuyerLegalTerm",
                    "Documents": [
                        {
                            "Type": "CustomEula",
```

```
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dan tambahkan jadwal pembayaran Fleksibel

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali satu kali untuk semua jenis produk dan menambahkan jadwal pembayaran Fleksibel.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
```

```
            "Name": "TestResaleAuthorization",
            "Description": "Worldwide ResaleAuthorization for Test Product",
            "ResellerAccountId": "111111111111"
        }
    },
    {
        "ChangeType": "ReleaseResaleAuthorization",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "ResaleFixedUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "Price": "0.00",
                    "Duration": "P12M",
                    "Grants": [
                      {
                        "DimensionKey": "Users",
                        "MaxQuantity": 10
                      }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdatePaymentScheduleTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
```

```
                "Terms": [
                    {
                        "Type": "ResalePaymentScheduleTerm",
                        "CurrencyCode": "USD",
                        "Schedule": [
                            {
                                "ChargeDate": "2023-09-01",
                                "ChargeAmount": "200.00"
                            },
                            {
                                "ChargeDate": "2023-12-01",
                                "ChargeAmount": "250.00"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "AvailabilityEndDate": "2023-06-30",
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
```

```
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dan tambahkan EULA

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali satu kali untuk semua jenis produk dan menambahkan EULA khusus untuk dikirim ke pembeli.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
```

```
            "ResellerAccountId": "111111111111"
        }
    },
    {
        "ChangeType": "ReleaseResaleAuthorization",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {}
    },
    {
        "ChangeType": "UpdateAvailability",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "OffersMaxQuantity": 1
        }
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "ResaleAuthorization@1.0",
            "Identifier": "$ResaleAuthorization.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "ResaleConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "t2.small",
                                    "Price": "150"
                                }
```

```
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dan tambahkan akun pembeli tertentu

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali satu kali untuk semua jenis produk dan menambahkan akun pembeli tertentu untuk penjualan kembali.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
```

```
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": "1"
            }
        },
        {
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "111111111111"
                            ]
                        }
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dan tambahkan dokumentasi kontrak pengecer

Contoh kode berikut menunjukkan cara menerbitkan otorisasi penjualan kembali satu kali untuk semua jenis produk dan menambahkan dokumentasi kontrak pengecer antara ISV dan Mitra Saluran.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "ReleaseResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ResaleConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "t2.small",
                                        "Price": "150"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
```

```
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerLegalTerm",
                        "Documents": [
                            {
                                "Type": "CustomEula",
                                "Url": "https://s3.amazonaws.com/sample-bucket/
custom-eula.pdf"
                            }
                        ]
                    }
                ]
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan otorisasi penjualan kembali satu kali dan tambahkan apakah itu pembaruan

Contoh kode berikut menunjukkan cara mempublikasikan otorisasi penjualan kembali satu kali untuk semua jenis produk dan menambahkan apakah itu pembaruan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
```

```
            "ChangeType": "CreateResaleAuthorization",
            "ChangeName": "ResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0"
            },
            "DetailsDocument": {
                "ProductId": "prod-1111111111111",
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "ResellerAccountId": "111111111111"
            }
        },
        {
            "ChangeType": "UpdateBuyerTargetingTerms",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "BuyerTargetingTerm",
                        "PositiveTargeting": {
                            "BuyerAccounts": [
                                "222222222222"
                            ]
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateAvailability",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "OffersMaxQuantity": 1
            }
        },
        {
            "ChangeType":"UpdateInformation",
            "Entity": {
```

```
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "$ResaleAuthorization.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product",
                "PreExistingBuyerAgreement": {
                    "AcquisitionChannel": "AwsMarketplace",
                    "PricingModel": "Contract"
                }
             }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Batasi otorisasi penjualan kembali

Contoh kode berikut menunjukkan cara membatasi otorisasi penjualan kembali.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "RestrictResaleAuthorization",
            "Entity": {
                "Type": "ResaleAuthorization@1.0",
                "Identifier": "resaleauthz-1111111111111"
```

```
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui nama dan deskripsi otorisasi penjualan kembali satu kali atau multi-guna

Contoh kode berikut menunjukkan cara memperbarui nama dan deskripsi otorisasi penjualan kembali satu kali atau multi-guna sebelum menerbitkan untuk jenis produk apa pun.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType":"UpdateInformation",
            "Entity": {
             "Type": "ResaleAuthorization@1.0",
             "Identifier": "resaleauthz-1111111111111"
            },
            "DetailsDocument": {
             "Name": "TestResaleAuthorization",
                "Description": "Worldwide ResaleAuthorization for Test Product"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

## Produk SaaS

Buat draf produk SaaS dengan draf penawaran umum

Contoh kode berikut menunjukkan cara membuat konsep produk SaaS dengan draf penawaran umum.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "DetailsDocument": {
              "ProductTitle": "Sample product"
            }
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "DetailsDocument": {
```

```
                "ProductId": "$CreateProductChange.Entity.Identifier",
                "Name": "Test Offer"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk SaaS publik atau terbatas dan penawaran publik dengan harga kontrak

Contoh kode berikut menunjukkan cara membuat produk SaaS publik atau terbatas dan penawaran publik dengan harga kontrak. Contoh ini menciptakan EULA standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
```

```
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
```

```
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Description": "Basic Service",
                    "Name": "Basic Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "PremiumService",
                    "Description": "Premium Service",
                    "Name": "Premium Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
                "Terms": [
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P1M"
                                },
```

```
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "20"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "25"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        },
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "150"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "300"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
```

```
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "SupportTerm",
                        "RefundPolicy": "Absolutely no refund, period."
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk SaaS publik atau terbatas dan penawaran publik dengan kontrak dengan harga Pay-As-You-Go

Contoh kode berikut menunjukkan cara membuat produk SaaS publik atau terbatas dan penawaran publik dengan kontrak dengan Pay-As-You-Go harga. Contoh ini menciptakan EULA standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
```

```
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
```

```
                }
            ]
        }
    },
    {
        "ChangeType": "AddDimensions",
        "Entity": {
            "Type": "SaaSProduct@1.0",
            "Identifier": "$CreateProductChange.Entity.Identifier"
        },
        "DetailsDocument": [
            {
                "Key": "BasicService",
                "Description": "Basic Service",
                "Name": "Basic Service",
                "Types": [
                    "Entitled"
                ],
                "Unit": "Units"
            },
            {
                "Key": "PremiumService",
                "Description": "Premium Service",
                "Name": "Premium Service",
                "Types": [
                    "Entitled"
                ],
                "Unit": "Units"
            },
            {
                "Key": "WorkloadSmall",
                "Description": "Workload: Per medium instance",
                "Name": "Workload: Per medium instance",
                "Types": [
                    "ExternallyMetered"
                ],
                "Unit": "Units"
            },
            {
                "Key": "WorkloadMedium",
                "Description": "Workload: Per large instance",
                "Name": "Workload: Per large instance",
                "Types": [
                    "ExternallyMetered"
```

```
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Contract",
```

```
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
                                    {
                                        "DimensionKey": "WorkloadMedium",
                                        "Price": "0.25"
                                    }
                                ]
                            }
                        ]
                    },
                    {
                        "Type": "ConfigurableUpfrontPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "Selector": {
                                    "Type": "Duration",
                                    "Value": "P12M"
                                },
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "150"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "300"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
```

```
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "SupportTerm",
                    "RefundPolicy": "Absolutely no refund, period."
                }
            ]
        }
    },
    {
        "ChangeType": "ReleaseOffer",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Buat produk SaaS publik atau terbatas dan penawaran publik dengan harga berlangganan

Contoh kode berikut menunjukkan cara membuat produk SaaS publik atau terbatas dan penawaran umum dengan harga berlangganan. Contoh ini menciptakan EULA standar atau kustom.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
            "ChangeName": "CreateProductChange",
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
```

```
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://s3.amazonaws.com/logos/sample.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "UpdateTargeting",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PositiveTargeting": {
                    "BuyerAccounts": [
                        "111111111111",
                        "222222222222"
                    ]
                }
            }
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
```

```
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl":"https://sample.amazonaws.com/
sample-saas-fulfillment-url"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "WorkloadSmall",
                    "Description": "Workload: Per medium instance",
                    "Name": "Workload: Per medium instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
                    "Unit": "Units"
                },
                {
                    "Key": "WorkloadMedium",
                    "Description": "Workload: Per large instance",
                    "Name": "Workload: Per large instance",
                    "Types": [
                        "ExternallyMetered"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
```

```
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "Entity": {
                "Type": "Offer@1.0"
            },
            "ChangeName": "CreateOfferChange",
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "Test public offer for SaaSProduct using AWS Marketplace API
Reference Code",
                "Description": "Test public offer with contract pricing for
SaaSProduct using AWS Marketplace API Reference Code"
            }
        },
        {
            "ChangeType": "UpdatePricingTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "PricingModel": "Usage",
                "Terms": [
                    {
                        "Type": "UsageBasedPricingTerm",
                        "CurrencyCode": "USD",
                        "RateCards": [
                            {
                                "RateCard": [
                                    {
                                        "DimensionKey": "WorkloadSmall",
                                        "Price": "0.15"
                                    },
```

```
                                {
                                    "DimensionKey": "WorkloadMedium",
                                    "Price": "0.25"
                                }
                            ]
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateLegalTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "LegalTerm",
                    "Documents": [
                        {
                            "Type": "StandardEula",
                            "Version": "2022-07-14"
                        }
                    ]
                }
            ]
        }
    },
    {
        "ChangeType": "UpdateSupportTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "Terms": [
                {
                    "Type": "SupportTerm",
                    "RefundPolicy": "Absolutely no refund, period."
                }
            ]
```

```
            }
        },
        {
            "ChangeType": "ReleaseOffer",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan produk SaaS dan penawaran publik terkait

Contoh kode berikut menunjukkan cara mempublikasikan produk SaaS dan penawaran publik terkait. Produk akan berada dalam keadaan terbatas secara default.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "CreateProduct",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "SaaSProduct@1.0"
            },
```

```
            "DetailsDocument": {}
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "ProductTitle": "Sample product",
                "ShortDescription": "Brief description",
                "LongDescription": "Detailed description",
                "Highlights": [
                    "Sample highlight"
                ],
                "SearchKeywords": [
                    "Sample keyword"
                ],
                "Categories": [
                    "Data Catalogs"
                ],
                "LogoUrl": "https://bucketname.s3.amazonaws.com/logo.png",
                "VideoUrls": [
                    "https://sample.amazonaws.com/awsmp-video-1"
                ],
                "AdditionalResources": []
            }
        },
        {
            "ChangeType": "AddDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Description": "Basic Service",
                    "Name": "Basic Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                },
```

```
                {
                    "Key": "PremiumService",
                    "Description": "Premium Service",
                    "Name": "Premium Service",
                    "Types": [
                        "Entitled"
                    ],
                    "Unit": "Units"
                }
            ]
        },
        {
            "ChangeType": "AddDeliveryOptions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "DeliveryOptions": [
                    {
                        "Details": {
                            "SaaSUrlDeliveryOptionDetails": {
                                "FulfillmentUrl": "https://www.aws.amazon.com/
marketplace/management"
                            }
                        }
                    }
                ]
            }
        },
        {
            "ChangeType": "ReleaseProduct",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "$CreateProductChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        },
        {
            "ChangeType": "CreateOffer",
            "ChangeName": "CreateOfferChange",
            "Entity": {
                "Type": "Offer@1.0"
            },
```

```
            "DetailsDocument": {
                "ProductId": "$CreateProductChange.Entity.Identifier"
            }
        },
        {
            "ChangeType": "UpdateInformation",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Name": "New Test Offer",
                "Description": "New offer description"
            }
        },
        {
            "ChangeType": "UpdateLegalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "LegalTerm",
                        "Documents": [
                            {
                                "Type": "StandardEula",
                                "Version": "2022-07-14"
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateSupportTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
```

```
                    "Type": "SupportTerm",
                    "RefundPolicy": "Updated refund policy description"
                }
            ]
        }
    },
    {
        "ChangeType": "UpdatePricingTerms",
        "Entity": {
            "Type": "Offer@1.0",
            "Identifier": "$CreateOfferChange.Entity.Identifier"
        },
        "DetailsDocument": {
            "PricingModel": "Contract",
            "Terms": [
                {
                    "Type": "ConfigurableUpfrontPricingTerm",
                    "CurrencyCode": "USD",
                    "RateCards": [
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P1M"
                            },
                            "RateCard": [
                                {
                                    "DimensionKey": "BasicService",
                                    "Price": "20"
                                },
                                {
                                    "DimensionKey": "PremiumService",
                                    "Price": "25"
                                }
                            ],
                            "Constraints": {
                                "MultipleDimensionSelection": "Allowed",
                                "QuantityConfiguration": "Allowed"
                            }
                        },
                        {
                            "Selector": {
                                "Type": "Duration",
                                "Value": "P12M"
                            },
```

```
                                "RateCard": [
                                    {
                                        "DimensionKey": "BasicService",
                                        "Price": "150"
                                    },
                                    {
                                        "DimensionKey": "PremiumService",
                                        "Price": "300"
                                    }
                                ],
                                "Constraints": {
                                    "MultipleDimensionSelection": "Allowed",
                                    "QuantityConfiguration": "Allowed"
                                }
                            }
                        ]
                    }
                ]
            }
        },
        {
            "ChangeType": "UpdateRenewalTerms",
            "Entity": {
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {
                "Terms": [
                    {
                        "Type": "RenewalTerm"
                    }
                ]
            }
        },
        {
            "ChangeType":"ReleaseOffer",
            "Entity":{
                "Type": "Offer@1.0",
                "Identifier": "$CreateOfferChange.Entity.Identifier"
            },
            "DetailsDocument": {}
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Publikasikan produk SaaS dan penawaran publik terkait dari draf yang ada

Contoh kode berikut menunjukkan cara mempublikasikan produk SaaS dan penawaran publik terkait dari draf yang ada. Produk akan berada dalam keadaan terbatas secara default.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
{
    "Catalog":"AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateVisibility",
            "ChangeName": "CreateProductChange",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-1111111111111"
            },
            "DetailsDocument": {
                "TargetVisibility": "Public"
            }
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

Perbarui dimensi pada produk AMI atau SaaS

Contoh kode berikut menunjukkan cara memperbarui dimensi pada produk AMI atau SaaS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Untuk menjalankan contoh ini, teruskan changeset JSON berikut ke **`RunChangesets`** dalam Utilities untuk memulai changeset dari bagian Utilities.

```
{
    "Catalog": "AWSMarketplace",
    "ChangeSet": [
        {
            "ChangeType": "UpdateDimensions",
            "Entity": {
                "Type": "SaaSProduct@1.0",
                "Identifier": "prod-111111111111"
            },
            "DetailsDocument": [
                {
                    "Key": "BasicService",
                    "Types": [
                        "Entitled"
                    ],
                    "Name": "Some new name",
                    "Description": "Some new description"
                }
            ]
        }
    ]
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

# Utilitas

Utilitas untuk memulai set perubahan

Contoh kode berikut menunjukkan bagaimana mendefinisikan utilitas untuk memulai changeset.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

Utilitas untuk memuat changeset dari file JSON dan mulai memprosesnya.

```
package com.example.awsmarketplace.catalogapi;

import java.io.ByteArrayInputStream;
import java.io.IOException;
import java.io.InputStream;
import java.util.ArrayList;
import java.util.List;

import org.apache.commons.io.IOUtils;
import org.apache.commons.lang3.StringUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.core.document.Document;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.protocols.json.internal.unmarshall.document.DocumentUnmarshaller;
import software.amazon.awssdk.protocols.jsoncore.JsonNodeParser;
import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import software.amazon.awssdk.services.marketplacecatalog.model.Change;
import software.amazon.awssdk.services.marketplacecatalog.model.Entity;
import
 software.amazon.awssdk.services.marketplacecatalog.model.StartChangeSetRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.StartChangeSetResponse;
import com.google.gson.Gson;
```

```
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;
import com.example.awsmarketplace.catalogapi.Entity.ChangeSet;
import com.example.awsmarketplace.catalogapi.Entity.ChangeSetEntity;
import com.example.awsmarketplace.catalogapi.Entity.Root;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;
import com.example.awsmarketplace.utils.StringSerializer;

/**
 * Before running this Java V2 code example, convert all Details attribute to
 DetailsDocument if any
 */

public class RunChangesets {

 private static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
   .create();

 public static void main(String[] args) {

  // input json can be specified here or passed from input parameter
  String inputChangeSetFile = "changeSets/offers/
CreateReplacementOfferFromAGWithContractPricingDetailDocument.json";

  if (args.length > 0)
   inputChangeSetFile = args[0];

  // parse the input changeset file to string for process
  String changeSetsInput = readChangeSetToString(inputChangeSetFile);

  // process the changeset request
  try {
   StartChangeSetResponse result = getChangeSetRequestResult(changeSetsInput);
   ReferenceCodesUtils.formatOutput(result);
  } catch (Exception e) {
   e.printStackTrace();
  }
 }

 public static StartChangeSetResponse getChangeSetRequestResult(String
 changeSetsInput) throws IOException {
```

```
//set up AWS credentials
MarketplaceCatalogClient marketplaceCatalogClient =
  MarketplaceCatalogClient.builder()
  .httpClient(ApacheHttpClient.builder().build())
  .credentialsProvider(ProfileCredentialsProvider.create())
  .build();

//changeset list to save all the changesets in the changesets file
List<Change> changeSetLists = new ArrayList<Change>();

// read all changesets into object
Root root = GSON.fromJson(changeSetsInput, Root.class);

// process each changeset and add each changeset request to changesets list
for (ChangeSet cs : root.changeSet) {

 ChangeSetEntity entity = cs.Entity;
 String entityType = entity.Type;
 String entityIdentifier = StringUtils.defaultIfBlank(entity.Identifier, null);
 Document detailsDocument = getDocumentFromObject(cs.DetailsDocument);

 Entity awsEntity =
   Entity.builder()
   .type(entityType)
   .identifier(entityIdentifier)
   .build();

 Change inputChangeRequest =
   Change.builder()
   .changeType(cs.ChangeType)
   .changeName(cs.ChangeName)
   .entity(awsEntity)
   .detailsDocument(detailsDocument)
   .build();

 changeSetLists.add(inputChangeRequest);
}

// process all changeset requests
StartChangeSetRequest startChangeSetRequest =
  StartChangeSetRequest.builder()
  .catalog(root.catalog)
  .changeSet(changeSetLists)
  .build();
```

```
 StartChangeSetResponse result =
marketplaceCatalogClient.startChangeSet(startChangeSetRequest);

 return result;
}

public static Document getDocumentFromObject(Object detailsObject) {

 String detailsString = "{}";
 try {
  detailsString = IOUtils.toString(new
ByteArrayInputStream(GSON.toJson(detailsObject).getBytes()), "UTF-8");
 } catch (IOException e) {
  e.printStackTrace();
 }

 JsonNodeParser jsonNodeParser = JsonNodeParser.create();
 Document doc = jsonNodeParser.parse(detailsString).visit(new
DocumentUnmarshaller());
 return doc;
}


public static String readChangeSetToString (String inputChangeSetFile) {

 InputStream changesetInputStream =
RunChangesets.class.getClassLoader().getResourceAsStream(inputChangeSetFile);

 String changeSetsInput = null;

 try {
  changeSetsInput = IOUtils.toString(changesetInputStream, "UTF-8");
 } catch (IOException e) {
  e.printStackTrace();
 }

 return changeSetsInput;

 }
}
```

- Untuk detail API, lihat StartChangeSetdi Referensi AWS SDK for Java 2.x API.

# AWS Marketplace Contoh API perjanjian menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS Marketplace Agreement API.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Perjanjian


## Perjanjian

Dapatkan semua perjanjian IDs

Contoh kode berikut menunjukkan cara mendapatkan semua kesepakatan IDs.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAllAgreementsIds {

 /*
  * Get all purchase agreements ids with party type = proposer;
  * Depend on the number of agreements in your account, this code may take some time
 to finish.
  */
 public static void main(String[] args) {

  List<String> agreementIds = getAllAgreementIds();

  ReferenceCodesUtils.formatOutput(agreementIds);

 }

 public static List<String> getAllAgreementIds() {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  // get all filters
  Filter partyType = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
    .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

  Filter agreementType = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
    .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

  List<Filter> searchFilters = new ArrayList<Filter>();

  searchFilters.addAll(Arrays.asList(partyType, agreementType));
```

```
  // Save all results in a list array
  List<AgreementViewSummary> agreementSummaryList = new
 ArrayList<AgreementViewSummary>();

  SearchAgreementsRequest searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .filters(searchFilters)
    .build();

  SearchAgreementsResponse searchAgreementsResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

  agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

  while (searchAgreementsResponse.nextToken() != null &&
 searchAgreementsResponse.nextToken().length() > 0) {
   searchAgreementsRequest =
     SearchAgreementsRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .nextToken(searchAgreementsResponse.nextToken())
     .filters(searchFilters)
     .build();
   searchAgreementsResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
   agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
  }

  List<String> agreementIds = new ArrayList<String>();
  for (AgreementViewSummary summary : agreementSummaryList) {
   agreementIds.add(summary.agreementId());
  }
  return agreementIds;
 }

}
```

- Untuk detail API, lihat SearchAgreementsdi Referensi AWS SDK for Java 2.x API.

Dapatkan semua perjanjian

Contoh kode berikut menunjukkan cara mendapatkan semua perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAllAgreements {

 /*
  * Get all purchase agreements with party type = proposer;
```

```
 * Depend on the number of agreements in your account, this code may take some time
to finish.
 */
public static void main(String[] args) {

 List<AgreementViewSummary> agreementSummaryList = getAllAgreements();

 ReferenceCodesUtils.formatOutput(agreementSummaryList);
}

public static List<AgreementViewSummary> getAllAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 // get all filters

 Filter partyType = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementType = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 List<Filter> searchFilters = new ArrayList<Filter>();

 searchFilters.addAll(Arrays.asList(partyType, agreementType));

 // Save all results in a list array

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(searchFilters)
   .build();

 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
```

```
  while (searchAgreementsResponse.nextToken() != null &&
 searchAgreementsResponse.nextToken().length() > 0) {
   searchAgreementsRequest =
     SearchAgreementsRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .nextToken(searchAgreementsResponse.nextToken())
     .filters(searchFilters).build();
   searchAgreementsResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
   agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
  }
  return agreementSummaryList;
 }

}
```

- Untuk detail API, lihat SearchAgreementsdi Referensi AWS SDK for Java 2.x API.

Dapatkan ID pelanggan dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan ID pelanggan dari perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class GetAgreementCustomerInfo {

 /*
  * Obtain metadata about the customer who created the agreement, such as the
 customer's AWS Account ID
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse =
 getDescribeAgreementResponse(agreementId);

  System.out.println("Customer's AWS Account ID is " +
 describeAgreementResponse.acceptor().accountId());

 }

 public static DescribeAgreementResponse getDescribeAgreementResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan detail keuangan dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan detail keuangan dari suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class GetAgreementFinancialDetails {

 /*
  * Obtain financial details, such as Total Contract Value of the agreement from a
 given agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;
```

```
  String totalContractValue = getTotalContractValue(agreementId);

  System.out.println("Total Contract Value is " + totalContractValue);

 }

 public static String getTotalContractValue(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

  String totalContractValue = "N/A";

  if ( describeAgreementResponse.estimatedCharges() != null ) {
   totalContractValue =
 describeAgreementResponse.estimatedCharges().agreementValue()
     + " "
     + describeAgreementResponse.estimatedCharges().currencyCode();
  }
  return totalContractValue;
 }
}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

## Dapatkan detail uji coba gratis dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan detail uji coba gratis dari perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.FreeTrialPricingTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;

import java.util.ArrayList;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsFreeTrialDetails {

 /*
  * Obtain the details from an agreement of a free trial I have provided to the
 customer
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;
```

```
 List<FreeTrialPricingTerm> freeTrialPricingTerms =
getFreeTrialPricingTerms(agreementId);

 ReferenceCodesUtils.formatOutput(freeTrialPricingTerms);
}

public static List<FreeTrialPricingTerm> getFreeTrialPricingTerms(String
agreementId) {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 GetAgreementTermsRequest getAgreementTermsRequest =
   GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

 GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

 List<FreeTrialPricingTerm> freeTrialPricingTerms = new
ArrayList<FreeTrialPricingTerm>();

 for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
  if (acceptedTerm.freeTrialPricingTerm() != null) {
   freeTrialPricingTerms.add(acceptedTerm.freeTrialPricingTerm());
  }
 }
 return freeTrialPricingTerms;
}
}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan informasi tentang perjanjian

Contoh kode berikut menunjukkan cara mendapatkan informasi tentang perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class DescribeAgreement {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse = getResponse(agreementId);

  ReferenceCodesUtils.formatOutput(describeAgreementResponse);

 }

 public static DescribeAgreementResponse getResponse(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
```

```
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan detail produk dan penawaran dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan detail produk dan penawaran dari perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;
```

```
import software.amazon.awssdk.services.marketplaceagreement.model.Resource;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

public class GetProductAndOfferDetailFromAgreement {

 public static void main(String[] args) {

  // call Agreement API to get offer and product information for the agreement

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<DescribeEntityResponse> entityResponseList = getEntities(agreementId);

  for (DescribeEntityResponse response : entityResponseList) {
   ReferenceCodesUtils.formatOutput(response);
  }
 }

 public static List<DescribeEntityResponse> getEntities(String agreementId) {
  List<DescribeEntityResponse> entityResponseList = new
 ArrayList<DescribeEntityResponse> ();

  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();
```

```
 DescribeAgreementResponse describeAgreementResponse =
marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

 // get offer id for the given agreement

 String offerId = describeAgreementResponse.proposalSummary().offerId();

 // get all the product ids for this agreement

 List<String> productIds = new ArrayList<String>();
 for (Resource resource : describeAgreementResponse.proposalSummary().resources())
{
  productIds.add(resource.id());
 }

 // call Catalog API to get the details of the offer and products

 MarketplaceCatalogClient marketplaceCatalogClient =
   MarketplaceCatalogClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 DescribeEntityRequest describeEntityRequest =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId).build();

 DescribeEntityResponse describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);

 entityResponseList.add(describeEntityResponse);

 for (String productId : productIds) {
  describeEntityRequest =
    DescribeEntityRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .entityId(productId).build();
  describeEntityResponse =
marketplaceCatalogClient.describeEntity(describeEntityRequest);
  System.out.println("Print details for product " + productId);
  entityResponseList.add(describeEntityResponse);
 }
 return entityResponseList;
```

```
 }
}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan EULA dari sebuah perjanjian

Contoh kode berikut menunjukkan cara mendapatkan EULA dari suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.DocumentItem;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsEula {
```

```
 /*
  * Obtain the EULA I have entered into with my customer via the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<DocumentItem> legalEulaArray = getLegalEula(agreementId);

  ReferenceCodesUtils.formatOutput(legalEulaArray);
 }

 public static List<DocumentItem> getLegalEula(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<DocumentItem> legalEulaArray = new ArrayList<>();

  getAgreementTermsResponse.acceptedTerms().stream()
      .filter(acceptedTerm -> acceptedTerm.legalTerm() != null &&
 acceptedTerm.legalTerm().hasDocuments())
      .flatMap(acceptedTerm -> acceptedTerm.legalTerm().documents().stream())
      .filter(docItem -> docItem.type() != null)
      .forEach(legalEulaArray::add);
  return legalEulaArray;
 }

}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Dapatkan ketentuan perpanjangan otomatis dari suatu perjanjian

Contoh kode berikut menunjukkan cara mendapatkan ketentuan perpanjangan otomatis dari suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

public class GetAgreementAutoRenewal {

 /*
  * Obtain the auto-renewal status of the agreement
  */

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  String autoRenewal = getAutoRenewal(agreementId);
```

```
  System.out.println("Auto-Renewal status is " + autoRenewal);
 }

 public static String getAutoRenewal(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder()
    .agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  String autoRenewal = "No Auto Renewal";

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.renewalTerm() != null &&
 acceptedTerm.renewalTerm().configuration() != null
     && acceptedTerm.renewalTerm().configuration().enableAutoRenew() != null) {
    autoRenewal =
 String.valueOf(acceptedTerm.renewalTerm().configuration().enableAutoRenew().booleanValue())
    break;
   }
  }
  return autoRenewal;
 }

}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

## Dapatkan dimensi yang dibeli dalam perjanjian

Contoh kode berikut menunjukkan cara mendapatkan dimensi yang dibeli dalam perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.Dimension;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsDimensionPurchased {

 /*
  * Obtain the dimensions the buyer has purchased from me via the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<String> dimensionKeys = getDimensionKeys(agreementId);

  ReferenceCodesUtils.formatOutput(dimensionKeys);
```

```
 }

 public static List<String> getDimensionKeys(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<String> dimensionKeys = new ArrayList<String>();
  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
    if
(acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue() !=
null) {
     List<Dimension> dimensions =
acceptedTerm.configurableUpfrontPricingTerm().configuration().dimensions();
     for (Dimension dimension : dimensions) {
      dimensionKeys.add(dimension.dimensionKey());
     }
    }

   }
  }
  return dimensionKeys;
 }
}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Dapatkan contoh dari setiap dimensi yang dibeli dalam perjanjian

Contoh kode berikut menunjukkan cara mendapatkan contoh dari setiap dimensi yang dibeli dalam perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.Dimension;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsDimensionInstances {

 /*
  * get instances of each dimension that buyer has purchased in the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  Map<String, List<Dimension>> dimensionMap = getDimensions(agreementId);
```

```
 ReferenceCodesUtils.formatOutput(dimensionMap);
}

public static Map<String, List<Dimension>> getDimensions(String agreementId) {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 GetAgreementTermsRequest getAgreementTermsRequest =
   GetAgreementTermsRequest.builder().agreementId(agreementId)
   .build();

 GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

 Map<String, List<Dimension>> dimensionMap = new HashMap<String,
List<Dimension>>();

 for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
  List<Dimension> dimensionsList = new ArrayList<Dimension>();
  if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
   String selectorValue = "";
   if (acceptedTerm.configurableUpfrontPricingTerm().configuration() != null) {
    if
(acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue() !=
null) {
     selectorValue =
acceptedTerm.configurableUpfrontPricingTerm().configuration().selectorValue();
    }
    if
(acceptedTerm.configurableUpfrontPricingTerm().configuration().hasDimensions()) {
     dimensionsList =
acceptedTerm.configurableUpfrontPricingTerm().configuration().dimensions();
    }
   }
   if (selectorValue.length() > 0) {
    dimensionMap.put(selectorValue, dimensionsList);
   }
  }
 }
 return dimensionMap;
```

```
 }
}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Dapatkan jadwal pembayaran perjanjian

Contoh kode berikut menunjukkan cara mendapatkan jadwal pembayaran perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import
 software.amazon.awssdk.services.marketplaceagreement.model.PaymentScheduleTerm;
import software.amazon.awssdk.services.marketplaceagreement.model.ScheduleItem;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
```

```
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsPaymentSchedule {

 /*
  * Obtain the payment schedule I have agreed to with the agreement, including the
 invoice date and invoice amount
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<Map<String, Object>> paymentScheduleArray = getPaymentSchedules(agreementId);

  ReferenceCodesUtils.formatOutput(paymentScheduleArray);
 }

 public static List<Map<String, Object>> getPaymentSchedules(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  List<Map<String, Object>> paymentScheduleArray = new ArrayList<>();

  String currencyCode = "";

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.paymentScheduleTerm() != null) {
    PaymentScheduleTerm paymentScheduleTerm = acceptedTerm.paymentScheduleTerm();
    if (paymentScheduleTerm.currencyCode() != null) {
     currencyCode = paymentScheduleTerm.currencyCode();
    }
    if (paymentScheduleTerm.hasSchedule()) {
     for (ScheduleItem schedule : paymentScheduleTerm.schedule()) {
      if (schedule.chargeDate() != null) {
       String chargeDate = schedule.chargeDate().toString();
```

```
        String chargeAmount = schedule.chargeAmount();
        Map<String, Object> scheduleMap = new HashMap<>();
        scheduleMap.put(ATTRIBUTE_CURRENCY_CODE, currencyCode);
        scheduleMap.put(ATTRIBUTE_CHARGE_DATE, chargeDate);
        scheduleMap.put(ATTRIBUTE_CHARGE_AMOUNT, chargeAmount);
        paymentScheduleArray.add(scheduleMap);
       }
      }
     }
    }
   }
  return paymentScheduleArray;
 }
}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Dapatkan harga per dimensi dalam perjanjian

Contoh kode berikut menunjukkan cara mendapatkan harga per dimensi dalam suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsPricingEachDimension {

 /*
  * Obtain pricing per each dimension in the agreement
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<Object> dimensions = getDimensions(agreementId);

  ReferenceCodesUtils.formatOutput(dimensions);
 }

 public static List<Object> getDimensions(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<Object> dimensions = new ArrayList<Object>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   List<Object> rateInfo = new ArrayList<Object>();
   if (acceptedTerm.configurableUpfrontPricingTerm() != null) {
    if (acceptedTerm.configurableUpfrontPricingTerm().type() != null) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().type());
```

```
    }
    if (acceptedTerm.configurableUpfrontPricingTerm().currencyCode() != null) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().currencyCode());
    }
    if (acceptedTerm.configurableUpfrontPricingTerm().hasRateCards()) {
     rateInfo.add(acceptedTerm.configurableUpfrontPricingTerm().rateCards());
    }
    dimensions.add(rateInfo);
   }
  }
  return dimensions;
 }
}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Dapatkan jenis harga dari sebuah perjanjian

Contoh kode berikut menunjukkan cara mendapatkan jenis harga perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import com.fasterxml.jackson.annotation.JsonAutoDetect.Visibility;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.HashMap;
import java.util.HashSet;
import java.util.Iterator;
import java.util.List;
import java.util.Map;
import java.util.Objects;
import java.util.Set;

import org.apache.commons.lang3.tuple.Triple;

import software.amazon.awssdk.services.marketplacecatalog.MarketplaceCatalogClient;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityRequest;
import
 software.amazon.awssdk.services.marketplacecatalog.model.DescribeEntityResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.fasterxml.jackson.annotation.PropertyAccessor;
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import com.fasterxml.jackson.databind.ObjectWriter;
import com.fasterxml.jackson.datatype.jsr310.JavaTimeModule;

/*
 * Obtain the pricing type of the agreement (contract, FPS, metered, free etc.)
 */
public class GetAgreementPricingType {

 private static final String FILTER_NAME = "OfferId";
```

```
private static final String FILTER_VALUE = OFFER_ID;

// Product types
private static final String SAAS_PRODUCT = "SaaSProduct";
private static final String AMI_PRODUCT = "AmiProduct";
private static final String ML_PRODUCT = "MachineLearningProduct";
private static final String CONTAINER_PRODUCT = "ContainerProduct";
private static final String DATA_PRODUCT = "DataProduct";
private static final String PROSERVICE_PRODUCT = "ProfessionalServicesProduct";
private static final String AIQ_PRODUCT = "AiqProduct";

// Pricing types
private static final String CCP = "CCP";
private static final String ANNUAL = "Annual";
private static final String CONTRACT = "Contract";
private static final String SFT = "SaaS Free Trial";
private static final String HMA = "Hourly and Monthly Agreements";
private static final String HOURLY = "Hourly";
private static final String MONTHLY = "Monthly";
private static final String AFPS = "Annual FPS";
private static final String CFPS = "Contract FPS";
private static final String CCPFPS = "CCP with FPS";
private static final String BYOL = "BYOL";
private static final String FREE = "Free";
private static final String FTH = "Free Trials and Hourly";

// Agreement term pricing types
private static final Set<String> LEGAL = Set.of("LegalTerm");
private static final Set<String> CONFIGURABLE_UPFRONT =
Set.of("ConfigurableUpfrontPricingTerm");
private static final Set<String> USAGE_BASED = Set.of("UsageBasedPricingTerm");
private static final Set<String> CONFIGURABLE_UPFRONT_AND_USAGE_BASED =
Set.of("ConfigurableUpfrontPricingTerm", "UsageBasedPricingTerm");
private static final Set<String> FREE_TRIAL = Set.of("FreeTrialPricingTerm");
private static final Set<String> RECURRING_PAYMENT =
Set.of("RecurringPaymentTerm");
private static final Set<String> USAGE_BASED_AND_RECURRING_PAYMENT =
Set.of("UsageBasedPricingTerm", "RecurringPaymentTerm");
private static final Set<String> FIXED_UPFRONT_AND_PAYMENT_SCHEDULE =
Set.of("FixedUpfrontPricingTerm", "PaymentScheduleTerm");
private static final Set<String> FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED
= Set.of("FixedUpfrontPricingTerm", "PaymentScheduleTerm",
"UsageBasedPricingTerm");
private static final Set<String> BYOL_PRICING = Set.of("ByolPricingTerm");
```

```
private static final Set<String> FREE_TRIAL_AND_USAGE_BASED =
Set.of("FreeTrialPricingTerm", "UsageBasedPricingTerm");

private static final List<Set<String>> ALL_AGREEMENT_TERM_TYPES_COMBINATION
= Arrays.asList(LEGAL, CONFIGURABLE_UPFRONT, USAGE_BASED,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED,
  FREE_TRIAL, RECURRING_PAYMENT, USAGE_BASED_AND_RECURRING_PAYMENT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, BYOL_PRICING,
FREE_TRIAL_AND_USAGE_BASED);

private static  MarketplaceAgreementClient marketplaceAgreementClient =
  MarketplaceAgreementClient.builder()
  .httpClient(ApacheHttpClient.builder().build())
  .credentialsProvider(ProfileCredentialsProvider.create())
  .build();

private static MarketplaceCatalogClient marketplaceCatalogClient =
  MarketplaceCatalogClient.builder()
  .httpClient(ApacheHttpClient.builder().build())
  .credentialsProvider(ProfileCredentialsProvider.create())
  .build();

   /*
    * Get agreement Pricing Type given product type, agreement term types and offer
types if needed
    */
public static String getPricingType(String productType, Set<String>
agreementTermType, Set<String> offerType) {
 Map<Triple<String, Set<String>, Set<String>>, String> pricingTypes = new
HashMap<>();

 pricingTypes.put(Triple.of(SAAS_PRODUCT, CONFIGURABLE_UPFRONT_AND_USAGE_BASED, new
HashSet<>()), CCP);
 pricingTypes.put(Triple.of(DATA_PRODUCT, CONFIGURABLE_UPFRONT_AND_USAGE_BASED, new
HashSet<>()), CCP);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(AMI_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(ML_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT_AND_USAGE_BASED), ANNUAL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT), CONTRACT);
```

```
 pricingTypes.put(Triple.of(AMI_PRODUCT, CONFIGURABLE_UPFRONT,
CONFIGURABLE_UPFRONT), CONTRACT);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(DATA_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, CONFIGURABLE_UPFRONT, new HashSet<>()),
CONTRACT);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, CONFIGURABLE_UPFRONT, new
HashSet<>()), CONTRACT);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, FREE_TRIAL, new HashSet<>()), SFT);
 pricingTypes.put(Triple.of(AMI_PRODUCT, USAGE_BASED_AND_RECURRING_PAYMENT, new
HashSet<>()), HMA);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(AMI_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(ML_PRODUCT, USAGE_BASED, new HashSet<>()), HOURLY);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, RECURRING_PAYMENT, new HashSet<>()),
MONTHLY);
 pricingTypes.put(Triple.of(AMI_PRODUCT, RECURRING_PAYMENT, new HashSet<>()),
MONTHLY);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED), AFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED), AFPS);
 pricingTypes.put(Triple.of(ML_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), AFPS);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
new HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE), CFPS);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(DATA_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE, new
HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE,
new HashSet<>()), CFPS);
 pricingTypes.put(Triple.of(SAAS_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(DATA_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(AIQ_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
```

```
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE_AND_USAGE_BASED, new HashSet<>()), CCPFPS);
 pricingTypes.put(Triple.of(AMI_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(SAAS_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(PROSERVICE_PRODUCT, BYOL_PRICING, new HashSet<>()),
BYOL);
 pricingTypes.put(Triple.of(AIQ_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(ML_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, BYOL_PRICING, new HashSet<>()),
BYOL);
 pricingTypes.put(Triple.of(DATA_PRODUCT, BYOL_PRICING, new HashSet<>()), BYOL);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, LEGAL, new HashSet<>()), FREE);
 pricingTypes.put(Triple.of(AMI_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);
 pricingTypes.put(Triple.of(CONTAINER_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);
 pricingTypes.put(Triple.of(ML_PRODUCT, FREE_TRIAL_AND_USAGE_BASED, new
HashSet<>()), FTH);

 Triple<String, Set<String>, Set<String>> key = Triple.of(productType,
agreementTermType, offerType);

 if (pricingTypes.containsKey(key)) {
  return pricingTypes.get(key);
 } else {
  return "Unknown";
 }
}

/*
 * Given product type and agreement term types, some combinations need to check
offer term types as well.
 */
public static String needToCheckOfferTermsType(String productType, Set<String>
agreementTermTypes) {
 Map<KeyPair, String> offerTermTypes = new HashMap<>();
 offerTermTypes.put(new KeyPair(CONTAINER_PRODUCT, CONFIGURABLE_UPFRONT), "Y");
 offerTermTypes.put(new KeyPair(AMI_PRODUCT, CONFIGURABLE_UPFRONT), "Y");
 offerTermTypes.put(new KeyPair(CONTAINER_PRODUCT,
FIXED_UPFRONT_AND_PAYMENT_SCHEDULE), "Y");
 offerTermTypes.put(new KeyPair(AMI_PRODUCT, FIXED_UPFRONT_AND_PAYMENT_SCHEDULE),
"Y");

 KeyPair key = new KeyPair(productType, agreementTermTypes);
```

```
 if (offerTermTypes.containsKey(key)) {
  return offerTermTypes.get(key);
 } else {
  return null;
 }
}

public static List<AgreementViewSummary> getAgreementsById() {

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 Filter partyType =
Filter.builder().name(PARTY_TYPE_FILTER_NAME).values(PARTY_TYPE_FILTER_VALUE_PROPOSER).buil

 Filter agreementType =
Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME).values(AGREEMENT_TYPE_FILTER_VALUE_PURCHA

 Filter customizeFilter =
Filter.builder().name(FILTER_NAME).values(FILTER_VALUE).build();

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(partyType, agreementType, customizeFilter).build();

 SearchAgreementsResponse searchResultResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 agreementSummaryList.addAll(searchResultResponse.agreementViewSummaries());

 while (searchResultResponse.nextToken() != null &&
searchResultResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
SearchAgreementsRequest.builder().catalog(AWS_MP_CATALOG)
    .filters(partyType,
agreementType).nextToken(searchResultResponse.nextToken()).build();
  searchResultResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchResultResponse.agreementViewSummaries());
 }
 return agreementSummaryList;

}
```

```
static class KeyPair {
 private final String first;
 private final Set<String> second;

 public KeyPair(String productType, Set<String> second) {
  this.first = productType;
  this.second = second;
 }

 @Override
 public int hashCode() {
  return Objects.hash(first, second);
 }

 @Override
 public boolean equals(Object obj) {
  if (this == obj)
   return true;
  if (obj == null || getClass() != obj.getClass())
   return false;
  KeyPair other = (KeyPair) obj;
  return Objects.equals(first, other.first) && Objects.equals(second,
other.second);
 }
}

/*
 * Get all the term types for the offer
 */
public static Set<String> getOfferTermTypes(String offerId) {

 Set<String> offerTermTypes = new HashSet<String>();

 DescribeEntityRequest request =
   DescribeEntityRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .entityId(offerId)
   .build();

 DescribeEntityResponse result = marketplaceCatalogClient.describeEntity(request);

 String details = result.details();
```

```
 try {
  ObjectMapper objectMapper = new ObjectMapper();
  JsonNode rootNode = objectMapper.readTree(details);
  JsonNode termsNode = rootNode.get(ATTRIBUTE_TERMS);

  for (JsonNode termNode : termsNode) {
   if (termNode.get(ATTRIBUTE_TYPE_ENTITY) != null ) {
    offerTermTypes.add(termNode.get(ATTRIBUTE_TYPE_ENTITY).asText());
   }
  }
 } catch (Exception e) {
  e.printStackTrace();
 }

 return offerTermTypes;

}

/*
 * Get all the agreement term types
 */
public static Set<String> getAgreementTermTypes(GetAgreementTermsResponse
agreementTerm) {
 Set<String> agreementTermTypes = new HashSet<String>();
 try {
  for (AcceptedTerm term : agreementTerm.acceptedTerms()) {
   ObjectMapper objectMapper = new ObjectMapper();
   JsonNode termNode = objectMapper.readTree(getJson(term));
   Iterator<Map.Entry<String, JsonNode>> fieldsIterator = termNode.fields();
   while (fieldsIterator.hasNext()) {
    Map.Entry<String, JsonNode> entry = fieldsIterator.next();
    JsonNode value = entry.getValue();
    if (value.isObject() && value.has(ATTRIBUTE_TYPE_AGREEMENT)) {
     agreementTermTypes.add(value.get(ATTRIBUTE_TYPE_AGREEMENT).asText());
    }
   }
  }
 } catch (Exception e) {
  e.printStackTrace();
 }
 return agreementTermTypes;

}
```

```
/*
 * make sure all elements in array2 exist in array1
 */
public static boolean allElementsExist(Set<String> array1, Set<String> array2) {
 for (String element : array2) {
  boolean found = false;
  for (String str : array1) {
   if (element.equals(str)) {
    found = true;
    break;
   }
  }
  if (!found) {
   return false;
  }
 }
 return true;
}

/*
 * Find the combinations of the agreement term types for the agreement
 */
public static Set<String> getMatchedTermTypesCombination(Set<String>
agreementTermTypes) {
 Set<String> matchedCombination = new HashSet<String>();
 for (Set<String> element : ALL_AGREEMENT_TERM_TYPES_COMBINATION) {
  if (allElementsExist(agreementTermTypes, element)) {
   matchedCombination = element;
  }
 }
 return matchedCombination;
}

public static void main(String[] args) {

 List<AgreementViewSummary> agreements = getAgreementsById();

 for (AgreementViewSummary summary : agreements) {
  String pricingType = "";
  String agreementId = summary.agreementId();
  System.out.println(agreementId);
  String offerId = summary.proposalSummary().offerId();

  //get all pricing term types for the offer in the agreement
```

```
  Set<String> offerTermTypes = getOfferTermTypes(offerId);
  String productType = summary.proposalSummary().resources().get(0).type();

  //get all pricing term types for the agreement
  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();
  GetAgreementTermsResponse getAgreementTermsResponse =
marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  Set<String> agreementTermTypes =
getAgreementTermTypes(getAgreementTermsResponse);

  //get matched pricing term type combination set
  Set<String> agreementMatchedTermType =
getMatchedTermTypesCombination(agreementTermTypes);

  //check to see if this agreement pricing term combination needs additional check
on offer pricing terms
  String needToCheckOfferType = needToCheckOfferTermsType(productType,
agreementMatchedTermType);

  // get the pricing type for the agreement based on the product type, agreement
term types and offer term types if needed
  if (needToCheckOfferType != null) {
   Set<String> offerMatchedTermType =
getMatchedTermTypesCombination(offerTermTypes);
   pricingType = getPricingType(productType, agreementMatchedTermType,
offerMatchedTermType);
  } else if (agreementMatchedTermType == LEGAL) {
   pricingType = FREE;
  } else {
   pricingType = getPricingType(productType, agreementMatchedTermType, new
HashSet());
  }
  System.out.println("Pricing type is " + pricingType);
 }
}

private static String getJson(Object result) {
 String json = "";

 try {
  ObjectMapper om = new ObjectMapper();
  om.setVisibility(PropertyAccessor.FIELD, Visibility.ANY);
```

```
    om.registerModule(new JavaTimeModule());
    ObjectWriter ow = om.writer().withDefaultPrettyPrinter();

    json = ow.writeValueAsString(result);
   } catch (JsonProcessingException e) {
    e.printStackTrace();
   }
   return json;
 }

}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan jenis produk dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan jenis produk dari suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;
import software.amazon.awssdk.services.marketplaceagreement.model.Resource;
```

```
import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import java.util.ArrayList;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementProductType {

 /*
  * Obtain the Product Type of the product the agreement was created on
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<String> productIds = getProducts(agreementId);

  ReferenceCodesUtils.formatOutput(productIds);
 }

 public static List<String> getProducts(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);

  List<String> productIds = new ArrayList<String>();
  for (Resource resource : describeAgreementResponse.proposalSummary().resources())
 {
   productIds.add(resource.id() + ":" + resource.type());
  }
  return productIds;
 }
}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

### Dapatkan status perjanjian

Contoh kode berikut menunjukkan cara mendapatkan status perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.DescribeAgreementResponse;

public class GetAgreementStatus {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  DescribeAgreementResponse describeAgreementResponse =
 getDescribeAgreementResponse(agreementId);

  System.out.println("Agreement status is " + describeAgreementResponse.status());
```

```
 }

 public static DescribeAgreementResponse getDescribeAgreementResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  DescribeAgreementRequest describeAgreementRequest =
    DescribeAgreementRequest.builder()
    .agreementId(agreementId)
    .build();

  DescribeAgreementResponse describeAgreementResponse =
 marketplaceAgreementClient.describeAgreement(describeAgreementRequest);
  return describeAgreementResponse;
 }

}
```

- Untuk detail API, lihat DescribeAgreementdi Referensi AWS SDK for Java 2.x API.

Dapatkan ketentuan dukungan dari perjanjian

Contoh kode berikut menunjukkan cara mendapatkan ketentuan dukungan dari suatu perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;
```

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import software.amazon.awssdk.services.marketplaceagreement.model.AcceptedTerm;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;
import software.amazon.awssdk.services.marketplaceagreement.model.SupportTerm;

import java.util.ArrayList;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.AGREEMENT_ID;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class GetAgreementTermsSupportTerm {

 /*
  * Obtain the support and refund policy I have provided to the customer
  */
 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  List<SupportTerm> supportTerms = getSupportTerms(agreementId);

  ReferenceCodesUtils.formatOutput(supportTerms);
 }

 public static List<SupportTerm> getSupportTerms(String agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder().agreementId(agreementId)
    .build();
```

```
  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);

  List<SupportTerm> supportTerms = new ArrayList<>();

  for (AcceptedTerm acceptedTerm : getAgreementTermsResponse.acceptedTerms()) {
   if (acceptedTerm.supportTerm() != null) {
    supportTerms.add(acceptedTerm.supportTerm());
   }
  }
  return supportTerms;
 }

}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

### Dapatkan ketentuan perjanjian

Contoh kode berikut menunjukkan cara mendapatkan ketentuan perjanjian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
```

```
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.GetAgreementTermsResponse;

public class GetAgreementTerms {

 public static void main(String[] args) {

  String agreementId = args.length > 0 ? args[0] : AGREEMENT_ID;

  GetAgreementTermsResponse getAgreementTermsResponse =
 getAgreementTermsResponse(agreementId);

  ReferenceCodesUtils.formatOutput(getAgreementTermsResponse);

 }

 public static GetAgreementTermsResponse getAgreementTermsResponse(String
 agreementId) {
  MarketplaceAgreementClient marketplaceAgreementClient =
    MarketplaceAgreementClient.builder()
    .httpClient(ApacheHttpClient.builder().build())
    .credentialsProvider(ProfileCredentialsProvider.create())
    .build();

  GetAgreementTermsRequest getAgreementTermsRequest =
    GetAgreementTermsRequest.builder()
    .agreementId(agreementId)
    .build();

  GetAgreementTermsResponse getAgreementTermsResponse =
 marketplaceAgreementClient.getAgreementTerms(getAgreementTermsRequest);
  return getAgreementTermsResponse;
 }

}
```

- Untuk detail API, lihat GetAgreementTermsdi Referensi AWS SDK for Java 2.x API.

Cari perjanjian berdasarkan tanggal akhir

Contoh kode berikut menunjukkan cara mencari perjanjian berdasarkan tanggal akhir.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

public class SearchAgreementsByEndDate {

 static String beforeOrAfterEndtimeFilterName =
 BeforeOrAfterEndTimeFilterName.BeforeEndTime.name();

 static String cutoffDate = "2050-11-18T00:00:00Z";
```

```
static String partyTypeFilterValue = PARTY_TYPE_FILTER_VALUE_PROPOSER;

public static void main(String[] args) {

 List<AgreementViewSummary> agreementSummaryList = getAgreements();

 ReferenceCodesUtils.formatOutput(agreementSummaryList);
}

public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 // set up filters

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter =
Filter.builder().name(beforeOrAfterEndtimeFilterName).values(cutoffDate).build();

 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter));

 // search agreement with filters

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();

 SearchAgreementsResponse searchAgreementResponse=
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
```

```
  List<AgreementViewSummary> agreementSummaryList = new
 ArrayList<AgreementViewSummary>();

  agreementSummaryList.addAll(searchAgreementResponse.agreementViewSummaries());

  while (searchAgreementResponse.nextToken() != null &&
 searchAgreementResponse.nextToken().length() > 0) {
   searchAgreementsRequest =
     SearchAgreementsRequest.builder()
     .catalog(AWS_MP_CATALOG)
     .filters(filters)
     .nextToken(searchAgreementResponse.nextToken())
     .build();
   searchAgreementResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
   agreementSummaryList.addAll(searchAgreementResponse.agreementViewSummaries());
  }
  return agreementSummaryList;
 }

}
```

- Untuk detail API, lihat SearchAgreementsdi Referensi AWS SDK for Java 2.x API.

### Cari perjanjian dengan satu filter khusus

Contoh kode berikut menunjukkan cara mencari perjanjian dengan satu filter khusus.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;
```

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;

import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import com.example.awsmarketplace.utils.ReferenceCodesUtils;

/**
 * To search by
 * offer id: OfferId;
 * product id: ResourceIdentifier;
 * customer AWS account id: AcceptorAccountId
 * product type: ResourceType (i.e. SaasProduct)
 * status: Status. status values can be: ACTIVE, CANCELED,
 *   EXPIRED, RENEWED, REPLACED, ROLLED_BACK, SUPERSEDED, TERMINATED
 */

public class SearchAgreementsByOneFilter {

 private static final String FILTER_NAME = "ResourceType";

 private static final String FILTER_VALUE = "SaaSProduct";

 /*
  * search agreements by one customize filter
  */
 public static void main(String[] args) {

  List<AgreementViewSummary> agreementSummaryList = getAgreements();

  ReferenceCodesUtils.formatOutput(agreementSummaryList);
```

```
}

public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter =
Filter.builder().name(FILTER_NAME).values(FILTER_VALUE).build();

 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter));

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();
 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .filters(filters)
    .nextToken(searchAgreementsResponse.nextToken())
    .build();
```

```
    searchAgreementsResponse =
 marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
    agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
  }
  return agreementSummaryList;
 }

}
```

- Untuk detail API, lihat SearchAgreementsdi Referensi AWS SDK for Java 2.x API.

Cari perjanjian dengan dua filter khusus

Contoh kode berikut menunjukkan cara mencari perjanjian dengan dua filter khusus.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara menyiapkan dan menjalankan di repositori AWS Marketplace API Reference Code Library.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package com.example.awsmarketplace.agreementapi;

import software.amazon.awssdk.auth.credentials.AwsCredentialsProvider;
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import
 software.amazon.awssdk.services.marketplaceagreement.MarketplaceAgreementClient;
import
 software.amazon.awssdk.services.marketplaceagreement.model.AgreementViewSummary;
import software.amazon.awssdk.services.marketplaceagreement.model.Filter;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsRequest;
import
 software.amazon.awssdk.services.marketplaceagreement.model.SearchAgreementsResponse;
```

```
import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

import static com.example.awsmarketplace.utils.ReferenceCodesConstants.*;
import com.example.awsmarketplace.utils.ReferenceCodesUtils;

/**
 * Party Type = Proposer AND Acceptor:
 *  AfterEndTime
 *  BeforeEndTime
 *  ResourceIdentifier + BeforeEndTime
 *  ResourceIdentifier + AfterEndTime
 *  ResourceType + BeforeEndTime
 *  ResourceType + AfterEndTime
 *
 * Party Type = Proposer
 *  ResourceIdentifier
 *  OfferId
 *  AcceptorAccountId
 *  Status (ACTIVE)
 *  Status (ACTIVE) + ResourceIdentifier
 *  Status (ACTIVE) + AcceptorAccountId
 *  Status (ACTIVE) + OfferId
 *  Status (ACTIVE) + ResourceType
 *  AcceptorAccountId + BeforeEndTime
 *  AcceptorAccountId + AfterEndTime
 *  AcceptorAccountId + AfterEndTime
 *  OfferId + BeforeEndTime
 *
 * Status values can be: ACTIVE, CANCELLED, EXPIRED, RENEWED, REPLACED, ROLLED_BACK,
 SUPERSEDED, TERMINATED
 */

public class SearchAgreementsByTwoFilters {

 public static final String FILTER_1_NAME = "ResourceType";

 public static final String FILTER_1_VALUE = "SaaSProduct";

 public static final String FILTER_2_NAME = "Status";

 public static final String FILTER_2_VALUE = "ACTIVE";
```

```
/*
 * search agreements by two customize filter
 */
public static void main(String[] args) {

 List<AgreementViewSummary> agreementSummaryList = getAgreements();

 ReferenceCodesUtils.formatOutput(agreementSummaryList);

}

public static List<AgreementViewSummary> getAgreements() {
 MarketplaceAgreementClient marketplaceAgreementClient =
   MarketplaceAgreementClient.builder()
   .httpClient(ApacheHttpClient.builder().build())
   .credentialsProvider(ProfileCredentialsProvider.create())
   .build();

 Filter partyTypeFilter = Filter.builder().name(PARTY_TYPE_FILTER_NAME)
   .values(PARTY_TYPE_FILTER_VALUE_PROPOSER).build();

 Filter agreementTypeFilter = Filter.builder().name(AGREEMENT_TYPE_FILTER_NAME)
   .values(AGREEMENT_TYPE_FILTER_VALUE_PURCHASEAGREEMENT).build();

 Filter customizeFilter1 =
Filter.builder().name(FILTER_1_NAME).values(FILTER_1_VALUE).build();

 Filter customizeFilter2 =
Filter.builder().name(FILTER_2_NAME).values(FILTER_2_VALUE).build();


 List<Filter> filters = new ArrayList<Filter>();

 filters.addAll(Arrays.asList(partyTypeFilter, agreementTypeFilter,
customizeFilter1, customizeFilter2));

 SearchAgreementsRequest searchAgreementsRequest =
   SearchAgreementsRequest.builder()
   .catalog(AWS_MP_CATALOG)
   .filters(filters)
   .build();
```

```
 SearchAgreementsResponse searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);

 List<AgreementViewSummary> agreementSummaryList = new
ArrayList<AgreementViewSummary>();

 agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());

 while (searchAgreementsResponse.nextToken() != null &&
searchAgreementsResponse.nextToken().length() > 0) {
  searchAgreementsRequest =
    SearchAgreementsRequest.builder()
    .catalog(AWS_MP_CATALOG)
    .filters(filters)
    .nextToken(searchAgreementsResponse.nextToken())
    .build();
  searchAgreementsResponse =
marketplaceAgreementClient.searchAgreements(searchAgreementsRequest);
  agreementSummaryList.addAll(searchAgreementsResponse.agreementViewSummaries());
 }
 return agreementSummaryList;
}

}
```

- Untuk detail API, lihat SearchAgreementsdi Referensi AWS SDK for Java 2.x API.

# MediaConvert contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with MediaConvert.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

# Tindakan

### `CreateJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
package com.example.mediaconvert;

import java.net.URI;
import java.util.HashMap;
import java.util.Map;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.Output;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroup;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.HlsGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.OutputGroupType;
import software.amazon.awssdk.services.mediaconvert.model.HlsDirectoryStructure;
import software.amazon.awssdk.services.mediaconvert.model.HlsManifestDurationFormat;
import software.amazon.awssdk.services.mediaconvert.model.HlsStreamInfResolution;
import software.amazon.awssdk.services.mediaconvert.model.HlsClientCache;
import software.amazon.awssdk.services.mediaconvert.model.HlsCaptionLanguageSetting;
import software.amazon.awssdk.services.mediaconvert.model.HlsManifestCompression;
import software.amazon.awssdk.services.mediaconvert.model.HlsCodecSpecification;
import software.amazon.awssdk.services.mediaconvert.model.HlsOutputSelection;
import software.amazon.awssdk.services.mediaconvert.model.HlsProgramDateTime;
import software.amazon.awssdk.services.mediaconvert.model.HlsTimedMetadataId3Frame;
import software.amazon.awssdk.services.mediaconvert.model.HlsSegmentControl;
```

```
import software.amazon.awssdk.services.mediaconvert.model.FileGroupSettings;
import software.amazon.awssdk.services.mediaconvert.model.ContainerSettings;
import software.amazon.awssdk.services.mediaconvert.model.VideoDescription;
import software.amazon.awssdk.services.mediaconvert.model.ContainerType;
import software.amazon.awssdk.services.mediaconvert.model.ScalingBehavior;
import software.amazon.awssdk.services.mediaconvert.model.VideoTimecodeInsertion;
import software.amazon.awssdk.services.mediaconvert.model.ColorMetadata;
import software.amazon.awssdk.services.mediaconvert.model.RespondToAfd;
import software.amazon.awssdk.services.mediaconvert.model.AfdSignaling;
import software.amazon.awssdk.services.mediaconvert.model.DropFrameTimecode;
import software.amazon.awssdk.services.mediaconvert.model.VideoCodecSettings;
import software.amazon.awssdk.services.mediaconvert.model.H264Settings;
import software.amazon.awssdk.services.mediaconvert.model.VideoCodec;
import software.amazon.awssdk.services.mediaconvert.model.CreateJobRequest;
import software.amazon.awssdk.services.mediaconvert.model.H264RateControlMode;
import software.amazon.awssdk.services.mediaconvert.model.H264QualityTuningLevel;
import software.amazon.awssdk.services.mediaconvert.model.H264SceneChangeDetect;
import
 software.amazon.awssdk.services.mediaconvert.model.AacAudioDescriptionBroadcasterMix;
import software.amazon.awssdk.services.mediaconvert.model.H264ParControl;
import software.amazon.awssdk.services.mediaconvert.model.AacRawFormat;
import software.amazon.awssdk.services.mediaconvert.model.H264QvbrSettings;
import
 software.amazon.awssdk.services.mediaconvert.model.H264FramerateConversionAlgorithm;
import software.amazon.awssdk.services.mediaconvert.model.H264CodecLevel;
import software.amazon.awssdk.services.mediaconvert.model.H264FramerateControl;
import software.amazon.awssdk.services.mediaconvert.model.AacCodingMode;
import software.amazon.awssdk.services.mediaconvert.model.H264Telecine;
import
 software.amazon.awssdk.services.mediaconvert.model.H264FlickerAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.H264GopSizeUnits;
import software.amazon.awssdk.services.mediaconvert.model.H264CodecProfile;
import software.amazon.awssdk.services.mediaconvert.model.H264GopBReference;
import software.amazon.awssdk.services.mediaconvert.model.AudioTypeControl;
import software.amazon.awssdk.services.mediaconvert.model.AntiAlias;
import software.amazon.awssdk.services.mediaconvert.model.H264SlowPal;
import
 software.amazon.awssdk.services.mediaconvert.model.H264SpatialAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.H264Syntax;
import software.amazon.awssdk.services.mediaconvert.model.M3u8Settings;
import software.amazon.awssdk.services.mediaconvert.model.InputDenoiseFilter;
import
 software.amazon.awssdk.services.mediaconvert.model.H264TemporalAdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.CreateJobResponse;
```

```
import
 software.amazon.awssdk.services.mediaconvert.model.H264UnregisteredSeiTimecode;
import software.amazon.awssdk.services.mediaconvert.model.H264EntropyEncoding;
import software.amazon.awssdk.services.mediaconvert.model.InputPsiControl;
import software.amazon.awssdk.services.mediaconvert.model.ColorSpace;
import software.amazon.awssdk.services.mediaconvert.model.H264RepeatPps;
import software.amazon.awssdk.services.mediaconvert.model.H264FieldEncoding;
import software.amazon.awssdk.services.mediaconvert.model.M3u8NielsenId3;
import software.amazon.awssdk.services.mediaconvert.model.InputDeblockFilter;
import software.amazon.awssdk.services.mediaconvert.model.InputRotate;
import software.amazon.awssdk.services.mediaconvert.model.H264DynamicSubGop;
import software.amazon.awssdk.services.mediaconvert.model.TimedMetadata;
import software.amazon.awssdk.services.mediaconvert.model.JobSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioDefaultSelection;
import software.amazon.awssdk.services.mediaconvert.model.VideoSelector;
import software.amazon.awssdk.services.mediaconvert.model.AacSpecification;
import software.amazon.awssdk.services.mediaconvert.model.Input;
import software.amazon.awssdk.services.mediaconvert.model.OutputSettings;
import software.amazon.awssdk.services.mediaconvert.model.H264AdaptiveQuantization;
import software.amazon.awssdk.services.mediaconvert.model.AudioLanguageCodeControl;
import software.amazon.awssdk.services.mediaconvert.model.InputFilterEnable;
import software.amazon.awssdk.services.mediaconvert.model.AudioDescription;
import software.amazon.awssdk.services.mediaconvert.model.H264InterlaceMode;
import software.amazon.awssdk.services.mediaconvert.model.AudioCodecSettings;
import software.amazon.awssdk.services.mediaconvert.model.AacSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioCodec;
import software.amazon.awssdk.services.mediaconvert.model.AacRateControlMode;
import software.amazon.awssdk.services.mediaconvert.model.AacCodecProfile;
import software.amazon.awssdk.services.mediaconvert.model.HlsIFrameOnlyManifest;
import software.amazon.awssdk.services.mediaconvert.model.FrameCaptureSettings;
import software.amazon.awssdk.services.mediaconvert.model.AudioSelector;
import software.amazon.awssdk.services.mediaconvert.model.M3u8PcrControl;
import software.amazon.awssdk.services.mediaconvert.model.InputTimecodeSource;
import software.amazon.awssdk.services.mediaconvert.model.HlsSettings;
import software.amazon.awssdk.services.mediaconvert.model.M3u8Scte35Source;

/**
 * Create a MediaConvert job. Must supply MediaConvert access role Amazon
 * Resource Name (ARN), and a
 * valid video input file via Amazon S3 URL.
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 */
public class CreateJob {
        public static void main(String[] args) {
                final String usage = """

                                Usage:
                                    <mcRoleARN> <fileInput>\s

                                Where:
                                    mcRoleARN - The MediaConvert Role ARN.\s
                                    fileInput -  The URL of an Amazon S3 bucket
 where the input file is located.\s
                                """;

                if (args.length != 2) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String mcRoleARN = args[0];
                String fileInput = args[1];
                Region region = Region.US_WEST_2;
                MediaConvertClient mc = MediaConvertClient.builder()
                                .region(region)
                                .build();

                String id = createMediaJob(mc, mcRoleARN, fileInput);
                System.out.println("MediaConvert job created. Job Id = " + id);
                mc.close();
        }

        public static String createMediaJob(MediaConvertClient mc, String mcRoleARN,
 String fileInput) {

                String s3path = fileInput.substring(0, fileInput.lastIndexOf('/') +
 1) + "javasdk/out/";
                String fileOutput = s3path + "index";
                String thumbsOutput = s3path + "thumbs/";
                String mp4Output = s3path + "mp4/";

                try {
```

```
                        System.out.println("MediaConvert role arn: " + mcRoleARN);
                        System.out.println("MediaConvert input file: " + fileInput);
                        System.out.println("MediaConvert output path: " + s3path);

                        // output group Preset HLS low profile
                        Output hlsLow = createOutput("hls_low", "_low", "_$dt$",
 750000, 7, 1920, 1080, 640);
                        // output group Preset HLS media profile
                        Output hlsMedium = createOutput("hls_medium", "_medium", "_
$dt$", 1200000, 7, 1920, 1080, 1280);
                        // output group Preset HLS high profole
                        Output hlsHigh = createOutput("hls_high", "_high", "_$dt$",
 3500000, 8, 1920, 1080, 1920);

                        OutputGroup appleHLS = OutputGroup.builder().name("Apple
 HLS").customName("Example")

 .outputGroupSettings(OutputGroupSettings.builder()

 .type(OutputGroupType.HLS_GROUP_SETTINGS)

 .hlsGroupSettings(HlsGroupSettings.builder()

 .directoryStructure(

    HlsDirectoryStructure.SINGLE_DIRECTORY)

 .manifestDurationFormat(

    HlsManifestDurationFormat.INTEGER)

 .streamInfResolution(

    HlsStreamInfResolution.INCLUDE)

 .clientCache(HlsClientCache.ENABLED)

 .captionLanguageSetting(

    HlsCaptionLanguageSetting.OMIT)

 .manifestCompression(

    HlsManifestCompression.NONE)
```

```
.codecSpecification(

   HlsCodecSpecification.RFC_4281)

.outputSelection(

   HlsOutputSelection.MANIFESTS_AND_SEGMENTS)

.programDateTime(HlsProgramDateTime.EXCLUDE)

.programDateTimePeriod(600)

.timedMetadataId3Frame(

   HlsTimedMetadataId3Frame.PRIV)

.timedMetadataId3Period(10)

.destination(fileOutput)

.segmentControl(HlsSegmentControl.SEGMENTED_FILES)

.minFinalSegmentLength((double) 0)

.segmentLength(4).minSegmentLength(0).build())
                                                        .build())
                                        .outputs(hlsLow, hlsMedium,
hlsHigh).build();

                        OutputGroup fileMp4 = OutputGroup.builder().name("File
Group").customName("mp4")

.outputGroupSettings(OutputGroupSettings.builder()

.type(OutputGroupType.FILE_GROUP_SETTINGS)

.fileGroupSettings(FileGroupSettings.builder()

.destination(mp4Output).build())
                                                        .build())
                                        .outputs(Output.builder().extension("mp4")

.containerSettings(ContainerSettings.builder()
```

```
.container(ContainerType.MP4).build())

.videoDescription(VideoDescription.builder().width(1280)
                                                                    .height(720)

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.respondToAfd(RespondToAfd.NONE)

.afdSignaling(AfdSignaling.NONE)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.H_264)

   .h264Settings(H264Settings

                  .builder()

                  .rateControlMode(

                                 H264RateControlMode.QVBR)

                  .parControl(H264ParControl.INITIALIZE_FROM_SOURCE)

                  .qualityTuningLevel(

                                 H264QualityTuningLevel.SINGLE_PASS)

                  .qvbrSettings(

                                 H264QvbrSettings.builder()
```

```
                                        .qvbrQualityLevel(
                                                8)
                                        .build())
                .codecLevel(H264CodecLevel.AUTO)
                .codecProfile(H264CodecProfile.MAIN)
                .maxBitrate(2400000)
                .framerateControl(
                        H264FramerateControl.INITIALIZE_FROM_SOURCE)
                .gopSize(2.0)
                .gopSizeUnits(H264GopSizeUnits.SECONDS)
                .numberBFramesBetweenReferenceFrames(
                        2)
                .gopClosedCadence(
                        1)
                .gopBReference(H264GopBReference.DISABLED)
                .slowPal(H264SlowPal.DISABLED)
                .syntax(H264Syntax.DEFAULT)
                .numberReferenceFrames(
                        3)
                .dynamicSubGop(H264DynamicSubGop.STATIC)
                .fieldEncoding(H264FieldEncoding.PAFF)
                .sceneChangeDetect(
```

```
                        H264SceneChangeDetect.ENABLED)
                .minIInterval(0)
                .telecine(H264Telecine.NONE)
                .framerateConversionAlgorithm(
                        H264FramerateConversionAlgorithm.DUPLICATE_DROP)
                .entropyEncoding(
                        H264EntropyEncoding.CABAC)
                .slices(1)
                .unregisteredSeiTimecode(
                        H264UnregisteredSeiTimecode.DISABLED)
                .repeatPps(H264RepeatPps.DISABLED)
                .adaptiveQuantization(
                        H264AdaptiveQuantization.HIGH)
                .spatialAdaptiveQuantization(
                        H264SpatialAdaptiveQuantization.ENABLED)
                .temporalAdaptiveQuantization(
                        H264TemporalAdaptiveQuantization.ENABLED)
                .flickerAdaptiveQuantization(
                        H264FlickerAdaptiveQuantization.DISABLED)
                .softness(0)
                .interlaceMode(H264InterlaceMode.PROGRESSIVE)
                .build())
```

```
   .build())
                                                                    .build())
.audioDescriptions(AudioDescription.builder()
.audioTypeControl(AudioTypeControl.FOLLOW_INPUT)
.languageCodeControl(
   AudioLanguageCodeControl.FOLLOW_INPUT)
.codecSettings(AudioCodecSettings.builder()
   .codec(AudioCodec.AAC)
   .aacSettings(AacSettings
                  .builder()
                  .codecProfile(AacCodecProfile.LC)
                  .rateControlMode(
                                AacRateControlMode.CBR)
                  .codingMode(AacCodingMode.CODING_MODE_2_0)
                  .sampleRate(44100)
                  .bitrate(160000)
                  .rawFormat(AacRawFormat.NONE)
                  .specification(AacSpecification.MPEG4)
                  .audioDescriptionBroadcasterMix(
                                AacAudioDescriptionBroadcasterMix.NORMAL)
                  .build())
   .build())
                                                                    .build())
```

```
                                                        .build())
                                        .build();
                        OutputGroup thumbs = OutputGroup.builder().name("File
Group").customName("thumbs")

.outputGroupSettings(OutputGroupSettings.builder()

.type(OutputGroupType.FILE_GROUP_SETTINGS)

.fileGroupSettings(FileGroupSettings.builder()

.destination(thumbsOutput).build())
                                                        .build())
                                        .outputs(Output.builder().extension("jpg")

.containerSettings(ContainerSettings.builder()

.container(ContainerType.RAW).build())

.videoDescription(VideoDescription.builder()

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.FRAME_CAPTURE)

   .frameCaptureSettings(

                  FrameCaptureSettings

                                    .builder()

                                    .framerateNumerator(
```

```
                                                    1)

                                    .framerateDenominator(

                                                    1)

                                    .maxCaptures(10000000)

                                    .quality(80)

                                    .build())

   .build())
                                                                        .build())
                                                    .build())
                                        .build();

                        Map<String, AudioSelector> audioSelectors = new HashMap<>();
                        audioSelectors.put("Audio Selector 1",

AudioSelector.builder().defaultSelection(AudioDefaultSelection.DEFAULT)
                                                    .offset(0).build());

                        JobSettings jobSettings =
JobSettings.builder().inputs(Input.builder()
                                        .audioSelectors(audioSelectors)
                                        .videoSelector(

VideoSelector.builder().colorSpace(ColorSpace.FOLLOW)

.rotate(InputRotate.DEGREE_0).build())

.filterEnable(InputFilterEnable.AUTO).filterStrength(0)
                                        .deblockFilter(InputDeblockFilter.DISABLED)

.denoiseFilter(InputDenoiseFilter.DISABLED).psiControl(InputPsiControl.USE_PSI)

.timecodeSource(InputTimecodeSource.EMBEDDED).fileInput(fileInput).build())
                                        .outputGroups(appleHLS, thumbs,
fileMp4).build();

                        CreateJobRequest createJobRequest =
CreateJobRequest.builder().role(mcRoleARN)
```

```
                                        .settings(jobSettings)
                                        .build();

                        CreateJobResponse createJobResponse =
mc.createJob(createJobRequest);
                        return createJobResponse.job().id();

                } catch (MediaConvertException e) {
                        System.out.println(e.toString());
                        System.exit(0);
                }
                return "";
        }

        private final static Output createOutput(String customName,
                        String nameModifier,
                        String segmentModifier,
                        int qvbrMaxBitrate,
                        int qvbrQualityLevel,
                        int originWidth,
                        int originHeight,
                        int targetWidth) {

                int targetHeight = Math.round(originHeight * targetWidth /
originWidth)
                                - (Math.round(originHeight * targetWidth /
originWidth) % 4);
                Output output = null;
                try {
                        output =
Output.builder().nameModifier(nameModifier).outputSettings(OutputSettings.builder()

.hlsSettings(HlsSettings.builder().segmentModifier(segmentModifier)

.audioGroupId("program_audio")

.iFrameOnlyManifest(HlsIFrameOnlyManifest.EXCLUDE).build())
                                        .build())

.containerSettings(ContainerSettings.builder().container(ContainerType.M3_U8)

.m3u8Settings(M3u8Settings.builder().audioFramesPerPes(4)

.pcrControl(M3u8PcrControl.PCR_EVERY_PES_PACKET)
```

```
.pmtPid(480).privateMetadataPid(503)

.programNumber(1).patInterval(0).pmtInterval(0)

.scte35Source(M3u8Scte35Source.NONE)

.scte35Pid(500).nielsenId3(M3u8NielsenId3.NONE)

.timedMetadata(TimedMetadata.NONE)

.timedMetadataPid(502).videoPid(481)

.audioPids(482, 483, 484, 485, 486, 487, 488,

   489, 490, 491, 492)
                                                                        .build())
                                                          .build())
                                        .videoDescription(

VideoDescription.builder().width(targetWidth)

.height(targetHeight)

.scalingBehavior(ScalingBehavior.DEFAULT)

.sharpness(50).antiAlias(AntiAlias.ENABLED)

.timecodeInsertion(

   VideoTimecodeInsertion.DISABLED)

.colorMetadata(ColorMetadata.INSERT)

.respondToAfd(RespondToAfd.NONE)

.afdSignaling(AfdSignaling.NONE)

.dropFrameTimecode(DropFrameTimecode.ENABLED)

.codecSettings(VideoCodecSettings.builder()

   .codec(VideoCodec.H_264)
```

```
    .h264Settings(H264Settings
                    .builder()
                    .rateControlMode(
                                    H264RateControlMode.QVBR)
                    .parControl(H264ParControl.INITIALIZE_FROM_SOURCE)
                    .qualityTuningLevel(
                                    H264QualityTuningLevel.SINGLE_PASS)
                    .qvbrSettings(H264QvbrSettings
                                    .builder()
                                    .qvbrQualityLevel(
                                                    qvbrQualityLevel)
                                    .build())
                    .codecLevel(H264CodecLevel.AUTO)
                    .codecProfile((targetHeight > 720
                                    && targetWidth > 1280)
                                                    ? H264CodecProfile.HIGH
                                                    : H264CodecProfile.MAIN)
                    .maxBitrate(qvbrMaxBitrate)
                    .framerateControl(
                                    H264FramerateControl.INITIALIZE_FROM_SOURCE)
                    .gopSize(2.0)
                    .gopSizeUnits(H264GopSizeUnits.SECONDS)
```

```
                .numberBFramesBetweenReferenceFrames(
                        2)
                .gopClosedCadence(
                        1)
                .gopBReference(H264GopBReference.DISABLED)
                .slowPal(H264SlowPal.DISABLED)
                .syntax(H264Syntax.DEFAULT)
                .numberReferenceFrames(
                        3)
                .dynamicSubGop(H264DynamicSubGop.STATIC)
                .fieldEncoding(H264FieldEncoding.PAFF)
                .sceneChangeDetect(
                        H264SceneChangeDetect.ENABLED)
                .minIInterval(0)
                .telecine(H264Telecine.NONE)
                .framerateConversionAlgorithm(
                        H264FramerateConversionAlgorithm.DUPLICATE_DROP)
                .entropyEncoding(
                        H264EntropyEncoding.CABAC)
                .slices(1)
                .unregisteredSeiTimecode(
                        H264UnregisteredSeiTimecode.DISABLED)
```

```
                    .repeatPps(H264RepeatPps.DISABLED)
                    .adaptiveQuantization(
                                    H264AdaptiveQuantization.HIGH)
                    .spatialAdaptiveQuantization(
                                    H264SpatialAdaptiveQuantization.ENABLED)
                    .temporalAdaptiveQuantization(
                                    H264TemporalAdaptiveQuantization.ENABLED)
                    .flickerAdaptiveQuantization(
                                    H264FlickerAdaptiveQuantization.DISABLED)
                    .softness(0)
                    .interlaceMode(H264InterlaceMode.PROGRESSIVE)
                    .build())
    .build())
                                                                    .build())
.audioDescriptions(AudioDescription.builder()
.audioTypeControl(AudioTypeControl.FOLLOW_INPUT)
.languageCodeControl(AudioLanguageCodeControl.FOLLOW_INPUT)
.codecSettings(AudioCodecSettings.builder()
.codec(AudioCodec.AAC).aacSettings(AacSettings
    .builder()
    .codecProfile(AacCodecProfile.LC)
    .rateControlMode(
```

```
                    AacRateControlMode.CBR)
    .codingMode(AacCodingMode.CODING_MODE_2_0)
    .sampleRate(44100)
    .bitrate(96000)
    .rawFormat(AacRawFormat.NONE)
    .specification(AacSpecification.MPEG4)
    .audioDescriptionBroadcasterMix(
                    AacAudioDescriptionBroadcasterMix.NORMAL)
    .build())
                                                                .build())
                                                        .build())
                                    .build();
            } catch (MediaConvertException e) {
                    e.printStackTrace();
                    System.exit(0);
            }
            return output;
        }
}
```

- Untuk detail API, lihat CreateJobdi Referensi AWS SDK for Java 2.x API.

### `GetJob`

Contoh kode berikut menunjukkan cara menggunakan`GetJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.GetJobRequest;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.GetJobResponse;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
import java.net.URI;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetJob {

    public static void main(String[] args) {

        final String usage = "\n" +
                "  <jobId> \n\n" +
                "Where:\n" +
                "  jobId - The job id value.\n\n";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String jobId = args[0];
        Region region = Region.US_WEST_2;
        MediaConvertClient mc = MediaConvertClient.builder()
                .region(region)
                .build();

        getSpecificJob(mc, jobId);
        mc.close();
    }

    public static void getSpecificJob(MediaConvertClient mc, String jobId) {
        try {
```

```
            GetJobRequest jobRequest = GetJobRequest.builder()
                    .id(jobId)
                    .build();

            GetJobResponse response = mc.getJob(jobRequest);
            System.out.println("The ARN of the job is " + response.job().arn());

        } catch (MediaConvertException e) {
            System.out.println(e.toString());
            System.exit(0);
        }
    }
}
```

- Untuk detail API, lihat GetJobdi Referensi AWS SDK for Java 2.x API.

### `ListJobs`

Contoh kode berikut menunjukkan cara menggunakan`ListJobs`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.mediaconvert.MediaConvertClient;
import software.amazon.awssdk.services.mediaconvert.model.ListJobsRequest;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsResponse;
import software.amazon.awssdk.services.mediaconvert.model.DescribeEndpointsRequest;
import software.amazon.awssdk.services.mediaconvert.model.ListJobsResponse;
import software.amazon.awssdk.services.mediaconvert.model.Job;
import software.amazon.awssdk.services.mediaconvert.model.MediaConvertException;
import java.net.URI;
import java.util.List;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListJobs {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MediaConvertClient mc = MediaConvertClient.builder()
                .region(region)
                .build();

        listCompleteJobs(mc);
        mc.close();
    }

    public static void listCompleteJobs(MediaConvertClient mc) {
        try {
            // Create the ListJobsRequest
            ListJobsRequest jobsRequest = ListJobsRequest.builder()
                    .maxResults(10)
                    .status("COMPLETE")
                    .build();

            // Call the listJobs operation
            ListJobsResponse jobsResponse = mc.listJobs(jobsRequest);
            List<Job> jobs = jobsResponse.jobs();
            for (Job job : jobs) {
                System.out.println("The JOB ARN is : " + job.arn());
            }

        } catch (MediaConvertException e) {
            System.out.println(e.toString());
            System.exit(0);
        }
    }
}
```

- Untuk detail API, lihat ListJobsdi Referensi AWS SDK for Java 2.x API.

# Contoh Migration Hub menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum menggunakan AWS SDK for Java 2.x with Migration Hub.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


## Tindakan

### `DeleteProgressUpdateStream`

Contoh kode berikut menunjukkan cara menggunakan`DeleteProgressUpdateStream`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DeleteProgressUpdateStreamRequest;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteProgressStream {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <progressStream>\s

                Where:
                    progressStream - the name of a progress stream to delete.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String progressStream = args[0];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        deleteStream(migrationClient, progressStream);
        migrationClient.close();
    }

    public static void deleteStream(MigrationHubClient migrationClient, String
 streamName) {
        try {
            DeleteProgressUpdateStreamRequest deleteProgressUpdateStreamRequest =
 DeleteProgressUpdateStreamRequest
                    .builder()
                    .progressUpdateStreamName(streamName)
                    .build();


 migrationClient.deleteProgressUpdateStream(deleteProgressUpdateStreamRequest);
            System.out.println(streamName + " is deleted");

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
```

```
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteProgressUpdateStreamdi Referensi AWS SDK for Java 2.x API.

### `DescribeApplicationState`

Contoh kode berikut menunjukkan cara menggunakan`DescribeApplicationState`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeApplicationStateRequest;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeApplicationStateResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAppState {
    public static void main(String[] args) {
        final String usage = """

                Usage:
```

```
                    DescribeAppState <appId>\s

                Where:
                    appId -  the application id value.\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        describeApplicationState(migrationClient, appId);
        migrationClient.close();
    }

    public static void describeApplicationState(MigrationHubClient migrationClient,
String appId) {
        try {
            DescribeApplicationStateRequest applicationStateRequest =
DescribeApplicationStateRequest.builder()
                    .applicationId(appId)
                    .build();

            DescribeApplicationStateResponse applicationStateResponse =
migrationClient
                    .describeApplicationState(applicationStateRequest);
            System.out.println("The application status is " +
applicationStateResponse.applicationStatusAsString());

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeApplicationStatedi Referensi AWS SDK for Java 2.x API.

### `DescribeMigrationTask`

Contoh kode berikut menunjukkan cara menggunakan`DescribeMigrationTask`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeMigrationTaskRequest;
import
 software.amazon.awssdk.services.migrationhub.model.DescribeMigrationTaskResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeMigrationTask {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    DescribeMigrationTask <migrationTask> <progressStream>\s

                Where:
                    migrationTask - the name of a migration task.\s
                    progressStream - the name of a progress stream.\s
                """;

        if (args.length < 2) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String migrationTask = args[0];
        String progressStream = args[1];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        describeMigTask(migrationClient, migrationTask, progressStream);
        migrationClient.close();
    }

    public static void describeMigTask(MigrationHubClient migrationClient, String
 migrationTask,
            String progressStream) {
        try {
            DescribeMigrationTaskRequest migrationTaskRequestRequest =
 DescribeMigrationTaskRequest.builder()
                    .progressUpdateStream(progressStream)
                    .migrationTaskName(migrationTask)
                    .build();

            DescribeMigrationTaskResponse migrationTaskResponse = migrationClient
                    .describeMigrationTask(migrationTaskRequestRequest);
            System.out.println("The name is " +
 migrationTaskResponse.migrationTask().migrationTaskName());

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeMigrationTaskdi Referensi AWS SDK for Java 2.x API.

### `ImportMigrationTask`

Contoh kode berikut menunjukkan cara menggunakan`ImportMigrationTask`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import
 software.amazon.awssdk.services.migrationhub.model.CreateProgressUpdateStreamRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ImportMigrationTaskRequest;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ImportMigrationTask {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <migrationTask> <progressStream>\s

                Where:
                    migrationTask - the name of a migration task.\s
                    progressStream - the name of a progress stream.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String migrationTask = args[0];
```

```
        String progressStream = args[1];
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        importMigrTask(migrationClient, migrationTask, progressStream);
        migrationClient.close();
    }

    public static void importMigrTask(MigrationHubClient migrationClient, String
 migrationTask, String progressStream) {
        try {
            CreateProgressUpdateStreamRequest progressUpdateStreamRequest =
 CreateProgressUpdateStreamRequest.builder()
                    .progressUpdateStreamName(progressStream)
                    .dryRun(false)
                    .build();

            migrationClient.createProgressUpdateStream(progressUpdateStreamRequest);
            ImportMigrationTaskRequest migrationTaskRequest =
 ImportMigrationTaskRequest.builder()
                    .migrationTaskName(migrationTask)
                    .progressUpdateStream(progressStream)
                    .dryRun(false)
                    .build();

            migrationClient.importMigrationTask(migrationTaskRequest);

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ImportMigrationTaskdi Referensi AWS SDK for Java 2.x API.

## `ListApplications`

Contoh kode berikut menunjukkan cara menggunakan`ListApplications`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.ApplicationState;
import
 software.amazon.awssdk.services.migrationhub.model.ListApplicationStatesRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ListApplicationStatesResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListApplications {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listApps(migrationClient);
        migrationClient.close();
    }

    public static void listApps(MigrationHubClient migrationClient) {
        try {
            ListApplicationStatesRequest applicationStatesRequest =
 ListApplicationStatesRequest.builder()
                    .maxResults(10)
```

```
                    .build();

            ListApplicationStatesResponse response =
 migrationClient.listApplicationStates(applicationStatesRequest);
            List<ApplicationState> apps = response.applicationStateList();
            for (ApplicationState appState : apps) {
                System.out.println("App Id is " + appState.applicationId());
                System.out.println("The status is " +
 appState.applicationStatus().toString());
            }

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListApplicationsdi Referensi AWS SDK for Java 2.x API.

### `ListCreatedArtifacts`

Contoh kode berikut menunjukkan cara menggunakan`ListCreatedArtifacts`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.CreatedArtifact;
import
 software.amazon.awssdk.services.migrationhub.model.ListCreatedArtifactsRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ListCreatedArtifactsResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;
```

```
/**
 * To run this Java V2 code example, ensure that you have setup your development
 * environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCreatedArtifacts {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listArtifacts(migrationClient);
        migrationClient.close();
    }

    public static void listArtifacts(MigrationHubClient migrationClient) {
        try {
            ListCreatedArtifactsRequest listCreatedArtifactsRequest =
 ListCreatedArtifactsRequest.builder()
                    .maxResults(10)
                    .migrationTaskName("SampleApp5")
                    .progressUpdateStream("ProgressSteamB")
                    .build();

            ListCreatedArtifactsResponse response =
 migrationClient.listCreatedArtifacts(listCreatedArtifactsRequest);
            List<CreatedArtifact> apps = response.createdArtifactList();
            for (CreatedArtifact artifact : apps) {
                System.out.println("APp Id is " + artifact.description());
                System.out.println("The name is " + artifact.name());
            }

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListCreatedArtifactsdi Referensi AWS SDK for Java 2.x API.

### `ListMigrationTasks`

Contoh kode berikut menunjukkan cara menggunakan`ListMigrationTasks`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.migrationhub.MigrationHubClient;
import software.amazon.awssdk.services.migrationhub.model.ListMigrationTasksRequest;
import
 software.amazon.awssdk.services.migrationhub.model.ListMigrationTasksResponse;
import software.amazon.awssdk.services.migrationhub.model.MigrationTaskSummary;
import software.amazon.awssdk.services.migrationhub.model.MigrationHubException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListMigrationTasks {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        MigrationHubClient migrationClient = MigrationHubClient.builder()
                .region(region)
                .build();

        listMigrTasks(migrationClient);
```

```
        migrationClient.close();
    }

    public static void listMigrTasks(MigrationHubClient migrationClient) {
        try {
            ListMigrationTasksRequest listMigrationTasksRequest =
 ListMigrationTasksRequest.builder()
                    .maxResults(10)
                    .build();

            ListMigrationTasksResponse response =
 migrationClient.listMigrationTasks(listMigrationTasksRequest);
            List<MigrationTaskSummary> migrationList =
 response.migrationTaskSummaryList();
            for (MigrationTaskSummary migration : migrationList) {
                System.out.println("Migration task name is " +
 migration.migrationTaskName());
                System.out.println("The Progress update stream is " +
 migration.progressUpdateStream());
            }

        } catch (MigrationHubException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListMigrationTasksdi Referensi AWS SDK for Java 2.x API.

# Contoh MSK Amazon menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan MSK AWS SDK for Java 2.x with Amazon.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Contoh nirserver

# Contoh nirserver

Memanggil fungsi Lambda dari pemicu MSK Amazon

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima catatan dari kluster MSK Amazon. Fungsi mengambil muatan MSK dan mencatat konten catatan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara MSK Amazon dengan Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent;
import com.amazonaws.services.lambda.runtime.events.KafkaEvent.KafkaEventRecord;

import java.util.Base64;
import java.util.Map;

public class Example implements RequestHandler<KafkaEvent, Void> {

    @Override
    public Void handleRequest(KafkaEvent event, Context context) {
        for (Map.Entry<String, java.util.List<KafkaEventRecord>> entry :
 event.getRecords().entrySet()) {
            String key = entry.getKey();
            System.out.println("Key: " + key);

            for (KafkaEventRecord record : entry.getValue()) {
                System.out.println("Record: " + record);

                byte[] value = Base64.getDecoder().decode(record.getValue());
                String message = new String(value);
                System.out.println("Message: " + message);
```

```
            }
        }

        return null;
    }
}
```

# Contoh Neptunus menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Neptunus.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario

## Memulai

### Halo Neptunus

Contoh kode berikut menunjukkan bagaimana memulai menggunakan Neptunus.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloNeptune {
    public static void main(String[] args) {
        NeptuneAsyncClient neptuneClient = NeptuneAsyncClient.create();
        describeDbCluster(neptuneClient).join(); // This ensures the async code runs
 to completion
    }

    /**
     * Describes the Amazon Neptune DB clusters.
     *
     * @param neptuneClient the Neptune asynchronous client used to make the request
     * @return a {@link CompletableFuture} that completes when the operation is
 finished
     */
    public static CompletableFuture<Void> describeDbCluster(NeptuneAsyncClient
 neptuneClient) {
        DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
                .maxRecords(20)
                .build();

        SdkPublisher<DescribeDbClustersResponse> paginator =
 neptuneClient.describeDBClustersPaginator(request);
        CompletableFuture<Void> future = new CompletableFuture<>();

        paginator.subscribe(new Subscriber<DescribeDbClustersResponse>() {
            private Subscription subscription;
```

```
            @Override
            public void onSubscribe(Subscription s) {
                this.subscription = s;
                s.request(Long.MAX_VALUE); // request all items
            }

            @Override
            public void onNext(DescribeDbClustersResponse response) {
                response.dbClusters().forEach(cluster -> {
                    System.out.println("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                    System.out.println("Status: " + cluster.status());
                });
            }

            @Override
            public void onError(Throwable t) {
                future.completeExceptionally(t);
            }

            @Override
            public void onComplete() {
                future.complete(null);
            }
        });

        return future.whenComplete((result, throwable) -> {
            neptuneClient.close();
            if (throwable != null) {
                System.err.println("Error describing DB clusters: " +
throwable.getMessage());
            }
        });
    }
```

- Untuk detail API, lihat Menjelaskan DBClusters Paginator di Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat Grup Subnet Amazon Neptunus.
- Buat Cluster Neptunus.
- Buat Instance Neptunus.
- Periksa status Instance Neptunus.
- Tampilkan detail cluster Neptunus.
- Hentikan gugus Neptunus.
- Mulai cluster Neptunus.
- Hapus Aset Neptunus.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang menunjukkan fitur Neptunus.

```
public class NeptuneScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger =
 LoggerFactory.getLogger(NeptuneScenario.class);
    static Scanner scanner = new Scanner(System.in);
    static NeptuneActions neptuneActions = new NeptuneActions();

    public static void main(String[] args) {
        final String usage =
                """
                Usage:
                    <subnetGroupName> <clusterName> <dbInstanceId>

                Where:
```

```
                    subnetGroupName - The name of an existing Neptune DB subnet
group that includes subnets in at least two Availability Zones.
                    clusterName     - The unique identifier for the Neptune DB
cluster.
                    dbInstanceId    - The identifier for a specific Neptune DB
instance within the cluster.
                """;
        String subnetGroupName = "neptuneSubnetGroup65";
        String clusterName = "neptuneCluster65";
        String dbInstanceId = "neptuneDB65";

        logger.info("""
                    Amazon Neptune is a fully managed graph
                    database service by AWS, designed specifically
                    for handling complex relationships and connected
                    datasets at scale. It supports two popular graph models:
                    property graphs (via openCypher and Gremlin) and RDF
                    graphs (via SPARQL). This makes Neptune ideal for
                    use cases such as knowledge graphs, fraud detection,
                    social networking, recommendation engines, and
                    network management, where relationships between
                    entities are central to the data.

                    Being fully managed, Neptune handles database
                    provisioning, patching, backups, and replication,
                    while also offering high availability and durability
                    within AWS's infrastructure.

                    For developers, programming with Neptune allows
                    for building intelligent, relationship-aware
                    applications that go beyond traditional tabular
                    databases. Developers can use the AWS SDK for Java
                    to automate infrastructure operations (via NeptuneClient).

                     Let's get started...
                     """);
        waitForInputToContinue(scanner);
        runScenario(subnetGroupName, dbInstanceId, clusterName);
    }

    public static void runScenario(String subnetGroupName, String dbInstanceId,
String clusterName) {
        logger.info(DASHES);
        logger.info("1. Create a Neptune DB Subnet Group");
```

```
        logger.info("The Neptune DB subnet group is used when launching a Neptune
cluster");
        waitForInputToContinue(scanner);
        try {
            neptuneActions.createSubnetGroupAsync(subnetGroupName).join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Create a Neptune Cluster");
        logger.info("A Neptune Cluster allows you to store and query highly
connected datasets with low latency.");
        waitForInputToContinue(scanner);
        String dbClusterId;
        try {
            dbClusterId = neptuneActions.createDBClusterAsync(clusterName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }

        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("3. Create a Neptune DB Instance");
```

```
        logger.info("In this step, we add a new database instance to the Neptune
cluster");
        waitForInputToContinue(scanner);
        try {
        neptuneActions.createDBInstanceAsync(dbInstanceId, dbClusterId).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ServiceQuotaExceededException) {
                logger.error("The request failed due to service quota exceeded: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Check the status of the Neptune DB Instance");
        logger.info("""
                    In this step, we will wait until the DB instance
                    becomes available. This may take around 10 minutes.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.checkInstanceStatus(dbInstanceId, "available").join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            logger.error("An unexpected error occurred.", cause);
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5.Show Neptune Cluster details");
        waitForInputToContinue(scanner);
        try {
            neptuneActions.describeDBClustersAsync(clusterName).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
```

```
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Stop the Amazon Neptune cluster");
        logger.info("""
                    Once stopped, this step polls the status
                    until the cluster is in a stopped state.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.stopDBClusterAsync(dbClusterId);
            neptuneActions.waitForClusterStatus(dbClusterId, "stopped");
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Start the Amazon Neptune cluster");
        logger.info("""
                    Once started, this step polls the clusters
                    status until it's in an available state.
                    We will also poll the instance status.
                    """);
        waitForInputToContinue(scanner);
        try {
            neptuneActions.startDBClusterAsync(dbClusterId);
            neptuneActions.waitForClusterStatus(dbClusterId, "available");
```

```
            neptuneActions.checkInstanceStatus(dbInstanceId, "available").join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof ResourceNotFoundException) {
                logger.error("The request failed due to the resource not found: {}",
cause.getMessage());
            } else {
                logger.error("An unexpected error occurred.", cause);
            }
            return;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("8. Delete the Neptune Assets");
        logger.info("Would you like to delete the Neptune Assets? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete the Neptune assets.");
            try {
                neptuneActions.deleteNeptuneResourcesAsync(dbInstanceId,
clusterName, subnetGroupName);
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof ResourceNotFoundException) {
                    logger.error("The request failed due to the resource not found:
{}", cause.getMessage());
                } else {
                    logger.error("An unexpected error occurred.", cause);
                }
                return;
            }
        } else {
            logger.info("You selected not to delete Neptune assets.");
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info(
                """
                Thank you for checking out the Amazon Neptune Service Use demo. We
hope you
```

```
                learned something new, or got some inspiration for your own apps
 today.
                For more AWS code examples, have a look at:
                https://docs.aws.amazon.com/code-library/latest/ug/what-is-code-
library.html
                """);
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode Neptunus SDK.

```
public class NeptuneActions {
    private CompletableFuture<Void> instanceCheckFuture;
    private static NeptuneAsyncClient neptuneAsyncClient;
    private final Region region = Region.US_EAST_1;
    private static final Logger logger =
 LoggerFactory.getLogger(NeptuneActions.class);
    private final NeptuneClient neptuneClient =
 NeptuneClient.builder().region(region).build();

    /**
     * Retrieves an instance of the NeptuneAsyncClient.
     * <p>
     * This method initializes and returns a singleton instance of the
 NeptuneAsyncClient. The client
```

```
     * is configured with the following settings:
     * <ul>
     *     <li>Maximum concurrency: 100</li>
     *     <li>Connection timeout: 60 seconds</li>
     *     <li>Read timeout: 60 seconds</li>
     *     <li>Write timeout: 60 seconds</li>
     *     <li>API call timeout: 2 minutes</li>
     *     <li>API call attempt timeout: 90 seconds</li>
     *     <li>Retry strategy: STANDARD</li>
     * </ul>
     * The client is built using the NettyNioAsyncHttpClient.
     *
     * @return the singleton instance of the NeptuneAsyncClient
     */
    private static NeptuneAsyncClient getAsyncClient() {
        if (neptuneAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryStrategy(RetryMode.STANDARD)
                    .build();

            neptuneAsyncClient = NeptuneAsyncClient.builder()
                    .httpClient(httpClient)
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return neptuneAsyncClient;
    }

    /**
     * Asynchronously deletes a set of Amazon Neptune resources in a defined order.
     * <p>
     * The method performs the following operations in sequence:
     * <ol>
```

```
     *     <li>Deletes the Neptune DB instance identified by {@code dbInstanceId}.</
li>
     *     <li>Waits until the DB instance is fully deleted.</li>
     *     <li>Deletes the Neptune DB cluster identified by {@code dbClusterId}.</
li>
     *     <li>Deletes the Neptune DB subnet group identified by {@code
 subnetGroupName}.</li>
     * </ol>
     * <p>
     * If any step fails, the subsequent operations are not performed, and the
 exception
     * is logged. This method blocks the calling thread until all operations
 complete.
     *
     * @param dbInstanceId      the ID of the Neptune DB instance to delete
     * @param dbClusterId       the ID of the Neptune DB cluster to delete
     * @param subnetGroupName   the name of the Neptune DB subnet group to delete
     */
    public void deleteNeptuneResourcesAsync(String dbInstanceId, String dbClusterId,
 String subnetGroupName) {
        deleteDBInstanceAsync(dbInstanceId)
                .thenCompose(v -> waitUntilInstanceDeletedAsync(dbInstanceId))
                .thenCompose(v -> deleteDBClusterAsync(dbClusterId))
                .thenCompose(v -> deleteDBSubnetGroupAsync(subnetGroupName))
                .whenComplete((v, ex) -> {
                    if (ex != null) {
                        logger.info("Failed to delete Neptune resources: " +
 ex.getMessage());
                    } else {
                        logger.info("Neptune resources deleted successfully.");
                    }
                })
                .join(); // Waits for the entire async chain to complete
    }

    /**
     * Deletes a subnet group.
     *
     * @param subnetGroupName the identifier of the subnet group to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
 deleted
     */
    public CompletableFuture<Void> deleteDBSubnetGroupAsync(String subnetGroupName)
 {
```

```
        DeleteDbSubnetGroupRequest request = DeleteDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(subnetGroupName)
                .build();

        return getAsyncClient().deleteDBSubnetGroup(request)
                .thenAccept(response -> logger.info("## Deleting Subnet Group: " +
subnetGroupName));
    }

    /**
     * Deletes a DB instance asynchronously.
     *
     * @param clusterId the identifier of the cluster to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBClusterAsync(String clusterId) {
        DeleteDbClusterRequest request = DeleteDbClusterRequest.builder()
                .dbClusterIdentifier(clusterId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBCluster(request)
                .thenAccept(response -> System.out.println("## Deleting DB Cluster:
" + clusterId));
    }

    public CompletableFuture<Void> waitUntilInstanceDeletedAsync(String instanceId)
{
        CompletableFuture<Void> future = new CompletableFuture<>();
        long startTime = System.currentTimeMillis();
        checkInstanceDeletedRecursive(instanceId, startTime, future);
        return future;
    }

    /**
     * Deletes a DB instance asynchronously.
     *
     * @param instanceId the identifier of the DB instance to be deleted
     * @return a {@link CompletableFuture} that completes when the DB instance has
been deleted
     */
    public CompletableFuture<Void> deleteDBInstanceAsync(String instanceId) {
        DeleteDbInstanceRequest request = DeleteDbInstanceRequest.builder()
```

```
                .dbInstanceIdentifier(instanceId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBInstance(request)
                .thenAccept(response -> System.out.println("## Deleting DB Instance:
" + instanceId));
    }


    private void checkInstanceDeletedRecursive(String instanceId, long startTime,
CompletableFuture<Void> future) {
        DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
                .dbInstanceIdentifier(instanceId)
                .build();

        getAsyncClient().describeDBInstances(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof NeptuneException &&
                                ((NeptuneException)
cause).awsErrorDetails().errorCode().equals("DBInstanceNotFound")) {
                            long elapsed = (System.currentTimeMillis() -
startTime) / 1000;
                            logger.info("\r Instance %s deleted after %ds%n",
instanceId, elapsed);
                            future.complete(null);
                            return;
                        }
                        future.completeExceptionally(new CompletionException("Error
polling DB instance", cause));
                        return;
                    }

                    String status =
response.dbInstances().get(0).dbInstanceStatus();
                    long elapsed = (System.currentTimeMillis() - startTime) / 1000;
                    System.out.printf("\r  Waiting: Instance %s status: %-10s (%ds
elapsed)", instanceId, status, elapsed);
                    System.out.flush();

                    CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
```

```
                            .execute(() -> checkInstanceDeletedRecursive(instanceId,
startTime, future));
                });
    }


    public void waitForClusterStatus(String clusterId, String desiredStatus) {
        System.out.printf("Waiting for cluster '%s' to reach status '%s'...\n",
clusterId, desiredStatus);
        CompletableFuture<Void> future = new CompletableFuture<>();
        checkClusterStatusRecursive(clusterId, desiredStatus,
System.currentTimeMillis(), future);
        future.join();
    }

    private void checkClusterStatusRecursive(String clusterId, String desiredStatus,
long startTime, CompletableFuture<Void> future) {
        DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
                .dbClusterIdentifier(clusterId)
                .build();

        getAsyncClient().describeDBClusters(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        future.completeExceptionally(
                                new CompletionException("Error checking Neptune
cluster status", cause)
                        );
                        return;
                    }

                    List<DBCluster> clusters = response.dbClusters();
                    if (clusters.isEmpty()) {
                        future.completeExceptionally(new RuntimeException("Cluster
not found: " + clusterId));
                        return;
                    }

                    String currentStatus = clusters.get(0).status();
                    long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                    System.out.printf("\r Elapsed: %-20s  Cluster status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
```

```
                    System.out.flush();

                    if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                        System.out.printf("\r Neptune cluster reached desired status
'%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                        future.complete(null);
                    } else {
                        CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                                .execute(() ->
checkClusterStatusRecursive(clusterId, desiredStatus, startTime, future));
                    }
                });
    }


    /**
     * Starts an Amazon Neptune DB cluster.
     *
     * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
     */
    public CompletableFuture<StartDbClusterResponse> startDBClusterAsync(String
clusterIdentifier) {
        StartDbClusterRequest clusterRequest = StartDbClusterRequest.builder()
                .dbClusterIdentifier(clusterIdentifier)
                .build();

        return getAsyncClient().startDBCluster(clusterRequest)
                .whenComplete((response, error) -> {
                    if (error != null) {
                        Throwable cause = error.getCause() != null ?
error.getCause() : error;

                        if (cause instanceof ResourceNotFoundException) {
                            throw (ResourceNotFoundException) cause;
                        }

                        throw new RuntimeException("Failed to start DB cluster: " +
cause.getMessage(), cause);
                    } else {
                        logger.info("DB Cluster starting: " + clusterIdentifier);
                    }
                });
    }
```

```
   /**
    * Stops an Amazon Neptune DB cluster.
    *
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StopDbClusterResponse> stopDBClusterAsync(String
clusterIdentifier) {
       StopDbClusterRequest clusterRequest = StopDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().stopDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to stop DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster stopped: " + clusterIdentifier);
                   }
               });
   }



   /**
    * Asynchronously describes the specified Amazon RDS DB cluster.
    *
    * @param clusterId the identifier of the DB cluster to describe
    * @return a {@link CompletableFuture} that completes when the operation is
done, or throws a {@link RuntimeException}
    * if an error occurs
    */
   public CompletableFuture<Void> describeDBClustersAsync(String clusterId) {
       DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
               .dbClusterIdentifier(clusterId)
```

```
                .build();

        return getAsyncClient().describeDBClusters(request)
                .thenAccept(response -> {
                    for (DBCluster cluster : response.dbClusters()) {
                        logger.info("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                        logger.info("Status: " + cluster.status());
                        logger.info("Engine: " + cluster.engine());
                        logger.info("Engine Version: " + cluster.engineVersion());
                        logger.info("Endpoint: " + cluster.endpoint());
                        logger.info("Reader Endpoint: " + cluster.readerEndpoint());
                        logger.info("Availability Zones: " +
cluster.availabilityZones());
                        logger.info("Subnet Group: " + cluster.dbSubnetGroup());
                        logger.info("VPC Security Groups:");
                        cluster.vpcSecurityGroups().forEach(vpcGroup ->
                                logger.info("  - " +
vpcGroup.vpcSecurityGroupId()));
                        logger.info("Storage Encrypted: " +
cluster.storageEncrypted());
                        logger.info("IAM DB Auth Enabled: " +
cluster.iamDatabaseAuthenticationEnabled());
                        logger.info("Backup Retention Period: " +
cluster.backupRetentionPeriod() + " days");
                        logger.info("Preferred Backup Window: " +
cluster.preferredBackupWindow());
                        logger.info("Preferred Maintenance Window: " +
cluster.preferredMaintenanceWindow());
                        logger.info("------");
                    }
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException) {
                        throw (ResourceNotFoundException) cause;
                    }

                    throw new RuntimeException("Failed to describe the DB cluster: "
+ cause.getMessage(), cause);
                });
    }
```

```
   public CompletableFuture<Void> checkInstanceStatus(String instanceId, String
desiredStatus) {
       CompletableFuture<Void> future = new CompletableFuture<>();
       long startTime = System.currentTimeMillis();
       checkStatusRecursive(instanceId, desiredStatus.toLowerCase(), startTime,
future);
       return future;
   }

   /**
    * Checks the status of a Neptune instance recursively until the desired status
is reached or a timeout occurs.
    *
    * @param instanceId     the ID of the Neptune instance to check
    * @param desiredStatus  the desired status of the Neptune instance
    * @param startTime      the start time of the operation, used to calculate the
elapsed time
    * @param future         a {@link CompletableFuture} that will be completed when
the desired status is reached
    */
   private void checkStatusRecursive(String instanceId, String desiredStatus, long
startTime, CompletableFuture<Void> future) {
       DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
               .dbInstanceIdentifier(instanceId)
               .build();

       getAsyncClient().describeDBInstances(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       future.completeExceptionally(
                               new CompletionException("Error checking Neptune
instance status", cause)
                       );
                       return;
                   }

                   List<DBInstance> instances = response.dbInstances();
                   if (instances.isEmpty()) {
                       future.completeExceptionally(new RuntimeException("Instance
not found: " + instanceId));
                       return;
                   }
```

```
                    String currentStatus = instances.get(0).dbInstanceStatus();
                    long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                    System.out.printf("\r Elapsed: %-20s  Status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
                    System.out.flush();

                    if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                        System.out.printf("\r Neptune instance reached desired
status '%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                        future.complete(null);
                    } else {
                        CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                                .execute(() -> checkStatusRecursive(instanceId,
desiredStatus, startTime, future));
                    }
                });
    }


    private String formatElapsedTime(int seconds) {
        int minutes = seconds / 60;
        int remainingSeconds = seconds % 60;

        if (minutes > 0) {
            return minutes + (minutes == 1 ? " min" : " mins") + ", " +
                    remainingSeconds + (remainingSeconds == 1 ? " sec" : " secs");
        } else {
            return remainingSeconds + (remainingSeconds == 1 ? " sec" : " secs");
        }
    }


    /**
     * Creates a new Amazon Neptune DB instance asynchronously.
     *
     * @param dbInstanceId the identifier for the new DB instance
     * @param dbClusterId  the identifier for the DB cluster that the new instance
will be a part of
     * @return a {@link CompletableFuture} that completes with the identifier of the
newly created DB instance
     * @throws CompletionException if the operation fails, with a cause of either:
```

```
    *                               - {@link ServiceQuotaExceededException} if the
request would exceed the maximum quota, or
    *                               - a general exception with the failure message
    */
   public CompletableFuture<String> createDBInstanceAsync(String dbInstanceId,
String dbClusterId) {
       CreateDbInstanceRequest request = CreateDbInstanceRequest.builder()
               .dbInstanceIdentifier(dbInstanceId)
               .dbInstanceClass("db.r5.large")
               .engine("neptune")
               .dbClusterIdentifier(dbClusterId)
               .build();

       return getAsyncClient().createDBInstance(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof ServiceQuotaExceededException) {
                           throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                       }
                       throw new CompletionException("Failed to create Neptune DB
instance: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> {
                   String instanceId =
response.dbInstance().dbInstanceIdentifier();
                   logger.info("Created Neptune DB Instance: " + instanceId);
                   return instanceId;
               });
   }


   /**
    * Creates a new Amazon Neptune DB cluster asynchronously.
    *
    * @param dbName the name of the DB cluster to be created
    * @return a CompletableFuture that, when completed, provides the ID of the
created DB cluster
    * @throws CompletionException if the operation fails for any reason, including
if the request would exceed the maximum quota
    */
   public CompletableFuture<String> createDBClusterAsync(String dbName) {
```

```
        CreateDbClusterRequest request = CreateDbClusterRequest.builder()
                .dbClusterIdentifier(dbName)
                .engine("neptune")
                .deletionProtection(false)
                .backupRetentionPeriod(1)
                .build();

        return getAsyncClient().createDBCluster(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create Neptune DB
cluster: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String clusterId = response.dbCluster().dbClusterIdentifier();
                    logger.info("DB Cluster created: " + clusterId);
                    return clusterId;
                });
    }


    /**
     * Creates a new DB subnet group asynchronously.
     *
     * @param groupName the name of the subnet group to create
     * @return a CompletableFuture that, when completed, returns the Amazon Resource
Name (ARN) of the created subnet group
     * @throws CompletionException if the operation fails, with a cause that may be
a ServiceQuotaExceededException if the request would exceed the maximum quota
     */
    public CompletableFuture<String> createSubnetGroupAsync(String groupName) {

        // Get the Amazon Virtual Private Cloud (VPC) where the Neptune cluster and
resources will be created
        String vpcId = getDefaultVpcId();
        logger.info("VPC is : " + vpcId);

        List<String> subnetList = getSubnetIds(vpcId);
```

```
        for (String subnetId : subnetList) {
            System.out.println("Subnet group:" +subnetId);
        }

        CreateDbSubnetGroupRequest request = CreateDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(groupName)
                .dbSubnetGroupDescription("Subnet group for Neptune cluster")
                .subnetIds(subnetList)
                .build();

        return getAsyncClient().createDBSubnetGroup(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create subnet
group: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String name = response.dbSubnetGroup().dbSubnetGroupName();
                    String arn = response.dbSubnetGroup().dbSubnetGroupArn();
                    logger.info("Subnet group created: " + name);
                    return arn;
                });
    }

    private List<String> getSubnetIds(String vpcId) {
        try (Ec2Client ec2 = Ec2Client.builder().region(region).build()) {
            DescribeSubnetsRequest request = DescribeSubnetsRequest.builder()
                    .filters(builder -> builder.name("vpc-id").values(vpcId))
                    .build();

            DescribeSubnetsResponse response = ec2.describeSubnets(request);
            return response.subnets().stream()
                    .map(Subnet::subnetId)
                    .collect(Collectors.toList());
        }
    }

    public static String getDefaultVpcId() {
```

```
        Ec2Client ec2 = Ec2Client.builder()
                .region(Region.US_EAST_1)
                .build();

        Filter myFilter = Filter.builder()
                .name("isDefault")
                .values("true")
                .build();

        List<Filter> filterList = new ArrayList<>();
        filterList.add(myFilter);

        DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                .filters(filterList)
                .build();


        DescribeVpcsResponse response = ec2.describeVpcs(request);
        if (!response.vpcs().isEmpty()) {
            Vpc defaultVpc = response.vpcs().get(0);
            return defaultVpc.vpcId();
        } else {
            throw new RuntimeException("No default VPC found in this region.");
        }
    }
}
```

## Tindakan

### `CreateDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new Amazon Neptune DB cluster asynchronously.
    *
    * @param dbName the name of the DB cluster to be created
    * @return a CompletableFuture that, when completed, provides the ID of the
created DB cluster
    * @throws CompletionException if the operation fails for any reason, including
if the request would exceed the maximum quota
    */
   public CompletableFuture<String> createDBClusterAsync(String dbName) {
       CreateDbClusterRequest request = CreateDbClusterRequest.builder()
               .dbClusterIdentifier(dbName)
               .engine("neptune")
               .deletionProtection(false)
               .backupRetentionPeriod(1)
               .build();

       return getAsyncClient().createDBCluster(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof ServiceQuotaExceededException) {
                           throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                       }
                       throw new CompletionException("Failed to create Neptune DB
cluster: " + exception.getMessage(), exception);
                   }
               })
               .thenApply(response -> {
                   String clusterId = response.dbCluster().dbClusterIdentifier();
                   logger.info("DB Cluster created: " + clusterId);
                   return clusterId;
               });
   }
```

- Untuk detail API, lihat Membuat DBCluster di Referensi AWS SDK for Java 2.x API.

### `CreateDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates a new Amazon Neptune DB instance asynchronously.
    *
    * @param dbInstanceId the identifier for the new DB instance
    * @param dbClusterId  the identifier for the DB cluster that the new instance
will be a part of
    * @return a {@link CompletableFuture} that completes with the identifier of the
newly created DB instance
    * @throws CompletionException if the operation fails, with a cause of either:
    *                             - {@link ServiceQuotaExceededException} if the
request would exceed the maximum quota, or
    *                             - a general exception with the failure message
    */
   public CompletableFuture<String> createDBInstanceAsync(String dbInstanceId,
String dbClusterId) {
       CreateDbInstanceRequest request = CreateDbInstanceRequest.builder()
               .dbInstanceIdentifier(dbInstanceId)
               .dbInstanceClass("db.r5.large")
               .engine("neptune")
               .dbClusterIdentifier(dbClusterId)
               .build();

       return getAsyncClient().createDBInstance(request)
               .whenComplete((response, exception) -> {
                   if (exception != null) {
                       Throwable cause = exception.getCause();
                       if (cause instanceof ServiceQuotaExceededException) {
                           throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                       }
```

```
                        throw new CompletionException("Failed to create Neptune DB
instance: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String instanceId =
response.dbInstance().dbInstanceIdentifier();
                    logger.info("Created Neptune DB Instance: " + instanceId);
                    return instanceId;
                });
    }
```

- Untuk detail API, lihat Membuat DBInstance di Referensi AWS SDK for Java 2.x API.

### `CreateDBSubnetGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBSubnetGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates a new DB subnet group asynchronously.
     *
     * @param groupName the name of the subnet group to create
     * @return a CompletableFuture that, when completed, returns the Amazon Resource
Name (ARN) of the created subnet group
     * @throws CompletionException if the operation fails, with a cause that may be
a ServiceQuotaExceededException if the request would exceed the maximum quota
     */
    public CompletableFuture<String> createSubnetGroupAsync(String groupName) {

        // Get the Amazon Virtual Private Cloud (VPC) where the Neptune cluster and
resources will be created
```

```
        String vpcId = getDefaultVpcId();
        logger.info("VPC is : " + vpcId);

        List<String> subnetList = getSubnetIds(vpcId);
        for (String subnetId : subnetList) {
            System.out.println("Subnet group:" +subnetId);
        }

        CreateDbSubnetGroupRequest request = CreateDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(groupName)
                .dbSubnetGroupDescription("Subnet group for Neptune cluster")
                .subnetIds(subnetList)
                .build();

        return getAsyncClient().createDBSubnetGroup(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof ServiceQuotaExceededException) {
                            throw new CompletionException("The operation was denied
because the request would exceed the maximum quota.", cause);
                        }
                        throw new CompletionException("Failed to create subnet
group: " + exception.getMessage(), exception);
                    }
                })
                .thenApply(response -> {
                    String name = response.dbSubnetGroup().dbSubnetGroupName();
                    String arn = response.dbSubnetGroup().dbSubnetGroupArn();
                    logger.info("Subnet group created: " + name);
                    return arn;
                });
    }
```

- Untuk detail API, lihat Membuat DBSubnet Grup di Referensi AWS SDK for Java 2.x API.

### `CreateGraph`

Contoh kode berikut menunjukkan cara menggunakan`CreateGraph`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Executes the process of creating a new Neptune graph.
    *
    * @param client        the Neptune graph client used to interact with the
Neptune service
    * @param graphName     the name of the graph to be created
    * @throws NeptuneGraphException if an error occurs while creating the graph
    */
   public static void executeCreateGraph(NeptuneGraphClient client, String
graphName) {
       try {
           // Create the graph request
           CreateGraphRequest request = CreateGraphRequest.builder()
                   .graphName(graphName)
                   .provisionedMemory(16)
                   .build();

           // Create the graph
           CreateGraphResponse response = client.createGraph(request);

           // Extract the graph name and ARN
           String createdGraphName = response.name();
           String graphArn = response.arn();
           String graphEndpoint = response.endpoint();

           System.out.println("Graph created successfully!");
           System.out.println("Graph Name: " + createdGraphName);
           System.out.println("Graph ARN: " + graphArn);
           System.out.println("Graph Endpoint: " +graphEndpoint );

       } catch (NeptuneGraphException e) {
           System.err.println("Failed to create graph: " +
e.awsErrorDetails().errorMessage());
       } finally {
```

```
            client.close();
        }
    }
```

- Untuk detail API, lihat CreateGraphdi Referensi AWS SDK for Java 2.x API.

### `DeleteDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a DB instance asynchronously.
     *
     * @param clusterId the identifier of the cluster to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBClusterAsync(String clusterId) {
        DeleteDbClusterRequest request = DeleteDbClusterRequest.builder()
                .dbClusterIdentifier(clusterId)
                .skipFinalSnapshot(true)
                .build();

        return getAsyncClient().deleteDBCluster(request)
                .thenAccept(response -> System.out.println("## Deleting DB Cluster:
" + clusterId));
    }
```

- Untuk detail API, lihat Menghapus DBCluster di Referensi AWS SDK for Java 2.x API.

### `DeleteDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes a DB instance asynchronously.
    *
    * @param instanceId the identifier of the DB instance to be deleted
    * @return a {@link CompletableFuture} that completes when the DB instance has
been deleted
    */
   public CompletableFuture<Void> deleteDBInstanceAsync(String instanceId) {
       DeleteDbInstanceRequest request = DeleteDbInstanceRequest.builder()
               .dbInstanceIdentifier(instanceId)
               .skipFinalSnapshot(true)
               .build();

       return getAsyncClient().deleteDBInstance(request)
               .thenAccept(response -> System.out.println("## Deleting DB Instance:
" + instanceId));
   }
```

- Untuk detail API, lihat Menghapus DBInstance di Referensi AWS SDK for Java 2.x API.

### `DeleteDBSubnetGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBSubnetGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes a subnet group.
     *
     * @param subnetGroupName the identifier of the subnet group to delete
     * @return a {@link CompletableFuture} that completes when the cluster has been
deleted
     */
    public CompletableFuture<Void> deleteDBSubnetGroupAsync(String subnetGroupName)
{
        DeleteDbSubnetGroupRequest request = DeleteDbSubnetGroupRequest.builder()
                .dbSubnetGroupName(subnetGroupName)
                .build();

        return getAsyncClient().deleteDBSubnetGroup(request)
                .thenAccept(response -> logger.info("## Deleting Subnet Group: " +
subnetGroupName));
    }
```

- Untuk detail API, lihat Menghapus DBSubnet Grup di Referensi AWS SDK for Java 2.x API.

### `DescribeDBClusters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBClusters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously describes the specified Amazon RDS DB cluster.
    *
    * @param clusterId the identifier of the DB cluster to describe
    * @return a {@link CompletableFuture} that completes when the operation is
done, or throws a {@link RuntimeException}
    * if an error occurs
    */
   public CompletableFuture<Void> describeDBClustersAsync(String clusterId) {
       DescribeDbClustersRequest request = DescribeDbClustersRequest.builder()
               .dbClusterIdentifier(clusterId)
               .build();

       return getAsyncClient().describeDBClusters(request)
               .thenAccept(response -> {
                   for (DBCluster cluster : response.dbClusters()) {
                       logger.info("Cluster Identifier: " +
cluster.dbClusterIdentifier());
                       logger.info("Status: " + cluster.status());
                       logger.info("Engine: " + cluster.engine());
                       logger.info("Engine Version: " + cluster.engineVersion());
                       logger.info("Endpoint: " + cluster.endpoint());
                       logger.info("Reader Endpoint: " + cluster.readerEndpoint());
                       logger.info("Availability Zones: " +
cluster.availabilityZones());
                       logger.info("Subnet Group: " + cluster.dbSubnetGroup());
                       logger.info("VPC Security Groups:");
                       cluster.vpcSecurityGroups().forEach(vpcGroup ->
                               logger.info("  - " +
vpcGroup.vpcSecurityGroupId()));
                       logger.info("Storage Encrypted: " +
cluster.storageEncrypted());
                       logger.info("IAM DB Auth Enabled: " +
cluster.iamDatabaseAuthenticationEnabled());
                       logger.info("Backup Retention Period: " +
cluster.backupRetentionPeriod() + " days");
                       logger.info("Preferred Backup Window: " +
cluster.preferredBackupWindow());
                       logger.info("Preferred Maintenance Window: " +
cluster.preferredMaintenanceWindow());
                       logger.info("------");
                   }
```

```
                })
                .exceptionally(ex -> {
                    Throwable cause = ex.getCause() != null ? ex.getCause() : ex;

                    if (cause instanceof ResourceNotFoundException) {
                        throw (ResourceNotFoundException) cause;
                    }

                    throw new RuntimeException("Failed to describe the DB cluster: "
+ cause.getMessage(), cause);
                });
    }
```

- Untuk detail API, lihat Menjelaskan DBClusters di Referensi AWS SDK for Java 2.x API.

### `DescribeDBInstances`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Checks the status of a Neptune instance recursively until the desired status
is reached or a timeout occurs.
     *
     * @param instanceId     the ID of the Neptune instance to check
     * @param desiredStatus  the desired status of the Neptune instance
     * @param startTime      the start time of the operation, used to calculate the
elapsed time
     * @param future         a {@link CompletableFuture} that will be completed when
the desired status is reached
     */
    private void checkStatusRecursive(String instanceId, String desiredStatus, long
startTime, CompletableFuture<Void> future) {
```

```
        DescribeDbInstancesRequest request = DescribeDbInstancesRequest.builder()
                .dbInstanceIdentifier(instanceId)
                .build();

        getAsyncClient().describeDBInstances(request)
                .whenComplete((response, exception) -> {
                    if (exception != null) {
                        Throwable cause = exception.getCause();
                        future.completeExceptionally(
                                new CompletionException("Error checking Neptune
instance status", cause)
                        );
                        return;
                    }

                    List<DBInstance> instances = response.dbInstances();
                    if (instances.isEmpty()) {
                        future.completeExceptionally(new RuntimeException("Instance
not found: " + instanceId));
                        return;
                    }

                    String currentStatus = instances.get(0).dbInstanceStatus();
                    long elapsedSeconds = (System.currentTimeMillis() - startTime) /
1000;
                    System.out.printf("\r Elapsed: %-20s  Status: %-20s",
formatElapsedTime((int) elapsedSeconds), currentStatus);
                    System.out.flush();

                    if (desiredStatus.equalsIgnoreCase(currentStatus)) {
                        System.out.printf("\r Neptune instance reached desired
status '%s' after %s.\n", desiredStatus, formatElapsedTime((int) elapsedSeconds));
                        future.complete(null);
                    } else {
                        CompletableFuture.delayedExecutor(20, TimeUnit.SECONDS)
                                .execute(() -> checkStatusRecursive(instanceId,
desiredStatus, startTime, future));
                    }
                });
    }
```

- Untuk detail API, lihat Menjelaskan DBInstances di Referensi AWS SDK for Java 2.x API.

### `ExecuteGremlinProfileQuery`

Contoh kode berikut menunjukkan cara menggunakan`ExecuteGremlinProfileQuery`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Executes a Gremlin query against an Amazon Neptune database using the
provided {@link NeptunedataClient}.
    *
    * @param client the {@link NeptunedataClient} instance to use for executing the
Gremlin query
    */
   public static void executeGremlinQuery(NeptunedataClient client) {
       try {
           System.out.println("Querying Neptune...");
           ExecuteGremlinQueryRequest request =
ExecuteGremlinQueryRequest.builder()
                   .gremlinQuery("g.V().has('code', 'ANC')")
                   .build();

           ExecuteGremlinQueryResponse response =
client.executeGremlinQuery(request);

           System.out.println("Full Response:");
           System.out.println(response);

           // Retrieve and print the result
           if (response.result() != null) {
               System.out.println("Query Result:");
               System.out.println(response.result().toString());
           } else {
               System.out.println("No result returned from the query.");
           }
       } catch (NeptunedataException e) {
           System.err.println("Error calling Neptune: " +
e.awsErrorDetails().errorMessage());
```

```
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
        } finally {
            client.close();
        }
    }
```

- Untuk detail API, lihat ExecuteGremlinProfileQuerydi Referensi AWS SDK for Java 2.x API.

### `ExecuteGremlinQuery`

Contoh kode berikut menunjukkan cara menggunakan`ExecuteGremlinQuery`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Executes a Gremlin PROFILE query using the provided NeptunedataClient.
     *
     * @param client The NeptunedataClient instance to be used for executing the
Gremlin PROFILE query.
     */
    private static void executeGremlinProfileQuery(NeptunedataClient client) {
        System.out.println("Executing Gremlin PROFILE query...");

        ExecuteGremlinProfileQueryRequest request =
ExecuteGremlinProfileQueryRequest.builder()
                .gremlinQuery("g.V().has('code', 'ANC')")
                .build();

        ExecuteGremlinProfileQueryResponse response =
client.executeGremlinProfileQuery(request);
        if (response.output() != null) {
            System.out.println("Query Profile Output:");
            System.out.println(response.output());
        } else {
```

```
            System.out.println("No output returned from the profile query.");
        }
    }
```

- Untuk detail API, lihat ExecuteGremlinQuerydi Referensi AWS SDK for Java 2.x API.

### `ExecuteOpenCypherExplainQuery`

Contoh kode berikut menunjukkan cara menggunakan`ExecuteOpenCypherExplainQuery`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Executes an OpenCypher EXPLAIN query using the provided Neptune data client.
     *
     * @param client The Neptune data client to use for the query execution.
     */
    public static void executeGremlinQuery(NeptunedataClient client) {
        try {
            System.out.println("Executing OpenCypher EXPLAIN query...");
            ExecuteOpenCypherExplainQueryRequest request =
ExecuteOpenCypherExplainQueryRequest.builder()
                    .openCypherQuery("MATCH (n {code: 'ANC'}) RETURN n")
                    .explainMode("debug")
                    .build();

            ExecuteOpenCypherExplainQueryResponse response =
client.executeOpenCypherExplainQuery(request);

            if (response.results() != null) {
                System.out.println("Explain Results:");
                System.out.println(response.results().asUtf8String());
            } else {
                System.out.println("No explain results returned.");
            }
```

```
        } catch (NeptunedataException e) {
            System.err.println("Neptune error: " +
e.awsErrorDetails().errorMessage());
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
        } finally {
            client.close();
        }
    }
```

- Untuk detail API, lihat ExecuteOpenCypherExplainQuerydi Referensi AWS SDK for Java 2.x API.

### `ExecuteQuery`

Contoh kode berikut menunjukkan cara menggunakan`ExecuteQuery`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Executes a Gremlin profile query on the Neptune Analytics graph.
     *
     * @param client       the {@link NeptuneGraphClient} instance to use for the
query
     * @param graphId      the identifier of the graph to execute the query on
     *
     * @throws NeptuneGraphException if an error occurs while executing the query on
the Neptune Graph
     * @throws Exception if an unexpected error occurs
     */
    public static void executeGremlinProfileQuery(NeptuneGraphClient client, String
graphId) {
```

```
        try {
            System.out.println("Running openCypher query on Neptune Analytics...");

            ExecuteQueryRequest request = ExecuteQueryRequest.builder()
                    .graphIdentifier(graphId)
                    .queryString("MATCH (n {code: 'ANC'}) RETURN n")
                    .language("OPEN_CYPHER")
                    .build();

            ResponseInputStream<ExecuteQueryResponse> response =
client.executeQuery(request);
            try (BufferedReader reader = new BufferedReader(new
InputStreamReader(response, StandardCharsets.UTF_8))) {
                String result = reader.lines().collect(Collectors.joining("\n"));
                System.out.println("Query Result:");
                System.out.println(result);
            } catch (Exception e) {
                System.err.println("Error reading response: " + e.getMessage());
            }

        } catch (NeptuneGraphException e) {
            System.err.println("NeptuneGraph error: " +
e.awsErrorDetails().errorMessage());
        } catch (Exception e) {
            System.err.println("Unexpected error: " + e.getMessage());
        } finally {
            client.close();
        }
    }
```

- Untuk detail API, lihat ExecuteQuerydi Referensi AWS SDK for Java 2.x API.

### `StartDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`StartDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Starts an Amazon Neptune DB cluster.
    *
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StartDbClusterResponse> startDBClusterAsync(String
clusterIdentifier) {
       StartDbClusterRequest clusterRequest = StartDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().startDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to start DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster starting: " + clusterIdentifier);
                   }
               });
   }
```

- Untuk detail API, lihat Mulai DBCluster di Referensi AWS SDK for Java 2.x API.

### `StopDBCluster`

Contoh kode berikut menunjukkan cara menggunakan`StopDBCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Stops an Amazon Neptune DB cluster.
    *
    * @param clusterIdentifier the unique identifier of the DB cluster to be
stopped
    */
   public CompletableFuture<StopDbClusterResponse> stopDBClusterAsync(String
clusterIdentifier) {
       StopDbClusterRequest clusterRequest = StopDbClusterRequest.builder()
               .dbClusterIdentifier(clusterIdentifier)
               .build();

       return getAsyncClient().stopDBCluster(clusterRequest)
               .whenComplete((response, error) -> {
                   if (error != null) {
                       Throwable cause = error.getCause() != null ?
error.getCause() : error;

                       if (cause instanceof ResourceNotFoundException) {
                           throw (ResourceNotFoundException) cause;
                       }

                       throw new RuntimeException("Failed to stop DB cluster: " +
cause.getMessage(), cause);
                   } else {
                       logger.info("DB Cluster stopped: " + clusterIdentifier);
                   }
               });
   }
```

- Untuk detail API, lihat Berhenti DBCluster di Referensi AWS SDK for Java 2.x API.

## Skenario

Gunakan Neptunus API untuk menanyakan data grafik

Contoh kode berikut menunjukkan cara menggunakan Neptunus API untuk query data grafik.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Neptune Java API untuk membuat fungsi Lambda yang menanyakan data grafik dalam VPC.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Lambda
- Neptune

# Contoh Partner Central menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Pusat Mitra AWS SDK for Java 2.x dengan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario


# Tindakan

### `AssignOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`AssignOpportunity`.

SDK untuk Java 2.x

Tetapkan kembali Peluang yang ada ke pengguna lain.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssignOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssignOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.AssigneeContact;

/*
Purpose
PC-API-07 Assigning a new owner
*/

public class AssignOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
```

```
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String assigneeFirstName = "John";

     String assigneeLastName = "Doe";

     String assigneeEmail = "test@test.com";

     String businessTitle = "PartnerAccountManager";

     AssignOpportunityResponse response = getResponse(opportunityId,
 assigneeFirstName, assigneeLastName, assigneeEmail, businessTitle);

     ReferenceCodesUtils.formatOutput(response);
    }

 static AssignOpportunityResponse getResponse(String opportunityId, String
 assigneeFirstName, String assigneeLastName, String assigneeEmail, String
 businessTitle) {

  AssignOpportunityRequest assignOpportunityRequest =
 AssignOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .assignee(AssigneeContact.builder()
            .firstName(assigneeFirstName)
            .lastName(assigneeLastName)
            .email(assigneeEmail)
            .businessTitle(businessTitle)
            .build())
          .build();

        AssignOpportunityResponse response =
 client.assignOpportunity(assignOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat AssignOpportunitydi Referensi AWS SDK for Java 2.x API.

### `AssociateOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`AssociateOpportunity`.

SDK untuk Java 2.x

Buat hubungan formal antara Peluang dan berbagai entitas terkait.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityResponse;

/*
Purpose
PC-API -11 Associating a product
PC-API -12 Associating a solution
PC-API -13 Associating an offer
entity_type = Solutions | AWSProducts | AWSMarketplaceOffers
*/

public class AssociateOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();
```

```
    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String entityType = "Solutions";

     String entityIdentifier = "S-0000000";

     AssociateOpportunityResponse response = getResponse(opportunityId, entityType,
 entityIdentifier );

     ReferenceCodesUtils.formatOutput(response);
    }

static AssociateOpportunityResponse getResponse(String opportunityId, String
 entityType, String entityIdentifier) {

        AssociateOpportunityRequest associateOpportunityRequest =
 AssociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();

        AssociateOpportunityResponse response =
 client.associateOpportunity(associateOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat AssociateOpportunitydi Referensi AWS SDK for Java 2.x API.

### `CreateOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`CreateOpportunity`.

SDK untuk Java 2.x

Ciptakan peluang.

```
package org.example;

import java.time.Instant;
import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;

import org.example.entity.Root;
import org.example.utils.ReferenceCodesUtils;
import org.example.utils.StringSerializer;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.Account;
import software.amazon.awssdk.services.partnercentralselling.model.Address;
import software.amazon.awssdk.services.partnercentralselling.model.Contact;
import
 software.amazon.awssdk.services.partnercentralselling.model.CreateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.CreateOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.Customer;
import
 software.amazon.awssdk.services.partnercentralselling.model.ExpectedCustomerSpend;
import software.amazon.awssdk.services.partnercentralselling.model.LifeCycle;
import software.amazon.awssdk.services.partnercentralselling.model.Marketing;
import software.amazon.awssdk.services.partnercentralselling.model.MonetaryValue;
import software.amazon.awssdk.services.partnercentralselling.model.NextStepsHistory;
import software.amazon.awssdk.services.partnercentralselling.model.Project;
import software.amazon.awssdk.services.partnercentralselling.model.SoftwareRevenue;

import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;

public class CreateOpportunity {

 static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
```

```
   .create();

static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

public static void main(String[] args) {

 String inputFile = "CreateOpportunity2.json";

 if (args.length > 0)
  inputFile = args[0];

 CreateOpportunityResponse response = createOpportunity(inputFile);

 client.close();
}

static CreateOpportunityResponse createOpportunity(String inputFile) {

 String inputString = ReferenceCodesUtils.readInputFileToString(inputFile);

 Root root = GSON.fromJson(inputString, Root.class);

 List<NextStepsHistory> nextStepsHistories = new ArrayList<NextStepsHistory>();
 if ( root.lifeCycle != null && root.lifeCycle.nextStepsHistories != null) {
  for (org.example.entity.NextStepsHistory nextStepsHistoryJson :
root.lifeCycle.nextStepsHistories) {
   NextStepsHistory nextStepsHistory = NextStepsHistory.builder()
     .time(Instant.parse(nextStepsHistoryJson.time))
     .value(nextStepsHistoryJson.value)
                 .build();
   nextStepsHistories.add(nextStepsHistory);
  }
 }

 LifeCycle lifeCycle = null;
 if ( root.lifeCycle != null ) {
  lifeCycle = LifeCycle.builder()
   .closedLostReason(root.lifeCycle.closedLostReason)
   .nextSteps(root.lifeCycle.nextSteps)
   .nextStepsHistory(nextStepsHistories)
```

```
    .reviewComments(root.lifeCycle.reviewComments)
    .reviewStatus(root.lifeCycle.reviewStatus)
    .reviewStatusReason(root.lifeCycle.reviewStatusReason)
    .stage(root.lifeCycle.stage)
    .targetCloseDate(root.lifeCycle.targetCloseDate)
    .build();
  }

  Marketing marketing = null;
  if ( root.marketing != null ) {
   marketing = Marketing.builder()
     .awsFundingUsed(root.marketing.awsFundingUsed)
     .campaignName(root.marketing.campaignName)
     .channels(root.marketing.channels)
     .source(root.marketing.source)
     .useCases(root.marketing.useCases)
     .build();

  }

  Address address = null;
  if ( root.customer != null && root.customer.account != null &&
root.customer.account.address != null ) {
   address = Address.builder()
    .city(root.customer.account.address.city)
                .postalCode(root.customer.account.address.postalCode)
                .stateOrRegion(root.customer.account.address.stateOrRegion)
                .countryCode(root.customer.account.address.countryCode)
                .streetAddress(root.customer.account.address.streetAddress)
                .build();
  }

  Account account = null;
  if ( root.customer != null && root.customer.account!= null) {
   account = Account.builder()
              .address(address)
              .awsAccountId(root.customer.account.awsAccountId)
                 .duns(root.customer.account.duns)
                 .industry(root.customer.account.industry)
                 .otherIndustry(root.customer.account.otherIndustry)
                 .companyName(root.customer.account.companyName)
                 .websiteUrl(root.customer.account.websiteUrl)
                 .build();
  }
```

```
 List<Contact> contacts = new ArrayList<Contact>();
 if ( root.customer != null && root.customer.contacts != null) {
  for (org.example.entity.Contact jsonContact : root.customer.contacts) {
   Contact contact = Contact.builder()
                .email(jsonContact.email)
                .firstName(jsonContact.firstName)
                .lastName(jsonContact.lastName)
                .phone(jsonContact.phone)
                .businessTitle(jsonContact.businessTitle)
                .build();
   contacts.add(contact);
  }
 }

 Customer customer = Customer.builder()
   .account(account)
   .contacts(contacts)
   .build();

 Contact oportunityTeamContact = null;
 if (root.opportunityTeam != null && root.opportunityTeam.get(0) != null ) {
  oportunityTeamContact = Contact.builder()
              .firstName(root.opportunityTeam.get(0).firstName)
              .lastName(root.opportunityTeam.get(0).lastName)
              .email(root.opportunityTeam.get(0).email)
              .phone(root.opportunityTeam.get(0).phone)
              .businessTitle(root.opportunityTeam.get(0).businessTitle)
              .build();
 }

 List<ExpectedCustomerSpend> expectedCustomerSpends = new
ArrayList<ExpectedCustomerSpend>();
 if ( root.project != null && root.project.expectedCustomerSpend != null) {
  for (org.example.entity.ExpectedCustomerSpend expectedCustomerSpendJson :
root.project.expectedCustomerSpend) {
   ExpectedCustomerSpend expectedCustomerSpend = null;
   expectedCustomerSpend = ExpectedCustomerSpend.builder()
     .amount(expectedCustomerSpendJson.amount)
     .currencyCode(expectedCustomerSpendJson.currencyCode)
     .frequency(expectedCustomerSpendJson.frequency)
     .targetCompany(expectedCustomerSpendJson.targetCompany)
     .build();
   expectedCustomerSpends.add(expectedCustomerSpend);
```

```
   }
        }

        Project project = null;
        if ( root.project != null) {
         project = Project.builder()
                .title(root.project.title)
                .customerBusinessProblem(root.project.customerBusinessProblem)
                .customerUseCase(root.project.customerUseCase)
                .deliveryModels(root.project.deliveryModels)
                .expectedCustomerSpend(expectedCustomerSpends)
                .salesActivities(root.project.salesActivities)
                .competitorName(root.project.competitorName)
                .otherSolutionDescription(root.project.otherSolutionDescription)
                .build();
        }

        SoftwareRevenue softwareRevenue = null;
        if ( root.softwareRevenue != null) {
         MonetaryValue monetaryValue = null;
         if ( root.softwareRevenue.value != null) {
          monetaryValue = MonetaryValue.builder()
             .amount(root.softwareRevenue.value.amount)
             .currencyCode(root.softwareRevenue.value.currencyCode)
             .build();
         }
         softwareRevenue = SoftwareRevenue.builder()
           .deliveryModel(root.softwareRevenue.deliveryModel)
           .effectiveDate(root.softwareRevenue.effectiveDate)
           .expirationDate(root.softwareRevenue.expirationDate)
           .value(monetaryValue)
           .build();
        }

  // Building the Actual CreateOpportunity Request
  CreateOpportunityRequest createOpportunityRequest =
CreateOpportunityRequest.builder()
   .catalog(CATALOG_TO_USE)
   .clientToken(root.clientToken)
   .primaryNeedsFromAwsWithStrings(root.primaryNeedsFromAws)
   .opportunityType(root.opportunityType)
   .lifeCycle(lifeCycle)
   .marketing(marketing)
   .nationalSecurity(root.nationalSecurity)
```

```
    .origin(root.origin)
    .customer(customer)
    .project(project)
    .partnerOpportunityIdentifier(root.partnerOpportunityIdentifier)
    .opportunityTeam(oportunityTeamContact)
    .softwareRevenue(softwareRevenue)
    .build();

  CreateOpportunityResponse response =
 client.createOpportunity(createOpportunityRequest);
  System.out.println("Successfully created: " + response);

  return response;
    }

}
```

- Untuk detail API, lihat CreateOpportunitydi Referensi AWS SDK for Java 2.x API.

### `DisassociateOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`DisassociateOpportunity`.

SDK untuk Java 2.x

Hapus asosiasi yang ada antara Peluang dan entitas terkait.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityRequest;
```

```
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityResponse

/*
Purpose
PC-API -14 Removing a Solution
PC-API -15 Removing an offer
PC-API -16 Removing a product
entity_type = Solutions | AWSProducts | AWSMarketplaceOffers
*/

public class DisassociateOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     String entityType = "Solutions";

     String entityIdentifier = "S-0000000";

     DisassociateOpportunityResponse response = getResponse(opportunityId,
 entityType, entityIdentifier );

     ReferenceCodesUtils.formatOutput(response);
    }

 static DisassociateOpportunityResponse getResponse(String opportunityId, String
 entityType, String entityIdentifier) {

  DisassociateOpportunityRequest disassociateOpportunityRequest =
 DisassociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();
```

```
        DisassociateOpportunityResponse response =
 client.disassociateOpportunity(disassociateOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat DisassociateOpportunitydi Referensi AWS SDK for Java 2.x API.

### `GetAwsOpportunitySummary`

Contoh kode berikut menunjukkan cara menggunakan`GetAwsOpportunitySummary`.

SDK untuk Java 2.x

Mengambil ringkasan dari AWS Peluang.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetAwsOpportunitySummaryRequest
import
 software.amazon.awssdk.services.partnercentralselling.model.GetAwsOpportunitySummaryRespons

/*
 * Purpose
 * PC-API-25 Retrieves a summary of an AWS Opportunity.
 */

public class GetAwsOpportunitySummary {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
```

```
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetAwsOpportunitySummaryResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 public static GetAwsOpportunitySummaryResponse getResponse(String opportunityId) {

  GetAwsOpportunitySummaryRequest getOpportunityRequest =
 GetAwsOpportunitySummaryRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .relatedOpportunityIdentifier(opportunityId)
          .build();

  GetAwsOpportunitySummaryResponse response =
 client.getAwsOpportunitySummary(getOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat GetAwsOpportunitySummarydi Referensi AWS SDK for Java 2.x API.

### `GetEngagementInvitation`

Contoh kode berikut menunjukkan cara menggunakan`GetEngagementInvitation`.

SDK untuk Java 2.x

Mengambil detail undangan pertunangan yang dibagikan AWS dengan pasangan.

```
package org.example;

import static org.example.utils.Constants.*;
```

```
import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationResponse

/*
 * Purpose
 * PC-API-22 Get engagement invitation opportunity
 */

public class GetEngagementInvitation {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetEngagementInvitationResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static GetEngagementInvitationResponse getResponse(String opportunityId) {

  GetEngagementInvitationRequest getOpportunityRequest =
 GetEngagementInvitationRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .build();
```

```
  GetEngagementInvitationResponse response =
 client.getEngagementInvitation(getOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat GetEngagementInvitationdi Referensi AWS SDK for Java 2.x API.

### `GetOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`GetOpportunity`.

SDK untuk Java 2.x

Dapatkan kesempatan.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityResponse;

/*
 * Purpose
 * PC-API-08 Get updated Opportunity
 */

public class GetOpportunity {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
```

```
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     GetOpportunityResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 public static GetOpportunityResponse getResponse(String opportunityId) {

        GetOpportunityRequest getOpportunityRequest =
 GetOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .build();

        GetOpportunityResponse response =
 client.getOpportunity(getOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat GetOpportunitydi Referensi AWS SDK for Java 2.x API.

### `ListEngagementInvitations`

Contoh kode berikut menunjukkan cara menggunakan`ListEngagementInvitations`.

SDK untuk Java 2.x

Mengambil daftar undangan keterlibatan yang dikirim ke mitra.

```
package org.example;

import java.util.ArrayList;
```

```
import java.util.List;

import org.example.utils.ReferenceCodesUtils;
import static org.example.utils.Constants.*;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListEngagementInvitationsReques
import
 software.amazon.awssdk.services.partnercentralselling.model.ListEngagementInvitationsRespon
import software.amazon.awssdk.services.partnercentralselling.model.ParticipantType;
import
 software.amazon.awssdk.services.partnercentralselling.model.EngagementInvitationSummary;

public class ListEngagementInvitations {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     List<EngagementInvitationSummary> opportunitySummaries = getResponse();
        ReferenceCodesUtils.formatOutput(opportunitySummaries);
    }

    static List<EngagementInvitationSummary> getResponse() {

  List<EngagementInvitationSummary> opportunitySummaries = new
 ArrayList<EngagementInvitationSummary>();

  ListEngagementInvitationsRequest listOpportunityRequest =
 ListEngagementInvitationsRequest.builder()
                .catalog(CATALOG_TO_USE)
                .participantType(ParticipantType.RECEIVER)
          .maxResults(5)
          .build();
```

```
  ListEngagementInvitationsResponse response =
 client.listEngagementInvitations(listOpportunityRequest);

     opportunitySummaries.addAll(response.engagementInvitationSummaries());

     client.close();

        return opportunitySummaries;
 }
}
```

- Untuk detail API, lihat ListEngagementInvitationsdi Referensi AWS SDK for Java 2.x API.

### `ListOpportunities`

Contoh kode berikut menunjukkan cara menggunakan`ListOpportunities`.

SDK untuk Java 2.x

Daftar peluang.

```
package org.example;

import java.util.ArrayList;
import java.util.List;

import org.example.utils.ReferenceCodesUtils;
import static org.example.utils.Constants.*;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListOpportunitiesRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListOpportunitiesResponse;
import
 software.amazon.awssdk.services.partnercentralselling.model.OpportunitySummary;

/*
```

```
 * Purpose
 * PC-API-18 Getting list of Opportunities
 */

public class ListOpportunititesPaging {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {
     List<OpportunitySummary> opportunitySummaries = getResponse();
        ReferenceCodesUtils.formatOutput(opportunitySummaries);
    }

    private static List<OpportunitySummary> getResponse() {
     List<OpportunitySummary> opportunitySummaries = new
 ArrayList<OpportunitySummary>();

  ListOpportunitiesRequest listOpportunityRequest =
 ListOpportunitiesRequest.builder()
                .catalog(CATALOG_TO_USE)
          .maxResults(5)
          .build();

     ListOpportunitiesResponse response =
 client.listOpportunities(listOpportunityRequest);

     opportunitySummaries.addAll(response.opportunitySummaries());

     while (response.nextToken() != null && response.nextToken().length() > 0) {
      listOpportunityRequest = ListOpportunitiesRequest.builder()
                    .catalog(CATALOG_TO_USE)
              .maxResults(5)
              .nextToken(response.nextToken())
              .build();
      response = client.listOpportunities(listOpportunityRequest);
      opportunitySummaries.addAll(response.opportunitySummaries());
     }

     client.close();
```

```
        return opportunitySummaries;
 }
}
```

- Untuk detail API, lihat ListOpportunitiesdi Referensi AWS SDK for Java 2.x API.

### `ListSolutions`

Contoh kode berikut menunjukkan cara menggunakan`ListSolutions`.

SDK untuk Java 2.x

Mengambil daftar Solusi Mitra yang didaftarkan mitra di Partner Central.

```
package org.example;

import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListSolutionsRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.ListSolutionsResponse;
import software.amazon.awssdk.services.partnercentralselling.model.SolutionBase;

/*
 * Purpose
 * PC-API-10 Getting list of solutions
 */

public class ListSolutions {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
```

```
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {
     List<SolutionBase> solutionSummaries = getResponse();
        ReferenceCodesUtils.formatOutput(solutionSummaries);
    }

    static List<SolutionBase> getResponse() {
  List<SolutionBase> solutionSummaries = new ArrayList<SolutionBase>();

  ListSolutionsRequest listSolutionsRequest = ListSolutionsRequest.builder()
    .catalog(CATALOG_TO_USE)
          .maxResults(5)
          .build();

     ListSolutionsResponse response = client.listSolutions(listSolutionsRequest);

     solutionSummaries.addAll(response.solutionSummaries());

        return solutionSummaries;
 }
}
```

- Untuk detail API, lihat ListSolutionsdi Referensi AWS SDK for Java 2.x API.

### `RejectEngagementInvitation`

Contoh kode berikut menunjukkan cara menggunakan`RejectEngagementInvitation`.

SDK untuk Java 2.x

Menolak EngagementInvitation yang AWS dibagikan.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;
```

```
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.RejectEngagementInvitationReque
import
 software.amazon.awssdk.services.partnercentralselling.model.RejectEngagementInvitationRespo

/*
 * Purpose
 * PC-API-05 AWS Originated(AO) rejection
 */

public class RejectEngagementInvitation {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

  RejectEngagementInvitationResponse response = getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static RejectEngagementInvitationResponse getResponse(String invitationId) {

        RejectEngagementInvitationRequest rejectOpportunityRequest =
 RejectEngagementInvitationRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(invitationId)
          .rejectionReason("Unable to support")
          .build();

  RejectEngagementInvitationResponse response =
 client.rejectEngagementInvitation(rejectOpportunityRequest);
```

```
        return response;
 }
}
```

- Untuk detail API, lihat RejectEngagementInvitationdi Referensi AWS SDK for Java 2.x API.

### `StartEngagementByAcceptingInvitationTask`

Contoh kode berikut menunjukkan cara menggunakan`StartEngagementByAcceptingInvitationTask`.

SDK untuk Java 2.x

Memulai pertunangan dengan menerima EngagementInvitation.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementByAcceptingInvit
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementByAcceptingInvit
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetEngagementInvitationResponse
import software.amazon.awssdk.services.partnercentralselling.model.InvitationStatus;

/*
Purpose
PC-API-04: Start Engagement By Accepting InvitationTask for AWS Originated(AO)
 opportunity
*/
```

```
public class StartEngagementByAcceptingInvitationTask {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

 static String clientToken = "test-a30d161";

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     StartEngagementByAcceptingInvitationTaskResponse response =
 getResponse(opportunityId);

     if ( response == null) {
      System.out.println("Opportunity is not AWS Originated.");
     } else {
      ReferenceCodesUtils.formatOutput(response);
     }
    }

    private static GetEngagementInvitationResponse getInvitation(String
 invitationId) {

     GetEngagementInvitationRequest getRequest =
 GetEngagementInvitationRequest.builder()
          .catalog(Constants.CATALOG_TO_USE)
          .identifier(invitationId)
          .build();

  GetEngagementInvitationResponse response =
 client.getEngagementInvitation(getRequest);

        return response;
 }

 static StartEngagementByAcceptingInvitationTaskResponse getResponse(String
 invitationId) {

  if ( getInvitation(invitationId).status().equals(InvitationStatus.PENDING)) {
```

```
   StartEngagementByAcceptingInvitationTaskRequest acceptOpportunityRequest =
     StartEngagementByAcceptingInvitationTaskRequest.builder()
     .catalog(Constants.CATALOG_TO_USE)
           .identifier(invitationId)
           .clientToken(clientToken)
           .build();

   StartEngagementByAcceptingInvitationTaskResponse response =
 client.startEngagementByAcceptingInvitationTask(acceptOpportunityRequest);
         return response;
  }
  return null;
 }
}
```

- Untuk detail API, lihat StartEngagementByAcceptingInvitationTaskdi Referensi AWS SDK for Java 2.x API.

### `StartEngagementFromOpportunityTask`

Contoh kode berikut menunjukkan cara menggunakan`StartEngagementFromOpportunityTask`.

SDK untuk Java 2.x

Memulai proses keterlibatan dari peluang yang ada dengan menerima undangan keterlibatan dan menciptakan peluang yang sesuai dalam sistem mitra.

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.AwsSubmission;
import
 software.amazon.awssdk.services.partnercentralselling.model.SalesInvolvementType;
```

```
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementFromOpportunityT
import
 software.amazon.awssdk.services.partnercentralselling.model.StartEngagementFromOpportunityT
import software.amazon.awssdk.services.partnercentralselling.model.Visibility;

/*
 * Purpose
 * PC-API-01 Partner Originated (PO) opp submission(Start Engagement From
 Opportunity Task for AO Originated Opportunity)
 */

public class StartEngagementFromOpportunityTask {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

    public static void main(String[] args) {

     String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

     StartEngagementFromOpportunityTaskResponse response =
 getResponse(opportunityId);

     ReferenceCodesUtils.formatOutput(response);
    }

 static StartEngagementFromOpportunityTaskResponse getResponse(String opportunityId)
 {

  StartEngagementFromOpportunityTaskRequest submitOpportunityRequest =
 StartEngagementFromOpportunityTaskRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .identifier(opportunityId)
          .clientToken("test-annjqwesdsd99")

 .awsSubmission(AwsSubmission.builder().involvementType(SalesInvolvementType.CO_SELL).visibi
          .build();

  StartEngagementFromOpportunityTaskResponse response =
 client.startEngagementFromOpportunityTask(submitOpportunityRequest);
```

```
        return response;
 }
}
```

- Untuk detail API, lihat StartEngagementFromOpportunityTaskdi Referensi AWS SDK for Java 2.x API.

### `UpdateOpportunity`

Contoh kode berikut menunjukkan cara menggunakan`UpdateOpportunity`.

SDK untuk Java 2.x

Perbarui peluang.

```
package org.example;

import java.time.Instant;
import java.util.ArrayList;
import java.util.List;

import static org.example.utils.Constants.*;

import org.example.entity.Root;
import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;
import org.example.utils.StringSerializer;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import software.amazon.awssdk.services.partnercentralselling.model.Account;
import software.amazon.awssdk.services.partnercentralselling.model.Address;
import software.amazon.awssdk.services.partnercentralselling.model.Contact;
import software.amazon.awssdk.services.partnercentralselling.model.Customer;
import
 software.amazon.awssdk.services.partnercentralselling.model.ExpectedCustomerSpend;
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityRequest;
```

```
import
 software.amazon.awssdk.services.partnercentralselling.model.GetOpportunityResponse;
import software.amazon.awssdk.services.partnercentralselling.model.LifeCycle;
import software.amazon.awssdk.services.partnercentralselling.model.Marketing;
import software.amazon.awssdk.services.partnercentralselling.model.NextStepsHistory;
import software.amazon.awssdk.services.partnercentralselling.model.Project;
import software.amazon.awssdk.services.partnercentralselling.model.ReviewStatus;
import
 software.amazon.awssdk.services.partnercentralselling.model.UpdateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.UpdateOpportunityResponse;

import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import com.google.gson.ToNumberPolicy;

/*
 * Purpose
 * PC-API-02/06 Update opportunity when LifeCycle.ReviewStatus is not Submitted or
 In-Review
 */

public class UpdateOpportunity {

 static final Gson GSON = new GsonBuilder()
   .setObjectToNumberStrategy(ToNumberPolicy.LAZILY_PARSED_NUMBER)
   .registerTypeAdapter(String.class, new StringSerializer())
   .create();

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();

 static String OPPORTUNITY_ORIGIN = ORIGIN_PARTNER_ORIGINATED;

 public static void main(String[] args) {

  String inputFile = "updateOpportunity.json";

  if (args.length > 0)
   inputFile = args[0];
```

```
 UpdateOpportunityResponse response = updateOpportunity(inputFile);

 client.close();
}

public static GetOpportunityResponse getResponse(String opportunityId) {

       GetOpportunityRequest getOpportunityRequest =
GetOpportunityRequest.builder()
   .catalog(Constants.CATALOG_TO_USE)
         .identifier(opportunityId)
         .build();

       GetOpportunityResponse response =
client.getOpportunity(getOpportunityRequest);
       System.out.println(opportunityId + ":" + response);
       return response;
}

public static UpdateOpportunityResponse updateOpportunity(String inputFile) {

 String inputString = ReferenceCodesUtils.readInputFileToString(inputFile);

 Root root = GSON.fromJson(inputString, Root.class);
 GetOpportunityResponse response = getResponse(root.identifier);

 if (response != null
   && response.lifeCycle() != null
   && response.lifeCycle().reviewStatus() != null
   && response.lifeCycle().reviewStatus() != ReviewStatus.SUBMITTED
   && response.lifeCycle().reviewStatus() != ReviewStatus.IN_REVIEW) {

  List<NextStepsHistory> nextStepsHistories = new ArrayList<NextStepsHistory>();
  if ( root.lifeCycle != null && root.lifeCycle.nextStepsHistories != null) {
   for (org.example.entity.NextStepsHistory nextStepsHistoryJson :
root.lifeCycle.nextStepsHistories) {
    NextStepsHistory nextStepsHistory = NextStepsHistory.builder()
      .time(Instant.parse(nextStepsHistoryJson.time))
      .value(nextStepsHistoryJson.value)
                  .build();
    nextStepsHistories.add(nextStepsHistory);
   }
  }
```

```
  LifeCycle lifeCycle = null;
  if ( root.lifeCycle != null ) {
   lifeCycle = LifeCycle.builder()
    .closedLostReason(root.lifeCycle.closedLostReason)
    .nextSteps(root.lifeCycle.nextSteps)
    .nextStepsHistory(nextStepsHistories)
    .reviewComments(root.lifeCycle.reviewComments)
    .reviewStatus(root.lifeCycle.reviewStatus)
    .reviewStatusReason(root.lifeCycle.reviewStatusReason)
    .stage(root.lifeCycle.stage)
    .targetCloseDate(root.lifeCycle.targetCloseDate)
    .build();
  }

  Marketing marketing = null;
  if ( root.marketing != null ) {
   marketing = Marketing.builder()
     .awsFundingUsed(root.marketing.awsFundingUsed)
     .campaignName(root.marketing.campaignName)
     .channels(root.marketing.channels)
     .source(root.marketing.source)
     .useCases(root.marketing.useCases)
     .build();

  }

  Address address = null;
  if (root.customer != null && root.customer.account != null &&
root.customer.account.address != null) {
   address = Address.builder().postalCode(root.customer.account.address.postalCode)
     .stateOrRegion(root.customer.account.address.stateOrRegion)
     .countryCode(root.customer.account.address.countryCode).build();
  }

  Account account = null;
  if (root.customer != null && root.customer.account != null) {
   account = Account.builder().address(address).duns(root.customer.account.duns)

.industry(root.customer.account.industry).companyName(root.customer.account.companyName)
     .websiteUrl(root.customer.account.websiteUrl).build();
  }

  List<Contact> contacts = new ArrayList<Contact>();
  if ( root.customer != null && root.customer.contacts != null) {
```

```
   for (org.example.entity.Contact jsonContact : root.customer.contacts) {
    Contact contact = Contact.builder()
                  .email(jsonContact.email)
                  .firstName(jsonContact.firstName)
                  .lastName(jsonContact.lastName)
                  .phone(jsonContact.phone)
                  .businessTitle(jsonContact.businessTitle)
                  .build();
    contacts.add(contact);
   }
  }

  Customer customer =
Customer.builder().account(account).contacts(contacts).build();

  List<ExpectedCustomerSpend> expectedCustomerSpends = new
ArrayList<ExpectedCustomerSpend>();
  if ( root.project != null && root.project.expectedCustomerSpend != null) {
   for (org.example.entity.ExpectedCustomerSpend expectedCustomerSpendJson :
root.project.expectedCustomerSpend) {
    ExpectedCustomerSpend expectedCustomerSpend = null;
    expectedCustomerSpend = ExpectedCustomerSpend.builder()
      .amount(expectedCustomerSpendJson.amount)
      .currencyCode(expectedCustomerSpendJson.currencyCode)
      .frequency(expectedCustomerSpendJson.frequency)
      .targetCompany(expectedCustomerSpendJson.targetCompany)
      .build();
    expectedCustomerSpends.add(expectedCustomerSpend);
   }
        }

  Project project = null;
  if (root.project != null) {
   project = Project.builder().title(root.project.title)
     .customerBusinessProblem(root.project.customerBusinessProblem)

.customerUseCase(root.project.customerUseCase).deliveryModels(root.project.deliveryModels)
     .expectedCustomerSpend(expectedCustomerSpends)

.salesActivities(root.project.salesActivities).competitorName(root.project.competitorName)
     .otherSolutionDescription(root.project.otherSolutionDescription).build();
  }

  // Building the Actual CreateOpportunity Request
```

```
    UpdateOpportunityRequest updateOpportunityRequest =
  UpdateOpportunityRequest.builder().catalog(root.catalog)

  .identifier(root.identifier).lastModifiedDate(Instant.parse(root.lastModifiedDate))

  .primaryNeedsFromAwsWithStrings(root.primaryNeedsFromAws).opportunityType(root.opportunityT
      .lifeCycle(lifeCycle)
      .customer(customer)
      .project(project)
      .partnerOpportunityIdentifier(root.partnerOpportunityIdentifier)
      .marketing(marketing)
      .nationalSecurity(root.nationalSecurity)
      .opportunityType(root.opportunityType)
      .build();

    UpdateOpportunityResponse updateResponse =
  client.updateOpportunity(updateOpportunityRequest);
    System.out.println("Successfully updated opportunity: " + updateResponse);

    return updateResponse;
   } else {
    System.out.println("Opportunity cannot be updated.");
    return null;
   }
     }
}
```

- Untuk detail API, lihat UpdateOpportunitydi Referensi AWS SDK for Java 2.x API.

## Skenario

Perbarui entitas terkait dari suatu peluang

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Putus entitas lama.
- Mengasosiasikan entitas baru.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankan di repositori Skenario.

Perbarui entitas terkait dari suatu peluang

```
package org.example;

import static org.example.utils.Constants.*;

import org.example.utils.Constants;
import org.example.utils.ReferenceCodesUtils;

import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.regions.Region;
import
 software.amazon.awssdk.services.partnercentralselling.PartnerCentralSellingClient;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.AssociateOpportunityResponse;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityRequest;
import
 software.amazon.awssdk.services.partnercentralselling.model.DisassociateOpportunityResponse

/*
Purpose
PC-API -17 Replacing a solution
*/

public class ReplaceSolution {

 static PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(DefaultCredentialsProvider.create())
            .httpClient(ApacheHttpClient.builder().build())
            .build();
```

```
   public static void main(String[] args) {

    String opportunityId = args.length > 0 ? args[0] : OPPORTUNITY_ID;

    String entityType = "Solutions";
    String originalEntityIdentifier = "S-0000000";
    String newEntityIdentifier = "S-0011111";

    disassociateOppornititityResponse(opportunityId, entityType,
originalEntityIdentifier );
    AssociateOpportunityResponse associateOpportunityResponse =
associateOpportunityResponse(opportunityId, entityType, newEntityIdentifier );

    ReferenceCodesUtils.formatOutput(associateOpportunityResponse);
   }

private static AssociateOpportunityResponse associateOpportunityResponse(String
opportunityId, String entityType, String entityIdentifier) {

       AssociateOpportunityRequest associateOpportunityRequest =
AssociateOpportunityRequest.builder()
   .catalog(Constants.CATALOG_TO_USE)
         .opportunityIdentifier(opportunityId)
         .relatedEntityType(entityType)
         .relatedEntityIdentifier(entityIdentifier)
         .build();

       AssociateOpportunityResponse response =
client.associateOpportunity(associateOpportunityRequest);

       return response;
}

private static DisassociateOpportunityResponse
disassociateOppornititityResponse(String opportunityId, String entityType, String
entityIdentifier) {
 PartnerCentralSellingClient client = PartnerCentralSellingClient.builder()
           .region(Region.US_EAST_1)
           .credentialsProvider(DefaultCredentialsProvider.create())
           .httpClient(ApacheHttpClient.builder().build())
           .build();
```

```
        DisassociateOpportunityRequest disassociateOpportunityRequest =
 DisassociateOpportunityRequest.builder()
    .catalog(Constants.CATALOG_TO_USE)
          .opportunityIdentifier(opportunityId)
          .relatedEntityType(entityType)
          .relatedEntityIdentifier(entityIdentifier)
          .build();

        DisassociateOpportunityResponse response =
 client.disassociateOpportunity(disassociateOpportunityRequest);

        return response;
 }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AssociateOpportunity
  - DisassociateOpportunity

# Amazon Personalisasi contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon Personalize. AWS SDK for Java 2.x

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `CreateBatchInferenceJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateBatchInferenceJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
       public static String createPersonalizeBatchInferenceJob(PersonalizeClient
personalizeClient,
                        String solutionVersionArn,
                        String jobName,
                        String s3InputDataSourcePath,
                        String s3DataDestinationPath,
                        String roleArn,
                        String explorationWeight,
                        String explorationItemAgeCutOff) {

                long waitInMilliseconds = 60 * 1000;
                String status;
                String batchInferenceJobArn;

                try {

                        // Set up data input and output parameters.
                        S3DataConfig inputSource = S3DataConfig.builder()
                                        .path(s3InputDataSourcePath)
                                        .build();

                        S3DataConfig outputDestination = S3DataConfig.builder()
                                        .path(s3DataDestinationPath)
                                        .build();

                        BatchInferenceJobInput jobInput =
BatchInferenceJobInput.builder()
                                        .s3DataSource(inputSource)
                                        .build();

                        BatchInferenceJobOutput jobOutputLocation =
BatchInferenceJobOutput.builder()
                                        .s3DataDestination(outputDestination)
                                        .build();
```

```
                        // Optional code to build the User-Personalization specific
item exploration
                        // config.
                        HashMap<String, String> explorationConfig = new HashMap<>();

                        explorationConfig.put("explorationWeight",
explorationWeight);
                        explorationConfig.put("explorationItemAgeCutOff",
explorationItemAgeCutOff);

                        BatchInferenceJobConfig jobConfig =
BatchInferenceJobConfig.builder()
                                        .itemExplorationConfig(explorationConfig)
                                        .build();

                        // End optional User-Personalization recipe specific code.

                        CreateBatchInferenceJobRequest
createBatchInferenceJobRequest = CreateBatchInferenceJobRequest
                                        .builder()
                                        .solutionVersionArn(solutionVersionArn)
                                        .jobInput(jobInput)
                                        .jobOutput(jobOutputLocation)
                                        .jobName(jobName)
                                        .roleArn(roleArn)
                                        .batchInferenceJobConfig(jobConfig) //
Optional
                                        .build();

                        batchInferenceJobArn =
personalizeClient.createBatchInferenceJob(createBatchInferenceJobRequest)
                                        .batchInferenceJobArn();

                        DescribeBatchInferenceJobRequest
describeBatchInferenceJobRequest = DescribeBatchInferenceJobRequest
                                        .builder()
                                        .batchInferenceJobArn(batchInferenceJobArn)
                                        .build();

                        long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;
                        while (Instant.now().getEpochSecond() < maxTime) {
```

```
                                BatchInferenceJob batchInferenceJob =
personalizeClient

.describeBatchInferenceJob(describeBatchInferenceJobRequest)
                                                .batchInferenceJob();

                                status = batchInferenceJob.status();
                                System.out.println("Batch inference job status: " +
status);

                                if (status.equals("ACTIVE") || status.equals("CREATE
FAILED")) {
                                        break;
                                }
                                try {
                                        Thread.sleep(waitInMilliseconds);
                                } catch (InterruptedException e) {
                                        System.out.println(e.getMessage());
                                }
                        }
                        return batchInferenceJobArn;

                } catch (PersonalizeException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
                }
                return "";
        }
```

- Untuk detail API, lihat CreateBatchInferenceJobdi Referensi AWS SDK for Java 2.x API.

### `CreateCampaign`

Contoh kode berikut menunjukkan cara menggunakan`CreateCampaign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createPersonalCompaign(PersonalizeClient personalizeClient,
String solutionVersionArn,
           String name) {

       try {
           CreateCampaignRequest createCampaignRequest =
CreateCampaignRequest.builder()
                   .minProvisionedTPS(1)
                   .solutionVersionArn(solutionVersionArn)
                   .name(name)
                   .build();

           CreateCampaignResponse campaignResponse =
personalizeClient.createCampaign(createCampaignRequest);
           System.out.println("The campaign ARN is " +
campaignResponse.campaignArn());
           return campaignResponse.campaignArn();
       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return null;
   }
```

- Untuk detail API, lihat CreateCampaigndi Referensi AWS SDK for Java 2.x API.

### `CreateDataset`

Contoh kode berikut menunjukkan cara menggunakan`CreateDataset`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createDataset(PersonalizeClient personalizeClient,
           String datasetName,
```

```
            String datasetGroupArn,
            String datasetType,
            String schemaArn) {
        try {
            CreateDatasetRequest request = CreateDatasetRequest.builder()
                    .name(datasetName)
                    .datasetGroupArn(datasetGroupArn)
                    .datasetType(datasetType)
                    .schemaArn(schemaArn)
                    .build();

            String datasetArn = personalizeClient.createDataset(request)
                    .datasetArn();
            System.out.println("Dataset " + datasetName + " created.");
            return datasetArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat CreateDatasetdi Referensi AWS SDK for Java 2.x API.

### `CreateDatasetExportJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateDatasetExportJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createDatasetExportJob(PersonalizeClient personalizeClient,
            String jobName,
            String datasetArn,
            IngestionMode ingestionMode,
```

```
            String roleArn,
            String s3BucketPath,
            String kmsKeyArn) {

        long waitInMilliseconds = 30 * 1000; // 30 seconds
        String status = null;

        try {

            S3DataConfig exportS3DataConfig =
S3DataConfig.builder().path(s3BucketPath).kmsKeyArn(kmsKeyArn).build();
            DatasetExportJobOutput jobOutput =
DatasetExportJobOutput.builder().s3DataDestination(exportS3DataConfig)
                    .build();

            CreateDatasetExportJobRequest createRequest =
CreateDatasetExportJobRequest.builder()
                    .jobName(jobName)
                    .datasetArn(datasetArn)
                    .ingestionMode(ingestionMode)
                    .jobOutput(jobOutput)
                    .roleArn(roleArn)
                    .build();

            String datasetExportJobArn =
personalizeClient.createDatasetExportJob(createRequest).datasetExportJobArn();

            DescribeDatasetExportJobRequest describeDatasetExportJobRequest =
DescribeDatasetExportJobRequest.builder()
                    .datasetExportJobArn(datasetExportJobArn)
                    .build();

            long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

            while (Instant.now().getEpochSecond() < maxTime) {

                DatasetExportJob datasetExportJob = personalizeClient
                        .describeDatasetExportJob(describeDatasetExportJobRequest)
                        .datasetExportJob();

                status = datasetExportJob.status();
                System.out.println("Export job status: " + status);

                if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
```

```
                return status;
            }
            try {
                Thread.sleep(waitInMilliseconds);
            } catch (InterruptedException e) {
                System.out.println(e.getMessage());
            }
        }
    } catch (PersonalizeException e) {
        System.out.println(e.awsErrorDetails().errorMessage());
    }
    return "";
}
```

- Untuk detail API, lihat CreateDatasetExportJobdi Referensi AWS SDK for Java 2.x API.

### `CreateDatasetGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateDatasetGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createDatasetGroup(PersonalizeClient personalizeClient,
String datasetGroupName) {

    try {
        CreateDatasetGroupRequest createDatasetGroupRequest =
CreateDatasetGroupRequest.builder()
                .name(datasetGroupName)
                .build();
        return
personalizeClient.createDatasetGroup(createDatasetGroupRequest).datasetGroupArn();
    } catch (PersonalizeException e) {
        System.out.println(e.awsErrorDetails().errorMessage());
```

```
        }
        return "";
    }
```

Buat grup dataset domain.

```
    public static String createDomainDatasetGroup(PersonalizeClient
personalizeClient,
            String datasetGroupName,
            String domain) {

        try {
            CreateDatasetGroupRequest createDatasetGroupRequest =
CreateDatasetGroupRequest.builder()
                    .name(datasetGroupName)
                    .domain(domain)
                    .build();
            return
personalizeClient.createDatasetGroup(createDatasetGroupRequest).datasetGroupArn();
        } catch (PersonalizeException e) {
            System.out.println(e.awsErrorDetails().errorMessage());
        }
        return "";
    }
```

- Untuk detail API, lihat CreateDatasetGroupdi Referensi AWS SDK for Java 2.x API.

### `CreateDatasetImportJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateDatasetImportJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createPersonalizeDatasetImportJob(PersonalizeClient
personalizeClient,
           String jobName,
           String datasetArn,
           String s3BucketPath,
           String roleArn) {

       long waitInMilliseconds = 60 * 1000;
       String status;
       String datasetImportJobArn;

       try {
           DataSource importDataSource = DataSource.builder()
                   .dataLocation(s3BucketPath)
                   .build();

           CreateDatasetImportJobRequest createDatasetImportJobRequest =
CreateDatasetImportJobRequest.builder()
                   .datasetArn(datasetArn)
                   .dataSource(importDataSource)
                   .jobName(jobName)
                   .roleArn(roleArn)
                   .build();

           datasetImportJobArn =
personalizeClient.createDatasetImportJob(createDatasetImportJobRequest)
                   .datasetImportJobArn();
           DescribeDatasetImportJobRequest describeDatasetImportJobRequest =
DescribeDatasetImportJobRequest.builder()
                   .datasetImportJobArn(datasetImportJobArn)
                   .build();

           long maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

           while (Instant.now().getEpochSecond() < maxTime) {

               DatasetImportJob datasetImportJob = personalizeClient
                       .describeDatasetImportJob(describeDatasetImportJobRequest)
                       .datasetImportJob();

               status = datasetImportJob.status();
               System.out.println("Dataset import job status: " + status);
```

```
                if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return datasetImportJobArn;

        } catch (PersonalizeException e) {
            System.out.println(e.awsErrorDetails().errorMessage());
        }
        return "";
    }
```

- Untuk detail API, lihat CreateDatasetImportJobdi Referensi AWS SDK for Java 2.x API.

### `CreateEventTracker`

Contoh kode berikut menunjukkan cara menggunakan`CreateEventTracker`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createEventTracker(PersonalizeClient personalizeClient,
String eventTrackerName,
            String datasetGroupArn) {

        String eventTrackerId = "";
        String eventTrackerArn;
        long maxTime = 3 * 60 * 60; // 3 hours
        long waitInMilliseconds = 20 * 1000; // 20 seconds
        String status;
```

```
        try {

            CreateEventTrackerRequest createEventTrackerRequest =
CreateEventTrackerRequest.builder()
                    .name(eventTrackerName)
                    .datasetGroupArn(datasetGroupArn)
                    .build();

            CreateEventTrackerResponse createEventTrackerResponse =
personalizeClient
                    .createEventTracker(createEventTrackerRequest);

            eventTrackerArn = createEventTrackerResponse.eventTrackerArn();
            eventTrackerId = createEventTrackerResponse.trackingId();
            System.out.println("Event tracker ARN: " + eventTrackerArn);
            System.out.println("Event tracker ID: " + eventTrackerId);

            maxTime = Instant.now().getEpochSecond() + maxTime;

            DescribeEventTrackerRequest describeRequest =
DescribeEventTrackerRequest.builder()
                    .eventTrackerArn(eventTrackerArn)
                    .build();

            while (Instant.now().getEpochSecond() < maxTime) {

                status =
personalizeClient.describeEventTracker(describeRequest).eventTracker().status();
                System.out.println("EventTracker status: " + status);

                if (status.equals("ACTIVE") || status.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return eventTrackerId;
        } catch (PersonalizeException e) {
            System.out.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
        return eventTrackerId;
    }
```

- Untuk detail API, lihat CreateEventTrackerdi Referensi AWS SDK for Java 2.x API.

### `CreateFilter`

Contoh kode berikut menunjukkan cara menggunakan`CreateFilter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public static String createFilter(PersonalizeClient personalizeClient,
        String filterName,
        String datasetGroupArn,
        String filterExpression) {
    try {
        CreateFilterRequest request = CreateFilterRequest.builder()
                .name(filterName)
                .datasetGroupArn(datasetGroupArn)
                .filterExpression(filterExpression)
                .build();

        return personalizeClient.createFilter(request).filterArn();
    } catch (PersonalizeException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
    return "";
}
```

- Untuk detail API, lihat CreateFilterdi Referensi AWS SDK for Java 2.x API.

### `CreateRecommender`

Contoh kode berikut menunjukkan cara menggunakan`CreateRecommender`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createRecommender(PersonalizeClient personalizeClient,
            String name,
            String datasetGroupArn,
            String recipeArn) {

        long maxTime = 0;
        long waitInMilliseconds = 30 * 1000; // 30 seconds
        String recommenderStatus = "";

        try {
            CreateRecommenderRequest createRecommenderRequest =
CreateRecommenderRequest.builder()
                    .datasetGroupArn(datasetGroupArn)
                    .name(name)
                    .recipeArn(recipeArn)
                    .build();

            CreateRecommenderResponse recommenderResponse = personalizeClient
                    .createRecommender(createRecommenderRequest);
            String recommenderArn = recommenderResponse.recommenderArn();
            System.out.println("The recommender ARN is " + recommenderArn);

            DescribeRecommenderRequest describeRecommenderRequest =
DescribeRecommenderRequest.builder()
                    .recommenderArn(recommenderArn)
                    .build();

            maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

            while (Instant.now().getEpochSecond() < maxTime) {
```

```
                recommenderStatus =
personalizeClient.describeRecommender(describeRecommenderRequest).recommender()
                        .status();
                System.out.println("Recommender status: " + recommenderStatus);

                if (recommenderStatus.equals("ACTIVE") ||
recommenderStatus.equals("CREATE FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }
            return recommenderArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat CreateRecommenderdi Referensi AWS SDK for Java 2.x API.

### `CreateSchema`

Contoh kode berikut menunjukkan cara menggunakan`CreateSchema`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createSchema(PersonalizeClient personalizeClient, String
schemaName, String filePath) {
```

```
        String schema = null;
        try {
            schema = new String(Files.readAllBytes(Paths.get(filePath)));
        } catch (IOException e) {
            System.out.println(e.getMessage());
        }

        try {
            CreateSchemaRequest createSchemaRequest = CreateSchemaRequest.builder()
                    .name(schemaName)
                    .schema(schema)
                    .build();

            String schemaArn =
personalizeClient.createSchema(createSchemaRequest).schemaArn();

            System.out.println("Schema arn: " + schemaArn);

            return schemaArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

Buat skema dengan domain.

```
    public static String createDomainSchema(PersonalizeClient personalizeClient,
String schemaName, String domain,
            String filePath) {

        String schema = null;
        try {
            schema = new String(Files.readAllBytes(Paths.get(filePath)));
        } catch (IOException e) {
            System.out.println(e.getMessage());
        }

        try {
            CreateSchemaRequest createSchemaRequest = CreateSchemaRequest.builder()
```

```
                    .name(schemaName)
                    .domain(domain)
                    .schema(schema)
                    .build();

            String schemaArn =
personalizeClient.createSchema(createSchemaRequest).schemaArn();

            System.out.println("Schema arn: " + schemaArn);

            return schemaArn;

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat CreateSchemadi Referensi AWS SDK for Java 2.x API.

### `CreateSolution`

Contoh kode berikut menunjukkan cara menggunakan`CreateSolution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createPersonalizeSolution(PersonalizeClient
personalizeClient,
            String datasetGroupArn,
            String solutionName,
            String recipeArn) {

        try {
            CreateSolutionRequest solutionRequest = CreateSolutionRequest.builder()
```

```
                    .name(solutionName)
                    .datasetGroupArn(datasetGroupArn)
                    .recipeArn(recipeArn)
                    .build();

            CreateSolutionResponse solutionResponse =
personalizeClient.createSolution(solutionRequest);
            return solutionResponse.solutionArn();

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat CreateSolutiondi Referensi AWS SDK for Java 2.x API.

### `CreateSolutionVersion`

Contoh kode berikut menunjukkan cara menggunakan`CreateSolutionVersion`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createPersonalizeSolutionVersion(PersonalizeClient
personalizeClient, String solutionArn) {
        long maxTime = 0;
        long waitInMilliseconds = 30 * 1000; // 30 seconds
        String solutionStatus = "";
        String solutionVersionStatus = "";
        String solutionVersionArn = "";

        try {
            DescribeSolutionRequest describeSolutionRequest =
DescribeSolutionRequest.builder()
```

```
                    .solutionArn(solutionArn)
                    .build();

            maxTime = Instant.now().getEpochSecond() + 3 * 60 * 60;

            // Wait until solution is active.
            while (Instant.now().getEpochSecond() < maxTime) {

                solutionStatus =
personalizeClient.describeSolution(describeSolutionRequest).solution().status();
                System.out.println("Solution status: " + solutionStatus);

                if (solutionStatus.equals("ACTIVE") || solutionStatus.equals("CREATE
FAILED")) {
                    break;
                }
                try {
                    Thread.sleep(waitInMilliseconds);
                } catch (InterruptedException e) {
                    System.out.println(e.getMessage());
                }
            }

            if (solutionStatus.equals("ACTIVE")) {

                CreateSolutionVersionRequest createSolutionVersionRequest =
CreateSolutionVersionRequest.builder()
                        .solutionArn(solutionArn)
                        .build();

                CreateSolutionVersionResponse createSolutionVersionResponse =
personalizeClient
                        .createSolutionVersion(createSolutionVersionRequest);
                solutionVersionArn =
createSolutionVersionResponse.solutionVersionArn();

                System.out.println("Solution version ARN: " + solutionVersionArn);

                DescribeSolutionVersionRequest describeSolutionVersionRequest =
DescribeSolutionVersionRequest.builder()
                        .solutionVersionArn(solutionVersionArn)
                        .build();

                while (Instant.now().getEpochSecond() < maxTime) {
```

```
                    solutionVersionStatus =
personalizeClient.describeSolutionVersion(describeSolutionVersionRequest)
                            .solutionVersion().status();
                    System.out.println("Solution version status: " +
solutionVersionStatus);

                    if (solutionVersionStatus.equals("ACTIVE") ||
solutionVersionStatus.equals("CREATE FAILED")) {
                        break;
                    }
                    try {
                        Thread.sleep(waitInMilliseconds);
                    } catch (InterruptedException e) {
                        System.out.println(e.getMessage());
                    }
                }
                return solutionVersionArn;
            }
        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat CreateSolutionVersiondi Referensi AWS SDK for Java 2.x API.

### `DeleteCampaign`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCampaign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteSpecificCampaign(PersonalizeClient personalizeClient,
 String campaignArn) {
        try {
            DeleteCampaignRequest campaignRequest = DeleteCampaignRequest.builder()
                    .campaignArn(campaignArn)
                    .build();

            personalizeClient.deleteCampaign(campaignRequest);
            System.out.println("Delete request sent successfully.");
        } catch (PersonalizeException e) {
            System.err.println("Error deleting campaign: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Untuk detail API, lihat DeleteCampaigndi Referensi AWS SDK for Java 2.x API.

### `DeleteEventTracker`

Contoh kode berikut menunjukkan cara menggunakan`DeleteEventTracker`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteEventTracker(PersonalizeClient personalizeClient,
 String eventTrackerArn) {
        try {
            DeleteEventTrackerRequest deleteEventTrackerRequest =
 DeleteEventTrackerRequest.builder()
                    .eventTrackerArn(eventTrackerArn)
                    .build();
```

```
            int status =
personalizeClient.deleteEventTracker(deleteEventTrackerRequest).sdkHttpResponse().statusCod

            System.out.println("Status code:" + status);

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DeleteEventTrackerdi Referensi AWS SDK for Java 2.x API.

### `DeleteSolution`

Contoh kode berikut menunjukkan cara menggunakan`DeleteSolution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void deleteGivenSolution(PersonalizeClient personalizeClient,
String solutionArn) {

        try {
            DeleteSolutionRequest solutionRequest = DeleteSolutionRequest.builder()
                    .solutionArn(solutionArn)
                    .build();

            personalizeClient.deleteSolution(solutionRequest);
            System.out.println("Done");

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
```

- Untuk detail API, lihat DeleteSolutiondi Referensi AWS SDK for Java 2.x API.

### `DescribeCampaign`

Contoh kode berikut menunjukkan cara menggunakan`DescribeCampaign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeSpecificCampaign(PersonalizeClient personalizeClient,
String campaignArn) {

       try {
           DescribeCampaignRequest campaignRequest =
DescribeCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .build();

           DescribeCampaignResponse campaignResponse =
personalizeClient.describeCampaign(campaignRequest);
           Campaign myCampaign = campaignResponse.campaign();
           System.out.println("The Campaign name is " + myCampaign.name());
           System.out.println("The Campaign status is " + myCampaign.status());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeCampaigndi Referensi AWS SDK for Java 2.x API.

### `DescribeRecipe`

Contoh kode berikut menunjukkan cara menggunakan`DescribeRecipe`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeSpecificRecipe(PersonalizeClient personalizeClient,
String recipeArn) {

       try {
           DescribeRecipeRequest recipeRequest = DescribeRecipeRequest.builder()
                   .recipeArn(recipeArn)
                   .build();

           DescribeRecipeResponse recipeResponse =
personalizeClient.describeRecipe(recipeRequest);
           System.out.println("The recipe name is " +
recipeResponse.recipe().name());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeRecipedi Referensi AWS SDK for Java 2.x API.

### `DescribeSolution`

Contoh kode berikut menunjukkan cara menggunakan`DescribeSolution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeSpecificSolution(PersonalizeClient personalizeClient,
String solutionArn) {

       try {
           DescribeSolutionRequest solutionRequest =
DescribeSolutionRequest.builder()
                   .solutionArn(solutionArn)
                   .build();

           DescribeSolutionResponse response =
personalizeClient.describeSolution(solutionRequest);
           System.out.println("The Solution name is " +
response.solution().name());

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeSolutiondi Referensi AWS SDK for Java 2.x API.

### `ListCampaigns`

Contoh kode berikut menunjukkan cara menggunakan`ListCampaigns`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listAllCampaigns(PersonalizeClient personalizeClient, String
solutionArn) {

       try {
           ListCampaignsRequest campaignsRequest = ListCampaignsRequest.builder()
                   .maxResults(10)
                   .solutionArn(solutionArn)
                   .build();

           ListCampaignsResponse response =
personalizeClient.listCampaigns(campaignsRequest);
           List<CampaignSummary> campaigns = response.campaigns();
           for (CampaignSummary campaign : campaigns) {
               System.out.println("Campaign name is : " + campaign.name());
               System.out.println("Campaign ARN is : " + campaign.campaignArn());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ListCampaignsdi Referensi AWS SDK for Java 2.x API.

### `ListDatasetGroups`

Contoh kode berikut menunjukkan cara menggunakan`ListDatasetGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listDSGroups(PersonalizeClient personalizeClient) {

       try {
           ListDatasetGroupsRequest groupsRequest =
ListDatasetGroupsRequest.builder()
                   .maxResults(15)
                   .build();

           ListDatasetGroupsResponse groupsResponse =
personalizeClient.listDatasetGroups(groupsRequest);
           List<DatasetGroupSummary> groups = groupsResponse.datasetGroups();
           for (DatasetGroupSummary group : groups) {
               System.out.println("The DataSet name is : " + group.name());
               System.out.println("The DataSet ARN is : " +
group.datasetGroupArn());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ListDatasetGroupsdi Referensi AWS SDK for Java 2.x API.

### `ListRecipes`

Contoh kode berikut menunjukkan cara menggunakan`ListRecipes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void listAllRecipes(PersonalizeClient personalizeClient) {

        try {
            ListRecipesRequest recipesRequest = ListRecipesRequest.builder()
                    .maxResults(15)
                    .build();

            ListRecipesResponse response =
personalizeClient.listRecipes(recipesRequest);
            List<RecipeSummary> recipes = response.recipes();
            for (RecipeSummary recipe : recipes) {
                System.out.println("The recipe ARN is: " + recipe.recipeArn());
                System.out.println("The recipe name is: " + recipe.name());
            }

        } catch (PersonalizeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListRecipesdi Referensi AWS SDK for Java 2.x API.

### `ListSolutions`

Contoh kode berikut menunjukkan cara menggunakan`ListSolutions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listAllSolutions(PersonalizeClient personalizeClient, String
datasetGroupArn) {

       try {
           ListSolutionsRequest solutionsRequest = ListSolutionsRequest.builder()
                   .maxResults(10)
                   .datasetGroupArn(datasetGroupArn)
                   .build();

           ListSolutionsResponse response =
personalizeClient.listSolutions(solutionsRequest);
           List<SolutionSummary> solutions = response.solutions();
           for (SolutionSummary solution : solutions) {
               System.out.println("The solution ARN is: " +
solution.solutionArn());
               System.out.println("The solution name is: " + solution.name());
           }

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ListSolutionsdi Referensi AWS SDK for Java 2.x API.

### `UpdateCampaign`

Contoh kode berikut menunjukkan cara menggunakan`UpdateCampaign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String updateCampaign(PersonalizeClient personalizeClient,
           String campaignArn,
           String solutionVersionArn,
           Integer minProvisionedTPS) {

       try {
           // build the updateCampaignRequest
           UpdateCampaignRequest updateCampaignRequest =
UpdateCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .solutionVersionArn(solutionVersionArn)
                   .minProvisionedTPS(minProvisionedTPS)
                   .build();

           // update the campaign
           personalizeClient.updateCampaign(updateCampaignRequest);

           DescribeCampaignRequest campaignRequest =
DescribeCampaignRequest.builder()
                   .campaignArn(campaignArn)
                   .build();

           DescribeCampaignResponse campaignResponse =
personalizeClient.describeCampaign(campaignRequest);
           Campaign updatedCampaign = campaignResponse.campaign();

           System.out.println("The Campaign status is " +
updatedCampaign.status());
           return updatedCampaign.status();

       } catch (PersonalizeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
```

```
        return "";
    }
```

- Untuk detail API, lihat UpdateCampaigndi Referensi AWS SDK for Java 2.x API.

# Amazon Personalize Events contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan Peristiwa Personalisasi Amazon.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `PutEvents`

Contoh kode berikut menunjukkan cara menggunakan`PutEvents`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static int putItems(PersonalizeEventsClient personalizeEventsClient,
                               String datasetArn,
```

```
                        String item1Id,
                        String item1PropertyName,
                        String item1PropertyValue,
                        String item2Id,
                        String item2PropertyName,
                        String item2PropertyValue) {

                int responseCode = 0;
                ArrayList<Item> items = new ArrayList<>();

                try {
                        Item item1 = Item.builder()
                                        .itemId(item1Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                item1PropertyName,
 item1PropertyValue))
                                        .build();

                        items.add(item1);

                        Item item2 = Item.builder()
                                        .itemId(item2Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                item2PropertyName,
 item2PropertyValue))
                                        .build();

                        items.add(item2);

                        PutItemsRequest putItemsRequest = PutItemsRequest.builder()
                                        .datasetArn(datasetArn)
                                        .items(items)
                                        .build();

                        responseCode =
 personalizeEventsClient.putItems(putItemsRequest).sdkHttpResponse().statusCode();
                        System.out.println("Response code: " + responseCode);
                        return responseCode;

                } catch (PersonalizeEventsException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
                }
```

```
                return responseCode;
        }
```

- Untuk detail API, lihat PutEventsdi Referensi AWS SDK for Java 2.x API.

### `PutUsers`

Contoh kode berikut menunjukkan cara menggunakan`PutUsers`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
        public static int putUsers(PersonalizeEventsClient personalizeEventsClient,
                        String datasetArn,
                        String user1Id,
                        String user1PropertyName,
                        String user1PropertyValue,
                        String user2Id,
                        String user2PropertyName,
                        String user2PropertyValue) {

                int responseCode = 0;
                ArrayList<User> users = new ArrayList<>();

                try {
                        User user1 = User.builder()
                                        .userId(user1Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                user1PropertyName,
 user1PropertyValue))
                                        .build();

                        users.add(user1);
```

```
                        User user2 = User.builder()
                                        .userId(user2Id)
                                        .properties(String.format("{\"%1$s\": \"%2$s
\"}",
                                                                  user2PropertyName,
 user2PropertyValue))
                                        .build();

                        users.add(user2);

                        PutUsersRequest putUsersRequest = PutUsersRequest.builder()
                                        .datasetArn(datasetArn)
                                        .users(users)
                                        .build();

                        responseCode =
 personalizeEventsClient.putUsers(putUsersRequest).sdkHttpResponse().statusCode();
                        System.out.println("Response code: " + responseCode);
                        return responseCode;

                } catch (PersonalizeEventsException e) {
                        System.out.println(e.awsErrorDetails().errorMessage());
                }
                return responseCode;
        }
```

- Untuk detail API, lihat PutUsersdi Referensi AWS SDK for Java 2.x API.

# Amazon Personalisasi contoh Runtime menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum menggunakan Runtime AWS SDK for Java 2.x with Amazon Personalize.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


# Tindakan

### `GetPersonalizedRanking`

Contoh kode berikut menunjukkan cara menggunakan`GetPersonalizedRanking`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static List<PredictedItem> getRankedRecs(PersonalizeRuntimeClient
personalizeRuntimeClient,
           String campaignArn,
           String userId,
           ArrayList<String> items) {

       try {
           GetPersonalizedRankingRequest rankingRecommendationsRequest =
GetPersonalizedRankingRequest.builder()
                   .campaignArn(campaignArn)
                   .userId(userId)
                   .inputList(items)
                   .build();

           GetPersonalizedRankingResponse recommendationsResponse =
personalizeRuntimeClient
                   .getPersonalizedRanking(rankingRecommendationsRequest);
           List<PredictedItem> rankedItems =
recommendationsResponse.personalizedRanking();
           int rank = 1;
           for (PredictedItem item : rankedItems) {
               System.out.println("Item ranked at position " + rank + " details");
               System.out.println("Item Id is : " + item.itemId());
               System.out.println("Item score is : " + item.score());
```

```
                System.out.println("-----------------------------------------");
                rank++;
            }
            return rankedItems;
        } catch (PersonalizeRuntimeException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

- Untuk detail API, lihat GetPersonalizedRankingdi Referensi AWS SDK for Java 2.x API.

### `GetRecommendations`

Contoh kode berikut menunjukkan cara menggunakan`GetRecommendations`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan daftar item yang direkomendasikan.

```
   public static void getRecs(PersonalizeRuntimeClient personalizeRuntimeClient,
String campaignArn, String userId) {

        try {
            GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                    .campaignArn(campaignArn)
                    .numResults(20)
                    .userId(userId)
                    .build();

            GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                    .getRecommendations(recommendationsRequest);
```

```
            List<PredictedItem> items = recommendationsResponse.itemList();
            for (PredictedItem item : items) {
                System.out.println("Item Id is : " + item.itemId());
                System.out.println("Item score is : " + item.score());
            }

        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Dapatkan daftar item yang direkomendasikan dari pemberi rekomendasi yang dibuat dalam grup kumpulan data domain.

```
    public static void getRecs(PersonalizeRuntimeClient personalizeRuntimeClient,
String recommenderArn,
            String userId) {

        try {
            GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                    .recommenderArn(recommenderArn)
                    .numResults(20)
                    .userId(userId)
                    .build();

            GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                    .getRecommendations(recommendationsRequest);
            List<PredictedItem> items = recommendationsResponse.itemList();

            for (PredictedItem item : items) {
                System.out.println("Item Id is : " + item.itemId());
                System.out.println("Item score is : " + item.score());
            }
        } catch (AwsServiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

Gunakan filter saat meminta rekomendasi.

```
   public static void getFilteredRecs(PersonalizeRuntimeClient
personalizeRuntimeClient,
           String campaignArn,
           String userId,
           String filterArn,
           String parameter1Name,
           String parameter1Value1,
           String parameter1Value2,
           String parameter2Name,
           String parameter2Value) {

       try {

           Map<String, String> filterValues = new HashMap<>();

           filterValues.put(parameter1Name, String.format("\"%1$s\",\"%2$s\"",
                   parameter1Value1, parameter1Value2));
           filterValues.put(parameter2Name, String.format("\"%1$s\"",
                   parameter2Value));

           GetRecommendationsRequest recommendationsRequest =
GetRecommendationsRequest.builder()
                   .campaignArn(campaignArn)
                   .numResults(20)
                   .userId(userId)
                   .filterArn(filterArn)
                   .filterValues(filterValues)
                   .build();

           GetRecommendationsResponse recommendationsResponse =
personalizeRuntimeClient
                   .getRecommendations(recommendationsRequest);
           List<PredictedItem> items = recommendationsResponse.itemList();

           for (PredictedItem item : items) {
               System.out.println("Item Id is : " + item.itemId());
               System.out.println("Item score is : " + item.score());
           }
       } catch (PersonalizeRuntimeException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
```

```
    }
```

- Untuk detail API, lihat GetRecommendationsdi Referensi AWS SDK for Java 2.x API.

# Amazon Pinpoint contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x dengan Amazon Pinpoint.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `CreateApp`

Contoh kode berikut menunjukkan cara menggunakan`CreateApp`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.CreateAppRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateAppResponse;
import software.amazon.awssdk.services.pinpoint.model.CreateApplicationRequest;
```

```
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateApp {
    public static void main(String[] args) {
        final String usage = """

                 Usage:  <appName>

                 Where:
                  appName - The name of the application to create.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        String appName = args[0];
        System.out.println("Creating an application with name: " + appName);

        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String appID = createApplication(pinpoint, appName);
        System.out.println("App ID is: " + appID);
        pinpoint.close();
    }

    public static String createApplication(PinpointClient pinpoint, String appName)
 {
        try {
            CreateApplicationRequest appRequest = CreateApplicationRequest.builder()
                    .name(appName)
                    .build();
```

```
            CreateAppRequest request = CreateAppRequest.builder()
                    .createApplicationRequest(appRequest)
                    .build();

            CreateAppResponse result = pinpoint.createApp(request);
            return result.applicationResponse().id();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateAppdi Referensi AWS SDK for Java 2.x API.

### `CreateCampaign`

Contoh kode berikut menunjukkan cara menggunakan`CreateCampaign`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat kampanye.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.CampaignResponse;
import software.amazon.awssdk.services.pinpoint.model.Message;
import software.amazon.awssdk.services.pinpoint.model.Schedule;
import software.amazon.awssdk.services.pinpoint.model.Action;
import software.amazon.awssdk.services.pinpoint.model.MessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.WriteCampaignRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateCampaignResponse;
import software.amazon.awssdk.services.pinpoint.model.CreateCampaignRequest;
```

```
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateCampaign {
    public static void main(String[] args) {

        final String usage = """

                Usage:   <appId> <segmentId>

                Where:
                  appId - The ID of the application to create the campaign in.
                  segmentId - The ID of the segment to create the campaign from.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String segmentId = args[1];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        createPinCampaign(pinpoint, appId, segmentId);
        pinpoint.close();
    }

    public static void createPinCampaign(PinpointClient pinpoint, String appId,
 String segmentId) {
        CampaignResponse result = createCampaign(pinpoint, appId, segmentId);
        System.out.println("Campaign " + result.name() + " created.");
        System.out.println(result.description());
    }
```

```
    public static CampaignResponse createCampaign(PinpointClient client, String
 appID, String segmentID) {

        try {
            Schedule schedule = Schedule.builder()
                    .startTime("IMMEDIATE")
                    .build();

            Message defaultMessage = Message.builder()
                    .action(Action.OPEN_APP)
                    .body("My message body.")
                    .title("My message title.")
                    .build();

            MessageConfiguration messageConfiguration =
 MessageConfiguration.builder()
                    .defaultMessage(defaultMessage)
                    .build();

            WriteCampaignRequest request = WriteCampaignRequest.builder()
                    .description("My description")
                    .schedule(schedule)
                    .name("MyCampaign")
                    .segmentId(segmentID)
                    .messageConfiguration(messageConfiguration)
                    .build();

            CreateCampaignResponse result =
 client.createCampaign(CreateCampaignRequest.builder()
                    .applicationId(appID)
                    .writeCampaignRequest(request).build());

            System.out.println("Campaign ID: " + result.campaignResponse().id());
            return result.campaignResponse();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return null;
    }
}
```

- Untuk detail API, lihat CreateCampaigndi Referensi AWS SDK for Java 2.x API.

### `CreateExportJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateExportJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Ekspor titik akhir.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.ExportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.CreateExportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateExportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.GetExportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.GetExportJobRequest;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Object;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;
import java.text.SimpleDateFormat;
import java.util.ArrayList;
import java.util.Date;
import java.util.List;
```

```
import java.util.concurrent.TimeUnit;
import java.util.stream.Collectors;

/**
 * To run this code example, you need to create an AWS Identity and Access
 * Management (IAM) role with the correct policy as described in this
 * documentation:
 * https://docs.aws.amazon.com/pinpoint/latest/developerguide/audience-data-
export.html
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ExportEndpoints {
    public static void main(String[] args) {
        final String usage = """

                This program performs the following steps:

                1. Exports the endpoints to an Amazon S3 bucket.
                2. Downloads the exported endpoints files from Amazon S3.
                3. Parses the endpoints files to obtain the endpoint IDs and prints
 them.
                Usage: ExportEndpoints <applicationId> <s3BucketName>
 <iamExportRoleArn> <path>

                Where:
                  applicationId - The ID of the Amazon Pinpoint application that has
 the endpoint.
                  s3BucketName - The name of the Amazon S3 bucket to export the JSON
 file to.\s
                  iamExportRoleArn - The ARN of an IAM role that grants Amazon
 Pinpoint write permissions to the S3 bucket.  path - The path where the files
 downloaded from the Amazon S3 bucket are written (for example, C:/AWS/).
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String applicationId = args[0];
        String s3BucketName = args[1];
        String iamExportRoleArn = args[2];
        String path = args[3];
        System.out.println("Deleting an application with ID: " + applicationId);

        Region region = Region.US_EAST_1;
        PinpointClient pinpoint = PinpointClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();

        exportAllEndpoints(pinpoint, s3Client, applicationId, s3BucketName, path,
iamExportRoleArn);
        pinpoint.close();
        s3Client.close();
    }

    public static void exportAllEndpoints(PinpointClient pinpoint,
            S3Client s3Client,
            String applicationId,
            String s3BucketName,
            String path,
            String iamExportRoleArn) {

        try {
            List<String> objectKeys = exportEndpointsToS3(pinpoint, s3Client,
s3BucketName, iamExportRoleArn,
                    applicationId);
            List<String> endpointFileKeys = objectKeys.stream().filter(o ->
o.endsWith(".gz"))
                    .collect(Collectors.toList());
            downloadFromS3(s3Client, path, s3BucketName, endpointFileKeys);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
    public static List<String> exportEndpointsToS3(PinpointClient pinpoint, S3Client
 s3Client, String s3BucketName,
            String iamExportRoleArn, String applicationId) {

        SimpleDateFormat dateFormat = new SimpleDateFormat("yyyy-MM-dd-
HH_mm:ss.SSS_z");
        String endpointsKeyPrefix = "exports/" + applicationId + "_" +
 dateFormat.format(new Date());
        String s3UrlPrefix = "s3://" + s3BucketName + "/" + endpointsKeyPrefix +
 "/";
        List<String> objectKeys = new ArrayList<>();
        String key;

        try {
            // Defines the export job that Amazon Pinpoint runs.
            ExportJobRequest jobRequest = ExportJobRequest.builder()
                    .roleArn(iamExportRoleArn)
                    .s3UrlPrefix(s3UrlPrefix)
                    .build();

            CreateExportJobRequest exportJobRequest =
 CreateExportJobRequest.builder()
                    .applicationId(applicationId)
                    .exportJobRequest(jobRequest)
                    .build();

            System.out.format("Exporting endpoints from Amazon Pinpoint application
 %s to Amazon S3 " +
                    "bucket %s . . .\n", applicationId, s3BucketName);

            CreateExportJobResponse exportResult =
 pinpoint.createExportJob(exportJobRequest);
            String jobId = exportResult.exportJobResponse().id();
            System.out.println(jobId);
            printExportJobStatus(pinpoint, applicationId, jobId);

            ListObjectsV2Request v2Request = ListObjectsV2Request.builder()
                    .bucket(s3BucketName)
                    .prefix(endpointsKeyPrefix)
                    .build();

            // Create a list of object keys.
            ListObjectsV2Response v2Response = s3Client.listObjectsV2(v2Request);
            List<S3Object> objects = v2Response.contents();
```

```
            for (S3Object object : objects) {
                key = object.key();
                objectKeys.add(key);
            }

            return objectKeys;

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static void printExportJobStatus(PinpointClient pinpointClient,
            String applicationId,
            String jobId) {

        GetExportJobResponse getExportJobResult;
        String status;

        try {
            // Checks the job status until the job completes or fails.
            GetExportJobRequest exportJobRequest = GetExportJobRequest.builder()
                    .jobId(jobId)
                    .applicationId(applicationId)
                    .build();

            do {
                getExportJobResult = pinpointClient.getExportJob(exportJobRequest);
                status =
getExportJobResult.exportJobResponse().jobStatus().toString().toUpperCase();
                System.out.format("Export job %s . . .\n", status);
                TimeUnit.SECONDS.sleep(3);

            } while (!status.equals("COMPLETED") && !status.equals("FAILED"));

            if (status.equals("COMPLETED")) {
                System.out.println("Finished exporting endpoints.");
            } else {
                System.err.println("Failed to export endpoints.");
                System.exit(1);
            }
```

```
        } catch (PinpointException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Download files from an Amazon S3 bucket and write them to the path location.
    public static void downloadFromS3(S3Client s3Client, String path, String
 s3BucketName, List<String> objectKeys) {

        String newPath;
        try {
            for (String key : objectKeys) {
                GetObjectRequest objectRequest = GetObjectRequest.builder()
                        .bucket(s3BucketName)
                        .key(key)
                        .build();

                ResponseBytes<GetObjectResponse> objectBytes =
 s3Client.getObjectAsBytes(objectRequest);
                byte[] data = objectBytes.asByteArray();

                // Write the data to a local file.
                String fileSuffix = new
 SimpleDateFormat("yyyyMMddHHmmss").format(new Date());
                newPath = path + fileSuffix + ".gz";
                File myFile = new File(newPath);
                OutputStream os = new FileOutputStream(myFile);
                os.write(data);
            }
            System.out.println("Download finished.");

        } catch (S3Exception | NullPointerException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateExportJobdi Referensi AWS SDK for Java 2.x API.

### `CreateImportJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateImportJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Impor segmen.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.CreateImportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.ImportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.ImportJobRequest;
import software.amazon.awssdk.services.pinpoint.model.Format;
import software.amazon.awssdk.services.pinpoint.model.CreateImportJobResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ImportSegment {
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appId> <bucket> <key> <roleArn>\s

                Where:
                  appId - The application ID to create a segment for.
                  bucket - The name of the Amazon S3 bucket that contains the
 segment definitons.
                  key - The key of the S3 object.
```

```
                roleArn - ARN of the role that allows Amazon Pinpoint to
 access S3. You need to set trust management for this to work. See https://
docs.aws.amazon.com/IAM/latest/UserGuide/reference_policies_elements_principal.html
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String bucket = args[1];
        String key = args[2];
        String roleArn = args[3];

        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        ImportJobResponse response = createImportSegment(pinpoint, appId, bucket,
 key, roleArn);
        System.out.println("Import job for " + bucket + " submitted.");
        System.out.println("See application " + response.applicationId() + " for
 import job status.");
        System.out.println("See application " + response.jobStatus() + " for import
 job status.");
        pinpoint.close();
    }

    public static ImportJobResponse createImportSegment(PinpointClient client,
            String appId,
            String bucket,
            String key,
            String roleArn) {

        try {
            ImportJobRequest importRequest = ImportJobRequest.builder()
                    .defineSegment(true)
                    .registerEndpoints(true)
                    .roleArn(roleArn)
                    .format(Format.JSON)
                    .s3Url("s3://" + bucket + "/" + key)
                    .build();
```

```
            CreateImportJobRequest jobRequest = CreateImportJobRequest.builder()
                    .importJobRequest(importRequest)
                    .applicationId(appId)
                    .build();

            CreateImportJobResponse jobResponse =
 client.createImportJob(jobRequest);
            return jobResponse.importJobResponse();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
}
```

- Untuk detail API, lihat CreateImportJobdi Referensi AWS SDK for Java 2.x API.

### `CreateSegment`

Contoh kode berikut menunjukkan cara menggunakan`CreateSegment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.AttributeDimension;
import software.amazon.awssdk.services.pinpoint.model.SegmentResponse;
import software.amazon.awssdk.services.pinpoint.model.AttributeType;
import software.amazon.awssdk.services.pinpoint.model.RecencyDimension;
import software.amazon.awssdk.services.pinpoint.model.SegmentBehaviors;
import software.amazon.awssdk.services.pinpoint.model.SegmentDemographics;
import software.amazon.awssdk.services.pinpoint.model.SegmentLocation;
import software.amazon.awssdk.services.pinpoint.model.SegmentDimensions;
```

```
import software.amazon.awssdk.services.pinpoint.model.WriteSegmentRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateSegmentRequest;
import software.amazon.awssdk.services.pinpoint.model.CreateSegmentResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateSegment {
        public static void main(String[] args) {
                final String usage = """

                                Usage:   <appId>

                                Where:
                                  appId - The application ID to create a segment
 for.

                                """;

                if (args.length != 1) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String appId = args[0];
                PinpointClient pinpoint = PinpointClient.builder()
                                .region(Region.US_EAST_1)
                                .build();

                SegmentResponse result = createSegment(pinpoint, appId);
                System.out.println("Segment " + result.name() + " created.");
                System.out.println(result.segmentType());
                pinpoint.close();
        }
```

```
        public static SegmentResponse createSegment(PinpointClient client, String
appId) {
                try {
                        Map<String, AttributeDimension> segmentAttributes = new
HashMap<>();
                        segmentAttributes.put("Team", AttributeDimension.builder()
                                        .attributeType(AttributeType.INCLUSIVE)
                                        .values("Lakers")
                                        .build());

                        RecencyDimension recencyDimension =
RecencyDimension.builder()
                                        .duration("DAY_30")
                                        .recencyType("ACTIVE")
                                        .build();

                        SegmentBehaviors segmentBehaviors =
SegmentBehaviors.builder()
                                        .recency(recencyDimension)
                                        .build();

                        SegmentDemographics segmentDemographics =
SegmentDemographics
                                        .builder()
                                        .build();

                        SegmentLocation segmentLocation = SegmentLocation
                                        .builder()
                                        .build();

                        SegmentDimensions dimensions = SegmentDimensions
                                        .builder()
                                        .attributes(segmentAttributes)
                                        .behavior(segmentBehaviors)
                                        .demographic(segmentDemographics)
                                        .location(segmentLocation)
                                        .build();

                        WriteSegmentRequest writeSegmentRequest =
WriteSegmentRequest.builder()
                                        .name("MySegment")
                                        .dimensions(dimensions)
                                        .build();
```

```
                        CreateSegmentRequest createSegmentRequest =
 CreateSegmentRequest.builder()
                                        .applicationId(appId)
                                        .writeSegmentRequest(writeSegmentRequest)
                                        .build();

                        CreateSegmentResponse createSegmentResult =
 client.createSegment(createSegmentRequest);
                        System.out.println("Segment ID: " +
 createSegmentResult.segmentResponse().id());
                        System.out.println("Done");
                        return createSegmentResult.segmentResponse();

                } catch (PinpointException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
                return null;
        }
}
```

- Untuk detail API, lihat CreateSegmentdi Referensi AWS SDK for Java 2.x API.

### `DeleteApp`

Contoh kode berikut menunjukkan cara menggunakan`DeleteApp`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus aplikasi.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DeleteAppRequest;
import software.amazon.awssdk.services.pinpoint.model.DeleteAppResponse;
```

```
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteApp {
    public static void main(String[] args) {
        final String usage = """

                Usage:  <appId>

                Where:
                 appId - The ID of the application to delete.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        System.out.println("Deleting an application with ID: " + appId);
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deletePinApp(pinpoint, appId);
        System.out.println("Done");
        pinpoint.close();
    }

    public static void deletePinApp(PinpointClient pinpoint, String appId) {
        try {
            DeleteAppRequest appRequest = DeleteAppRequest.builder()
                    .applicationId(appId)
                    .build();

            DeleteAppResponse result = pinpoint.deleteApp(appRequest);
```

```
            String appName = result.applicationResponse().name();
            System.out.println("Application " + appName + " has been deleted.");

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteAppdi Referensi AWS SDK for Java 2.x API.

### `DeleteEndpoint`

Contoh kode berikut menunjukkan cara menggunakan`DeleteEndpoint`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus titik akhir.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DeleteEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.DeleteEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteEndpoint {
```

```
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appName> <endpointId >

                Where:
                  appId - The id of the application to delete.
                  endpointId - The id of the endpoint to delete.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String endpointId = args[1];
        System.out.println("Deleting an endpoint with id: " + endpointId);
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        deletePinEncpoint(pinpoint, appId, endpointId);
        pinpoint.close();
    }

    public static void deletePinEncpoint(PinpointClient pinpoint, String appId,
String endpointId) {
        try {
            DeleteEndpointRequest appRequest = DeleteEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .build();

            DeleteEndpointResponse result = pinpoint.deleteEndpoint(appRequest);
            String id = result.endpointResponse().id();
            System.out.println("The deleted endpoint id  " + id);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Done");
    }
```

```
}
```

- Untuk detail API, lihat DeleteEndpointdi Referensi AWS SDK for Java 2.x API.

### `GetEndpoint`

Contoh kode berikut menunjukkan cara menggunakan`GetEndpoint`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import com.google.gson.FieldNamingPolicy;
import com.google.gson.Gson;
import com.google.gson.GsonBuilder;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class LookUpEndpoint {
    public static void main(String[] args) {
        final String usage = """

                Usage:   <appId> <endpoint>

                Where:
```

```
                appId - The ID of the application to delete.
                endpoint - The ID of the endpoint.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        String endpoint = args[1];
        System.out.println("Looking up an endpoint point with ID: " + endpoint);
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        lookupPinpointEndpoint(pinpoint, appId, endpoint);
        pinpoint.close();
    }

    public static void lookupPinpointEndpoint(PinpointClient pinpoint, String appId,
String endpoint) {
        try {
            GetEndpointRequest appRequest = GetEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpoint)
                    .build();

            GetEndpointResponse result = pinpoint.getEndpoint(appRequest);
            EndpointResponse endResponse = result.endpointResponse();

            // Uses the Google Gson library to pretty print the endpoint JSON.
            Gson gson = new GsonBuilder()
                    .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                    .setPrettyPrinting()
                    .create();

            String endpointJson = gson.toJson(endResponse);
            System.out.println(endpointJson);

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
        System.out.println("Done");
    }
}
```

- Untuk detail API, lihat GetEndpointdi Referensi AWS SDK for Java 2.x API.

### `GetSegments`

Contoh kode berikut menunjukkan cara menggunakan`GetSegments`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Daftar segmen.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.GetSegmentsRequest;
import software.amazon.awssdk.services.pinpoint.model.GetSegmentsResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.SegmentResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListSegments {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:   <appId>

                Where:
                  appId - The ID of the application that contains a segment.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSegs(pinpoint, appId);
        pinpoint.close();
    }

    public static void listSegs(PinpointClient pinpoint, String appId) {
        try {
            GetSegmentsRequest request = GetSegmentsRequest.builder()
                    .applicationId(appId)
                    .build();

            GetSegmentsResponse response = pinpoint.getSegments(request);
            List<SegmentResponse> segments = response.segmentsResponse().item();
            for (SegmentResponse segment : segments) {
                System.out
                        .println("Segement " + segment.id() + " " + segment.name() +
 " " + segment.lastModifiedDate());
            }

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetSegmentsdi Referensi AWS SDK for Java 2.x API.

### `GetSmsChannel`

Contoh kode berikut menunjukkan cara menggunakan`GetSmsChannel`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.SMSChannelResponse;
import software.amazon.awssdk.services.pinpoint.model.GetSmsChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.SMSChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateSmsChannelRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateSmsChannelResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateChannel {
    public static void main(String[] args) {
        final String usage = """

                Usage: CreateChannel <appId>

                Where:
                  appId - The name of the application whose channel is updated.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
```

```
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        SMSChannelResponse getResponse = getSMSChannel(pinpoint, appId);
        toggleSmsChannel(pinpoint, appId, getResponse);
        pinpoint.close();
    }

    private static SMSChannelResponse getSMSChannel(PinpointClient client, String
appId) {
        try {
            GetSmsChannelRequest request = GetSmsChannelRequest.builder()
                    .applicationId(appId)
                    .build();

            SMSChannelResponse response =
client.getSmsChannel(request).smsChannelResponse();
            System.out.println("Channel state is " + response.enabled());
            return response;

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static void toggleSmsChannel(PinpointClient client, String appId,
SMSChannelResponse getResponse) {
        boolean enabled = !getResponse.enabled();
        try {
            SMSChannelRequest request = SMSChannelRequest.builder()
                    .enabled(enabled)
                    .build();

            UpdateSmsChannelRequest updateRequest =
UpdateSmsChannelRequest.builder()
                    .smsChannelRequest(request)
                    .applicationId(appId)
                    .build();
```

```
            UpdateSmsChannelResponse result =
 client.updateSmsChannel(updateRequest);
            System.out.println("Channel state: " +
 result.smsChannelResponse().enabled());

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetSmsChanneldi Referensi AWS SDK for Java 2.x API.

### `GetUserEndpoints`

Contoh kode berikut menunjukkan cara menggunakan`GetUserEndpoints`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetUserEndpointsRequest;
import software.amazon.awssdk.services.pinpoint.model.GetUserEndpointsResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListEndpointIds {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <applicationId> <userId>

                Where:
                   applicationId - The ID of the Amazon Pinpoint application that
 has the endpoint.
                   userId - The user id applicable to the endpoints""";

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String applicationId = args[0];
        String userId = args[1];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listAllEndpoints(pinpoint, applicationId, userId);
        pinpoint.close();
    }

    public static void listAllEndpoints(PinpointClient pinpoint,
            String applicationId,
            String userId) {

        try {
            GetUserEndpointsRequest endpointsRequest =
 GetUserEndpointsRequest.builder()
                    .userId(userId)
                    .applicationId(applicationId)
                    .build();

            GetUserEndpointsResponse response =
 pinpoint.getUserEndpoints(endpointsRequest);
            List<EndpointResponse> endpoints = response.endpointsResponse().item();

            // Display the results.
```

```
            for (EndpointResponse endpoint : endpoints) {
                System.out.println("The channel type is: " +
 endpoint.channelType());
                System.out.println("The address is  " + endpoint.address());
            }

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetUserEndpointsdi Referensi AWS SDK for Java 2.x API.

### `SendMessages`

Contoh kode berikut menunjukkan cara menggunakan`SendMessages`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Kirim pesan email.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.SimpleEmailPart;
import software.amazon.awssdk.services.pinpoint.model.SimpleEmail;
import software.amazon.awssdk.services.pinpoint.model.EmailMessage;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpointemail.PinpointEmailClient;
```

```
import software.amazon.awssdk.services.pinpointemail.model.Body;
import software.amazon.awssdk.services.pinpointemail.model.Content;
import software.amazon.awssdk.services.pinpointemail.model.Destination;
import software.amazon.awssdk.services.pinpointemail.model.EmailContent;
import software.amazon.awssdk.services.pinpointemail.model.Message;
import software.amazon.awssdk.services.pinpointemail.model.SendEmailRequest;

import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendEmailMessage {

        // The character encoding the you want to use for the subject line and
        // message body of the email.
        public static String charset = "UTF-8";

    // The body of the email for recipients whose email clients support HTML
 content.
    static final String body = """
        Amazon Pinpoint test (AWS SDK for Java 2.x)

        This email was sent through the Amazon Pinpoint Email API using the AWS SDK
 for Java 2.x

        """;

        public static void main(String[] args) {
                final String usage = """

                                Usage:    <subject> <appId> <senderAddress>
 <toAddress>

            Where:
               subject - The email subject to use.
               senderAddress - The from address. This address has to be verified in
 Amazon Pinpoint in the region you're using to send email\s
```

```
                toAddress - The to address. This address has to be verified in Amazon
Pinpoint in the region you're using to send email\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String subject = args[0];
        String senderAddress = args[1];
        String toAddress = args[2];
        System.out.println("Sending a message");
        PinpointEmailClient pinpoint = PinpointEmailClient.builder()
            .region(Region.US_EAST_1)
            .build();

        sendEmail(pinpoint, subject, senderAddress, toAddress);
        System.out.println("Email was sent");
        pinpoint.close();
    }

    public static void sendEmail(PinpointEmailClient pinpointEmailClient, String
subject, String senderAddress, String toAddress) {
        try {
            Content content = Content.builder()
                .data(body)
                .build();

            Body messageBody = Body.builder()
                .text(content)
                .build();

            Message message = Message.builder()
                .body(messageBody)
                .subject(Content.builder().data(subject).build())
                .build();

            Destination destination = Destination.builder()
                .toAddresses(toAddress)
                .build();

            EmailContent emailContent = EmailContent.builder()
                .simple(message)
```

```
                .build();

            SendEmailRequest sendEmailRequest = SendEmailRequest.builder()
                .fromEmailAddress(senderAddress)
                .destination(destination)
                .content(emailContent)
                .build();

            pinpointEmailClient.sendEmail(sendEmailRequest);
            System.out.println("Message Sent");

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Kirim pesan email dengan nilai CC.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import  software.amazon.awssdk.services.pinpointemail.PinpointEmailClient;
import software.amazon.awssdk.services.pinpointemail.model.Body;
import software.amazon.awssdk.services.pinpointemail.model.Content;
import software.amazon.awssdk.services.pinpointemail.model.Destination;
import software.amazon.awssdk.services.pinpointemail.model.EmailContent;
import software.amazon.awssdk.services.pinpointemail.model.Message;
import software.amazon.awssdk.services.pinpointemail.model.SendEmailRequest;
import java.util.ArrayList;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendEmailMessageCC {

    // The body of the email.
```

```
   static final String body = """
       Amazon Pinpoint test (AWS SDK for Java 2.x)

       This email was sent through the Amazon Pinpoint Email API using the AWS SDK
for Java 2.x

       """;
   public static void main(String[] args) {
       final String usage = """

           Usage:    <subject> <senderAddress> <toAddress> <ccAddress>

           Where:
              subject - The email subject to use.
              senderAddress - The from address. This address has to be verified in
Amazon Pinpoint in the region you're using to send email\s
              toAddress - The to address. This address has to be verified in Amazon
Pinpoint in the region you're using to send email\s
              ccAddress - The CC address.
           """;

       if (args.length != 4) {
           System.out.println(usage);
           System.exit(1);
       }

       String subject = args[0];
       String senderAddress = args[1];
       String toAddress = args[2];
       String ccAddress = args[3];

       System.out.println("Sending a message");
       PinpointEmailClient pinpoint = PinpointEmailClient.builder()
           .region(Region.US_EAST_1)
           .build();

       ArrayList<String> ccList = new ArrayList<>();
       ccList.add(ccAddress);
       sendEmail(pinpoint, subject, senderAddress, toAddress, ccList);
       pinpoint.close();
   }

   public static void sendEmail(PinpointEmailClient pinpointEmailClient, String
subject, String senderAddress, String toAddress, ArrayList<String> ccAddresses) {
```

```
        try {
            Content content = Content.builder()
                .data(body)
                .build();

            Body messageBody = Body.builder()
                .text(content)
                .build();

            Message message = Message.builder()
                .body(messageBody)
                .subject(Content.builder().data(subject).build())
                .build();

            Destination destination = Destination.builder()
                .toAddresses(toAddress)
                .ccAddresses(ccAddresses)
                .build();

            EmailContent emailContent = EmailContent.builder()
                .simple(message)
                .build();

            SendEmailRequest sendEmailRequest = SendEmailRequest.builder()
                .fromEmailAddress(senderAddress)
                .destination(destination)
                .content(emailContent)
                .build();

            pinpointEmailClient.sendEmail(sendEmailRequest);
            System.out.println("Message Sent");

        } catch (PinpointException e) {
            // Handle exception
            e.printStackTrace();
        }
    }
}
```

Kirim pesan SMS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.SMSMessage;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesResponse;
import software.amazon.awssdk.services.pinpoint.model.MessageResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessage {

        // The type of SMS message that you want to send. If you plan to send
        // time-sensitive content, specify TRANSACTIONAL. If you plan to send
        // marketing-related content, specify PROMOTIONAL.
        public static String messageType = "TRANSACTIONAL";

        // The registered keyword associated with the originating short code.
        public static String registeredKeyword = "myKeyword";

        // The sender ID to use when sending the message. Support for sender ID
        // varies by country or region. For more information, see
        // https://docs.aws.amazon.com/pinpoint/latest/userguide/channels-sms-
countries.html
        public static String senderId = "MySenderID";

        public static void main(String[] args) {
                final String usage = """

                                Usage:   <message> <appId> <originationNumber>
 <destinationNumber>\s

                                Where:
```

```
                                message - The body of the message to send.
                                appId - The Amazon Pinpoint project/application ID
to use when you send this message.
                                originationNumber - The phone number or short code
that you specify has to be associated with your Amazon Pinpoint account. For best
results, specify long codes in E.164 format (for example, +1-555-555-5654).
                                destinationNumber - The recipient's phone number.
For best results, you should specify the phone number in E.164 format (for example,
+1-555-555-5654).\s
                                """;

                if (args.length != 4) {
                        System.out.println(usage);
                        System.exit(1);
                }

                String message = args[0];
                String appId = args[1];
                String originationNumber = args[2];
                String destinationNumber = args[3];
                System.out.println("Sending a message");
                PinpointClient pinpoint = PinpointClient.builder()
                                .region(Region.US_EAST_1)
                                .build();

                sendSMSMessage(pinpoint, message, appId, originationNumber,
destinationNumber);
                pinpoint.close();
        }

        public static void sendSMSMessage(PinpointClient pinpoint, String message,
String appId,
                        String originationNumber,
                        String destinationNumber) {
                try {
                        Map<String, AddressConfiguration> addressMap = new
HashMap<String, AddressConfiguration>();
                        AddressConfiguration addConfig =
AddressConfiguration.builder()
                                        .channelType(ChannelType.SMS)
                                        .build();

                        addressMap.put(destinationNumber, addConfig);
                        SMSMessage smsMessage = SMSMessage.builder()
```

```
                                        .body(message)
                                        .messageType(messageType)
                                        .originationNumber(originationNumber)
                                        .senderId(senderId)
                                        .keyword(registeredKeyword)
                                        .build();

                        // Create a DirectMessageConfiguration object.
                        DirectMessageConfiguration direct =
 DirectMessageConfiguration.builder()
                                        .smsMessage(smsMessage)
                                        .build();

                        MessageRequest msgReq = MessageRequest.builder()
                                        .addresses(addressMap)
                                        .messageConfiguration(direct)
                                        .build();

                        // create a SendMessagesRequest object
                        SendMessagesRequest request = SendMessagesRequest.builder()
                                        .applicationId(appId)
                                        .messageRequest(msgReq)
                                        .build();

                        SendMessagesResponse response =
 pinpoint.sendMessages(request);
                        MessageResponse msg1 = response.messageResponse();
                        Map map1 = msg1.result();

                        // Write out the result of sendMessage.
                        map1.forEach((k, v) -> System.out.println((k + ":" + v)));

                } catch (PinpointException e) {
                        System.err.println(e.awsErrorDetails().errorMessage());
                        System.exit(1);
                }
        }
}
```

Kirim pesan SMS batch.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.DirectMessageConfiguration;
import software.amazon.awssdk.services.pinpoint.model.SMSMessage;
import software.amazon.awssdk.services.pinpoint.model.AddressConfiguration;
import software.amazon.awssdk.services.pinpoint.model.ChannelType;
import software.amazon.awssdk.services.pinpoint.model.MessageRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesRequest;
import software.amazon.awssdk.services.pinpoint.model.SendMessagesResponse;
import software.amazon.awssdk.services.pinpoint.model.MessageResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;

import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessageBatch {

    // The type of SMS message that you want to send. If you plan to send
    // time-sensitive content, specify TRANSACTIONAL. If you plan to send
    // marketing-related content, specify PROMOTIONAL.
    public static String messageType = "TRANSACTIONAL";

    // The registered keyword associated with the originating short code.
    public static String registeredKeyword = "myKeyword";

    // The sender ID to use when sending the message. Support for sender ID
    // varies by country or region. For more information, see
    // https://docs.aws.amazon.com/pinpoint/latest/userguide/channels-sms-
countries.html
    public static String senderId = "MySenderID";

    public static void main(String[] args) {
        final String usage = """

                Usage:   <message> <appId> <originationNumber> <destinationNumber>
 <destinationNumber1>\s
```

```
                Where:
                  message - The body of the message to send.
                  appId - The Amazon Pinpoint project/application ID to use when you
send this message.
                  originationNumber - The phone number or short code that you
specify has to be associated with your Amazon Pinpoint account. For best results,
specify long codes in E.164 format (for example, +1-555-555-5654).
                  destinationNumber - The recipient's phone number.  For best
results, you should specify the phone number in E.164 format (for example,
+1-555-555-5654).
                  destinationNumber1 - The second recipient's phone number.  For
best results, you should specify the phone number in E.164 format (for example,
+1-555-555-5654).\s
                """;

       if (args.length != 5) {
           System.out.println(usage);
           System.exit(1);
       }

       String message = args[0];
       String appId = args[1];
       String originationNumber = args[2];
       String destinationNumber = args[3];
       String destinationNumber1 = args[4];
       System.out.println("Sending a message");
       PinpointClient pinpoint = PinpointClient.builder()
               .region(Region.US_EAST_1)
               .build();

       sendSMSMessage(pinpoint, message, appId, originationNumber,
destinationNumber, destinationNumber1);
       pinpoint.close();
   }

   public static void sendSMSMessage(PinpointClient pinpoint, String message,
String appId,
                                     String originationNumber,
                                     String destinationNumber, String
destinationNumber1) {
       try {
           Map<String, AddressConfiguration> addressMap = new HashMap<String,
AddressConfiguration>();
```

```
            AddressConfiguration addConfig = AddressConfiguration.builder()
                    .channelType(ChannelType.SMS)
                    .build();

            // Add an entry to the Map object for each number to whom you want to
send a
            // message.
            addressMap.put(destinationNumber, addConfig);
            addressMap.put(destinationNumber1, addConfig);
            SMSMessage smsMessage = SMSMessage.builder()
                    .body(message)
                    .messageType(messageType)
                    .originationNumber(originationNumber)
                    .senderId(senderId)
                    .keyword(registeredKeyword)
                    .build();

            // Create a DirectMessageConfiguration object.
            DirectMessageConfiguration direct = DirectMessageConfiguration.builder()
                    .smsMessage(smsMessage)
                    .build();

            MessageRequest msgReq = MessageRequest.builder()
                    .addresses(addressMap)
                    .messageConfiguration(direct)
                    .build();

            // Create a SendMessagesRequest object.
            SendMessagesRequest request = SendMessagesRequest.builder()
                    .applicationId(appId)
                    .messageRequest(msgReq)
                    .build();

            SendMessagesResponse response = pinpoint.sendMessages(request);
            MessageResponse msg1 = response.messageResponse();
            Map map1 = msg1.result();

            // Write out the result of sendMessage.
            map1.forEach((k, v) -> System.out.println((k + ":" + v)));

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Untuk detail API, lihat SendMessagesdi Referensi AWS SDK for Java 2.x API.

### `UpdateEndpoint`

Contoh kode berikut menunjukkan cara menggunakan`UpdateEndpoint`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpoint.PinpointClient;
import software.amazon.awssdk.services.pinpoint.model.EndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.EndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.UpdateEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointRequest;
import software.amazon.awssdk.services.pinpoint.model.GetEndpointResponse;
import software.amazon.awssdk.services.pinpoint.model.PinpointException;
import software.amazon.awssdk.services.pinpoint.model.EndpointDemographic;
import software.amazon.awssdk.services.pinpoint.model.EndpointLocation;
import software.amazon.awssdk.services.pinpoint.model.EndpointUser;
import java.text.DateFormat;
import java.text.SimpleDateFormat;
import java.util.List;
import java.util.UUID;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.Map;
import java.util.Date;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UpdateEndpoint {
    public static void main(String[] args) {
        final String usage = """

                Usage:  <appId>

                Where:
                  appId - The ID of the application to create an endpoint for.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String appId = args[0];
        PinpointClient pinpoint = PinpointClient.builder()
                .region(Region.US_EAST_1)
                .build();

        EndpointResponse response = createEndpoint(pinpoint, appId);
        System.out.println("Got Endpoint: " + response.id());
        pinpoint.close();
    }

    public static EndpointResponse createEndpoint(PinpointClient client, String
 appId) {
        String endpointId = UUID.randomUUID().toString();
        System.out.println("Endpoint ID: " + endpointId);

        try {
            EndpointRequest endpointRequest = createEndpointRequestData();
            UpdateEndpointRequest updateEndpointRequest =
 UpdateEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .endpointRequest(endpointRequest)
                    .build();
```

```
            UpdateEndpointResponse updateEndpointResponse =
client.updateEndpoint(updateEndpointRequest);
            System.out.println("Update Endpoint Response: " +
updateEndpointResponse.messageBody());

            GetEndpointRequest getEndpointRequest = GetEndpointRequest.builder()
                    .applicationId(appId)
                    .endpointId(endpointId)
                    .build();

            GetEndpointResponse getEndpointResponse =
client.getEndpoint(getEndpointRequest);
            System.out.println(getEndpointResponse.endpointResponse().address());

System.out.println(getEndpointResponse.endpointResponse().channelType());

System.out.println(getEndpointResponse.endpointResponse().applicationId());

System.out.println(getEndpointResponse.endpointResponse().endpointStatus());
            System.out.println(getEndpointResponse.endpointResponse().requestId());
            System.out.println(getEndpointResponse.endpointResponse().user());

            return getEndpointResponse.endpointResponse();

        } catch (PinpointException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    private static EndpointRequest createEndpointRequestData() {
        try {
            List<String> favoriteTeams = new ArrayList<>();
            favoriteTeams.add("Lakers");
            favoriteTeams.add("Warriors");
            HashMap<String, List<String>> customAttributes = new HashMap<>();
            customAttributes.put("team", favoriteTeams);

            EndpointDemographic demographic = EndpointDemographic.builder()
                    .appVersion("1.0")
                    .make("apple")
                    .model("iPhone")
```

```
                .modelVersion("7")
                .platform("ios")
                .platformVersion("10.1.1")
                .timezone("America/Los_Angeles")
                .build();

        EndpointLocation location = EndpointLocation.builder()
                .city("Los Angeles")
                .country("US")
                .latitude(34.0)
                .longitude(-118.2)
                .postalCode("90068")
                .region("CA")
                .build();

        Map<String, Double> metrics = new HashMap<>();
        metrics.put("health", 100.00);
        metrics.put("luck", 75.00);

        EndpointUser user = EndpointUser.builder()
                .userId(UUID.randomUUID().toString())
                .build();

        DateFormat df = new SimpleDateFormat("yyyy-MM-dd'T'HH:mm'Z'"); // Quoted
"Z" to indicate UTC, no timezone
                                                                       // offset
        String nowAsISO = df.format(new Date());

        return EndpointRequest.builder()
                .address(UUID.randomUUID().toString())
                .attributes(customAttributes)
                .channelType("APNS")
                .demographic(demographic)
                .effectiveDate(nowAsISO)
                .location(location)
                .metrics(metrics)
                .optOut("NONE")
                .requestId(UUID.randomUUID().toString())
                .user(user)
                .build();

    } catch (PinpointException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
```

```
        }
        return null;
    }
}
```

- Untuk detail API, lihat UpdateEndpointdi Referensi AWS SDK for Java 2.x API.

# Amazon Pinpoint SMS dan Voice API contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan Amazon Pinpoint SMS dan Voice API.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `SendVoiceMessage`

Contoh kode berikut menunjukkan cara menggunakan`SendVoiceMessage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.pinpointsmsvoice.PinpointSmsVoiceClient;
import software.amazon.awssdk.services.pinpointsmsvoice.model.SSMLMessageType;
import software.amazon.awssdk.services.pinpointsmsvoice.model.VoiceMessageContent;
import
 software.amazon.awssdk.services.pinpointsmsvoice.model.SendVoiceMessageRequest;
import
 software.amazon.awssdk.services.pinpointsmsvoice.model.PinpointSmsVoiceException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendVoiceMessage {

    // The Amazon Polly voice that you want to use to send the message. For a list
    // of voices, see https://docs.aws.amazon.com/polly/latest/dg/voicelist.html
    static final String voiceName = "Matthew";

    // The language to use when sending the message. For a list of supported
    // languages, see
    // https://docs.aws.amazon.com/polly/latest/dg/SupportedLanguage.html
    static final String languageCode = "en-US";

    // The content of the message. This example uses SSML to customize and control
    // certain aspects of the message, such as by adding pauses and changing
    // phonation. The message can't contain any line breaks.
    static final String ssmlMessage = "<speak>This is a test message sent from "
            + "<emphasis>Amazon Pinpoint</emphasis> "
            + "using the <break strength='weak'/>AWS "
            + "SDK for Java. "
            + "<amazon:effect phonation='soft'>Thank "
```

```
            + "you for listening.</amazon:effect></speak>";

    public static void main(String[] args) {

        final String usage = """
                Usage:   <originationNumber> <destinationNumber>\s

                Where:
                  originationNumber - The phone number or short code that you
specify has to be associated with your Amazon Pinpoint account. For best results,
specify long codes in E.164 format (for example, +1-555-555-5654).
                  destinationNumber - The recipient's phone number.  For best
results, you should specify the phone number in E.164 format (for example,
+1-555-555-5654).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }
        String originationNumber = args[0];
        String destinationNumber = args[1];
        System.out.println("Sending a voice message");

        // Set the content type to application/json.
        List<String> listVal = new ArrayList<>();
        listVal.add("application/json");
        Map<String, List<String>> values = new HashMap<>();
        values.put("Content-Type", listVal);

        ClientOverrideConfiguration config2 = ClientOverrideConfiguration.builder()
                .headers(values)
                .build();

        PinpointSmsVoiceClient client = PinpointSmsVoiceClient.builder()
                .overrideConfiguration(config2)
                .region(Region.US_EAST_1)
                .build();

        sendVoiceMsg(client, originationNumber, destinationNumber);
        client.close();
    }
```

```
    public static void sendVoiceMsg(PinpointSmsVoiceClient client, String
originationNumber,
                                    String destinationNumber) {
        try {
            SSMLMessageType ssmlMessageType = SSMLMessageType.builder()
                    .languageCode(languageCode)
                    .text(ssmlMessage)
                    .voiceId(voiceName)
                    .build();

            VoiceMessageContent content = VoiceMessageContent.builder()
                    .ssmlMessage(ssmlMessageType)
                    .build();

            SendVoiceMessageRequest voiceMessageRequest =
SendVoiceMessageRequest.builder()
                    .destinationPhoneNumber(destinationNumber)
                    .originationPhoneNumber(originationNumber)
                    .content(content)
                    .build();

            client.sendVoiceMessage(voiceMessageRequest);
            System.out.println("The message was sent successfully.");

        } catch (PinpointSmsVoiceException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SendVoiceMessagedi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Polly menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon Polly. AWS SDK for Java 2.x

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


## Tindakan

### `DescribeVoices`

Contoh kode berikut menunjukkan cara menggunakan`DescribeVoices`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.DescribeVoicesRequest;
import software.amazon.awssdk.services.polly.model.DescribeVoicesResponse;
import software.amazon.awssdk.services.polly.model.PollyException;
import software.amazon.awssdk.services.polly.model.Voice;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeVoicesSample {
    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        describeVoice(polly);
        polly.close();
    }

    public static void describeVoice(PollyClient polly) {
        try {
            DescribeVoicesRequest voicesRequest = DescribeVoicesRequest.builder()
                    .languageCode("en-US")
                    .build();

            DescribeVoicesResponse enUsVoicesResult =
 polly.describeVoices(voicesRequest);
            List<Voice> voices = enUsVoicesResult.voices();
            for (Voice myVoice : voices) {
                System.out.println("The ID of the voice is " + myVoice.id());
                System.out.println("The gender of the voice is " +
 myVoice.gender());
            }

        } catch (PollyException e) {
            System.err.println("Exception caught: " + e);
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeVoicesdi Referensi AWS SDK for Java 2.x API.

### `ListLexicons`

Contoh kode berikut menunjukkan cara menggunakan`ListLexicons`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.ListLexiconsResponse;
import software.amazon.awssdk.services.polly.model.ListLexiconsRequest;
import software.amazon.awssdk.services.polly.model.LexiconDescription;
import software.amazon.awssdk.services.polly.model.PollyException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListLexicons {
    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        listLexicons(polly);
        polly.close();
    }

    public static void listLexicons(PollyClient client) {
        try {
            ListLexiconsRequest listLexiconsRequest = ListLexiconsRequest.builder()
                    .build();

            ListLexiconsResponse listLexiconsResult =
 client.listLexicons(listLexiconsRequest);
```

```
            List<LexiconDescription> lexiconDescription =
 listLexiconsResult.lexicons();
            for (LexiconDescription lexDescription : lexiconDescription) {
                System.out.println("The name of the Lexicon is " +
 lexDescription.name());
            }

        } catch (PollyException e) {
            System.err.println("Exception caught: " + e);
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListLexiconsdi Referensi AWS SDK for Java 2.x API.

### `SynthesizeSpeech`

Contoh kode berikut menunjukkan cara menggunakan`SynthesizeSpeech`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import javazoom.jl.decoder.JavaLayerException;
import software.amazon.awssdk.core.ResponseInputStream;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.polly.PollyClient;
import software.amazon.awssdk.services.polly.model.DescribeVoicesRequest;
import software.amazon.awssdk.services.polly.model.Voice;
import software.amazon.awssdk.services.polly.model.DescribeVoicesResponse;
import software.amazon.awssdk.services.polly.model.OutputFormat;
import software.amazon.awssdk.services.polly.model.PollyException;
import software.amazon.awssdk.services.polly.model.SynthesizeSpeechRequest;
import software.amazon.awssdk.services.polly.model.SynthesizeSpeechResponse;
import java.io.IOException;
import java.io.InputStream;
```

```
import javazoom.jl.player.advanced.AdvancedPlayer;
import javazoom.jl.player.advanced.PlaybackEvent;
import javazoom.jl.player.advanced.PlaybackListener;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PollyDemo {
    private static final String SAMPLE = "Congratulations. You have successfully
 built this working demo " +
            " of Amazon Polly in Java Version 2. Have fun building voice enabled
 apps with Amazon Polly (that's me!), and always "
            +
            " look at the AWS website for tips and tricks on using Amazon Polly and
 other great services from AWS";

    public static void main(String args[]) {
        PollyClient polly = PollyClient.builder()
                .region(Region.US_WEST_2)
                .build();

        talkPolly(polly);
        polly.close();
    }

    public static void talkPolly(PollyClient polly) {
        try {
            DescribeVoicesRequest describeVoiceRequest =
 DescribeVoicesRequest.builder()
                    .engine("standard")
                    .build();

            DescribeVoicesResponse describeVoicesResult =
 polly.describeVoices(describeVoiceRequest);
            Voice voice = describeVoicesResult.voices().stream()
                    .filter(v -> v.name().equals("Joanna"))
                    .findFirst()
                    .orElseThrow(() -> new RuntimeException("Voice not found"));
            InputStream stream = synthesize(polly, SAMPLE, voice, OutputFormat.MP3);
```

```
            AdvancedPlayer player = new AdvancedPlayer(stream,

 javazoom.jl.player.FactoryRegistry.systemRegistry().createAudioDevice());
            player.setPlayBackListener(new PlaybackListener() {
                public void playbackStarted(PlaybackEvent evt) {
                    System.out.println("Playback started");
                    System.out.println(SAMPLE);
                }

                public void playbackFinished(PlaybackEvent evt) {
                    System.out.println("Playback finished");
                }
            });

            // play it!
            player.play();

        } catch (PollyException | JavaLayerException | IOException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static InputStream synthesize(PollyClient polly, String text, Voice
 voice, OutputFormat format)
            throws IOException {
        SynthesizeSpeechRequest synthReq = SynthesizeSpeechRequest.builder()
                .text(text)
                .voiceId(voice.id())
                .outputFormat(format)
                .build();

        ResponseInputStream<SynthesizeSpeechResponse> synthRes =
 polly.synthesizeSpeech(synthReq);
        return synthRes;
    }
}
```

- Untuk detail API, lihat SynthesizeSpeechdi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat aplikasi untuk menganalisis umpan balik pelanggan

Contoh kode berikut menunjukkan cara membuat aplikasi yang menganalisis kartu komentar pelanggan, menerjemahkannya dari bahasa aslinya, menentukan sentimen mereka, dan menghasilkan file audio dari teks yang diterjemahkan.

SDK untuk Java 2.x

Aplikasi contoh ini menganalisis dan menyimpan kartu umpan balik pelanggan. Secara khusus, ini memenuhi kebutuhan sebuah hotel fiktif di New York City. Hotel menerima umpan balik dari para tamu dalam berbagai bahasa dalam bentuk kartu komentar fisik. Umpan balik itu diunggah ke aplikasi melalui klien web. Setelah gambar kartu komentar diunggah, langkah-langkah berikut terjadi:

- Teks diekstraksi dari gambar menggunakan Amazon Textract.
- Amazon Comprehend menentukan sentimen teks yang diekstraksi dan bahasanya.
- Teks yang diekstraksi diterjemahkan ke bahasa Inggris menggunakan Amazon Translate.
- Amazon Polly mensintesis file audio dari teks yang diekstraksi.

Aplikasi lengkap dapat digunakan dengan. AWS CDK Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

# Contoh Amazon RDS menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon RDS.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario
- Contoh nirserver


## Memulai

Halo Amazon RDS

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon RDS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.RdsException;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeDBInstances {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeInstances(rdsClient);
        rdsClient.close();
    }

    public static void describeInstances(RdsClient rdsClient) {
        try {
            DescribeDbInstancesResponse response = rdsClient.describeDBInstances();
            List<DBInstance> instanceList = response.dbInstances();
            for (DBInstance instance : instanceList) {
                System.out.println("Instance ARN is: " + instance.dbInstanceArn());
                System.out.println("The Engine is " + instance.engine());
                System.out.println("Connection endpoint is" +
 instance.endpoint().address());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Menjelaskan DBInstances di Referensi AWS SDK for Java 2.x API.

# Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Membuat grup parameter basis data kustom dan mengatur nilai parameter.
- Membuat instans basis data yang dikonfigurasikan untuk menggunakan grup parameter. Instans basis data juga berisi basis data.
- Mengambil cuplikan instans.
- Menghapus instans dan grup parameter.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

Menjalankan beberapa operasi.

```
import com.google.gson.Gson;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.CreateDbParameterGroupResponse;
import software.amazon.awssdk.services.rds.model.CreateDbSnapshotRequest;
import software.amazon.awssdk.services.rds.model.CreateDbSnapshotResponse;
import software.amazon.awssdk.services.rds.model.DBEngineVersion;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.DBParameterGroup;
import software.amazon.awssdk.services.rds.model.DBSnapshot;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbEngineVersionsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbEngineVersionsResponse;
```

```
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbParameterGroupsResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbParametersResponse;
import software.amazon.awssdk.services.rds.model.DescribeDbSnapshotsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbSnapshotsResponse;
import
 software.amazon.awssdk.services.rds.model.DescribeOrderableDbInstanceOptionsResponse;
import software.amazon.awssdk.services.rds.model.ModifyDbParameterGroupResponse;
import software.amazon.awssdk.services.rds.model.OrderableDBInstanceOption;
import software.amazon.awssdk.services.rds.model.Parameter;
import software.amazon.awssdk.services.rds.model.RdsException;
import software.amazon.awssdk.services.rds.model.CreateDbParameterGroupRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbParameterGroupsRequest;
import software.amazon.awssdk.services.rds.model.DescribeDbParametersRequest;
import software.amazon.awssdk.services.rds.model.ModifyDbParameterGroupRequest;
import
 software.amazon.awssdk.services.rds.model.DescribeOrderableDbInstanceOptionsRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbParameterGroupRequest;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 * This Java example performs these tasks:
 *
 * 1. Returns a list of the available DB engines.
 * 2. Selects an engine family and create a custom DB parameter group.
```

```
 * 3. Gets the parameter groups.
 * 4. Gets parameters in the group.
 * 5. Modifies the auto_increment_offset parameter.
 * 6. Gets and displays the updated parameters.
 * 7. Gets a list of allowed engine versions.
 * 8. Gets a list of micro instance classes available for the selected engine.
 * 9. Creates an RDS database instance that contains a MySql database and uses
 * the parameter group.
 * 10. Waits for the DB instance to be ready and prints out the connection
 * endpoint value.
 * 11. Creates a snapshot of the DB instance.
 * 12. Waits for an RDS DB snapshot to be ready.
 * 13. Deletes the RDS DB instance.
 * 14. Deletes the parameter group.
 */
public class RDSScenario {
    public static long sleepTime = 20;
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws InterruptedException {
        final String usage = """

                Usage:
                    <dbGroupName> <dbParameterGroupFamily> <dbInstanceIdentifier>
 <dbName> <dbSnapshotIdentifier> <secretName>

                Where:
                    dbGroupName - The database group name.\s
                    dbParameterGroupFamily - The database parameter group name (for
 example, mysql8.0).
                    dbInstanceIdentifier - The database instance identifier\s
                    dbName - The database name.\s
                    dbSnapshotIdentifier - The snapshot identifier.\s
                    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials"
                """;

        if (args.length != 6) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbGroupName = args[0];
        String dbParameterGroupFamily = args[1];
```

```
        String dbInstanceIdentifier = args[2];
        String dbName = args[3];
        String dbSnapshotIdentifier = args[4];
        String secretName = args[5];

        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        String masterUsername = user.getUsername();
        String masterUserPassword = user.getPassword();

        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();
        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon RDS example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Return a list of the available DB engines");
        describeDBEngines(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a custom parameter group");
        createDBParameterGroup(rdsClient, dbGroupName, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Get the parameter group");
        describeDbParameterGroups(rdsClient, dbGroupName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the parameters in the group");
        describeDbParameters(rdsClient, dbGroupName, 0);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Modify the auto_increment_offset parameter");
        modifyDBParas(rdsClient, dbGroupName);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("6. Display the updated value");
        describeDbParameters(rdsClient, dbGroupName, -1);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Get a list of allowed engine versions");
        getAllowedEngines(rdsClient, dbParameterGroupFamily);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Get a list of micro instance classes available for
the selected engine");
        getMicroInstances(rdsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println(
                "9. Create an RDS database instance that contains a MySql database
and uses the parameter group");
        String dbARN = createDatabaseInstance(rdsClient, dbGroupName,
dbInstanceIdentifier, dbName, masterUsername,
                masterUserPassword);
        System.out.println("The ARN of the new database is " + dbARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Wait for DB instance to be ready");
        waitForInstanceReady(rdsClient, dbInstanceIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Create a snapshot of the DB instance");
        createSnapshot(rdsClient, dbInstanceIdentifier, dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("12. Wait for DB snapshot to be ready");
        waitForSnapshotReady(rdsClient, dbInstanceIdentifier, dbSnapshotIdentifier);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("13. Delete the DB instance");
        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("14. Delete the parameter group");
        deleteParaGroup(rdsClient, dbGroupName, dbARN);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The Scenario has successfully completed.");
        System.out.println(DASHES);

        rdsClient.close();
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
            .region(region)
            .build();
    }

    public static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                .secretId(secretName)
                .build();

        GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }

    // Delete the parameter group after database has been deleted.
    // An exception is thrown if you attempt to delete the para group while database
    // exists.
    public static void deleteParaGroup(RdsClient rdsClient, String dbGroupName,
String dbARN)
            throws InterruptedException {
        try {
            boolean isDataDel = false;
            boolean didFind;
            String instanceARN;

            // Make sure that the database has been deleted.
```

```
            while (!isDataDel) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
                List<DBInstance> instanceList = response.dbInstances();
                int listSize = instanceList.size();
                didFind = false;
                int index = 1;
                for (DBInstance instance : instanceList) {
                    instanceARN = instance.dbInstanceArn();
                    if (instanceARN.compareTo(dbARN) == 0) {
                        System.out.println(dbARN + " still exists");
                        didFind = true;
                    }
                    if ((index == listSize) && (!didFind)) {
                        // Went through the entire list and did not find the
database ARN.
                        isDataDel = true;
                    }
                    Thread.sleep(sleepTime * 1000);
                    index++;
                }
            }

            // Delete the para group.
            DeleteDbParameterGroupRequest parameterGroupRequest =
DeleteDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .build();

            rdsClient.deleteDBParameterGroup(parameterGroupRequest);
            System.out.println(dbGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Delete the DB instance.
    public static void deleteDatabaseInstance(RdsClient rdsClient, String
dbInstanceIdentifier) {
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
DeleteDbInstanceRequest.builder()
```

```
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();

            DeleteDbInstanceResponse response =
rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.print("The status of the database is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Waits until the snapshot instance is available.
    public static void waitForSnapshotReady(RdsClient rdsClient, String
dbInstanceIdentifier,
            String dbSnapshotIdentifier) {
        try {
            boolean snapshotReady = false;
            String snapshotReadyStr;
            System.out.println("Waiting for the snapshot to become available.");

            DescribeDbSnapshotsRequest snapshotsRequest =
DescribeDbSnapshotsRequest.builder()
                    .dbSnapshotIdentifier(dbSnapshotIdentifier)
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            while (!snapshotReady) {
                DescribeDbSnapshotsResponse response =
rdsClient.describeDBSnapshots(snapshotsRequest);
                List<DBSnapshot> snapshotList = response.dbSnapshots();
                for (DBSnapshot snapshot : snapshotList) {
                    snapshotReadyStr = snapshot.status();
                    if (snapshotReadyStr.contains("available")) {
                        snapshotReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
```

```
            }

            System.out.println("The Snapshot is available!");
        } catch (RdsException | InterruptedException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Create an Amazon RDS snapshot.
    public static void createSnapshot(RdsClient rdsClient, String
dbInstanceIdentifier, String dbSnapshotIdentifier) {
        try {
            CreateDbSnapshotRequest snapshotRequest =
CreateDbSnapshotRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbSnapshotIdentifier(dbSnapshotIdentifier)
                    .build();

            CreateDbSnapshotResponse response =
rdsClient.createDBSnapshot(snapshotRequest);
            System.out.println("The Snapshot id is " +
response.dbSnapshot().dbiResourceId());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            String endpoint = "";
            while (!instanceReady) {
```

```
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
                    if (instanceReadyStr.contains("available")) {
                        endpoint = instance.endpoint().address();
                        instanceReady = true;
                    } else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database instance is available! The connection
endpoint is " + endpoint);

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Create a database instance and return the ARN of the database.
    public static String createDatabaseInstance(RdsClient rdsClient,
            String dbGroupName,
            String dbInstanceIdentifier,
            String dbName,
            String userName,
            String userPassword) {

        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                .dbInstanceIdentifier(dbInstanceIdentifier)
                .allocatedStorage(100)
                .dbName(dbName)
                .engine("mysql")
                .dbInstanceClass("db.t3.medium") // Updated to a supported class
                .engineVersion("8.0.32")         // Updated to a supported version
                .storageType("gp2")             // Changed to General Purpose SSD
(gp2)
                .masterUsername(userName)
                .masterUserPassword(userPassword)
```

```
                .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());
            return response.dbInstance().dbInstanceArn();

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }

        return "";
    }

    // Get a list of micro instances.
    public static void getMicroInstances(RdsClient rdsClient) {
        try {
            DescribeOrderableDbInstanceOptionsRequest dbInstanceOptionsRequest =
DescribeOrderableDbInstanceOptionsRequest
                    .builder()
                    .engine("mysql")
                    .build();

            DescribeOrderableDbInstanceOptionsResponse response = rdsClient
                    .describeOrderableDBInstanceOptions(dbInstanceOptionsRequest);
            List<OrderableDBInstanceOption> orderableDBInstances =
response.orderableDBInstanceOptions();
            for (OrderableDBInstanceOption dbInstanceOption : orderableDBInstances)
{
                System.out.println("The engine version is " +
dbInstanceOption.engineVersion());
                System.out.println("The engine description is " +
dbInstanceOption.engine());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Get a list of allowed engine versions.
```

```
   public static void getAllowedEngines(RdsClient rdsClient, String
dbParameterGroupFamily) {
       try {
           DescribeDbEngineVersionsRequest versionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .dbParameterGroupFamily(dbParameterGroupFamily)
                   .engine("mysql")
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(versionsRequest);
           List<DBEngineVersion> dbEngines = response.dbEngineVersions();
           for (DBEngineVersion dbEngine : dbEngines) {
               System.out.println("The engine version is " +
dbEngine.engineVersion());
               System.out.println("The engine description is " +
dbEngine.dbEngineDescription());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }

   // Modify auto_increment_offset and auto_increment_increment parameters.
   public static void modifyDBParas(RdsClient rdsClient, String dbGroupName) {
       try {
           Parameter parameter1 = Parameter.builder()
                   .parameterName("auto_increment_offset")
                   .applyMethod("immediate")
                   .parameterValue("5")
                   .build();

           List<Parameter> paraList = new ArrayList<>();
           paraList.add(parameter1);
           ModifyDbParameterGroupRequest groupRequest =
ModifyDbParameterGroupRequest.builder()
                   .dbParameterGroupName(dbGroupName)
                   .parameters(paraList)
                   .build();

           ModifyDbParameterGroupResponse response =
rdsClient.modifyDBParameterGroup(groupRequest);
```

```
            System.out.println("The parameter group " +
response.dbParameterGroupName() + " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Retrieve parameters in the group.
    public static void describeDbParameters(RdsClient rdsClient, String dbGroupName,
int flag) {
        try {
            DescribeDbParametersRequest dbParameterGroupsRequest;
            if (flag == 0) {
                dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                        .dbParameterGroupName(dbGroupName)
                        .build();
            } else {
                dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                        .dbParameterGroupName(dbGroupName)
                        .source("user")
                        .build();
            }

            DescribeDbParametersResponse response =
rdsClient.describeDBParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset or
                // auto_increment_increment.
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") == 0)) {
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
```

```
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDbParameterGroups(RdsClient rdsClient, String
dbGroupName) {
        try {
            DescribeDbParameterGroupsRequest groupsRequest =
DescribeDbParameterGroupsRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .maxRecords(20)
                    .build();

            DescribeDbParameterGroupsResponse response =
rdsClient.describeDBParameterGroups(groupsRequest);
            List<DBParameterGroup> groups = response.dbParameterGroups();
            for (DBParameterGroup group : groups) {
                System.out.println("The group name is " +
group.dbParameterGroupName());
                System.out.println("The group description is " +
group.description());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void createDBParameterGroup(RdsClient rdsClient, String
dbGroupName, String dbParameterGroupFamily) {
        try {
            CreateDbParameterGroupRequest groupRequest =
CreateDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .description("Created by using the AWS SDK for Java")
                    .build();
```

```
            CreateDbParameterGroupResponse response =
 rdsClient.createDBParameterGroup(groupRequest);
            System.out.println("The group name is " +
 response.dbParameterGroup().dbParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeDBEngines(RdsClient rdsClient) {
        try {
            DescribeDbEngineVersionsRequest engineVersionsRequest =
 DescribeDbEngineVersionsRequest.builder()
                    .defaultOnly(true)
                    .engine("mysql")
                    .maxRecords(20)
                    .build();

            DescribeDbEngineVersionsResponse response =
 rdsClient.describeDBEngineVersions(engineVersionsRequest);
            List<DBEngineVersion> engines = response.dbEngineVersions();

            // Get all DBEngineVersion objects.
            for (DBEngineVersion engineOb : engines) {
                System.out.println("The name of the DB parameter group family for
 the database engine is "
                        + engineOb.dbParameterGroupFamily());
                System.out.println("The name of the database engine " +
 engineOb.engine());
                System.out.println("The version number of the database engine " +
 engineOb.engineVersion());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Lihat detail API di topik-topik berikut dalam Referensi API AWS SDK for Java 2.x .

- Buat DBInstance
- Buat DBParameter Grup
- Buat DBSnapshot
- Hapus DBInstance
- Hapus DBParameter Grup
- Jelaskan DBEngine Versi
- Jelaskan DBInstances
- Jelaskan DBParameter Grup
- Jelaskan DBParameters
- Jelaskan DBSnapshots
- DescribeOrderableDBInstancePilihan
- Ubah DBParameter Grup

## Tindakan

### `CreateDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import com.google.gson.Gson;
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.CreateDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;
```

```
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example requires an AWS Secrets Manager secret that contains the
 * database credentials. If you do not create a
 * secret, this example will not work. For more details, see:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 *
 */

public class CreateDBInstance {
    public static long sleepTime = 20;

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <dbName> <secretName>

                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    dbName - The database name.\s
                    secretName - The name of the AWS Secrets Manager secret that
 contains the database credentials."
                """;

        if (args.length != 3) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String dbName = args[1];
        String secretName = args[2];
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
User.class);
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        createDatabaseInstance(rdsClient, dbInstanceIdentifier, dbName,
user.getUsername(), user.getPassword());
        waitForInstanceReady(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_WEST_2;
        return SecretsManagerClient.builder()
                .region(region)

.credentialsProvider(EnvironmentVariableCredentialsProvider.create())
                .build();
    }

    private static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                .secretId(secretName)
                .build();

        GetSecretValueResponse valueResponse =
secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }

    public static void createDatabaseInstance(RdsClient rdsClient,
            String dbInstanceIdentifier,
            String dbName,
            String userName,
```

```
            String userPassword) {

        try {
            CreateDbInstanceRequest instanceRequest =
CreateDbInstanceRequest.builder()
                .dbInstanceIdentifier(dbInstanceIdentifier)
                .allocatedStorage(100)
                .dbName(dbName)
                .engine("mysql")
                .dbInstanceClass("db.t3.medium") // Updated to a supported class
                .engineVersion("8.0.32")         // Updated to a supported version
                .storageType("gp2")             // Changed to General Purpose SSD
(gp2)
                .masterUsername(userName)
                .masterUserPassword(userPassword)
                .build();

            CreateDbInstanceResponse response =
rdsClient.createDBInstance(instanceRequest);
            System.out.print("The status is " +
response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    // Waits until the database instance is available.
    public static void waitForInstanceReady(RdsClient rdsClient, String
dbInstanceIdentifier) {
        boolean instanceReady = false;
        String instanceReadyStr;
        System.out.println("Waiting for instance to become available.");
        try {
            DescribeDbInstancesRequest instanceRequest =
DescribeDbInstancesRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            // Loop until the cluster is ready.
            while (!instanceReady) {
                DescribeDbInstancesResponse response =
rdsClient.describeDBInstances(instanceRequest);
```

```
                List<DBInstance> instanceList = response.dbInstances();
                for (DBInstance instance : instanceList) {
                    instanceReadyStr = instance.dbInstanceStatus();
                    if (instanceReadyStr.contains("available"))
                        instanceReady = true;
                    else {
                        System.out.print(".");
                        Thread.sleep(sleepTime * 1000);
                    }
                }
            }
            System.out.println("Database instance is available!");

        } catch (RdsException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Membuat DBInstance di Referensi AWS SDK for Java 2.x API.

### `CreateDBParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void createDBParameterGroup(RdsClient rdsClient, String
dbGroupName, String dbParameterGroupFamily) {
        try {
            CreateDbParameterGroupRequest groupRequest =
CreateDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .dbParameterGroupFamily(dbParameterGroupFamily)
                    .description("Created by using the AWS SDK for Java")
```

```
                    .build();

            CreateDbParameterGroupResponse response =
rdsClient.createDBParameterGroup(groupRequest);
            System.out.println("The group name is " +
response.dbParameterGroup().dbParameterGroupName());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Membuat DBParameter Grup di Referensi AWS SDK for Java 2.x API.

### `CreateDBSnapshot`

Contoh kode berikut menunjukkan cara menggunakan`CreateDBSnapshot`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Create an Amazon RDS snapshot.
    public static void createSnapshot(RdsClient rdsClient, String
dbInstanceIdentifier, String dbSnapshotIdentifier) {
        try {
            CreateDbSnapshotRequest snapshotRequest =
CreateDbSnapshotRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .dbSnapshotIdentifier(dbSnapshotIdentifier)
                    .build();

            CreateDbSnapshotResponse response =
rdsClient.createDBSnapshot(snapshotRequest);
            System.out.println("The Snapshot id is " +
response.dbSnapshot().dbiResourceId());
```

```
        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Membuat DBSnapshot di Referensi AWS SDK for Java 2.x API.

### `DeleteDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.DeleteDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier>\s
```

```
                Where:
                    dbInstanceIdentifier - The database instance identifier\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        deleteDatabaseInstance(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    public static void deleteDatabaseInstance(RdsClient rdsClient, String
 dbInstanceIdentifier) {
        try {
            DeleteDbInstanceRequest deleteDbInstanceRequest =
 DeleteDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .deleteAutomatedBackups(true)
                    .skipFinalSnapshot(true)
                    .build();

            DeleteDbInstanceResponse response =
 rdsClient.deleteDBInstance(deleteDbInstanceRequest);
            System.out.print("The status of the database is " +
 response.dbInstance().dbInstanceStatus());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Menghapus DBInstance di Referensi AWS SDK for Java 2.x API.

### `DeleteDBParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDBParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Delete the parameter group after database has been deleted.
   // An exception is thrown if you attempt to delete the para group while database
   // exists.
   public static void deleteParaGroup(RdsClient rdsClient, String dbGroupName,
String dbARN)
           throws InterruptedException {
       try {
           boolean isDataDel = false;
           boolean didFind;
           String instanceARN;

           // Make sure that the database has been deleted.
           while (!isDataDel) {
               DescribeDbInstancesResponse response =
rdsClient.describeDBInstances();
               List<DBInstance> instanceList = response.dbInstances();
               int listSize = instanceList.size();
               didFind = false;
               int index = 1;
               for (DBInstance instance : instanceList) {
                   instanceARN = instance.dbInstanceArn();
                   if (instanceARN.compareTo(dbARN) == 0) {
                       System.out.println(dbARN + " still exists");
                       didFind = true;
                   }
                   if ((index == listSize) && (!didFind)) {
                       // Went through the entire list and did not find the
database ARN.
                       isDataDel = true;
                   }
                   Thread.sleep(sleepTime * 1000);
```

```
                    index++;
                }
            }

            // Delete the para group.
            DeleteDbParameterGroupRequest parameterGroupRequest =
DeleteDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .build();

            rdsClient.deleteDBParameterGroup(parameterGroupRequest);
            System.out.println(dbGroupName + " was deleted.");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menghapus DBParameter Grup di Referensi AWS SDK for Java 2.x API.

### `DescribeAccountAttributes`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAccountAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.AccountQuota;
import software.amazon.awssdk.services.rds.model.RdsException;
import software.amazon.awssdk.services.rds.model.DescribeAccountAttributesResponse;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeAccountAttributes {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        getAccountAttributes(rdsClient);
        rdsClient.close();
    }

    public static void getAccountAttributes(RdsClient rdsClient) {
        try {
            DescribeAccountAttributesResponse response =
 rdsClient.describeAccountAttributes();
            List<AccountQuota> quotasList = response.accountQuotas();
            for (AccountQuota quotas : quotasList) {
                System.out.println("Name is: " + quotas.accountQuotaName());
                System.out.println("Max value is " + quotas.max());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeAccountAttributesdi Referensi AWS SDK for Java 2.x API.

### `DescribeDBEngineVersions`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBEngineVersions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDBEngines(RdsClient rdsClient) {
       try {
           DescribeDbEngineVersionsRequest engineVersionsRequest =
DescribeDbEngineVersionsRequest.builder()
                   .defaultOnly(true)
                   .engine("mysql")
                   .maxRecords(20)
                   .build();

           DescribeDbEngineVersionsResponse response =
rdsClient.describeDBEngineVersions(engineVersionsRequest);
           List<DBEngineVersion> engines = response.dbEngineVersions();

           // Get all DBEngineVersion objects.
           for (DBEngineVersion engineOb : engines) {
               System.out.println("The name of the DB parameter group family for
the database engine is "
                       + engineOb.dbParameterGroupFamily());
               System.out.println("The name of the database engine " +
engineOb.engine());
               System.out.println("The version number of the database engine " +
engineOb.engineVersion());
           }

       } catch (RdsException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat Menjelaskan DBEngine Versi dalam Referensi AWS SDK for Java 2.x API.

### `DescribeDBInstances`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBInstances`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.DescribeDbInstancesResponse;
import software.amazon.awssdk.services.rds.model.DBInstance;
import software.amazon.awssdk.services.rds.model.RdsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeDBInstances {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        describeInstances(rdsClient);
        rdsClient.close();
    }

    public static void describeInstances(RdsClient rdsClient) {
        try {
            DescribeDbInstancesResponse response = rdsClient.describeDBInstances();
            List<DBInstance> instanceList = response.dbInstances();
```

```
            for (DBInstance instance : instanceList) {
                System.out.println("Instance ARN is: " + instance.dbInstanceArn());
                System.out.println("The Engine is " + instance.engine());
                System.out.println("Connection endpoint is" +
 instance.endpoint().address());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Menjelaskan DBInstances di Referensi AWS SDK for Java 2.x API.

### `DescribeDBParameterGroups`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBParameterGroups`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeDbParameterGroups(RdsClient rdsClient, String
 dbGroupName) {
        try {
            DescribeDbParameterGroupsRequest groupsRequest =
 DescribeDbParameterGroupsRequest.builder()
                    .dbParameterGroupName(dbGroupName)
                    .maxRecords(20)
                    .build();

            DescribeDbParameterGroupsResponse response =
 rdsClient.describeDBParameterGroups(groupsRequest);
            List<DBParameterGroup> groups = response.dbParameterGroups();
            for (DBParameterGroup group : groups) {
```

```
                System.out.println("The group name is " +
group.dbParameterGroupName());
                System.out.println("The group description is " +
group.description());
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBParameter Grup dalam Referensi AWS SDK for Java 2.x API.

### `DescribeDBParameters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeDBParameters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Retrieve parameters in the group.
    public static void describeDbParameters(RdsClient rdsClient, String dbGroupName,
int flag) {
        try {
            DescribeDbParametersRequest dbParameterGroupsRequest;
            if (flag == 0) {
                dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                        .dbParameterGroupName(dbGroupName)
                        .build();
            } else {
                dbParameterGroupsRequest = DescribeDbParametersRequest.builder()
                        .dbParameterGroupName(dbGroupName)
                        .source("user")
```

```
                        .build();
            }

            DescribeDbParametersResponse response =
rdsClient.describeDBParameters(dbParameterGroupsRequest);
            List<Parameter> dbParameters = response.parameters();
            String paraName;
            for (Parameter para : dbParameters) {
                // Only print out information about either auto_increment_offset or
                // auto_increment_increment.
                paraName = para.parameterName();
                if ((paraName.compareTo("auto_increment_offset") == 0)
                        || (paraName.compareTo("auto_increment_increment ") == 0)) {
                    System.out.println("*** The parameter name is  " + paraName);
                    System.out.println("*** The parameter value is  " +
para.parameterValue());
                    System.out.println("*** The parameter data type is " +
para.dataType());
                    System.out.println("*** The parameter description is " +
para.description());
                    System.out.println("*** The parameter allowed values  is " +
para.allowedValues());
                }
            }

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Menjelaskan DBParameters di Referensi AWS SDK for Java 2.x API.

### `GenerateRDSAuthToken`

Contoh kode berikut menunjukkan cara menggunakan`GenerateRDSAuthToken`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan RdsUtilitieskelas untuk menghasilkan token otentikasi.

```
public class GenerateRDSAuthToken {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <masterUsername>

                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    masterUsername - The master user name.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String masterUsername = args[1];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        String token = getAuthToken(rdsClient, dbInstanceIdentifier,
 masterUsername);
        System.out.println("The token response is " + token);
    }

    public static String getAuthToken(RdsClient rdsClient, String
 dbInstanceIdentifier, String masterUsername) {

        RdsUtilities utilities = rdsClient.utilities();
```

```
        try {
            GenerateAuthenticationTokenRequest tokenRequest =
 GenerateAuthenticationTokenRequest.builder()
                    .credentialsProvider(ProfileCredentialsProvider.create())
                    .username(masterUsername)
                    .port(3306)
                    .hostname(dbInstanceIdentifier)
                    .build();

            return utilities.generateAuthenticationToken(tokenRequest);

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat Menghasilkan RDSAuth Token di Referensi AWS SDK for Java 2.x API.

### `ModifyDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`ModifyDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.ModifyDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.ModifyDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ModifyDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier> <dbSnapshotIdentifier>\s
                Where:
                    dbInstanceIdentifier - The database instance identifier.\s
                    masterUserPassword - The updated password that corresponds to
 the master user name.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        String masterUserPassword = args[1];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        updateIntance(rdsClient, dbInstanceIdentifier, masterUserPassword);
        rdsClient.close();
    }

    public static void updateIntance(RdsClient rdsClient, String
 dbInstanceIdentifier, String masterUserPassword) {
        try {
            // For a demo - modify the DB instance by modifying the master password.
            ModifyDbInstanceRequest modifyDbInstanceRequest =
 ModifyDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .publiclyAccessible(true)
                    .masterUserPassword(masterUserPassword)
                    .build();
```

```
            ModifyDbInstanceResponse instanceResponse =
 rdsClient.modifyDBInstance(modifyDbInstanceRequest);
            System.out.print("The ARN of the modified database is: " +
 instanceResponse.dbInstance().dbInstanceArn());

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Memodifikasi DBInstance dalam Referensi AWS SDK for Java 2.x API.

### `ModifyDBParameterGroup`

Contoh kode berikut menunjukkan cara menggunakan`ModifyDBParameterGroup`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Modify auto_increment_offset and auto_increment_increment parameters.
    public static void modifyDBParas(RdsClient rdsClient, String dbGroupName) {
        try {
            Parameter parameter1 = Parameter.builder()
                    .parameterName("auto_increment_offset")
                    .applyMethod("immediate")
                    .parameterValue("5")
                    .build();

            List<Parameter> paraList = new ArrayList<>();
            paraList.add(parameter1);
            ModifyDbParameterGroupRequest groupRequest =
 ModifyDbParameterGroupRequest.builder()
                    .dbParameterGroupName(dbGroupName)
```

```
                    .parameters(paraList)
                    .build();

            ModifyDbParameterGroupResponse response =
rdsClient.modifyDBParameterGroup(groupRequest);
            System.out.println("The parameter group " +
response.dbParameterGroupName() + " was successfully modified");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat Memodifikasi DBParameter Grup di Referensi AWS SDK for Java 2.x API.

### `RebootDBInstance`

Contoh kode berikut menunjukkan cara menggunakan`RebootDBInstance`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rds.RdsClient;
import software.amazon.awssdk.services.rds.model.RebootDbInstanceRequest;
import software.amazon.awssdk.services.rds.model.RebootDbInstanceResponse;
import software.amazon.awssdk.services.rds.model.RdsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RebootDBInstance {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <dbInstanceIdentifier>\s

                Where:
                    dbInstanceIdentifier - The database instance identifier\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String dbInstanceIdentifier = args[0];
        Region region = Region.US_WEST_2;
        RdsClient rdsClient = RdsClient.builder()
                .region(region)
                .build();

        rebootInstance(rdsClient, dbInstanceIdentifier);
        rdsClient.close();
    }

    public static void rebootInstance(RdsClient rdsClient, String
 dbInstanceIdentifier) {
        try {
            RebootDbInstanceRequest rebootDbInstanceRequest =
 RebootDbInstanceRequest.builder()
                    .dbInstanceIdentifier(dbInstanceIdentifier)
                    .build();

            RebootDbInstanceResponse instanceResponse =
 rdsClient.rebootDBInstance(rebootDbInstanceRequest);
            System.out.print("The database " +
 instanceResponse.dbInstance().dbInstanceArn() + " was rebooted");

        } catch (RdsException e) {
            System.out.println(e.getLocalizedMessage());
```

```
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Reboot DBInstance di Referensi AWS SDK for Java 2.x API.

## Skenario

Buat pelacak butir kerja Aurora Nirserver

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item pekerjaan dalam database Amazon Aurora Tanpa Server dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan butir kerja yang tersimpan dalam basis data Amazon RDS.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Aurora Tanpa Server dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Untuk kode sumber lengkap dan instruksi tentang cara menyiapkan dan menjalankan contoh yang menggunakan JDBC API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Aurora
- Amazon RDS
- Layanan Data Amazon RDS
- Amazon SES

# Contoh nirserver

Menghubungkan ke database Amazon RDS dalam fungsi Lambda

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menghubungkan ke database RDS. Fungsi membuat permintaan database sederhana dan mengembalikan hasilnya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Menghubungkan ke database Amazon RDS dalam fungsi Lambda menggunakan Java.

```
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyRequestEvent;
import com.amazonaws.services.lambda.runtime.events.APIGatewayProxyResponseEvent;
import software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rdsdata.RdsDataClient;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementRequest;
import software.amazon.awssdk.services.rdsdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.rdsdata.model.Field;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

public class RdsLambdaHandler implements RequestHandler<APIGatewayProxyRequestEvent,
 APIGatewayProxyResponseEvent> {

    @Override
    public APIGatewayProxyResponseEvent handleRequest(APIGatewayProxyRequestEvent
 event, Context context) {
        APIGatewayProxyResponseEvent response = new APIGatewayProxyResponseEvent();

        try {
```

```
            // Obtain auth token
            String token = createAuthToken();

            // Define connection configuration
            String connectionString = String.format("jdbc:mysql://%s:%s/%s?
useSSL=true&requireSSL=true",
                    System.getenv("ProxyHostName"),
                    System.getenv("Port"),
                    System.getenv("DBName"));

            // Establish a connection to the database
            try (Connection connection =
 DriverManager.getConnection(connectionString, System.getenv("DBUserName"), token);
                 PreparedStatement statement = connection.prepareStatement("SELECT ?
 + ? AS sum")) {

                statement.setInt(1, 3);
                statement.setInt(2, 2);

                try (ResultSet resultSet = statement.executeQuery()) {
                    if (resultSet.next()) {
                        int sum = resultSet.getInt("sum");
                        response.setStatusCode(200);
                        response.setBody("The selected sum is: " + sum);
                    }
                }
            }

        } catch (Exception e) {
            response.setStatusCode(500);
            response.setBody("Error: " + e.getMessage());
        }

        return response;
    }

    private String createAuthToken() {
        // Create RDS Data Service client
        RdsDataClient rdsDataClient = RdsDataClient.builder()
                .region(Region.of(System.getenv("AWS_REGION")))
                .credentialsProvider(DefaultCredentialsProvider.create())
                .build();

        // Define authentication request
```

```
        ExecuteStatementRequest request = ExecuteStatementRequest.builder()
                .resourceArn(System.getenv("ProxyHostName"))
                .secretArn(System.getenv("DBUserName"))
                .database(System.getenv("DBName"))
                .sql("SELECT 'RDS IAM Authentication'")
                .build();

        // Execute request and obtain authentication token
        ExecuteStatementResponse response = rdsDataClient.executeStatement(request);
        Field tokenField = response.records().get(0).get(0);

        return tokenField.stringValue();
    }
}
```

# Contoh Amazon RDS Data Service menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan Layanan Data Amazon RDS.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Skenario


## Skenario

Buat pelacak butir kerja Aurora Nirserver

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item pekerjaan dalam database Amazon Aurora Tanpa Server dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan butir kerja yang tersimpan dalam basis data Amazon RDS.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Aurora Tanpa Server dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Untuk kode sumber lengkap dan instruksi tentang cara menyiapkan dan menjalankan contoh yang menggunakan JDBC API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Aurora
- Amazon RDS
- Layanan Data Amazon RDS
- Amazon SES

# Contoh Amazon Redshift menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Amazon Redshift.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai

- Hal-hal mendasar
- Tindakan
- Skenario

## Memulai

### Halo Amazon Redshift

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon Redshift.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.redshift.RedshiftClient;
import software.amazon.awssdk.services.redshift.paginators.DescribeClustersIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloRedshift {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RedshiftClient redshiftClient = RedshiftClient.builder()
            .region(region)
            .build();

        listClustersPaginator(redshiftClient);
    }

    public static void listClustersPaginator(RedshiftClient redshiftClient) {
```

```
        DescribeClustersIterable clustersIterable =
 redshiftClient.describeClustersPaginator();
        clustersIterable.stream()
            .flatMap(r -> r.clusters().stream())
            .forEach(cluster -> System.out
                .println(" Cluster identifier: " + cluster.clusterIdentifier() + "
 status = " + cluster.clusterStatus()));
    }
}
```

- Untuk detail API, lihat DescribeClustersdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat cluster Redshift.
- Daftar database di cluster.
- Buat tabel bernama Movies.
- Isi tabel Film.
- Kueri tabel Film berdasarkan tahun.
- Ubah cluster Redshift.
- Hapus cluster Amazon Redshift.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang mendemonstrasikan fitur Amazon Redshift.

```
import com.example.redshift.User;
```

```
import com.google.gson.Gson;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.redshift.model.ClusterAlreadyExistsException;
import software.amazon.awssdk.services.redshift.model.CreateClusterResponse;
import software.amazon.awssdk.services.redshift.model.DeleteClusterResponse;
import software.amazon.awssdk.services.redshift.model.ModifyClusterResponse;
import software.amazon.awssdk.services.redshift.model.RedshiftException;
import software.amazon.awssdk.services.redshiftdata.model.ExecuteStatementResponse;
import software.amazon.awssdk.services.redshiftdata.model.RedshiftDataException;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 *
 *  This example requires an AWS Secrets Manager secret that contains the
 *  database credentials. If you do not create a
 *  secret that specifies user name and password, this example will not work. For
 details, see:
 *
 *  https://docs.aws.amazon.com/secretsmanager/latest/userguide/integrating_how-
services-use-secrets_RS.html
 *
 This Java example performs these tasks:
 *
 * 1. Prompts the user for a unique cluster ID or use the default value.
 * 2. Creates a Redshift cluster with the specified or default cluster Id value.
 * 3. Waits until the Redshift cluster is available for use.
 * 4. Lists all databases using a pagination API call.
 * 5. Creates a table named "Movies" with fields ID, title, and year.
 * 6. Inserts a specified number of records into the "Movies" table by reading the
 Movies JSON file.
 * 7. Prompts the user for a movie release year.
```

```
 * 8. Runs a SQL query to retrieve movies released in the specified year.
 * 9. Modifies the Redshift cluster.
 * 10. Prompts the user for confirmation to delete the Redshift cluster.
 * 11. If confirmed, deletes the specified Redshift cluster.
 */

public class RedshiftScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger =
 LoggerFactory.getLogger(RedshiftScenario.class);

    static RedshiftActions redshiftActions = new RedshiftActions();
    public static void main(String[] args) throws Exception {
        final String usage = """

            Usage:
                <jsonFilePath> <secretName>\s

            Where:
                jsonFilePath - The path to the Movies JSON file (you can locate that
 file in ../../../resources/sample_files/movies.json)
                secretName - The name of the secret that belongs to Secret Manager
 that stores the user name and password used in this scenario.
            """;

        if (args.length != 2) {
            logger.info(usage);
            return;
        }

        String jsonFilePath = args[0];
        String secretName = args[1];
        Scanner scanner = new Scanner(System.in);
        logger.info(DASHES);
        logger.info("Welcome to the Amazon Redshift SDK Basics scenario.");
        logger.info("""
            This Java program demonstrates how to interact with Amazon Redshift by
 using the AWS SDK for Java (v2).\s
            Amazon Redshift is a fully managed, petabyte-scale data warehouse
 service hosted in the cloud.

            The program's primary functionalities include cluster creation,
 verification of cluster readiness,\s
```

```
            list databases, table creation, data population within the table, and
 execution of SQL statements.
            Furthermore, it demonstrates the process of querying data from the Movie
 table.\s

            Upon completion of the program, all AWS resources are cleaned up.
            """);

        logger.info("Lets get started...");
        logger.info("""
            First, we will retrieve the user name and password from Secrets Manager.

            Using Amazon Secrets Manager to store Redshift credentials provides
 several security benefits.
            It allows you to securely store and manage sensitive information, such
 as passwords, API keys, and
            database credentials, without embedding them directly in your
 application code.

            More information can be found here:

            https://docs.aws.amazon.com/secretsmanager/latest/userguide/
integrating_how-services-use-secrets_RS.html
            """);
        Gson gson = new Gson();
        User user = gson.fromJson(String.valueOf(getSecretValues(secretName)),
 User.class);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            runScenario(user, scanner, jsonFilePath);
        } catch (RuntimeException e) {
            e.printStackTrace();
        } catch (Throwable e) {
            throw new RuntimeException(e);
        }
    }

    private static void runScenario(User user, Scanner scanner,  String
 jsonFilePath) throws Throwable {
        String databaseName = "dev";
        System.out.println(DASHES);
        logger.info("Create a Redshift Cluster");
```

```
        logger.info("A Redshift cluster refers to the collection of computing
resources and storage that work together to process and analyze large volumes of
data.");
        logger.info("Enter a cluster id value or accept the default by hitting Enter
(default is redshift-cluster-movies): ");
        String userClusterId = scanner.nextLine();
        String clusterId = userClusterId.isEmpty() ? "redshift-cluster-movies" :
userClusterId;
        try {
            CompletableFuture<CreateClusterResponse> future =
redshiftActions.createClusterAsync(clusterId, user.getUserName(),
user.getUserPassword());
            CreateClusterResponse response = future.join();
            logger.info("Cluster successfully created. Cluster Identifier {} ",
response.cluster().clusterIdentifier());

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof ClusterAlreadyExistsException) {
                logger.info("The Cluster {} already exists. Moving on...",
clusterId);
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Wait until {} is available.", clusterId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
redshiftActions.waitForClusterReadyAsync(clusterId);
            future.join();
            logger.info("Cluster is ready!");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftException redshiftEx) {
                logger.info("Redshift error occurred: Error message: {}, Error code
{}", redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
```

```
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        String databaseInfo = """
            When you created $clusteridD, the dev database is created by default and
 used in this scenario.\s

            To create a custom database, you need to have a CREATEDB privilege.\s
            For more information, see the documentation here: https://
docs.aws.amazon.com/redshift/latest/dg/r_CREATE_DATABASE.html.
           """.replace("$clusteridD", clusterId);

        logger.info(databaseInfo);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("List databases in {} ",clusterId);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
 redshiftActions.listAllDatabasesAsync(clusterId, user.getUserName(), "dev");
            future.join();
            logger.info("Databases listed successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.error("Redshift Data error occurred: {} Error code: {}",
 redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.error("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Now you will create a table named Movies.");
        waitForInputToContinue(scanner);
        try {
```

```
            CompletableFuture<ExecuteStatementResponse> future =
redshiftActions.createTableAsync(clusterId, databaseName, user.getUserName());
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Populate the Movies table using the Movies.json file.");
        logger.info("Specify the number of records you would like to add to the
Movies Table.");
        logger.info("Please enter a value between 50 and 200.");
        int numRecords;
        do {
            logger.info("Enter a value: ");
            while (!scanner.hasNextInt()) {
                logger.info("Invalid input. Please enter a value between 50 and
200.");
                logger.info("Enter a year: ");
                scanner.next();
            }
            numRecords = scanner.nextInt();
        } while (numRecords < 50 || numRecords > 200);
        try {
            redshiftActions.popTableAsync(clusterId, databaseName,
user.getUserName(), jsonFilePath, numRecords).join();  // Wait for the operation to
complete
        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
```

```
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Query the Movies table by year. Enter a value between
2012-2014.");
        int movieYear;
        do {
            logger.info("Enter a year: ");
            while (!scanner.hasNextInt()) {
                logger.info("Invalid input. Please enter a valid year between 2012
and 2014.");
                logger.info("Enter a year: ");
                scanner.next();
            }
            movieYear = scanner.nextInt();
            scanner.nextLine();
        } while (movieYear < 2012 || movieYear > 2014);

        String id;
        try {
            CompletableFuture<String> future =
redshiftActions.queryMoviesByYearAsync(databaseName, user.getUserName(), movieYear,
clusterId);
            id = future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }

        logger.info("The identifier of the statement is " + id);
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
redshiftActions.checkStatementAsync(id);
```

```
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future = redshiftActions.getResultsAsync(id);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Now you will modify the Redshift cluster.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<ModifyClusterResponse> future =
redshiftActions.modifyClusterAsync(clusterId);;
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof RedshiftDataException redshiftEx) {
                logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
            } else {
```

```
                logger.info("An unexpected error occurred: {}", rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("Would you like to delete the Amazon Redshift cluster? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            logger.info("You selected to delete {} ", clusterId);
            waitForInputToContinue(scanner);
            try {
                CompletableFuture<DeleteClusterResponse> future =
redshiftActions.deleteRedshiftClusterAsync(clusterId);;
                future.join();

            } catch (RuntimeException rt) {
                Throwable cause = rt.getCause();
                if (cause instanceof RedshiftDataException redshiftEx) {
                    logger.info("Redshift Data error occurred: {} Error code: {}",
redshiftEx.getMessage(), redshiftEx.awsErrorDetails().errorCode());
                } else {
                    logger.info("An unexpected error occurred: {}",
rt.getMessage());
                }
                throw cause;
            }
        } else {
            logger.info("The {}  was not deleted", clusterId);
        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("This concludes the Amazon Redshift SDK Basics scenario.");
        logger.info(DASHES);
    }

    private static SecretsManagerClient getSecretClient() {
        Region region = Region.US_EAST_1;
        return SecretsManagerClient.builder()
            .region(region)
            .build();
```

```
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }

    // Get the Amazon Redshift credentials from AWS Secrets Manager.
    private static String getSecretValues(String secretName) {
        SecretsManagerClient secretClient = getSecretClient();
        GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
            .secretId(secretName)
            .build();

        GetSecretValueResponse valueResponse =
 secretClient.getSecretValue(valueRequest);
        return valueResponse.secretString();
    }
}
```

Kelas pembungkus untuk metode Amazon Redshift SDK.

```
public class RedshiftActions {

    private static final Logger logger =
 LoggerFactory.getLogger(RedshiftActions.class);
    private static RedshiftDataAsyncClient redshiftDataAsyncClient;

    private static RedshiftAsyncClient redshiftAsyncClient;
```

```
    private static RedshiftAsyncClient getAsyncClient() {
        if (redshiftAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            redshiftAsyncClient = RedshiftAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return redshiftAsyncClient;
    }

    private static RedshiftDataAsyncClient getAsyncDataClient() {
        if (redshiftDataAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            redshiftDataAsyncClient = RedshiftDataAsyncClient.builder()
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
```

```
        }
        return redshiftDataAsyncClient;
    }

    /**
     * Creates a new Amazon Redshift cluster asynchronously.
     * @param clusterId     the unique identifier for the cluster
     * @param username      the username for the administrative user
     * @param userPassword  the password for the administrative user
     * @return a CompletableFuture that represents the asynchronous operation of
creating the cluster
     * @throws RuntimeException if the cluster creation fails
     */
    public CompletableFuture<CreateClusterResponse> createClusterAsync(String
clusterId, String username, String userPassword) {
        CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .masterUsername(username)
            .masterUserPassword(userPassword)
            .nodeType("ra3.4xlarge")
            .publiclyAccessible(true)
            .numberOfNodes(2)
            .build();

        return getAsyncClient().createCluster(clusterRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Created cluster ");
                } else {
                    throw new RuntimeException("Failed to create cluster: " +
exception.getMessage(), exception);
                }
            });
    }

    /**
     * Waits asynchronously for the specified cluster to become available.
     * @param clusterId the identifier of the cluster to wait for
     * @return a {@link CompletableFuture} that completes when the cluster is ready
     */
    public CompletableFuture<Void> waitForClusterReadyAsync(String clusterId) {
        DescribeClustersRequest clustersRequest = DescribeClustersRequest.builder()
            .clusterIdentifier(clusterId)
            .build();
```

```
        logger.info("Waiting for cluster to become available. This may take a few
minutes.");
        long startTime = System.currentTimeMillis();

        // Recursive method to poll the cluster status.
        return checkClusterStatusAsync(clustersRequest, startTime);
    }

    private CompletableFuture<Void> checkClusterStatusAsync(DescribeClustersRequest
clustersRequest, long startTime) {
        return getAsyncClient().describeClusters(clustersRequest)
            .thenCompose(clusterResponse -> {
                List<Cluster> clusterList = clusterResponse.clusters();
                boolean clusterReady = false;
                for (Cluster cluster : clusterList) {
                    if ("available".equals(cluster.clusterStatus())) {
                        clusterReady = true;
                        break;
                    }
                }

                if (clusterReady) {
                    logger.info(String.format("Cluster is available!"));
                    return CompletableFuture.completedFuture(null);
                } else {
                    long elapsedTimeMillis = System.currentTimeMillis() - startTime;
                    long elapsedSeconds = elapsedTimeMillis / 1000;
                    long minutes = elapsedSeconds / 60;
                    long seconds = elapsedSeconds % 60;
                    System.out.printf("\rElapsed Time: %02d:%02d - Waiting for
cluster...", minutes, seconds);
                    System.out.flush();

                    // Wait 1 second before the next status check
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignored ->
checkClusterStatusAsync(clustersRequest, startTime));
```

```
                }
            }).exceptionally(exception -> {
                throw new RuntimeException("Failed to get cluster status: " +
exception.getMessage(), exception);
            });
    }

    /**
     * Lists all databases asynchronously for the specified cluster, database user,
and database.
     * @param clusterId the identifier of the cluster to list databases for
     * @param dbUser the database user to use for the list databases request
     * @param database the database to list databases for
     * @return a {@link CompletableFuture} that completes when the database listing
is complete, or throws a {@link RuntimeException} if there was an error
     */
    public CompletableFuture<Void> listAllDatabasesAsync(String clusterId, String
dbUser, String database) {
        ListDatabasesRequest databasesRequest = ListDatabasesRequest.builder()
            .clusterIdentifier(clusterId)
            .dbUser(dbUser)
            .database(database)
            .build();

        // Asynchronous paginator for listing databases.
        ListDatabasesPublisher databasesPaginator =
getAsyncDataClient().listDatabasesPaginator(databasesRequest);
        CompletableFuture<Void> future = databasesPaginator.subscribe(response -> {
            response.databases().forEach(db -> {
                logger.info("The database name is {} ", db);
            });
        });

        // Return the future for asynchronous handling.
        return future.exceptionally(exception -> {
            throw new RuntimeException("Failed to list databases: " +
exception.getMessage(), exception);
        });
    }

    /**
     * Creates an asynchronous task to execute a SQL statement for creating a new
table.
     *
```

```
    * @param clusterId    the identifier of the Amazon Redshift cluster
    * @param databaseName the name of the database to create the table in
    * @param userName     the username to use for the database connection
    * @return a {@link CompletableFuture} that completes with the result of the SQL
statement execution
    * @throws RuntimeException if there is an error creating the table
    */
   public CompletableFuture<ExecuteStatementResponse> createTableAsync(String
clusterId, String databaseName, String userName) {
       ExecuteStatementRequest createTableRequest =
ExecuteStatementRequest.builder()
           .clusterIdentifier(clusterId)
           .dbUser(userName)
           .database(databaseName)
           .sql("CREATE TABLE Movies (" +
               "id INT PRIMARY KEY, " +
               "title VARCHAR(100), " +
               "year INT)")
           .build();

       return getAsyncDataClient().executeStatement(createTableRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Error creating table: " +
exception.getMessage(), exception);
               } else {
                   logger.info("Table created: Movies");
               }
           });
   }

   /**
    * Asynchronously pops a table from a JSON file.
    *
    * @param clusterId   the ID of the cluster
    * @param databaseName the name of the database
    * @param userName    the username
    * @param fileName    the name of the JSON file
    * @param number      the number of records to process
    * @return a CompletableFuture that completes with the number of records added
to the Movies table
    */
   public CompletableFuture<Integer> popTableAsync(String clusterId, String
databaseName, String userName, String fileName, int number) {
```

```
       return CompletableFuture.supplyAsync(() -> {
               try {
                   JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                   JsonNode rootNode = new ObjectMapper().readTree(parser);
                   Iterator<JsonNode> iter = rootNode.iterator();
                   return iter;
               } catch (IOException e) {
                   throw new RuntimeException("Failed to read or parse JSON file: "
+ e.getMessage(), e);
               }
           }).thenCompose(iter -> processNodesAsync(clusterId, databaseName,
userName, iter, number))
           .whenComplete((result, exception) -> {
               if (exception != null) {
                   logger.info("Error {} ", exception.getMessage());
               } else {
                   logger.info("{} records were added to the Movies table." ,
result);
               }
           });
   }

   private CompletableFuture<Integer> processNodesAsync(String clusterId, String
databaseName, String userName, Iterator<JsonNode> iter, int number) {
       return CompletableFuture.supplyAsync(() -> {
           int t = 0;
           try {
               while (iter.hasNext()) {
                   if (t == number)
                       break;
                   JsonNode currentNode = iter.next();
                   int year = currentNode.get("year").asInt();
                   String title = currentNode.get("title").asText();

                   // Use SqlParameter to avoid SQL injection.
                   List<SqlParameter> parameterList = new ArrayList<>();
                   String sqlStatement = "INSERT INTO Movies
VALUES( :id , :title, :year);";
                   SqlParameter idParam = SqlParameter.builder()
                       .name("id")
                       .value(String.valueOf(t))
                       .build();
```

```
                    SqlParameter titleParam = SqlParameter.builder()
                        .name("title")
                        .value(title)
                        .build();

                    SqlParameter yearParam = SqlParameter.builder()
                        .name("year")
                        .value(String.valueOf(year))
                        .build();
                    parameterList.add(idParam);
                    parameterList.add(titleParam);
                    parameterList.add(yearParam);

                    ExecuteStatementRequest insertStatementRequest =
ExecuteStatementRequest.builder()
                        .clusterIdentifier(clusterId)
                        .sql(sqlStatement)
                        .database(databaseName)
                        .dbUser(userName)
                        .parameters(parameterList)
                        .build();

                    getAsyncDataClient().executeStatement(insertStatementRequest);
                    logger.info("Inserted: " + title + " (" + year + ")");
                    t++;
                }
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error inserting data: " +
e.getMessage(), e);
            }
            return t;
        });
    }

    /**
     * Checks the status of an SQL statement asynchronously and handles the
completion of the statement.
     *
     * @param sqlId the ID of the SQL statement to check
     * @return a {@link CompletableFuture} that completes when the SQL statement's
status is either "FINISHED" or "FAILED"
     */
    public CompletableFuture<Void> checkStatementAsync(String sqlId) {
```

```
        DescribeStatementRequest statementRequest =
DescribeStatementRequest.builder()
            .id(sqlId)
            .build();

        return getAsyncDataClient().describeStatement(statementRequest)
            .thenCompose(response -> {
                String status = response.statusAsString();
                logger.info("... Status: {} ", status);

                if ("FAILED".equals(status)) {
                    throw new RuntimeException("The Query Failed. Ending program");
                } else if ("FINISHED".equals(status)) {
                    return CompletableFuture.completedFuture(null);
                } else {
                    // Sleep for 1 second and recheck status
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignore -> checkStatementAsync(sqlId)); //
Recursively call until status is FINISHED or FAILED
                }
            }).whenComplete((result, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    logger.info("Error: {} ", exception.getMessage());
                } else {
                    logger.info("The statement is finished!");
                }
            });
    }

    /**
     * Asynchronously retrieves the results of a statement execution.
     *
     * @param statementId the ID of the statement for which to retrieve the results
     * @return a {@link CompletableFuture} that completes when the statement result
has been processed
     */
    public CompletableFuture<Void> getResultsAsync(String statementId) {
```

```
        GetStatementResultRequest resultRequest =
GetStatementResultRequest.builder()
            .id(statementId)
            .build();

        return getAsyncDataClient().getStatementResult(resultRequest)
            .handle((response, exception) -> {
                if (exception != null) {
                    logger.info("Error getting statement result {} ",
exception.getMessage());
                    throw new RuntimeException("Error getting statement result: " +
exception.getMessage(), exception);
                }

                // Extract and print the field values using streams if the response
is valid.
                response.records().stream()
                    .flatMap(List::stream)
                    .map(Field::stringValue)
                    .filter(value -> value != null)
                    .forEach(value -> System.out.println("The Movie title field is "
+ value));

                return response;
            }).thenAccept(response -> {
                // Optionally add more logic here if needed after handling the
response
            });
    }


    /**
     * Asynchronously queries movies by a given year from a Redshift database.
     *
     * @param database    the name of the database to query
     * @param dbUser      the user to connect to the database with
     * @param year        the year to filter the movies by
     * @param clusterId   the identifier of the Redshift cluster to connect to
     * @return a {@link CompletableFuture} containing the response ID of the
executed SQL statement
     */
    public CompletableFuture<String> queryMoviesByYearAsync(String database,
                                                             String dbUser,
                                                             int year,
```

```
                                                                    String clusterId)
{

       String sqlStatement = "SELECT * FROM Movies WHERE year = :year";
       SqlParameter yearParam = SqlParameter.builder()
           .name("year")
           .value(String.valueOf(year))
           .build();

       ExecuteStatementRequest statementRequest = ExecuteStatementRequest.builder()
           .clusterIdentifier(clusterId)
           .database(database)
           .dbUser(dbUser)
           .parameters(yearParam)
           .sql(sqlStatement)
           .build();

       return CompletableFuture.supplyAsync(() -> {
           try {
               ExecuteStatementResponse response =
getAsyncDataClient().executeStatement(statementRequest).join(); // Use join() to
wait for the result
               return response.id();
           } catch (RedshiftDataException e) {
               throw new RuntimeException("Error executing statement: " +
e.getMessage(), e);
           }
       }).exceptionally(exception -> {
           logger.info("Error: {}", exception.getMessage());
           return "";
       });
   }

   /**
    * Modifies an Amazon Redshift cluster asynchronously.
    *
    * @param clusterId the identifier of the cluster to be modified
    * @return a {@link CompletableFuture} that completes when the cluster
modification is complete
    */
   public CompletableFuture<ModifyClusterResponse> modifyClusterAsync(String
clusterId) {
       ModifyClusterRequest modifyClusterRequest = ModifyClusterRequest.builder()
           .clusterIdentifier(clusterId)
```

```
            .preferredMaintenanceWindow("wed:07:30-wed:08:00")
            .build();

        return getAsyncClient().modifyCluster(modifyClusterRequest)
            .whenComplete((clusterResponse, exception) -> {
                if (exception != null) {
                    if (exception.getCause() instanceof RedshiftException) {
                        logger.info("Error: {} ", exception.getMessage());
                    } else {
                        logger.info("Unexpected error: {} ",
exception.getMessage());
                    }
                } else {
                    logger.info("The modified cluster was successfully modified and
has "
                        + clusterResponse.cluster().preferredMaintenanceWindow() + "
as the maintenance window");
                }
            });
    }

    /**
     * Deletes a Redshift cluster asynchronously.
     *
     * @param clusterId the identifier of the Redshift cluster to be deleted
     * @return a {@link CompletableFuture} that represents the asynchronous
operation of deleting the Redshift cluster
     */
    public CompletableFuture<DeleteClusterResponse>
deleteRedshiftClusterAsync(String clusterId) {
        DeleteClusterRequest deleteClusterRequest = DeleteClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .skipFinalClusterSnapshot(true)
            .build();

        return getAsyncClient().deleteCluster(deleteClusterRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    // Handle exceptions
                    if (exception.getCause() instanceof RedshiftException) {
                        logger.info("Error: {}", exception.getMessage());
                    } else {
                        logger.info("Unexpected error: {}", exception.getMessage());
                    }
```

```
                } else {
                    // Handle successful response
                    logger.info("The status is {}",
 response.cluster().clusterStatus());
                }
            });
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateCluster
  - DescribeClusters
  - DescribeStatement
  - ExecuteStatement
  - GetStatementResult
  - ListDatabasesPaginator
  - ModifyCluster

## Tindakan

### `CreateCluster`

Contoh kode berikut menunjukkan cara menggunakan`CreateCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat cluster.

```
    /**
     * Creates a new Amazon Redshift cluster asynchronously.
     * @param clusterId     the unique identifier for the cluster
```

```
     * @param username      the username for the administrative user
     * @param userPassword  the password for the administrative user
     * @return a CompletableFuture that represents the asynchronous operation of
creating the cluster
     * @throws RuntimeException if the cluster creation fails
     */
    public CompletableFuture<CreateClusterResponse> createClusterAsync(String
clusterId, String username, String userPassword) {
        CreateClusterRequest clusterRequest = CreateClusterRequest.builder()
            .clusterIdentifier(clusterId)
            .masterUsername(username)
            .masterUserPassword(userPassword)
            .nodeType("ra3.4xlarge")
            .publiclyAccessible(true)
            .numberOfNodes(2)
            .build();

        return getAsyncClient().createCluster(clusterRequest)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Created cluster ");
                } else {
                    throw new RuntimeException("Failed to create cluster: " +
exception.getMessage(), exception);
                }
            });
    }
```

- Untuk detail API, lihat CreateClusterdi Referensi AWS SDK for Java 2.x API.

### `DeleteCluster`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus klaster .

```
   /**
    * Deletes a Redshift cluster asynchronously.
    *
    * @param clusterId the identifier of the Redshift cluster to be deleted
    * @return a {@link CompletableFuture} that represents the asynchronous
operation of deleting the Redshift cluster
    */
   public CompletableFuture<DeleteClusterResponse>
deleteRedshiftClusterAsync(String clusterId) {
       DeleteClusterRequest deleteClusterRequest = DeleteClusterRequest.builder()
           .clusterIdentifier(clusterId)
           .skipFinalClusterSnapshot(true)
           .build();

       return getAsyncClient().deleteCluster(deleteClusterRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   // Handle exceptions
                   if (exception.getCause() instanceof RedshiftException) {
                       logger.info("Error: {}", exception.getMessage());
                   } else {
                       logger.info("Unexpected error: {}", exception.getMessage());
                   }
               } else {
                   // Handle successful response
                   logger.info("The status is {}",
response.cluster().clusterStatus());
               }
           });
   }
```

- Untuk detail API, lihat DeleteClusterdi Referensi AWS SDK for Java 2.x API.

### `DescribeClusters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeClusters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jelaskan cluster.

```
    /**
     * Waits asynchronously for the specified cluster to become available.
     * @param clusterId the identifier of the cluster to wait for
     * @return a {@link CompletableFuture} that completes when the cluster is ready
     */
    public CompletableFuture<Void> waitForClusterReadyAsync(String clusterId) {
        DescribeClustersRequest clustersRequest = DescribeClustersRequest.builder()
            .clusterIdentifier(clusterId)
            .build();

        logger.info("Waiting for cluster to become available. This may take a few
minutes.");
        long startTime = System.currentTimeMillis();

        // Recursive method to poll the cluster status.
        return checkClusterStatusAsync(clustersRequest, startTime);
    }

    private CompletableFuture<Void> checkClusterStatusAsync(DescribeClustersRequest
clustersRequest, long startTime) {
        return getAsyncClient().describeClusters(clustersRequest)
            .thenCompose(clusterResponse -> {
                List<Cluster> clusterList = clusterResponse.clusters();
                boolean clusterReady = false;
                for (Cluster cluster : clusterList) {
                    if ("available".equals(cluster.clusterStatus())) {
                        clusterReady = true;
                        break;
                    }
                }

                if (clusterReady) {
                    logger.info(String.format("Cluster is available!"));
```

```
                    return CompletableFuture.completedFuture(null);
                } else {
                    long elapsedTimeMillis = System.currentTimeMillis() - startTime;
                    long elapsedSeconds = elapsedTimeMillis / 1000;
                    long minutes = elapsedSeconds / 60;
                    long seconds = elapsedSeconds % 60;
                    System.out.printf("\rElapsed Time: %02d:%02d - Waiting for
cluster...", minutes, seconds);
                    System.out.flush();

                    // Wait 1 second before the next status check
                    return CompletableFuture.runAsync(() -> {
                        try {
                            TimeUnit.SECONDS.sleep(1);
                        } catch (InterruptedException e) {
                            throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                        }
                    }).thenCompose(ignored ->
checkClusterStatusAsync(clustersRequest, startTime));
                }
            }).exceptionally(exception -> {
                throw new RuntimeException("Failed to get cluster status: " +
exception.getMessage(), exception);
            });
    }
```

- Untuk detail API, lihat DescribeClustersdi Referensi AWS SDK for Java 2.x API.

### `DescribeStatement`

Contoh kode berikut menunjukkan cara menggunakan`DescribeStatement`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Checks the status of an SQL statement asynchronously and handles the
completion of the statement.
    *
    * @param sqlId the ID of the SQL statement to check
    * @return a {@link CompletableFuture} that completes when the SQL statement's
status is either "FINISHED" or "FAILED"
    */
   public CompletableFuture<Void> checkStatementAsync(String sqlId) {
       DescribeStatementRequest statementRequest =
DescribeStatementRequest.builder()
           .id(sqlId)
           .build();

       return getAsyncDataClient().describeStatement(statementRequest)
           .thenCompose(response -> {
               String status = response.statusAsString();
               logger.info("... Status: {} ", status);

               if ("FAILED".equals(status)) {
                   throw new RuntimeException("The Query Failed. Ending program");
               } else if ("FINISHED".equals(status)) {
                   return CompletableFuture.completedFuture(null);
               } else {
                   // Sleep for 1 second and recheck status
                   return CompletableFuture.runAsync(() -> {
                       try {
                           TimeUnit.SECONDS.sleep(1);
                       } catch (InterruptedException e) {
                           throw new RuntimeException("Error during sleep: " +
e.getMessage(), e);
                       }
                   }).thenCompose(ignore -> checkStatementAsync(sqlId)); //
Recursively call until status is FINISHED or FAILED
               }
           }).whenComplete((result, exception) -> {
               if (exception != null) {
                   // Handle exceptions
                   logger.info("Error: {} ", exception.getMessage());
               } else {
                   logger.info("The statement is finished!");
               }
           });
```

```
    }
```

- Untuk detail API, lihat DescribeStatementdi Referensi AWS SDK for Java 2.x API.

### `ExecuteStatement`

Contoh kode berikut menunjukkan cara menggunakan`ExecuteStatement`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mengeksekusi pernyataan SQL untuk membuat tabel database.

```
   /**
    * Creates an asynchronous task to execute a SQL statement for creating a new
table.
    *
    * @param clusterId    the identifier of the Amazon Redshift cluster
    * @param databaseName the name of the database to create the table in
    * @param userName     the username to use for the database connection
    * @return a {@link CompletableFuture} that completes with the result of the SQL
statement execution
    * @throws RuntimeException if there is an error creating the table
    */
   public CompletableFuture<ExecuteStatementResponse> createTableAsync(String
clusterId, String databaseName, String userName) {
       ExecuteStatementRequest createTableRequest =
ExecuteStatementRequest.builder()
           .clusterIdentifier(clusterId)
           .dbUser(userName)
           .database(databaseName)
           .sql("CREATE TABLE Movies (" +
               "id INT PRIMARY KEY, " +
               "title VARCHAR(100), " +
               "year INT)")
           .build();
```

```
       return getAsyncDataClient().executeStatement(createTableRequest)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   throw new RuntimeException("Error creating table: " +
exception.getMessage(), exception);
               } else {
                   logger.info("Table created: Movies");
               }
           });
   }
```

Mengeksekusi pernyataan SQL untuk memasukkan data ke dalam tabel database.

```
   /**
    * Asynchronously pops a table from a JSON file.
    *
    * @param clusterId   the ID of the cluster
    * @param databaseName the name of the database
    * @param userName    the username
    * @param fileName    the name of the JSON file
    * @param number      the number of records to process
    * @return a CompletableFuture that completes with the number of records added
to the Movies table
    */
   public CompletableFuture<Integer> popTableAsync(String clusterId, String
databaseName, String userName, String fileName, int number) {
       return CompletableFuture.supplyAsync(() -> {
               try {
                   JsonParser parser = new JsonFactory().createParser(new
File(fileName));
                   JsonNode rootNode = new ObjectMapper().readTree(parser);
                   Iterator<JsonNode> iter = rootNode.iterator();
                   return iter;
               } catch (IOException e) {
                   throw new RuntimeException("Failed to read or parse JSON file: "
+ e.getMessage(), e);
               }
           }).thenCompose(iter -> processNodesAsync(clusterId, databaseName,
userName, iter, number))
           .whenComplete((result, exception) -> {
               if (exception != null) {
```

```
                    logger.info("Error {} ", exception.getMessage());
                } else {
                    logger.info("{} records were added to the Movies table." ,
result);
                }
            });
    }

    private CompletableFuture<Integer> processNodesAsync(String clusterId, String
databaseName, String userName, Iterator<JsonNode> iter, int number) {
        return CompletableFuture.supplyAsync(() -> {
            int t = 0;
            try {
                while (iter.hasNext()) {
                    if (t == number)
                        break;
                    JsonNode currentNode = iter.next();
                    int year = currentNode.get("year").asInt();
                    String title = currentNode.get("title").asText();

                    // Use SqlParameter to avoid SQL injection.
                    List<SqlParameter> parameterList = new ArrayList<>();
                    String sqlStatement = "INSERT INTO Movies
VALUES( :id , :title, :year);";
                    SqlParameter idParam = SqlParameter.builder()
                        .name("id")
                        .value(String.valueOf(t))
                        .build();

                    SqlParameter titleParam = SqlParameter.builder()
                        .name("title")
                        .value(title)
                        .build();

                    SqlParameter yearParam = SqlParameter.builder()
                        .name("year")
                        .value(String.valueOf(year))
                        .build();
                    parameterList.add(idParam);
                    parameterList.add(titleParam);
                    parameterList.add(yearParam);

                    ExecuteStatementRequest insertStatementRequest =
ExecuteStatementRequest.builder()
```

```
                        .clusterIdentifier(clusterId)
                        .sql(sqlStatement)
                        .database(databaseName)
                        .dbUser(userName)
                        .parameters(parameterList)
                        .build();

                    getAsyncDataClient().executeStatement(insertStatementRequest);
                    logger.info("Inserted: " + title + " (" + year + ")");
                    t++;
                }
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error inserting data: " +
e.getMessage(), e);
            }
            return t;
        });
    }
```

Mengeksekusi pernyataan SQL untuk query tabel database.

```
    /**
     * Asynchronously queries movies by a given year from a Redshift database.
     *
     * @param database    the name of the database to query
     * @param dbUser      the user to connect to the database with
     * @param year        the year to filter the movies by
     * @param clusterId   the identifier of the Redshift cluster to connect to
     * @return a {@link CompletableFuture} containing the response ID of the
executed SQL statement
     */
    public CompletableFuture<String> queryMoviesByYearAsync(String database,
                                                            String dbUser,
                                                            int year,
                                                            String clusterId)
{

        String sqlStatement = "SELECT * FROM Movies WHERE year = :year";
        SqlParameter yearParam = SqlParameter.builder()
            .name("year")
            .value(String.valueOf(year))
            .build();
```

```
        ExecuteStatementRequest statementRequest = ExecuteStatementRequest.builder()
            .clusterIdentifier(clusterId)
            .database(database)
            .dbUser(dbUser)
            .parameters(yearParam)
            .sql(sqlStatement)
            .build();

        return CompletableFuture.supplyAsync(() -> {
            try {
                ExecuteStatementResponse response =
getAsyncDataClient().executeStatement(statementRequest).join(); // Use join() to
wait for the result
                return response.id();
            } catch (RedshiftDataException e) {
                throw new RuntimeException("Error executing statement: " +
e.getMessage(), e);
            }
        }).exceptionally(exception -> {
            logger.info("Error: {}", exception.getMessage());
            return "";
        });
    }
```

- Untuk detail API, lihat ExecuteStatementdi Referensi AWS SDK for Java 2.x API.

### `GetStatementResult`

Contoh kode berikut menunjukkan cara menggunakan`GetStatementResult`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Periksa hasil pernyataan.

```
   /**
    * Asynchronously retrieves the results of a statement execution.
    *
    * @param statementId the ID of the statement for which to retrieve the results
    * @return a {@link CompletableFuture} that completes when the statement result
has been processed
    */
   public CompletableFuture<Void> getResultsAsync(String statementId) {
       GetStatementResultRequest resultRequest =
GetStatementResultRequest.builder()
           .id(statementId)
           .build();

       return getAsyncDataClient().getStatementResult(resultRequest)
           .handle((response, exception) -> {
               if (exception != null) {
                   logger.info("Error getting statement result {} ",
exception.getMessage());
                   throw new RuntimeException("Error getting statement result: " +
exception.getMessage(), exception);
               }

               // Extract and print the field values using streams if the response
is valid.
               response.records().stream()
                   .flatMap(List::stream)
                   .map(Field::stringValue)
                   .filter(value -> value != null)
                   .forEach(value -> System.out.println("The Movie title field is "
+ value));

               return response;
           }).thenAccept(response -> {
               // Optionally add more logic here if needed after handling the
response
           });
   }
```

- Untuk detail API, lihat GetStatementResultdi Referensi AWS SDK for Java 2.x API.

### `ListDatabases`

Contoh kode berikut menunjukkan cara menggunakan`ListDatabases`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Lists all databases asynchronously for the specified cluster, database user,
and database.
    * @param clusterId the identifier of the cluster to list databases for
    * @param dbUser the database user to use for the list databases request
    * @param database the database to list databases for
    * @return a {@link CompletableFuture} that completes when the database listing
is complete, or throws a {@link RuntimeException} if there was an error
    */
   public CompletableFuture<Void> listAllDatabasesAsync(String clusterId, String
dbUser, String database) {
       ListDatabasesRequest databasesRequest = ListDatabasesRequest.builder()
           .clusterIdentifier(clusterId)
           .dbUser(dbUser)
           .database(database)
           .build();

       // Asynchronous paginator for listing databases.
       ListDatabasesPublisher databasesPaginator =
getAsyncDataClient().listDatabasesPaginator(databasesRequest);
       CompletableFuture<Void> future = databasesPaginator.subscribe(response -> {
           response.databases().forEach(db -> {
               logger.info("The database name is {} ", db);
           });
       });

       // Return the future for asynchronous handling.
       return future.exceptionally(exception -> {
           throw new RuntimeException("Failed to list databases: " +
exception.getMessage(), exception);
       });
```

```
    }
```

- Untuk detail API, lihat ListDatabasesdi Referensi AWS SDK for Java 2.x API.

### `ModifyCluster`

Contoh kode berikut menunjukkan cara menggunakan`ModifyCluster`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Memodifikasi cluster.

```
   /**
    * Modifies an Amazon Redshift cluster asynchronously.
    *
    * @param clusterId the identifier of the cluster to be modified
    * @return a {@link CompletableFuture} that completes when the cluster
modification is complete
    */
   public CompletableFuture<ModifyClusterResponse> modifyClusterAsync(String
clusterId) {
       ModifyClusterRequest modifyClusterRequest = ModifyClusterRequest.builder()
           .clusterIdentifier(clusterId)
           .preferredMaintenanceWindow("wed:07:30-wed:08:00")
           .build();

       return getAsyncClient().modifyCluster(modifyClusterRequest)
           .whenComplete((clusterResponse, exception) -> {
               if (exception != null) {
                   if (exception.getCause() instanceof RedshiftException) {
                       logger.info("Error: {} ", exception.getMessage());
                   } else {
                       logger.info("Unexpected error: {} ",
exception.getMessage());
                   }
```

```
                } else {
                    logger.info("The modified cluster was successfully modified and
has "
                        + clusterResponse.cluster().preferredMaintenanceWindow() + "
as the maintenance window");
                }
            });
    }
```

- Untuk detail API, lihat ModifyClusterdi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat aplikasi web untuk melacak data Amazon Redshift

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak dan melaporkan item pekerjaan menggunakan database Amazon Redshift.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan item pekerjaan yang disimpan dalam database Amazon Redshift.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Redshift dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Amazon Redshift
- Amazon SES

# Contoh Amazon Rekognition menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon Rekognition.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


## Tindakan

### `CompareFaces`

Contoh kode berikut menunjukkan cara menggunakan`CompareFaces`.

Untuk informasi selengkapnya, lihat Membandingkan wajah dalam gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
import software.amazon.awssdk.core.SdkBytes;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CompareFaces {
    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <sourceKey> <targetKey>

            Where:
                bucketName - The name of the S3 bucket where the images are stored.
                sourceKey  - The S3 key (file name) for the source image.
                targetKey  - The S3 key (file name) for the target image.
           """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceKey = args[1];
        String targetKey = args[2];

        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();
        compareTwoFaces(rekClient, bucketName, sourceKey, targetKey);
    }

   /**
    * Compares two faces from images stored in an Amazon S3 bucket using AWS
 Rekognition.
    *
    * <p>This method takes two image keys from an S3 bucket and compares the faces
 within them.
    * It prints out the confidence level of matched faces and reports the number of
 unmatched faces.</p>
    *
    * @param rekClient   The {@link RekognitionClient} used to call AWS
 Rekognition.
```

```
    * @param bucketName  The name of the S3 bucket containing the images.
    * @param sourceKey   The object key (file path) for the source image in the S3
bucket.
    * @param targetKey   The object key (file path) for the target image in the S3
bucket.
    * @throws RuntimeException If the Rekognition service returns an error.
    */
   public static void compareTwoFaces(RekognitionClient rekClient, String
bucketName, String sourceKey, String targetKey) {
       try {
           Float similarityThreshold = 70F;
           S3Object s3ObjectSource = S3Object.builder()
                   .bucket(bucketName)
                   .name(sourceKey)
                   .build();

           Image sourceImage = Image.builder()
                   .s3Object(s3ObjectSource)
                   .build();

           S3Object s3ObjectTarget = S3Object.builder()
                   .bucket(bucketName)
                   .name(targetKey)
                   .build();

           Image targetImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           CompareFacesRequest facesRequest = CompareFacesRequest.builder()
                   .sourceImage(sourceImage)
                   .targetImage(targetImage)
                   .similarityThreshold(similarityThreshold)
                   .build();

           // Compare the two images.
           CompareFacesResponse compareFacesResult =
rekClient.compareFaces(facesRequest);
           List<CompareFacesMatch> faceDetails = compareFacesResult.faceMatches();

           for (CompareFacesMatch match : faceDetails) {
               ComparedFace face = match.face();
               BoundingBox position = face.boundingBox();
               System.out.println("Face at " + position.left().toString()
```

```
                        + " " + position.top()
                        + " matches with " + face.confidence().toString()
                        + "% confidence.");
            }

            List<ComparedFace> unmatchedFaces = compareFacesResult.unmatchedFaces();
            System.out.println("There were " + unmatchedFaces.size() + " face(s)
 that did not match.");

        } catch (RekognitionException e) {
            System.err.println("Error comparing faces: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Untuk detail API, lihat CompareFacesdi Referensi AWS SDK for Java 2.x API.

### `CreateCollection`

Contoh kode berikut menunjukkan cara menggunakan`CreateCollection`.

Untuk informasi selengkapnya, lihat Membuat koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.CreateCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.CreateCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateCollection {
    public static void main(String[] args) {
        final String usage = """

            Usage: <collectionName>\s

            Where:
                collectionName - The name of the collection.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Creating collection: " + collectionId);
        createMyCollection(rekClient, collectionId);
        rekClient.close();
    }

    /**
     * Creates a new Amazon Rekognition collection.
     *
     * @param rekClient    the Amazon Rekognition client used to interact with the
 Rekognition service
     * @param collectionId the unique identifier for the collection to be created
     */
    public static void createMyCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            CreateCollectionRequest collectionRequest =
 CreateCollectionRequest.builder()
```

```
                    .collectionId(collectionId)
                    .build();

            CreateCollectionResponse collectionResponse =
 rekClient.createCollection(collectionRequest);
            System.out.println("CollectionArn: " +
 collectionResponse.collectionArn());
            System.out.println("Status code: " +
 collectionResponse.statusCode().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateCollectiondi Referensi AWS SDK for Java 2.x API.

### `DeleteCollection`

Contoh kode berikut menunjukkan cara menggunakan`DeleteCollection`.

Untuk informasi selengkapnya, lihat Menghapus koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DeleteCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.DeleteCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId>\s

            Where:
                collectionId - The id of the collection to delete.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Deleting collection: " + collectionId);
        deleteMyCollection(rekClient, collectionId);
        rekClient.close();
    }

    /**
     * Deletes an Amazon Rekognition collection.
     *
     * @param rekClient      An instance of the {@link RekognitionClient} class,
 which is used to interact with the Amazon Rekognition service.
     * @param collectionId   The ID of the collection to be deleted.
     */
    public static void deleteMyCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            DeleteCollectionRequest deleteCollectionRequest =
 DeleteCollectionRequest.builder()
                    .collectionId(collectionId)
```

```
                    .build();

            DeleteCollectionResponse deleteCollectionResponse =
 rekClient.deleteCollection(deleteCollectionRequest);
            System.out.println(collectionId + ": " +
 deleteCollectionResponse.statusCode().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteCollectiondi Referensi AWS SDK for Java 2.x API.

### `DeleteFaces`

Contoh kode berikut menunjukkan cara menggunakan`DeleteFaces`.

Untuk informasi selengkapnya, lihat Menghapus wajah dari koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DeleteFacesRequest;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteFacesFromCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId> <faceId>\s

            Where:
                collectionId - The id of the collection from which faces are
 deleted.\s
                faceId - The id of the face to delete.\s
           """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String faceId = args[1];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Deleting collection: " + collectionId);
        deleteFacesCollection(rekClient, collectionId, faceId);
        rekClient.close();
    }

    /**
     * Deletes a face from the specified Amazon Rekognition collection.
     *
     * @param rekClient     an instance of the Amazon Rekognition client
     * @param collectionId  the ID of the collection from which the face should be
 deleted
     * @param faceId        the ID of the face to be deleted
     * @throws RekognitionException if an error occurs while deleting the face
     */
    public static void deleteFacesCollection(RekognitionClient rekClient,
            String collectionId,
            String faceId) {

        try {
```

```
            DeleteFacesRequest deleteFacesRequest = DeleteFacesRequest.builder()
                    .collectionId(collectionId)
                    .faceIds(faceId)
                    .build();

            rekClient.deleteFaces(deleteFacesRequest);
            System.out.println("The face was deleted from the collection.");

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteFacesdi Referensi AWS SDK for Java 2.x API.

### `DescribeCollection`

Contoh kode berikut menunjukkan cara menggunakan`DescribeCollection`.

Untuk informasi selengkapnya, lihat Menjelaskan koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.DescribeCollectionRequest;
import software.amazon.awssdk.services.rekognition.model.DescribeCollectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DescribeCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage:    <collectionName>

            Where:
                collectionName - The name of the Amazon Rekognition collection.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionName = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        describeColl(rekClient, collectionName);
        rekClient.close();
    }

    /**
     * Describes an Amazon Rekognition collection.
     *
     * @param rekClient         The Amazon Rekognition client used to make the
 request.
     * @param collectionName    The name of the collection to describe.
     *
     * @throws RekognitionException If an error occurs while describing the
 collection.
     */
    public static void describeColl(RekognitionClient rekClient, String
 collectionName) {
        try {
            DescribeCollectionRequest describeCollectionRequest =
 DescribeCollectionRequest.builder()
                    .collectionId(collectionName)
```

```
                    .build();

            DescribeCollectionResponse describeCollectionResponse = rekClient
                    .describeCollection(describeCollectionRequest);
            System.out.println("Collection Arn : " +
 describeCollectionResponse.collectionARN());
            System.out.println("Created : " +
 describeCollectionResponse.creationTimestamp().toString());

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeCollectiondi Referensi AWS SDK for Java 2.x API.

### `DetectFaces`

Contoh kode berikut menunjukkan cara menggunakan`DetectFaces`.

Untuk informasi selengkapnya, lihat Mendeteksi wajah dalam gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectFaces {
    public static void main(String[] args) {
        final String usage = """

            Usage:   <bucketName> <sourceImage>

            Where:
                bucketName = The name of the Amazon S3 bucket where the source image
 is stored.
                sourceImage - The name of the source image file in the Amazon S3
 bucket. (for example, pic1.png).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectFacesinImage(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects faces in an image stored in an Amazon S3 bucket using the Amazon
 Rekognition service.
     *
     * @param rekClient    The Amazon Rekognition client used to interact with the
 Rekognition service.
     * @param bucketName   The name of the Amazon S3 bucket where the source image
 is stored.
```

```
     * @param sourceImage  The name of the source image file in the Amazon S3
 bucket.
     */
    public static void detectFacesinImage(RekognitionClient rekClient, String
 bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                .bucket(bucketName)
                .name(sourceImage)
                .build();

            Image targetImage = Image.builder()
                .s3Object(s3ObjectTarget)
                .build();

            DetectFacesRequest facesRequest = DetectFacesRequest.builder()
                .attributes(Attribute.ALL)
                .image(targetImage)
                .build();

            DetectFacesResponse facesResponse = rekClient.detectFaces(facesRequest);
            List<FaceDetail> faceDetails = facesResponse.faceDetails();
            for (FaceDetail face : faceDetails) {
                AgeRange ageRange = face.ageRange();
                System.out.println("The detected face is estimated to be between "
                        + ageRange.low().toString() + " and " +
 ageRange.high().toString()
                        + " years old.");

                System.out.println("There is a smile : " +
 face.smile().value().toString());
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectFacesdi Referensi AWS SDK for Java 2.x API.

### `DetectLabels`

Contoh kode berikut menunjukkan cara menggunakan`DetectLabels`.

Untuk informasi selengkapnya, lihat Mendeteksi label dalam gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectLabels {
    public static void main(String[] args) {
        final String usage = """
            Usage: <bucketName> <sourceImage>

            Where:
                bucketName - The name of the Amazon S3 bucket where the image is
 stored
                sourceImage - The name of the image file (for example, pic1.png).\s
            """;
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0] ;
        String sourceImage = args[1] ;
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectImageLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects the labels in an image stored in an Amazon S3 bucket using the Amazon
Rekognition service.
     *
     * @param rekClient     the Amazon Rekognition client used to make the detection
request
     * @param bucketName    the name of the Amazon S3 bucket where the image is
stored
     * @param sourceImage   the name of the image file to be analyzed
     */
    public static void detectImageLabels(RekognitionClient rekClient, String
bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                    .bucket(bucketName)
                    .name(sourceImage)
                    .build();

            Image souImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();

            DetectLabelsRequest detectLabelsRequest = DetectLabelsRequest.builder()
                    .image(souImage)
                    .maxLabels(10)
                    .build();
```

```
            DetectLabelsResponse labelsResponse =
 rekClient.detectLabels(detectLabelsRequest);
            List<Label> labels = labelsResponse.labels();
            System.out.println("Detected labels for the given photo");
            for (Label label : labels) {
                System.out.println(label.name() + ": " +
 label.confidence().toString());
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectLabelsdi Referensi AWS SDK for Java 2.x API.

### `DetectModerationLabels`

Contoh kode berikut menunjukkan cara menggunakan`DetectModerationLabels`.

Untuk informasi selengkapnya, lihat Mendeteksi gambar yang tidak pantas.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectModerationLabels {

    public static void main(String[] args) {
        final String usage = """
            Usage:  <bucketName>  <sourceImage>

            Where:
                bucketName - The name of the S3 bucket where the images are stored.
                sourceImage - The name of the image (for example, pic1.png).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectModLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects moderation labels in an image stored in an Amazon S3 bucket.
     *
     * @param rekClient      the Amazon Rekognition client to use for the detection
     * @param bucketName     the name of the Amazon S3 bucket where the image is
 stored
     * @param sourceImage    the name of the image file to be analyzed
     *
```

```
     * @throws RekognitionException if there is an error during the image detection
 process
     */
    public static void detectModLabels(RekognitionClient rekClient, String
 bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                    .bucket(bucketName)
                    .name(sourceImage)
                    .build();

            Image targetImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();

            DetectModerationLabelsRequest moderationLabelsRequest =
 DetectModerationLabelsRequest.builder()
                    .image(targetImage)
                    .minConfidence(60F)
                    .build();

            DetectModerationLabelsResponse moderationLabelsResponse = rekClient
                    .detectModerationLabels(moderationLabelsRequest);
            List<ModerationLabel> labels =
 moderationLabelsResponse.moderationLabels();
            System.out.println("Detected labels for image");
            for (ModerationLabel label : labels) {
                System.out.println("Label: " + label.name()
                        + "\n Confidence: " + label.confidence().toString() + "%"
                        + "\n Parent:" + label.parentName());
            }

        } catch (RekognitionException e) {
            e.printStackTrace();
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectModerationLabelsdi Referensi AWS SDK for Java 2.x API.

### `DetectText`

Contoh kode berikut menunjukkan cara menggunakan`DetectText`.

Untuk informasi selengkapnya, lihat Mendeteksi teks dalam gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectText {
    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:   <bucketName> <sourceImage>\n" +
            "\n" +
            "Where:\n" +
            "   bucketName - The name of the S3 bucket where the image is stored\n"
 +
            "   sourceImage - The path to the image that contains text (for example,
 pic1.png). \n";
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String sourceImage = args[1];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        detectTextLabels(rekClient, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Detects text labels in an image stored in an S3 bucket using Amazon
Rekognition.
     *
     * @param rekClient    an instance of the Amazon Rekognition client
     * @param bucketName   the name of the S3 bucket where the image is stored
     * @param sourceImage  the name of the image file in the S3 bucket
     * @throws RekognitionException if an error occurs while calling the Amazon
Rekognition API
     */
    public static void detectTextLabels(RekognitionClient rekClient, String
bucketName, String sourceImage) {
        try {
            S3Object s3ObjectTarget = S3Object.builder()
                    .bucket(bucketName)
                    .name(sourceImage)
                    .build();

            Image souImage = Image.builder()
                    .s3Object(s3ObjectTarget)
                    .build();

            DetectTextRequest textRequest = DetectTextRequest.builder()
                    .image(souImage)
                    .build();

            DetectTextResponse textResponse = rekClient.detectText(textRequest);
            List<TextDetection> textCollection = textResponse.textDetections();
```

```
            System.out.println("Detected lines and words");
            for (TextDetection text : textCollection) {
                System.out.println("Detected: " + text.detectedText());
                System.out.println("Confidence: " + text.confidence().toString());
                System.out.println("Id : " + text.id());
                System.out.println("Parent Id: " + text.parentId());
                System.out.println("Type: " + text.type());
                System.out.println();
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectTextdi Referensi AWS SDK for Java 2.x API.

### `IndexFaces`

Contoh kode berikut menunjukkan cara menggunakan`IndexFaces`.

Untuk informasi selengkapnya, lihat Menambahkan wajah ke koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.*;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddFacesToCollection {
    public static void main(String[] args) {
        final String usage = """
            Usage: <collectionId> <sourceImage> <bucketName>

            Where:
                collectionName - The name of the collection.
                sourceImage - The name of the image (for example, pic1.png).
                bucketName - The name of the S3 bucket.
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String sourceImage = args[1];
        String bucketName = args[2];;
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        addToCollection(rekClient, collectionId, bucketName, sourceImage);
        rekClient.close();
    }

    /**
     * Adds a face from an image to an Amazon Rekognition collection.
     *
     * @param rekClient     the Amazon Rekognition client
     * @param collectionId  the ID of the collection to add the face to
     * @param bucketName    the name of the Amazon S3 bucket containing the image
     * @param sourceImage   the name of the image file to add to the collection
     * @throws RekognitionException if there is an error while interacting with the
 Amazon Rekognition service
     */
```

```
   public static void addToCollection(RekognitionClient rekClient, String
collectionId, String bucketName, String sourceImage) {
       try {
           S3Object s3ObjectTarget = S3Object.builder()
                   .bucket(bucketName)
                   .name(sourceImage)
                   .build();

           Image targetImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           IndexFacesRequest facesRequest = IndexFacesRequest.builder()
                   .collectionId(collectionId)
                   .image(targetImage)
                   .maxFaces(1)
                   .qualityFilter(QualityFilter.AUTO)
                   .detectionAttributes(Attribute.DEFAULT)
                   .build();

           IndexFacesResponse facesResponse = rekClient.indexFaces(facesRequest);
           System.out.println("Results for the image");
           System.out.println("\n Faces indexed:");
           List<FaceRecord> faceRecords = facesResponse.faceRecords();
           for (FaceRecord faceRecord : faceRecords) {
               System.out.println("  Face ID: " + faceRecord.face().faceId());
               System.out.println("  Location:" +
faceRecord.faceDetail().boundingBox().toString());
           }

           List<UnindexedFace> unindexedFaces = facesResponse.unindexedFaces();
           System.out.println("Faces not indexed:");
           for (UnindexedFace unindexedFace : unindexedFaces) {
               System.out.println("  Location:" +
unindexedFace.faceDetail().boundingBox().toString());
               System.out.println("  Reasons:");
               for (Reason reason : unindexedFace.reasons()) {
                   System.out.println("Reason:  " + reason);
               }
           }

       } catch (RekognitionException e) {
           System.out.println(e.getMessage());
           System.exit(1);
```

```
        }
    }
}
```

- Untuk detail API, lihat IndexFacesdi Referensi AWS SDK for Java 2.x API.

### `ListCollections`

Contoh kode berikut menunjukkan cara menggunakan`ListCollections`.

Untuk informasi selengkapnya, lihat Daftar koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.ListCollectionsRequest;
import software.amazon.awssdk.services.rekognition.model.ListCollectionsResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListCollections {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();
```

```
        System.out.println("Listing collections");
        listAllCollections(rekClient);
        rekClient.close();
    }

    public static void listAllCollections(RekognitionClient rekClient) {
        try {
            ListCollectionsRequest listCollectionsRequest =
 ListCollectionsRequest.builder()
                    .maxResults(10)
                    .build();

            ListCollectionsResponse response =
 rekClient.listCollections(listCollectionsRequest);
            List<String> collectionIds = response.collectionIds();
            for (String resultId : collectionIds) {
                System.out.println(resultId);
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListCollectionsdi Referensi AWS SDK for Java 2.x API.

### `ListFaces`

Contoh kode berikut menunjukkan cara menggunakan`ListFaces`.

Untuk informasi selengkapnya, lihat Daftar wajah dalam koleksi.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.Face;
import software.amazon.awssdk.services.rekognition.model.ListFacesRequest;
import software.amazon.awssdk.services.rekognition.model.ListFacesResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListFacesInCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId>

                Where:
                   collectionId - The name of the collection.\s
                """;

        if (args.length < 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Faces in collection " + collectionId);
        listFacesCollection(rekClient, collectionId);
        rekClient.close();
    }
```

```
    public static void listFacesCollection(RekognitionClient rekClient, String
 collectionId) {
        try {
            ListFacesRequest facesRequest = ListFacesRequest.builder()
                    .collectionId(collectionId)
                    .maxResults(10)
                    .build();

            ListFacesResponse facesResponse = rekClient.listFaces(facesRequest);
            List<Face> faces = facesResponse.faces();
            for (Face face : faces) {
                System.out.println("Confidence level there is a face: " +
 face.confidence());
                System.out.println("The face Id value is " + face.faceId());
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListFacesdi Referensi AWS SDK for Java 2.x API.

### `RecognizeCelebrities`

Contoh kode berikut menunjukkan cara menggunakan`RecognizeCelebrities`.

Untuk informasi selengkapnya, lihat Mengenali selebriti dalam sebuah gambar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
```

```
import software.amazon.awssdk.core.SdkBytes;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

import software.amazon.awssdk.services.rekognition.model.*;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RecognizeCelebrities {
    public static void main(String[] args) {
        final String usage = """
                Usage:   <bucketName> <sourceImage>

                Where:
                   bucketName - The name of the S3 bucket where the images are
 stored.
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
       }

        String bucketName = args[0];;
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Locating celebrities in " + sourceImage);
        recognizeAllCelebrities(rekClient, bucketName, sourceImage);
        rekClient.close();
    }
```

```
   /**
    * Recognizes all celebrities in an image stored in an Amazon S3 bucket.
    *
    * @param rekClient    the Amazon Rekognition client used to perform the
celebrity recognition operation
    * @param bucketName   the name of the Amazon S3 bucket where the source image
is stored
    * @param sourceImage  the name of the source image file stored in the Amazon S3
bucket
    */
   public static void recognizeAllCelebrities(RekognitionClient rekClient, String
bucketName, String sourceImage) {
       try {
           S3Object s3ObjectTarget = S3Object.builder()
               .bucket(bucketName)
               .name(sourceImage)
               .build();

           Image souImage = Image.builder()
                   .s3Object(s3ObjectTarget)
                   .build();

           RecognizeCelebritiesRequest request =
RecognizeCelebritiesRequest.builder()
                   .image(souImage)
                   .build();

           RecognizeCelebritiesResponse result =
rekClient.recognizeCelebrities(request);
           List<Celebrity> celebs = result.celebrityFaces();
           System.out.println(celebs.size() + " celebrity(s) were recognized.\n");
           for (Celebrity celebrity : celebs) {
               System.out.println("Celebrity recognized: " + celebrity.name());
               System.out.println("Celebrity ID: " + celebrity.id());

               System.out.println("Further information (if available):");
               for (String url : celebrity.urls()) {
                   System.out.println(url);
               }
               System.out.println();
           }
           System.out.println(result.unrecognizedFaces().size() + " face(s) were
unrecognized.");
```

```
        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat RecognizeCelebritiesdi Referensi AWS SDK for Java 2.x API.

### `SearchFaces`

Contoh kode berikut menunjukkan cara menggunakan`SearchFaces`.

Untuk informasi selengkapnya, lihat Mencari wajah (ID wajah).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.SearchFacesByImageRequest;
import software.amazon.awssdk.services.rekognition.model.Image;
import software.amazon.awssdk.services.rekognition.model.SearchFacesByImageResponse;
import software.amazon.awssdk.services.rekognition.model.FaceMatch;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SearchFaceMatchingImageCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId> <sourceImage>

                Where:
                   collectionId - The id of the collection. \s
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s

                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String sourceImage = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Searching for a face in a collections");
        searchFaceInCollection(rekClient, collectionId, sourceImage);
        rekClient.close();
    }

    public static void searchFaceInCollection(RekognitionClient rekClient, String
 collectionId, String sourceImage) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceImage));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);
            Image souImage = Image.builder()
                    .bytes(sourceBytes)
                    .build();
```

```
            SearchFacesByImageRequest facesByImageRequest =
 SearchFacesByImageRequest.builder()
                    .image(souImage)
                    .maxFaces(10)
                    .faceMatchThreshold(70F)
                    .collectionId(collectionId)
                    .build();

            SearchFacesByImageResponse imageResponse =
 rekClient.searchFacesByImage(facesByImageRequest);
            System.out.println("Faces matching in the collection");
            List<FaceMatch> faceImageMatches = imageResponse.faceMatches();
            for (FaceMatch face : faceImageMatches) {
                System.out.println("The similarity level is  " + face.similarity());
                System.out.println();
            }

        } catch (RekognitionException | FileNotFoundException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SearchFacesdi Referensi AWS SDK for Java 2.x API.

### `SearchFacesByImage`

Contoh kode berikut menunjukkan cara menggunakan`SearchFacesByImage`.

Untuk informasi selengkapnya, lihat Mencari wajah (gambar).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.SearchFacesRequest;
import software.amazon.awssdk.services.rekognition.model.SearchFacesResponse;
import software.amazon.awssdk.services.rekognition.model.FaceMatch;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SearchFaceMatchingIdCollection {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <collectionId> <sourceImage>

                Where:
                   collectionId - The id of the collection. \s
                   sourceImage - The path to the image (for example, C:\\AWS\
\pic1.png).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String collectionId = args[0];
        String faceId = args[1];
        Region region = Region.US_WEST_2;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        System.out.println("Searching for a face in a collections");
        searchFacebyId(rekClient, collectionId, faceId);
        rekClient.close();
    }
```

```
    public static void searchFacebyId(RekognitionClient rekClient, String
 collectionId, String faceId) {
        try {
            SearchFacesRequest searchFacesRequest = SearchFacesRequest.builder()
                    .collectionId(collectionId)
                    .faceId(faceId)
                    .faceMatchThreshold(70F)
                    .maxFaces(2)
                    .build();

            SearchFacesResponse imageResponse =
 rekClient.searchFaces(searchFacesRequest);
            System.out.println("Faces matching in the collection");
            List<FaceMatch> faceImageMatches = imageResponse.faceMatches();
            for (FaceMatch face : faceImageMatches) {
                System.out.println("The similarity level is  " + face.similarity());
                System.out.println();
            }

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SearchFacesByImagedi Referensi AWS SDK for Java 2.x API.

## Skenario

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

> Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

### Mendeteksi APD dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi Alat Pelindung Diri (APD) dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi yang mendeteksi gambar dengan Alat Pelindung Diri.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

### Mendeteksi informasi dalam video

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Mulai pekerjaan Amazon Rekognition untuk mendeteksi elemen seperti orang, objek, dan teks dalam video.

- Periksa status pekerjaan sampai pekerjaan selesai.
- Output daftar elemen yang terdeteksi oleh setiap pekerjaan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan hasil selebriti dari video yang terletak di ember Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartCelebrityRecognitionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.CelebrityRecognitionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.CelebrityRecognition;
import software.amazon.awssdk.services.rekognition.model.CelebrityDetail;
import
 software.amazon.awssdk.services.rekognition.model.StartCelebrityRecognitionRequest;
import
 software.amazon.awssdk.services.rekognition.model.GetCelebrityRecognitionRequest;
import
 software.amazon.awssdk.services.rekognition.model.GetCelebrityRecognitionResponse;
import java.util.List;

/**
 * To run this code example, ensure that you perform the Prerequisites as stated
 * in the Amazon Rekognition Guide:
 * https://docs.aws.amazon.com/rekognition/latest/dg/video-analyzing-with-sqs.html
 *
 * Also, ensure that set up your development environment, including your
 * credentials.
 *
```

```
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class VideoCelebrityDetection {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startCelebrityDetection(rekClient, channel, bucket, video);
        getCelebrityDetectionResults(rekClient);
```

```
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startCelebrityDetection(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartCelebrityRecognitionRequest recognitionRequest =
StartCelebrityRecognitionRequest.builder()
                    .jobTag("Celebrities")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();

            StartCelebrityRecognitionResponse startCelebrityRecognitionResult =
rekClient
                    .startCelebrityRecognition(recognitionRequest);
            startJobId = startCelebrityRecognitionResult.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getCelebrityDetectionResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetCelebrityRecognitionResponse recognitionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;
```

```
            do {
                if (recognitionResponse != null)
                    paginationToken = recognitionResponse.nextToken();

                GetCelebrityRecognitionRequest recognitionRequest =
GetCelebrityRecognitionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .sortBy(CelebrityRecognitionSortBy.TIMESTAMP)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds
                while (!finished) {
                    recognitionResponse =
rekClient.getCelebrityRecognition(recognitionRequest);
                    status = recognitionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = recognitionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<CelebrityRecognition> celebs =
recognitionResponse.celebrities();
                for (CelebrityRecognition celeb : celebs) {
                    long seconds = celeb.timestamp() / 1000;
                    System.out.print("Sec: " + seconds + " ");
                    CelebrityDetail details = celeb.celebrity();
                    System.out.println("Name: " + details.name());
```

```
                    System.out.println("Id: " + details.id());
                    System.out.println();
                }

            } while (recognitionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Mendeteksi label dalam video dengan operasi deteksi label.

```
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonMappingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import
 software.amazon.awssdk.services.rekognition.model.StartLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.LabelDetectionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.LabelDetection;
import software.amazon.awssdk.services.rekognition.model.Label;
import software.amazon.awssdk.services.rekognition.model.Instance;
import software.amazon.awssdk.services.rekognition.model.Parent;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetect {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <queueUrl> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of the video (for example, people.mp4).\s
                   queueUrl- The URL of a SQS queue.\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;

        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String queueUrl = args[2];
        String topicArn = args[3];
        String roleArn = args[4];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        SqsClient sqs = SqsClient.builder()
                .region(Region.US_EAST_1)
```

```
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startLabels(rekClient, channel, bucket, video);
        getLabelJob(rekClient, sqs, queueUrl);
        System.out.println("This example is done!");
        sqs.close();
        rekClient.close();
    }

    public static void startLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartLabelDetectionRequest labelDetectionRequest =
StartLabelDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .minConfidence(50F)
                    .build();

            StartLabelDetectionResponse labelDetectionResponse =
rekClient.startLabelDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

            boolean ans = true;
            String status = "";
            int yy = 0;
            while (ans) {
```

```
                GetLabelDetectionRequest detectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .maxResults(10)
                        .build();

                GetLabelDetectionResponse result =
rekClient.getLabelDetection(detectionRequest);
                status = result.jobStatusAsString();

                if (status.compareTo("SUCCEEDED") == 0)
                    ans = false;
                else
                    System.out.println(yy + " status is: " + status);

                Thread.sleep(1000);
                yy++;
            }

            System.out.println(startJobId + " status is: " + status);

        } catch (RekognitionException | InterruptedException e) {
            e.getMessage();
            System.exit(1);
        }
    }

    public static void getLabelJob(RekognitionClient rekClient, SqsClient sqs,
String queueUrl) {
        List<Message> messages;
        ReceiveMessageRequest messageRequest = ReceiveMessageRequest.builder()
                .queueUrl(queueUrl)
                .build();

        try {
            messages = sqs.receiveMessage(messageRequest).messages();

            if (!messages.isEmpty()) {
                for (Message message : messages) {
                    String notification = message.body();

                    // Get the status and job id from the notification
                    ObjectMapper mapper = new ObjectMapper();
```

```
                    JsonNode jsonMessageTree = mapper.readTree(notification);
                    JsonNode messageBodyText = jsonMessageTree.get("Message");
                    ObjectMapper operationResultMapper = new ObjectMapper();
                    JsonNode jsonResultTree =
operationResultMapper.readTree(messageBodyText.textValue());
                    JsonNode operationJobId = jsonResultTree.get("JobId");
                    JsonNode operationStatus = jsonResultTree.get("Status");
                    System.out.println("Job found in JSON is " + operationJobId);

                    DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                            .queueUrl(queueUrl)
                            .build();

                    String jobId = operationJobId.textValue();
                    if (startJobId.compareTo(jobId) == 0) {
                        System.out.println("Job id: " + operationJobId);
                        System.out.println("Status : " +
operationStatus.toString());

                        if (operationStatus.asText().equals("SUCCEEDED"))
                            getResultsLabels(rekClient);
                        else
                            System.out.println("Video analysis failed");

                        sqs.deleteMessage(deleteMessageRequest);
                    } else {
                        System.out.println("Job received was not job " +
startJobId);
                        sqs.deleteMessage(deleteMessageRequest);
                    }
                }
            }

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        } catch (JsonMappingException e) {
            e.printStackTrace();
        } catch (JsonProcessingException e) {
            e.printStackTrace();
        }
    }
```

```
   // Gets the job results by calling GetLabelDetection
   private static void getResultsLabels(RekognitionClient rekClient) {

       int maxResults = 10;
       String paginationToken = null;
       GetLabelDetectionResponse labelDetectionResult = null;

       try {
           do {
               if (labelDetectionResult != null)
                   paginationToken = labelDetectionResult.nextToken();

               GetLabelDetectionRequest labelDetectionRequest =
GetLabelDetectionRequest.builder()
                       .jobId(startJobId)
                       .sortBy(LabelDetectionSortBy.TIMESTAMP)
                       .maxResults(maxResults)
                       .nextToken(paginationToken)
                       .build();

               labelDetectionResult =
rekClient.getLabelDetection(labelDetectionRequest);
               VideoMetadata videoMetaData = labelDetectionResult.videoMetadata();
               System.out.println("Format: " + videoMetaData.format());
               System.out.println("Codec: " + videoMetaData.codec());
               System.out.println("Duration: " + videoMetaData.durationMillis());
               System.out.println("FrameRate: " + videoMetaData.frameRate());

               List<LabelDetection> detectedLabels = labelDetectionResult.labels();
               for (LabelDetection detectedLabel : detectedLabels) {
                   long seconds = detectedLabel.timestamp();
                   Label label = detectedLabel.label();
                   System.out.println("Millisecond: " + seconds + " ");

                   System.out.println("   Label:" + label.name());
                   System.out.println("   Confidence:" +
detectedLabel.label().confidence().toString());

                   List<Instance> instances = label.instances();
                   System.out.println("   Instances of " + label.name());

                   if (instances.isEmpty()) {
                       System.out.println("        " + "None");
                   } else {
```

```
                        for (Instance instance : instances) {
                            System.out.println("        Confidence: " +
 instance.confidence().toString());
                            System.out.println("        Bounding box: " +
 instance.boundingBox().toString());
                        }
                    }
                    System.out.println("   Parent labels for " + label.name() +
 ":");
                    List<Parent> parents = label.parents();

                    if (parents.isEmpty()) {
                        System.out.println("        None");
                    } else {
                        for (Parent parent : parents) {
                            System.out.println("   " + parent.name());
                        }
                    }
                    System.out.println();
                }
            } while (labelDetectionResult != null &&
 labelDetectionResult.nextToken() != null);

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        }
    }
}
```

Mendeteksi wajah dalam video yang disimpan dalam bucket Amazon S3.

```
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonMappingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import
 software.amazon.awssdk.services.rekognition.model.StartLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
```

```
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.GetLabelDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.LabelDetectionSortBy;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.LabelDetection;
import software.amazon.awssdk.services.rekognition.model.Label;
import software.amazon.awssdk.services.rekognition.model.Instance;
import software.amazon.awssdk.services.rekognition.model.Parent;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetect {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <queueUrl> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of the video (for example, people.mp4).\s
                   queueUrl- The URL of a SQS queue.\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
 role to use.\s
                """;
```

```
        if (args.length != 5) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String queueUrl = args[2];
        String topicArn = args[3];
        String roleArn = args[4];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        SqsClient sqs = SqsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startLabels(rekClient, channel, bucket, video);
        getLabelJob(rekClient, sqs, queueUrl);
        System.out.println("This example is done!");
        sqs.close();
        rekClient.close();
    }

    public static void startLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();
```

```
            StartLabelDetectionRequest labelDetectionRequest =
StartLabelDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .minConfidence(50F)
                    .build();

            StartLabelDetectionResponse labelDetectionResponse =
rekClient.startLabelDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

            boolean ans = true;
            String status = "";
            int yy = 0;
            while (ans) {

                GetLabelDetectionRequest detectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .maxResults(10)
                        .build();

                GetLabelDetectionResponse result =
rekClient.getLabelDetection(detectionRequest);
                status = result.jobStatusAsString();

                if (status.compareTo("SUCCEEDED") == 0)
                    ans = false;
                else
                    System.out.println(yy + " status is: " + status);

                Thread.sleep(1000);
                yy++;
            }

            System.out.println(startJobId + " status is: " + status);

        } catch (RekognitionException | InterruptedException e) {
            e.getMessage();
            System.exit(1);
        }
    }
```

```
   public static void getLabelJob(RekognitionClient rekClient, SqsClient sqs,
String queueUrl) {
       List<Message> messages;
       ReceiveMessageRequest messageRequest = ReceiveMessageRequest.builder()
               .queueUrl(queueUrl)
               .build();

       try {
           messages = sqs.receiveMessage(messageRequest).messages();

           if (!messages.isEmpty()) {
               for (Message message : messages) {
                   String notification = message.body();

                   // Get the status and job id from the notification
                   ObjectMapper mapper = new ObjectMapper();
                   JsonNode jsonMessageTree = mapper.readTree(notification);
                   JsonNode messageBodyText = jsonMessageTree.get("Message");
                   ObjectMapper operationResultMapper = new ObjectMapper();
                   JsonNode jsonResultTree =
operationResultMapper.readTree(messageBodyText.textValue());
                   JsonNode operationJobId = jsonResultTree.get("JobId");
                   JsonNode operationStatus = jsonResultTree.get("Status");
                   System.out.println("Job found in JSON is " + operationJobId);

                   DeleteMessageRequest deleteMessageRequest =
DeleteMessageRequest.builder()
                           .queueUrl(queueUrl)
                           .build();

                   String jobId = operationJobId.textValue();
                   if (startJobId.compareTo(jobId) == 0) {
                       System.out.println("Job id: " + operationJobId);
                       System.out.println("Status : " +
operationStatus.toString());

                       if (operationStatus.asText().equals("SUCCEEDED"))
                           getResultsLabels(rekClient);
                       else
                           System.out.println("Video analysis failed");

                       sqs.deleteMessage(deleteMessageRequest);
                   } else {
```

```
                        System.out.println("Job received was not job " +
startJobId);
                        sqs.deleteMessage(deleteMessageRequest);
                    }
                }
            }

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        } catch (JsonMappingException e) {
            e.printStackTrace();
        } catch (JsonProcessingException e) {
            e.printStackTrace();
        }
    }

    // Gets the job results by calling GetLabelDetection
    private static void getResultsLabels(RekognitionClient rekClient) {

        int maxResults = 10;
        String paginationToken = null;
        GetLabelDetectionResponse labelDetectionResult = null;

        try {
            do {
                if (labelDetectionResult != null)
                    paginationToken = labelDetectionResult.nextToken();

                GetLabelDetectionRequest labelDetectionRequest =
GetLabelDetectionRequest.builder()
                        .jobId(startJobId)
                        .sortBy(LabelDetectionSortBy.TIMESTAMP)
                        .maxResults(maxResults)
                        .nextToken(paginationToken)
                        .build();

                labelDetectionResult =
rekClient.getLabelDetection(labelDetectionRequest);
                VideoMetadata videoMetaData = labelDetectionResult.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
```

```
                List<LabelDetection> detectedLabels = labelDetectionResult.labels();
                for (LabelDetection detectedLabel : detectedLabels) {
                    long seconds = detectedLabel.timestamp();
                    Label label = detectedLabel.label();
                    System.out.println("Millisecond: " + seconds + " ");

                    System.out.println("   Label:" + label.name());
                    System.out.println("   Confidence:" +
detectedLabel.label().confidence().toString());

                    List<Instance> instances = label.instances();
                    System.out.println("   Instances of " + label.name());

                    if (instances.isEmpty()) {
                        System.out.println("        " + "None");
                    } else {
                        for (Instance instance : instances) {
                            System.out.println("        Confidence: " +
instance.confidence().toString());
                            System.out.println("        Bounding box: " +
instance.boundingBox().toString());
                        }
                    }
                    System.out.println("   Parent labels for " + label.name() +
":");
                    List<Parent> parents = label.parents();

                    if (parents.isEmpty()) {
                        System.out.println("        None");
                    } else {
                        for (Parent parent : parents) {
                            System.out.println("   " + parent.name());
                        }
                    }
                    System.out.println();
                }
            } while (labelDetectionResult != null &&
labelDetectionResult.nextToken() != null);

        } catch (RekognitionException e) {
            e.getMessage();
            System.exit(1);
        }
```

```
    }
}
```

Mendeteksi konten yang tidak pantas atau menyinggung dalam video yang disimpan di bucket Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartContentModerationRequest;
import
 software.amazon.awssdk.services.rekognition.model.StartContentModerationResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import
 software.amazon.awssdk.services.rekognition.model.GetContentModerationResponse;
import
 software.amazon.awssdk.services.rekognition.model.GetContentModerationRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.ContentModerationDetection;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectInappropriate {
    private static String startJobId = "";

    public static void main(String[] args) {

        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
```

```
                    bucket - The name of the bucket in which the video is located
(for example, (for example, myBucket).\s
                    video - The name of video (for example, people.mp4).\s
                    topicArn - The ARN of the Amazon Simple Notification Service
(Amazon SNS) topic.\s
                    roleArn - The ARN of the AWS Identity and Access Management (IAM)
role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startModerationDetection(rekClient, channel, bucket, video);
        getModResults(rekClient);
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startModerationDetection(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {

        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();
```

```
            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartContentModerationRequest modDetectionRequest =
StartContentModerationRequest.builder()
                    .jobTag("Moderation")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();

            StartContentModerationResponse startModDetectionResult = rekClient
                    .startContentModeration(modDetectionRequest);
            startJobId = startModDetectionResult.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getModResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetContentModerationResponse modDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (modDetectionResponse != null)
                    paginationToken = modDetectionResponse.nextToken();

                GetContentModerationRequest modRequest =
GetContentModerationRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
```

```
                    modDetectionResponse =
 rekClient.getContentModeration(modRequest);
                    status = modDetectionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = modDetectionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<ContentModerationDetection> mods =
 modDetectionResponse.moderationLabels();
                for (ContentModerationDetection mod : mods) {
                    long seconds = mod.timestamp() / 1000;
                    System.out.print("Mod label: " + seconds + " ");
                    System.out.println(mod.moderationLabel().toString());
                    System.out.println();
                }

            } while (modDetectionResponse != null &&
 modDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Mendeteksi segmen isyarat teknis dan segmen deteksi bidikan dalam video yang disimpan dalam bucket Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartShotDetectionFilter;
import
 software.amazon.awssdk.services.rekognition.model.StartTechnicalCueDetectionFilter;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionFilters;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionRequest;
import
 software.amazon.awssdk.services.rekognition.model.StartSegmentDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import
 software.amazon.awssdk.services.rekognition.model.GetSegmentDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.GetSegmentDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.SegmentDetection;
import software.amazon.awssdk.services.rekognition.model.TechnicalCueSegment;
import software.amazon.awssdk.services.rekognition.model.ShotSegment;
import software.amazon.awssdk.services.rekognition.model.SegmentType;
import software.amazon.awssdk.services.sqs.SqsClient;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectSegment {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
(for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
(Amazon SNS) topic.\s
                   roleArn - The ARN of the AWS Identity and Access Management (IAM)
role to use.\s
                """;

       if (args.length != 4) {
           System.out.println(usage);
           System.exit(1);
       }

       String bucket = args[0];
       String video = args[1];
       String topicArn = args[2];
       String roleArn = args[3];

       Region region = Region.US_EAST_1;
       RekognitionClient rekClient = RekognitionClient.builder()
               .region(region)
               .build();

       SqsClient sqs = SqsClient.builder()
               .region(Region.US_EAST_1)
               .build();

       NotificationChannel channel = NotificationChannel.builder()
               .snsTopicArn(topicArn)
               .roleArn(roleArn)
               .build();

       startSegmentDetection(rekClient, channel, bucket, video);
       getSegmentResults(rekClient);
       System.out.println("This example is done!");
       sqs.close();
       rekClient.close();
   }

   public static void startSegmentDetection(RekognitionClient rekClient,
```

```
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();

            StartShotDetectionFilter cueDetectionFilter =
StartShotDetectionFilter.builder()
                    .minSegmentConfidence(60F)
                    .build();

            StartTechnicalCueDetectionFilter technicalCueDetectionFilter =
StartTechnicalCueDetectionFilter.builder()
                    .minSegmentConfidence(60F)
                    .build();

            StartSegmentDetectionFilters filters =
StartSegmentDetectionFilters.builder()
                    .shotFilter(cueDetectionFilter)
                    .technicalCueFilter(technicalCueDetectionFilter)
                    .build();

            StartSegmentDetectionRequest segDetectionRequest =
StartSegmentDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .segmentTypes(SegmentType.TECHNICAL_CUE, SegmentType.SHOT)
                    .video(vidOb)
                    .filters(filters)
                    .build();

            StartSegmentDetectionResponse segDetectionResponse =
rekClient.startSegmentDetection(segDetectionRequest);
            startJobId = segDetectionResponse.jobId();

        } catch (RekognitionException e) {
            e.getMessage();
```

```
            System.exit(1);
        }
    }

    public static void getSegmentResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetSegmentDetectionResponse segDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (segDetectionResponse != null)
                    paginationToken = segDetectionResponse.nextToken();

                GetSegmentDetectionRequest recognitionRequest =
GetSegmentDetectionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
                    segDetectionResponse =
rekClient.getSegmentDetection(recognitionRequest);
                    status = segDetectionResponse.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }
                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                List<VideoMetadata> videoMetaData =
segDetectionResponse.videoMetadata();
                for (VideoMetadata metaData : videoMetaData) {
                    System.out.println("Format: " + metaData.format());
```

```
                    System.out.println("Codec: " + metaData.codec());
                    System.out.println("Duration: " + metaData.durationMillis());
                    System.out.println("FrameRate: " + metaData.frameRate());
                    System.out.println("Job");
                }

                List<SegmentDetection> detectedSegments =
segDetectionResponse.segments();
                for (SegmentDetection detectedSegment : detectedSegments) {
                    String type = detectedSegment.type().toString();
                    if (type.contains(SegmentType.TECHNICAL_CUE.toString())) {
                        System.out.println("Technical Cue");
                        TechnicalCueSegment segmentCue =
detectedSegment.technicalCueSegment();
                        System.out.println("\tType: " + segmentCue.type());
                        System.out.println("\tConfidence: " +
segmentCue.confidence().toString());
                    }

                    if (type.contains(SegmentType.SHOT.toString())) {
                        System.out.println("Shot");
                        ShotSegment segmentShot = detectedSegment.shotSegment();
                        System.out.println("\tIndex " + segmentShot.index());
                        System.out.println("\tConfidence: " +
segmentShot.confidence().toString());
                    }

                    long seconds = detectedSegment.durationMillis();
                    System.out.println("\tDuration : " + seconds + " milliseconds");
                    System.out.println("\tStart time code: " +
detectedSegment.startTimecodeSMPTE());
                    System.out.println("\tEnd time code: " +
detectedSegment.endTimecodeSMPTE());
                    System.out.println("\tDuration time code: " +
detectedSegment.durationSMPTE());
                    System.out.println();
                }

            } while (segDetectionResponse != null &&
segDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
}
```

Mendeteksi teks dalam video yang disimpan dalam video yang disimpan dalam bucket Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.Video;
import software.amazon.awssdk.services.rekognition.model.StartTextDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.StartTextDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.GetTextDetectionResponse;
import software.amazon.awssdk.services.rekognition.model.GetTextDetectionRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.TextDetectionResult;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoDetectText {
    private static String startJobId = "";

    public static void main(String[] args) {
        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
```

```
                    topicArn - The ARN of the Amazon Simple Notification Service
(Amazon SNS) topic.\s
                    roleArn - The ARN of the AWS Identity and Access Management (IAM)
role to use.\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];

        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startTextLabels(rekClient, channel, bucket, video);
        getTextResults(rekClient);
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startTextLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
```

```
                    .build();

            StartTextDetectionRequest labelDetectionRequest =
StartTextDetectionRequest.builder()
                    .jobTag("DetectingLabels")
                    .notificationChannel(channel)
                    .video(vidOb)
                    .build();

            StartTextDetectionResponse labelDetectionResponse =
rekClient.startTextDetection(labelDetectionRequest);
            startJobId = labelDetectionResponse.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getTextResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetTextDetectionResponse textDetectionResponse = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (textDetectionResponse != null)
                    paginationToken = textDetectionResponse.nextToken();

                GetTextDetectionRequest recognitionRequest =
GetTextDetectionRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds.
                while (!finished) {
                    textDetectionResponse =
rekClient.getTextDetection(recognitionRequest);
                    status = textDetectionResponse.jobStatusAsString();
```

```
                    if (status.compareTo("SUCCEEDED") == 0)
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = textDetectionResponse.videoMetadata();
                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<TextDetectionResult> labels =
 textDetectionResponse.textDetections();
                for (TextDetectionResult detectedText : labels) {
                    System.out.println("Confidence: " +
 detectedText.textDetection().confidence().toString());
                    System.out.println("Id : " + detectedText.textDetection().id());
                    System.out.println("Parent Id: " +
 detectedText.textDetection().parentId());
                    System.out.println("Type: " +
 detectedText.textDetection().type());
                    System.out.println("Text: " +
 detectedText.textDetection().detectedText());
                    System.out.println();
                }

            } while (textDetectionResponse != null &&
 textDetectionResponse.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Mendeteksi orang dalam video yang disimpan dalam video yang disimpan dalam bucket Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.rekognition.RekognitionClient;
import software.amazon.awssdk.services.rekognition.model.S3Object;
import software.amazon.awssdk.services.rekognition.model.NotificationChannel;
import software.amazon.awssdk.services.rekognition.model.StartPersonTrackingRequest;
import software.amazon.awssdk.services.rekognition.model.Video;
import
 software.amazon.awssdk.services.rekognition.model.StartPersonTrackingResponse;
import software.amazon.awssdk.services.rekognition.model.RekognitionException;
import software.amazon.awssdk.services.rekognition.model.GetPersonTrackingResponse;
import software.amazon.awssdk.services.rekognition.model.GetPersonTrackingRequest;
import software.amazon.awssdk.services.rekognition.model.VideoMetadata;
import software.amazon.awssdk.services.rekognition.model.PersonDetection;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class VideoPersonDetection {
    private static String startJobId = "";

    public static void main(String[] args) {

        final String usage = """

                Usage:    <bucket> <video> <topicArn> <roleArn>

                Where:
                   bucket - The name of the bucket in which the video is located
 (for example, (for example, myBucket).\s
                   video - The name of video (for example, people.mp4).\s
                   topicArn - The ARN of the Amazon Simple Notification Service
 (Amazon SNS) topic.\s
```

```
                    roleArn - The ARN of the AWS Identity and Access Management (IAM)
role to use.\s
                """";

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucket = args[0];
        String video = args[1];
        String topicArn = args[2];
        String roleArn = args[3];
        Region region = Region.US_EAST_1;
        RekognitionClient rekClient = RekognitionClient.builder()
                .region(region)
                .build();

        NotificationChannel channel = NotificationChannel.builder()
                .snsTopicArn(topicArn)
                .roleArn(roleArn)
                .build();

        startPersonLabels(rekClient, channel, bucket, video);
        getPersonDetectionResults(rekClient);
        System.out.println("This example is done!");
        rekClient.close();
    }

    public static void startPersonLabels(RekognitionClient rekClient,
            NotificationChannel channel,
            String bucket,
            String video) {
        try {
            S3Object s3Obj = S3Object.builder()
                    .bucket(bucket)
                    .name(video)
                    .build();

            Video vidOb = Video.builder()
                    .s3Object(s3Obj)
                    .build();
```

```
            StartPersonTrackingRequest personTrackingRequest =
StartPersonTrackingRequest.builder()
                    .jobTag("DetectingLabels")
                    .video(vidOb)
                    .notificationChannel(channel)
                    .build();

            StartPersonTrackingResponse labelDetectionResponse =
rekClient.startPersonTracking(personTrackingRequest);
            startJobId = labelDetectionResponse.jobId();

        } catch (RekognitionException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getPersonDetectionResults(RekognitionClient rekClient) {
        try {
            String paginationToken = null;
            GetPersonTrackingResponse personTrackingResult = null;
            boolean finished = false;
            String status;
            int yy = 0;

            do {
                if (personTrackingResult != null)
                    paginationToken = personTrackingResult.nextToken();

                GetPersonTrackingRequest recognitionRequest =
GetPersonTrackingRequest.builder()
                        .jobId(startJobId)
                        .nextToken(paginationToken)
                        .maxResults(10)
                        .build();

                // Wait until the job succeeds
                while (!finished) {

                    personTrackingResult =
rekClient.getPersonTracking(recognitionRequest);
                    status = personTrackingResult.jobStatusAsString();

                    if (status.compareTo("SUCCEEDED") == 0)
```

```
                        finished = true;
                    else {
                        System.out.println(yy + " status is: " + status);
                        Thread.sleep(1000);
                    }
                    yy++;
                }

                finished = false;

                // Proceed when the job is done - otherwise VideoMetadata is null.
                VideoMetadata videoMetaData = personTrackingResult.videoMetadata();

                System.out.println("Format: " + videoMetaData.format());
                System.out.println("Codec: " + videoMetaData.codec());
                System.out.println("Duration: " + videoMetaData.durationMillis());
                System.out.println("FrameRate: " + videoMetaData.frameRate());
                System.out.println("Job");

                List<PersonDetection> detectedPersons =
 personTrackingResult.persons();
                for (PersonDetection detectedPerson : detectedPersons) {
                    long seconds = detectedPerson.timestamp() / 1000;
                    System.out.print("Sec: " + seconds + " ");
                    System.out.println("Person Identifier: " +
 detectedPerson.person().index());
                    System.out.println();
                }

            } while (personTrackingResult != null &&
 personTrackingResult.nextToken() != null);

        } catch (RekognitionException | InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - GetCelebrityRecognition
  - GetContentModeration

- GetLabelDetection
- GetPersonTracking
- GetSegmentDetection
- GetTextDetection
- StartCelebrityRecognition
- StartContentModeration
- StartLabelDetection
- StartPersonTracking
- StartSegmentDetection
- StartTextDetection

Mendeteksi objek dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi objek berdasarkan kategori dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi yang menggunakan Amazon Rekognition untuk mengidentifikasi objek berdasarkan kategori dalam gambar yang terletak di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES

Mendeteksi orang dan objek dalam video

Contoh kode berikut menunjukkan cara mendeteksi orang dan objek dalam video dengan Amazon Rekognition.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi guna mendeteksi wajah dan objek di video yang berada di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

# Route 53 contoh pendaftaran domain menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan pendaftaran domain AWS SDK for Java 2.x with Route 53.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan

# Memulai

## Hello Route 53 pendaftaran domain

Contoh kode berikut menunjukkan bagaimana memulai menggunakan pendaftaran domain Route 53.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.route53domains.Route53DomainsClient;
import software.amazon.awssdk.services.route53.model.Route53Exception;
import software.amazon.awssdk.services.route53domains.model.DomainPrice;
import software.amazon.awssdk.services.route53domains.model.ListPricesRequest;
import software.amazon.awssdk.services.route53domains.model.ListPricesResponse;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code examples performs the following operation:
 *
 * 1. Invokes ListPrices for at least one domain type, such as the “com” type
 * and displays the prices for Registration and Renewal.
 *
 */
public class HelloRoute53 {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
                "Usage:\n" +
```

```
                "    <hostedZoneId> \n\n" +
                "Where:\n" +
                "    hostedZoneId - The id value of an existing hosted zone. \n";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String domainType = args[0];
        Region region = Region.US_EAST_1;
        Route53DomainsClient route53DomainsClient = Route53DomainsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Invokes ListPrices for at least one domain type.");
        listPrices(route53DomainsClient, domainType);
        System.out.println(DASHES);
    }

    public static void listPrices(Route53DomainsClient route53DomainsClient, String
domainType) {
        try {
            ListPricesRequest pricesRequest = ListPricesRequest.builder()
                    .maxItems(10)
                    .tld(domainType)
                    .build();

            ListPricesResponse response =
route53DomainsClient.listPrices(pricesRequest);
            List<DomainPrice> prices = response.prices();
            for (DomainPrice pr : prices) {
                System.out.println("Name: " + pr.name());
                System.out.println(
                        "Registration: " + pr.registrationPrice().price() + " " +
pr.registrationPrice().currency());
                System.out.println("Renewal: " + pr.renewalPrice().price() + " " +
pr.renewalPrice().currency());
                System.out.println("Transfer: " + pr.transferPrice().price() + " " +
pr.transferPrice().currency());
                System.out.println("Transfer: " + pr.transferPrice().price() + " " +
pr.transferPrice().currency());
```

```
                System.out.println("Change Ownership: " +
 pr.changeOwnershipPrice().price() + " "
                        + pr.changeOwnershipPrice().currency());
                System.out.println(
                        "Restoration: " + pr.restorationPrice().price() + " " +
 pr.restorationPrice().currency());
                System.out.println(" ");
            }

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListPricesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat daftar domain saat ini, dan daftar operasi dalam satu tahun terakhir.
- Lihat tagihan selama setahun terakhir, dan lihat harga untuk jenis domain.
- Dapatkan saran domain.
- Periksa ketersediaan domain dan transferabilitas.
- Secara opsional, minta pendaftaran domain.
- Dapatkan detail operasi.
- Secara opsional, dapatkan detail domain.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This example uses pagination methods where applicable. For example, to list
 * domains, the
 * listDomainsPaginator method is used. For more information about pagination,
 * see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/pagination.html
 *
 * This Java code example performs the following operations:
 *
 * 1. List current domains.
 * 2. List operations in the past year.
 * 3. View billing for the account in the past year.
 * 4. View prices for domain types.
 * 5. Get domain suggestions.
 * 6. Check domain availability.
 * 7. Check domain transferability.
 * 8. Request a domain registration.
 * 9. Get operation details.
 * 10. Optionally, get domain details.
 */

public class Route53Scenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:
                    <domainType> <phoneNumber> <email> <domainSuggestion>
<firstName> <lastName> <city>

                Where:
                    domainType - The domain type (for example, com).\s
                    phoneNumber - The phone number to use (for example,
+91.9966564xxx)      email - The email address to use.      domainSuggestion - The
domain suggestion (for example, findmy.accountants).\s
                    firstName - The first name to use to register a domain.\s
                    lastName -  The last name to use to register a domain.\s
                    city - the city to use to register a domain.\s
                    """;

        if (args.length != 7) {
            System.out.println(usage);
            System.exit(1);
        }

        String domainType = args[0];
        String phoneNumber = args[1];
        String email = args[2];
        String domainSuggestion = args[3];
        String firstName = args[4];
        String lastName = args[5];
        String city = args[6];
        Region region = Region.US_EAST_1;
        Route53DomainsClient route53DomainsClient = Route53DomainsClient.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Route 53 domains example
scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. List current domains.");
        listDomains(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. List operations in the past year.");
```

```
        listOperations(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. View billing for the account in the past year.");
        listBillingRecords(route53DomainsClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. View prices for domain types.");
        listPrices(route53DomainsClient, domainType);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Get domain suggestions.");
        listDomainSuggestions(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Check domain availability.");
        checkDomainAvailability(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Check domain transferability.");
        checkDomainTransferability(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Request a domain registration.");
        String opId = requestDomainRegistration(route53DomainsClient,
domainSuggestion, phoneNumber, email, firstName,
                lastName, city);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Get operation details.");
        getOperationalDetail(route53DomainsClient, opId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get domain details.");
        System.out.println("Note: You must have a registered domain to get
details.");
```

```
        System.out.println("Otherwise, an exception is thrown that states ");
        System.out.println("Domain xxxxxxx not found in xxxxxxx account.");
        getDomainDetails(route53DomainsClient, domainSuggestion);
        System.out.println(DASHES);
    }

    public static void getDomainDetails(Route53DomainsClient route53DomainsClient,
String domainSuggestion) {
        try {
            GetDomainDetailRequest detailRequest = GetDomainDetailRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            GetDomainDetailResponse response =
route53DomainsClient.getDomainDetail(detailRequest);
            System.out.println("The contact first name is " +
response.registrantContact().firstName());
            System.out.println("The contact last name is " +
response.registrantContact().lastName());
            System.out.println("The contact org name is " +
response.registrantContact().organizationName());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void getOperationalDetail(Route53DomainsClient
route53DomainsClient, String operationId) {
        try {
            GetOperationDetailRequest detailRequest =
GetOperationDetailRequest.builder()
                    .operationId(operationId)
                    .build();

            GetOperationDetailResponse response =
route53DomainsClient.getOperationDetail(detailRequest);
            System.out.println("Operation detail message is " + response.message());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
```

```
    }

    public static String requestDomainRegistration(Route53DomainsClient
route53DomainsClient,
            String domainSuggestion,
            String phoneNumber,
            String email,
            String firstName,
            String lastName,
            String city) {

        try {
            ContactDetail contactDetail = ContactDetail.builder()
                    .contactType(ContactType.COMPANY)
                    .state("LA")
                    .countryCode(CountryCode.IN)
                    .email(email)
                    .firstName(firstName)
                    .lastName(lastName)
                    .city(city)
                    .phoneNumber(phoneNumber)
                    .organizationName("My Org")
                    .addressLine1("My Address")
                    .zipCode("123 123")
                    .build();

            RegisterDomainRequest domainRequest = RegisterDomainRequest.builder()
                    .adminContact(contactDetail)
                    .registrantContact(contactDetail)
                    .techContact(contactDetail)
                    .domainName(domainSuggestion)
                    .autoRenew(true)
                    .durationInYears(1)
                    .build();

            RegisterDomainResponse response =
route53DomainsClient.registerDomain(domainRequest);
            System.out.println("Registration requested. Operation Id: " +
response.operationId());
            return response.operationId();

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
        return "";
    }

    public static void checkDomainTransferability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            CheckDomainTransferabilityRequest transferabilityRequest =
CheckDomainTransferabilityRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            CheckDomainTransferabilityResponse response = route53DomainsClient
                    .checkDomainTransferability(transferabilityRequest);
            System.out.println("Transferability: " +
response.transferability().transferable().toString());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void checkDomainAvailability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
        try {
            CheckDomainAvailabilityRequest availabilityRequest =
CheckDomainAvailabilityRequest.builder()
                    .domainName(domainSuggestion)
                    .build();

            CheckDomainAvailabilityResponse response = route53DomainsClient
                    .checkDomainAvailability(availabilityRequest);
            System.out.println(domainSuggestion + " is " +
response.availability().toString());

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listDomainSuggestions(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
```

```
        try {
            GetDomainSuggestionsRequest suggestionsRequest =
GetDomainSuggestionsRequest.builder()
                    .domainName(domainSuggestion)
                    .suggestionCount(5)
                    .onlyAvailable(true)
                    .build();

            GetDomainSuggestionsResponse response =
route53DomainsClient.getDomainSuggestions(suggestionsRequest);
            List<DomainSuggestion> suggestions = response.suggestionsList();
            for (DomainSuggestion suggestion : suggestions) {
                System.out.println("Suggestion Name: " + suggestion.domainName());
                System.out.println("Availability: " + suggestion.availability());
                System.out.println(" ");
            }

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listPrices(Route53DomainsClient route53DomainsClient, String
domainType) {
        try {
            ListPricesRequest pricesRequest = ListPricesRequest.builder()
                    .tld(domainType)
                    .build();

            ListPricesIterable listRes =
route53DomainsClient.listPricesPaginator(pricesRequest);
            listRes.stream()
                    .flatMap(r -> r.prices().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.name() +
                            " Registration: " + content.registrationPrice().price()
+ " "
                            + content.registrationPrice().currency() +
                            " Renewal: " + content.renewalPrice().price() + " " +
content.renewalPrice().currency()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
```

```
            System.exit(1);
        }
    }

    public static void listBillingRecords(Route53DomainsClient route53DomainsClient)
{
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            LocalDateTime localDateTime2 = localDateTime.minusYears(1);
            Instant myStartTime = localDateTime2.toInstant(zoneOffset);
            Instant myEndTime = localDateTime.toInstant(zoneOffset);

            ViewBillingRequest viewBillingRequest = ViewBillingRequest.builder()
                    .start(myStartTime)
                    .end(myEndTime)
                    .build();

            ViewBillingIterable listRes =
route53DomainsClient.viewBillingPaginator(viewBillingRequest);
            listRes.stream()
                    .flatMap(r -> r.billingRecords().stream())
                    .forEach(content -> System.out.println(" Bill Date:: " +
content.billDate() +
                            " Operation: " + content.operationAsString() +
                            " Price: " + content.price()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listOperations(Route53DomainsClient route53DomainsClient) {
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            localDateTime = localDateTime.minusYears(1);
            Instant myTime = localDateTime.toInstant(zoneOffset);
```

```
            ListOperationsRequest operationsRequest =
 ListOperationsRequest.builder()
                    .submittedSince(myTime)
                    .build();

            ListOperationsIterable listRes =
 route53DomainsClient.listOperationsPaginator(operationsRequest);
            listRes.stream()
                    .flatMap(r -> r.operations().stream())
                    .forEach(content -> System.out.println(" Operation Id: " +
 content.operationId() +
                            " Status: " + content.statusAsString() +
                            " Date: " + content.submittedDate()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void listDomains(Route53DomainsClient route53DomainsClient) {
        try {
            ListDomainsIterable listRes =
 route53DomainsClient.listDomainsPaginator();
            listRes.stream()
                    .flatMap(r -> r.domains().stream())
                    .forEach(content -> System.out.println("The domain name is " +
 content.domainName()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CheckDomainAvailability
  - CheckDomainTransferability
  - GetDomainDetail
  - GetDomainSuggestions

- GetOperationDetail
- ListDomains
- ListOperations
- ListPrices
- RegisterDomain
- ViewBilling

## Tindakan

### `CheckDomainAvailability`

Contoh kode berikut menunjukkan cara menggunakan`CheckDomainAvailability`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void checkDomainAvailability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
       try {
           CheckDomainAvailabilityRequest availabilityRequest =
CheckDomainAvailabilityRequest.builder()
                   .domainName(domainSuggestion)
                   .build();

           CheckDomainAvailabilityResponse response = route53DomainsClient
                   .checkDomainAvailability(availabilityRequest);
           System.out.println(domainSuggestion + " is " +
response.availability().toString());

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat CheckDomainAvailabilitydi Referensi AWS SDK for Java 2.x API.

### `CheckDomainTransferability`

Contoh kode berikut menunjukkan cara menggunakan`CheckDomainTransferability`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void checkDomainTransferability(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
       try {
           CheckDomainTransferabilityRequest transferabilityRequest =
CheckDomainTransferabilityRequest.builder()
                   .domainName(domainSuggestion)
                   .build();

           CheckDomainTransferabilityResponse response = route53DomainsClient
                   .checkDomainTransferability(transferabilityRequest);
           System.out.println("Transferability: " +
response.transferability().transferable().toString());

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat CheckDomainTransferabilitydi Referensi AWS SDK for Java 2.x API.

### `GetDomainDetail`

Contoh kode berikut menunjukkan cara menggunakan`GetDomainDetail`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void getDomainDetails(Route53DomainsClient route53DomainsClient,
String domainSuggestion) {
       try {
           GetDomainDetailRequest detailRequest = GetDomainDetailRequest.builder()
                   .domainName(domainSuggestion)
                   .build();

           GetDomainDetailResponse response =
route53DomainsClient.getDomainDetail(detailRequest);
           System.out.println("The contact first name is " +
response.registrantContact().firstName());
           System.out.println("The contact last name is " +
response.registrantContact().lastName());
           System.out.println("The contact org name is " +
response.registrantContact().organizationName());

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetDomainDetaildi Referensi AWS SDK for Java 2.x API.

### `GetDomainSuggestions`

Contoh kode berikut menunjukkan cara menggunakan`GetDomainSuggestions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listDomainSuggestions(Route53DomainsClient
route53DomainsClient, String domainSuggestion) {
       try {
           GetDomainSuggestionsRequest suggestionsRequest =
GetDomainSuggestionsRequest.builder()
                   .domainName(domainSuggestion)
                   .suggestionCount(5)
                   .onlyAvailable(true)
                   .build();

           GetDomainSuggestionsResponse response =
route53DomainsClient.getDomainSuggestions(suggestionsRequest);
           List<DomainSuggestion> suggestions = response.suggestionsList();
           for (DomainSuggestion suggestion : suggestions) {
               System.out.println("Suggestion Name: " + suggestion.domainName());
               System.out.println("Availability: " + suggestion.availability());
               System.out.println(" ");
           }

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetDomainSuggestionsdi Referensi AWS SDK for Java 2.x API.

### `GetOperationDetail`

Contoh kode berikut menunjukkan cara menggunakan`GetOperationDetail`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void getOperationalDetail(Route53DomainsClient
route53DomainsClient, String operationId) {
       try {
           GetOperationDetailRequest detailRequest =
GetOperationDetailRequest.builder()
                   .operationId(operationId)
                   .build();

           GetOperationDetailResponse response =
route53DomainsClient.getOperationDetail(detailRequest);
           System.out.println("Operation detail message is " + response.message());

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat GetOperationDetaildi Referensi AWS SDK for Java 2.x API.

### `ListDomains`

Contoh kode berikut menunjukkan cara menggunakan`ListDomains`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void listDomains(Route53DomainsClient route53DomainsClient) {
        try {
            ListDomainsIterable listRes =
route53DomainsClient.listDomainsPaginator();
            listRes.stream()
                    .flatMap(r -> r.domains().stream())
                    .forEach(content -> System.out.println("The domain name is " +
content.domainName()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListDomainsdi Referensi AWS SDK for Java 2.x API.

### `ListOperations`

Contoh kode berikut menunjukkan cara menggunakan`ListOperations`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void listOperations(Route53DomainsClient route53DomainsClient) {
        try {
            Date currentDate = new Date();
            LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
            ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
            localDateTime = localDateTime.minusYears(1);
            Instant myTime = localDateTime.toInstant(zoneOffset);

            ListOperationsRequest operationsRequest =
ListOperationsRequest.builder()
```

```
                    .submittedSince(myTime)
                    .build();

            ListOperationsIterable listRes =
route53DomainsClient.listOperationsPaginator(operationsRequest);
            listRes.stream()
                    .flatMap(r -> r.operations().stream())
                    .forEach(content -> System.out.println(" Operation Id: " +
content.operationId() +
                            " Status: " + content.statusAsString() +
                            " Date: " + content.submittedDate()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListOperationsdi Referensi AWS SDK for Java 2.x API.

### `ListPrices`

Contoh kode berikut menunjukkan cara menggunakan`ListPrices`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void listPrices(Route53DomainsClient route53DomainsClient, String
domainType) {
        try {
            ListPricesRequest pricesRequest = ListPricesRequest.builder()
                    .tld(domainType)
                    .build();

            ListPricesIterable listRes =
route53DomainsClient.listPricesPaginator(pricesRequest);
```

```
            listRes.stream()
                    .flatMap(r -> r.prices().stream())
                    .forEach(content -> System.out.println(" Name: " +
content.name() +
                            " Registration: " + content.registrationPrice().price()
+ " "
                            + content.registrationPrice().currency() +
                            " Renewal: " + content.renewalPrice().price() + " " +
content.renewalPrice().currency()));

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListPricesdi Referensi AWS SDK for Java 2.x API.

### `RegisterDomain`

Contoh kode berikut menunjukkan cara menggunakan`RegisterDomain`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String requestDomainRegistration(Route53DomainsClient
route53DomainsClient,
            String domainSuggestion,
            String phoneNumber,
            String email,
            String firstName,
            String lastName,
            String city) {

        try {
```

```
            ContactDetail contactDetail = ContactDetail.builder()
                    .contactType(ContactType.COMPANY)
                    .state("LA")
                    .countryCode(CountryCode.IN)
                    .email(email)
                    .firstName(firstName)
                    .lastName(lastName)
                    .city(city)
                    .phoneNumber(phoneNumber)
                    .organizationName("My Org")
                    .addressLine1("My Address")
                    .zipCode("123 123")
                    .build();

            RegisterDomainRequest domainRequest = RegisterDomainRequest.builder()
                    .adminContact(contactDetail)
                    .registrantContact(contactDetail)
                    .techContact(contactDetail)
                    .domainName(domainSuggestion)
                    .autoRenew(true)
                    .durationInYears(1)
                    .build();

            RegisterDomainResponse response =
route53DomainsClient.registerDomain(domainRequest);
            System.out.println("Registration requested. Operation Id: " +
response.operationId());
            return response.operationId();

        } catch (Route53Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat RegisterDomaindi Referensi AWS SDK for Java 2.x API.

### `ViewBilling`

Contoh kode berikut menunjukkan cara menggunakan`ViewBilling`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void listBillingRecords(Route53DomainsClient route53DomainsClient)
{
       try {
           Date currentDate = new Date();
           LocalDateTime localDateTime =
currentDate.toInstant().atZone(ZoneId.systemDefault()).toLocalDateTime();
           ZoneOffset zoneOffset = ZoneOffset.of("+01:00");
           LocalDateTime localDateTime2 = localDateTime.minusYears(1);
           Instant myStartTime = localDateTime2.toInstant(zoneOffset);
           Instant myEndTime = localDateTime.toInstant(zoneOffset);

           ViewBillingRequest viewBillingRequest = ViewBillingRequest.builder()
                   .start(myStartTime)
                   .end(myEndTime)
                   .build();

           ViewBillingIterable listRes =
route53DomainsClient.viewBillingPaginator(viewBillingRequest);
           listRes.stream()
                   .flatMap(r -> r.billingRecords().stream())
                   .forEach(content -> System.out.println(" Bill Date:: " +
content.billDate() +
                           " Operation: " + content.operationAsString() +
                           " Price: " + content.price()));

       } catch (Route53Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ViewBillingdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon S3 menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon S3. AWS SDK for Java 2.x

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario
- Contoh nirserver


## Memulai

Halo Amazon S3

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.ListBucketsResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloS3 {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listBuckets(s3);
    }

    /**
     * Lists all the S3 buckets associated with the provided AWS S3 client.
     *
     * @param s3 the S3Client instance used to interact with the AWS S3 service
     */
    public static void listBuckets(S3Client s3) {
        try {
            ListBucketsResponse response = s3.listBuckets();
            List<Bucket> bucketList = response.buckets();
            bucketList.forEach(bucket -> {
                System.out.println("Bucket Name: " + bucket.name());
            });

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }
}
```

- Untuk detail API, lihat ListBucketsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Membuat bucket dan mengunggah file ke dalamnya.
- Mengunduh objek dari bucket.
- Menyalin objek ke subfolder di bucket.
- Membuat daftar objek dalam bucket.
- Menghapus objek bucket dan bucket tersebut.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh skenario.

```
import java.io.IOException;
import java.util.Scanner;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * This Java code example performs the following tasks:
 *
 * 1. Creates an Amazon S3 bucket.
 * 2. Uploads an object to the bucket.
 * 3. Downloads the object to another local file.
 * 4. Uploads an object using multipart upload.
 * 5. List all objects located in the Amazon S3 bucket.
 * 6. Copies the object to another Amazon S3 bucket.
 * 7. Copy the object to another Amazon S3 bucket using multi copy.
 * 8. Deletes the object from the Amazon S3 bucket.
 * 9. Deletes the Amazon S3 bucket.
 */

public class S3Scenario {

    public static Scanner scanner = new Scanner(System.in);
    static S3Actions s3Actions = new S3Actions();
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final Logger logger = LoggerFactory.getLogger(S3Scenario.class);
    public static void main(String[] args) throws IOException {
        final String usage = """
            Usage:
               <bucketName> <key> <objectPath> <savePath> <toBucket>

            Where:
                bucketName - The name of the  S3 bucket.
                key - The unique identifier for the object stored in the S3 bucket.
                objectPath - The full file path of the object within the S3 bucket
 (e.g., "documents/reports/annual_report.pdf").
                savePath - The local file path where the object will be downloaded
 and saved (e.g., "C:/Users/username/Downloads/annual_report.pdf").
                toBucket - The name of the S3 bucket to which the object will be
 copied.
            """;

        if (args.length != 5) {
            logger.info(usage);
```

```
            return;
        }

        String bucketName = args[0];
        String key = args[1];
        String objectPath = args[2];
        String savePath = args[3];
        String toBucket = args[4];

        logger.info(DASHES);
        logger.info("Welcome to the Amazon Simple Storage Service (S3) example
scenario.");
        logger.info("""
            Amazon S3 is a highly scalable and durable object storage
            service provided by Amazon Web Services (AWS). It is designed to store
and retrieve
            any amount of data, from anywhere on the web, at any time.

            The `S3AsyncClient` interface in the AWS SDK for Java 2.x provides a set
of methods to
            programmatically interact with the Amazon S3 (Simple Storage Service)
service. This allows
            developers to automate the management and manipulation of S3 buckets and
objects as
            part of their application deployment pipelines. With S3, teams can focus
on building
            and deploying their applications without having to worry about the
underlying storage
            infrastructure required to host and manage large amounts of data.

            This scenario walks you through how to perform key operations for this
service.
            Let's get started...
            """);
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        try {
            // Run the methods that belong to this scenario.
            runScenario(bucketName, key, objectPath, savePath, toBucket);

        } catch (Throwable rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception kmsEx) {
```

```
                logger.info("KMS error occurred: Error message: {}, Error code {}",
kmsEx.getMessage(), kmsEx.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
    }

    private static void runScenario(String bucketName, String key, String
objectPath, String savePath, String toBucket) throws Throwable {
        logger.info(DASHES);
        logger.info("1. Create an Amazon S3 bucket.");
        try {
            CompletableFuture<Void> future =
s3Actions.createBucketAsync(bucketName);
            future.join();
            waitForInputToContinue(scanner);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;

        }
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("2. Upload a local file to the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<PutObjectResponse> future =
s3Actions.uploadLocalFileAsync(bucketName, key, objectPath);
            future.join();
            logger.info("File uploaded successfully to {}/{}", bucketName, key);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
```

```
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);


        logger.info(DASHES);
        logger.info("3. Download the object to another local file.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.getObjectBytesAsync(bucketName, key, savePath);
            future.join();
            logger.info("Successfully obtained bytes from S3 object and wrote to
file {}", savePath);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("4. Perform a multipart upload.");
        waitForInputToContinue(scanner);
        String multipartKey = "multiPartKey";
        try {
            // Call the multipartUpload method
            CompletableFuture<Void> future = s3Actions.multipartUpload(bucketName,
multipartKey);
            future.join();
```

```
            logger.info("Multipart upload completed successfully for bucket '{}' and
key '{}'", bucketName, multipartKey);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("5. List all objects located in the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.listAllObjectsAsync(bucketName);
            future.join();
            logger.info("Object listing completed successfully.");

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("6. Copy the object to another Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<String> future =
s3Actions.copyBucketObjectAsync(bucketName, key, toBucket);
```

```
            String result = future.join();
            logger.info("Copy operation result: {}", result);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("7. Copy the object to another Amazon S3 bucket using multi
copy.");
        waitForInputToContinue(scanner);

        try {
            CompletableFuture<String> future = s3Actions.performMultiCopy(toBucket,
bucketName, key);
            String result = future.join();
            logger.info("Copy operation result: {}", result);

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("KMS error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);



        logger.info(DASHES);
        logger.info("8. Delete objects from the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
```

```
            CompletableFuture<Void> future =
s3Actions.deleteObjectFromBucketAsync(bucketName, key);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        try {
            CompletableFuture<Void> future =
s3Actions.deleteObjectFromBucketAsync(bucketName, "multiPartKey");
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
                logger.info("S3 error occurred: Error message: {}, Error code {}",
s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("9. Delete the Amazon S3 bucket.");
        waitForInputToContinue(scanner);
        try {
            CompletableFuture<Void> future =
s3Actions.deleteBucketAsync(bucketName);
            future.join();

        } catch (RuntimeException rt) {
            Throwable cause = rt.getCause();
            if (cause instanceof S3Exception s3Ex) {
```

```
                logger.info("S3 error occurred: Error message: {}, Error code {}",
 s3Ex.getMessage(), s3Ex.awsErrorDetails().errorCode());
            } else {
                logger.info("An unexpected error occurred: " + rt.getMessage());
            }
            throw cause;
        }
        waitForInputToContinue(scanner);
        logger.info(DASHES);

        logger.info(DASHES);
        logger.info("You successfully completed the Amazon S3 scenario.");
        logger.info(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                // Handle invalid input.
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus yang berisi operasi.

```
public class S3Actions {

    private static final Logger logger = LoggerFactory.getLogger(S3Actions.class);
    private static S3AsyncClient s3AsyncClient;

    public static S3AsyncClient getAsyncClient() {
        if (s3AsyncClient == null) {
```

```
            /*
            The `NettyNioAsyncHttpClient` class is part of the AWS SDK for Java,
version 2,
            and it is designed to provide a high-performance, asynchronous HTTP
client for interacting with AWS services.
             It uses the Netty framework to handle the underlying network
communication and the Java NIO API to
             provide a non-blocking, event-driven approach to HTTP requests and
responses.
             */

            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(50)  // Adjust as needed.
                .connectionTimeout(Duration.ofSeconds(60))  // Set the connection
timeout.
                .readTimeout(Duration.ofSeconds(60))  // Set the read timeout.
                .writeTimeout(Duration.ofSeconds(60))  // Set the write timeout.
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))  // Set the overall API call
timeout.
                .apiCallAttemptTimeout(Duration.ofSeconds(90))  // Set the
individual call attempt timeout.
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return s3AsyncClient;
    }


    /**
     * Creates an S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to create
     * @return a {@link CompletableFuture} that completes when the bucket is created
and ready
```

```
     * @throws RuntimeException if there is a failure while creating the bucket
     */
    public CompletableFuture<Void> createBucketAsync(String bucketName) {
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .build();

        CompletableFuture<CreateBucketResponse> response =
getAsyncClient().createBucket(bucketRequest);
        return response.thenCompose(resp -> {
            S3AsyncWaiter s3Waiter = getAsyncClient().waiter();
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                .bucket(bucketName)
                .build();

            CompletableFuture<WaiterResponse<HeadBucketResponse>>
waiterResponseFuture =
                s3Waiter.waitUntilBucketExists(bucketRequestWait);
            return waiterResponseFuture.thenAccept(waiterResponse -> {
                waiterResponse.matched().response().ifPresent(headBucketResponse ->
{
                    logger.info(bucketName + " is ready");
                });
            });
        }).whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to create bucket", ex);
            }
        });
    }


    /**
     * Uploads a local file to an AWS S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param key        the key (object name) to use for the uploaded file
     * @param objectPath the local file path of the file to be uploaded
     * @return a {@link CompletableFuture} that completes with the {@link
PutObjectResponse} when the upload is successful, or throws a {@link
RuntimeException} if the upload fails
     */
    public CompletableFuture<PutObjectResponse> uploadLocalFileAsync(String
bucketName, String key, String objectPath) {
```

```
        PutObjectRequest objectRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();

        CompletableFuture<PutObjectResponse> response =
getAsyncClient().putObject(objectRequest,
AsyncRequestBody.fromFile(Paths.get(objectPath)));
        return response.whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to upload file", ex);
            }
        });
    }


    /**
     * Asynchronously retrieves the bytes of an object from an Amazon S3 bucket and
writes them to a local file.
     *
     * @param bucketName the name of the S3 bucket containing the object
     * @param keyName    the key (or name) of the S3 object to retrieve
     * @param path       the local file path where the object's bytes will be
written
     * @return a {@link CompletableFuture} that completes when the object bytes have
been written to the local file
     */
    public CompletableFuture<Void> getObjectBytesAsync(String bucketName, String
keyName, String path) {
        GetObjectRequest objectRequest = GetObjectRequest.builder()
            .key(keyName)
            .bucket(bucketName)
            .build();

        CompletableFuture<ResponseBytes<GetObjectResponse>> response =
getAsyncClient().getObject(objectRequest, AsyncResponseTransformer.toBytes());
        return response.thenAccept(objectBytes -> {
            try {
                byte[] data = objectBytes.asByteArray();
                Path filePath = Paths.get(path);
                Files.write(filePath, data);
                logger.info("Successfully obtained bytes from an S3 object");
            } catch (IOException ex) {
                throw new RuntimeException("Failed to write data to file", ex);
```

```
            }
        }).whenComplete((resp, ex) -> {
            if (ex != null) {
                throw new RuntimeException("Failed to get object bytes from S3",
ex);
            }
        });
    }


    /**
     * Asynchronously lists all objects in the specified S3 bucket.
     *
     * @param bucketName the name of the S3 bucket to list objects for
     * @return a {@link CompletableFuture} that completes when all objects have been
listed
     */
    public CompletableFuture<Void> listAllObjectsAsync(String bucketName) {
        ListObjectsV2Request initialRequest = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .maxKeys(1)
            .build();

        ListObjectsV2Publisher paginator =
getAsyncClient().listObjectsV2Paginator(initialRequest);
        return paginator.subscribe(response -> {
            response.contents().forEach(s3Object -> {
                logger.info("Object key: " + s3Object.key());
            });
        }).thenRun(() -> {
            logger.info("Successfully listed all objects in the bucket: " +
bucketName);
        }).exceptionally(ex -> {
            throw new RuntimeException("Failed to list objects", ex);
        });
    }


    /**
     * Asynchronously copies an object from one S3 bucket to another.
     *
     * @param fromBucket the name of the source S3 bucket
     * @param objectKey  the key (name) of the object to be copied
     * @param toBucket   the name of the destination S3 bucket
```

```
    * @return a {@link CompletableFuture} that completes with the copy result as a
{@link String}
    * @throws RuntimeException if the URL could not be encoded or an S3 exception
occurred during the copy
    */
   public CompletableFuture<String> copyBucketObjectAsync(String fromBucket, String
objectKey, String toBucket) {
       CopyObjectRequest copyReq = CopyObjectRequest.builder()
           .sourceBucket(fromBucket)
           .sourceKey(objectKey)
           .destinationBucket(toBucket)
           .destinationKey(objectKey)
           .build();

       CompletableFuture<CopyObjectResponse> response =
getAsyncClient().copyObject(copyReq);
       response.whenComplete((copyRes, ex) -> {
           if (copyRes != null) {
               logger.info("The " + objectKey + " was copied to " + toBucket);
           } else {
               throw new RuntimeException("An S3 exception occurred during copy",
ex);
           }
       });

       return response.thenApply(CopyObjectResponse::copyObjectResult)
           .thenApply(Object::toString);
   }

   /**
    * Performs a multipart upload to an Amazon S3 bucket.
    *
    * @param bucketName the name of the S3 bucket to upload the file to
    * @param key        the key (name) of the file to be uploaded
    * @return a {@link CompletableFuture} that completes when the multipart upload
is successful
    */
   public CompletableFuture<Void> multipartUpload(String bucketName, String key) {
       int mB = 1024 * 1024;

       CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
           .bucket(bucketName)
           .key(key)
```

```
            .build();

        return getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
            .thenCompose(createResponse -> {
                String uploadId = createResponse.uploadId();
                System.out.println("Upload ID: " + uploadId);

                // Upload part 1.
                UploadPartRequest uploadPartRequest1 = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(1)
                    .contentLength((long) (5 * mB)) // Specify the content length
                    .build();

                CompletableFuture<CompletedPart> part1Future =
getAsyncClient().uploadPart(uploadPartRequest1,
                        AsyncRequestBody.fromByteBuffer(getRandomByteBuffer(5 *
mB)))
                    .thenApply(uploadPartResponse -> CompletedPart.builder()
                        .partNumber(1)
                        .eTag(uploadPartResponse.eTag())
                        .build());

                // Upload part 2.
                UploadPartRequest uploadPartRequest2 = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(2)
                    .contentLength((long) (3 * mB))
                    .build();

                CompletableFuture<CompletedPart> part2Future =
getAsyncClient().uploadPart(uploadPartRequest2,
                        AsyncRequestBody.fromByteBuffer(getRandomByteBuffer(3 *
mB)))
                    .thenApply(uploadPartResponse -> CompletedPart.builder()
                        .partNumber(2)
                        .eTag(uploadPartResponse.eTag())
                        .build());

                // Combine the results of both parts.
```

```
                return CompletableFuture.allOf(part1Future, part2Future)
                    .thenCompose(v -> {
                        CompletedPart part1 = part1Future.join();
                        CompletedPart part2 = part2Future.join();

                        CompletedMultipartUpload completedMultipartUpload =
CompletedMultipartUpload.builder()
                            .parts(part1, part2)
                            .build();

                        CompleteMultipartUploadRequest
completeMultipartUploadRequest = CompleteMultipartUploadRequest.builder()
                            .bucket(bucketName)
                            .key(key)
                            .uploadId(uploadId)
                            .multipartUpload(completedMultipartUpload)
                            .build();

                        // Complete the multipart upload
                        return
getAsyncClient().completeMultipartUpload(completeMultipartUploadRequest);
                    });
            })
            .thenAccept(response -> System.out.println("Multipart upload completed
successfully"))
            .exceptionally(ex -> {
                System.err.println("Failed to complete multipart upload: " +
ex.getMessage());
                throw new RuntimeException(ex);
            });
    }


    /**
     * Deletes an object from an S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket
     * @param key        the key (file name) of the object to be deleted
     * @return a {@link CompletableFuture} that completes when the object has been
deleted
     */
    public CompletableFuture<Void> deleteObjectFromBucketAsync(String bucketName,
String key) {
        DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
```

```
            .bucket(bucketName)
            .key(key)
            .build();

        CompletableFuture<DeleteObjectResponse> response =
getAsyncClient().deleteObject(deleteObjectRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(key + " was deleted");
            } else {
                throw new RuntimeException("An S3 exception occurred during delete",
ex);
            }
        });

        return response.thenApply(r -> null);
    }


    /**
     * Deletes an S3 bucket asynchronously.
     *
     * @param bucket the name of the bucket to be deleted
     * @return a {@link CompletableFuture} that completes when the bucket deletion
is successful, or throws a {@link RuntimeException}
     * if an error occurs during the deletion process
     */
    public CompletableFuture<Void> deleteBucketAsync(String bucket) {
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
            .bucket(bucket)
            .build();

        CompletableFuture<DeleteBucketResponse> response =
getAsyncClient().deleteBucket(deleteBucketRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(bucket + " was deleted.");
            } else {
                throw new RuntimeException("An S3 exception occurred during bucket
deletion", ex);
            }
        });
        return response.thenApply(r -> null);
    }
```

```
   public CompletableFuture<String> performMultiCopy(String toBucket, String
bucketName, String key) {
       CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
           .bucket(toBucket)
           .key(key)
           .build();

       getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
           .thenApply(createMultipartUploadResponse -> {
               String uploadId = createMultipartUploadResponse.uploadId();
               System.out.println("Upload ID: " + uploadId);

               UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                   .sourceBucket(bucketName)
                   .destinationBucket(toBucket)
                   .sourceKey(key)
                   .destinationKey(key)
                   .uploadId(uploadId)  // Use the valid uploadId.
                   .partNumber(1)  // Ensure the part number is correct.
                   .copySourceRange("bytes=0-1023")  // Adjust range as needed
                   .build();

               return getAsyncClient().uploadPartCopy(uploadPartCopyRequest);
           })
           .thenCompose(uploadPartCopyFuture -> uploadPartCopyFuture)
           .whenComplete((uploadPartCopyResponse, exception) -> {
               if (exception != null) {
                   // Handle any exceptions.
                   logger.error("Error during upload part copy: " +
exception.getMessage());
               } else {
                   // Successfully completed the upload part copy.
                   System.out.println("Upload Part Copy completed successfully.
ETag: " + uploadPartCopyResponse.copyPartResult().eTag());
               }
           });
       return null;
   }

   private static ByteBuffer getRandomByteBuffer(int size) {
       ByteBuffer buffer = ByteBuffer.allocate(size);
```

```
        for (int i = 0; i < size; i++) {
            buffer.put((byte) (Math.random() * 256));
        }
        buffer.flip();
        return buffer;
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObjects
  - GetObject
  - ListObjectsV2
  - PutObject

## Tindakan

### `AbortMultipartUpload`

Contoh kode berikut menunjukkan cara menggunakan`AbortMultipartUpload`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.services.sts.StsClient;
import software.amazon.awssdk.utils.builder.SdkBuilder;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
import java.time.Duration;
import java.time.Instant;
import java.util.ArrayList;
import java.util.Collection;
import java.util.List;
import java.util.Objects;
import java.util.UUID;

import static software.amazon.awssdk.transfer.s3.SizeConstant.KB;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class AbortMultipartUploadExamples {
```

```
    static final String bucketName = "amzn-s3-demo-bucket" + UUID.randomUUID(); //
 Change bucket name.
    static final String key = UUID.randomUUID().toString();
    static final String classPathFilePath = "/multipartUploadFiles/s3-
userguide.pdf";
    static final String filePath = getFullFilePath(classPathFilePath);
    static final S3Client s3Client = S3Client.create();
    private static final Logger logger =
 LoggerFactory.getLogger(AbortMultipartUploadExamples.class);
    private static String accountId = getAccountId();

    public static void main(String[] args) {
        doAbortIncompleteMultipartUploadsFromList();
        doAbortMultipartUploadUsingUploadId();
        doAbortIncompleteMultipartUploadsOlderThan();
        doAbortMultipartUploadsUsingLifecycleConfig();
    }

    // A wrapper method that sets up the multipart upload environment for
 abortIncompleteMultipartUploadsFromList().
    public static void doAbortIncompleteMultipartUploadsFromList() {
        createBucket();
        initiateAndInterruptMultiPartUpload("uploadThread");
        abortIncompleteMultipartUploadsFromList();
        deleteResources();
    }

    /**
     * Aborts all incomplete multipart uploads from the specified S3 bucket.
     * <p>
     * This method retrieves a list of all incomplete multipart uploads in the
 specified S3 bucket,
     * and then aborts each of those uploads.
     */
    public static void abortIncompleteMultipartUploadsFromList() {
        ListMultipartUploadsRequest listMultipartUploadsRequest =
 ListMultipartUploadsRequest.builder()
            .bucket(bucketName)
            .build();

        ListMultipartUploadsResponse response =
 s3Client.listMultipartUploads(listMultipartUploadsRequest);
        List<MultipartUpload> uploads = response.uploads();
```

```
        AbortMultipartUploadRequest abortMultipartUploadRequest;
        for (MultipartUpload upload : uploads) {
            abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                .bucket(bucketName)
                .key(upload.key())
                .expectedBucketOwner(accountId)
                .uploadId(upload.uploadId())
                .build();

            AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
            if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
upload.uploadId(), bucketName);
            }
        }
    }

    // A wrapper method that sets up the multipart upload environment for
abortIncompleteMultipartUploadsOlderThan().
    static void doAbortIncompleteMultipartUploadsOlderThan() {
        createBucket();
        Instant secondUploadInstant = initiateAndInterruptTwoUploads();
        abortIncompleteMultipartUploadsOlderThan(secondUploadInstant);
        deleteResources();
    }

    static void abortIncompleteMultipartUploadsOlderThan(Instant pointInTime) {
        ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
            .bucket(bucketName)
            .build();

        ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
        List<MultipartUpload> uploads = response.uploads();

        AbortMultipartUploadRequest abortMultipartUploadRequest;
        for (MultipartUpload upload : uploads) {
            logger.info("Found multipartUpload with upload ID [{}], initiated [{}]",
upload.uploadId(), upload.initiated());
            if (upload.initiated().isBefore(pointInTime)) {
                abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
```

```
                    .key(upload.key())
                    .expectedBucketOwner(accountId)
                    .uploadId(upload.uploadId())
                    .build();

                AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
                if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                    logger.info("Upload ID [{}] to bucket [{}] successfully
aborted.", upload.uploadId(), bucketName);
                }
            }
        }
    }

    // A wrapper method that sets up the multipart upload environment for
abortMultipartUploadUsingUploadId().
    static void doAbortMultipartUploadUsingUploadId() {
        createBucket();
        try {
            abortMultipartUploadUsingUploadId();
        } catch (S3Exception e) {
            logger.error(e.getMessage());
        } finally {
            deleteResources();
        }
    }

    static void abortMultipartUploadUsingUploadId() {
        String uploadId = startUploadReturningUploadId();
        AbortMultipartUploadResponse response = s3Client.abortMultipartUpload(b -> b
            .uploadId(uploadId)
            .bucket(bucketName)
            .key(key));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
uploadId, bucketName);
        }
    }

    // A wrapper method that sets up the multipart upload environment for
abortMultipartUploadsUsingLifecycleConfig().
    static void doAbortMultipartUploadsUsingLifecycleConfig() {
```

```
        createBucket();
        try {
            abortMultipartUploadsUsingLifecycleConfig();
        } catch (S3Exception e) {
            logger.error(e.getMessage());
        } finally {
            deleteResources();
        }
    }

    static void abortMultipartUploadsUsingLifecycleConfig() {
        Collection<LifecycleRule> lifeCycleRules = List.of(LifecycleRule.builder()
            .abortIncompleteMultipartUpload(b -> b.
                daysAfterInitiation(7))
            .status("Enabled")
            .filter(SdkBuilder::build) // Filter element is required.
            .build());

        // If the action is successful, the service sends back an HTTP 200 response
with an empty HTTP body.
        PutBucketLifecycleConfigurationResponse response =
s3Client.putBucketLifecycleConfiguration(b -> b
            .bucket(bucketName)
            .lifecycleConfiguration(b1 -> b1.rules(lifeCycleRules)));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Rule to abort incomplete multipart uploads added to
bucket.");
        } else {
            logger.error("Unsuccessfully applied rule. HTTP status code is [{}]",
response.sdkHttpResponse().statusCode());
        }
    }

    /************************
     Multipart upload methods
     ************************/

    static void initiateAndInterruptMultiPartUpload(String threadName) {
        Runnable upload = () -> {
            try {
                AbortMultipartUploadExamples.doMultipartUpload();
            } catch (SdkException e) {
                logger.error(e.getMessage());
```

```
            }
        };
        Thread uploadThread = new Thread(upload, threadName);
        uploadThread.start();
        try {
            Thread.sleep(Duration.ofSeconds(1).toMillis()); // Give the multipart
upload time to register.
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
        }
        uploadThread.interrupt();
    }

    static Instant initiateAndInterruptTwoUploads() {
        Instant firstUploadInstant = Instant.now();
        initiateAndInterruptMultiPartUpload("uploadThread1");
        try {
            Thread.sleep(Duration.ofSeconds(5).toMillis());
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
        }
        Instant secondUploadInstant = Instant.now();
        initiateAndInterruptMultiPartUpload("uploadThread2");
        return secondUploadInstant;
    }

    static void doMultipartUpload() {
        String uploadId = step1CreateMultipartUpload();
        List<CompletedPart> completedParts = step2UploadParts(uploadId);
        step3CompleteMultipartUpload(uploadId, completedParts);
    }

    static String step1CreateMultipartUpload() {
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key));
        return createMultipartUploadResponse.uploadId();
    }

    static List<CompletedPart> step2UploadParts(String uploadId) {
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(Long.valueOf(1024 * KB).intValue());
```

```
        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);
                logger.info("Part {} upload", partNumber);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException | S3Exception e) {
            logger.error(e.getMessage());
            return null;
        }
        return completedParts;
    }

    static void step3CompleteMultipartUpload(String uploadId, List<CompletedPart>
completedParts) {
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
```

```
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }

    static String startUploadReturningUploadId() {
        String uploadId = step1CreateMultipartUpload();
        doMultipartUploadWithUploadId(uploadId);
        return uploadId;

    }

    static void doMultipartUploadWithUploadId(String uploadId) {
        new Thread(() -> {
            try {
                List<CompletedPart> completedParts = step2UploadParts(uploadId);
                step3CompleteMultipartUpload(uploadId, completedParts);
            } catch (SdkException e) {
                logger.error(e.getMessage());
            }
        }, "upload thread").start();
        try {
            Thread.sleep(Duration.ofSeconds(2L).toMillis());
        } catch (InterruptedException e) {
            logger.error(e.getMessage());
            System.exit(1);
        }
    }

    /************************
     Resource handling methods
     ************************/

    static void createBucket() {
        logger.info("Creating bucket: [{}]", bucketName);
        s3Client.createBucket(b -> b.bucket(bucketName));
        try (S3Waiter s3Waiter = s3Client.waiter()) {
            s3Waiter.waitUntilBucketExists(b -> b.bucket(bucketName));
        }
        logger.info("Bucket created.");
    }

    static void deleteResources() {
        logger.info("Deleting resources ...");
```

```
        s3Client.deleteObject(b -> b.bucket(bucketName).key(key));
        s3Client.deleteBucket(b -> b.bucket(bucketName));
        try (S3Waiter s3Waiter = s3Client.waiter()) {
            s3Waiter.waitUntilBucketNotExists(b -> b.bucket(bucketName));
        }
        logger.info("Resources deleted.");
    }

    private static String getAccountId() {
        try (StsClient stsClient = StsClient.create()) {
            return stsClient.getCallerIdentity().account();
        }
    }

    static String getFullFilePath(String filePath) {
        URL uploadDirectoryURL = PerformMultiPartUpload.class.getResource(filePath);
        String fullFilePath;
        try {
            fullFilePath =
 Objects.requireNonNull(uploadDirectoryURL).toURI().getPath();
        } catch (URISyntaxException e) {
            throw new RuntimeException(e);
        }
        return fullFilePath;
    }
}
```

- Untuk detail API, lihat AbortMultipartUploaddi Referensi AWS SDK for Java 2.x API.

### `CopyObject`

Contoh kode berikut menunjukkan cara menggunakan`CopyObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Salin objek menggunakan S3Client.

```
   /**
    * Asynchronously copies an object from one S3 bucket to another.
    *
    * @param fromBucket the name of the source S3 bucket
    * @param objectKey  the key (name) of the object to be copied
    * @param toBucket   the name of the destination S3 bucket
    * @return a {@link CompletableFuture} that completes with the copy result as a
{@link String}
    * @throws RuntimeException if the URL could not be encoded or an S3 exception
occurred during the copy
    */
   public CompletableFuture<String> copyBucketObjectAsync(String fromBucket, String
objectKey, String toBucket) {
       CopyObjectRequest copyReq = CopyObjectRequest.builder()
           .sourceBucket(fromBucket)
           .sourceKey(objectKey)
           .destinationBucket(toBucket)
           .destinationKey(objectKey)
           .build();

       CompletableFuture<CopyObjectResponse> response =
getAsyncClient().copyObject(copyReq);
       response.whenComplete((copyRes, ex) -> {
           if (copyRes != null) {
               logger.info("The " + objectKey + " was copied to " + toBucket);
           } else {
               throw new RuntimeException("An S3 exception occurred during copy",
ex);
           }
       });

       return response.thenApply(CopyObjectResponse::copyObjectResult)
           .thenApply(Object::toString);
   }
```

Gunakan S3 TransferManager untuk menyalin objek dari satu ember ke ember lainnya. Lihat file lengkap dan lakukan pengujian.

```
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedCopy;
import software.amazon.awssdk.transfer.s3.model.Copy;
import software.amazon.awssdk.transfer.s3.model.CopyRequest;

import java.util.UUID;

    public String copyObject(S3TransferManager transferManager, String bucketName,
            String key, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyObjectRequest = CopyObjectRequest.builder()
                .sourceBucket(bucketName)
                .sourceKey(key)
                .destinationBucket(destinationBucket)
                .destinationKey(destinationKey)
                .build();

        CopyRequest copyRequest = CopyRequest.builder()
                .copyObjectRequest(copyObjectRequest)
                .build();

        Copy copy = transferManager.copy(copyRequest);

        CompletedCopy completedCopy = copy.completionFuture().join();
        return completedCopy.response().copyObjectResult().eTag();
    }
```

- Untuk detail API, lihat CopyObjectdi Referensi AWS SDK for Java 2.x API.

### `CreateBucket`

Contoh kode berikut menunjukkan cara menggunakan`CreateBucket`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat bucket.

```
   /**
    * Creates an S3 bucket asynchronously.
    *
    * @param bucketName the name of the S3 bucket to create
    * @return a {@link CompletableFuture} that completes when the bucket is created
and ready
    * @throws RuntimeException if there is a failure while creating the bucket
    */
   public CompletableFuture<Void> createBucketAsync(String bucketName) {
       CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
           .bucket(bucketName)
           .build();

       CompletableFuture<CreateBucketResponse> response =
getAsyncClient().createBucket(bucketRequest);
       return response.thenCompose(resp -> {
           S3AsyncWaiter s3Waiter = getAsyncClient().waiter();
           HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
               .bucket(bucketName)
               .build();

           CompletableFuture<WaiterResponse<HeadBucketResponse>>
waiterResponseFuture =
               s3Waiter.waitUntilBucketExists(bucketRequestWait);
           return waiterResponseFuture.thenAccept(waiterResponse -> {
               waiterResponse.matched().response().ifPresent(headBucketResponse ->
{
                   logger.info(bucketName + " is ready");
               });
           });
       }).whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to create bucket", ex);
           }
       });
   }
```

Buat ember dengan kunci objek diaktifkan.

```
    // Create a new Amazon S3 bucket with object lock options.
    public void createBucketWithLockOptions(boolean enableObjectLock, String
bucketName) {
        S3Waiter s3Waiter = getClient().waiter();
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .objectLockEnabledForBucket(enableObjectLock)
            .build();

        getClient().createBucket(bucketRequest);
        HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
            .bucket(bucketName)
            .build();

        // Wait until the bucket is created and print out the response.
        s3Waiter.waitUntilBucketExists(bucketRequestWait);
        System.out.println(bucketName + " is ready");
    }
```

- Untuk detail API, lihat CreateBucketdi Referensi AWS SDK for Java 2.x API.

### `DeleteBucket`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucket`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an S3 bucket asynchronously.
     *
     * @param bucket the name of the bucket to be deleted
     * @return a {@link CompletableFuture} that completes when the bucket deletion
is successful, or throws a {@link RuntimeException}
```

```
     * if an error occurs during the deletion process
     */
    public CompletableFuture<Void> deleteBucketAsync(String bucket) {
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
            .bucket(bucket)
            .build();

        CompletableFuture<DeleteBucketResponse> response =
getAsyncClient().deleteBucket(deleteBucketRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(bucket + " was deleted.");
            } else {
                throw new RuntimeException("An S3 exception occurred during bucket
deletion", ex);
            }
        });
        return response.thenApply(r -> null);
    }
```

- Untuk detail API, lihat DeleteBucketdi Referensi AWS SDK for Java 2.x API.

### `DeleteBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketPolicyRequest;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteBucketPolicy {
    public static void main(String[] args) {

        final String usage = """

                Usage:
                    <bucketName>

                Where:
                    bucketName - The Amazon S3 bucket to delete the policy from (for
 example, bucket1).""";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Deleting policy from bucket: \"%s\"\n\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
                .region(region)
                .build();

        deleteS3BucketPolicy(s3, bucketName);
        s3.close();
    }

    /**
     * Deletes the S3 bucket policy for the specified bucket.
     *
     * @param s3 the {@link S3Client} instance to use for the operation
     * @param bucketName the name of the S3 bucket for which the policy should be
 deleted
     *
     * @throws S3Exception if there is an error deleting the bucket policy
     */
```

```
    public static void deleteS3BucketPolicy(S3Client s3, String bucketName) {
        DeleteBucketPolicyRequest delReq = DeleteBucketPolicyRequest.builder()
                .bucket(bucketName)
                .build();

        try {
            s3.deleteBucketPolicy(delReq);
            System.out.println("Done!");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `DeleteBucketWebsite`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucketWebsite`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketWebsiteRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
```

```
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteWebsiteConfiguration {
    public static void main(String[] args) {
        final String usage = """

            Usage:     <bucketName>

            Where:
                bucketName - The Amazon S3 bucket to delete the website
 configuration from.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Deleting website configuration for Amazon S3 bucket: %s
\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        deleteBucketWebsiteConfig(s3, bucketName);
        System.out.println("Done!");
        s3.close();
    }

    /**
     * Deletes the website configuration for an Amazon S3 bucket.
     *
     * @param s3 The {@link S3Client} instance used to interact with Amazon S3.
     * @param bucketName The name of the S3 bucket for which the website
 configuration should be deleted.
     * @throws S3Exception If an error occurs while deleting the website
 configuration.
     */
    public static void deleteBucketWebsiteConfig(S3Client s3, String bucketName) {
        DeleteBucketWebsiteRequest delReq = DeleteBucketWebsiteRequest.builder()
```

```
            .bucket(bucketName)
            .build();

        try {
            s3.deleteBucketWebsite(delReq);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.out.println("Failed to delete website configuration!");
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteBucketWebsitedi Referensi AWS SDK for Java 2.x API.

### `DeleteObject`

Contoh kode berikut menunjukkan cara menggunakan`DeleteObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes an object from an S3 bucket asynchronously.
    *
    * @param bucketName the name of the S3 bucket
    * @param key        the key (file name) of the object to be deleted
    * @return a {@link CompletableFuture} that completes when the object has been
deleted
    */
   public CompletableFuture<Void> deleteObjectFromBucketAsync(String bucketName,
String key) {
       DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
           .bucket(bucketName)
```

```
            .key(key)
            .build();

        CompletableFuture<DeleteObjectResponse> response =
getAsyncClient().deleteObject(deleteObjectRequest);
        response.whenComplete((deleteRes, ex) -> {
            if (deleteRes != null) {
                logger.info(key + " was deleted");
            } else {
                throw new RuntimeException("An S3 exception occurred during delete",
ex);
            }
        });

        return response.thenApply(r -> null);
    }
```

- Untuk detail API, lihat DeleteObjectdi Referensi AWS SDK for Java 2.x API.

### `DeleteObjects`

Contoh kode berikut menunjukkan cara menggunakan`DeleteObjects`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.Delete;
import software.amazon.awssdk.services.s3.model.DeleteObjectsRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import java.util.ArrayList;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class DeleteMultiObjects {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <bucketName>

            Where:
               bucketName - the Amazon S3 bucket name.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        deleteBucketObjects(s3, bucketName);
        s3.close();
    }

    /**
     * Deletes multiple objects from an Amazon S3 bucket.
     *
     * @param s3 An Amazon S3 client object.
     * @param bucketName The name of the Amazon S3 bucket to delete objects from.
     */
    public static void deleteBucketObjects(S3Client s3, String bucketName) {
        // Upload three sample objects to the specfied Amazon S3 bucket.
```

```
        ArrayList<ObjectIdentifier> keys = new ArrayList<>();
        PutObjectRequest putOb;
        ObjectIdentifier objectId;

        for (int i = 0; i < 3; i++) {
            String keyName = "delete object example " + i;
            objectId = ObjectIdentifier.builder()
                .key(keyName)
                .build();

            putOb = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(keyName)
                .build();

            s3.putObject(putOb, RequestBody.fromString(keyName));
            keys.add(objectId);
        }

        System.out.println(keys.size() + " objects successfully created.");

        // Delete multiple objects in one request.
        Delete del = Delete.builder()
            .objects(keys)
            .build();

        try {
            DeleteObjectsRequest multiObjectDeleteRequest =
 DeleteObjectsRequest.builder()
                .bucket(bucketName)
                .delete(del)
                .build();

            s3.deleteObjects(multiObjectDeleteRequest);
            System.out.println("Multiple objects are deleted!");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteObjectsdi Referensi AWS SDK for Java 2.x API.

### `GetBucketAcl`

Contoh kode berikut menunjukkan cara menggunakan`GetBucketAcl`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectAclRequest;
import software.amazon.awssdk.services.s3.model.GetObjectAclResponse;
import software.amazon.awssdk.services.s3.model.Grant;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetAcl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
              <bucketName> <objectKey>

            Where:
```

```
            bucketName - The Amazon S3 bucket to get the access control list (ACL)
for.
            objectKey - The object to get the ACL for.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String objectKey = args[1];
        System.out.println("Retrieving ACL for object: " + objectKey);
        System.out.println("in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getBucketACL(s3, objectKey, bucketName);
        s3.close();
        System.out.println("Done!");
    }

    /**
     * Retrieves the Access Control List (ACL) for an object in an Amazon S3 bucket.
     *
     * @param s3 The S3Client object used to interact with the Amazon S3 service.
     * @param objectKey The key of the object for which the ACL is to be retrieved.
     * @param bucketName The name of the bucket containing the object.
     * @return The ID of the grantee who has permission on the object, or an empty
string if an error occurs.
     */
    public static String getBucketACL(S3Client s3, String objectKey, String
bucketName) {
        try {
            GetObjectAclRequest aclReq = GetObjectAclRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectAclResponse aclRes = s3.getObjectAcl(aclReq);
            List<Grant> grants = aclRes.grants();
            String grantee = "";
```

```
            for (Grant grant : grants) {
                System.out.format("  %s: %s\n", grant.grantee().id(),
 grant.permission());
                grantee = grant.grantee().id();
            }

            return grantee;
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
}
```

- Untuk detail API, lihat GetBucketAcldi Referensi AWS SDK for Java 2.x API.

### `GetBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`GetBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
```

```
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetBucketPolicy {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName>

            Where:
                bucketName - The Amazon S3 bucket to get the policy from.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        System.out.format("Getting policy for bucket: \"%s\"\n\n", bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        String polText = getPolicy(s3, bucketName);
        System.out.println("Policy Text: " + polText);
        s3.close();
    }

    /**
     * Retrieves the policy for the specified Amazon S3 bucket.
     *
     * @param s3 the {@link S3Client} instance to use for making the request
     * @param bucketName the name of the S3 bucket for which to retrieve the policy
     * @return the policy text for the specified bucket, or an empty string if an
 error occurs
     */
    public static String getPolicy(S3Client s3, String bucketName) {
        String policyText;
        System.out.format("Getting policy for bucket: \"%s\"\n\n", bucketName);
```

```
        GetBucketPolicyRequest policyReq = GetBucketPolicyRequest.builder()
            .bucket(bucketName)
            .build();

        try {
            GetBucketPolicyResponse policyRes = s3.getBucketPolicy(policyReq);
            policyText = policyRes.policy();
            return policyText;

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        return "";
    }
}
```

- Untuk detail API, lihat GetBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `GetBucketReplication`

Contoh kode berikut menunjukkan cara menggunakan`GetBucketReplication`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Retrieves the replication details for the specified S3 bucket.
     *
     * @param s3Client           the S3 client used to interact with the S3 service
     * @param sourceBucketName   the name of the S3 bucket to retrieve the
 replication details for
     *
     * @throws S3Exception if there is an error retrieving the replication details
     */
```

```
   public static void getReplicationDetails(S3Client s3Client, String
sourceBucketName) {
       GetBucketReplicationRequest getRequest =
GetBucketReplicationRequest.builder()
           .bucket(sourceBucketName)
           .build();

       try {
           ReplicationConfiguration replicationConfig =
s3Client.getBucketReplication(getRequest).replicationConfiguration();
           ReplicationRule rule = replicationConfig.rules().get(0);
           System.out.println("Retrieved destination bucket: " +
rule.destination().bucket());
           System.out.println("Retrieved priority: " + rule.priority());
           System.out.println("Retrieved source-bucket replication rule status: " +
rule.status());

       } catch (S3Exception e) {
           System.err.println("Failed to retrieve replication details: " +
e.awsErrorDetails().errorMessage());
       }
   }
```

- Untuk detail API, lihat GetBucketReplicationdi Referensi AWS SDK for Java 2.x API.

### `GetObject`

Contoh kode berikut menunjukkan cara menggunakan`GetObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Membaca data sebagai array byte menggunakan S3Client.

```
   /**
```

```
    * Asynchronously retrieves the bytes of an object from an Amazon S3 bucket and
writes them to a local file.
    *
    * @param bucketName the name of the S3 bucket containing the object
    * @param keyName    the key (or name) of the S3 object to retrieve
    * @param path       the local file path where the object's bytes will be
written
    * @return a {@link CompletableFuture} that completes when the object bytes have
been written to the local file
    */
   public CompletableFuture<Void> getObjectBytesAsync(String bucketName, String
keyName, String path) {
       GetObjectRequest objectRequest = GetObjectRequest.builder()
           .key(keyName)
           .bucket(bucketName)
           .build();

       CompletableFuture<ResponseBytes<GetObjectResponse>> response =
getAsyncClient().getObject(objectRequest, AsyncResponseTransformer.toBytes());
       return response.thenAccept(objectBytes -> {
           try {
               byte[] data = objectBytes.asByteArray();
               Path filePath = Paths.get(path);
               Files.write(filePath, data);
               logger.info("Successfully obtained bytes from an S3 object");
           } catch (IOException ex) {
               throw new RuntimeException("Failed to write data to file", ex);
           }
       }).whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to get object bytes from S3",
ex);
           }
       });
   }
```

Gunakan S3 TransferManager untuk mengunduh objek dalam bucket S3 ke file lokal. Lihat file lengkap dan lakukan pengujian.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
```

```
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadFileRequest;
import software.amazon.awssdk.transfer.s3.model.FileDownload;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;

import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Files;
import java.nio.file.NoSuchFileException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.UUID;

    public Long downloadFile(S3TransferManager transferManager, String bucketName,
                             String key, String downloadedFileWithPath) {
        DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
                .getObjectRequest(b -> b.bucket(bucketName).key(key))
                .destination(Paths.get(downloadedFileWithPath))
                .build();

        FileDownload downloadFile =
 transferManager.downloadFile(downloadFileRequest);

        CompletedFileDownload downloadResult =
 downloadFile.completionFuture().join();
        logger.info("Content length [{}]",
 downloadResult.response().contentLength());
        return downloadResult.response().contentLength();
    }
```

Baca tanda milik objek menggunakan S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectTaggingRequest;
import software.amazon.awssdk.services.s3.model.GetObjectTaggingResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import software.amazon.awssdk.services.s3.model.Tag;

import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectTags {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listTags(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Lists the tags associated with an Amazon S3 object.
     *
```

```
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket that contains the object
     * @param keyName the key (name) of the S3 object
     */
    public static void listTags(S3Client s3, String bucketName, String keyName) {
        try {
            GetObjectTaggingRequest getTaggingRequest = GetObjectTaggingRequest
                .builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            GetObjectTaggingResponse tags = s3.getObjectTagging(getTaggingRequest);
            List<Tag> tagSet = tags.tagSet();
            for (Tag tag : tagSet) {
                System.out.println(tag.key());
                System.out.println(tag.value());
            }

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Dapatkan URL untuk objek menggunakan S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetUrlRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.net.URL;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectUrl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getURL(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Retrieves the URL for a specific object in an Amazon S3 bucket.
     *
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket where the object is stored
     * @param keyName the name of the object for which the URL should be retrieved
     * @throws S3Exception if there is an error retrieving the URL for the specified
 object
     */
    public static void getURL(S3Client s3, String bucketName, String keyName) {
        try {
            GetUrlRequest request = GetUrlRequest.builder()
                .bucket(bucketName)
```

```
                .key(keyName)
                .build();

            URL url = s3.utilities().getUrl(request);
            System.out.println("The URL for  " + keyName + " is " + url);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Dapatkan objek dengan menggunakan objek klien S3Presigner menggunakan S3Client.

```
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.net.HttpURLConnection;
import java.time.Duration;

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.utils.IoUtils;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObjectPresignedUrl {
    public static void main(String[] args) {
        final String USAGE = """
```

```
            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents a text file.\s
            """;

        if (args.length != 2) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Presigner presigner = S3Presigner.builder()
            .region(region)
            .build();

        getPresignedUrl(presigner, bucketName, keyName);
        presigner.close();
    }

    /**
     * Generates a pre-signed URL for an Amazon S3 object.
     *
     * @param presigner The {@link S3Presigner} instance to use for generating the
pre-signed URL.
     * @param bucketName The name of the Amazon S3 bucket where the object is
stored.
     * @param keyName The key name (file name) of the object in the Amazon S3
bucket.
     *
     * @throws S3Exception If there is an error interacting with the Amazon S3
service.
     * @throws IOException If there is an error opening the HTTP connection or
reading/writing the request/response.
     */
    public static void getPresignedUrl(S3Presigner presigner, String bucketName,
String keyName) {
        try {
            GetObjectRequest getObjectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
```

```
                .key(keyName)
                .build();

            GetObjectPresignRequest getObjectPresignRequest =
GetObjectPresignRequest.builder()
                .signatureDuration(Duration.ofMinutes(60))
                .getObjectRequest(getObjectRequest)
                .build();

            PresignedGetObjectRequest presignedGetObjectRequest =
presigner.presignGetObject(getObjectPresignRequest);
            String theUrl = presignedGetObjectRequest.url().toString();
            System.out.println("Presigned URL: " + theUrl);
            HttpURLConnection connection = (HttpURLConnection)
presignedGetObjectRequest.url().openConnection();
            presignedGetObjectRequest.httpRequest().headers().forEach((header,
values) -> {
                values.forEach(value -> {
                    connection.addRequestProperty(header, value);
                });
            });

            // Send any request payload that the service needs (not needed when
            // isBrowserExecutable is true).
            if (presignedGetObjectRequest.signedPayload().isPresent()) {
                connection.setDoOutput(true);

                try (InputStream signedPayload =
presignedGetObjectRequest.signedPayload().get().asInputStream();
                     OutputStream httpOutputStream = connection.getOutputStream()) {
                    IoUtils.copy(signedPayload, httpOutputStream);
                }
            }

            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                System.out.println("Service returned response: ");
                IoUtils.copy(content, System.out);
            }

        } catch (S3Exception | IOException e) {
            e.printStackTrace();
        }
    }
```

```
}
```

Dapatkan objek dengan menggunakan ResponseTransformer objek dan S3Client.

```
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.core.sync.ResponseTransformer;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;

import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.OutputStream;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class GetObjectData {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName> <path>

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name.\s
                path - The path where the file is written to.\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        String path = args[2];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getObjectBytes(s3, bucketName, keyName, path);
        s3.close();
    }

    /**
     * Retrieves the bytes of an object stored in an Amazon S3 bucket and saves them
to a local file.
     *
     * @param s3 The S3Client instance used to interact with the Amazon S3 service.
     * @param bucketName The name of the S3 bucket where the object is stored.
     * @param keyName The key (or name) of the S3 object.
     * @param path The local file path where the object's bytes will be saved.
     * @throws IOException If an I/O error occurs while writing the bytes to the
local file.
     * @throws S3Exception If an error occurs while retrieving the object from the
S3 bucket.
     */
    public static void getObjectBytes(S3Client s3, String bucketName, String
keyName, String path) {
        try {
            GetObjectRequest objectRequest = GetObjectRequest
                .builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            ResponseBytes<GetObjectResponse> objectBytes =
s3.getObject(objectRequest, ResponseTransformer.toBytes());
            byte[] data = objectBytes.asByteArray();

            // Write the data to a local file.
            File myFile = new File(path);
            OutputStream os = new FileOutputStream(myFile);
```

```
            os.write(data);
            System.out.println("Successfully obtained bytes from an S3 object");
            os.close();

        } catch (IOException ex) {
            ex.printStackTrace();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetObjectdi Referensi AWS SDK for Java 2.x API.

### `GetObjectLegalHold`

Contoh kode berikut menunjukkan cara menggunakan`GetObjectLegalHold`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Get the legal hold details for an S3 object.
   public ObjectLockLegalHold getObjectLegalHold(String bucketName, String
objectKey) {
        try {
            GetObjectLegalHoldRequest legalHoldRequest =
GetObjectLegalHoldRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectLegalHoldResponse response =
getClient().getObjectLegalHold(legalHoldRequest);
            System.out.println("Object legal hold for " + objectKey + " in " +
bucketName +
```

```
                ":\n\tStatus: " + response.legalHold().status());
            return response.legalHold();

        } catch (S3Exception ex) {
            System.out.println("\tUnable to fetch legal hold: '" + ex.getMessage() +
"'");
        }

        return null;
    }
```

- Untuk detail API, lihat GetObjectLegalHolddi Referensi AWS SDK for Java 2.x API.

### `GetObjectLockConfiguration`

Contoh kode berikut menunjukkan cara menggunakan`GetObjectLockConfiguration`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Get the object lock configuration details for an S3 bucket.
    public void getBucketObjectLockConfiguration(String bucketName) {
        GetObjectLockConfigurationRequest objectLockConfigurationRequest =
GetObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .build();

        GetObjectLockConfigurationResponse response =
getClient().getObjectLockConfiguration(objectLockConfigurationRequest);
        System.out.println("Bucket object lock config for "+bucketName +":  ");
        System.out.println("\tEnabled:
"+response.objectLockConfiguration().objectLockEnabled());
        System.out.println("\tRule: "+
response.objectLockConfiguration().rule().defaultRetention());
    }
```

- Untuk detail API, lihat GetObjectLockConfigurationdi Referensi AWS SDK for Java 2.x API.

### `GetObjectRetention`

Contoh kode berikut menunjukkan cara menggunakan`GetObjectRetention`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Get the retention period for an S3 object.
   public ObjectLockRetention getObjectRetention(String bucketName, String key){
       try {
           GetObjectRetentionRequest retentionRequest =
GetObjectRetentionRequest.builder()
                   .bucket(bucketName)
                   .key(key)
                   .build();

           GetObjectRetentionResponse response =
getClient().getObjectRetention(retentionRequest);
           System.out.println("tObject retention for "+key +" in "+ bucketName +":
" + response.retention().mode() +" until "+ response.retention().retainUntilDate()
+".");
           return response.retention();

       } catch (S3Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           return null;
       }
   }
```

- Untuk detail API, lihat GetObjectRetentiondi Referensi AWS SDK for Java 2.x API.

### `HeadObject`

Contoh kode berikut menunjukkan cara menggunakan`HeadObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Tentukan jenis konten suatu objek.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetObjectContentType {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        getContentType(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Retrieves the content type of an object stored in an Amazon S3 bucket.
     *
     * @param s3 an instance of the {@link S3Client} class, which is used to
 interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket where the object is stored
     * @param keyName the key (file name) of the object in the S3 bucket
     */
    public static void getContentType(S3Client s3, String bucketName, String
 keyName) {
        try {
            HeadObjectRequest objectRequest = HeadObjectRequest.builder()
                .key(keyName)
                .bucket(bucketName)
                .build();

            HeadObjectResponse objectHead = s3.headObject(objectRequest);
            String type = objectHead.contentType();
            System.out.println("The object content type is " + type);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Dapatkan status pemulihan suatu objek.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

public class GetObjectRestoreStatus {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName>\s

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - A key name that represents the object.\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        checkStatus(s3, bucketName, keyName);
        s3.close();
    }

    /**
     * Checks the restoration status of an Amazon S3 object.
     *
     * @param s3         an instance of the {@link S3Client} class used to interact
 with the Amazon S3 service
     * @param bucketName the name of the Amazon S3 bucket where the object is stored
     * @param keyName    the name of the Amazon S3 object to be checked
```

```
     * @throws S3Exception if an error occurs while interacting with the Amazon S3
 service
     */
    public static void checkStatus(S3Client s3, String bucketName, String keyName) {
        try {
            HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(bucketName)
                .key(keyName)
                .build();

            HeadObjectResponse response = s3.headObject(headObjectRequest);
            System.out.println("The Amazon S3 object restoration status is " +
 response.restore());

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat HeadObjectdi Referensi AWS SDK for Java 2.x API.

### `ListBuckets`

Contoh kode berikut menunjukkan cara menggunakan`ListBuckets`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.paginators.ListBucketsIterable;
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
```

```
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListBuckets {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listAllBuckets(s3);

    }

    /**
     * Lists all the S3 buckets available in the current AWS account.
     *
     * @param s3 The {@link S3Client} instance to use for interacting with the
 Amazon S3 service.
     */
    public static void listAllBuckets(S3Client s3) {
        ListBucketsIterable response = s3.listBucketsPaginator();
        response.buckets().forEach(bucket ->
            System.out.println("Bucket Name: " + bucket.name()));
    }
```

- Untuk detail API, lihat ListBucketsdi Referensi AWS SDK for Java 2.x API.

### `ListMultipartUploads`

Contoh kode berikut menunjukkan cara menggunakan`ListMultipartUploads`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class ListMultipartUploads {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket where an in-
progress multipart upload is occurring.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
                .region(region)
                .build();
        listUploads(s3, bucketName);
        s3.close();
    }
```

```
    /**
     * Lists the multipart uploads currently in progress in the specified Amazon S3
 bucket.
     *
     * @param s3 the S3Client object used to interact with Amazon S3
     * @param bucketName the name of the Amazon S3 bucket to list the multipart
 uploads for
     */
    public static void listUploads(S3Client s3, String bucketName) {
        try {
            ListMultipartUploadsRequest listMultipartUploadsRequest =
 ListMultipartUploadsRequest.builder()
                    .bucket(bucketName)
                    .build();

            ListMultipartUploadsResponse response =
 s3.listMultipartUploads(listMultipartUploadsRequest);
            List<MultipartUpload> uploads = response.uploads();
            for (MultipartUpload upload : uploads) {
                System.out.println("Upload in progress: Key = \"" + upload.key() +
 "\", id = " + upload.uploadId());
            }

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListMultipartUploadsdi Referensi AWS SDK for Java 2.x API.

### `ListObjectsV2`

Contoh kode berikut menunjukkan cara menggunakan`ListObjectsV2`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously lists all objects in the specified S3 bucket.
    *
    * @param bucketName the name of the S3 bucket to list objects for
    * @return a {@link CompletableFuture} that completes when all objects have been
listed
    */
   public CompletableFuture<Void> listAllObjectsAsync(String bucketName) {
       ListObjectsV2Request initialRequest = ListObjectsV2Request.builder()
           .bucket(bucketName)
           .maxKeys(1)
           .build();

       ListObjectsV2Publisher paginator =
getAsyncClient().listObjectsV2Paginator(initialRequest);
       return paginator.subscribe(response -> {
           response.contents().forEach(s3Object -> {
               logger.info("Object key: " + s3Object.key());
           });
       }).thenRun(() -> {
           logger.info("Successfully listed all objects in the bucket: " +
bucketName);
       }).exceptionally(ex -> {
           throw new RuntimeException("Failed to list objects", ex);
       });
   }
```

Buat daftar objek menggunakan penomoran halaman.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.paginators.ListObjectsV2Iterable;

public class ListObjectsPaginated {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName>\s

            Where:
                bucketName - The Amazon S3 bucket from which objects are read.\s
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        listBucketObjects(s3, bucketName);
        s3.close();
    }

    /**
     * Lists the objects in the specified S3 bucket.
     *
     * @param s3 the S3Client instance used to interact with Amazon S3
     * @param bucketName the name of the S3 bucket to list the objects from
     */
    public static void listBucketObjects(S3Client s3, String bucketName) {
        try {
            ListObjectsV2Request listReq = ListObjectsV2Request.builder()
                .bucket(bucketName)
                .maxKeys(1)
                .build();

            ListObjectsV2Iterable listRes = s3.listObjectsV2Paginator(listReq);
```

```
            listRes.stream()
                .flatMap(r -> r.contents().stream())
                .forEach(content -> System.out.println(" Key: " + content.key() + "
 size = " + content.size()));

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListObjectsV2 di Referensi AWS SDK for Java 2.x API.

### `PutBucketAcl`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketAcl`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.AccessControlPolicy;
import software.amazon.awssdk.services.s3.model.Grant;
import software.amazon.awssdk.services.s3.model.Permission;
import software.amazon.awssdk.services.s3.model.PutBucketAclRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.Type;

import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetAcl {
    public static void main(String[] args) {
        final String usage = """

            Usage:
              <bucketName> <id>\s

            Where:
              bucketName - The Amazon S3 bucket to grant permissions on.\s
              id - The ID of the owner of this bucket (you can get this value from
 the AWS Management Console).
            """;

        if (args.length != 2) {
            System.out.println(usage);
            return;
        }

        String bucketName = args[0];
        String id = args[1];
        System.out.format("Setting access \n");
        System.out.println(" in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setBucketAcl(s3, bucketName, id);
        System.out.println("Done!");
        s3.close();
    }

    /**
     * Sets the Access Control List (ACL) for an Amazon S3 bucket.
     *
     * @param s3 the S3Client instance to be used for the operation
     * @param bucketName the name of the S3 bucket to set the ACL for
```

```
     * @param id the ID of the AWS user or account that will be granted full control
 of the bucket
     * @throws S3Exception if an error occurs while setting the bucket ACL
     */
    public static void setBucketAcl(S3Client s3, String bucketName, String id) {
        try {
            Grant ownerGrant = Grant.builder()
                .grantee(builder -> builder.id(id)
                    .type(Type.CANONICAL_USER))
                .permission(Permission.FULL_CONTROL)
                .build();

            List<Grant> grantList2 = new ArrayList<>();
            grantList2.add(ownerGrant);

            AccessControlPolicy acl = AccessControlPolicy.builder()
                .owner(builder -> builder.id(id))
                .grants(grantList2)
                .build();

            PutBucketAclRequest putAclReq = PutBucketAclRequest.builder()
                .bucket(bucketName)
                .accessControlPolicy(acl)
                .build();

            s3.putBucketAcl(putAclReq);

        } catch (S3Exception e) {
            e.printStackTrace();
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutBucketAcldi Referensi AWS SDK for Java 2.x API.

### `PutBucketCors`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketCors`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;

import java.util.ArrayList;
import java.util.List;

import software.amazon.awssdk.services.s3.model.GetBucketCorsRequest;
import software.amazon.awssdk.services.s3.model.GetBucketCorsResponse;
import software.amazon.awssdk.services.s3.model.DeleteBucketCorsRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.CORSRule;
import software.amazon.awssdk.services.s3.model.CORSConfiguration;
import software.amazon.awssdk.services.s3.model.PutBucketCorsRequest;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class S3Cors {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <accountId>\s

            Where:
                bucketName - The Amazon S3 bucket to upload an object into.
                accountId - The id of the account that owns the Amazon S3 bucket.
            """;
```

```
        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String accountId = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setCorsInformation(s3, bucketName, accountId);
        getBucketCorsInformation(s3, bucketName, accountId);
        deleteBucketCorsInformation(s3, bucketName, accountId);
        s3.close();
    }

    /**
     * Deletes the CORS (Cross-Origin Resource Sharing) configuration for an Amazon
S3 bucket.
     *
     * @param s3            the {@link S3Client} instance used to interact with the
Amazon S3 service
     * @param bucketName    the name of the Amazon S3 bucket for which the CORS
configuration should be deleted
     * @param accountId     the expected AWS account ID of the bucket owner
     *
     * @throws S3Exception if an error occurs while deleting the CORS configuration
for the bucket
     */
    public static void deleteBucketCorsInformation(S3Client s3, String bucketName,
String accountId) {
        try {
            DeleteBucketCorsRequest bucketCorsRequest =
DeleteBucketCorsRequest.builder()
                .bucket(bucketName)
                .expectedBucketOwner(accountId)
                .build();

            s3.deleteBucketCors(bucketCorsRequest);

        } catch (S3Exception e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Retrieves the CORS (Cross-Origin Resource Sharing) configuration for the
specified S3 bucket.
     *
     * @param s3 the S3Client instance to use for the operation
     * @param bucketName the name of the S3 bucket to retrieve the CORS
configuration for
     * @param accountId the expected bucket owner's account ID
     *
     * @throws S3Exception if there is an error retrieving the CORS configuration
     */
    public static void getBucketCorsInformation(S3Client s3, String bucketName,
String accountId) {
        try {
            GetBucketCorsRequest bucketCorsRequest = GetBucketCorsRequest.builder()
                .bucket(bucketName)
                .expectedBucketOwner(accountId)
                .build();

            GetBucketCorsResponse corsResponse =
s3.getBucketCors(bucketCorsRequest);
            List<CORSRule> corsRules = corsResponse.corsRules();
            for (CORSRule rule : corsRules) {
                System.out.println("allowOrigins: " + rule.allowedOrigins());
                System.out.println("AllowedMethod: " + rule.allowedMethods());
            }

        } catch (S3Exception e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Sets the Cross-Origin Resource Sharing (CORS) rules for an Amazon S3 bucket.
     *
     * @param s3 The S3Client object used to interact with the Amazon S3 service.
     * @param bucketName The name of the S3 bucket to set the CORS rules for.
```

```
     * @param accountId The AWS account ID of the bucket owner.
     */
    public static void setCorsInformation(S3Client s3, String bucketName, String
 accountId) {
        List<String> allowMethods = new ArrayList<>();
        allowMethods.add("PUT");
        allowMethods.add("POST");
        allowMethods.add("DELETE");

        List<String> allowOrigins = new ArrayList<>();
        allowOrigins.add("http://example.com");
        try {
            // Define CORS rules.
            CORSRule corsRule = CORSRule.builder()
                .allowedMethods(allowMethods)
                .allowedOrigins(allowOrigins)
                .build();

            List<CORSRule> corsRules = new ArrayList<>();
            corsRules.add(corsRule);
            CORSConfiguration configuration = CORSConfiguration.builder()
                .corsRules(corsRules)
                .build();

            PutBucketCorsRequest putBucketCorsRequest =
 PutBucketCorsRequest.builder()
                .bucket(bucketName)
                .corsConfiguration(configuration)
                .expectedBucketOwner(accountId)
                .build();

            s3.putBucketCors(putBucketCorsRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutBucketCorsdi Referensi AWS SDK for Java 2.x API.

### `PutBucketLifecycleConfiguration`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketLifecycleConfiguration`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.Transition;
import
 software.amazon.awssdk.services.s3.model.GetBucketLifecycleConfigurationRequest;
import
 software.amazon.awssdk.services.s3.model.GetBucketLifecycleConfigurationResponse;
import software.amazon.awssdk.services.s3.model.DeleteBucketLifecycleRequest;
import software.amazon.awssdk.services.s3.model.TransitionStorageClass;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class LifecycleConfiguration {
    public static void main(String[] args) {
```

```
        final String usage = """

            Usage:
              <bucketName> <accountId>\s

            Where:
              bucketName - The Amazon Simple Storage Service (Amazon S3) bucket to
upload an object into.
              accountId - The id of the account that owns the Amazon S3 bucket.
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String accountId = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setLifecycleConfig(s3, bucketName, accountId);
        getLifecycleConfig(s3, bucketName, accountId);
        deleteLifecycleConfig(s3, bucketName, accountId);
        System.out.println("You have successfully created, updated, and deleted a
Lifecycle configuration");
        s3.close();
    }

    /**
     * Sets the lifecycle configuration for an Amazon S3 bucket.
     *
     * @param s3           The Amazon S3 client to use for the operation.
     * @param bucketName   The name of the Amazon S3 bucket.
     * @param accountId    The expected owner of the Amazon S3 bucket.
     *
     * @throws S3Exception if there is an error setting the lifecycle configuration.
     */
    public static void setLifecycleConfig(S3Client s3, String bucketName, String
accountId) {
        try {
```

```
            // Create a rule to archive objects with the "glacierobjects/" prefix to
the
            // S3 Glacier Flexible Retrieval storage class immediately.
            LifecycleRuleFilter ruleFilter = LifecycleRuleFilter.builder()
                .prefix("glacierobjects/")
                .build();

            Transition transition = Transition.builder()
                .storageClass(TransitionStorageClass.GLACIER)
                .days(0)
                .build();

            LifecycleRule rule1 = LifecycleRule.builder()
                .id("Archive immediately rule")
                .filter(ruleFilter)
                .transitions(transition)
                .status(ExpirationStatus.ENABLED)
                .build();

            // Create a second rule.
            Transition transition2 = Transition.builder()
                .storageClass(TransitionStorageClass.GLACIER)
                .days(0)
                .build();

            List<Transition> transitionList = new ArrayList<>();
            transitionList.add(transition2);

            LifecycleRuleFilter ruleFilter2 = LifecycleRuleFilter.builder()
                .prefix("glacierobjects/")
                .build();

            LifecycleRule rule2 = LifecycleRule.builder()
                .id("Archive and then delete rule")
                .filter(ruleFilter2)
                .transitions(transitionList)
                .status(ExpirationStatus.ENABLED)
                .build();

            // Add the LifecycleRule objects to an ArrayList.
            ArrayList<LifecycleRule> ruleList = new ArrayList<>();
            ruleList.add(rule1);
            ruleList.add(rule2);
```

```
            BucketLifecycleConfiguration lifecycleConfiguration =
BucketLifecycleConfiguration.builder()
                .rules(ruleList)
                .build();

            PutBucketLifecycleConfigurationRequest
putBucketLifecycleConfigurationRequest = PutBucketLifecycleConfigurationRequest
                .builder()
                .bucket(bucketName)
                .lifecycleConfiguration(lifecycleConfiguration)
                .expectedBucketOwner(accountId)
                .build();


s3.putBucketLifecycleConfiguration(putBucketLifecycleConfigurationRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Retrieves the lifecycle configuration for an Amazon S3 bucket and adds a new
lifecycle rule to it.
     *
     * @param s3 the S3Client instance used to interact with Amazon S3
     * @param bucketName the name of the Amazon S3 bucket
     * @param accountId the expected owner of the Amazon S3 bucket
     */
    public static void getLifecycleConfig(S3Client s3, String bucketName, String
accountId) {
        try {
            GetBucketLifecycleConfigurationRequest
getBucketLifecycleConfigurationRequest = GetBucketLifecycleConfigurationRequest
                .builder()
                .bucket(bucketName)
                .expectedBucketOwner(accountId)
                .build();

            GetBucketLifecycleConfigurationResponse response = s3

.getBucketLifecycleConfiguration(getBucketLifecycleConfigurationRequest);
            List<LifecycleRule> newList = new ArrayList<>();
```

```
            List<LifecycleRule> rules = response.rules();
            for (LifecycleRule rule : rules) {
                newList.add(rule);
            }

            // Add a new rule with both a prefix predicate and a tag predicate.
            LifecycleRuleFilter ruleFilter = LifecycleRuleFilter.builder()
                .prefix("YearlyDocuments/")
                .build();

            Transition transition = Transition.builder()
                .storageClass(TransitionStorageClass.GLACIER)
                .days(3650)
                .build();

            LifecycleRule rule1 = LifecycleRule.builder()
                .id("NewRule")
                .filter(ruleFilter)
                .transitions(transition)
                .status(ExpirationStatus.ENABLED)
                .build();

            // Add the new rule to the list.
            newList.add(rule1);
            BucketLifecycleConfiguration lifecycleConfiguration =
BucketLifecycleConfiguration.builder()
                .rules(newList)
                .build();

            PutBucketLifecycleConfigurationRequest
putBucketLifecycleConfigurationRequest = PutBucketLifecycleConfigurationRequest
                .builder()
                .bucket(bucketName)
                .lifecycleConfiguration(lifecycleConfiguration)
                .expectedBucketOwner(accountId)
                .build();


s3.putBucketLifecycleConfiguration(putBucketLifecycleConfigurationRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
    }

    /**
     * Deletes the lifecycle configuration for an Amazon S3 bucket.
     *
     * @param s3 the {@link S3Client} to use for the operation
     * @param bucketName the name of the S3 bucket
     * @param accountId the expected account owner of the S3 bucket
     *
     * @throws S3Exception if an error occurs while deleting the lifecycle
 configuration
     */
    public static void deleteLifecycleConfig(S3Client s3, String bucketName, String
 accountId) {
        try {
            DeleteBucketLifecycleRequest deleteBucketLifecycleRequest =
 DeleteBucketLifecycleRequest
                .builder()
                .bucket(bucketName)
                .expectedBucketOwner(accountId)
                .build();

            s3.deleteBucketLifecycle(deleteBucketLifecycleRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutBucketLifecycleConfigurationdi Referensi AWS SDK for Java 2.x API.

### `PutBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;

import java.io.IOException;
import java.nio.charset.StandardCharsets;
import java.nio.file.Files;
import java.nio.file.Paths;
import java.util.List;

import com.fasterxml.jackson.core.JsonParser;
import com.fasterxml.jackson.databind.ObjectMapper;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetBucketPolicy {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <polFile>

            Where:
                bucketName - The Amazon S3 bucket to set the policy on.
                polFile - A JSON file containing the policy (see the Amazon S3
 Readme for an example).\s
```

```
            """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String polFile = args[1];
        String policyText = getBucketPolicyFromFile(polFile);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setPolicy(s3, bucketName, policyText);
        s3.close();
    }

    /**
     * Sets the policy for an Amazon S3 bucket.
     *
     * @param s3         the {@link S3Client} object used to interact with the
Amazon S3 service
     * @param bucketName the name of the Amazon S3 bucket
     * @param policyText the text of the policy to be set on the bucket
     * @throws S3Exception if there is an error setting the bucket policy
     */
    public static void setPolicy(S3Client s3, String bucketName, String policyText)
{
        System.out.println("Setting policy:");
        System.out.println("----");
        System.out.println(policyText);
        System.out.println("----");
        System.out.format("On Amazon S3 bucket: \"%s\"\n", bucketName);

        try {
            PutBucketPolicyRequest policyReq = PutBucketPolicyRequest.builder()
                .bucket(bucketName)
                .policy(policyText)
                .build();

            s3.putBucketPolicy(policyReq);
```

```
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        System.out.println("Done!");
    }

    /**
     * Retrieves the bucket policy from a specified file.
     *
     * @param policyFile the path to the file containing the bucket policy
     * @return the content of the bucket policy file as a string
     */
    public static String getBucketPolicyFromFile(String policyFile) {
        StringBuilder fileText = new StringBuilder();
        try {
            List<String> lines = Files.readAllLines(Paths.get(policyFile),
 StandardCharsets.UTF_8);
            for (String line : lines) {
                fileText.append(line);
            }

        } catch (IOException e) {
            System.out.format("Problem reading file: \"%s\"", policyFile);
            System.out.println(e.getMessage());
        }

        try {
            final JsonParser parser = new
 ObjectMapper().getFactory().createParser(fileText.toString());
            while (parser.nextToken() != null) {
            }

        } catch (IOException jpe) {
            jpe.printStackTrace();
        }
        return fileText.toString();
    }
}
```

- Untuk detail API, lihat PutBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `PutBucketReplication`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketReplication`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Sets the replication configuration for an Amazon S3 bucket.
    *
    * @param s3Client             the S3Client instance to use for the operation
    * @param sourceBucketName     the name of the source bucket
    * @param destBucketName       the name of the destination bucket
    * @param destinationBucketARN the Amazon Resource Name (ARN) of the destination
bucket
    * @param roleARN              the ARN of the IAM role to use for the
replication configuration
    */
   public static void setReplication(S3Client s3Client, String sourceBucketName,
String destBucketName, String destinationBucketARN, String roleARN) {
       try {
           Destination destination = Destination.builder()
               .bucket(destinationBucketARN)
               .storageClass(StorageClass.STANDARD)
               .build();

           // Define a prefix filter for replication.
           ReplicationRuleFilter ruleFilter = ReplicationRuleFilter.builder()
               .prefix("documents/")
               .build();

           // Define delete marker replication setting.
           DeleteMarkerReplication deleteMarkerReplication =
DeleteMarkerReplication.builder()
               .status(DeleteMarkerReplicationStatus.DISABLED)
               .build();

           // Create the replication rule.
```

```
            ReplicationRule replicationRule = ReplicationRule.builder()
                .priority(1)
                .filter(ruleFilter)
                .status(ReplicationRuleStatus.ENABLED)
                .deleteMarkerReplication(deleteMarkerReplication)
                .destination(destination)
                .build();

            List<ReplicationRule> replicationRuleList = new ArrayList<>();
            replicationRuleList.add(replicationRule);

            // Define the replication configuration with IAM role.
            ReplicationConfiguration configuration =
ReplicationConfiguration.builder()
                .role(roleARN)
                .rules(replicationRuleList)
                .build();

            // Apply the replication configuration to the source bucket.
            PutBucketReplicationRequest replicationRequest =
PutBucketReplicationRequest.builder()
                .bucket(sourceBucketName)
                .replicationConfiguration(configuration)
                .build();

            s3Client.putBucketReplication(replicationRequest);
            System.out.println("Replication configuration set successfully.");

        } catch (IllegalArgumentException e) {
            System.err.println("Configuration error: " + e.getMessage());
        } catch (S3Exception e) {
            System.err.println("S3 Exception: " +
e.awsErrorDetails().errorMessage());
            System.err.println("Status Code: " + e.statusCode());
            System.err.println("Error Code: " + e.awsErrorDetails().errorCode());


        } catch (SdkException e) {
            System.err.println("SDK Exception: " + e.getMessage());
        }
    }
```

- Untuk detail API, lihat PutBucketReplicationdi Referensi AWS SDK for Java 2.x API.

### `PutBucketVersioning`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketVersioning`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Enables bucket versioning for the specified S3 bucket.
    *
    * @param s3Client the S3 client to use for the operation
    * @param bucketName the name of the S3 bucket to enable versioning for
    */
   public static void enableBucketVersioning(S3Client s3Client, String bucketName){
       VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
           .status(BucketVersioningStatus.ENABLED)
           .build();

       PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
           .bucket(bucketName)
           .versioningConfiguration(versioningConfiguration)
           .build();

       s3Client.putBucketVersioning(versioningRequest);
       System.out.println("Bucket versioning has been enabled for "+bucketName);
   }
```

- Untuk detail API, lihat PutBucketVersioningdi Referensi AWS SDK for Java 2.x API.

### `PutBucketWebsite`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketWebsite`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.IndexDocument;
import software.amazon.awssdk.services.s3.model.PutBucketWebsiteRequest;
import software.amazon.awssdk.services.s3.model.WebsiteConfiguration;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.regions.Region;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class SetWebsiteConfiguration {
    public static void main(String[] args) {
        final String usage = """

            Usage:    <bucketName> [indexdoc]\s

            Where:
               bucketName   - The Amazon S3 bucket to set the website configuration
 on.\s
               indexdoc - The index document, ex. 'index.html'
                          If not specified, 'index.html' will be set.
            """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
```

```
        String bucketName = args[0];
        String indexDoc = "index.html";
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setWebsiteConfig(s3, bucketName, indexDoc);
        s3.close();
    }

    /**
     * Sets the website configuration for an Amazon S3 bucket.
     *
     * @param s3 The {@link S3Client} instance to use for the AWS SDK operations.
     * @param bucketName The name of the S3 bucket to configure.
     * @param indexDoc The name of the index document to use for the website
 configuration.
     */
    public static void setWebsiteConfig(S3Client s3, String bucketName, String
 indexDoc) {
        try {
            WebsiteConfiguration websiteConfig = WebsiteConfiguration.builder()
                .indexDocument(IndexDocument.builder().suffix(indexDoc).build())
                .build();

            PutBucketWebsiteRequest pubWebsiteReq =
 PutBucketWebsiteRequest.builder()
                .bucket(bucketName)
                .websiteConfiguration(websiteConfig)
                .build();

            s3.putBucketWebsite(pubWebsiteReq);
            System.out.println("The call was successful");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutBucketWebsitedi Referensi AWS SDK for Java 2.x API.

### `PutObject`

Contoh kode berikut menunjukkan cara menggunakan`PutObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Unggah file ke bucket menggunakan S3Client.

```
   /**
    * Uploads a local file to an AWS S3 bucket asynchronously.
    *
    * @param bucketName the name of the S3 bucket to upload the file to
    * @param key        the key (object name) to use for the uploaded file
    * @param objectPath the local file path of the file to be uploaded
    * @return a {@link CompletableFuture} that completes with the {@link
PutObjectResponse} when the upload is successful, or throws a {@link
RuntimeException} if the upload fails
    */
   public CompletableFuture<PutObjectResponse> uploadLocalFileAsync(String
bucketName, String key, String objectPath) {
       PutObjectRequest objectRequest = PutObjectRequest.builder()
           .bucket(bucketName)
           .key(key)
           .build();

       CompletableFuture<PutObjectResponse> response =
getAsyncClient().putObject(objectRequest,
AsyncRequestBody.fromFile(Paths.get(objectPath)));
       return response.whenComplete((resp, ex) -> {
           if (ex != null) {
               throw new RuntimeException("Failed to upload file", ex);
           }
       });
```

```
    }
```

Gunakan S3 TransferManager untuk mengunggah file ke bucket. Lihat file lengkap dan lakukan pengujian.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedFileUpload;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;
import software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener;
import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;

    public String uploadFile(S3TransferManager transferManager, String bucketName,
                             String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b.bucket(bucketName).key(key))
            .source(Paths.get(filePathURI))
            .build();

        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        CompletedFileUpload uploadResult = fileUpload.completionFuture().join();
        return uploadResult.response().eTag();
    }
```

Unggah objek ke bucket dan tetapkan tanda menggunakan S3Client.

```
    /**
     * Puts tags on an Amazon S3 object.
     *
     * @param s3 An {@link S3Client} object that represents the Amazon S3 client.
     * @param bucketName The name of the Amazon S3 bucket.
     * @param objectKey The key of the Amazon S3 object.
     * @param objectPath The file path of the object to be uploaded.
     */
```

```
   public static void putS3ObjectTags(S3Client s3, String bucketName, String
objectKey, String objectPath) {
       try {
           Tag tag1 = Tag.builder()
               .key("Tag 1")
               .value("This is tag 1")
               .build();

           Tag tag2 = Tag.builder()
               .key("Tag 2")
               .value("This is tag 2")
               .build();

           List<Tag> tags = new ArrayList<>();
           tags.add(tag1);
           tags.add(tag2);

           Tagging allTags = Tagging.builder()
               .tagSet(tags)
               .build();

           PutObjectRequest putOb = PutObjectRequest.builder()
               .bucket(bucketName)
               .key(objectKey)
               .tagging(allTags)
               .build();

           s3.putObject(putOb, RequestBody.fromBytes(getObjectFile(objectPath)));

       } catch (S3Exception e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }

   /**
    * Updates the tags associated with an object in an Amazon S3 bucket.
    *
    * @param s3 an instance of the S3Client class, which is used to interact with
the Amazon S3 service
    * @param bucketName the name of the S3 bucket containing the object
    * @param objectKey the key (or name) of the object in the S3 bucket
    * @throws S3Exception if there is an error updating the object's tags
    */
```

```
   public static void updateObjectTags(S3Client s3, String bucketName, String
objectKey) {
       try {
           GetObjectTaggingRequest taggingRequest =
GetObjectTaggingRequest.builder()
               .bucket(bucketName)
               .key(objectKey)
               .build();

           GetObjectTaggingResponse getTaggingRes =
s3.getObjectTagging(taggingRequest);
           List<Tag> obTags = getTaggingRes.tagSet();
           for (Tag sinTag : obTags) {
               System.out.println("The tag key is: " + sinTag.key());
               System.out.println("The tag value is: " + sinTag.value());
           }

           // Replace the object's tags with two new tags.
           Tag tag3 = Tag.builder()
               .key("Tag 3")
               .value("This is tag 3")
               .build();

           Tag tag4 = Tag.builder()
               .key("Tag 4")
               .value("This is tag 4")
               .build();

           List<Tag> tags = new ArrayList<>();
           tags.add(tag3);
           tags.add(tag4);

           Tagging updatedTags = Tagging.builder()
               .tagSet(tags)
               .build();

           PutObjectTaggingRequest taggingRequest1 =
PutObjectTaggingRequest.builder()
               .bucket(bucketName)
               .key(objectKey)
               .tagging(updatedTags)
               .build();

           s3.putObjectTagging(taggingRequest1);
```

```
            GetObjectTaggingResponse getTaggingRes2 =
s3.getObjectTagging(taggingRequest);
            List<Tag> modTags = getTaggingRes2.tagSet();
            for (Tag sinTag : modTags) {
                System.out.println("The tag key is: " + sinTag.key());
                System.out.println("The tag value is: " + sinTag.value());
            }

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    /**
     * Retrieves the contents of a file as a byte array.
     *
     * @param filePath the path of the file to be read
     * @return a byte array containing the contents of the file, or null if an error
occurs
     */
    private static byte[] getObjectFile(String filePath) {
        FileInputStream fileInputStream = null;
        byte[] bytesArray = null;

        try {
            File file = new File(filePath);
            bytesArray = new byte[(int) file.length()];
            fileInputStream = new FileInputStream(file);
            fileInputStream.read(bytesArray);

        } catch (IOException e) {
            e.printStackTrace();
        } finally {
            if (fileInputStream != null) {
                try {
                    fileInputStream.close();
                } catch (IOException e) {
                    e.printStackTrace();
                }
            }
        }

        return bytesArray;
```

```
    }
}
```

Unggah objek ke bucket dan tetapkan metadata menggunakan S3Client.

```
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.File;
import java.util.HashMap;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PutObjectMetadata {
    public static void main(String[] args) {
        final String USAGE = """

            Usage:
              <bucketName> <objectKey> <objectPath>\s

            Where:
              bucketName - The Amazon S3 bucket to upload an object into.
              objectKey - The object to upload (for example, book.pdf).
              objectPath - The path where the file is located (for example, C:/AWS/
book2.pdf).\s
            """;

        if (args.length != 3) {
            System.out.println(USAGE);
            System.exit(1);
        }
```

```
        String bucketName = args[0];
        String objectKey = args[1];
        String objectPath = args[2];
        System.out.println("Putting object " + objectKey + " into bucket " +
bucketName);
        System.out.println("  in bucket: " + bucketName);
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        putS3Object(s3, bucketName, objectKey, objectPath);
        s3.close();
    }

    /**
     * Uploads an object to an Amazon S3 bucket with metadata.
     *
     * @param s3 the S3Client object used to interact with the Amazon S3 service
     * @param bucketName the name of the S3 bucket to upload the object to
     * @param objectKey the name of the object to be uploaded
     * @param objectPath the local file path of the object to be uploaded
     */
    public static void putS3Object(S3Client s3, String bucketName, String objectKey,
String objectPath) {
        try {
            Map<String, String> metadata = new HashMap<>();
            metadata.put("author", "Mary Doe");
            metadata.put("version", "1.0.0.0");

            PutObjectRequest putOb = PutObjectRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .metadata(metadata)
                .build();

            s3.putObject(putOb, RequestBody.fromFile(new File(objectPath)));
            System.out.println("Successfully placed " + objectKey + " into bucket "
+ bucketName);

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
```

```
        }
    }
}
```

Unggah objek ke bucket dan tetapkan nilai retensi objek menggunakan S3Client.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.time.Instant;
import java.time.LocalDate;
import java.time.LocalDateTime;
import java.time.ZoneOffset;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class PutObjectRetention {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <key> <bucketName>\s

            Where:
                key - The name of the object (for example, book.pdf).\s
                bucketName - The Amazon S3 bucket name that contains the object (for
 example, bucket1).\s
            """;

        if (args.length != 2) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String key = args[0];
        String bucketName = args[1];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        setRentionPeriod(s3, key, bucketName);
        s3.close();
    }

    /**
     * Sets the retention period for an object in an Amazon S3 bucket.
     *
     * @param s3     the S3Client object used to interact with the Amazon S3 service
     * @param key    the key (name) of the object in the S3 bucket
     * @param bucket the name of the S3 bucket where the object is stored
     *
     * @throws S3Exception if an error occurs while setting the object retention
period
     */
    public static void setRentionPeriod(S3Client s3, String key, String bucket) {
        try {
            LocalDate localDate = LocalDate.parse("2020-07-17");
            LocalDateTime localDateTime = localDate.atStartOfDay();
            Instant instant = localDateTime.toInstant(ZoneOffset.UTC);

            ObjectLockRetention lockRetention = ObjectLockRetention.builder()
                .mode("COMPLIANCE")
                .retainUntilDate(instant)
                .build();

            PutObjectRetentionRequest retentionRequest =
PutObjectRetentionRequest.builder()
                .bucket(bucket)
                .key(key)
                .bypassGovernanceRetention(true)
                .retention(lockRetention)
                .build();
```

```
            // To set Retention on an object, the Amazon S3 bucket must support
 object
            // locking, otherwise an exception is thrown.
            s3.putObjectRetention(retentionRequest);
            System.out.print("An object retention configuration was successfully
 placed on the object");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutObjectdi Referensi AWS SDK for Java 2.x API.

### `PutObjectLegalHold`

Contoh kode berikut menunjukkan cara menggunakan`PutObjectLegalHold`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Set or modify a legal hold on an object in an S3 bucket.
   public void modifyObjectLegalHold(String bucketName, String objectKey, boolean
 legalHoldOn) {
        ObjectLockLegalHold legalHold ;
        if (legalHoldOn) {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.ON)
                .build();
        } else {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.OFF)
                .build();
        }
```

```
        PutObjectLegalHoldRequest legalHoldRequest =
PutObjectLegalHoldRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .legalHold(legalHold)
            .build();

        getClient().putObjectLegalHold(legalHoldRequest) ;
        System.out.println("Modified legal hold for "+ objectKey +" in "+bucketName
+".");
    }
```

- Untuk detail API, lihat PutObjectLegalHolddi Referensi AWS SDK for Java 2.x API.

### `PutObjectLockConfiguration`

Contoh kode berikut menunjukkan cara menggunakan`PutObjectLockConfiguration`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Atur konfigurasi kunci objek dari ember.

```
    // Enable object lock on an existing bucket.
    public void enableObjectLockOnBucket(String bucketName) {
        try {
            VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
                .status(BucketVersioningStatus.ENABLED)
                .build();

            PutBucketVersioningRequest putBucketVersioningRequest =
PutBucketVersioningRequest.builder()
                .bucket(bucketName)
                .versioningConfiguration(versioningConfiguration)
```

```
                .build();

            // Enable versioning on the bucket.
            getClient().putBucketVersioning(putBucketVersioningRequest);
            PutObjectLockConfigurationRequest request =
PutObjectLockConfigurationRequest.builder()
                .bucket(bucketName)
                .objectLockConfiguration(ObjectLockConfiguration.builder()
                    .objectLockEnabled(ObjectLockEnabled.ENABLED)
                    .build())
                .build();

            getClient().putObjectLockConfiguration(request);
            System.out.println("Successfully enabled object lock on "+bucketName);

        } catch (S3Exception ex) {
            System.out.println("Error modifying object lock: '" + ex.getMessage() +
"'");
        }
    }
```

Setel periode retensi default bucket.

```
    // Set or modify a retention period on an S3 bucket.
    public void modifyBucketDefaultRetention(String bucketName) {
        VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
            .mfaDelete(MFADelete.DISABLED)
            .status(BucketVersioningStatus.ENABLED)
            .build();

        PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
            .bucket(bucketName)
            .versioningConfiguration(versioningConfiguration)
            .build();

        getClient().putBucketVersioning(versioningRequest);
        DefaultRetention rention = DefaultRetention.builder()
            .days(1)
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .build();
```

```
        ObjectLockRule lockRule = ObjectLockRule.builder()
            .defaultRetention(rention)
            .build();

        ObjectLockConfiguration objectLockConfiguration =
ObjectLockConfiguration.builder()
            .objectLockEnabled(ObjectLockEnabled.ENABLED)
            .rule(lockRule)
            .build();

        PutObjectLockConfigurationRequest putObjectLockConfigurationRequest =
PutObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .objectLockConfiguration(objectLockConfiguration)
            .build();

        getClient().putObjectLockConfiguration(putObjectLockConfigurationRequest) ;
        System.out.println("Added a default retention to bucket "+bucketName +".");
    }
```

- Untuk detail API, lihat PutObjectLockConfigurationdi Referensi AWS SDK for Java 2.x API.

### `PutObjectRetention`

Contoh kode berikut menunjukkan cara menggunakan`PutObjectRetention`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Set or modify a retention period on an object in an S3 bucket.
    public void modifyObjectRetentionPeriod(String bucketName, String objectKey) {
        // Calculate the instant one day from now.
        Instant futureInstant = Instant.now().plus(1, ChronoUnit.DAYS);

        // Convert the Instant to a ZonedDateTime object with a specific time zone.
```

```
        ZonedDateTime zonedDateTime = futureInstant.atZone(ZoneId.systemDefault());

        // Define a formatter for human-readable output.
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
HH:mm:ss");

        // Format the ZonedDateTime object to a human-readable date string.
        String humanReadableDate = formatter.format(zonedDateTime);

        // Print the formatted date string.
        System.out.println("Formatted Date: " + humanReadableDate);
        ObjectLockRetention retention = ObjectLockRetention.builder()
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .retainUntilDate(futureInstant)
            .build();

        PutObjectRetentionRequest retentionRequest =
PutObjectRetentionRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .retention(retention)
            .build();

        getClient().putObjectRetention(retentionRequest);
        System.out.println("Set retention for "+objectKey +" in " +bucketName +"
until "+ humanReadableDate +".");
    }
```

- Untuk detail API, lihat PutObjectRetentiondi Referensi AWS SDK for Java 2.x API.

### `RestoreObject`

Contoh kode berikut menunjukkan cara menggunakan`RestoreObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.RestoreRequest;
import software.amazon.awssdk.services.s3.model.GlacierJobParameters;
import software.amazon.awssdk.services.s3.model.RestoreObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.Tier;

/*
 *  For more information about restoring an object, see "Restoring an archived
 object" at
 *  https://docs.aws.amazon.com/AmazonS3/latest/userguide/restoring-objects.html
 *
 *  Before running this Java V2 code example, set up your development environment,
 including your credentials.
 *
 *  For more information, see the following documentation topic:
 *
 *  https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class RestoreObject {
    public static void main(String[] args) {
        final String usage = """

            Usage:
                <bucketName> <keyName> <expectedBucketOwner>

            Where:
                bucketName - The Amazon S3 bucket name.\s
                keyName - The key name of an object with a Storage class value of
 Glacier.\s
                expectedBucketOwner - The account that owns the bucket (you can
 obtain this value from the AWS Management Console).\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String keyName = args[1];
```

```
        String expectedBucketOwner = args[2];
        Region region = Region.US_EAST_1;
        S3Client s3 = S3Client.builder()
            .region(region)
            .build();

        restoreS3Object(s3, bucketName, keyName, expectedBucketOwner);
        s3.close();
    }

    /**
     * Restores an S3 object from the Glacier storage class.
     *
     * @param s3                   an instance of the {@link S3Client} to be used
for interacting with Amazon S3
     * @param bucketName           the name of the S3 bucket where the object is
stored
     * @param keyName              the key (object name) of the S3 object to be
restored
     * @param expectedBucketOwner  the AWS account ID of the expected bucket owner
     */
    public static void restoreS3Object(S3Client s3, String bucketName, String
keyName, String expectedBucketOwner) {
        try {
            RestoreRequest restoreRequest = RestoreRequest.builder()
                .days(10)

.glacierJobParameters(GlacierJobParameters.builder().tier(Tier.STANDARD).build())
                .build();

            RestoreObjectRequest objectRequest = RestoreObjectRequest.builder()
                .expectedBucketOwner(expectedBucketOwner)
                .bucket(bucketName)
                .key(keyName)
                .restoreRequest(restoreRequest)
                .build();

            s3.restoreObject(objectRequest);

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
}
```

- Untuk detail API, lihat RestoreObjectdi Referensi AWS SDK for Java 2.x API.

### `SelectObjectContent`

Contoh kode berikut menunjukkan cara menggunakan`SelectObjectContent`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh berikut menunjukkan query menggunakan objek JSON. Contoh lengkap juga menunjukkan penggunaan objek CSV.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.async.BlockingInputStreamAsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.CSVInput;
import software.amazon.awssdk.services.s3.model.CSVOutput;
import software.amazon.awssdk.services.s3.model.CompressionType;
import software.amazon.awssdk.services.s3.model.ExpressionType;
import software.amazon.awssdk.services.s3.model.FileHeaderInfo;
import software.amazon.awssdk.services.s3.model.InputSerialization;
import software.amazon.awssdk.services.s3.model.JSONInput;
import software.amazon.awssdk.services.s3.model.JSONOutput;
import software.amazon.awssdk.services.s3.model.JSONType;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.OutputSerialization;
import software.amazon.awssdk.services.s3.model.Progress;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.SelectObjectContentRequest;
import software.amazon.awssdk.services.s3.model.SelectObjectContentResponseHandler;
```

```
import software.amazon.awssdk.services.s3.model.Stats;

import java.io.IOException;
import java.net.URL;
import java.util.ArrayList;
import java.util.List;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;

public class SelectObjectContentExample {
    static final Logger logger =
 LoggerFactory.getLogger(SelectObjectContentExample.class);
    static final String BUCKET_NAME = "amzn-s3-demo-bucket-" + UUID.randomUUID();
    static final S3AsyncClient s3AsyncClient = S3AsyncClient.create();
    static String FILE_CSV = "csv";
    static String FILE_JSON = "json";
    static String URL_CSV = "https://raw.githubusercontent.com/mledoze/countries/
master/dist/countries.csv";
    static String URL_JSON = "https://raw.githubusercontent.com/mledoze/countries/
master/dist/countries.json";

    public static void main(String[] args) {
        SelectObjectContentExample selectObjectContentExample = new
 SelectObjectContentExample();
        try {
            SelectObjectContentExample.setUp();
            selectObjectContentExample.runSelectObjectContentMethodForJSON();
            selectObjectContentExample.runSelectObjectContentMethodForCSV();
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
            System.exit(1);
        } finally {
            SelectObjectContentExample.tearDown();
        }
    }

    EventStreamInfo runSelectObjectContentMethodForJSON() {
        // Set up request parameters.
        final String queryExpression = "select * from s3object[*][*] c where c.area
 < 350000";
        final String fileType = FILE_JSON;

        InputSerialization inputSerialization = InputSerialization.builder()
                .json(JSONInput.builder().type(JSONType.DOCUMENT).build())
```

```
                .compressionType(CompressionType.NONE)
                .build();

        OutputSerialization outputSerialization = OutputSerialization.builder()
                .json(JSONOutput.builder().recordDelimiter(null).build())
                .build();

        // Build the SelectObjectContentRequest.
        SelectObjectContentRequest select = SelectObjectContentRequest.builder()
                .bucket(BUCKET_NAME)
                .key(FILE_JSON)
                .expression(queryExpression)
                .expressionType(ExpressionType.SQL)
                .inputSerialization(inputSerialization)
                .outputSerialization(outputSerialization)
                .build();

        EventStreamInfo eventStreamInfo = new EventStreamInfo();
        // Call the selectObjectContent method with the request and a response
handler.
        // Supply an EventStreamInfo object to the response handler to gather
records and information from the response.
        s3AsyncClient.selectObjectContent(select,
buildResponseHandler(eventStreamInfo)).join();

        // Log out information gathered while processing the response stream.
        long recordCount = eventStreamInfo.getRecords().stream().mapToInt(record ->
                record.split("\n").length
        ).sum();
        logger.info("Total records {}: {}", fileType, recordCount);
        logger.info("Visitor onRecords for fileType {} called {} times", fileType,
eventStreamInfo.getCountOnRecordsCalled());
        logger.info("Visitor onStats for fileType {}, {}", fileType,
eventStreamInfo.getStats());
        logger.info("Visitor onContinuations for fileType {}, {}", fileType,
eventStreamInfo.getCountContinuationEvents());
        return eventStreamInfo;
    }

    static SelectObjectContentResponseHandler buildResponseHandler(EventStreamInfo
eventStreamInfo) {
        // Use a Visitor to process the response stream. This visitor logs
information and gathers details while processing.
```

```
        final SelectObjectContentResponseHandler.Visitor visitor =
 SelectObjectContentResponseHandler.Visitor.builder()
                .onRecords(r -> {
                    logger.info("Record event received.");
                    eventStreamInfo.addRecord(r.payload().asUtf8String());
                    eventStreamInfo.incrementOnRecordsCalled();
                })
                .onCont(ce -> {
                    logger.info("Continuation event received.");
                    eventStreamInfo.incrementContinuationEvents();
                })
                .onProgress(pe -> {
                    Progress progress = pe.details();
                    logger.info("Progress event received:\n bytesScanned:
{}\nbytesProcessed: {}\nbytesReturned:{}",
                            progress.bytesScanned(),
                            progress.bytesProcessed(),
                            progress.bytesReturned());
                })
                .onEnd(ee -> logger.info("End event received."))
                .onStats(se -> {
                    logger.info("Stats event received.");
                    eventStreamInfo.addStats(se.details());
                })
                .build();

        // Build the SelectObjectContentResponseHandler with the visitor that
 processes the stream.
        return SelectObjectContentResponseHandler.builder()
                .subscriber(visitor).build();
    }

    // The EventStreamInfo class is used to store information gathered while
 processing the response stream.
    static class EventStreamInfo {
        private final List<String> records = new ArrayList<>();
        private Integer countOnRecordsCalled = 0;
        private Integer countContinuationEvents = 0;
        private Stats stats;

        void incrementOnRecordsCalled() {
            countOnRecordsCalled++;
        }
```

```
        void incrementContinuationEvents() {
            countContinuationEvents++;
        }

        void addRecord(String record) {
            records.add(record);
        }

        void addStats(Stats stats) {
            this.stats = stats;
        }

        public List<String> getRecords() {
            return records;
        }

        public Integer getCountOnRecordsCalled() {
            return countOnRecordsCalled;
        }

        public Integer getCountContinuationEvents() {
            return countContinuationEvents;
        }

        public Stats getStats() {
            return stats;
        }
    }
```

- Untuk detail API, lihat SelectObjectContentdi Referensi AWS SDK for Java 2.x API.

### `UploadPartCopy`

Contoh kode berikut menunjukkan cara menggunakan`UploadPartCopy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public CompletableFuture<String> performMultiCopy(String toBucket, String
bucketName, String key) {
       CreateMultipartUploadRequest createMultipartUploadRequest =
CreateMultipartUploadRequest.builder()
           .bucket(toBucket)
           .key(key)
           .build();

       getAsyncClient().createMultipartUpload(createMultipartUploadRequest)
           .thenApply(createMultipartUploadResponse -> {
               String uploadId = createMultipartUploadResponse.uploadId();
               System.out.println("Upload ID: " + uploadId);

               UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                   .sourceBucket(bucketName)
                   .destinationBucket(toBucket)
                   .sourceKey(key)
                   .destinationKey(key)
                   .uploadId(uploadId)  // Use the valid uploadId.
                   .partNumber(1)  // Ensure the part number is correct.
                   .copySourceRange("bytes=0-1023")  // Adjust range as needed
                   .build();

               return getAsyncClient().uploadPartCopy(uploadPartCopyRequest);
           })
           .thenCompose(uploadPartCopyFuture -> uploadPartCopyFuture)
           .whenComplete((uploadPartCopyResponse, exception) -> {
               if (exception != null) {
                   // Handle any exceptions.
                   logger.error("Error during upload part copy: " +
exception.getMessage());
               } else {
                   // Successfully completed the upload part copy.
                   System.out.println("Upload Part Copy completed successfully.
ETag: " + uploadPartCopyResponse.copyPartResult().eTag());
               }
           });
       return null;
   }
```

- Untuk detail API, lihat UploadPartCopydi Referensi AWS SDK for Java 2.x API.

# Skenario

## Periksa apakah ada ember

Contoh kode berikut menunjukkan cara memeriksa apakah ada bucket.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Anda dapat menggunakan `doesBucketExists` metode berikut sebagai pengganti metode SDK for Java V1 doesBucketExist Amazons3Client# V2 (String).

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsServiceException;
import software.amazon.awssdk.http.HttpStatusCode;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.utils.Validate;

public class DoesBucketExist {
    private static final Logger logger =
 LoggerFactory.getLogger(DoesBucketExist.class);

    public static void main(String[] args) {
        DoesBucketExist doesBucketExist = new DoesBucketExist();

        final S3Client s3SyncClient = S3Client.builder().build();
        final String bucketName = "amzn-s3-demo-bucket"; // Change to the bucket
 name that you want to check.

        boolean exists = doesBucketExist.doesBucketExist(bucketName, s3SyncClient);
        logger.info("Bucket exists: {}", exists);
    }

    /**
```

```
     * Checks if the specified bucket exists. Amazon S3 buckets are named in a
 global namespace; use this method to
     * determine if a specified bucket name already exists, and therefore can't be
 used to create a new bucket.
     * <p>
     * Internally this method uses the <a
     * href="https://sdk.amazonaws.com/java/api/latest/software/amazon/awssdk/
services/s3/
S3Client.html#getBucketAcl(java.util.function.Consumer)">S3Client.getBucketAcl(String)</
a>
     * operation to determine whether the bucket exists.
     * <p>
     * This method is equivalent to the AWS SDK for Java V1's <a
     * href="https://docs.aws.amazon.com/AWSJavaSDK/latest/javadoc/
com/amazonaws/services/s3/AmazonS3Client.html#doesBucketExistV2-
java.lang.String-">AmazonS3Client#doesBucketExistV2(String)</a>.
     *
     * @param bucketName   The name of the bucket to check.
     * @param s3SyncClient An <code>S3Client</code> instance. The method checks for
 the bucket in the AWS Region
     *                     configured on the instance.
     * @return The value true if the specified bucket exists in Amazon S3; the value
 false if there is no bucket in
     *         Amazon S3 with that name.
     */
    public boolean doesBucketExist(String bucketName, S3Client s3SyncClient) {
        try {
            Validate.notEmpty(bucketName, "The bucket name must not be null or an
 empty string.", "");
            s3SyncClient.getBucketAcl(r -> r.bucket(bucketName));
            return true;
        } catch (AwsServiceException ase) {
            // A redirect error or an AccessDenied exception means the bucket exists
 but it's not in this region
            // or we don't have permissions to it.
            if ((ase.statusCode() == HttpStatusCode.MOVED_PERMANENTLY) ||
 "AccessDenied".equals(ase.awsErrorDetails().errorCode())) {
                return true;
            }
            if (ase.statusCode() == HttpStatusCode.NOT_FOUND) {
                return false;
            }
            throw ase;
        }
```

```
    }
}
```

- Untuk detail API, lihat GetBucketAcldi Referensi AWS SDK for Java 2.x API.

Membuat URL yang telah ditetapkan sebelumnya

Contoh kode berikut menunjukkan cara membuat URL presigned untuk Amazon S3 dan mengunggah objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Berikut ini menunjukkan tiga contoh cara membuat presigned URLs dan menggunakan URLs dengan perpustakaan klien HTTP:

- Permintaan HTTP GET yang menggunakan URL dengan tiga pustaka klien HTTP
- Permintaan HTTP PUT dengan metadata di header yang menggunakan URL dengan tiga pustaka klien HTTP
- Permintaan HTTP PUT dengan parameter kueri yang menggunakan URL dengan satu pustaka klien HTTP

Buat URL yang telah ditandatangani sebelumnya untuk suatu objek, lalu unduh (GET request).

Impor.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
```

```
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;
import software.amazon.awssdk.utils.IoUtils;

import java.io.ByteArrayOutputStream;
import java.io.File;
import java.io.IOException;
import java.io.InputStream;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.UUID;
```

Hasilkan URL.

```
    /* Create a pre-signed URL to download an object in a subsequent GET request. */
    public String createPresignedGetUrl(String bucketName, String keyName) {
        try (S3Presigner presigner = S3Presigner.create()) {

            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .bucket(bucketName)
                    .key(keyName)
                    .build();

            GetObjectPresignRequest presignRequest =
 GetObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL will
 expire in 10 minutes.
                    .getObjectRequest(objectRequest)
                    .build();

            PresignedGetObjectRequest presignedRequest =
 presigner.presignGetObject(presignRequest);
            logger.info("Presigned URL: [{}]", presignedRequest.url().toString());
```

```
            logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Unduh objek dengan menggunakan salah satu dari tiga pendekatan berikut.

Gunakan kelas JDK `HttpURLConnection` (sejak v1.1) untuk melakukan download.

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the download. */
    public byte[] useHttpUrlConnectionToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.

        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setRequestMethod("GET");
            // Download the result of executing the request.
            try (InputStream content = connection.getInputStream()) {
                IoUtils.copy(content, byteArrayOutputStream);
            }
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Gunakan kelas JDK `HttpClient` (sejak v11) untuk melakukan download.

```
    /* Use the JDK HttpClient (since v11) class to do the download. */
    public byte[] useHttpClientToGet(String presignedUrlString) {
        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
```

```
        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpResponse<InputStream> response = httpClient.send(requestBuilder
                            .uri(presignedUrl.toURI())
                            .GET()
                            .build(),
                    HttpResponse.BodyHandlers.ofInputStream());

            IoUtils.copy(response.body(), byteArrayOutputStream);

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Gunakan kelas AWS SDK for `SdkHttpClient` Java untuk melakukan download.

```
    /* Use the AWS SDK for Java SdkHttpClient class to do the download. */
    public byte[] useSdkHttpClientToGet(String presignedUrlString) {

        ByteArrayOutputStream byteArrayOutputStream = new
ByteArrayOutputStream(); // Capture the response body to a byte array.
        try {
            URL presignedUrl = new URL(presignedUrlString);
            SdkHttpRequest request = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.GET)
                    .uri(presignedUrl.toURI())
                    .build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                response.responseBody().ifPresentOrElse(
                        abortableInputStream -> {
```

```
                            try {
                                IoUtils.copy(abortableInputStream,
byteArrayOutputStream);
                            } catch (IOException e) {
                                throw new RuntimeException(e);
                            }
                        },
                        () -> logger.error("No response body."));

                logger.info("HTTP Response code is {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
        return byteArrayOutputStream.toByteArray();
    }
```

Buat URL yang telah ditandatangani sebelumnya dengan metadata di header untuk diunggah, lalu unggah file (permintaan PUT).

Impor.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
import java.io.OutputStream;
```

```
import java.io.RandomAccessFile;
import java.net.HttpURLConnection;
import java.net.URISyntaxException;
import java.net.URL;
import java.net.http.HttpClient;
import java.net.http.HttpRequest;
import java.net.http.HttpResponse;
import java.nio.ByteBuffer;
import java.nio.channels.FileChannel;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

Hasilkan URL.

```
   /* Create a presigned URL to use in a subsequent PUT request */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> metadata) {
       try (S3Presigner presigner = S3Presigner.create()) {

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
                   .metadata(metadata)
                   .build();

           PutObjectPresignRequest presignRequest =
PutObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10))  // The URL expires
in 10 minutes.
                   .putObjectRequest(objectRequest)
                   .build();


           PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
           String myURL = presignedRequest.url().toString();
           logger.info("Presigned URL to upload a file to: [{}]", myURL);
           logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());
```

```
            return presignedRequest.url().toExternalForm();
        }
    }
```

Unggah objek file dengan menggunakan salah satu dari tiga pendekatan berikut.

Gunakan kelas JDK `HttpURLConnection` (sejak v1.1) untuk melakukan upload.

```
    /* Use the JDK HttpURLConnection (since v1.1) class to do the upload. */
    public void useHttpUrlConnectionToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());
        try {
            URL presignedUrl = new URL(presignedUrlString);
            HttpURLConnection connection = (HttpURLConnection)
presignedUrl.openConnection();
            connection.setDoOutput(true);
            metadata.forEach((k, v) -> connection.setRequestProperty("x-amz-meta-" +
k, v));
            connection.setRequestMethod("PUT");
            OutputStream out = connection.getOutputStream();

            try (RandomAccessFile file = new RandomAccessFile(fileToPut, "r");
                 FileChannel inChannel = file.getChannel()) {
                ByteBuffer buffer = ByteBuffer.allocate(8192); //Buffer size is 8k

                while (inChannel.read(buffer) > 0) {
                    buffer.flip();
                    for (int i = 0; i < buffer.limit(); i++) {
                        out.write(buffer.get());
                    }
                    buffer.clear();
                }
            } catch (IOException e) {
                logger.error(e.getMessage(), e);
            }

            out.close();
            connection.getResponseCode();
            logger.info("HTTP response code is " + connection.getResponseCode());

        } catch (S3Exception | IOException e) {
```

```
            logger.error(e.getMessage(), e);
        }
    }
```

Gunakan kelas JDK `HttpClient` (sejak v11) untuk melakukan upload.

```
    /* Use the JDK HttpClient (since v11) class to do the upload. */
    public void useHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        HttpRequest.Builder requestBuilder = HttpRequest.newBuilder();
        metadata.forEach((k, v) -> requestBuilder.header("x-amz-meta-" + k, v));

        HttpClient httpClient = HttpClient.newHttpClient();
        try {
            final HttpResponse<Void> response = httpClient.send(requestBuilder
                            .uri(new URL(presignedUrlString).toURI())

.PUT(HttpRequest.BodyPublishers.ofFile(Path.of(fileToPut.toURI())))
                            .build(),
                    HttpResponse.BodyHandlers.discarding());

            logger.info("HTTP response code is " + response.statusCode());

        } catch (URISyntaxException | InterruptedException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Gunakan `SdkHttpClient` kelas AWS for Java V2 untuk melakukan upload.

```
    /* Use the AWS SDK for Java V2 SdkHttpClient class to do the upload. */
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut,
Map<String, String> metadata) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        try {
            URL presignedUrl = new URL(presignedUrlString);

            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
```

```
                    .method(SdkHttpMethod.PUT)
                    .uri(presignedUrl.toURI());
            // Add headers
            metadata.forEach((k, v) -> requestBuilder.putHeader("x-amz-meta-" + k,
v));
            // Finish building the request.
            SdkHttpRequest request = requestBuilder.build();

            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Buat URL yang telah ditandatangani sebelumnya dengan parameter kueri untuk unggahan, lalu unggah file (permintaan PUT).

Impor.

```
import com.example.s3.util.PresignUrlUtils;
import org.slf4j.Logger;
import software.amazon.awssdk.awscore.AwsRequestOverrideConfiguration;
import software.amazon.awssdk.core.internal.sync.FileContentStreamProvider;
import software.amazon.awssdk.http.HttpExecuteRequest;
import software.amazon.awssdk.http.HttpExecuteResponse;
import software.amazon.awssdk.http.SdkHttpClient;
import software.amazon.awssdk.http.SdkHttpMethod;
import software.amazon.awssdk.http.SdkHttpRequest;
import software.amazon.awssdk.http.apache.ApacheHttpClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
```

```
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.PresignedPutObjectRequest;
import software.amazon.awssdk.services.s3.presigner.model.PutObjectPresignRequest;

import java.io.File;
import java.io.IOException;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.time.Duration;
import java.util.Map;
import java.util.UUID;
```

Hasilkan URL.

```
   /**
    *  Creates a presigned URL to use in a subsequent HTTP PUT request. The code
adds query parameters
    *  to the request instead of using headers. By using query parameters, you do
not need to add the
    *  the parameters as headers when the PUT request is eventually sent.
    *
    * @param bucketName Bucket name where the object will be uploaded.
    * @param keyName Key name of the object that will be uploaded.
    * @param queryParams Query string parameters to be added to the presigned URL.
    * @return
    */
   public String createPresignedUrl(String bucketName, String keyName, Map<String,
String> queryParams) {
       try (S3Presigner presigner = S3Presigner.create()) {
           // Create an override configuration to store the query parameters.
           AwsRequestOverrideConfiguration.Builder overrideConfigurationBuilder =
AwsRequestOverrideConfiguration.builder();

           queryParams.forEach(overrideConfigurationBuilder::putRawQueryParameter);

           PutObjectRequest objectRequest = PutObjectRequest.builder()
                   .bucket(bucketName)
                   .key(keyName)
                   .overrideConfiguration(overrideConfigurationBuilder.build()) //
Add the override configuration.
                   .build();
```

```
            PutObjectPresignRequest presignRequest =
PutObjectPresignRequest.builder()
                    .signatureDuration(Duration.ofMinutes(10))  // The URL expires
in 10 minutes.
                    .putObjectRequest(objectRequest)
                    .build();


            PresignedPutObjectRequest presignedRequest =
presigner.presignPutObject(presignRequest);
            String myURL = presignedRequest.url().toString();
            logger.info("Presigned URL to upload a file to: [{}]", myURL);
            logger.info("HTTP method: [{}]",
presignedRequest.httpRequest().method());

            return presignedRequest.url().toExternalForm();
        }
    }
```

Gunakan `SdkHttpClient` kelas AWS for Java V2 untuk melakukan upload.

```
    /**
     * Use the AWS SDK for Java V2 SdkHttpClient class to execute the PUT request.
Since the
     * URL contains the query parameters, no headers are needed for metadata, SSE
settings, or ACL settings.
     *
     * @param presignedUrlString The URL for the PUT request.
     * @param fileToPut File to uplaod
     */
    public void useSdkHttpClientToPut(String presignedUrlString, File fileToPut) {
        logger.info("Begin [{}] upload", fileToPut.toString());

        try {
            URL presignedUrl = new URL(presignedUrlString);

            SdkHttpRequest.Builder requestBuilder = SdkHttpRequest.builder()
                    .method(SdkHttpMethod.PUT)
                    .uri(presignedUrl.toURI());

            SdkHttpRequest request = requestBuilder.build();
```

```
            HttpExecuteRequest executeRequest = HttpExecuteRequest.builder()
                    .request(request)
                    .contentStreamProvider(new
FileContentStreamProvider(fileToPut.toPath()))
                    .build();

            try (SdkHttpClient sdkHttpClient = ApacheHttpClient.create()) {
                HttpExecuteResponse response =
sdkHttpClient.prepareRequest(executeRequest).call();
                logger.info("Response code: {}",
response.httpResponse().statusCode());
            }
        } catch (URISyntaxException | IOException e) {
            logger.error(e.getMessage(), e);
        }
    }
```

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3

- Amazon SNS

Hapus unggahan multipart yang tidak lengkap

Contoh kode berikut menunjukkan cara menghapus atau menghentikan unggahan multipart Amazon S3 yang tidak lengkap.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Untuk menghentikan unggahan multibagian yang sedang berlangsung atau tidak lengkap karena alasan apa pun, Anda bisa mendapatkan unggahan daftar lalu menghapusnya seperti yang ditunjukkan pada contoh berikut.

```
   /**
    * Aborts all incomplete multipart uploads from the specified S3 bucket.
    * <p>
    * This method retrieves a list of all incomplete multipart uploads in the
specified S3 bucket,
    * and then aborts each of those uploads.
    */
   public static void abortIncompleteMultipartUploadsFromList() {
       ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
           .bucket(bucketName)
           .build();

       ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
       List<MultipartUpload> uploads = response.uploads();

       AbortMultipartUploadRequest abortMultipartUploadRequest;
       for (MultipartUpload upload : uploads) {
           abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
               .bucket(bucketName)
               .key(upload.key())
```

```
                .expectedBucketOwner(accountId)
                .uploadId(upload.uploadId())
                .build();

            AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
            if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
                logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
upload.uploadId(), bucketName);
            }
        }
    }
```

Untuk menghapus unggahan multibagian yang tidak lengkap yang dimulai sebelum atau sesudah tanggal, Anda dapat menghapus unggahan multibagian secara selektif berdasarkan titik waktu seperti yang ditunjukkan pada contoh berikut.

```
    static void abortIncompleteMultipartUploadsOlderThan(Instant pointInTime) {
        ListMultipartUploadsRequest listMultipartUploadsRequest =
ListMultipartUploadsRequest.builder()
            .bucket(bucketName)
            .build();

        ListMultipartUploadsResponse response =
s3Client.listMultipartUploads(listMultipartUploadsRequest);
        List<MultipartUpload> uploads = response.uploads();

        AbortMultipartUploadRequest abortMultipartUploadRequest;
        for (MultipartUpload upload : uploads) {
            logger.info("Found multipartUpload with upload ID [{}], initiated [{}]",
upload.uploadId(), upload.initiated());
            if (upload.initiated().isBefore(pointInTime)) {
                abortMultipartUploadRequest = AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(upload.key())
                    .expectedBucketOwner(accountId)
                    .uploadId(upload.uploadId())
                    .build();

                AbortMultipartUploadResponse abortMultipartUploadResponse =
s3Client.abortMultipartUpload(abortMultipartUploadRequest);
                if (abortMultipartUploadResponse.sdkHttpResponse().isSuccessful()) {
```

```
                    logger.info("Upload ID [{}] to bucket [{}] successfully
aborted.", upload.uploadId(), bucketName);
                }
            }
        }
    }
```

Jika Anda memiliki akses ke ID unggahan setelah memulai unggahan multibagian, Anda dapat menghapus unggahan yang sedang berlangsung dengan menggunakan ID.

```
    static void abortMultipartUploadUsingUploadId() {
        String uploadId = startUploadReturningUploadId();
        AbortMultipartUploadResponse response = s3Client.abortMultipartUpload(b -> b
            .uploadId(uploadId)
            .bucket(bucketName)
            .key(key));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Upload ID [{}] to bucket [{}] successfully aborted.",
uploadId, bucketName);
        }
    }
```

Untuk secara konsisten menghapus unggahan multibagian yang tidak lengkap yang lebih lama dalam beberapa hari tertentu, siapkan konfigurasi siklus hidup bucket untuk bucket. Contoh berikut menunjukkan cara membuat aturan untuk menghapus unggahan yang tidak lengkap yang lebih lama dari 7 hari.

```
    static void abortMultipartUploadsUsingLifecycleConfig() {
        Collection<LifecycleRule> lifeCycleRules = List.of(LifecycleRule.builder()
            .abortIncompleteMultipartUpload(b -> b.
                daysAfterInitiation(7))
            .status("Enabled")
            .filter(SdkBuilder::build) // Filter element is required.
            .build());

        // If the action is successful, the service sends back an HTTP 200 response
with an empty HTTP body.
        PutBucketLifecycleConfigurationResponse response =
s3Client.putBucketLifecycleConfiguration(b -> b
```

```
            .bucket(bucketName)
            .lifecycleConfiguration(b1 -> b1.rules(lifeCycleRules)));

        if (response.sdkHttpResponse().isSuccessful()) {
            logger.info("Rule to abort incomplete multipart uploads added to
bucket.");
        } else {
            logger.error("Unsuccessfully applied rule. HTTP status code is [{}]",
response.sdkHttpResponse().statusCode());
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AbortMultipartUpload
  - ListMultipartUploads
  - PutBucketLifecycleConfiguration

Mendeteksi APD dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi Alat Pelindung Diri (APD) dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi yang mendeteksi gambar dengan Alat Pelindung Diri.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

### Mendeteksi objek dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi objek berdasarkan kategori dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi yang menggunakan Amazon Rekognition untuk mengidentifikasi objek berdasarkan kategori dalam gambar yang terletak di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES

### Mendeteksi orang dan objek dalam video

Contoh kode berikut menunjukkan cara mendeteksi orang dan objek dalam video dengan Amazon Rekognition.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi guna mendeteksi wajah dan objek di video yang berada di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3

- Amazon SES
- Amazon SNS
- Amazon SQS

Unduh 'direktori' S3

Contoh kode berikut menunjukkan cara mengunduh dan memfilter konten 'direktori' bucket Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini menunjukkan cara menggunakan S3 TransferManager di AWS SDK for Java 2.x untuk mengunduh 'direktori' dari bucket Amazon S3. Ini juga menunjukkan bagaimana menggunakan DownloadFiltersdalam permintaan.

```
    /**
     * For standard buckets, S3 provides the illusion of a directory structure
through the use of keys. When you upload
     * an object to an S3 bucket, you specify a key, which is essentially the "path"
to the object. The key can contain
     * forward slashes ("/") to make it appear as if the object is stored in a
directory structure, but this is just a
     * logical representation, not an actual directory.
     * <p><pre>
     * In this example, our S3 bucket contains the following objects:
     *
     * folder1/file1.txt
     * folder1/file2.txt
     * folder1/file3.txt
     * folder2/file1.txt
     * folder2/file2.txt
     * folder2/file3.txt
     * folder3/file1.txt
     * folder3/file2.txt
     * folder3/file3.txt
```

```
    *
    * When method `downloadS3Directories` is invoked with
    * `destinationPathURI` set to `/test`, the downloaded
    * directory looks like:
    *
    * |- test
    *    |- folder1
    *       |- file1.txt
    *       |- file2.txt
    *       |- file3.txt
    *    |- folder3
    *       |- file1.txt
    *       |- file2.txt
    *       |- file3.txt
    * </pre>
    *
    * @param transferManager    An S3TransferManager instance.
    * @param destinationPathURI local directory to hold the downloaded S3
'directories' and files.
    * @param bucketName         The S3 bucket that contains the 'directories' to
download.
    * @return The number of objects (files, in this case) that were downloaded.
    */
   public Integer downloadS3Directories(S3TransferManager transferManager,
                                        URI destinationPathURI, String bucketName)
{

       // Define the filters for which 'directories' we want to download.
       DownloadFilter folder1Filter = (S3Object s3Object) ->
s3Object.key().startsWith("folder1/");
       DownloadFilter folder3Filter = (S3Object s3Object) ->
s3Object.key().startsWith("folder3/");
       DownloadFilter folderFilter = s3Object ->
folder1Filter.or(folder3Filter).test(s3Object);

       DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
               .destination(Paths.get(destinationPathURI))
               .bucket(bucketName)
               .filter(folderFilter)
               .build());
       CompletedDirectoryDownload completedDirectoryDownload =
directoryDownload.completionFuture().join();
```

```
        Integer numFilesInFolder1 =
 Paths.get(destinationPathURI).resolve("folder1").toFile().list().length;
        Integer numFilesInFolder3 =
 Paths.get(destinationPathURI).resolve("folder3").toFile().list().length;

        try {
            assert numFilesInFolder1 == 3;
            assert numFilesInFolder3 == 3;
            assert !
Paths.get(destinationPathURI).resolve("folder2").toFile().exists(); // `folder2` was
 not downloaded.
        } catch (AssertionError e) {
            logger.error("An assertion failed.");
        }

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object failed to transfer  [{}]",
 fail.exception().getMessage()));
        return numFilesInFolder1 + numFilesInFolder3;
    }
```

Mengunduh objek ke direktori lokal

Contoh Kode berikut ini menunjukkan cara mengunduh semua objek di bucket Amazon Simple Storage Service (Amazon S3) ke direktori lokal.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan S3 TransferManager untuk mengunduh semua objek S3 di bucket S3 yang sama. Lihat file lengkap dan lakukan pengujian.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
```

```
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DirectoryDownload;
import software.amazon.awssdk.transfer.s3.model.DownloadDirectoryRequest;
import java.io.IOException;
import java.net.URI;
import java.net.URISyntaxException;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.HashSet;
import java.util.Set;
import java.util.UUID;
import java.util.stream.Collectors;

    public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
            URI destinationPathURI, String bucketName) {
        DirectoryDownload directoryDownload =
 transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
                .destination(Paths.get(destinationPathURI))
                .bucket(bucketName)
                .build());
        CompletedDirectoryDownload completedDirectoryDownload =
 directoryDownload.completionFuture().join();

        completedDirectoryDownload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
 fail.toString()));
        return completedDirectoryDownload.failedTransfers().size();
    }
```

- Untuk detail API, lihat DownloadDirectorydi Referensi AWS SDK for Java 2.x API.

## Kunci objek Amazon S3

Contoh kode berikut menunjukkan cara bekerja dengan fitur kunci objek S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang mendemonstrasikan fitur kunci objek Amazon S3.

```
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHold;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import java.io.BufferedWriter;
import java.io.IOException;
import java.util.ArrayList;
import java.util.List;
import java.util.Scanner;
import java.util.stream.Collectors;

/*
 Before running this Java V2 code example, set up your development
 environment, including your credentials.

 For more information, see the following documentation topic:
 https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html

 This Java example performs the following tasks:
    1. Create test Amazon Simple Storage Service (S3) buckets with different lock
 policies.
    2. Upload sample objects to each bucket.
    3. Set some Legal Hold and Retention Periods on objects and buckets.
    4. Investigate lock policies by viewing settings or attempting to delete or
 overwrite objects.
    5. Clean up objects and buckets.
 */
public class S3ObjectLockWorkflow {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    static String bucketName;
    static S3LockActions s3LockActions;
    private static final List<String> bucketNames = new ArrayList<>();
    private static final List<String> fileNames = new ArrayList<>();
```

```
    public static void main(String[] args) {
        final String usage = """
            Usage:
                <bucketName> \s

            Where:
                bucketName - The Amazon S3 bucket name.
           """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }
        s3LockActions = new S3LockActions();
        bucketName = args[0];
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon Simple Storage Service (S3) Object
Locking Feature Scenario.");
        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        configurationSetup();
        System.out.println(DASHES);

        System.out.println(DASHES);
        setup();
        System.out.println("Setup is complete. Press Enter to continue...");
        scanner.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Lets present the user with choices.");
        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        demoActionChoices() ;
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Would you like to clean up the resources? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            cleanup();
            System.out.println("Clean up is complete.");
```

```
        }

        System.out.println("Press Enter to continue...");
        scanner.nextLine();
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Amazon S3 Object Locking Workflow is complete.");
        System.out.println(DASHES);
    }

    // Present the user with the demo action choices.
    public static void demoActionChoices() {
        String[] choices = {
            "List all files in buckets.",
            "Attempt to delete a file.",
            "Attempt to delete a file with retention period bypass.",
            "Attempt to overwrite a file.",
            "View the object and bucket retention settings for a file.",
            "View the legal hold settings for a file.",
            "Finish the workflow."
        };

        int choice = 0;
        while (true) {
            System.out.println(DASHES);
            choice = getChoiceResponse("Explore the S3 locking features by selecting
one of the following choices:", choices);
            System.out.println(DASHES);
            System.out.println("You selected "+choices[choice]);
            switch (choice) {
                case 0 -> {
                    s3LockActions.listBucketsAndObjects(bucketNames, true);
                }

                case 1 -> {
                    System.out.println("Enter the number of the object to delete:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
```

```
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    String version = allFiles.get(fileChoice).getVersion();
                    s3LockActions.deleteObjectFromBucket(bucketName, objectKey,
false, version);
                }

                case 2 -> {
                    System.out.println("Enter the number of the object to delete:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    String version = allFiles.get(fileChoice).getVersion();
                    s3LockActions.deleteObjectFromBucket(bucketName, objectKey,
true, version);
                }

                case 3 -> {
                    System.out.println("Enter the number of the object to
overwrite:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();

                    // Attempt to overwrite the file.
                    try (BufferedWriter writer = new BufferedWriter(new
java.io.FileWriter(objectKey))) {
                        writer.write("This is a modified text.");

                    } catch (IOException e) {
                        e.printStackTrace();
                    }
                    s3LockActions.uploadFile(bucketName, objectKey, objectKey);
                }
```

```
                case 4 -> {
                    System.out.println("Enter the number of the object to
overwrite:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    s3LockActions.getObjectRetention(bucketName, objectKey);
                }

                case 5 -> {
                    System.out.println("Enter the number of the object to view:");
                    List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, true);
                    List<String> fileKeys = allFiles.stream().map(f ->
f.getKeyName()).collect(Collectors.toList());
                    String[] fileKeysArray = fileKeys.toArray(new String[0]);
                    int fileChoice = getChoiceResponse(null, fileKeysArray);
                    String objectKey = fileKeys.get(fileChoice);
                    String bucketName = allFiles.get(fileChoice).getBucketName();
                    s3LockActions.getObjectLegalHold(bucketName, objectKey);
                    s3LockActions.getBucketObjectLockConfiguration(bucketName);
                }

                case 6 -> {
                    System.out.println("Exiting the workflow...");
                    return;
                }

                default -> {
                    System.out.println("Invalid choice. Please select again.");
                }
            }
        }
    }

    // Clean up the resources from the scenario.
    private static void cleanup() {
        List<S3InfoObject> allFiles =
s3LockActions.listBucketsAndObjects(bucketNames, false);
```

```
        for (S3InfoObject fileInfo : allFiles) {
            String bucketName = fileInfo.getBucketName();
            String key = fileInfo.getKeyName();
            String version = fileInfo.getVersion();
            if (bucketName.contains("lock-enabled") ||
(bucketName.contains("retention-after-creation"))) {
                ObjectLockLegalHold legalHold =
s3LockActions.getObjectLegalHold(bucketName, key);
                if (legalHold != null) {
                    String holdStatus = legalHold.status().name();
                    System.out.println(holdStatus);
                    if (holdStatus.compareTo("ON") == 0) {
                        s3LockActions.modifyObjectLegalHold(bucketName, key, false);
                    }
                }
                // Check for a retention period.
                ObjectLockRetention retention =
s3LockActions.getObjectRetention(bucketName, key);
                boolean hasRetentionPeriod ;
                hasRetentionPeriod = retention != null;
                s3LockActions.deleteObjectFromBucket(bucketName,
key,hasRetentionPeriod, version);

            } else {
                System.out.println(bucketName +" objects do not have a legal lock");
                s3LockActions.deleteObjectFromBucket(bucketName, key,false,
version);
            }
        }

        // Delete the buckets.
        System.out.println("Delete "+bucketName);
        for (String bucket : bucketNames){
            s3LockActions.deleteBucketByName(bucket);
        }
    }

    private static void setup() {
        Scanner scanner = new Scanner(System.in);
        System.out.println("""
                For this workflow, we will use the AWS SDK for Java to create
several S3
                buckets and files to demonstrate working with S3 locking features.
                """);
```

```
        System.out.println("S3 buckets can be created either with or without object
lock enabled.");
        System.out.println("Press Enter to continue...");
        scanner.nextLine();

        // Create three S3 buckets.
        s3LockActions.createBucketWithLockOptions(false, bucketNames.get(0));
        s3LockActions.createBucketWithLockOptions(true, bucketNames.get(1));
        s3LockActions.createBucketWithLockOptions(false, bucketNames.get(2));
        System.out.println("Press Enter to continue.");
        scanner.nextLine();

        System.out.println("Bucket "+bucketNames.get(2) +" will be configured to use
object locking with a default retention period.");
        s3LockActions.modifyBucketDefaultRetention(bucketNames.get(2));
        System.out.println("Press Enter to continue.");
        scanner.nextLine();

        System.out.println("Object lock policies can also be added to existing
buckets. For this example, we will use "+bucketNames.get(1));
        s3LockActions.enableObjectLockOnBucket(bucketNames.get(1));
        System.out.println("Press Enter to continue.");
        scanner.nextLine();

        // Upload some files to the buckets.
        System.out.println("Now let's add some test files:");
        String fileName = "exampleFile.txt";
        int fileCount = 2;
        try (BufferedWriter writer = new BufferedWriter(new
java.io.FileWriter(fileName))) {
            writer.write("This is a sample file for uploading to a bucket.");

        } catch (IOException e) {
            e.printStackTrace();
        }

        for (String bucketName : bucketNames){
            for (int i = 0; i < fileCount; i++) {
                // Get the file name without extension.
                String fileNameWithoutExtension =
java.nio.file.Paths.get(fileName).getFileName().toString();
                int extensionIndex = fileNameWithoutExtension.lastIndexOf('.');
                if (extensionIndex > 0) {
```

```
                    fileNameWithoutExtension = fileNameWithoutExtension.substring(0,
extensionIndex);
                }

                // Create the numbered file names.
                String numberedFileName = fileNameWithoutExtension + i +
getFileExtension(fileName);
                fileNames.add(numberedFileName);
                s3LockActions.uploadFile(bucketName, numberedFileName, fileName);
            }
        }

        String question = null;
        System.out.print("Press Enter to continue...");
        scanner.nextLine();
        System.out.println("Now we can set some object lock policies on individual
files:");
        for (String bucketName : bucketNames) {
            for (int i = 0; i < fileNames.size(); i++){

                // No modifications to the objects in the first bucket.
                if (!bucketName.equals(bucketNames.get(0))) {
                    String exampleFileName = fileNames.get(i);
                    switch (i) {
                        case 0 -> {
                            question = "Would you like to add a legal hold to " +
exampleFileName + " in " + bucketName + " (y/n)?";
                            System.out.println(question);
                            String ans = scanner.nextLine().trim();
                            if (ans.equalsIgnoreCase("y")) {
                                System.out.println("**** You have selected to put a
legal hold " + exampleFileName);

                                // Set a legal hold.
                                s3LockActions.modifyObjectLegalHold(bucketName,
exampleFileName, true);
                            }
                        }
                        case 1 -> {
                            """
                                Would you like to add a 1 day Governance retention
period to %s in %s (y/n)?
```

```
                                Reminder: Only a user with the
 s3:BypassGovernanceRetention permission will be able to delete this file or its
 bucket until the retention period has expired.
                                """.formatted(exampleFileName, bucketName);
                            System.out.println(question);
                            String ans2 = scanner.nextLine().trim();
                            if (ans2.equalsIgnoreCase("y")) {

 s3LockActions.modifyObjectRetentionPeriod(bucketName, exampleFileName);
                            }
                        }
                    }
                }
            }
        }

    // Get file extension.
    private static String getFileExtension(String fileName) {
        int dotIndex = fileName.lastIndexOf('.');
        if (dotIndex > 0) {
            return fileName.substring(dotIndex);
        }
        return "";
    }

    public static void configurationSetup() {
        String noLockBucketName = bucketName + "-no-lock";
        String lockEnabledBucketName = bucketName + "-lock-enabled";
        String retentionAfterCreationBucketName = bucketName + "-retention-after-
creation";
        bucketNames.add(noLockBucketName);
        bucketNames.add(lockEnabledBucketName);
        bucketNames.add(retentionAfterCreationBucketName);
    }

    public static int getChoiceResponse(String question, String[] choices) {
        Scanner scanner = new Scanner(System.in);
        if (question != null) {
            System.out.println(question);
            for (int i = 0; i < choices.length; i++) {
                System.out.println("\t" + (i + 1) + ". " + choices[i]);
            }
        }
```

```
        int choiceNumber = 0;
        while (choiceNumber < 1 || choiceNumber > choices.length) {
            String choice = scanner.nextLine();
            try {
                choiceNumber = Integer.parseInt(choice);
            } catch (NumberFormatException e) {
                System.out.println("Invalid choice. Please enter a valid number.");
            }
        }

        return choiceNumber - 1;
    }
}
```

Kelas pembungkus untuk fungsi S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketVersioningStatus;
import software.amazon.awssdk.services.s3.model.ChecksumAlgorithm;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DefaultRetention;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLegalHoldRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLegalHoldResponse;
import software.amazon.awssdk.services.s3.model.GetObjectLockConfigurationRequest;
import software.amazon.awssdk.services.s3.model.GetObjectLockConfigurationResponse;
import software.amazon.awssdk.services.s3.model.GetObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.GetObjectRetentionResponse;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
import software.amazon.awssdk.services.s3.model.MFADelete;
import software.amazon.awssdk.services.s3.model.ObjectLockConfiguration;
import software.amazon.awssdk.services.s3.model.ObjectLockEnabled;
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHold;
import software.amazon.awssdk.services.s3.model.ObjectLockLegalHoldStatus;
import software.amazon.awssdk.services.s3.model.ObjectLockRetention;
import software.amazon.awssdk.services.s3.model.ObjectLockRetentionMode;
import software.amazon.awssdk.services.s3.model.ObjectLockRule;
```

```
import software.amazon.awssdk.services.s3.model.PutBucketVersioningRequest;
import software.amazon.awssdk.services.s3.model.PutObjectLegalHoldRequest;
import software.amazon.awssdk.services.s3.model.PutObjectLockConfigurationRequest;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.PutObjectRetentionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.VersioningConfiguration;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.time.Instant;
import java.time.ZoneId;
import java.time.ZonedDateTime;
import java.time.format.DateTimeFormatter;
import java.time.temporal.ChronoUnit;
import java.util.List;
import java.util.concurrent.atomic.AtomicInteger;
import java.util.stream.Collectors;

// Contains application logic for the Amazon S3 operations used in this workflow.
public class S3LockActions {

    private static S3Client getClient() {
        return S3Client.builder()
            .region(Region.US_EAST_1)
            .build();
    }

    // Set or modify a retention period on an object in an S3 bucket.
    public void modifyObjectRetentionPeriod(String bucketName, String objectKey) {
        // Calculate the instant one day from now.
        Instant futureInstant = Instant.now().plus(1, ChronoUnit.DAYS);

        // Convert the Instant to a ZonedDateTime object with a specific time zone.
        ZonedDateTime zonedDateTime = futureInstant.atZone(ZoneId.systemDefault());

        // Define a formatter for human-readable output.
        DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
 HH:mm:ss");

        // Format the ZonedDateTime object to a human-readable date string.
        String humanReadableDate = formatter.format(zonedDateTime);
```

```
        // Print the formatted date string.
        System.out.println("Formatted Date: " + humanReadableDate);
        ObjectLockRetention retention = ObjectLockRetention.builder()
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .retainUntilDate(futureInstant)
            .build();

        PutObjectRetentionRequest retentionRequest =
PutObjectRetentionRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .retention(retention)
            .build();

        getClient().putObjectRetention(retentionRequest);
        System.out.println("Set retention for "+objectKey +" in " +bucketName +"
until "+ humanReadableDate +".");
    }

    // Get the legal hold details for an S3 object.
    public ObjectLockLegalHold getObjectLegalHold(String bucketName, String
objectKey) {
        try {
            GetObjectLegalHoldRequest legalHoldRequest =
GetObjectLegalHoldRequest.builder()
                .bucket(bucketName)
                .key(objectKey)
                .build();

            GetObjectLegalHoldResponse response =
getClient().getObjectLegalHold(legalHoldRequest);
            System.out.println("Object legal hold for " + objectKey + " in " +
bucketName +
                ":\n\tStatus: " + response.legalHold().status());
            return response.legalHold();

        } catch (S3Exception ex) {
            System.out.println("\tUnable to fetch legal hold: '" + ex.getMessage() +
"'");
        }

        return null;
    }
```

```
   // Create a new Amazon S3 bucket with object lock options.
   public void createBucketWithLockOptions(boolean enableObjectLock, String
bucketName) {
       S3Waiter s3Waiter = getClient().waiter();
       CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
           .bucket(bucketName)
           .objectLockEnabledForBucket(enableObjectLock)
           .build();

       getClient().createBucket(bucketRequest);
       HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
           .bucket(bucketName)
           .build();

       // Wait until the bucket is created and print out the response.
       s3Waiter.waitUntilBucketExists(bucketRequestWait);
       System.out.println(bucketName + " is ready");
   }

   public List<S3InfoObject> listBucketsAndObjects(List<String> bucketNames,
Boolean interactive) {
       AtomicInteger counter = new AtomicInteger(0); // Initialize counter.
       return bucketNames.stream()
           .flatMap(bucketName ->
listBucketObjectsAndVersions(bucketName).versions().stream()
               .map(version -> {
                   S3InfoObject s3InfoObject = new S3InfoObject();
                   s3InfoObject.setBucketName(bucketName);
                   s3InfoObject.setVersion(version.versionId());
                   s3InfoObject.setKeyName(version.key());
                   return s3InfoObject;
               }))
           .peek(s3InfoObject -> {
               int i = counter.incrementAndGet(); // Increment and get the updated
value.
               if (interactive) {
                   System.out.println(i + ": "+ s3InfoObject.getKeyName());
                   System.out.printf("%5s Bucket name: %s\n", "",
s3InfoObject.getBucketName());
                   System.out.printf("%5s Version: %s\n", "",
s3InfoObject.getVersion());
               }
           })
           .collect(Collectors.toList());
```

```
    }

    public ListObjectVersionsResponse listBucketObjectsAndVersions(String
bucketName) {
        ListObjectVersionsRequest versionsRequest =
ListObjectVersionsRequest.builder()
            .bucket(bucketName)
            .build();

        return getClient().listObjectVersions(versionsRequest);
    }

    // Set or modify a retention period on an S3 bucket.
    public void modifyBucketDefaultRetention(String bucketName) {
        VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
            .mfaDelete(MFADelete.DISABLED)
            .status(BucketVersioningStatus.ENABLED)
            .build();

        PutBucketVersioningRequest versioningRequest =
PutBucketVersioningRequest.builder()
            .bucket(bucketName)
            .versioningConfiguration(versioningConfiguration)
            .build();

        getClient().putBucketVersioning(versioningRequest);
        DefaultRetention rention = DefaultRetention.builder()
            .days(1)
            .mode(ObjectLockRetentionMode.GOVERNANCE)
            .build();

        ObjectLockRule lockRule = ObjectLockRule.builder()
            .defaultRetention(rention)
            .build();

        ObjectLockConfiguration objectLockConfiguration =
ObjectLockConfiguration.builder()
            .objectLockEnabled(ObjectLockEnabled.ENABLED)
            .rule(lockRule)
            .build();

        PutObjectLockConfigurationRequest putObjectLockConfigurationRequest =
PutObjectLockConfigurationRequest.builder()
```

```
            .bucket(bucketName)
            .objectLockConfiguration(objectLockConfiguration)
            .build();

        getClient().putObjectLockConfiguration(putObjectLockConfigurationRequest) ;
        System.out.println("Added a default retention to bucket "+bucketName +".");
    }

    // Enable object lock on an existing bucket.
    public void enableObjectLockOnBucket(String bucketName) {
        try {
            VersioningConfiguration versioningConfiguration =
VersioningConfiguration.builder()
                .status(BucketVersioningStatus.ENABLED)
                .build();

            PutBucketVersioningRequest putBucketVersioningRequest =
PutBucketVersioningRequest.builder()
                .bucket(bucketName)
                .versioningConfiguration(versioningConfiguration)
                .build();

            // Enable versioning on the bucket.
            getClient().putBucketVersioning(putBucketVersioningRequest);
            PutObjectLockConfigurationRequest request =
PutObjectLockConfigurationRequest.builder()
                .bucket(bucketName)
                .objectLockConfiguration(ObjectLockConfiguration.builder()
                    .objectLockEnabled(ObjectLockEnabled.ENABLED)
                    .build())
                .build();

            getClient().putObjectLockConfiguration(request);
            System.out.println("Successfully enabled object lock on "+bucketName);

        } catch (S3Exception ex) {
            System.out.println("Error modifying object lock: '" + ex.getMessage() +
"'");
        }
    }

    public void uploadFile(String bucketName, String objectName, String filePath) {
        Path file = Paths.get(filePath);
        PutObjectRequest request = PutObjectRequest.builder()
```

```
            .bucket(bucketName)
            .key(objectName)
            .checksumAlgorithm(ChecksumAlgorithm.SHA256)
            .build();

        PutObjectResponse response = getClient().putObject(request, file);
        if (response != null) {
            System.out.println("\tSuccessfully uploaded " + objectName + " to " +
bucketName + ".");
        } else {
            System.out.println("\tCould not upload " + objectName + " to " +
bucketName + ".");
        }
    }

    // Set or modify a legal hold on an object in an S3 bucket.
    public void modifyObjectLegalHold(String bucketName, String objectKey, boolean
legalHoldOn) {
        ObjectLockLegalHold legalHold ;
        if (legalHoldOn) {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.ON)
                .build();
        } else {
            legalHold = ObjectLockLegalHold.builder()
                .status(ObjectLockLegalHoldStatus.OFF)
                .build();
        }

        PutObjectLegalHoldRequest legalHoldRequest =
PutObjectLegalHoldRequest.builder()
            .bucket(bucketName)
            .key(objectKey)
            .legalHold(legalHold)
            .build();

        getClient().putObjectLegalHold(legalHoldRequest) ;
        System.out.println("Modified legal hold for "+ objectKey +" in "+bucketName
+".");
    }

    // Delete an object from a specific bucket.
    public void deleteObjectFromBucket(String bucketName, String objectKey, boolean
hasRetention, String versionId) {
```

```
        try {
            DeleteObjectRequest objectRequest;
            if (hasRetention) {
                objectRequest = DeleteObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .versionId(versionId)
                    .bypassGovernanceRetention(true)
                    .build();
            } else {
                objectRequest = DeleteObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .versionId(versionId)
                    .build();
            }

            getClient().deleteObject(objectRequest) ;
            System.out.println("The object was successfully deleted");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Get the retention period for an S3 object.
    public ObjectLockRetention getObjectRetention(String bucketName, String key){
        try {
            GetObjectRetentionRequest retentionRequest =
GetObjectRetentionRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

            GetObjectRetentionResponse response =
getClient().getObjectRetention(retentionRequest);
            System.out.println("tObject retention for "+key +" in "+ bucketName +":
" + response.retention().mode() +" until "+ response.retention().retainUntilDate()
+".");
            return response.retention();

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            return null;
```

```
        }
    }

    public void deleteBucketByName(String bucketName) {
        try {
            DeleteBucketRequest request = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();

            getClient().deleteBucket(request);
            System.out.println(bucketName +" was deleted.");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
    }

    // Get the object lock configuration details for an S3 bucket.
    public void getBucketObjectLockConfiguration(String bucketName) {
        GetObjectLockConfigurationRequest objectLockConfigurationRequest =
 GetObjectLockConfigurationRequest.builder()
            .bucket(bucketName)
            .build();

        GetObjectLockConfigurationResponse response =
 getClient().getObjectLockConfiguration(objectLockConfigurationRequest);
        System.out.println("Bucket object lock config for "+bucketName +":  ");
        System.out.println("\tEnabled:
 "+response.objectLockConfiguration().objectLockEnabled());
        System.out.println("\tRule: "+
 response.objectLockConfiguration().rule().defaultRetention());
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - GetObjectLegalHold
  - GetObjectLockConfiguration
  - GetObjectRetention
  - PutObjectLegalHold
  - PutObjectLockConfiguration

- PutObjectRetention

Kelola pesan besar menggunakan S3

Contoh kode berikut menunjukkan cara menggunakan Amazon SQS Extended Client Library untuk bekerja dengan pesan Amazon SQS besar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import com.amazon.sqs.javamessaging.AmazonSQSExtendedClient;
import com.amazon.sqs.javamessaging.ExtendedClientConfiguration;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.joda.time.DateTime;
import org.joda.time.format.DateTimeFormat;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.LifecycleExpiration;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
```

```
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

import java.util.Arrays;
import java.util.List;
import java.util.UUID;

/**
 * Example of using Amazon SQS Extended Client Library for Java 2.x.
 */
public class SqsExtendedClientExample {
    private static final Logger logger =
 LoggerFactory.getLogger(SqsExtendedClientExample.class);

    private String s3BucketName;
    private String queueUrl;
    private final String queueName;
    private final S3Client s3Client;
    private final SqsClient sqsExtendedClient;
    private final int messageSize;

    /**
     * Constructor with default clients and message size.
     */
    public SqsExtendedClientExample() {
        this(S3Client.create(), 300000);
    }

    /**
     * Constructor with custom S3 client and message size.
     *
     * @param s3Client The S3 client to use
     * @param messageSize The size of the test message to create
     */
    public SqsExtendedClientExample(S3Client s3Client, int messageSize) {
        this.s3Client = s3Client;
        this.messageSize = messageSize;

        // Generate a unique bucket name.
        this.s3BucketName = UUID.randomUUID() + "-" +
                DateTimeFormat.forPattern("yyMMdd-hhmmss").print(new DateTime());
```

```
        // Generate a unique queue name.
        this.queueName = "MyQueue-" + UUID.randomUUID();

        // Configure the SQS extended client.
        final ExtendedClientConfiguration extendedClientConfig = new
ExtendedClientConfiguration()
                .withPayloadSupportEnabled(s3Client, s3BucketName);

        this.sqsExtendedClient = new
AmazonSQSExtendedClient(SqsClient.builder().build(), extendedClientConfig);
    }

    public static void main(String[] args) {
        SqsExtendedClientExample example = new SqsExtendedClientExample();
        try {
            example.setup();
            example.sendAndReceiveMessage();
        } finally {
            example.cleanup();
        }
    }

    /**
     * Send a large message and receive it back.
     *
     * @return The received message
     */
    public Message sendAndReceiveMessage() {
        try {
            // Create a large message.
            char[] chars = new char[messageSize];
            Arrays.fill(chars, 'x');
            String largeMessage = new String(chars);

            // Send the message.
            final SendMessageRequest sendMessageRequest =
SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(largeMessage)
                    .build();

            sqsExtendedClient.sendMessage(sendMessageRequest);
            logger.info("Sent message of size: {}", largeMessage.length());
```

```
            // Receive and return the message.
            final ReceiveMessageResponse receiveMessageResponse =
sqsExtendedClient.receiveMessage(
                    ReceiveMessageRequest.builder().queueUrl(queueUrl).build());

            List<Message> messages = receiveMessageResponse.messages();
            if (messages.isEmpty()) {
                throw new RuntimeException("No messages received");
            }

            Message message = messages.getFirst();
            logger.info("\nMessage received.");
            logger.info("  ID: {}", message.messageId());
            logger.info("  Receipt handle: {}", message.receiptHandle());
            logger.info("  Message body size: {}", message.body().length());
            logger.info("  Message body (first 5 characters): {}",
message.body().substring(0, 5));

            return message;
        } catch (RuntimeException e) {
            logger.error("Error during message processing: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Untuk informasi selengkapnya, silakan lihat Panduan Developer AWS SDK for Java 2.x.
- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateBucket
  - PutBucketLifecycleConfiguration
  - ReceiveMessage
  - SendMessage

### Mengurai URIs

Contoh kode berikut menunjukkan cara mengurai Amazon URIs S3 untuk mengekstrak komponen penting seperti nama bucket dan kunci objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mengurai Amazon S3 URI dengan menggunakan kelas S3Uri.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.S3Uri;
import software.amazon.awssdk.services.s3.S3Utilities;

import java.net.URI;
import java.util.List;
import java.util.Map;

    /**
     *
     * @param s3Client    - An S3Client through which you acquire an S3Uri instance.
     * @param s3ObjectUrl - A complex URL (String) that is used to demonstrate S3Uri
     *                    capabilities.
     */
    public static void parseS3UriExample(S3Client s3Client, String s3ObjectUrl) {
        logger.info(s3ObjectUrl);
        // Console output:
        // 'https://s3.us-west-1.amazonaws.com/myBucket/resources/doc.txt?
versionId=abc123&partNumber=77&partNumber=88'.

        // Create an S3Utilities object using the configuration of the s3Client.
        S3Utilities s3Utilities = s3Client.utilities();

        // From a String URL create a URI object to pass to the parseUri() method.
        URI uri = URI.create(s3ObjectUrl);
        S3Uri s3Uri = s3Utilities.parseUri(uri);

        // If the URI contains no value for the Region, bucket or key, the SDK
 returns
        // an empty Optional.
```

```
        // The SDK returns decoded URI values.

        Region region = s3Uri.region().orElse(null);
        log("region", region);
        // Console output: 'region: us-west-1'.

        String bucket = s3Uri.bucket().orElse(null);
        log("bucket", bucket);
        // Console output: 'bucket: myBucket'.

        String key = s3Uri.key().orElse(null);
        log("key", key);
        // Console output: 'key: resources/doc.txt'.

        Boolean isPathStyle = s3Uri.isPathStyle();
        log("isPathStyle", isPathStyle);
        // Console output: 'isPathStyle: true'.

        // If the URI contains no query parameters, the SDK returns an empty map.
        Map<String, List<String>> queryParams = s3Uri.rawQueryParameters();
        log("rawQueryParameters", queryParams);
        // Console output: 'rawQueryParameters: {versionId=[abc123], partNumber=[77,
        // 88]}'.

        // Retrieve the first or all values for a query parameter as shown in the
        // following code.
        String versionId =
s3Uri.firstMatchingRawQueryParameter("versionId").orElse(null);
        log("firstMatchingRawQueryParameter-versionId", versionId);
        // Console output: 'firstMatchingRawQueryParameter-versionId: abc123'.

        String partNumber =
s3Uri.firstMatchingRawQueryParameter("partNumber").orElse(null);
        log("firstMatchingRawQueryParameter-partNumber", partNumber);
        // Console output: 'firstMatchingRawQueryParameter-partNumber: 77'.

        List<String> partNumbers =
s3Uri.firstMatchingRawQueryParameters("partNumber");
        log("firstMatchingRawQueryParameter", partNumbers);
        // Console output: 'firstMatchingRawQueryParameter: [77, 88]'.

        /*
         * Object keys and query parameters with reserved or unsafe characters, must
be
```

```
         * URL-encoded.
         * For example replace whitespace " " with "%20".
         * Valid:
         * "https://s3.us-west-1.amazonaws.com/myBucket/object%20key?query=
%5Bbrackets%5D"
         * Invalid:
         * "https://s3.us-west-1.amazonaws.com/myBucket/object key?query=[brackets]"
         *
         * Virtual-hosted-style URIs with bucket names that contain a dot, ".", the
 dot
         * must not be URL-encoded.
         * Valid: "https://my.Bucket.s3.us-west-1.amazonaws.com/key"
         * Invalid: "https://my%2EBucket.s3.us-west-1.amazonaws.com/key"
         */
    }

    private static void log(String s3UriElement, Object element) {
        if (element == null) {
            logger.info("{}: {}", s3UriElement, "null");
        } else {
            logger.info("{}: {}", s3UriElement, element);
        }
    }
```

Memproses pemberitahuan acara S3

Contoh kode berikut menunjukkan cara bekerja dengan pemberitahuan acara S3 dengan cara berorientasi objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini menunjukkan cara memproses acara notifikasi S3 dengan menggunakan Amazon SQS.

```
    /**
     * This method receives S3 event notifications by using an SqsAsyncClient.
     * After the client receives the messages it deserializes the JSON payload and
 logs them. It uses
     * the S3EventNotification class (part of the S3 event notification API for
 Java) to deserialize
     * the JSON payload and access the messages in an object-oriented way.
     *
     * @param queueUrl The URL of the AWS SQS queue that receives the S3 event
 notifications.
     * @see <a href="https://sdk.amazonaws.com/java/api/latest/software/amazon/
awssdk/eventnotifications/s3/model/package-summary.html">S3EventNotification API</
a>.
     * <p>
     * To use S3 event notification serialization/deserialization to objects, add
 the following
     * dependency to your Maven pom.xml file.
     * <dependency>
     * <groupId>software.amazon.awssdk</groupId>
     * <artifactId>s3-event-notifications</artifactId>
     * <version><LATEST></version>
     * </dependency>
     * <p>
     * The S3 event notification API became available with version 2.25.11 of the
 Java SDK.
     * <p>
     * This example shows the use of the API with AWS SQS, but it can be used to
 process S3 event notifications
     * in AWS SNS or AWS Lambda as well.
     * <p>
     * Note: The S3EventNotification class does not work with messages routed
 through AWS EventBridge.
     */
    static void processS3Events(String bucketName, String queueUrl, String queueArn)
 {
        try {
            // Configure the bucket to send Object Created and Object Tagging
 notifications to an existing SQS queue.
            s3Client.putBucketNotificationConfiguration(b -> b
                    .notificationConfiguration(ncb -> ncb
                            .queueConfigurations(qcb -> qcb
                                    .events(Event.S3_OBJECT_CREATED,
 Event.S3_OBJECT_TAGGING)
```

```
                                    .queueArn(queueArn)))
                            .bucket(bucketName)
            ).join();

            triggerS3EventNotifications(bucketName);
            // Wait for event notifications to propagate.
            Thread.sleep(Duration.ofSeconds(5).toMillis());

            boolean didReceiveMessages = true;
            while (didReceiveMessages) {
                // Display the number of messages that are available in the queue.
                sqsClient.getQueueAttributes(b -> b
                                .queueUrl(queueUrl)

.attributeNames(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)
                        ).thenAccept(attributeResponse ->
                                logger.info("Approximate number of messages in the
queue: {}",

attributeResponse.attributes().get(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)))
                        .join();

                // Receive the messages.
                ReceiveMessageResponse response = sqsClient.receiveMessage(b -> b
                        .queueUrl(queueUrl)
                ).get();
                logger.info("Count of received messages: {}",
response.messages().size());
                didReceiveMessages = !response.messages().isEmpty();

                // Create a collection to hold the received message for deletion
                // after we log the messages.
                HashSet<DeleteMessageBatchRequestEntry> messagesToDelete = new
HashSet<>();
                // Process each message.
                response.messages().forEach(message -> {
                    logger.info("Message id: {}", message.messageId());
                    // Deserialize JSON message body to a S3EventNotification object
                    // to access messages in an object-oriented way.
                    S3EventNotification event =
S3EventNotification.fromJson(message.body());

                    // Log the S3 event notification record details.
                    if (event.getRecords() != null) {
```

```
                        event.getRecords().forEach(record -> {
                            String eventName = record.getEventName();
                            String key = record.getS3().getObject().getKey();
                            logger.info(record.toString());
                            logger.info("Event name is {} and key is {}", eventName,
key);
                        });
                    }
                    // Add logged messages to collection for batch deletion.
                    messagesToDelete.add(DeleteMessageBatchRequestEntry.builder()
                            .id(message.messageId())
                            .receiptHandle(message.receiptHandle())
                            .build());
                });
                // Delete messages.
                if (!messagesToDelete.isEmpty()) {
                    sqsClient.deleteMessageBatch(DeleteMessageBatchRequest.builder()
                            .queueUrl(queueUrl)
                            .entries(messagesToDelete)
                            .build()
                    ).join();
                }
            } // End of while block.
        } catch (InterruptedException | ExecutionException e) {
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteMessageBatch
  - GetQueueAttributes
  - PutBucketNotificationConfiguration
  - ReceiveMessage

Kirim pemberitahuan acara ke EventBridge

Contoh kode berikut menunjukkan cara mengaktifkan bucket untuk mengirim notifikasi peristiwa S3 ke EventBridge dan merutekan notifikasi ke topik Amazon SNS dan antrean Amazon SQS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
   /** This method configures a bucket to send events to AWS EventBridge and
creates a rule
    * to route the S3 object created events to a topic and a queue.
    *
    * @param bucketName Name of existing bucket
    * @param topicArn ARN of existing topic to receive S3 event notifications
    * @param queueArn ARN of existing queue to receive S3 event notifications
    *
    *  An AWS CloudFormation stack sets up the bucket, queue, topic before the
method runs.
    */
   public static String setBucketNotificationToEventBridge(String bucketName,
String topicArn, String queueArn) {
       try {
           // Enable bucket to emit S3 Event notifications to EventBridge.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .bucket(bucketName)
                   .notificationConfiguration(b1 -> b1
                           .eventBridgeConfiguration(
                                   SdkBuilder::build)
                   ).build()).join();

           // Create an EventBridge rule to route Object Created notifications.
           PutRuleRequest putRuleRequest = PutRuleRequest.builder()
                   .name(RULE_NAME)
                   .eventPattern("""
                           {
                             "source": ["aws.s3"],
                             "detail-type": ["Object Created"],
                             "detail": {
                               "bucket": {
                                 "name": ["%s"]
                               }
                             }
```

```
                            }
                            """.formatted(bucketName))
                    .build();

            // Add the rule to the default event bus.
            PutRuleResponse putRuleResponse =
eventBridgeClient.putRule(putRuleRequest)
                    .whenComplete((r, t) -> {
                        if (t != null) {
                            logger.error("Error creating event bus rule: " +
t.getMessage(), t);
                            throw new RuntimeException(t.getCause().getMessage(),
t);
                        }
                        logger.info("Event bus rule creation request sent
successfully. ARN is: {}", r.ruleArn());
                    }).join();

            // Add the existing SNS topic and SQS queue as targets to the rule.
            eventBridgeClient.putTargets(b -> b
                    .eventBusName("default")
                    .rule(RULE_NAME)
                    .targets(List.of (
                            Target.builder()
                                    .arn(queueArn)
                                    .id("Queue")
                                    .build(),
                            Target.builder()
                                    .arn(topicArn)
                                    .id("Topic")
                                    .build())
                            )
                    ).join();
            return putRuleResponse.ruleArn();
        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .

- PutBucketNotificationConfiguration
- PutRule
- PutTargets

### Lacak unggahan dan unduhan

Contoh kode berikut menunjukkan cara melacak unggahan atau unduhan objek Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Lacak kemajuan unggahan file.

```
   public void trackUploadFile(S3TransferManager transferManager, String
bucketName,
                               String key, URI filePathURI) {
       UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
               .putObjectRequest(b -> b.bucket(bucketName).key(key))
               .addTransferListener(LoggingTransferListener.create())  // Add
listener.
               .source(Paths.get(filePathURI))
               .build();

       FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

       fileUpload.completionFuture().join();
       /*
           The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
           You can also implement the interface to provide your own logic.

           Configure log4J2 with settings such as the following.
               <Configuration status="WARN">
                   <Appenders>
                       <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                           <PatternLayout pattern="%m%n"/>
```

```
                    </Console>
                </Appenders>

                <Loggers>
                    <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                        <AppenderRef ref="AlignedConsoleAppender"/>
                    </logger>
                </Loggers>
            </Configuration>

          Log4J2 logs the progress. The following is example output for a 21.3 MB
file upload.
            Transfer initiated...
            |                    | 0.0%
            |====                | 21.1%
            |============        | 60.5%
            |====================| 100.0%
            Transfer complete!
       */
   }
```

Lacak kemajuan unduhan file.

```
   public void trackDownloadFile(S3TransferManager transferManager, String
bucketName,
                            String key, String downloadedFileWithPath) {
       DownloadFileRequest downloadFileRequest = DownloadFileRequest.builder()
               .getObjectRequest(b -> b.bucket(bucketName).key(key))
               .addTransferListener(LoggingTransferListener.create())  // Add
listener.
               .destination(Paths.get(downloadedFileWithPath))
               .build();

       FileDownload downloadFile =
transferManager.downloadFile(downloadFileRequest);

       CompletedFileDownload downloadResult =
downloadFile.completionFuture().join();
       /*
```

```
            The SDK provides a LoggingTransferListener implementation of the
TransferListener interface.
            You can also implement the interface to provide your own logic.

            Configure log4J2 with settings such as the following.
                <Configuration status="WARN">
                    <Appenders>
                        <Console name="AlignedConsoleAppender" target="SYSTEM_OUT">
                            <PatternLayout pattern="%m%n"/>
                        </Console>
                    </Appenders>

                    <Loggers>
                        <logger
name="software.amazon.awssdk.transfer.s3.progress.LoggingTransferListener"
level="INFO" additivity="false">
                            <AppenderRef ref="AlignedConsoleAppender"/>
                        </logger>
                    </Loggers>
                </Configuration>

            Log4J2 logs the progress. The following is example output for a 21.3 MB
file download.
                Transfer initiated...
                |=======             | 39.4%
                |===============     | 78.8%
                |====================| 100.0%
                Transfer complete!
        */
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - GetObject
  - PutObject

### Mengunggah direktori ke bucket

Contoh kode berikut ini menunjukkan cara mengunggah direktori lokal secara rekursif ke bucket Amazon Simple Storage Service (Amazon S3).

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan S3 TransferManager untuk mengunggah direktori lokal. Lihat file lengkap dan lakukan pengujian.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedDirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.DirectoryUpload;
import software.amazon.awssdk.transfer.s3.model.UploadDirectoryRequest;

import java.net.URI;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.file.Paths;
import java.util.UUID;

    public Integer uploadDirectory(S3TransferManager transferManager,
            URI sourceDirectory, String bucketName) {
        DirectoryUpload directoryUpload =
 transferManager.uploadDirectory(UploadDirectoryRequest.builder()
                .source(Paths.get(sourceDirectory))
                .bucket(bucketName)
                .build());

        CompletedDirectoryUpload completedDirectoryUpload =
 directoryUpload.completionFuture().join();
        completedDirectoryUpload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
 fail.toString()));
        return completedDirectoryUpload.failedTransfers().size();
    }
```

- Untuk detail API, lihat UploadDirectorydi Referensi AWS SDK for Java 2.x API.

### Mengunggah atau mengunduh file besar

Contoh kode berikut menunjukkan cara mengunggah atau mengunduh file besar ke dan dari Amazon S3.

Untuk informasi selengkapnya, lihat Pengunggahan objek menggunakan unggahan multibagian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Fungsi panggilan yang mentransfer file ke dan dari bucket S3 menggunakan TransferManager S3.

```
   public Integer downloadObjectsToDirectory(S3TransferManager transferManager,
           URI destinationPathURI, String bucketName) {
       DirectoryDownload directoryDownload =
transferManager.downloadDirectory(DownloadDirectoryRequest.builder()
               .destination(Paths.get(destinationPathURI))
               .bucket(bucketName)
               .build());
       CompletedDirectoryDownload completedDirectoryDownload =
directoryDownload.completionFuture().join();

       completedDirectoryDownload.failedTransfers()
               .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
       return completedDirectoryDownload.failedTransfers().size();
   }
```

Unggah seluruh direktori lokal.

```
   public Integer uploadDirectory(S3TransferManager transferManager,
           URI sourceDirectory, String bucketName) {
       DirectoryUpload directoryUpload =
transferManager.uploadDirectory(UploadDirectoryRequest.builder()
```

```
                .source(Paths.get(sourceDirectory))
                .bucket(bucketName)
                .build());

        CompletedDirectoryUpload completedDirectoryUpload =
directoryUpload.completionFuture().join();
        completedDirectoryUpload.failedTransfers()
                .forEach(fail -> logger.warn("Object [{}] failed to transfer",
fail.toString()));
        return completedDirectoryUpload.failedTransfers().size();
    }
```

Unggah file tunggal.

```
    public String uploadFile(S3TransferManager transferManager, String bucketName,
                             String key, URI filePathURI) {
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b.bucket(bucketName).key(key))
            .source(Paths.get(filePathURI))
            .build();

        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);

        CompletedFileUpload uploadResult = fileUpload.completionFuture().join();
        return uploadResult.response().eTag();
    }
```

Contoh kode menggunakan impor berikut.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
```

```
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
import java.nio.file.Paths;
import java.util.ArrayList;
import java.util.List;
import java.util.Objects;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
```

Gunakan Manajer Transfer S3 di atas klien S3 AWS berbasis CRT untuk melakukan unggahan multibagian secara transparan ketika ukuran konten melebihi ambang batas. Ukuran ambang default adalah 8 MB.

```
    /**
     * Uploads a file to an Amazon S3 bucket using the S3TransferManager.
     *
     * @param filePath the file path of the file to be uploaded
     */
    public void multipartUploadWithTransferManager(String filePath) {
        S3TransferManager transferManager = S3TransferManager.create();
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b
                .bucket(bucketName)
                .key(key))
            .source(Paths.get(filePath))
            .build();
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
        fileUpload.completionFuture().join();
        transferManager.close();
    }
```

Gunakan S3Client API untuk melakukan upload multipart.

```
    /**
     * Performs a multipart upload to Amazon S3 using the provided S3 client.
     *
     * @param filePath the path to the file to be uploaded
     */
    public void multipartUploadWithS3Client(String filePath) {

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key));
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .eTag(partResponse.eTag())
                    .build();
```

```
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            logger.error(e.getMessage());
        }

        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

Gunakan S3 AsyncClient API dengan dukungan multipart diaktifkan untuk melakukan upload multipart.

```
    /**
     * Uploads a file to an S3 bucket using the S3AsyncClient and enabling multipart
support.
     *
     * @param filePath the local file path of the file to be uploaded
     */
    public void multipartUploadWithS3AsyncClient(String filePath) {
        // Enable multipart support.
        S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
            .multipartEnabled(true)
            .build();

        CompletableFuture<PutObjectResponse> response = s3AsyncClient.putObject(b ->
b
                .bucket(bucketName)
                .key(key),
            Paths.get(filePath));

        response.join();
```

```
        logger.info("File uploaded in multiple 8 MiB parts using S3AsyncClient.");
    }
```

Mengunggah aliran ukuran yang tidak diketahui

Contoh kode berikut menunjukkan cara mengunggah aliran dengan ukuran yang tidak diketahui ke objek Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Gunakan Klien S3 berbasis CRT AWS.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;

import java.io.ByteArrayInputStream;
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class PutObjectFromStreamAsync {
    private static final Logger logger =
 LoggerFactory.getLogger(PutObjectFromStreamAsync.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
```

```
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            PutObjectFromStreamAsync example = new PutObjectFromStreamAsync();
            S3AsyncClient s3AsyncClientCrt = S3AsyncClient.crtCreate();
            PutObjectResponse putObjectResponse =
example.putObjectFromStreamCrt(s3AsyncClientCrt, bucketName, key);
            logger.info("Object {} etag: {}", key, putObjectResponse.eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param s33CrtAsyncClient - To upload content from a stream of unknown size,
use can the AWS CRT-based S3 client.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return software.amazon.awssdk.services.s3.model.PutObjectResponse - Returns
metadata pertaining to the put object operation.
     */
    public PutObjectResponse putObjectFromStreamCrt(S3AsyncClient s33CrtAsyncClient,
String bucketName, String key) {

        // AsyncExampleUtils.randomString() returns a random string up to 100
characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());

        // Executor required to handle reading from the InputStream on a separate
thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
executor);
```

```
        CompletableFuture<PutObjectResponse> responseFuture =
                s33CrtAsyncClient.putObject(r -> r.bucket(bucketName).key(key),
 body);

        PutObjectResponse response = responseFuture.join(); // Wait for the
 response.
        logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        executor.shutdown();
        return response;
    }
}
```

Gunakan klien S3 asinkron standar dengan unggahan multibagian diaktifkan.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.s3.S3AsyncClient;
import software.amazon.awssdk.services.s3.model.PutObjectResponse;

import java.io.ByteArrayInputStream;
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class PutObjectFromStreamAsyncMp {
    private static final Logger logger =
 LoggerFactory.getLogger(PutObjectFromStreamAsyncMp.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            PutObjectFromStreamAsyncMp example = new PutObjectFromStreamAsyncMp();
```

```
            S3AsyncClient s3AsyncClientMp =
S3AsyncClient.builder().multipartEnabled(true).build();
            PutObjectResponse putObjectResponse =
example.putObjectFromStreamMp(s3AsyncClientMp, bucketName, key);
            logger.info("Object {} etag: {}", key, putObjectResponse.eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param s3AsyncClientMp - To upload content from a stream of unknown size, use
can the S3 asynchronous client with multipart enabled.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return software.amazon.awssdk.services.s3.model.PutObjectResponse - Returns
metadata pertaining to the put object operation.
     */
    public PutObjectResponse putObjectFromStreamMp(S3AsyncClient s3AsyncClientMp,
String bucketName, String key) {

        // AsyncExampleUtils.randomString() returns a random string up to 100
characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());

        // Executor required to handle reading from the InputStream on a separate
thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
executor);

        CompletableFuture<PutObjectResponse> responseFuture =
                s3AsyncClientMp.putObject(r -> r.bucket(bucketName).key(key), body);
```

```
        PutObjectResponse response = responseFuture.join(); // Wait for the
 response.
        logger.info("Object {} uploaded to bucket {}.", key, bucketName);
        executor.shutdown();
        return response;
    }
}
```

Gunakan Manajer Transfer Amazon S3.

```
import com.example.s3.util.AsyncExampleUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.async.AsyncRequestBody;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.CompletedUpload;
import software.amazon.awssdk.transfer.s3.model.Upload;

import java.io.ByteArrayInputStream;
import java.io.InputStream;
import java.util.UUID;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class UploadStream {
    private static final Logger logger =
 LoggerFactory.getLogger(UploadStream.class);

    public static void main(String[] args) {
        String bucketName = "amzn-s3-demo-bucket" + UUID.randomUUID();
        String key = UUID.randomUUID().toString();

        AsyncExampleUtils.createBucket(bucketName);
        try {
            UploadStream example = new UploadStream();
            CompletedUpload completedUpload =
 example.uploadStream(S3TransferManager.create(), bucketName, key);
            logger.info("Object {} etag: {}", key,
 completedUpload.response().eTag());
            logger.info("Object {} uploaded to bucket {}.", key, bucketName);
```

```
        } catch (SdkException e) {
            logger.error(e.getMessage(), e);
        } finally {
            AsyncExampleUtils.deleteObject(bucketName, key);
            AsyncExampleUtils.deleteBucket(bucketName);
        }
    }

    /**
     * @param transferManager - To upload content from a stream of unknown size, you
 can use the S3TransferManager based on the AWS CRT-based S3 client.
     * @param bucketName - The name of the bucket.
     * @param key - The name of the object.
     * @return - software.amazon.awssdk.transfer.s3.model.CompletedUpload - The
 result of the completed upload.
     */
    public CompletedUpload uploadStream(S3TransferManager transferManager, String
 bucketName, String key) {

        // AsyncExampleUtils.randomString() returns a random string up to 100
 characters.
        String randomString = AsyncExampleUtils.randomString();
        logger.info("random string to upload: {}: length={}", randomString,
 randomString.length());
        InputStream inputStream = new ByteArrayInputStream(randomString.getBytes());

        // Executor required to handle reading from the InputStream on a separate
 thread so the main upload is not blocked.
        ExecutorService executor = Executors.newSingleThreadExecutor();
        // Specify `null` for the content length when you don't know the content
 length.
        AsyncRequestBody body = AsyncRequestBody.fromInputStream(inputStream, null,
 executor);

        Upload upload = transferManager.upload(builder -> builder
                .requestBody(body)
                .putObjectRequest(req -> req.bucket(bucketName).key(key))
                .build());

        CompletedUpload completedUpload = upload.completionFuture().join();
        executor.shutdown();
        return completedUpload;
    }
}
```

### Gunakan checksum

Contoh kode berikut menunjukkan cara menggunakan checksum untuk bekerja dengan objek Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh kode menggunakan subset dari impor berikut.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ChecksumAlgorithm;
import software.amazon.awssdk.services.s3.model.ChecksumMode;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;
import software.amazon.awssdk.services.s3.waiters.S3Waiter;
import software.amazon.awssdk.transfer.s3.S3TransferManager;
import software.amazon.awssdk.transfer.s3.model.FileUpload;
import software.amazon.awssdk.transfer.s3.model.UploadFileRequest;

import java.io.FileInputStream;
import java.io.IOException;
import java.io.RandomAccessFile;
import java.net.URISyntaxException;
import java.net.URL;
import java.nio.ByteBuffer;
```

```
import java.nio.file.Paths;
import java.security.DigestInputStream;
import java.security.MessageDigest;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.Base64;
import java.util.List;
import java.util.Objects;
import java.util.UUID;
```

Tentukan algoritma checksum untuk metode `putObject` saat Anda membangun `PutObjectRequest`.

```
    public void putObjectWithChecksum() {
        s3Client.putObject(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.CRC32),
            RequestBody.fromString("This is a test"));
    }
```

Verifikasi checksum untuk `getObject` metode saat Anda membangun. GetObjectRequest

```
    public GetObjectResponse getObjectWithChecksum() {
        return s3Client.getObject(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumMode(ChecksumMode.ENABLED))
            .response();
    }
```

Hitung terlebih dahulu checksum untuk metode `putObject` saat Anda membangun `PutObjectRequest`.

```
    public void putObjectWithPrecalculatedChecksum(String filePath) {
        String checksum = calculateChecksum(filePath, "SHA-256");

        s3Client.putObject((b -> b
                .bucket(bucketName)
```

```
                .key(key)
                .checksumSHA256(checksum)),
            RequestBody.fromFile(Paths.get(filePath)));
    }
```

Gunakan Manajer Transfer S3 di atas klien S3 AWS berbasis CRT untuk melakukan unggahan multibagian secara transparan ketika ukuran konten melebihi ambang batas. Ukuran ambang default adalah 8 MB.

Anda dapat menentukan algoritma checksum untuk SDK yang akan digunakan. Secara default, SDK menggunakan CRC32 algoritma.

```
    public void multipartUploadWithChecksumTm(String filePath) {
        S3TransferManager transferManager = S3TransferManager.create();
        UploadFileRequest uploadFileRequest = UploadFileRequest.builder()
            .putObjectRequest(b -> b
                .bucket(bucketName)
                .key(key)
                .checksumAlgorithm(ChecksumAlgorithm.SHA1))
            .source(Paths.get(filePath))
            .build();
        FileUpload fileUpload = transferManager.uploadFile(uploadFileRequest);
        fileUpload.completionFuture().join();
        transferManager.close();
    }
```

Gunakan S3Client API atau (S3 AsyncClient API) untuk melakukan unggahan multipart. Jika Anda menentukan checksum tambahan, Anda juga harus menentukan algoritma yang akan digunakan pada inisiasi unggahan. Anda juga harus menentukan algoritma untuk setiap permintaan bagian dan memberikan checksum yang dihitung untuk setiap bagian setelah diunggah.

```
    public void multipartUploadWithChecksumS3Client(String filePath) {
        ChecksumAlgorithm algorithm = ChecksumAlgorithm.CRC32;

        // Initiate the multipart upload.
        CreateMultipartUploadResponse createMultipartUploadResponse =
s3Client.createMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .checksumAlgorithm(algorithm)); // Checksum specified on initiation.
```

```
        String uploadId = createMultipartUploadResponse.uploadId();

        // Upload the parts of the file.
        int partNumber = 1;
        List<CompletedPart> completedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        try (RandomAccessFile file = new RandomAccessFile(filePath, "r")) {
            long fileSize = file.length();
            long position = 0;
            while (position < fileSize) {
                file.seek(position);
                long read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the
buffer.
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                    .bucket(bucketName)
                    .key(key)
                    .uploadId(uploadId)
                    .checksumAlgorithm(algorithm) // Checksum specified on each
part.
                    .partNumber(partNumber)
                    .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                    uploadPartRequest,
                    RequestBody.fromByteBuffer(bb));

                CompletedPart part = CompletedPart.builder()
                    .partNumber(partNumber)
                    .checksumCRC32(partResponse.checksumCRC32()) // Provide the
calculated checksum.
                    .eTag(partResponse.eTag())
                    .build();
                completedParts.add(part);

                bb.clear();
                position += read;
                partNumber++;
            }
        } catch (IOException e) {
            System.err.println(e.getMessage());
        }
```

```
        // Complete the multipart upload.
        s3Client.completeMultipartUpload(b -> b
            .bucket(bucketName)
            .key(key)
            .uploadId(uploadId)

.multipartUpload(CompletedMultipartUpload.builder().parts(completedParts).build()));
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CompleteMultipartUpload
  - CreateMultipartUpload
  - UploadPart

## Contoh nirserver

Menginvokasi fungsi Lambda dari pemicu Amazon S3

Contoh kode berikut menunjukkan cara mengimplementasikan fungsi Lambda yang menerima peristiwa yang dipicu dengan mengunggah objek ke bucket S3. Fungsi ini mengambil nama bucket S3 dan kunci objek dari parameter peristiwa dan memanggil Amazon S3 API untuk mengambil dan mencatat jenis konten objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Menggunakan peristiwa S3 dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
```

```
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.S3Client;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.S3Event;
import
 com.amazonaws.services.lambda.runtime.events.models.s3.S3EventNotification.S3EventNotificat

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Handler implements RequestHandler<S3Event, String> {
    private static final Logger logger = LoggerFactory.getLogger(Handler.class);
    @Override
    public String handleRequest(S3Event s3event, Context context) {
        try {
          S3EventNotificationRecord record = s3event.getRecords().get(0);
          String srcBucket = record.getS3().getBucket().getName();
          String srcKey = record.getS3().getObject().getUrlDecodedKey();

          S3Client s3Client = S3Client.builder().build();
          HeadObjectResponse headObject = getHeadObject(s3Client, srcBucket,
 srcKey);

          logger.info("Successfully retrieved " + srcBucket + "/" + srcKey + " of
 type " + headObject.contentType());

          return "Ok";
        } catch (Exception e) {
          throw new RuntimeException(e);
        }
    }

    private HeadObjectResponse getHeadObject(S3Client s3Client, String bucket,
 String key) {
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(bucket)
                .key(key)
                .build();
        return s3Client.headObject(headObjectRequest);
    }
}
```

# Contoh Kontrol Amazon S3 menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan kepada Anda cara melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan Kontrol Amazon S3 dengan.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Halo Kontrol Amazon S3

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon S3 Control.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.core.retry.RetryMode;
import software.amazon.awssdk.core.retry.RetryPolicy;
```

```
import software.amazon.awssdk.http.async.SdkAsyncHttpClient;
import software.amazon.awssdk.http.nio.netty.NettyNioAsyncHttpClient;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3control.S3ControlAsyncClient;
import software.amazon.awssdk.services.s3control.model.JobListDescriptor;
import software.amazon.awssdk.services.s3control.model.JobStatus;
import software.amazon.awssdk.services.s3control.model.ListJobsRequest;
import software.amazon.awssdk.services.s3control.paginators.ListJobsPublisher;
import java.time.Duration;
import java.util.List;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.CompletionException;

/**
 * Before running this example:
 * <p/>
 * The SDK must be able to authenticate AWS requests on your behalf. If you have not
 configured
 * authentication for SDKs and tools,see https://docs.aws.amazon.com/sdkref/latest/
guide/access.html in the AWS SDKs and Tools Reference Guide.
 * <p/>
 * You must have a runtime environment configured with the Java SDK.
 * See https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html in
 the Developer Guide if this is not set up.
 */
public class HelloS3Batch {
    private static S3ControlAsyncClient asyncClient;

    public static void main(String[] args) {
        S3BatchActions actions = new S3BatchActions();
        String accountId = actions.getAccountId();
        try {
            listBatchJobsAsync(accountId)
                .exceptionally(ex -> {
                    System.err.println("List batch jobs failed: " +
 ex.getMessage());
                    return null;
                })
                .join();

        } catch (CompletionException ex) {
            System.err.println("Failed to list batch jobs: " + ex.getMessage());
        }
    }
```

```
    /**
     * Retrieves the asynchronous S3 Control client instance.
     * <p>
     * This method creates and returns a singleton instance of the {@link
 S3ControlAsyncClient}. If the instance
     * has not been created yet, it will be initialized with the following
 configuration:
     * <ul>
     *   <li>Maximum concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: 3 retries</li>
     *   <li>Region: US_EAST_1</li>
     *   <li>Credentials provider: {@link EnvironmentVariableCredentialsProvider}</
li>
     * </ul>
     *
     * @return the asynchronous S3 Control client instance
     */
    private static S3ControlAsyncClient getAsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            asyncClient = S3ControlAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
```

```
        }
        return asyncClient;
    }

    /**
     * Asynchronously lists batch jobs that have completed for the specified
account.
     *
     * @param accountId the ID of the account to list jobs for
     * @return a CompletableFuture that completes when the job listing operation is
finished
     */
    public static CompletableFuture<Void> listBatchJobsAsync(String accountId) {
        ListJobsRequest jobsRequest = ListJobsRequest.builder()
            .jobStatuses(JobStatus.COMPLETE)
            .accountId(accountId)
            .maxResults(10)
            .build();

        ListJobsPublisher publisher =
getAsyncClient().listJobsPaginator(jobsRequest);
        return publisher.subscribe(response -> {
            List<JobListDescriptor> jobs = response.jobs();
            for (JobListDescriptor job : jobs) {
                System.out.println("The job id is " + job.jobId());
                System.out.println("The job priority is " + job.priority());
            }
        }).thenAccept(response -> {
            System.out.println("Listing batch jobs completed");
        }).exceptionally(ex -> {
            System.err.println("Failed to list batch jobs: " + ex.getMessage());
            throw new RuntimeException(ex);
        });
    }
```

- Untuk detail API, lihat ListJobsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

### Pelajari dasar-dasarnya

Contoh kode berikut menunjukkan cara mempelajari operasi inti untuk Kontrol Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Pelajari operasi inti.

```
package com.example.s3.batch;

import software.amazon.awssdk.services.s3.model.S3Exception;
import java.io.IOException;
import java.util.Map;
import java.util.Scanner;
import java.util.UUID;
import java.util.concurrent.CompletionException;

public class S3BatchScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String STACK_NAME = "MyS3Stack";
    public static void main(String[] args) throws IOException {
        S3BatchActions actions = new S3BatchActions();
        String accountId = actions.getAccountId();
        String uuid = java.util.UUID.randomUUID().toString();
        Scanner scanner = new Scanner(System.in);

        System.out.println(DASHES);
        System.out.println("Welcome to the Amazon S3 Batch basics scenario.");
        System.out.println("""
            S3 Batch operations enables efficient and cost-effective processing of
 large-scale
            data stored in Amazon S3. It automatically scales resources to handle
 varying workloads
            without the need for manual intervention.

            One of the key features of S3 Batch is its ability to perform tagging
 operations on objects stored in
            S3 buckets. Users can leverage S3 Batch to apply, update, or remove tags
 on thousands or millions of
```

```
            objects in a single operation, streamlining the management and
 organization of their data.

            This can be particularly useful for tasks such as cost allocation,
 lifecycle management, or
            metadata-driven workflows, where consistent and accurate tagging is
 essential.
            S3 Batch's scalability and serverless nature make it an ideal solution
 for organizations with
            growing data volumes and complex data management requirements.

            This Java program walks you through Amazon S3 Batch operations.

            Let's get started...

            """);
        waitForInputToContinue(scanner);
        // Use CloudFormation to stand up the resource required for this scenario.
        System.out.println("Use CloudFormation to stand up the resource required for
 this scenario.");
        CloudFormationHelper.deployCloudFormationStack(STACK_NAME);

        Map<String, String> stackOutputs =
 CloudFormationHelper.getStackOutputs(STACK_NAME);
        String iamRoleArn = stackOutputs.get("S3BatchRoleArn");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Setup the required bucket for this scenario.");
        waitForInputToContinue(scanner);
        String bucketName = "amzn-s3-demo-bucket-" + UUID.randomUUID(); // Change
 bucket name.
        actions.createBucket(bucketName);
        String reportBucketName = "arn:aws:s3:::"+bucketName;
        String manifestLocation = "arn:aws:s3:::"+bucketName+"/job-manifest.csv";
        System.out.println("Populate the bucket with the required files.");
        String[] fileNames = {"job-manifest.csv", "object-key-1.txt", "object-
key-2.txt", "object-key-3.txt", "object-key-4.txt"};
        actions.uploadFilesToBucket(bucketName, fileNames, actions);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create a S3 Batch Job");
```

```
        System.out.println("This job tags all objects listed in the manifest file
with tags");
        waitForInputToContinue(scanner);
        String jobId ;
        try {
            jobId = actions.createS3JobAsync(accountId, iamRoleArn,
manifestLocation, reportBucketName, uuid).join();
            System.out.println("The Job id is " + jobId);

        } catch (S3Exception e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Update an existing S3 Batch Operations job's
priority");
        System.out.println("""
             In this step, we modify the job priority value. The higher the number,
the higher the priority.
             So, a job with a priority of `30` would have a higher priority than a
job with
             a priority of `20`. This is a common way to represent the priority of a
task
             or job, with higher numbers indicating a higher priority.

             Ensure that the job status allows for priority updates. Jobs in
certain
             states (e.g., Cancelled, Failed, or Completed) cannot have their
priorities
             updated. Only jobs in the Active or Suspended state typically allow
priority
             updates.
             """);

        try {
            actions.updateJobPriorityAsync(jobId, accountId)
                .exceptionally(ex -> {
```

```
                    System.err.println("Update job priority failed: " +
ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to update job priority: " + ex.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Cancel the S3 Batch job");
        System.out.print("Do you want to cancel the Batch job? (y/n): ");
        String cancelAns = scanner.nextLine();
        if (cancelAns != null && cancelAns.trim().equalsIgnoreCase("y")) {
            try {
                actions.cancelJobAsync(jobId, accountId)
                    .exceptionally(ex -> {
                        System.err.println("Cancel job failed: " + ex.getMessage());
                        return null;
                    })
                    .join();
            } catch (CompletionException ex) {
                System.err.println("Failed to cancel job: " + ex.getMessage());
            }
        } else {
            System.out.println("Job " +jobId +" was not canceled.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Describe the job that was just created");
        waitForInputToContinue(scanner);
        try {
            actions.describeJobAsync(jobId, accountId)
                .exceptionally(ex -> {
                    System.err.println("Describe job failed: " + ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to describe job: " + ex.getMessage());
        }
```

```
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Describe the tags associated with the job");
        waitForInputToContinue(scanner);
        try {
            actions.getJobTagsAsync(jobId, accountId)
                .exceptionally(ex -> {
                    System.err.println("Get job tags failed: " + ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to get job tags: " + ex.getMessage());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Update Batch Job Tags");
        waitForInputToContinue(scanner);
        try {
            actions.putJobTaggingAsync(jobId, accountId)
                .exceptionally(ex -> {
                    System.err.println("Put job tagging failed: " +
ex.getMessage());
                    return null;
                })
                .join();
        } catch (CompletionException ex) {
            System.err.println("Failed to put job tagging: " + ex.getMessage());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the Amazon S3 Batch job tagging.");
        System.out.print("Do you want to delete Batch job tagging? (y/n)");
        String delAns = scanner.nextLine();
        if (delAns != null && delAns.trim().equalsIgnoreCase("y")) {
            try {
                actions.deleteBatchJobTagsAsync(jobId, accountId)
                    .exceptionally(ex -> {
                        System.err.println("Delete batch job tags failed: " +
ex.getMessage());
                        return null;
```

```
                    })
                    .join();
            } catch (CompletionException ex) {
                System.err.println("Failed to delete batch job tags: " +
ex.getMessage());
            }
        } else {
            System.out.println("Tagging was not deleted.");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.print("Do you want to delete the AWS resources used in this
scenario? (y/n)");
        String delResAns = scanner.nextLine();
        if (delResAns != null && delResAns.trim().equalsIgnoreCase("y")) {
            actions.deleteFilesFromBucket(bucketName, fileNames, actions);
            actions.deleteBucketFolderAsync(bucketName);
            actions.deleteBucket(bucketName)
                .thenRun(() -> System.out.println("Bucket deletion completed"))
                .exceptionally(ex -> {
                    System.err.println("Error occurred: " + ex.getMessage());
                    return null;
                });
            CloudFormationHelper.destroyCloudFormationStack(STACK_NAME);
        } else {
            System.out.println("The AWS resources were not deleted.");
        }
        System.out.println("The Amazon S3 Batch scenario has successfully
completed.");
        System.out.println(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println();
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println();
                break;
            } else {
```

```
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }


}
```

Kelas aksi yang membungkus operasi.

```
public class S3BatchActions {

    private static S3ControlAsyncClient asyncClient;

    private static S3AsyncClient s3AsyncClient ;
    /**
     * Retrieves the asynchronous S3 Control client instance.
     * <p>
     * This method creates and returns a singleton instance of the {@link
 S3ControlAsyncClient}. If the instance
     * has not been created yet, it will be initialized with the following
 configuration:
     * <ul>
     *   <li>Maximum concurrency: 100</li>
     *   <li>Connection timeout: 60 seconds</li>
     *   <li>Read timeout: 60 seconds</li>
     *   <li>Write timeout: 60 seconds</li>
     *   <li>API call timeout: 2 minutes</li>
     *   <li>API call attempt timeout: 90 seconds</li>
     *   <li>Retry policy: 3 retries</li>
     *   <li>Region: US_EAST_1</li>
     *   <li>Credentials provider: {@link EnvironmentVariableCredentialsProvider}</
li>
     * </ul>
     *
     * @return the asynchronous S3 Control client instance
     */
    private static S3ControlAsyncClient getAsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
```

```
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryPolicy(RetryPolicy.builder()
                    .numRetries(3)
                    .build())
                .build();

            asyncClient = S3ControlAsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return asyncClient;
    }

    private static S3AsyncClient getS3AsyncClient() {
        if (asyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                .maxConcurrency(100)
                .connectionTimeout(Duration.ofSeconds(60))
                .readTimeout(Duration.ofSeconds(60))
                .writeTimeout(Duration.ofSeconds(60))
                .build();

            ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
                .apiCallTimeout(Duration.ofMinutes(2))
                .apiCallAttemptTimeout(Duration.ofSeconds(90))
                .retryStrategy(RetryMode.STANDARD)
                .build();

            s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_EAST_1)
                .httpClient(httpClient)
                .overrideConfiguration(overrideConfig)
                .build();
```

```
        }
        return s3AsyncClient;
    }


    /**
     * Cancels a job asynchronously.
     *
     * @param jobId The ID of the job to be canceled.
     * @param accountId The ID of the account associated with the job.
     * @return A {@link CompletableFuture} that completes when the job status has
been updated to "CANCELLED".
     *         If an error occurs during the update, the returned future will
complete exceptionally.
     */
    public CompletableFuture<Void> cancelJobAsync(String jobId, String accountId) {
        UpdateJobStatusRequest updateJobStatusRequest =
UpdateJobStatusRequest.builder()
            .accountId(accountId)
            .jobId(jobId)
            .requestedJobStatus(String.valueOf(JobStatus.CANCELLED))
            .build();

        return asyncClient.updateJobStatus(updateJobStatusRequest)
            .thenAccept(updateJobStatusResponse -> {
                System.out.println("Job status updated to: " +
updateJobStatusResponse.status());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to cancel job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    /**
     * Updates the priority of a job asynchronously.
     *
     * @param jobId     the ID of the job to update
     * @param accountId the ID of the account associated with the job
     * @return a {@link CompletableFuture} that represents the asynchronous
operation, which completes when the job priority has been updated or an error has
occurred
     */
```

```
   public CompletableFuture<Void> updateJobPriorityAsync(String jobId, String
accountId) {
       UpdateJobPriorityRequest priorityRequest =
UpdateJobPriorityRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .priority(60)
           .build();

       CompletableFuture<Void> future = new CompletableFuture<>();
       getAsyncClient().updateJobPriority(priorityRequest)
           .thenAccept(response -> {
               System.out.println("The job priority was updated");
               future.complete(null); // Complete the CompletableFuture on
successful execution
           })
           .exceptionally(ex -> {
               System.err.println("Failed to update job priority: " +
ex.getMessage());
               future.completeExceptionally(ex); // Complete the CompletableFuture
exceptionally on error
               return null; // Return null to handle the exception
           });

       return future;
   }

   /**
    * Asynchronously retrieves the tags associated with a specific job in an AWS
account.
    *
    * @param jobId     the ID of the job for which to retrieve the tags
    * @param accountId the ID of the AWS account associated with the job
    * @return a {@link CompletableFuture} that completes when the job tags have
been retrieved, or with an exception if the operation fails
    * @throws RuntimeException if an error occurs while retrieving the job tags
    */
   public CompletableFuture<Void> getJobTagsAsync(String jobId, String accountId) {
       GetJobTaggingRequest request = GetJobTaggingRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .build();

       return asyncClient.getJobTagging(request)
```

```
            .thenAccept(response -> {
                List<S3Tag> tags = response.tags();
                if (tags.isEmpty()) {
                    System.out.println("No tags found for job ID: " + jobId);
                } else {
                    for (S3Tag tag : tags) {
                        System.out.println("Tag key is: " + tag.key());
                        System.out.println("Tag value is: " + tag.value());
                    }
                }
            })
            .exceptionally(ex -> {
                System.err.println("Failed to get job tags: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    /**
     * Asynchronously deletes the tags associated with a specific batch job.
     *
     * @param jobId     The ID of the batch job whose tags should be deleted.
     * @param accountId The ID of the account associated with the batch job.
     * @return A CompletableFuture that completes when the job tags have been
successfully deleted, or an exception is thrown if the deletion fails.
     */
    public CompletableFuture<Void> deleteBatchJobTagsAsync(String jobId, String
accountId) {
        DeleteJobTaggingRequest jobTaggingRequest =
DeleteJobTaggingRequest.builder()
            .accountId(accountId)
            .jobId(jobId)
            .build();

        return asyncClient.deleteJobTagging(jobTaggingRequest)
            .thenAccept(response -> {
                System.out.println("You have successfully deleted " + jobId + "
tagging.");
            })
            .exceptionally(ex -> {
                System.err.println("Failed to delete job tags: " + ex.getMessage());
                throw new RuntimeException(ex);
            });
    }
```

```
   /**
    * Asynchronously describes the specified job.
    *
    * @param jobId     the ID of the job to describe
    * @param accountId the ID of the AWS account associated with the job
    * @return a {@link CompletableFuture} that completes when the job description
is available
    * @throws RuntimeException if an error occurs while describing the job
    */
   public CompletableFuture<Void> describeJobAsync(String jobId, String accountId)
{
       DescribeJobRequest jobRequest = DescribeJobRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .build();

       return getAsyncClient().describeJob(jobRequest)
           .thenAccept(response -> {
               System.out.println("Job ID: " + response.job().jobId());
               System.out.println("Description: " + response.job().description());
               System.out.println("Status: " + response.job().statusAsString());
               System.out.println("Role ARN: " + response.job().roleArn());
               System.out.println("Priority: " + response.job().priority());
               System.out.println("Progress Summary: " +
response.job().progressSummary());

               // Print out details about the job manifest.
               JobManifest manifest = response.job().manifest();
               System.out.println("Manifest Location: " +
manifest.location().objectArn());
               System.out.println("Manifest ETag: " + manifest.location().eTag());

               // Print out details about the job operation.
               JobOperation operation = response.job().operation();
               if (operation.s3PutObjectTagging() != null) {
                   System.out.println("Operation: S3 Put Object Tagging");
                   System.out.println("Tag Set: " +
operation.s3PutObjectTagging().tagSet());
               }

               // Print out details about the job report.
               JobReport report = response.job().report();
               System.out.println("Report Bucket: " + report.bucket());
               System.out.println("Report Prefix: " + report.prefix());
```

```
                System.out.println("Report Format: " + report.format());
                System.out.println("Report Enabled: " + report.enabled());
                System.out.println("Report Scope: " + report.reportScopeAsString());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to describe job: " + ex.getMessage());
                throw new RuntimeException(ex);
            });
    }

    /**
     * Creates an asynchronous S3 job using the AWS Java SDK.
     *
     * @param accountId         the AWS account ID associated with the job
     * @param iamRoleArn        the ARN of the IAM role to be used for the job
     * @param manifestLocation  the location of the job manifest file in S3
     * @param reportBucketName  the name of the S3 bucket to store the job report
     * @param uuid              a unique identifier for the job
     * @return a CompletableFuture that represents the asynchronous creation of the
 S3 job.
     *         The CompletableFuture will return the job ID if the job is created
 successfully,
     *         or throw an exception if there is an error.
     */
    public CompletableFuture<String> createS3JobAsync(String accountId, String
 iamRoleArn,
                                                       String manifestLocation,
 String reportBucketName, String uuid) {

        String[] bucketName = new String[]{""};
        String[] parts = reportBucketName.split(":::");
        if (parts.length > 1) {
            bucketName[0] = parts[1];
        } else {
            System.out.println("The input string does not contain the expected
 format.");
        }

        return CompletableFuture.supplyAsync(() -> getETag(bucketName[0], "job-
manifest.csv"))
            .thenCompose(eTag -> {
                  ArrayList<S3Tag> tagSet = new ArrayList<>();
                S3Tag s3Tag = S3Tag.builder()
                    .key("keyOne")
```

```
                    .value("ValueOne")
                    .build();
                S3Tag s3Tag2 = S3Tag.builder()
                    .key("keyTwo")
                    .value("ValueTwo")
                    .build();
                tagSet.add(s3Tag);
                tagSet.add(s3Tag2);

                S3SetObjectTaggingOperation objectTaggingOperation =
S3SetObjectTaggingOperation.builder()
                    .tagSet(tagSet)
                    .build();

                JobOperation jobOperation = JobOperation.builder()
                    .s3PutObjectTagging(objectTaggingOperation)
                    .build();

                JobManifestLocation jobManifestLocation =
JobManifestLocation.builder()
                    .objectArn(manifestLocation)
                    .eTag(eTag)
                    .build();

                JobManifestSpec manifestSpec = JobManifestSpec.builder()
                    .fieldsWithStrings("Bucket", "Key")
                    .format("S3BatchOperations_CSV_20180820")
                    .build();

                JobManifest jobManifest = JobManifest.builder()
                    .spec(manifestSpec)
                    .location(jobManifestLocation)
                    .build();

                JobReport jobReport = JobReport.builder()
                    .bucket(reportBucketName)
                    .prefix("reports")
                    .format("Report_CSV_20180820")
                    .enabled(true)
                    .reportScope("AllTasks")
                    .build();

                CreateJobRequest jobRequest = CreateJobRequest.builder()
                    .accountId(accountId)
```

```
                    .description("Job created using the AWS Java SDK")
                    .manifest(jobManifest)
                    .operation(jobOperation)
                    .report(jobReport)
                    .priority(42)
                    .roleArn(iamRoleArn)
                    .clientRequestToken(uuid)
                    .confirmationRequired(false)
                    .build();

                // Create the job asynchronously.
                 return getAsyncClient().createJob(jobRequest)
                    .thenApply(CreateJobResponse::jobId);
                 })
                 .handle((jobId, ex) -> {
                    if (ex != null) {
                    Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                    if (cause instanceof S3ControlException) {
                        throw new CompletionException(cause);
                    } else {
                        throw new RuntimeException(cause);
                    }
                }
                return jobId;
            });
    }

    /**
     * Retrieves the ETag (Entity Tag) for an object stored in an Amazon S3 bucket.
     *
     * @param bucketName the name of the Amazon S3 bucket where the object is stored
     * @param key the key (file name) of the object in the Amazon S3 bucket
     * @return the ETag of the object
     */
    public String getETag(String bucketName, String key) {
        S3Client s3Client = S3Client.builder()
            .region(Region.US_EAST_1)
            .build();

        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
            .bucket(bucketName)
            .key(key)
            .build();
```

```
        HeadObjectResponse headObjectResponse =
s3Client.headObject(headObjectRequest);
        return headObjectResponse.eTag();
    }

    /**
     * Asynchronously adds tags to a job in the system.
     *
     * @param jobId     the ID of the job to add tags to
     * @param accountId the account ID associated with the job
     * @return a CompletableFuture that completes when the tagging operation is
finished
     */
    public CompletableFuture<Void> putJobTaggingAsync(String jobId, String
accountId) {
        S3Tag departmentTag = S3Tag.builder()
            .key("department")
            .value("Marketing")
            .build();

        S3Tag fiscalYearTag = S3Tag.builder()
            .key("FiscalYear")
            .value("2020")
            .build();

        PutJobTaggingRequest putJobTaggingRequest = PutJobTaggingRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .tags(departmentTag, fiscalYearTag)
            .build();

        return asyncClient.putJobTagging(putJobTaggingRequest)
            .thenRun(() -> {
                System.out.println("Additional Tags were added to job " + jobId);
            })
            .exceptionally(ex -> {
                System.err.println("Failed to add tags to job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }

    // Setup the S3 bucket required for this scenario.
    /**
```

```
     * Creates an Amazon S3 bucket with the specified name.
     *
     * @param bucketName the name of the S3 bucket to create
     * @throws S3Exception if there is an error creating the bucket
     */
    public void createBucket(String bucketName) {
        try {
            S3Client s3Client = S3Client.builder()
                .region(Region.US_EAST_1)
                .build();


            S3Waiter s3Waiter = s3Client.waiter();
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                .bucket(bucketName)
                .build();

            s3Client.createBucket(bucketRequest);
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                .bucket(bucketName)
                .build();

            // Wait until the bucket is created and print out the response.
            WaiterResponse<HeadBucketResponse> waiterResponse =
s3Waiter.waitUntilBucketExists(bucketRequestWait);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println(bucketName + " is ready");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    /**
     * Uploads a file to an Amazon S3 bucket asynchronously.
     *
     * @param bucketName the name of the S3 bucket to upload the file to
     * @param fileName the name of the file to be uploaded
     * @throws RuntimeException if an error occurs during the file upload
     */
    public void populateBucket(String bucketName, String fileName) {
        // Define the path to the directory.
```

```
        Path filePath = Paths.get("src/main/resources/batch/",
 fileName).toAbsolutePath();
        PutObjectRequest putOb = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(fileName)
            .build();

        CompletableFuture<PutObjectResponse> future =
 getS3AsyncClient().putObject(putOb, AsyncRequestBody.fromFile(filePath));
        future.whenComplete((result, ex) -> {
            if (ex != null) {
                System.err.println("Error uploading file: " + ex.getMessage());
            } else {
                System.out.println("Successfully placed " + fileName + " into bucket
 " + bucketName);
            }
        }).join();
    }


    // Update the bucketName in CSV.
    public void updateCSV(String newValue) {
        Path csvFilePath = Paths.get("src/main/resources/batch/job-
manifest.csv").toAbsolutePath();
        try {
            // Read all lines from the CSV file.
            List<String> lines = Files.readAllLines(csvFilePath);

            // Update the first value in each line.
            List<String> updatedLines = lines.stream()
                .map(line -> {
                    String[] parts = line.split(",");
                    parts[0] = newValue;
                    return String.join(",", parts);
                })
                .collect(Collectors.toList());

            // Write the updated lines back to the CSV file
            Files.write(csvFilePath, updatedLines);
            System.out.println("CSV file updated successfully.");
        } catch (Exception e) {
            e.printStackTrace();
        }
    }
```

```
   /**
    * Deletes an object from an Amazon S3 bucket asynchronously.
    *
    * @param bucketName The name of the S3 bucket where the object is stored.
    * @param objectName The name of the object to be deleted.
    * @return A {@link CompletableFuture} that completes when the object has been
deleted,
    *         or throws a {@link RuntimeException} if an error occurs during the
deletion.
    */
   public CompletableFuture<Void> deleteBucketObjects(String bucketName, String
objectName) {
       ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();
       toDelete.add(ObjectIdentifier.builder()
           .key(objectName)
           .build());

       DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
           .bucket(bucketName)
           .delete(Delete.builder()
               .objects(toDelete).build())
           .build();

       return getS3AsyncClient().deleteObjects(dor)
           .thenAccept(result -> {
               System.out.println("The object was deleted!");
           })
           .exceptionally(ex -> {
               throw new RuntimeException("Error deleting object: " +
ex.getMessage(), ex);
           });
   }

   /**
    * Deletes a folder and all its contents asynchronously from an Amazon S3
bucket.
    *
    * @param bucketName the name of the S3 bucket containing the folder to be
deleted
    * @return a {@link CompletableFuture} that completes when the folder and its
contents have been deleted
    * @throws RuntimeException if any error occurs during the deletion process
    */
```

```
   public void deleteBucketFolderAsync(String bucketName) {
       String folderName = "reports/";
       ListObjectsV2Request request = ListObjectsV2Request.builder()
           .bucket(bucketName)
           .prefix(folderName)
           .build();

       CompletableFuture<ListObjectsV2Response> listObjectsFuture =
getS3AsyncClient().listObjectsV2(request);
       listObjectsFuture.thenCompose(response -> {
           List<CompletableFuture<DeleteObjectResponse>> deleteFutures =
response.contents().stream()
               .map(obj -> {
                   DeleteObjectRequest deleteRequest =
DeleteObjectRequest.builder()
                       .bucket(bucketName)
                       .key(obj.key())
                       .build();
                   return getS3AsyncClient().deleteObject(deleteRequest)
                       .thenApply(deleteResponse -> {
                           System.out.println("Deleted object: " + obj.key());
                           return deleteResponse;
                       });
               })
               .collect(Collectors.toList());

           return CompletableFuture.allOf(deleteFutures.toArray(new
CompletableFuture[0]))
               .thenCompose(v -> {
                   // Delete the folder.
                   DeleteObjectRequest deleteRequest =
DeleteObjectRequest.builder()
                       .bucket(bucketName)
                       .key(folderName)
                       .build();
                   return getS3AsyncClient().deleteObject(deleteRequest)
                       .thenApply(deleteResponse -> {
                           System.out.println("Deleted folder: " + folderName);
                           return deleteResponse;
                       });
               });
       }).join();
   }
```

```
    /**
     * Deletes an Amazon S3 bucket.
     *
     * @param bucketName the name of the bucket to delete
     * @return a {@link CompletableFuture} that completes when the bucket has been
deleted, or exceptionally if there is an error
     * @throws RuntimeException if there is an error deleting the bucket
     */
    public CompletableFuture<Void> deleteBucket(String bucketName) {
        S3AsyncClient s3Client = getS3AsyncClient();
        return s3Client.deleteBucket(DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build())
            .thenAccept(deleteBucketResponse -> {
                System.out.println(bucketName + " was deleted");
            })
            .exceptionally(ex -> {
                // Handle the exception or rethrow it.
                throw new RuntimeException("Failed to delete bucket: " + bucketName,
ex);
            });
    }

    /**
     * Uploads a set of files to an Amazon S3 bucket.
     *
     * @param bucketName the name of the S3 bucket to upload the files to
     * @param fileNames an array of file names to be uploaded
     * @param actions an instance of {@link S3BatchActions} that provides the
implementation for the necessary S3 operations
     * @throws IOException if there's an error creating the text files or uploading
the files to the S3 bucket
     */
    public static void uploadFilesToBucket(String bucketName, String[] fileNames,
S3BatchActions actions) throws IOException {
        actions.updateCSV(bucketName);
        createTextFiles(fileNames);
        for (String fileName : fileNames) {
            actions.populateBucket(bucketName, fileName);
        }
        System.out.println("All files are placed in the S3 bucket " + bucketName);
    }

    /**
```

```
    * Deletes the specified files from the given S3 bucket.
    *
    * @param bucketName the name of the S3 bucket
    * @param fileNames an array of file names to be deleted from the bucket
    * @param actions the S3BatchActions instance to be used for the file deletion
    * @throws IOException if an I/O error occurs during the file deletion
    */
   public void deleteFilesFromBucket(String bucketName, String[] fileNames,
S3BatchActions actions) throws IOException {
       for (String fileName : fileNames) {
                  actions.deleteBucketObjects(bucketName, fileName)
                 .thenRun(() -> System.out.println("Object deletion completed"))
                 .exceptionally(ex -> {
                     System.err.println("Error occurred: " + ex.getMessage());
                     return null;
                 });
       }
       System.out.println("All files have been deleted from the bucket " +
bucketName);
   }

   public static void createTextFiles(String[] fileNames) {
       String currentDirectory = System.getProperty("user.dir");
       String directoryPath = currentDirectory + "\\src\\main\\resources\\batch";
       Path path = Paths.get(directoryPath);

       try {
           // Create the directory if it doesn't exist.
           if (Files.notExists(path)) {
               Files.createDirectories(path);
               System.out.println("Created directory: " + path.toString());
           } else {
               System.out.println("Directory already exists: " + path.toString());
           }

           for (String fileName : fileNames) {
               // Check if the file is a .txt file.
               if (fileName.endsWith(".txt")) {
                   // Define the path for the new file.
                   Path filePath = path.resolve(fileName);
                   System.out.println("Attempting to create file: " +
filePath.toString());

                   // Create and write content to the new file.
```

```
                    Files.write(filePath, "This is a test".getBytes());

                    // Verify the file was created.
                    if (Files.exists(filePath)) {
                        System.out.println("Successfully created file: " +
 filePath.toString());
                    } else {
                        System.out.println("Failed to create file: " +
 filePath.toString());
                    }
                }
            }

        } catch (IOException e) {
            System.err.println("An error occurred: " + e.getMessage());
            e.printStackTrace();
        }
    }

    public String getAccountId() {
        StsClient stsClient = StsClient.builder()
            .region(Region.US_EAST_1)
            .build();

        GetCallerIdentityResponse callerIdentityResponse =
 stsClient.getCallerIdentity();
        return callerIdentityResponse.account();
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateJob
  - DeleteJobTagging
  - DescribeJob
  - GetJobTagging
  - ListJobs
  - PutJobTagging
  - UpdateJobPriority
  - UpdateJobStatus

# Tindakan

## `CreateJob`

Contoh kode berikut menunjukkan cara menggunakan`CreateJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat pekerjaan S3 asinkron.

```
   /**
    * Creates an asynchronous S3 job using the AWS Java SDK.
    *
    * @param accountId         the AWS account ID associated with the job
    * @param iamRoleArn        the ARN of the IAM role to be used for the job
    * @param manifestLocation  the location of the job manifest file in S3
    * @param reportBucketName  the name of the S3 bucket to store the job report
    * @param uuid              a unique identifier for the job
    * @return a CompletableFuture that represents the asynchronous creation of the
S3 job.
    *         The CompletableFuture will return the job ID if the job is created
successfully,
    *         or throw an exception if there is an error.
    */
   public CompletableFuture<String> createS3JobAsync(String accountId, String
iamRoleArn,
                                                      String manifestLocation,
String reportBucketName, String uuid) {

       String[] bucketName = new String[]{""};
       String[] parts = reportBucketName.split(":::");
       if (parts.length > 1) {
           bucketName[0] = parts[1];
       } else {
           System.out.println("The input string does not contain the expected
format.");
       }
```

```
        return CompletableFuture.supplyAsync(() -> getETag(bucketName[0], "job-
manifest.csv"))
            .thenCompose(eTag -> {
                  ArrayList<S3Tag> tagSet = new ArrayList<>();
                S3Tag s3Tag = S3Tag.builder()
                    .key("keyOne")
                    .value("ValueOne")
                    .build();
                S3Tag s3Tag2 = S3Tag.builder()
                    .key("keyTwo")
                    .value("ValueTwo")
                    .build();
                tagSet.add(s3Tag);
                tagSet.add(s3Tag2);

                S3SetObjectTaggingOperation objectTaggingOperation =
 S3SetObjectTaggingOperation.builder()
                    .tagSet(tagSet)
                    .build();

                JobOperation jobOperation = JobOperation.builder()
                    .s3PutObjectTagging(objectTaggingOperation)
                    .build();

                JobManifestLocation jobManifestLocation =
 JobManifestLocation.builder()
                    .objectArn(manifestLocation)
                    .eTag(eTag)
                    .build();

                JobManifestSpec manifestSpec = JobManifestSpec.builder()
                    .fieldsWithStrings("Bucket", "Key")
                    .format("S3BatchOperations_CSV_20180820")
                    .build();

                JobManifest jobManifest = JobManifest.builder()
                    .spec(manifestSpec)
                    .location(jobManifestLocation)
                    .build();

                JobReport jobReport = JobReport.builder()
                    .bucket(reportBucketName)
                    .prefix("reports")
```

```
                    .format("Report_CSV_20180820")
                    .enabled(true)
                    .reportScope("AllTasks")
                    .build();

                CreateJobRequest jobRequest = CreateJobRequest.builder()
                    .accountId(accountId)
                    .description("Job created using the AWS Java SDK")
                    .manifest(jobManifest)
                    .operation(jobOperation)
                    .report(jobReport)
                    .priority(42)
                    .roleArn(iamRoleArn)
                    .clientRequestToken(uuid)
                    .confirmationRequired(false)
                    .build();

                // Create the job asynchronously.
                 return getAsyncClient().createJob(jobRequest)
                    .thenApply(CreateJobResponse::jobId);
                 })
                 .handle((jobId, ex) -> {
                    if (ex != null) {
                    Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                    if (cause instanceof S3ControlException) {
                        throw new CompletionException(cause);
                    } else {
                        throw new RuntimeException(cause);
                    }
                }
                return jobId;
            });
    }
```

Buat pekerjaan retensi kepatuhan.

```
    /**
     * Creates a compliance retention job in Amazon S3 Control.
     * <p>
```

```
     * A compliance retention job in Amazon S3 Control is a feature that allows you
 to
     * set a retention period for objects stored in an S3 bucket.
     * This feature is particularly useful for organizations that need to comply
 with
     * regulatory requirements or internal policies that mandate the retention of
 data for
     * a specific duration.
     *
     * @param s3ControlClient The S3ControlClient instance to use for the API call.
     * @return The job ID of the created compliance retention job.
     */
    public static String createComplianceRetentionJob(final S3ControlClient
 s3ControlClient, String roleArn, String bucketName, String accountId) {
        final String manifestObjectArn = "arn:aws:s3:::amzn-s3-demo-manifest-bucket/
compliance-objects-manifest.csv";
        final String manifestObjectVersionId = "your-object-version-Id";

        Instant jan2025 = Instant.parse("2025-01-01T00:00:00Z");
        JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(S3SetObjectRetentionOperation.builder()
                .retention(S3Retention.builder()
                    .mode(S3ObjectLockRetentionMode.COMPLIANCE)
                    .retainUntilDate(jan2025)
                    .build())
                .build())
            .build();

        JobManifestLocation manifestLocation = JobManifestLocation.builder()
            .objectArn(manifestObjectArn)
            .eTag(manifestObjectVersionId)
            .build();

        JobManifestSpec manifestSpec = JobManifestSpec.builder()
            .fieldsWithStrings("Bucket", "Key")
            .format("S3BatchOperations_CSV_20180820")
            .build();

        JobManifest manifestToPublicApi = JobManifest.builder()
            .location(manifestLocation)
            .spec(manifestSpec)
            .build();

        // Report details.
```

```
        final String jobReportBucketArn = "arn:aws:s3:::" + bucketName;
        final String jobReportPrefix = "reports/compliance-objects-bops";

        JobReport jobReport = JobReport.builder()
            .enabled(true)
            .reportScope(JobReportScope.ALL_TASKS)
            .bucket(jobReportBucketArn)
            .prefix(jobReportPrefix)
            .format(JobReportFormat.REPORT_CSV_20180820)
            .build();

        final Boolean requiresConfirmation = true;
        final int priority = 10;
        CreateJobRequest request = CreateJobRequest.builder()
            .accountId(accountId)
            .description("Set compliance retain-until to 1 Jan 2025")
            .manifest(manifestToPublicApi)
            .operation(jobOperation)
            .priority(priority)
            .roleArn(roleArn)
            .report(jobReport)
            .confirmationRequired(requiresConfirmation)
            .build();

        // Create the job and get the result.
        CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
```

Buat pekerjaan penundaan hukum.

```
    /**
     * Creates a compliance retention job in Amazon S3 Control.
     * <p>
     * A compliance retention job in Amazon S3 Control is a feature that allows you
to
     * set a retention period for objects stored in an S3 bucket.
     * This feature is particularly useful for organizations that need to comply
with
     * regulatory requirements or internal policies that mandate the retention of
data for
```

```
     * a specific duration.
     *
     * @param s3ControlClient The S3ControlClient instance to use for the API call.
     * @return The job ID of the created compliance retention job.
     */
    public static String createComplianceRetentionJob(final S3ControlClient
 s3ControlClient, String roleArn, String bucketName, String accountId) {
        final String manifestObjectArn = "arn:aws:s3:::amzn-s3-demo-manifest-bucket/
compliance-objects-manifest.csv";
        final String manifestObjectVersionId = "your-object-version-Id";

        Instant jan2025 = Instant.parse("2025-01-01T00:00:00Z");
        JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(S3SetObjectRetentionOperation.builder()
                .retention(S3Retention.builder()
                    .mode(S3ObjectLockRetentionMode.COMPLIANCE)
                    .retainUntilDate(jan2025)
                    .build())
                .build())
            .build();

        JobManifestLocation manifestLocation = JobManifestLocation.builder()
            .objectArn(manifestObjectArn)
            .eTag(manifestObjectVersionId)
            .build();

        JobManifestSpec manifestSpec = JobManifestSpec.builder()
            .fieldsWithStrings("Bucket", "Key")
            .format("S3BatchOperations_CSV_20180820")
            .build();

        JobManifest manifestToPublicApi = JobManifest.builder()
            .location(manifestLocation)
            .spec(manifestSpec)
            .build();

        // Report details.
        final String jobReportBucketArn = "arn:aws:s3:::" + bucketName;
        final String jobReportPrefix = "reports/compliance-objects-bops";

        JobReport jobReport = JobReport.builder()
            .enabled(true)
            .reportScope(JobReportScope.ALL_TASKS)
            .bucket(jobReportBucketArn)
```

```
            .prefix(jobReportPrefix)
            .format(JobReportFormat.REPORT_CSV_20180820)
            .build();

        final Boolean requiresConfirmation = true;
        final int priority = 10;
        CreateJobRequest request = CreateJobRequest.builder()
            .accountId(accountId)
            .description("Set compliance retain-until to 1 Jan 2025")
            .manifest(manifestToPublicApi)
            .operation(jobOperation)
            .priority(priority)
            .roleArn(roleArn)
            .report(jobReport)
            .confirmationRequired(requiresConfirmation)
            .build();

        // Create the job and get the result.
        CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
```

Buat pekerjaan retensi tata kelola baru.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateGovernanceRetentionJob {

    public static void main(String[]args) throws ParseException {
        final String usage = """

            Usage:
                <manifestObjectArn> <jobReportBucketArn> <roleArn> <accountId>
 <manifestObjectVersionId>

            Where:
```

```
                manifestObjectArn - The Amazon Resource Name (ARN) of the S3 object
that contains the manifest file for the governance objects.\s
                bucketName - The ARN of the S3 bucket where the job report will be
stored.
                roleArn - The ARN of the IAM role that will be used to perform the
governance retention operation.
                accountId - Your AWS account Id.
                manifestObjectVersionId =  A unique value that is used as the `eTag`
property of the `JobManifestLocation` object.
            """;

        if (args.length != 4) {
            System.out.println(usage);
            return;
        }

        String manifestObjectArn = args[0];
        String jobReportBucketArn = args[1];
        String roleArn = args[2];
        String accountId = args[3];
        String manifestObjectVersionId = args[4];

        S3ControlClient s3ControlClient = S3ControlClient.create();
        createGovernanceRetentionJob(s3ControlClient, manifestObjectArn,
jobReportBucketArn, roleArn, accountId, manifestObjectVersionId);
    }

    public static String createGovernanceRetentionJob(final S3ControlClient
s3ControlClient, String manifestObjectArn, String jobReportBucketArn, String
roleArn, String accountId, String manifestObjectVersionId) throws ParseException {
        final JobManifestLocation manifestLocation = JobManifestLocation.builder()
            .objectArn(manifestObjectArn)
            .eTag(manifestObjectVersionId)
            .build();

        final JobManifestSpec manifestSpec = JobManifestSpec.builder()
            .format(JobManifestFormat.S3_BATCH_OPERATIONS_CSV_20180820)
            .fields(Arrays.asList(JobManifestFieldName.BUCKET,
JobManifestFieldName.KEY))
            .build();

        final JobManifest manifestToPublicApi = JobManifest.builder()
            .location(manifestLocation)
            .spec(manifestSpec)
```

```
            .build();

        final String jobReportPrefix = "reports/governance-objects";
        final JobReport jobReport = JobReport.builder()
            .enabled(true)
            .reportScope(JobReportScope.ALL_TASKS)
            .bucket(jobReportBucketArn)
            .prefix(jobReportPrefix)
            .format(JobReportFormat.REPORT_CSV_20180820)
            .build();

        final SimpleDateFormat format = new SimpleDateFormat("dd/MM/yyyy");
        final Date jan30th = format.parse("30/01/2025");

        final S3SetObjectRetentionOperation s3SetObjectRetentionOperation =
 S3SetObjectRetentionOperation.builder()
            .retention(S3Retention.builder()
                .mode(S3ObjectLockRetentionMode.GOVERNANCE)
                .retainUntilDate(jan30th.toInstant())
                .build())
            .build();

        final JobOperation jobOperation = JobOperation.builder()
            .s3PutObjectRetention(s3SetObjectRetentionOperation)
            .build();

        final Boolean requiresConfirmation = true;
        final int priority = 10;

        final CreateJobRequest request = CreateJobRequest.builder()
            .accountId(accountId)
            .description("Put governance retention")
            .manifest(manifestToPublicApi)
            .operation(jobOperation)
            .priority(priority)
            .roleArn(roleArn)
            .report(jobReport)
            .confirmationRequired(requiresConfirmation)
            .build();

        final CreateJobResponse result = s3ControlClient.createJob(request);
        return result.jobId();
    }
}
```

- Untuk detail API, lihat CreateJobdi Referensi AWS SDK for Java 2.x API.

### `DeleteJobTagging`

Contoh kode berikut menunjukkan cara menggunakan`DeleteJobTagging`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously deletes the tags associated with a specific batch job.
    *
    * @param jobId     The ID of the batch job whose tags should be deleted.
    * @param accountId The ID of the account associated with the batch job.
    * @return A CompletableFuture that completes when the job tags have been
successfully deleted, or an exception is thrown if the deletion fails.
    */
   public CompletableFuture<Void> deleteBatchJobTagsAsync(String jobId, String
accountId) {
       DeleteJobTaggingRequest jobTaggingRequest =
DeleteJobTaggingRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .build();

       return asyncClient.deleteJobTagging(jobTaggingRequest)
           .thenAccept(response -> {
               System.out.println("You have successfully deleted " + jobId + "
tagging.");
           })
           .exceptionally(ex -> {
               System.err.println("Failed to delete job tags: " + ex.getMessage());
               throw new RuntimeException(ex);
           });
   }
```

- Untuk detail API, lihat DeleteJobTaggingdi Referensi AWS SDK for Java 2.x API.

### `DescribeJob`

Contoh kode berikut menunjukkan cara menggunakan`DescribeJob`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously describes the specified job.
     *
     * @param jobId     the ID of the job to describe
     * @param accountId the ID of the AWS account associated with the job
     * @return a {@link CompletableFuture} that completes when the job description
is available
     * @throws RuntimeException if an error occurs while describing the job
     */
    public CompletableFuture<Void> describeJobAsync(String jobId, String accountId)
{
        DescribeJobRequest jobRequest = DescribeJobRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .build();

        return getAsyncClient().describeJob(jobRequest)
            .thenAccept(response -> {
                System.out.println("Job ID: " + response.job().jobId());
                System.out.println("Description: " + response.job().description());
                System.out.println("Status: " + response.job().statusAsString());
                System.out.println("Role ARN: " + response.job().roleArn());
                System.out.println("Priority: " + response.job().priority());
                System.out.println("Progress Summary: " +
response.job().progressSummary());
```

```
                // Print out details about the job manifest.
                JobManifest manifest = response.job().manifest();
                System.out.println("Manifest Location: " +
manifest.location().objectArn());
                System.out.println("Manifest ETag: " + manifest.location().eTag());

                // Print out details about the job operation.
                JobOperation operation = response.job().operation();
                if (operation.s3PutObjectTagging() != null) {
                    System.out.println("Operation: S3 Put Object Tagging");
                    System.out.println("Tag Set: " +
operation.s3PutObjectTagging().tagSet());
                }

                // Print out details about the job report.
                JobReport report = response.job().report();
                System.out.println("Report Bucket: " + report.bucket());
                System.out.println("Report Prefix: " + report.prefix());
                System.out.println("Report Format: " + report.format());
                System.out.println("Report Enabled: " + report.enabled());
                System.out.println("Report Scope: " + report.reportScopeAsString());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to describe job: " + ex.getMessage());
                throw new RuntimeException(ex);
            });
    }
```

- Untuk detail API, lihat DescribeJobdi Referensi AWS SDK for Java 2.x API.

### `GetJobTagging`

Contoh kode berikut menunjukkan cara menggunakan`GetJobTagging`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Asynchronously retrieves the tags associated with a specific job in an AWS
account.
     *
     * @param jobId     the ID of the job for which to retrieve the tags
     * @param accountId the ID of the AWS account associated with the job
     * @return a {@link CompletableFuture} that completes when the job tags have
been retrieved, or with an exception if the operation fails
     * @throws RuntimeException if an error occurs while retrieving the job tags
     */
    public CompletableFuture<Void> getJobTagsAsync(String jobId, String accountId) {
        GetJobTaggingRequest request = GetJobTaggingRequest.builder()
            .jobId(jobId)
            .accountId(accountId)
            .build();

        return asyncClient.getJobTagging(request)
            .thenAccept(response -> {
                List<S3Tag> tags = response.tags();
                if (tags.isEmpty()) {
                    System.out.println("No tags found for job ID: " + jobId);
                } else {
                    for (S3Tag tag : tags) {
                        System.out.println("Tag key is: " + tag.key());
                        System.out.println("Tag value is: " + tag.value());
                    }
                }
            })
            .exceptionally(ex -> {
                System.err.println("Failed to get job tags: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }
```

- Untuk detail API, lihat GetJobTaggingdi Referensi AWS SDK for Java 2.x API.

### `PutJobTagging`

Contoh kode berikut menunjukkan cara menggunakan`PutJobTagging`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Asynchronously adds tags to a job in the system.
    *
    * @param jobId     the ID of the job to add tags to
    * @param accountId the account ID associated with the job
    * @return a CompletableFuture that completes when the tagging operation is
finished
    */
   public CompletableFuture<Void> putJobTaggingAsync(String jobId, String
accountId) {
       S3Tag departmentTag = S3Tag.builder()
           .key("department")
           .value("Marketing")
           .build();

       S3Tag fiscalYearTag = S3Tag.builder()
           .key("FiscalYear")
           .value("2020")
           .build();

       PutJobTaggingRequest putJobTaggingRequest = PutJobTaggingRequest.builder()
           .jobId(jobId)
           .accountId(accountId)
           .tags(departmentTag, fiscalYearTag)
           .build();

       return asyncClient.putJobTagging(putJobTaggingRequest)
           .thenRun(() -> {
               System.out.println("Additional Tags were added to job " + jobId);
           })
           .exceptionally(ex -> {
               System.err.println("Failed to add tags to job: " + ex.getMessage());
               throw new RuntimeException(ex); // Propagate the exception
           });
```

```
    }
```

- Untuk detail API, lihat PutJobTaggingdi Referensi AWS SDK for Java 2.x API.

### `UpdateJobPriority`

Contoh kode berikut menunjukkan cara menggunakan`UpdateJobPriority`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Updates the priority of a job asynchronously.
    *
    * @param jobId     the ID of the job to update
    * @param accountId the ID of the account associated with the job
    * @return a {@link CompletableFuture} that represents the asynchronous
operation, which completes when the job priority has been updated or an error has
occurred
    */
   public CompletableFuture<Void> updateJobPriorityAsync(String jobId, String
accountId) {
       UpdateJobPriorityRequest priorityRequest =
UpdateJobPriorityRequest.builder()
           .accountId(accountId)
           .jobId(jobId)
           .priority(60)
           .build();

       CompletableFuture<Void> future = new CompletableFuture<>();
       getAsyncClient().updateJobPriority(priorityRequest)
           .thenAccept(response -> {
               System.out.println("The job priority was updated");
               future.complete(null); // Complete the CompletableFuture on
successful execution
           })
```

```
            .exceptionally(ex -> {
                System.err.println("Failed to update job priority: " +
ex.getMessage());
                future.completeExceptionally(ex); // Complete the CompletableFuture
exceptionally on error
                return null; // Return null to handle the exception
            });

        return future;
    }
```

- Untuk detail API, lihat UpdateJobPrioritydi Referensi AWS SDK for Java 2.x API.

### `UpdateJobStatus`

Contoh kode berikut menunjukkan cara menggunakan`UpdateJobStatus`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Cancels a job asynchronously.
     *
     * @param jobId The ID of the job to be canceled.
     * @param accountId The ID of the account associated with the job.
     * @return A {@link CompletableFuture} that completes when the job status has
been updated to "CANCELLED".
     *         If an error occurs during the update, the returned future will
complete exceptionally.
     */
    public CompletableFuture<Void> cancelJobAsync(String jobId, String accountId) {
        UpdateJobStatusRequest updateJobStatusRequest =
UpdateJobStatusRequest.builder()
            .accountId(accountId)
            .jobId(jobId)
            .requestedJobStatus(String.valueOf(JobStatus.CANCELLED))
```

```
            .build();

        return asyncClient.updateJobStatus(updateJobStatusRequest)
            .thenAccept(updateJobStatusResponse -> {
                System.out.println("Job status updated to: " +
updateJobStatusResponse.status());
            })
            .exceptionally(ex -> {
                System.err.println("Failed to cancel job: " + ex.getMessage());
                throw new RuntimeException(ex); // Propagate the exception
            });
    }
```

- Untuk detail API, lihat UpdateJobStatusdi Referensi AWS SDK for Java 2.x API.

# Contoh Bucket Direktori S3 menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Bucket Direktori AWS SDK for Java 2.x with S3.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario

# Memulai

## Halo ember direktori Amazon S3

Contoh kode berikut menunjukkan cara memulai menggunakan bucket direktori Amazon S3.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
package com.example.s3.directorybucket;


import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.BucketInfo;
import software.amazon.awssdk.services.s3.model.BucketType;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateBucketResponse;
import software.amazon.awssdk.services.s3.model.DataRedundancy;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsResponse;
import software.amazon.awssdk.services.s3.model.LocationInfo;
import software.amazon.awssdk.services.s3.model.LocationType;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.util.List;
import java.util.stream.Collectors;

import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;

/**
```

```
 * Before running this example:
 * <p>
 * The SDK must be able to authenticate AWS requests on your behalf. If you have
 * not configured
 * authentication for SDKs and tools, see
 * https://docs.aws.amazon.com/sdkref/latest/guide/access.html in the AWS SDKs
 * and Tools Reference Guide.
 * <p>
 * You must have a runtime environment configured with the Java SDK.
 * See
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/setup.html in
 * the Developer Guide if this is not set up.
 * <p>
 * To use S3 directory buckets, configure a gateway VPC endpoint. This is the
 * recommended method to enable directory bucket traffic without
 * requiring an internet gateway or NAT device. For more information on
 * configuring VPC gateway endpoints, visit
 * https://docs.aws.amazon.com/AmazonS3/latest/userguide/s3-express-
networking.html#s3-express-networking-vpc-gateway.
 * <p>
 * Directory buckets are available in specific AWS Regions and Zones. For
 * details on Regions and Zones supporting directory buckets, see
 * https://docs.aws.amazon.com/AmazonS3/latest/userguide/s3-express-
networking.html#s3-express-endpoints.
 */

public class HelloS3DirectoryBuckets {
    private static final Logger logger =
 LoggerFactory.getLogger(HelloS3DirectoryBuckets.class);

    public static void main(String[] args) {
        String bucketName = "test-bucket-" + System.currentTimeMillis() + "--usw2-
az1--x-s3";
        Region region = Region.US_WEST_2;
        String zone = "usw2-az1";
        S3Client s3Client = createS3Client(region);

        try {
            // Create the directory bucket
            createDirectoryBucket(s3Client, bucketName, zone);
            logger.info("Created bucket: {}", bucketName);

            // List all directory buckets
            List<String> bucketNames = listDirectoryBuckets(s3Client);
```

```
            bucketNames.forEach(name -> logger.info("Bucket Name: {}", name));
        } catch (S3Exception e) {
            logger.error("An error occurred during S3 operations: {} - Error code:
{}",
                    e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode(), e);
        } finally {
            try {
                // Delete the created bucket
                deleteDirectoryBucket(s3Client, bucketName);
                logger.info("Deleted bucket: {}", bucketName);
            } catch (S3Exception e) {
                logger.error("Failed to delete the bucket due to S3 error: {} -
Error code: {}",
                        e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode(), e);
            } catch (RuntimeException e) {
                logger.error("Failed to delete the bucket due to unexpected error:
{}", e.getMessage(), e);
            } finally {
                s3Client.close();
            }
        }
    }

    /**
     * Creates a new S3 directory bucket in a specified Zone (For example, a
     * specified Availability Zone in this code example).
     *
     * @param s3Client   The S3 client used to create the bucket
     * @param bucketName The name of the bucket to be created
     * @param zone       The region where the bucket will be created
     * @throws S3Exception if there's an error creating the bucket
     */
    public static void createDirectoryBucket(S3Client s3Client, String bucketName,
String zone) throws S3Exception {
        logger.info("Creating bucket: {}", bucketName);

        CreateBucketConfiguration bucketConfiguration =
CreateBucketConfiguration.builder()
                .location(LocationInfo.builder()
                        .type(LocationType.AVAILABILITY_ZONE)
                        .name(zone).build())
                .bucket(BucketInfo.builder()
```

```
                        .type(BucketType.DIRECTORY)
                        .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                        .build())
                .build();
        try {
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .createBucketConfiguration(bucketConfiguration).build();
            CreateBucketResponse response = s3Client.createBucket(bucketRequest);
            logger.info("Bucket created successfully with location: {}",
response.location());
        } catch (S3Exception e) {
            logger.error("Error creating bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }

    /**
     * Lists all S3 directory buckets.
     *
     * @param s3Client The S3 client used to interact with S3
     * @return A list of bucket names
     */
    public static List<String> listDirectoryBuckets(S3Client s3Client) {
        logger.info("Listing all directory buckets");

        try {
            // Create a ListBucketsRequest
            ListDirectoryBucketsRequest listBucketsRequest =
ListDirectoryBucketsRequest.builder().build();

            // Retrieve the list of buckets
            ListDirectoryBucketsResponse response =
s3Client.listDirectoryBuckets(listBucketsRequest);

            // Extract bucket names
            List<String> bucketNames = response.buckets().stream()
                    .map(Bucket::name)
                    .collect(Collectors.toList());

            return bucketNames;
        } catch (S3Exception e) {
```

```
            logger.error("Failed to list buckets: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }

    /**
     * Deletes the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the bucket to delete
     */
    public static void deleteDirectoryBucket(S3Client s3Client, String bucketName) {
        try {
            DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
            s3Client.deleteBucket(deleteBucketRequest);
        } catch (S3Exception e) {
            logger.error("Failed to delete bucket: " + bucketName + " - Error code:
 " + e.awsErrorDetails().errorCode(),
                    e);
            throw e;
        }
    }

}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateBucket
  - ListDirectoryBuckets

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Siapkan VPC dan VPC Endpoint.

- Siapkan Kebijakan, Peran, dan Pengguna untuk bekerja dengan bucket direktori S3 dan kelas penyimpanan S3 Express One Zone.
- Buat dua Klien S3.
- Buat dua bucket.
- Buat objek dan salin.
- Menunjukkan perbedaan kinerja.
- Isi ember untuk menunjukkan perbedaan leksikografis.
- Minta pengguna untuk melihat apakah mereka ingin membersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan skenario interaktif yang mendemonstrasikan fitur Amazon S3.

```
public class S3DirectoriesScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    private static final Logger logger =
 LoggerFactory.getLogger(S3DirectoriesScenario.class);
    static Scanner scanner = new Scanner(System.in);

    private static S3AsyncClient mS3RegularClient;
    private static S3AsyncClient mS3ExpressClient;

    private static String mdirectoryBucketName;
    private static String mregularBucketName;

    private static String stackName = "cfn-stack-s3-express-basics--" +
 UUID.randomUUID();

    private static String regularUser = "";
    private static String vpcId = "";
    private static String expressUser = "";
```

```
   private static String vpcEndpointId = "";

   private static final S3DirectoriesActions s3DirectoriesActions = new
S3DirectoriesActions();

   public static void main(String[] args) {
       try {
           s3ExpressScenario();
       } catch (RuntimeException e) {
           logger.info(e.getMessage());
       }
   }

   // Runs the scenario.
   private static void s3ExpressScenario() {
       logger.info(DASHES);
       logger.info("Welcome to the Amazon S3 Express Basics demo using AWS SDK for
Java V2.");
       logger.info("""
           Let's get started! First, please note that S3 Express One Zone works
best when working within the AWS infrastructure,
           specifically when working in the same Availability Zone (AZ). To see the
best results in this example and when you implement
           directory buckets into your infrastructure, it is best to put your
compute resources in the same AZ as your directory
           bucket.
           """);
       waitForInputToContinue(scanner);
       logger.info(DASHES);

       // Create an optional VPC and create 2 IAM users.
       UserNames userNames = createVpcUsers();
       String expressUserName = userNames.getExpressUserName();
       String regularUserName = userNames.getRegularUserName();

       //  Set up two S3 clients, one regular and one express,
       //  and two buckets, one regular and one directory.
       setupClientsAndBuckets(expressUserName, regularUserName);

       // Create an S3 session for the express S3 client and add objects to the
buckets.
       logger.info("Now let's add some objects to our buckets and demonstrate how
to work with S3 Sessions.");
```

```
        waitForInputToContinue(scanner);
        String bucketObject = createSessionAddObjects();

        // Demonstrate performance differences between regular and directory
buckets.
        demonstratePerformance(bucketObject);

        // Populate the buckets to show the lexicographical difference between
        // regular and express buckets.
        showLexicographicalDifferences(bucketObject);

        logger.info(DASHES);
        logger.info("That's it for our tour of the basic operations for S3 Express
One Zone.");
        logger.info("Would you like to cleanUp the AWS resources? (y/n): ");
        String response = scanner.next().trim().toLowerCase();
        if (response.equals("y")) {
            cleanUp(stackName);
        }
    }

    /*
      Delete resources created by this scenario.
    */
    public static void cleanUp(String stackName) {
        try {
            if (mdirectoryBucketName != null) {
                s3DirectoriesActions.deleteBucketAndObjectsAsync(mS3ExpressClient,
mdirectoryBucketName).join();
            }
            logger.info("Deleted directory bucket " + mdirectoryBucketName);
            mdirectoryBucketName = null;
            if (mregularBucketName != null) {
                s3DirectoriesActions.deleteBucketAndObjectsAsync(mS3RegularClient,
mregularBucketName).join();
            }
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof S3Exception) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
```

```
        }

        logger.info("Deleted regular bucket " + mregularBucketName);
        mregularBucketName = null;
        CloudFormationHelper.destroyCloudFormationStack(stackName);
    }

    private static void showLexicographicalDifferences(String bucketObject) {
        logger.info(DASHES);
        logger.info("""
            7. Populate the buckets to show the lexicographical (alphabetical)
difference
            when object names are listed. Now let's explore how directory buckets
store
            objects in a different manner to regular buckets. The key is in the
name
            "Directory". Where regular buckets store their key/value pairs in a
            flat manner, directory buckets use actual directories/folders.
            This allows for more rapid indexing, traversing, and therefore
            retrieval times!

            The more segmented your bucket is, with lots of
            directories, sub-directories, and objects, the more efficient it
becomes.
            This structural difference also causes `ListObject` operations to
behave
            differently, which can cause unexpected results. Let's add a few more
            objects in sub-directories to see how the output of
            ListObjects changes.
            """);

        waitForInputToContinue(scanner);

        //  Populate a few more files in each bucket so that we can use
        //  ListObjects and show the difference.
        String otherObject = "other/" + bucketObject;
        String altObject = "alt/" + bucketObject;
        String otherAltObject = "other/alt/" + bucketObject;

        try {
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, otherObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, otherObject, "").join();
```

```
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, altObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, altObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, otherAltObject, "").join();
            s3DirectoriesActions.putObjectAsync(mS3ExpressClient,
mdirectoryBucketName, otherAltObject, "").join();

        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof NoSuchBucketException) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        try {
            // List objects in both S3 buckets.
            List<String> dirBucketObjects =
s3DirectoriesActions.listObjectsAsync(mS3ExpressClient,
mdirectoryBucketName).join();
            List<String> regBucketObjects =
s3DirectoriesActions.listObjectsAsync(mS3RegularClient, mregularBucketName).join();

            logger.info("Directory bucket content");
            for (String obj : dirBucketObjects) {
                logger.info(obj);
            }

            logger.info("Regular bucket content");
            for (String obj : regBucketObjects) {
                logger.info(obj);
            }
        } catch (CompletionException e) {
            logger.error("Async operation failed: {} ", e.getCause().getMessage());
            return;
        }

        logger.info("""
```

```
            Notice how the regular bucket lists objects in lexicographical order,
while the directory bucket does not. This is
            because the regular bucket considers the whole "key" to be the object
identifier, while the directory bucket actually
            creates directories and uses the object "key" as a path to the object.
            """);
        waitForInputToContinue(scanner);
    }

    /**
     * Demonstrates the performance difference between downloading an object from a
directory bucket and a regular bucket.
     *
     * <p>This method:
     * <ul>
     *     <li>Prompts the user to choose the number of downloads (default is
1,000).</li>
     *     <li>Downloads the specified object from the directory bucket and measures
the total time.</li>
     *     <li>Downloads the same object from the regular bucket and measures the
total time.</li>
     *     <li>Compares the time differences and prints the results.</li>
     * </ul>
     *
     * <p>Note: The performance difference will be more pronounced if this example
is run on an EC2 instance
     * in the same Availability Zone as the buckets.
     *
     * @param bucketObject the name of the object to download
     */
    private static void demonstratePerformance(String bucketObject) {
        logger.info(DASHES);
        logger.info("6. Demonstrate the performance difference.");
        logger.info("""
            Now, let's do a performance test. We'll download the same object from
each
            bucket repeatedly and compare the total time needed.

            Note: the performance difference will be much more pronounced if this
            example is run in an EC2 instance in the same Availability Zone as
            the bucket.
            """);
        waitForInputToContinue(scanner);
```

```
        int downloads = 1000; // Default value.
        logger.info("The default number of downloads of the same object for this
example is set at " + downloads + ".");

        // Ask if the user wants to download a different number.
        logger.info("Would you like to download the file a different number of
times? (y/n): ");
        String response = scanner.next().trim().toLowerCase();
        if (response.equals("y")) {
            int maxDownloads = 1_000_000;

            // Ask for a valid number of downloads.
            while (true) {
                logger.info("Enter a number between 1 and " + maxDownloads + " for
the number of downloads: ");
                if (scanner.hasNextInt()) {
                    downloads = scanner.nextInt();
                    if (downloads >= 1 && downloads <= maxDownloads) {
                        break;
                    } else {
                        logger.info("Please enter a number between 1 and " +
maxDownloads + ".");
                    }
                } else {
                    logger.info("Invalid input. Please enter a valid integer.");
                    scanner.next();
                }
            }

            logger.info("You have chosen to download {}  items.", downloads);
        } else {
            logger.info("No changes made. Using default downloads: {}", downloads);
        }
        // Simulating the download process for the directory bucket.
        logger.info("Downloading from the directory bucket.");
        long directoryTimeStart = System.nanoTime();
        for (int index = 0; index < downloads; index++) {
            if (index % 50 == 0) {
                logger.info("Download " + index + " of " + downloads);
            }

            try {
                // Get the object from the directory bucket.
```

```
                s3DirectoriesActions.getObjectAsync(mS3ExpressClient,
mdirectoryBucketName, bucketObject).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof NoSuchKeyException) {
                    logger.error("S3Exception occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
                return;
            }
        }
        long directoryTimeDifference = System.nanoTime() - directoryTimeStart;

        // Download from the regular bucket.
        logger.info("Downloading from the regular bucket.");
        long normalTimeStart = System.nanoTime();
        for (int index = 0; index < downloads; index++) {
            if (index % 50 == 0) {
                logger.info("Download " + index + " of " + downloads);
            }

            try {
                s3DirectoriesActions.getObjectAsync(mS3RegularClient,
mregularBucketName, bucketObject).join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof NoSuchKeyException) {
                    logger.error("S3Exception occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
                return;
            }
        }

        long normalTimeDifference = System.nanoTime() - normalTimeStart;
        logger.info("The directory bucket took " + directoryTimeDifference
+ " nanoseconds, while the regular bucket took " + normalTimeDifference + "
nanoseconds.");
```

```
        long difference = normalTimeDifference - directoryTimeDifference;
        logger.info("That's a difference of " + difference + " nanoseconds, or");
        logger.info(difference / 1_000_000_000.0 + " seconds.");

        if (difference < 0) {
            logger.info("The directory buckets were slower. This can happen if you
are not running on the cloud within a VPC.");
        }
        waitForInputToContinue(scanner);
    }

    private static String createSessionAddObjects() {
        logger.info(DASHES);
        logger.info("""
            5. Create an object and copy it.
            We'll create an object consisting of some text and upload it to the
            regular bucket.
            """);
        waitForInputToContinue(scanner);

        String bucketObject = "basic-text-object.txt";
        try {
            s3DirectoriesActions.putObjectAsync(mS3RegularClient,
mregularBucketName, bucketObject, "Look Ma, I'm a bucket!").join();
            s3DirectoriesActions.createSessionAsync(mS3ExpressClient,
mdirectoryBucketName).join();

            // Copy the object to the destination S3 bucket.
            s3DirectoriesActions.copyObjectAsync(mS3ExpressClient,
mregularBucketName, bucketObject, mdirectoryBucketName, bucketObject).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof S3Exception) {
                logger.error("S3Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
        }
        logger.info("""
            It worked! This is because the S3Client that performed the copy
operation
            is the expressClient using the credentials for the user with permission
to
```

```
            work with directory buckets.

            It's important to remember the user permissions when interacting with
            directory buckets. Instead of validating permissions on every call as
            regular buckets do, directory buckets utilize the user credentials and
session
            token to validate. This allows for much faster connection speeds on
every call.
            For single calls, this is low, but for many concurrent calls
            this adds up to a lot of time saved.
            """);
        waitForInputToContinue(scanner);
        return bucketObject;
    }

    /**
     * Creates VPC users for the S3 Express One Zone scenario.
     * <p>
     * This method performs the following steps:
     * <ol>
     *     <li>Optionally creates a new VPC and VPC Endpoint if the application
is running in an EC2 instance in the same Availability Zone as the directory
buckets.</li>
     *     <li>Creates two IAM users: one with S3 Express One Zone permissions and
one without.</li>
     * </ol>
     *
     * @return a {@link UserNames} object containing the names of the created IAM
users
     */
    public static UserNames createVpcUsers() {
        /*
        Optionally create a VPC.
        Create two IAM users, one with S3 Express One Zone permissions and one
without.
        */
        logger.info(DASHES);
        logger.info("""
            1. First, we'll set up a new VPC and VPC Endpoint if this program is
running in an EC2 instance in the same AZ as your\s
            directory buckets will be. Are you running this in an EC2 instance
located in the same AZ as your intended directory buckets?
            """);
```

```
        logger.info("Do you want to setup a VPC Endpoint? (y/n)");
        String endpointAns = scanner.nextLine().trim();
        if (endpointAns.equalsIgnoreCase("y")) {
            logger.info("""
                Great! Let's set up a VPC, retrieve the Route Table from it, and
create a VPC Endpoint to connect the S3 Client to.
                """);
            try {
                s3DirectoriesActions.setupVPCAsync().join();
            } catch (CompletionException ce) {
                Throwable cause = ce.getCause();
                if (cause instanceof Ec2Exception) {
                    logger.error("IamException occurred: {}", cause.getMessage(),
ce);
                } else {
                    logger.error("An unexpected error occurred: {}",
cause.getMessage(), ce);
                }
            }
            waitForInputToContinue(scanner);
        } else {
            logger.info("Skipping the VPC setup. Don't forget to use this in
production!");
        }
        logger.info(DASHES);
        logger.info("""
            2. Create a RegularUser and ExpressUser by using the AWS CDK.
            One IAM User, named RegularUser, will have permissions to work only
            with regular buckets and one IAM user, named ExpressUser, will have
            permissions to work only with directory buckets.
            """);
        waitForInputToContinue(scanner);

        // Create two users required for this scenario.
        Map<String, String> stackOutputs = createUsersUsingCDK(stackName);
        regularUser = stackOutputs.get("RegularUser");
        expressUser = stackOutputs.get("ExpressUser");

        UserNames names = new UserNames();
        names.setRegularUserName(regularUser);
        names.setExpressUserName(expressUser);
        return names;
    }
```

```
   /**
    * Creates users using AWS CloudFormation.
    *
    * @return a {@link Map} of String keys and String values representing the stack
outputs,
    * which may include user-related information such as user names and IDs.
    */
   public static Map<String, String> createUsersUsingCDK(String stackName) {
       logger.info("We'll use an AWS CloudFormation template to create the IAM
users and policies.");
       CloudFormationHelper.deployCloudFormationStack(stackName);
       return CloudFormationHelper.getStackOutputsAsync(stackName).join();
   }

   /**
    * Sets up the necessary clients and buckets for the S3 Express service.
    *
    * @param expressUserName the username for the user with S3 Express permissions
    * @param regularUserName the username for the user with regular S3 permissions
    */
   public static void setupClientsAndBuckets(String expressUserName, String
regularUserName) {
       Scanner locscanner = new Scanner(System.in);
       String accessKeyIdforRegUser;
       String secretAccessforRegUser;
       try {
           CreateAccessKeyResponse keyResponse =
s3DirectoriesActions.createAccessKeyAsync(regularUserName).join();
           accessKeyIdforRegUser = keyResponse.accessKey().accessKeyId();
           secretAccessforRegUser = keyResponse.accessKey().secretAccessKey();
       } catch (CompletionException ce) {
           Throwable cause = ce.getCause();
           if (cause instanceof IamException) {
               logger.error("IamException occurred: {}", cause.getMessage(), ce);
           } else {
               logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
           }
           return;
       }

       String accessKeyIdforExpressUser;
       String secretAccessforExpressUser;
       try {
```

```
            CreateAccessKeyResponse keyResponseExpress =
s3DirectoriesActions.createAccessKeyAsync(expressUserName).join();
            accessKeyIdforExpressUser =
keyResponseExpress.accessKey().accessKeyId();
            secretAccessforExpressUser =
keyResponseExpress.accessKey().secretAccessKey();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IamException) {
                logger.error("IamException occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        logger.info(DASHES);
        logger.info("""
            3. Create two S3Clients; one uses the ExpressUser's credentials and one
uses the RegularUser's credentials.
            The 2 S3Clients will use different credentials.
            """);
        waitForInputToContinue(locscanner);
        try {
            mS3RegularClient =
createS3ClientWithAccessKeyAsync(accessKeyIdforRegUser,
secretAccessforRegUser).join();
            mS3ExpressClient =
createS3ClientWithAccessKeyAsync(accessKeyIdforExpressUser,
secretAccessforExpressUser).join();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof IllegalArgumentException) {
                logger.error("An invalid argument exception occurred: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }

        logger.info("""
```

```
            We can now use the ExpressUser client to make calls to S3 Express
operations.
            """);
        waitForInputToContinue(locscanner);
        logger.info(DASHES);
        logger.info("""
            4. Create two buckets.
            Now we will create a directory bucket which is the linchpin of the S3
Express One Zone service. Directory buckets
            behave differently from regular S3 buckets which we will explore here.
We'll also create a regular bucket, put
            an object into the regular bucket, and copy it to the directory bucket.
            """);

        logger.info("""
            Now, let's choose an availability zone (AZ) for the directory bucket.
            We'll choose one that is supported.
            """);
        String zoneId;
        String regularBucketName;
        try {
            zoneId = s3DirectoriesActions.selectAvailabilityZoneIdAsync().join();
            regularBucketName = "reg-bucket-" + System.currentTimeMillis();
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof Ec2Exception) {
                logger.error("EC2Exception occurred: {}", cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
            }
            return;
        }
        logger.info("""
            Now, let's create the actual directory bucket, as well as a regular
bucket."
             """);

        String directoryBucketName = "test-bucket-" + System.currentTimeMillis() +
"--" + zoneId + "--x-s3";
        try {
            s3DirectoriesActions.createDirectoryBucketAsync(mS3ExpressClient,
directoryBucketName, zoneId).join();
            logger.info("Created directory bucket {}", directoryBucketName);
```

```
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof BucketAlreadyExistsException) {
                logger.error("The bucket already exists. Moving on: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
                return;
            }
        }

        // Assign to the data member.
        mdirectoryBucketName = directoryBucketName;
        try {
            s3DirectoriesActions.createBucketAsync(mS3RegularClient,
regularBucketName).join();
            logger.info("Created regular bucket {} ", regularBucketName);
            mregularBucketName = regularBucketName;
        } catch (CompletionException ce) {
            Throwable cause = ce.getCause();
            if (cause instanceof BucketAlreadyExistsException) {
                logger.error("The bucket already exists. Moving on: {}",
cause.getMessage(), ce);
            } else {
                logger.error("An unexpected error occurred: {}", cause.getMessage(),
ce);
                return;
            }
        }
        logger.info("Great! Both buckets were created.");
        waitForInputToContinue(locscanner);
    }

    /**
     * Creates an asynchronous S3 client with the specified access key and secret
access key.
     *
     * @param accessKeyId     the AWS access key ID
     * @param secretAccessKey the AWS secret access key
     * @return a {@link CompletableFuture} that asynchronously creates the S3 client
     * @throws IllegalArgumentException if the access key ID or secret access key is
null
     */
```

```
    public static CompletableFuture<S3AsyncClient>
 createS3ClientWithAccessKeyAsync(String accessKeyId, String secretAccessKey) {
        return CompletableFuture.supplyAsync(() -> {
            // Validate input parameters
            if (accessKeyId == null || accessKeyId.isBlank() || secretAccessKey ==
 null || secretAccessKey.isBlank()) {
                throw new IllegalArgumentException("Access Key ID and Secret Access
 Key must not be null or empty");
            }

            AwsBasicCredentials awsCredentials =
 AwsBasicCredentials.create(accessKeyId, secretAccessKey);
            return S3AsyncClient.builder()

 .credentialsProvider(StaticCredentialsProvider.create(awsCredentials))
                .region(Region.US_WEST_2)
                .build();
        });
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            logger.info("");
            logger.info("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                logger.info("Continuing with the program...");
                logger.info("");
                break;
            } else {
                logger.info("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode Amazon S3 SDK.

```
public class S3DirectoriesActions {

    private static IamAsyncClient iamAsyncClient;
```

```
   private static Ec2AsyncClient ec2AsyncClient;
   private static final Logger logger =
LoggerFactory.getLogger(S3DirectoriesActions.class);

   private static IamAsyncClient getIAMAsyncClient() {
       if (iamAsyncClient == null) {
           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(100)
               .connectionTimeout(Duration.ofSeconds(60))
               .readTimeout(Duration.ofSeconds(60))
               .writeTimeout(Duration.ofSeconds(60))
               .build();

           ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))
               .apiCallAttemptTimeout(Duration.ofSeconds(90))
               .retryStrategy(RetryMode.STANDARD)
               .build();

           iamAsyncClient = IamAsyncClient.builder()
               .httpClient(httpClient)
               .overrideConfiguration(overrideConfig)
               .build();
       }
       return iamAsyncClient;
   }

   private static Ec2AsyncClient getEc2AsyncClient() {
       if (ec2AsyncClient == null) {
           SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
               .maxConcurrency(100)
               .connectionTimeout(Duration.ofSeconds(60))
               .readTimeout(Duration.ofSeconds(60))
               .writeTimeout(Duration.ofSeconds(60))
               .build();

           ClientOverrideConfiguration overrideConfig =
ClientOverrideConfiguration.builder()
               .apiCallTimeout(Duration.ofMinutes(2))
               .apiCallAttemptTimeout(Duration.ofSeconds(90))
               .retryStrategy(RetryMode.STANDARD)
               .build();
```

```
            ec2AsyncClient = Ec2AsyncClient.builder()
                .httpClient(httpClient)
                .region(Region.US_WEST_2)
                .overrideConfiguration(overrideConfig)
                .build();
        }
        return ec2AsyncClient;
    }

    /**
     * Deletes the specified S3 bucket and all the objects within it asynchronously.
     *
     * @param s3AsyncClient the S3 asynchronous client to use for the operations
     * @param bucketName the name of the S3 bucket to be deleted
     * @return a {@link CompletableFuture} that completes with a {@link
WaiterResponse} containing the
     *         {@link HeadBucketResponse} when the bucket has been successfully
deleted
     * @throws CompletionException if there was an error deleting the bucket or its
objects
     */
    public CompletableFuture<WaiterResponse<HeadBucketResponse>>
deleteBucketAndObjectsAsync(S3AsyncClient s3AsyncClient, String bucketName) {
        ListObjectsV2Request listRequest = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .build();

        return s3AsyncClient.listObjectsV2(listRequest)
            .thenCompose(listResponse -> {
                if (!listResponse.contents().isEmpty()) {
                    List<ObjectIdentifier> objectIdentifiers =
listResponse.contents().stream()
                        .map(s3Object ->
ObjectIdentifier.builder().key(s3Object.key()).build())
                        .collect(Collectors.toList());

                    DeleteObjectsRequest deleteRequest =
DeleteObjectsRequest.builder()
                        .bucket(bucketName)
                        .delete(Delete.builder().objects(objectIdentifiers).build())
                        .build();

                    return s3AsyncClient.deleteObjects(deleteRequest)
```

```
                        .thenAccept(deleteResponse -> {
                            if (!deleteResponse.errors().isEmpty()) {
                                deleteResponse.errors().forEach(error ->
                                    logger.error("Couldn't delete object " +
error.key() + ". Reason: " + error.message()));
                            }
                        });
                }
                return CompletableFuture.completedFuture(null);
            })
            .thenCompose(ignored -> {
                DeleteBucketRequest deleteBucketRequest =
DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
                return s3AsyncClient.deleteBucket(deleteBucketRequest);
            })
            .thenCompose(ignored -> {
                S3AsyncWaiter waiter = s3AsyncClient.waiter();
                HeadBucketRequest headBucketRequest =
HeadBucketRequest.builder().bucket(bucketName).build();
                return waiter.waitUntilBucketNotExists(headBucketRequest);
            })
            .whenComplete((ignored, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof S3Exception) {
                        throw new CompletionException("Error deleting bucket: " +
bucketName, cause);
                    }
                    throw new CompletionException("Failed to delete bucket and
objects: " + bucketName, exception);
                }
                logger.info("Bucket deleted successfully: " + bucketName);
            });
    }

    /**
     *  Lists the objects in an S3 bucket asynchronously.
     *
     * @param s3Client the S3 async client to use for the operation
     * @param bucketName the name of the S3 bucket containing the objects to list
     * @return a {@link CompletableFuture} that contains the list of object keys in
the specified bucket
```

```
     */
    public CompletableFuture<List<String>> listObjectsAsync(S3AsyncClient s3Client,
String bucketName) {
        ListObjectsV2Request request = ListObjectsV2Request.builder()
            .bucket(bucketName)
            .build();

        return s3Client.listObjectsV2(request)
            .thenApply(response -> response.contents().stream()
                .map(S3Object::key)
                .toList())
            .whenComplete((result, exception) -> {
                if (exception != null) {
                    throw new CompletionException("Couldn't list objects in bucket:
" + bucketName, exception);
                }
            });
    }

    /**
     * Retrieves an object from an Amazon S3 bucket asynchronously.
     *
     * @param s3Client   the S3 async client to use for the operation
     * @param bucketName the name of the S3 bucket containing the object
     * @param keyName    the unique identifier (key) of the object to retrieve
     * @return a {@link CompletableFuture} that, when completed, contains the
object's content as a {@link ResponseBytes} of {@link GetObjectResponse}
     */
    public CompletableFuture<ResponseBytes<GetObjectResponse>>
getObjectAsync(S3AsyncClient s3Client, String bucketName, String keyName) {
        GetObjectRequest objectRequest = GetObjectRequest.builder()
            .key(keyName)
            .bucket(bucketName)
            .build();

        // Get the object asynchronously and transform it into a byte array
        return s3Client.getObject(objectRequest, AsyncResponseTransformer.toBytes())
            .exceptionally(exception -> {
                Throwable cause = exception.getCause();
                if (cause instanceof NoSuchKeyException) {
                    throw new CompletionException("Failed to get the object. Reason:
" + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                }
```

```
                throw new CompletionException("Failed to get the object",
exception);
            });
    }

    /**
     * Asynchronously copies an object from one S3 bucket to another.
     *
     * @param s3Client           the S3 async client to use for the copy operation
     * @param sourceBucket       the name of the source bucket
     * @param sourceKey          the key of the object to be copied in the source
bucket
     * @param destinationBucket  the name of the destination bucket
     * @param destinationKey     the key of the copied object in the destination
bucket
     * @return a {@link CompletableFuture} that completes when the copy operation is
finished
     */
    public CompletableFuture<Void> copyObjectAsync(S3AsyncClient s3Client, String
sourceBucket, String sourceKey, String destinationBucket, String destinationKey) {
        CopyObjectRequest copyRequest = CopyObjectRequest.builder()
            .sourceBucket(sourceBucket)
            .sourceKey(sourceKey)
            .destinationBucket(destinationBucket)
            .destinationKey(destinationKey)
            .build();

        return s3Client.copyObject(copyRequest)
            .thenRun(() -> logger.info("Copied object '" + sourceKey + "' from
bucket '" + sourceBucket + "' to bucket '" + destinationBucket + "'"))
            .whenComplete((ignored, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof S3Exception) {
                        throw new CompletionException("Couldn't copy object '" +
sourceKey + "' from bucket '" + sourceBucket + "' to bucket '" + destinationBucket
+ "'. Reason: " + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                    }
                    throw new CompletionException("Failed to copy object",
exception);
                }
            });
    }
```

```
   /**
    * Asynchronously creates a session for the specified S3 bucket.
    *
    * @param s3Client   the S3 asynchronous client to use for creating the session
    * @param bucketName the name of the S3 bucket for which to create the session
    * @return a {@link CompletableFuture} that completes when the session is
created, or throws a {@link CompletionException} if an error occurs
    */
   public CompletableFuture<CreateSessionResponse> createSessionAsync(S3AsyncClient
s3Client, String bucketName) {
       CreateSessionRequest request = CreateSessionRequest.builder()
           .bucket(bucketName)
           .build();

       return s3Client.createSession(request)
           .whenComplete((response, exception) -> {
               if (exception != null) {
                   Throwable cause = exception.getCause();
                   if (cause instanceof S3Exception) {
                       throw new CompletionException("Couldn't create the session.
Reason: " + ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                   }
                   throw new CompletionException("Unexpected error occurred while
creating session", exception);
               }
               logger.info("Created session for bucket: " + bucketName);
           });

   }

   /**
    * Creates a new S3 directory bucket in a specified Zone (For example, a
    * specified Availability Zone in this code example).
    *
    * @param s3Client   The asynchronous S3 client used to create the bucket
    * @param bucketName The name of the bucket to be created
    * @param zone       The Availability Zone where the bucket will be created
    * @throws CompletionException if there's an error creating the bucket
    */
   public CompletableFuture<CreateBucketResponse>
createDirectoryBucketAsync(S3AsyncClient s3Client, String bucketName, String zone)
{
       logger.info("Creating bucket: " + bucketName);
```

```
        CreateBucketConfiguration bucketConfiguration =
CreateBucketConfiguration.builder()
            .location(LocationInfo.builder()
                .type(LocationType.AVAILABILITY_ZONE)
                .name(zone)
                .build())
            .bucket(BucketInfo.builder()
                .type(BucketType.DIRECTORY)
                .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                .build())
            .build();

        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .createBucketConfiguration(bucketConfiguration)
            .build();

        return s3Client.createBucket(bucketRequest)
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof BucketAlreadyExistsException) {
                        throw new CompletionException("The bucket already exists: "
+ ((S3Exception) cause).awsErrorDetails().errorMessage(), cause);
                    }
                    throw new CompletionException("Unexpected error occurred while
creating bucket", exception);
                }
                logger.info("Bucket created successfully with location: " +
response.location());
            });
    }

    /**
     * Creates an S3 bucket asynchronously.
     *
     * @param s3Client    the S3 async client to use for the bucket creation
     * @param bucketName  the name of the S3 bucket to create
     * @return a {@link CompletableFuture} that completes with the {@link
WaiterResponse} containing the {@link HeadBucketResponse}
     *         when the bucket is successfully created
     * @throws CompletionException if there's an error creating the bucket
     */
```

```
    public CompletableFuture<WaiterResponse<HeadBucketResponse>>
createBucketAsync(S3AsyncClient s3Client, String bucketName) {
        CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
            .bucket(bucketName)
            .build();

        return s3Client.createBucket(bucketRequest)
            .thenCompose(response -> {
                S3AsyncWaiter s3Waiter = s3Client.waiter();
                HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
                return s3Waiter.waitUntilBucketExists(bucketRequestWait);
            })
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof BucketAlreadyExistsException) {
                        throw new CompletionException("The S3 bucket exists: " +
cause.getMessage(), cause);
                    } else {
                        throw new CompletionException("Failed to create access key:
" + exception.getMessage(), exception);
                    }
                }
                logger.info(bucketName + " is ready");
            });
    }

    /**
     * Uploads an object to an Amazon S3 bucket asynchronously.
     *
     * @param s3Client     the S3 async client to use for the upload
     * @param bucketName   the destination S3 bucket name
     * @param bucketObject the name of the object to be uploaded
     * @param text         the content to be uploaded as the object
     */
    public CompletableFuture<PutObjectResponse> putObjectAsync(S3AsyncClient
s3Client, String bucketName, String bucketObject, String text) {
        PutObjectRequest objectRequest = PutObjectRequest.builder()
            .bucket(bucketName)
            .key(bucketObject)
            .build();
```

```
        return s3Client.putObject(objectRequest, AsyncRequestBody.fromString(text))
            .whenComplete((response, exception) -> {
                if (exception != null) {
                    Throwable cause = exception.getCause();
                    if (cause instanceof NoSuchBucketException) {
                        throw new CompletionException("The S3 bucket does not exist:
" + cause.getMessage(), cause);
                    } else {
                        throw new CompletionException("Failed to create access key:
" + exception.getMessage(), exception);
                    }
                }
            });
    }

    /**
     * Creates an AWS IAM access key asynchronously for the specified user name.
     *
     * @param userName the name of the IAM user for whom to create the access key
     * @return a {@link CompletableFuture} that completes with the {@link
CreateAccessKeyResponse} containing the created access key
     */
    public CompletableFuture<CreateAccessKeyResponse> createAccessKeyAsync(String
userName) {
        CreateAccessKeyRequest request = CreateAccessKeyRequest.builder()
            .userName(userName)
            .build();

        return getIAMAsyncClient().createAccessKey(request)
            .whenComplete((response, exception) -> {
                if (response != null) {
                    logger.info("Access Key Created.");
                } else {
                    if (exception == null) {
                        Throwable cause = exception.getCause();
                        if (cause instanceof IamException) {
                            throw new CompletionException("IAM error while creating
access key: " + cause.getMessage(), cause);
                        } else {
                            throw new CompletionException("Failed to create access
key: " + exception.getMessage(), exception);
                        }
                    }
                }
```

```
            });
    }

    /**
     * Asynchronously selects an Availability Zone ID from the available EC2 zones.
     *
     * @return A {@link CompletableFuture} that resolves to the selected
 Availability Zone ID.
     * @throws CompletionException if an error occurs during the request or
 processing.
     */
    public CompletableFuture<String> selectAvailabilityZoneIdAsync() {
        DescribeAvailabilityZonesRequest zonesRequest =
 DescribeAvailabilityZonesRequest.builder()
            .build();

        return getEc2AsyncClient().describeAvailabilityZones(zonesRequest)
            .thenCompose(response -> {
                List<AvailabilityZone> zonesList = response.availabilityZones();
                if (zonesList.isEmpty()) {
                    logger.info("No availability zones found.");
                    return CompletableFuture.completedFuture(null); // Return null
 if no zones are found
                }

                List<String> zoneIds = zonesList.stream()
                    .map(AvailabilityZone::zoneId) // Get the zoneId (e.g., "usw2-
az1")
                    .toList();

                return CompletableFuture.supplyAsync(() ->
 promptUserForZoneSelection(zonesList, zoneIds))
                    .thenApply(selectedZone -> {
                        // Return only the selected Zone ID (e.g., "usw2-az1").
                        return selectedZone.zoneId();
                    });
            })
            .whenComplete((result, exception) -> {
                if (exception == null) {
                    if (result != null) {
                        logger.info("Selected Availability Zone ID: " + result);
                    } else {
                        logger.info("No availability zone selected.");
                    }
```

```
                } else {
                    Throwable cause = exception.getCause();
                    if (cause instanceof Ec2Exception) {
                        throw new CompletionException("EC2 error while selecting
availability zone: " + cause.getMessage(), cause);
                    }
                    throw new CompletionException("Failed to select availability
zone: " + exception.getMessage(), exception);
                }
            });
    }

    /**
     * Prompts the user to select an Availability Zone from the given list.
     *
     * @param zonesList the list of Availability Zones
     * @param zoneIds the list of zone IDs
     * @return the selected Availability Zone
     */
    private static AvailabilityZone
promptUserForZoneSelection(List<AvailabilityZone> zonesList, List<String> zoneIds)
{
        Scanner scanner = new Scanner(System.in);
        int index = -1;

        while (index < 0 || index >= zoneIds.size()) {
            logger.info("Select an availability zone:");
            IntStream.range(0, zoneIds.size()).forEach(i ->
                logger.info(i + ": " + zoneIds.get(i))
            );

            logger.info("Enter the number corresponding to your choice: ");
            if (scanner.hasNextInt()) {
                index = scanner.nextInt();
            } else {
                scanner.next();
            }
        }

        AvailabilityZone selectedZone = zonesList.get(index);
        logger.info("You selected: " + selectedZone.zoneId());
        return selectedZone;
    }
```

```
   /**
    * Asynchronously sets up a new VPC, including creating the VPC, finding the
associated route table, and
    * creating a VPC endpoint for the S3 service.
    *
    * @return a {@link CompletableFuture} that, when completed, contains a
AbstractMap with the
    *         VPC ID and VPC endpoint ID.
    */
   public CompletableFuture<AbstractMap.SimpleEntry<String, String>>
setupVPCAsync() {
       String cidr = "10.0.0.0/16";
       CreateVpcRequest vpcRequest = CreateVpcRequest.builder()
           .cidrBlock(cidr)
           .build();

       return getEc2AsyncClient().createVpc(vpcRequest)
           .thenCompose(vpcResponse -> {
               String vpcId = vpcResponse.vpc().vpcId();
               logger.info("VPC Created: {}", vpcId);

               Ec2AsyncWaiter waiter = getEc2AsyncClient().waiter();
               DescribeVpcsRequest request = DescribeVpcsRequest.builder()
                   .vpcIds(vpcId)
                   .build();

               return waiter.waitUntilVpcAvailable(request)
                   .thenApply(waiterResponse -> vpcId);
           })
           .thenCompose(vpcId -> {
               Filter filter = Filter.builder()
                   .name("vpc-id")
                   .values(vpcId)
                   .build();

               DescribeRouteTablesRequest describeRouteTablesRequest =
DescribeRouteTablesRequest.builder()
                   .filters(filter)
                   .build();

               return
getEc2AsyncClient().describeRouteTables(describeRouteTablesRequest)
                   .thenApply(routeTablesResponse -> {
                       if (routeTablesResponse.routeTables().isEmpty()) {
```

```
                            throw new CompletionException("No route tables found for
VPC: " + vpcId, null);
                        }
                        String routeTableId =
routeTablesResponse.routeTables().get(0).routeTableId();
                        logger.info("Route table found: {}", routeTableId);
                        return new AbstractMap.SimpleEntry<>(vpcId, routeTableId);
                    });
            })
            .thenCompose(vpcAndRouteTable -> {
                String vpcId = vpcAndRouteTable.getKey();
                String routeTableId = vpcAndRouteTable.getValue();
                Region region =
getEc2AsyncClient().serviceClientConfiguration().region();
                String serviceName = String.format("com.amazonaws.%s.s3express",
region.id());

                CreateVpcEndpointRequest endpointRequest =
CreateVpcEndpointRequest.builder()
                    .vpcId(vpcId)
                    .routeTableIds(routeTableId)
                    .serviceName(serviceName)
                    .build();

                return getEc2AsyncClient().createVpcEndpoint(endpointRequest)
                    .thenApply(vpcEndpointResponse -> {
                        String vpcEndpointId =
vpcEndpointResponse.vpcEndpoint().vpcEndpointId();
                        logger.info("VPC Endpoint created: {}", vpcEndpointId);
                        return new AbstractMap.SimpleEntry<>(vpcId, vpcEndpointId);
                    });
            })
            .exceptionally(exception -> {
                Throwable cause = exception.getCause() != null ?
exception.getCause() : exception;
                if (cause instanceof Ec2Exception) {
                    logger.error("EC2 error during VPC setup: {}",
cause.getMessage(), cause);
                    throw new CompletionException("EC2 error during VPC setup: " +
cause.getMessage(), cause);
                }

                logger.error("VPC setup failed: {}", cause.getMessage(), cause);
```

```
                throw new CompletionException("VPC setup failed: " +
 cause.getMessage(), cause);
            });
    }

}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObject
  - GetObject
  - ListObjects
  - PutObject

## Tindakan

### `AbortMultipartUpload`

Contoh kode berikut menunjukkan cara menggunakan`AbortMultipartUpload`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Batalkan unggahan multibagian dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.AbortMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;


    /**
     * Aborts a specific multipart upload for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @param uploadId   The upload ID of the multipart upload to abort
     * @return True if the multipart upload is successfully aborted, false otherwise
     */
    public static boolean abortDirectoryBucketMultipartUpload(S3Client s3Client,
 String bucketName,
            String objectKey, String uploadId) {
        logger.info("Aborting multipart upload: {} for bucket: {}", uploadId,
 bucketName);
        try {
            // Abort the multipart upload
            AbortMultipartUploadRequest abortMultipartUploadRequest =
 AbortMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .uploadId(uploadId)
                    .build();

            s3Client.abortMultipartUpload(abortMultipartUploadRequest);
            logger.info("Aborted multipart upload: {} for object: {}", uploadId,
 objectKey);
            return true;
        } catch (S3Exception e) {
            logger.error("Failed to abort multipart upload: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Untuk detail API, lihat AbortMultipartUploaddi Referensi AWS SDK for Java 2.x API.

### `CompleteMultipartUpload`

Contoh kode berikut menunjukkan cara menggunakan`CompleteMultipartUpload`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Selesaikan unggahan multibagian dalam ember direktori.

```
import com.example.s3.util.S3DirectoryBucketUtils;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CompleteMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.CompletedMultipartUpload;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;
```

```
   /**
    * This method completes the multipart upload request by collating all the
    * upload parts.
    *
    * @param s3Client    The S3 client used to interact with S3
    * @param bucketName  The name of the directory bucket
    * @param objectKey   The key (name) of the object to be uploaded
    * @param uploadId    The upload ID used to track the multipart upload
    * @param uploadParts The list of completed parts
    * @return True if the multipart upload is successfully completed, false
    *         otherwise
    */
   public static boolean completeDirectoryBucketMultipartUpload(S3Client s3Client,
String bucketName, String objectKey,
           String uploadId, List<CompletedPart> uploadParts) {
       try {
           CompletedMultipartUpload completedMultipartUpload =
CompletedMultipartUpload.builder()
                   .parts(uploadParts)
                   .build();
           CompleteMultipartUploadRequest completeMultipartUploadRequest =
CompleteMultipartUploadRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .uploadId(uploadId)
                   .multipartUpload(completedMultipartUpload)
                   .build();

           CompleteMultipartUploadResponse response =
s3Client.completeMultipartUpload(completeMultipartUploadRequest);
           logger.info("Multipart upload completed. ETag: {}", response.eTag());
           return true;
       } catch (S3Exception e) {
           logger.error("Failed to complete multipart upload: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           return false;
       }
   }
```

- Untuk detail API, lihat CompleteMultipartUploaddi Referensi AWS SDK for Java 2.x API.

### `CopyObject`

Contoh kode berikut menunjukkan cara menggunakan`CopyObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Salin objek dari bucket direktori ke bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CopyObjectRequest;
import software.amazon.awssdk.services.s3.model.CopyObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Copies an object from one S3 general purpose bucket to one S3 directory
     * bucket.
     *
     * @param s3Client     The S3 client used to interact with S3
     * @param sourceBucket The name of the source bucket
     * @param objectKey    The key (name) of the object to be copied
     * @param targetBucket The name of the target bucket
     */
```

```
   public static void copyDirectoryBucketObject(S3Client s3Client, String
sourceBucket, String objectKey,
           String targetBucket) {
       logger.info("Copying object: {} from bucket: {} to bucket: {}", objectKey,
sourceBucket, targetBucket);

       try {
           // Create a CopyObjectRequest
           CopyObjectRequest copyReq = CopyObjectRequest.builder()
                   .sourceBucket(sourceBucket)
                   .sourceKey(objectKey)
                   .destinationBucket(targetBucket)
                   .destinationKey(objectKey)
                   .build();

           // Copy the object
           CopyObjectResponse copyRes = s3Client.copyObject(copyReq);
           logger.info("Successfully copied {} from bucket {} into bucket {}.
CopyObjectResponse: {}",
                   objectKey, sourceBucket, targetBucket,
copyRes.copyObjectResult().toString());

       } catch (S3Exception e) {
           logger.error("Failed to copy object: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode(), e);
           throw e;
       }
   }
```

- Untuk detail API, lihat CopyObjectdi Referensi AWS SDK for Java 2.x API.

### `CreateBucket`

Contoh kode berikut menunjukkan cara menggunakan`CreateBucket`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat bucket direktori S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketInfo;
import software.amazon.awssdk.services.s3.model.BucketType;
import software.amazon.awssdk.services.s3.model.CreateBucketConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
import software.amazon.awssdk.services.s3.model.CreateBucketResponse;
import software.amazon.awssdk.services.s3.model.DataRedundancy;
import software.amazon.awssdk.services.s3.model.LocationInfo;
import software.amazon.awssdk.services.s3.model.LocationType;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Creates a new S3 directory bucket in a specified Zone (For example, a
     * specified Availability Zone in this code example).
     *
     * @param s3Client   The S3 client used to create the bucket
     * @param bucketName The name of the bucket to be created
     * @param zone       The region where the bucket will be created
     * @throws S3Exception if there's an error creating the bucket
     */
    public static void createDirectoryBucket(S3Client s3Client, String bucketName,
 String zone) throws S3Exception {
        logger.info("Creating bucket: {}", bucketName);

        CreateBucketConfiguration bucketConfiguration =
 CreateBucketConfiguration.builder()
```

```
                .location(LocationInfo.builder()
                        .type(LocationType.AVAILABILITY_ZONE)
                        .name(zone).build())
                .bucket(BucketInfo.builder()
                        .type(BucketType.DIRECTORY)
                        .dataRedundancy(DataRedundancy.SINGLE_AVAILABILITY_ZONE)
                        .build())
                .build();
        try {
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .createBucketConfiguration(bucketConfiguration).build();
            CreateBucketResponse response = s3Client.createBucket(bucketRequest);
            logger.info("Bucket created successfully with location: {}",
response.location());
        } catch (S3Exception e) {
            logger.error("Error creating bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat CreateBucketdi Referensi AWS SDK for Java 2.x API.

### `CreateMultipartUpload`

Contoh kode berikut menunjukkan cara menggunakan`CreateMultipartUpload`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat unggahan multibagian dalam ember direktori.

```
import com.example.s3.util.S3DirectoryBucketUtils;
import org.slf4j.Logger;
```

```
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadRequest;
import software.amazon.awssdk.services.s3.model.CreateMultipartUploadResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * This method creates a multipart upload request that generates a unique upload
     * ID used to track
     * all the upload parts.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @return The upload ID used to track the multipart upload
     */
    public static String createDirectoryBucketMultipartUpload(S3Client s3Client,
 String bucketName, String objectKey) {
        logger.info("Creating multipart upload for object: {} in bucket: {}",
 objectKey, bucketName);

        try {
            // Create a CreateMultipartUploadRequest
            CreateMultipartUploadRequest createMultipartUploadRequest =
 CreateMultipartUploadRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Initiate the multipart upload
            CreateMultipartUploadResponse response =
 s3Client.createMultipartUpload(createMultipartUploadRequest);
            String uploadId = response.uploadId();
            logger.info("Multipart upload initiated. Upload ID: {}", uploadId);
            return uploadId;

        } catch (S3Exception e) {
            logger.error("Failed to create multipart upload: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
```

```
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat CreateMultipartUploaddi Referensi AWS SDK for Java 2.x API.

### `DeleteBucket`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucket`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus bucket direktori S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;

    /**
     * Deletes the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket to delete
     */
    public static void deleteDirectoryBucket(S3Client s3Client, String bucketName) {
        logger.info("Deleting bucket: {}", bucketName);
```

```
        try {
            // Create a DeleteBucketRequest
            DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Delete the bucket
            s3Client.deleteBucket(deleteBucketRequest);
            logger.info("Successfully deleted bucket: {}", bucketName);

        } catch (S3Exception e) {
            logger.error("Failed to delete bucket: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteBucketdi Referensi AWS SDK for Java 2.x API.

### `DeleteBucketEncryption`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucketEncryption`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus konfigurasi enkripsi untuk bucket direktori.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Deletes the encryption configuration from an S3 bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     */
    public static void deleteDirectoryBucketEncryption(S3Client s3Client, String
 bucketName) {
        DeleteBucketEncryptionRequest deleteRequest =
 DeleteBucketEncryptionRequest.builder()
                .bucket(bucketName)
                .build();

        try {
            s3Client.deleteBucketEncryption(deleteRequest);
            logger.info("Bucket encryption deleted for bucket: {}", bucketName);
        } catch (S3Exception e) {
            logger.error("Failed to delete bucket encryption: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteBucketEncryptiondi Referensi AWS SDK for Java 2.x API.

### `DeleteBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`DeleteBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menghapus kebijakan bucket untuk bucket direktori.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketPolicy;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;


    /**
     * Deletes the bucket policy for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     */
    public static void deleteDirectoryBucketPolicy(S3Client s3Client, String
 bucketName) {
        logger.info("Deleting policy for bucket: {}", bucketName);

        try {
            // Create a DeleteBucketPolicyRequest
            DeleteBucketPolicyRequest deletePolicyReq =
 DeleteBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Delete the bucket policy
            s3Client.deleteBucketPolicy(deletePolicyReq);
            logger.info("Successfully deleted bucket policy");

        } catch (S3Exception e) {
            logger.error("Failed to delete bucket policy: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
```

```
        }
    }
```

- Untuk detail API, lihat DeleteBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `DeleteObject`

Contoh kode berikut menunjukkan cara menggunakan`DeleteObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus objek dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;




    /**
     * Deletes an object from the specified S3 directory bucket.
```

```
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be deleted
     */
    public static void deleteDirectoryBucketObject(S3Client s3Client, String
bucketName, String objectKey) {
        logger.info("Deleting object: {} from bucket: {}", objectKey, bucketName);

        try {
            // Create a DeleteObjectRequest
            DeleteObjectRequest deleteObjectRequest = DeleteObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Delete the object
            s3Client.deleteObject(deleteObjectRequest);
            logger.info("Object {} has been deleted", objectKey);

        } catch (S3Exception e) {
            logger.error("Failed to delete object: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteObjectdi Referensi AWS SDK for Java 2.x API.

### `DeleteObjects`

Contoh kode berikut menunjukkan cara menggunakan`DeleteObjects`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hapus beberapa objek dalam ember direktori.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Delete;
import software.amazon.awssdk.services.s3.model.DeleteObjectsRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectsResponse;
import software.amazon.awssdk.services.s3.model.ObjectIdentifier;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.net.URISyntaxException;
import java.nio.file.Path;
import java.nio.file.Paths;
import java.util.List;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;


    /**
     * Deletes multiple objects from the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKeys The list of keys (names) of the objects to be deleted
     */
    public static void deleteDirectoryBucketObjects(S3Client s3Client, String
 bucketName, List<String> objectKeys) {
        logger.info("Deleting objects from bucket: {}", bucketName);

        try {
            // Create a list of ObjectIdentifier.
            List<ObjectIdentifier> identifiers = objectKeys.stream()
                    .map(key -> ObjectIdentifier.builder().key(key).build())
                    .toList();

            Delete delete = Delete.builder()
```

```
                    .objects(identifiers)
                    .build();

            DeleteObjectsRequest deleteObjectsRequest =
DeleteObjectsRequest.builder()
                    .bucket(bucketName)
                    .delete(delete)
                    .build();

            DeleteObjectsResponse deleteObjectsResponse =
s3Client.deleteObjects(deleteObjectsRequest);
            deleteObjectsResponse.deleted().forEach(deleted -> logger.info("Deleted
object: {}", deleted.key()));

        } catch (S3Exception e) {
            logger.error("Failed to delete objects: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat DeleteObjectsdi Referensi AWS SDK for Java 2.x API.

### `GetBucketEncryption`

Contoh kode berikut menunjukkan cara menggunakan`GetBucketEncryption`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan konfigurasi enkripsi bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
```

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.GetBucketEncryptionResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionRule;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Retrieves the encryption configuration for an S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return The type of server-side encryption applied to the bucket (e.g.,
     *         AES256, aws:kms)
     */
    public static String getDirectoryBucketEncryption(S3Client s3Client, String
 bucketName) {
        try {
            // Create a GetBucketEncryptionRequest
            GetBucketEncryptionRequest getRequest =
 GetBucketEncryptionRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Retrieve the bucket encryption configuration
            GetBucketEncryptionResponse response =
 s3Client.getBucketEncryption(getRequest);
            ServerSideEncryptionRule rule =
 response.serverSideEncryptionConfiguration().rules().get(0);

            String encryptionType =
 rule.applyServerSideEncryptionByDefault().sseAlgorithmAsString();
            logger.info("Bucket encryption algorithm: {}", encryptionType);
            logger.info("KMS Customer Managed Key ID: {}",
 rule.applyServerSideEncryptionByDefault().kmsMasterKeyID());
            logger.info("Bucket Key Enabled: {}", rule.bucketKeyEnabled());

            return encryptionType;
        } catch (S3Exception e) {
```

```
            logger.error("Failed to get bucket encryption: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat GetBucketEncryptiondi Referensi AWS SDK for Java 2.x API.

### `GetBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`GetBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan kebijakan bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.GetBucketPolicyResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketPolicy;

    /**
     * Retrieves the bucket policy for the specified S3 directory bucket.
```

```
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @return The bucket policy text
     */
    public static String getDirectoryBucketPolicy(S3Client s3Client, String
bucketName) {
        logger.info("Getting policy for bucket: {}", bucketName);

        try {
            // Create a GetBucketPolicyRequest
            GetBucketPolicyRequest policyReq = GetBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Retrieve the bucket policy
            GetBucketPolicyResponse response = s3Client.getBucketPolicy(policyReq);

            // Print and return the policy text
            String policyText = response.policy();
            logger.info("Bucket policy: {}", policyText);
            return policyText;

        } catch (S3Exception e) {
            logger.error("Failed to get bucket policy: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat GetBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `GetObject`

Contoh kode berikut menunjukkan cara menggunakan`GetObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan objek dari ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.ResponseBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.GetObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.charset.StandardCharsets;
import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves an object from the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be retrieved
     * @return The retrieved object as a ResponseInputStream
     */
    public static boolean getDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey) {
        logger.info("Retrieving object: {} from bucket: {}", objectKey, bucketName);
```

```
        try {
            // Create a GetObjectRequest
            GetObjectRequest objectRequest = GetObjectRequest.builder()
                    .key(objectKey)
                    .bucket(bucketName)
                    .build();

            // Retrieve the object as bytes
            ResponseBytes<GetObjectResponse> objectBytes =
s3Client.getObjectAsBytes(objectRequest);
            byte[] data = objectBytes.asByteArray();

            // Print object contents to console
            String objectContent = new String(data, StandardCharsets.UTF_8);
            logger.info("Object contents: \n{}", objectContent);

            return true;

        } catch (S3Exception e) {
            logger.error("Failed to retrieve object: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Untuk detail API, lihat GetObjectdi Referensi AWS SDK for Java 2.x API.

### `GetObjectAttributes`

Contoh kode berikut menunjukkan cara menggunakan`GetObjectAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan atribut objek dari bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectAttributesRequest;
import software.amazon.awssdk.services.s3.model.GetObjectAttributesResponse;
import software.amazon.awssdk.services.s3.model.ObjectAttributes;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves attributes for an object in the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to retrieve attributes for
     * @return True if the object attributes are successfully retrieved, false
     *         otherwise
     */
    public static boolean getDirectoryBucketObjectAttributes(S3Client s3Client,
 String bucketName, String objectKey) {
        logger.info("Retrieving attributes for object: {} from bucket: {}",
 objectKey, bucketName);

        try {
            // Create a GetObjectAttributesRequest
            GetObjectAttributesRequest getObjectAttributesRequest =
 GetObjectAttributesRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .objectAttributes(ObjectAttributes.E_TAG,
 ObjectAttributes.STORAGE_CLASS,
                            ObjectAttributes.OBJECT_SIZE)
```

```
                    .build();

            // Retrieve the object attributes
            GetObjectAttributesResponse response =
s3Client.getObjectAttributes(getObjectAttributesRequest);
            logger.info("Attributes for object {}:", objectKey);
            logger.info("ETag: {}", response.eTag());
            logger.info("Storage Class: {}", response.storageClass());
            logger.info("Object Size: {}", response.objectSize());
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to retrieve object attributes: {} - Error code:
{}",
                    e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Untuk detail API, lihat GetObjectAttributesdi Referensi AWS SDK for Java 2.x API.

### `HeadBucket`

Contoh kode berikut menunjukkan cara menggunakan`HeadBucket`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Memeriksa apakah bucket direktori S3 yang ditentukan ada dan dapat diakses.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
```

```
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadBucketRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Checks if the specified S3 directory bucket exists and is accessible.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket to check
     * @return True if the bucket exists and is accessible, false otherwise
     */
    public static boolean headDirectoryBucket(S3Client s3Client, String bucketName)
 {
        logger.info("Checking if bucket exists: {}", bucketName);

        try {
            // Create a HeadBucketRequest
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();
            // If the bucket doesn't exist, the following statement throws
 NoSuchBucketException,
            // which is a subclass of S3Exception.
            s3Client.headBucket(headBucketRequest);
            logger.info("Amazon S3 directory bucket: \"{}\" found.", bucketName);
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to access bucket: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat HeadBucketdi Referensi AWS SDK for Java 2.x API.

### `HeadObject`

Contoh kode berikut menunjukkan cara menggunakan`HeadObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dapatkan metadata objek dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;

    /**
     * Retrieves metadata for an object in the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to retrieve metadata for
     * @return True if the object exists, false otherwise
     */
    public static boolean headDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey) {
```

```
        logger.info("Retrieving metadata for object: {} from bucket: {}", objectKey,
bucketName);

        try {
            // Create a HeadObjectRequest
            HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Retrieve the object metadata
            HeadObjectResponse response = s3Client.headObject(headObjectRequest);
            logger.info("Amazon S3 object: \"{}\" found in bucket: \"{}\" with ETag:
\"{}\"", objectKey, bucketName,
                    response.eTag());
            logger.info("Content-Type: {}", response.contentType());
            logger.info("Content-Length: {}", response.contentLength());
            logger.info("Last Modified: {}", response.lastModified());
            return true;

        } catch (S3Exception e) {
            logger.error("Failed to retrieve object metadata: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            return false;
        }
    }
```

- Untuk detail API, lihat HeadObjectdi Referensi AWS SDK for Java 2.x API.

### `ListDirectoryBuckets`

Contoh kode berikut menunjukkan cara menggunakan`ListDirectoryBuckets`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Daftar semua ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.Bucket;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsRequest;
import software.amazon.awssdk.services.s3.model.ListDirectoryBucketsResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.util.List;
import java.util.UUID;
import java.util.stream.Collectors;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;

    /**
     * Lists all S3 directory buckets and no general purpose buckets.
     *
     * @param s3Client The S3 client used to interact with S3
     * @return A list of bucket names
     */
    public static List<String> listDirectoryBuckets(S3Client s3Client) {
        logger.info("Listing all directory buckets");

        try {
            // Create a ListBucketsRequest
            ListDirectoryBucketsRequest listDirectoryBucketsRequest =
 ListDirectoryBucketsRequest.builder().build();

            // Retrieve the list of buckets
            ListDirectoryBucketsResponse response =
 s3Client.listDirectoryBuckets(listDirectoryBucketsRequest);

            // Extract bucket names
            List<String> bucketNames = response.buckets().stream()
                    .map(Bucket::name)
                    .collect(Collectors.toList());

            return bucketNames;
```

```
        } catch (S3Exception e) {
            logger.error("Failed to list buckets: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
    }
```

- Untuk detail API, lihat ListDirectoryBucketsdi Referensi AWS SDK for Java 2.x API.

### `ListMultipartUploads`

Contoh kode berikut menunjukkan cara menggunakan`ListMultipartUploads`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat daftar unggahan multibagian dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsRequest;
import software.amazon.awssdk.services.s3.model.ListMultipartUploadsResponse;
import software.amazon.awssdk.services.s3.model.MultipartUpload;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
```

```
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;


   /**
    * Lists multipart uploads for the specified S3 directory bucket.
    *
    * @param s3Client   The S3 client used to interact with S3
    * @param bucketName The name of the directory bucket
    * @return A list of MultipartUpload objects representing the multipart uploads
    */
   public static List<MultipartUpload> listDirectoryBucketMultipartUploads(S3Client
 s3Client, String bucketName) {
       logger.info("Listing in-progress multipart uploads for bucket: {}",
 bucketName);

       try {
           // Create a ListMultipartUploadsRequest
           ListMultipartUploadsRequest listMultipartUploadsRequest =
 ListMultipartUploadsRequest.builder()
                   .bucket(bucketName)
                   .build();

           // List the multipart uploads
           ListMultipartUploadsResponse response =
 s3Client.listMultipartUploads(listMultipartUploadsRequest);
           List<MultipartUpload> uploads = response.uploads();
           for (MultipartUpload upload : uploads) {
               logger.info("In-progress multipart upload: Upload ID: {}, Key: {},
 Initiated: {}", upload.uploadId(),
                       upload.key(), upload.initiated());
           }
           return uploads;

       } catch (S3Exception e) {
           logger.error("Failed to list multipart uploads: {} - Error code: {}",
 e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode());
           return List.of(); // Return an empty list if an exception is thrown
```

```
        }
    }
```

- Untuk detail API, lihat ListMultipartUploadsdi Referensi AWS SDK for Java 2.x API.

### `ListObjectsV2`

Contoh kode berikut menunjukkan cara menggunakan`ListObjectsV2`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Daftar objek dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.S3Object;

import java.nio.file.Path;
import java.util.List;
import java.util.stream.Collectors;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;
```

```
   /**
    * Lists objects in the specified S3 directory bucket.
    *
    * @param s3Client   The S3 client used to interact with S3
    * @param bucketName The name of the directory bucket
    * @return A list of object keys in the bucket
    */
   public static List<String> listDirectoryBucketObjectsV2(S3Client s3Client,
String bucketName) {
       logger.info("Listing objects in bucket: {}", bucketName);

       try {
           // Create a ListObjectsV2Request
           ListObjectsV2Request listObjectsV2Request =
ListObjectsV2Request.builder()
                   .bucket(bucketName)
                   .build();

           // Retrieve the list of objects
           ListObjectsV2Response response =
s3Client.listObjectsV2(listObjectsV2Request);

           // Extract and return the object keys
           return response.contents().stream()
                   .map(S3Object::key)
                   .collect(Collectors.toList());

       } catch (S3Exception e) {
           logger.error("Failed to list objects: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode());
           throw e;
       }
   }
```

- Untuk detail API, lihat ListObjectsV2 di Referensi AWS SDK for Java 2.x API.

### `ListParts`

Contoh kode berikut menunjukkan cara menggunakan`ListParts`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat daftar bagian dari unggahan multibagian dalam bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.ListPartsRequest;
import software.amazon.awssdk.services.s3.model.ListPartsResponse;
import software.amazon.awssdk.services.s3.model.Part;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.IOException;
import java.nio.file.Path;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;

    /**
     * Lists the parts of a multipart upload for the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object being uploaded
     * @param uploadId   The upload ID used to track the multipart upload
     * @return A list of Part representing the parts of the multipart upload
```

```
    */
   public static List<Part> listDirectoryBucketMultipartUploadParts(S3Client
s3Client, String bucketName,
           String objectKey, String uploadId) {
       logger.info("Listing parts for object: {} in bucket: {}", objectKey,
bucketName);

       try {
           // Create a ListPartsRequest
           ListPartsRequest listPartsRequest = ListPartsRequest.builder()
                   .bucket(bucketName)
                   .uploadId(uploadId)
                   .key(objectKey)
                   .build();

           // List the parts of the multipart upload
           ListPartsResponse response = s3Client.listParts(listPartsRequest);
           List<Part> parts = response.parts();
           for (Part part : parts) {
               logger.info("Uploaded part: Part number = \"{}\", etag = {}",
part.partNumber(), part.eTag());
           }
           return parts;

       } catch (S3Exception e) {
           logger.error("Failed to list parts: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                   e.awsErrorDetails().errorCode());
           return List.of(); // Return an empty list if an exception is thrown
       }
   }
```

- Untuk detail API, lihat ListPartsdi Referensi AWS SDK for Java 2.x API.

### `PutBucketEncryption`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketEncryption`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Setel enkripsi bucket ke bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.kms.KmsClient;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketEncryptionRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.ServerSideEncryption;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionByDefault;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionConfiguration;
import software.amazon.awssdk.services.s3.model.ServerSideEncryptionRule;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createKmsClient;
import static com.example.s3.util.S3DirectoryBucketUtils.createKmsKey;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.scheduleKeyDeletion;

    /**
     * Sets the default encryption configuration for an S3 bucket as SSE-KMS.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param kmsKeyId   The ID of the customer-managed KMS key
     */
    public static void putDirectoryBucketEncryption(S3Client s3Client, String
 bucketName, String kmsKeyId) {
        // Define the default encryption configuration to use SSE-KMS. For directory
        // buckets, AWS managed KMS keys aren't supported. Only customer-managed
 keys
        // are supported.
```

```
        ServerSideEncryptionByDefault encryptionByDefault =
ServerSideEncryptionByDefault.builder()
                .sseAlgorithm(ServerSideEncryption.AWS_KMS)
                .kmsMasterKeyID(kmsKeyId)
                .build();

        // Create a server-side encryption rule to apply the default encryption
        // configuration. For directory buckets, the bucketKeyEnabled field is
enforced
        // to be true.
        ServerSideEncryptionRule rule = ServerSideEncryptionRule.builder()
                .bucketKeyEnabled(true)
                .applyServerSideEncryptionByDefault(encryptionByDefault)
                .build();

        // Create the server-side encryption configuration for the bucket
        ServerSideEncryptionConfiguration encryptionConfiguration =
ServerSideEncryptionConfiguration.builder()
                .rules(rule)
                .build();

        // Create the PutBucketEncryption request
        PutBucketEncryptionRequest putRequest = PutBucketEncryptionRequest.builder()
                .bucket(bucketName)
                .serverSideEncryptionConfiguration(encryptionConfiguration)
                .build();

        // Set the bucket encryption
        try {
            s3Client.putBucketEncryption(putRequest);
            logger.info("SSE-KMS Bucket encryption configuration set for the
directory bucket: {}", bucketName);
        } catch (S3Exception e) {
            logger.error("Failed to set bucket encryption: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
    }
```

- Untuk detail API, lihat PutBucketEncryptiondi Referensi AWS SDK for Java 2.x API.

### `PutBucketPolicy`

Contoh kode berikut menunjukkan cara menggunakan`PutBucketPolicy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Menerapkan kebijakan bucket ke bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutBucketPolicyRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getAwsAccountId;

    /**
     * Sets the following bucket policy for the specified S3 directory bucket.
     *<pre>
     * {
     *     "Version":"2012-10-17",
     *     "Statement": [
     *         {
     *             "Sid": "AdminPolicy",
     *             "Effect": "Allow",
     *             "Principal": {
     *                 "AWS": "arn:aws:iam::<ACCOUNT_ID>:root"
     *             },
     *             "Action": "s3express:*",
     *             "Resource": "arn:aws:s3express:us-west-2:<ACCOUNT_ID>:bucket/
<DIR_BUCKET_NAME>
     *         }
```

```
     *     ]
     * }
     * </pre>
     * This policy grants all S3 directory bucket actions to identities in the same
account as the bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param policyText The policy text to be applied
     */
    public static void putDirectoryBucketPolicy(S3Client s3Client, String
bucketName, String policyText) {
        logger.info("Setting policy on bucket: {}", bucketName);
        logger.info("Policy: {}", policyText);

        try {
            PutBucketPolicyRequest policyReq = PutBucketPolicyRequest.builder()
                    .bucket(bucketName)
                    .policy(policyText)
                    .build();

            s3Client.putBucketPolicy(policyReq);
            logger.info("Bucket policy set successfully!");

        } catch (S3Exception e) {
            logger.error("Failed to set bucket policy: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat PutBucketPolicydi Referensi AWS SDK for Java 2.x API.

### `PutObject`

Contoh kode berikut menunjukkan cara menggunakan`PutObject`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Masukkan objek ke dalam ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.awscore.exception.AwsErrorDetails;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.PutObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;

import java.io.UncheckedIOException;
import java.nio.file.Path;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;

    /**
     * Puts an object into the specified S3 directory bucket.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be placed in the bucket
     * @param filePath   The path of the file to be uploaded
     */
    public static void putDirectoryBucketObject(S3Client s3Client, String
 bucketName, String objectKey, Path filePath) {
        logger.info("Putting object: {} into bucket: {}", objectKey, bucketName);

        try {
            // Create a PutObjectRequest
```

```
            PutObjectRequest putObj = PutObjectRequest.builder()
                    .bucket(bucketName)
                    .key(objectKey)
                    .build();

            // Upload the object
            s3Client.putObject(putObj, filePath);
            logger.info("Successfully placed {} into bucket {}", objectKey,
bucketName);

        } catch (UncheckedIOException e) {
            throw S3Exception.builder().message("Failed to read the file: " +
e.getMessage()).cause(e)
                    .awsErrorDetails(AwsErrorDetails.builder()
                            .errorCode("ClientSideException:FailedToReadFile")
                            .errorMessage(e.getMessage())
                            .build())
                    .build();
        } catch (S3Exception e) {
            logger.error("Failed to put object: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat PutObjectdi Referensi AWS SDK for Java 2.x API.

### `UploadPart`

Contoh kode berikut menunjukkan cara menggunakan`UploadPart`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Unggah bagian dari unggahan multibagian untuk bucket direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.sync.RequestBody;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartRequest;
import software.amazon.awssdk.services.s3.model.UploadPartResponse;

import java.io.IOException;
import java.io.RandomAccessFile;
import java.nio.ByteBuffer;
import java.nio.file.Path;
import java.util.ArrayList;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;

    /**
     * This method creates part requests and uploads individual parts to S3.
     * While it uses the UploadPart API to upload a single part, it does so
     * sequentially to handle multiple parts of a file, returning all the completed
     * parts.
     *
     * @param s3Client   The S3 client used to interact with S3
     * @param bucketName The name of the directory bucket
     * @param objectKey  The key (name) of the object to be uploaded
     * @param uploadId   The upload ID used to track the multipart upload
     * @param filePath   The path to the file to be uploaded
     * @return A list of uploaded parts
     * @throws IOException if an I/O error occurs
     */
    public static List<CompletedPart> multipartUploadForDirectoryBucket(S3Client
 s3Client, String bucketName,
```

```
            String objectKey, String uploadId, Path filePath) throws IOException {
        logger.info("Uploading parts for object: {} in bucket: {}", objectKey,
bucketName);

        int partNumber = 1;
        List<CompletedPart> uploadedParts = new ArrayList<>();
        ByteBuffer bb = ByteBuffer.allocate(1024 * 1024 * 5); // 5 MB byte buffer

        // Read the local file, break down into chunks and process
        try (RandomAccessFile file = new RandomAccessFile(filePath.toFile(), "r")) {
            long fileSize = file.length();
            int position = 0;

            // Sequentially upload parts of the file
            while (position < fileSize) {
                file.seek(position);
                int read = file.getChannel().read(bb);

                bb.flip(); // Swap position and limit before reading from the buffer
                UploadPartRequest uploadPartRequest = UploadPartRequest.builder()
                        .bucket(bucketName)
                        .key(objectKey)
                        .uploadId(uploadId)
                        .partNumber(partNumber)
                        .build();

                UploadPartResponse partResponse = s3Client.uploadPart(
                        uploadPartRequest,
                        RequestBody.fromByteBuffer(bb));

                // Build the uploaded part
                CompletedPart uploadedPart = CompletedPart.builder()
                        .partNumber(partNumber)
                        .eTag(partResponse.eTag())
                        .build();

                // Add the uploaded part to the list
                uploadedParts.add(uploadedPart);

                // Log to indicate the part upload is done
                logger.info("Uploaded part number: {} with ETag: {}", partNumber,
partResponse.eTag());

                bb.clear();
```

```
                position += read;
                partNumber++;
            }
        } catch (S3Exception e) {
            logger.error("Failed to list parts: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode());
            throw e;
        }
        return uploadedParts;
    }
```

- Untuk detail API, lihat UploadPartdi Referensi AWS SDK for Java 2.x API.

### `UploadPartCopy`

Contoh kode berikut menunjukkan cara menggunakan`UploadPartCopy`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat salinan bagian berdasarkan ukuran objek sumber dan salin bagian individual ke ember direktori.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.CompletedPart;
import software.amazon.awssdk.services.s3.model.HeadObjectRequest;
import software.amazon.awssdk.services.s3.model.HeadObjectResponse;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.model.UploadPartCopyRequest;
import software.amazon.awssdk.services.s3.model.UploadPartCopyResponse;
```

```
import java.io.IOException;
import java.nio.file.Path;
import java.util.ArrayList;
import java.util.List;

import static
 com.example.s3.util.S3DirectoryBucketUtils.abortDirectoryBucketMultipartUploads;
import static
 com.example.s3.util.S3DirectoryBucketUtils.completeDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static
 com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucketMultipartUpload;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static
 com.example.s3.util.S3DirectoryBucketUtils.multipartUploadForDirectoryBucket;

    /**
     * Creates copy parts based on source object size and copies over individual
     * parts.
     *
     * @param s3Client          The S3 client used to interact with S3
     * @param sourceBucket      The name of the source bucket
     * @param sourceKey         The key (name) of the source object
     * @param destinationBucket The name of the destination bucket
     * @param destinationKey    The key (name) of the destination object
     * @param uploadId          The upload ID used to track the multipart upload
     * @return A list of completed parts
     */
    public static List<CompletedPart> multipartUploadCopyForDirectoryBucket(S3Client
 s3Client, String sourceBucket,
            String sourceKey, String destinationBucket, String destinationKey,
 String uploadId) {
        // Get the object size to track the end of the copy operation
        HeadObjectRequest headObjectRequest = HeadObjectRequest.builder()
                .bucket(sourceBucket)
                .key(sourceKey)
                .build();
        HeadObjectResponse headObjectResponse =
 s3Client.headObject(headObjectRequest);
        long objectSize = headObjectResponse.contentLength();
```

```
        logger.info("Source Object size: {}", objectSize);

        // Copy the object using 20 MB parts
        long partSize = 20 * 1024 * 1024; // 20 MB
        long bytePosition = 0;
        int partNum = 1;
        List<CompletedPart> uploadedParts = new ArrayList<>();

        while (bytePosition < objectSize) {
            long lastByte = Math.min(bytePosition + partSize - 1, objectSize - 1);
            logger.info("Part Number: {}, Byte Position: {}, Last Byte: {}",
partNum, bytePosition, lastByte);

            try {
                UploadPartCopyRequest uploadPartCopyRequest =
UploadPartCopyRequest.builder()
                        .sourceBucket(sourceBucket)
                        .sourceKey(sourceKey)
                        .destinationBucket(destinationBucket)
                        .destinationKey(destinationKey)
                        .uploadId(uploadId)
                        .copySourceRange("bytes=" + bytePosition + "-" + lastByte)
                        .partNumber(partNum)
                        .build();
                UploadPartCopyResponse uploadPartCopyResponse =
s3Client.uploadPartCopy(uploadPartCopyRequest);

                CompletedPart part = CompletedPart.builder()
                        .partNumber(partNum)
                        .eTag(uploadPartCopyResponse.copyPartResult().eTag())
                        .build();
                uploadedParts.add(part);

                bytePosition += partSize;
                partNum++;
            } catch (S3Exception e) {
                logger.error("Failed to copy part number {}: {} - Error code: {}",
partNum,
                        e.awsErrorDetails().errorMessage(),
e.awsErrorDetails().errorCode());
                throw e;
            }
        }
```

```
        return uploadedParts;
    }
```

- Untuk detail API, lihat UploadPartCopydi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat URL presigned untuk mendapatkan objek

Contoh kode berikut menunjukkan cara membuat URL presigned untuk bucket direktori S3 dan mendapatkan objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hasilkan URL GET yang telah ditetapkan sebelumnya untuk mengakses objek di bucket direktori S3.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.GetObjectRequest;
import software.amazon.awssdk.services.s3.model.S3Exception;
import software.amazon.awssdk.services.s3.presigner.S3Presigner;
import software.amazon.awssdk.services.s3.presigner.model.GetObjectPresignRequest;
import software.amazon.awssdk.services.s3.presigner.model.PresignedGetObjectRequest;

import java.nio.file.Path;
import java.time.Duration;

import static com.example.s3.util.S3DirectoryBucketUtils.createDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Client;
```

```
import static com.example.s3.util.S3DirectoryBucketUtils.createS3Presigner;
import static
 com.example.s3.util.S3DirectoryBucketUtils.deleteAllObjectsInDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.deleteDirectoryBucket;
import static com.example.s3.util.S3DirectoryBucketUtils.getFilePath;
import static com.example.s3.util.S3DirectoryBucketUtils.putDirectoryBucketObject;



   /**
    * Generates a presigned URL for accessing an object in the specified S3
    * directory bucket.
    *
    * @param s3Presigner The S3 presigner client used to generate the presigned URL
    * @param bucketName  The name of the directory bucket
    * @param objectKey   The key (name) of the object to access
    * @return A presigned URL for accessing the specified object
    */
   public static String generatePresignedGetURLForDirectoryBucket(S3Presigner
 s3Presigner, String bucketName,
           String objectKey) {
       logger.info("Generating presigned URL for object: {} in bucket: {}",
 objectKey, bucketName);

       try {
           // Create a GetObjectRequest
           GetObjectRequest getObjectRequest = GetObjectRequest.builder()
                   .bucket(bucketName)
                   .key(objectKey)
                   .build();

           // Create a GetObjectPresignRequest
           GetObjectPresignRequest getObjectPresignRequest =
 GetObjectPresignRequest.builder()
                   .signatureDuration(Duration.ofMinutes(10)) // Presigned URL
 valid for 10 minutes
                   .getObjectRequest(getObjectRequest)
                   .build();

           // Generate the presigned URL
           PresignedGetObjectRequest presignedGetObjectRequest =
 s3Presigner.presignGetObject(getObjectPresignRequest);

           // Get the presigned URL
           String presignedURL = presignedGetObjectRequest.url().toString();
```

```
            logger.info("Presigned URL: {}", presignedURL);
            return presignedURL;

        } catch (S3Exception e) {
            logger.error("Failed to generate presigned URL: {} - Error code: {}",
e.awsErrorDetails().errorMessage(),
                    e.awsErrorDetails().errorCode(), e);
            throw e;
        }
    }
```

- Untuk detail API, lihat GetObjectdi Referensi AWS SDK for Java 2.x API.

# SageMaker Contoh AI menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum AWS SDK for Java 2.x dengan menggunakan SageMaker AI.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Tindakan
- Skenario

# Memulai

## Halo SageMaker AI

Contoh kode berikut menunjukkan cara memulai menggunakan SageMaker AI.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloSageMaker {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        SageMakerClient sageMakerClient = SageMakerClient.builder()
                .region(region)
                .build();

        listBooks(sageMakerClient);
        sageMakerClient.close();
    }

    public static void listBooks(SageMakerClient sageMakerClient) {
        try {
            ListNotebookInstancesResponse notebookInstancesResponse =
 sageMakerClient.listNotebookInstances();
            List<NotebookInstanceSummary> items =
 notebookInstancesResponse.notebookInstances();
            for (NotebookInstanceSummary item : items) {
                System.out.println("The notebook name is: " +
 item.notebookInstanceName());
```

```
            }

        } catch (SageMakerException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListNotebookInstancesdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `CreatePipeline`

Contoh kode berikut menunjukkan cara menggunakan`CreatePipeline`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Create a pipeline from the example pipeline JSON.
   public static void setupPipeline(SageMakerClient sageMakerClient, String
filePath, String roleArn,
           String functionArn, String pipelineName) {
       System.out.println("Setting up the pipeline.");
       JSONParser parser = new JSONParser();

       // Read JSON and get pipeline definition.
       try (FileReader reader = new FileReader(filePath)) {
           Object obj = parser.parse(reader);
           JSONObject jsonObject = (JSONObject) obj;
           JSONArray stepsArray = (JSONArray) jsonObject.get("Steps");
           for (Object stepObj : stepsArray) {
               JSONObject step = (JSONObject) stepObj;
               if (step.containsKey("FunctionArn")) {
```

```
                    step.put("FunctionArn", functionArn);
                }
            }
            System.out.println(jsonObject);

            // Create the pipeline.
            CreatePipelineRequest pipelineRequest = CreatePipelineRequest.builder()
                    .pipelineDescription("Java SDK example pipeline")
                    .roleArn(roleArn)
                    .pipelineName(pipelineName)
                    .pipelineDefinition(jsonObject.toString())
                    .build();

            sageMakerClient.createPipeline(pipelineRequest);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (IOException | ParseException e) {
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat CreatePipelinedi Referensi AWS SDK for Java 2.x API.

### `DeletePipeline`

Contoh kode berikut menunjukkan cara menggunakan`DeletePipeline`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Delete a SageMaker pipeline by name.
    public static void deletePipeline(SageMakerClient sageMakerClient, String
pipelineName) {
        DeletePipelineRequest pipelineRequest = DeletePipelineRequest.builder()
```

```
                .pipelineName(pipelineName)
                .build();

        sageMakerClient.deletePipeline(pipelineRequest);
        System.out.println("*** Successfully deleted " + pipelineName);
    }
```

- Untuk detail API, lihat DeletePipelinedi Referensi AWS SDK for Java 2.x API.

### `DescribePipelineExecution`

Contoh kode berikut menunjukkan cara menggunakan`DescribePipelineExecution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Check the status of a pipeline execution.
    public static void waitForPipelineExecution(SageMakerClient sageMakerClient,
String executionArn)
            throws InterruptedException {
        String status;
        int index = 0;
        do {
            DescribePipelineExecutionRequest pipelineExecutionRequest =
DescribePipelineExecutionRequest.builder()
                    .pipelineExecutionArn(executionArn)
                    .build();

            DescribePipelineExecutionResponse response = sageMakerClient
                    .describePipelineExecution(pipelineExecutionRequest);
            status = response.pipelineExecutionStatusAsString();
            System.out.println(index + ". The Status of the pipeline is " + status);
            TimeUnit.SECONDS.sleep(4);
            index++;
        } while ("Executing".equals(status));
        System.out.println("Pipeline finished with status " + status);
```

```
    }
```

- Untuk detail API, lihat DescribePipelineExecutiondi Referensi AWS SDK for Java 2.x API.

### `StartPipelineExecution`

Contoh kode berikut menunjukkan cara menggunakan`StartPipelineExecution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    // Start a pipeline run with job configurations.
    public static String executePipeline(SageMakerClient sageMakerClient, String
 bucketName, String queueUrl,
            String roleArn, String pipelineName) {
        System.out.println("Starting pipeline execution.");
        String inputBucketLocation = "s3://" + bucketName + "/samplefiles/
latlongtest.csv";
        String output = "s3://" + bucketName + "/outputfiles/";
        Gson gson = new GsonBuilder()
                .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                .setPrettyPrinting().create();

        // Set up all parameters required to start the pipeline.
        List<Parameter> parameters = new ArrayList<>();
        Parameter para1 = Parameter.builder()
                .name("parameter_execution_role")
                .value(roleArn)
                .build();

        Parameter para2 = Parameter.builder()
                .name("parameter_queue_url")
                .value(queueUrl)
                .build();

        String inputJSON = "{\n" +
```

```
                "  \"DataSourceConfig\": {\n" +
                "    \"S3Data\": {\n" +
                "      \"S3Uri\": \"s3://" + bucketName + "/samplefiles/
latlongtest.csv\"\n" +
                "    },\n" +
                "    \"Type\": \"S3_DATA\"\n" +
                "  },\n" +
                "  \"DocumentType\": \"CSV\"\n" +
                "}";

        System.out.println(inputJSON);

        Parameter para3 = Parameter.builder()
                .name("parameter_vej_input_config")
                .value(inputJSON)
                .build();

        // Create an ExportVectorEnrichmentJobOutputConfig object.
        VectorEnrichmentJobS3Data jobS3Data = VectorEnrichmentJobS3Data.builder()
                .s3Uri(output)
                .build();

        ExportVectorEnrichmentJobOutputConfig outputConfig =
 ExportVectorEnrichmentJobOutputConfig.builder()
                .s3Data(jobS3Data)
                .build();

        String gson4 = gson.toJson(outputConfig);
        Parameter para4 = Parameter.builder()
                .name("parameter_vej_export_config")
                .value(gson4)
                .build();
        System.out.println("parameter_vej_export_config:" +
 gson.toJson(outputConfig));

        // Create a VectorEnrichmentJobConfig object.
        ReverseGeocodingConfig reverseGeocodingConfig =
 ReverseGeocodingConfig.builder()
                .xAttributeName("Longitude")
                .yAttributeName("Latitude")
                .build();

        VectorEnrichmentJobConfig jobConfig = VectorEnrichmentJobConfig.builder()
                .reverseGeocodingConfig(reverseGeocodingConfig)
```

```
                .build();

        String para5JSON = "{\"MapMatchingConfig\":null,\"ReverseGeocodingConfig\":
{\"XAttributeName\":\"Longitude\",\"YAttributeName\":\"Latitude\"}}";
        Parameter para5 = Parameter.builder()
                .name("parameter_step_1_vej_config")
                .value(para5JSON)
                .build();

        System.out.println("parameter_step_1_vej_config:" + gson.toJson(jobConfig));
        parameters.add(para1);
        parameters.add(para2);
        parameters.add(para3);
        parameters.add(para4);
        parameters.add(para5);

        StartPipelineExecutionRequest pipelineExecutionRequest =
 StartPipelineExecutionRequest.builder()
                .pipelineExecutionDescription("Created using Java SDK")
                .pipelineExecutionDisplayName(pipelineName + "-example-execution")
                .pipelineParameters(parameters)
                .pipelineName(pipelineName)
                .build();

        StartPipelineExecutionResponse response =
 sageMakerClient.startPipelineExecution(pipelineExecutionRequest);
        return response.pipelineExecutionArn();
    }
```

- Untuk detail API, lihat StartPipelineExecutiondi Referensi AWS SDK for Java 2.x API.

## Skenario

Memulai pekerjaan geospasial dan jaringan pipa

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Siapkan sumber daya untuk pipa.
- Siapkan pipa yang menjalankan pekerjaan geospasial.
- Mulai eksekusi pipeline.

- Pantau status eksekusi.
- Lihat output dari pipa.
- Pembersihan sumber daya

Untuk informasi selengkapnya, lihat Membuat dan menjalankan SageMaker pipeline menggunakan AWS SDKs Community.aws.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
public class SagemakerWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static String eventSourceMapping = "";

    public static void main(String[] args) throws InterruptedException {
        final String usage = "\n" +
                "Usage:\n" +
                "    <sageMakerRoleName> <lambdaRoleName> <functionFileLocation>
 <functionName> <queueName> <bucketName> <lnglatData> <spatialPipelinePath>
 <pipelineName>\n\n"
                +
                "Where:\n" +
                "    sageMakerRoleName - The name of the Amazon SageMaker role.\n\n"
 +
                "    lambdaRoleName - The name of the AWS Lambda role.\n\n" +
                "    functionFileLocation - The file location where the JAR file
 that represents the AWS Lambda function is located.\n\n"
                +
                "    functionName - The name of the AWS Lambda function (for
 example,SageMakerExampleFunction).\n\n" +
                "    queueName - The name of the Amazon Simple Queue Service (Amazon
 SQS) queue.\n\n" +
                "    bucketName - The name of the Amazon Simple Storage Service
 (Amazon S3) bucket.\n\n" +
                "    lnglatData - The file location of the latlongtest.csv file
 required for this use case.\n\n" +
```

```
                "    spatialPipelinePath - The file location of the
GeoSpatialPipeline.json file required for this use case.\n\n"
                +
                "    pipelineName - The name of the pipeline to create (for example,
sagemaker-sdk-example-pipeline).\n\n";

        if (args.length != 9) {
            System.out.println(usage);
            System.exit(1);
        }

        String sageMakerRoleName = args[0];
        String lambdaRoleName = args[1];
        String functionFileLocation = args[2];
        String functionName = args[3];
        String queueName = args[4];
        String bucketName = args[5];
        String lnglatData = args[6];
        String spatialPipelinePath = args[7];
        String pipelineName = args[8];
        String handlerName = "org.example.SageMakerLambdaFunction::handleRequest";

        Region region = Region.US_WEST_2;
        SageMakerClient sageMakerClient = SageMakerClient.builder()
                .region(region)
                .build();

        IamClient iam = IamClient.builder()
                .region(region)
                .build();

        LambdaClient lambdaClient = LambdaClient.builder()
                .region(region)
                .build();

        SqsClient sqsClient = SqsClient.builder()
                .region(region)
                .build();

        S3Client s3Client = S3Client.builder()
                .region(region)
                .build();

        System.out.println(DASHES);
```

```
        System.out.println("Welcome to the Amazon SageMaker pipeline example
scenario.");
        System.out.println(
                "\nThis example workflow will guide you through setting up and
running an" +
                        "\nAmazon SageMaker pipeline. The pipeline uses an AWS
Lambda function and an" +
                        "\nAmazon SQS Queue. It runs a vector enrichment reverse
geocode job to" +
                        "\nreverse geocode addresses in an input file and store the
results in an export file.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("First, we will set up the roles, functions, and queue
needed by the SageMaker pipeline.");
        String lambdaRoleArn = checkLambdaRole(iam, lambdaRoleName);
        String sageMakerRoleArn = checkSageMakerRole(iam, sageMakerRoleName);

        String functionArn = checkFunction(lambdaClient, functionName,
functionFileLocation, lambdaRoleArn,
                handlerName);
        String queueUrl = checkQueue(sqsClient, lambdaClient, queueName,
functionName);
        System.out.println("The queue URL is " + queueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Setting up bucket " + bucketName);
        if (!checkBucket(s3Client, bucketName)) {
            setupBucket(s3Client, bucketName);
            System.out.println("Put " + lnglatData + " into " + bucketName);
            putS3Object(s3Client, bucketName, "latlongtest.csv", lnglatData);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Now we can create and run our pipeline.");
        setupPipeline(sageMakerClient, spatialPipelinePath, sageMakerRoleArn,
functionArn, pipelineName);
        String pipelineExecutionARN = executePipeline(sageMakerClient, bucketName,
queueUrl, sageMakerRoleArn,
                pipelineName);
```

```
        System.out.println("The pipeline execution ARN value is " +
 pipelineExecutionARN);
        waitForPipelineExecution(sageMakerClient, pipelineExecutionARN);
        System.out.println("Getting output results " + bucketName);
        getOutputResults(s3Client, bucketName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The pipeline has completed. To view the pipeline and
 runs " +
                "in SageMaker Studio, follow these instructions:" +
                "\nhttps://docs.aws.amazon.com/sagemaker/latest/dg/pipelines-
studio.html");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("Do you want to delete the AWS resources used in this
 Workflow? (y/n)");
        Scanner in = new Scanner(System.in);
        String delResources = in.nextLine();
        if (delResources.compareTo("y") == 0) {
            System.out.println("Lets clean up the AWS resources. Wait 30 seconds");
            TimeUnit.SECONDS.sleep(30);
            deleteEventSourceMapping(lambdaClient);
            deleteSQSQueue(sqsClient, queueName);
            listBucketObjects(s3Client, bucketName);
            deleteBucket(s3Client, bucketName);
            deleteLambdaFunction(lambdaClient, functionName);
            deleteLambdaRole(iam, lambdaRoleName);
            deleteSagemakerRole(iam, sageMakerRoleName);
            deletePipeline(sageMakerClient, pipelineName);
        } else {
            System.out.println("The AWS Resources were not deleted!");
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("SageMaker pipeline scenario is complete.");
        System.out.println(DASHES);
    }

    private static void readObject(S3Client s3Client, String bucketName, String key)
 {
        System.out.println("Output file contents: \n");
```

```
        GetObjectRequest objectRequest = GetObjectRequest.builder()
                .bucket(bucketName)
                .key(key)
                .build();

        ResponseBytes<GetObjectResponse> objectBytes =
s3Client.getObjectAsBytes(objectRequest);
        byte[] byteArray = objectBytes.asByteArray();
        String text = new String(byteArray, StandardCharsets.UTF_8);
        System.out.println("Text output: " + text);
    }

    // Display some results from the output directory.
    public static void getOutputResults(S3Client s3Client, String bucketName) {
        System.out.println("Getting output results {bucketName}.");
        ListObjectsRequest listObjectsRequest = ListObjectsRequest.builder()
                .bucket(bucketName)
                .prefix("outputfiles/")
                .build();

        ListObjectsResponse response = s3Client.listObjects(listObjectsRequest);
        List<S3Object> s3Objects = response.contents();
        for (S3Object object : s3Objects) {
            readObject(s3Client, bucketName, object.key());
        }
    }

    // Check the status of a pipeline execution.
    public static void waitForPipelineExecution(SageMakerClient sageMakerClient,
String executionArn)
            throws InterruptedException {
        String status;
        int index = 0;
        do {
            DescribePipelineExecutionRequest pipelineExecutionRequest =
DescribePipelineExecutionRequest.builder()
                    .pipelineExecutionArn(executionArn)
                    .build();

            DescribePipelineExecutionResponse response = sageMakerClient
                    .describePipelineExecution(pipelineExecutionRequest);
            status = response.pipelineExecutionStatusAsString();
            System.out.println(index + ". The Status of the pipeline is " + status);
            TimeUnit.SECONDS.sleep(4);
```

```
            index++;
        } while ("Executing".equals(status));
        System.out.println("Pipeline finished with status " + status);
    }

    // Delete a SageMaker pipeline by name.
    public static void deletePipeline(SageMakerClient sageMakerClient, String
pipelineName) {
        DeletePipelineRequest pipelineRequest = DeletePipelineRequest.builder()
                .pipelineName(pipelineName)
                .build();

        sageMakerClient.deletePipeline(pipelineRequest);
        System.out.println("*** Successfully deleted " + pipelineName);
    }

    // Create a pipeline from the example pipeline JSON.
    public static void setupPipeline(SageMakerClient sageMakerClient, String
filePath, String roleArn,
            String functionArn, String pipelineName) {
        System.out.println("Setting up the pipeline.");
        JSONParser parser = new JSONParser();

        // Read JSON and get pipeline definition.
        try (FileReader reader = new FileReader(filePath)) {
            Object obj = parser.parse(reader);
            JSONObject jsonObject = (JSONObject) obj;
            JSONArray stepsArray = (JSONArray) jsonObject.get("Steps");
            for (Object stepObj : stepsArray) {
                JSONObject step = (JSONObject) stepObj;
                if (step.containsKey("FunctionArn")) {
                    step.put("FunctionArn", functionArn);
                }
            }
            System.out.println(jsonObject);

            // Create the pipeline.
            CreatePipelineRequest pipelineRequest = CreatePipelineRequest.builder()
                    .pipelineDescription("Java SDK example pipeline")
                    .roleArn(roleArn)
                    .pipelineName(pipelineName)
                    .pipelineDefinition(jsonObject.toString())
                    .build();
```

```
            sageMakerClient.createPipeline(pipelineRequest);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (IOException | ParseException e) {
            throw new RuntimeException(e);
        }
    }

    // Start a pipeline run with job configurations.
    public static String executePipeline(SageMakerClient sageMakerClient, String
 bucketName, String queueUrl,
            String roleArn, String pipelineName) {
        System.out.println("Starting pipeline execution.");
        String inputBucketLocation = "s3://" + bucketName + "/samplefiles/
latlongtest.csv";
        String output = "s3://" + bucketName + "/outputfiles/";
        Gson gson = new GsonBuilder()
                .setFieldNamingPolicy(FieldNamingPolicy.UPPER_CAMEL_CASE)
                .setPrettyPrinting().create();

        // Set up all parameters required to start the pipeline.
        List<Parameter> parameters = new ArrayList<>();
        Parameter para1 = Parameter.builder()
                .name("parameter_execution_role")
                .value(roleArn)
                .build();

        Parameter para2 = Parameter.builder()
                .name("parameter_queue_url")
                .value(queueUrl)
                .build();

        String inputJSON = "{\n" +
                "  \"DataSourceConfig\": {\n" +
                "    \"S3Data\": {\n" +
                "      \"S3Uri\": \"s3://" + bucketName + "/samplefiles/
latlongtest.csv\"\n" +
                "    },\n" +
                "    \"Type\": \"S3_DATA\"\n" +
                "  },\n" +
                "  \"DocumentType\": \"CSV\"\n" +
                "}";
```

```
        System.out.println(inputJSON);

        Parameter para3 = Parameter.builder()
                .name("parameter_vej_input_config")
                .value(inputJSON)
                .build();

        // Create an ExportVectorEnrichmentJobOutputConfig object.
        VectorEnrichmentJobS3Data jobS3Data = VectorEnrichmentJobS3Data.builder()
                .s3Uri(output)
                .build();

        ExportVectorEnrichmentJobOutputConfig outputConfig =
 ExportVectorEnrichmentJobOutputConfig.builder()
                .s3Data(jobS3Data)
                .build();

        String gson4 = gson.toJson(outputConfig);
        Parameter para4 = Parameter.builder()
                .name("parameter_vej_export_config")
                .value(gson4)
                .build();
        System.out.println("parameter_vej_export_config:" +
 gson.toJson(outputConfig));

        // Create a VectorEnrichmentJobConfig object.
        ReverseGeocodingConfig reverseGeocodingConfig =
 ReverseGeocodingConfig.builder()
                .xAttributeName("Longitude")
                .yAttributeName("Latitude")
                .build();

        VectorEnrichmentJobConfig jobConfig = VectorEnrichmentJobConfig.builder()
                .reverseGeocodingConfig(reverseGeocodingConfig)
                .build();

        String para5JSON = "{\"MapMatchingConfig\":null,\"ReverseGeocodingConfig\":
{\"XAttributeName\":\"Longitude\",\"YAttributeName\":\"Latitude\"}}";
        Parameter para5 = Parameter.builder()
                .name("parameter_step_1_vej_config")
                .value(para5JSON)
                .build();
```

```
        System.out.println("parameter_step_1_vej_config:" + gson.toJson(jobConfig));
        parameters.add(para1);
        parameters.add(para2);
        parameters.add(para3);
        parameters.add(para4);
        parameters.add(para5);

        StartPipelineExecutionRequest pipelineExecutionRequest =
StartPipelineExecutionRequest.builder()
                .pipelineExecutionDescription("Created using Java SDK")
                .pipelineExecutionDisplayName(pipelineName + "-example-execution")
                .pipelineParameters(parameters)
                .pipelineName(pipelineName)
                .build();

        StartPipelineExecutionResponse response =
sageMakerClient.startPipelineExecution(pipelineExecutionRequest);
        return response.pipelineExecutionArn();
    }

    public static void deleteEventSourceMapping(LambdaClient lambdaClient) {
        DeleteEventSourceMappingRequest eventSourceMappingRequest =
DeleteEventSourceMappingRequest.builder()
                .uuid(eventSourceMapping)
                .build();

        lambdaClient.deleteEventSourceMapping(eventSourceMappingRequest);
    }

    public static void deleteSagemakerRole(IamClient iam, String roleName) {
        String[] sageMakerRolePolicies = getSageMakerRolePolicies();
        try {
            for (String policy : sageMakerRolePolicies) {
                // First the policy needs to be detached.
                DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
                        .policyArn(policy)
                        .roleName(roleName)
                        .build();

                iam.detachRolePolicy(rolePolicyRequest);
            }

            // Delete the role.
```

```
            DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            iam.deleteRole(roleRequest);
            System.out.println("*** Successfully deleted " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteLambdaRole(IamClient iam, String roleName) {
        String[] lambdaRolePolicies = getLambdaRolePolicies();
        try {
            for (String policy : lambdaRolePolicies) {
                // First the policy needs to be detached.
                DetachRolePolicyRequest rolePolicyRequest =
DetachRolePolicyRequest.builder()
                        .policyArn(policy)
                        .roleName(roleName)
                        .build();

                iam.detachRolePolicy(rolePolicyRequest);
            }

            // Delete the role.
            DeleteRoleRequest roleRequest = DeleteRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            iam.deleteRole(roleRequest);
            System.out.println("*** Successfully deleted " + roleName);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Delete the specific AWS Lambda function.
    public static void deleteLambdaFunction(LambdaClient awsLambda, String
functionName) {
```

```
        try {
            DeleteFunctionRequest request = DeleteFunctionRequest.builder()
                    .functionName(functionName)
                    .build();

            awsLambda.deleteFunction(request);
            System.out.println("*** " + functionName + " was deleted");

        } catch (LambdaException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    // Delete the specific S3 bucket.
    public static void deleteBucket(S3Client s3Client, String bucketName) {
        DeleteBucketRequest deleteBucketRequest = DeleteBucketRequest.builder()
                .bucket(bucketName)
                .build();
        s3Client.deleteBucket(deleteBucketRequest);
        System.out.println("*** " + bucketName + " was deleted.");
    }

    public static void listBucketObjects(S3Client s3, String bucketName) {
        try {
            ListObjectsRequest listObjects = ListObjectsRequest
                    .builder()
                    .bucket(bucketName)
                    .build();

            ListObjectsResponse res = s3.listObjects(listObjects);
            List<S3Object> objects = res.contents();
            for (S3Object myValue : objects) {
                System.out.print("\n The name of the key is " + myValue.key());
                deleteBucketObjects(s3, bucketName, myValue.key());
            }

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
   public static void deleteBucketObjects(S3Client s3, String bucketName, String
objectName) {
       ArrayList<ObjectIdentifier> toDelete = new ArrayList<>();
       toDelete.add(ObjectIdentifier.builder()
               .key(objectName)
               .build());
       try {
           DeleteObjectsRequest dor = DeleteObjectsRequest.builder()
                   .bucket(bucketName)
                   .delete(Delete.builder()
                           .objects(toDelete).build())
                   .build();

           s3.deleteObjects(dor);
           System.out.println("*** " + bucketName + " objects were deleted.");

       } catch (S3Exception e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   // Delete the specific Amazon SQS queue.
   public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
       try {
           GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                   .queueName(queueName)
                   .build();

           String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
           DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                   .queueUrl(queueUrl)
                   .build();

           sqsClient.deleteQueue(deleteQueueRequest);

       } catch (SqsException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
   }

   public static void putS3Object(S3Client s3, String bucketName, String objectKey,
String objectPath) {
```

```
        try {
            Map<String, String> metadata = new HashMap<>();
            metadata.put("x-amz-meta-myVal", "test");
            PutObjectRequest putOb = PutObjectRequest.builder()
                    .bucket(bucketName)
                    .key("samplefiles/" + objectKey)
                    .metadata(metadata)
                    .build();

            s3.putObject(putOb, RequestBody.fromFile(new File(objectPath)));
            System.out.println("Successfully placed " + objectKey + " into bucket "
+ bucketName);

        } catch (S3Exception e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void setupBucket(S3Client s3Client, String bucketName) {
        try {
            S3Waiter s3Waiter = s3Client.waiter();
            CreateBucketRequest bucketRequest = CreateBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3Client.createBucket(bucketRequest);
            HeadBucketRequest bucketRequestWait = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            // Wait until the bucket is created and print out the response.
            WaiterResponse<HeadBucketResponse> waiterResponse =
s3Waiter.waitUntilBucketExists(bucketRequestWait);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println(bucketName + " is ready");

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Set up the SQS queue to use with the pipeline.
```

```
   public static String setupQueue(SqsClient sqsClient, LambdaClient lambdaClient,
String queueName,
           String lambdaName) {
       System.out.println("Setting up queue named " + queueName);
       try {
           Map<QueueAttributeName, String> queueAtt = new HashMap<>();
           queueAtt.put(QueueAttributeName.DELAY_SECONDS, "5");
           queueAtt.put(QueueAttributeName.RECEIVE_MESSAGE_WAIT_TIME_SECONDS, "5");
           queueAtt.put(QueueAttributeName.VISIBILITY_TIMEOUT, "300");
           CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                   .queueName(queueName)
                   .attributes(queueAtt)
                   .build();

           sqsClient.createQueue(createQueueRequest);
           System.out.println("\nGet queue url");
           GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
           TimeUnit.SECONDS.sleep(15);

           connectLambda(sqsClient, lambdaClient, getQueueUrlResponse.queueUrl(),
lambdaName);
           System.out.println("Queue ready with Url " +
getQueueUrlResponse.queueUrl());
           return getQueueUrlResponse.queueUrl();

       } catch (SqsException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       } catch (InterruptedException e) {
           throw new RuntimeException(e);
       }
       return "";
   }

   // Connect the queue to the Lambda function as an event source.
   public static void connectLambda(SqsClient sqsClient, LambdaClient lambdaClient,
String queueUrl,
           String lambdaName) {
       System.out.println("Connecting the Lambda function and queue for the
pipeline.");
       String queueArn = "";
```

```
        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
        atts.add(QueueAttributeName.QUEUE_ARN);
        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributeNames(atts)
                .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet()) {
            System.out.println("Key = " + queueAtt.getKey() + ", Value = " +
queueAtt.getValue());
            queueArn = queueAtt.getValue();
        }

        CreateEventSourceMappingRequest eventSourceMappingRequest =
CreateEventSourceMappingRequest.builder()
                .eventSourceArn(queueArn)
                .functionName(lambdaName)
                .build();

        CreateEventSourceMappingResponse response1 =
lambdaClient.createEventSourceMapping(eventSourceMappingRequest);
        eventSourceMapping = response1.uuid();
        System.out.println("The mapping between the event source and Lambda function
was successful");
    }

    // Create an AWS Lambda function.
    public static String createLambdaFunction(LambdaClient awsLambda, String
functionName, String filePath, String role,
            String handler) {
        try {
            LambdaWaiter waiter = awsLambda.waiter();
            InputStream is = new FileInputStream(filePath);
            SdkBytes fileToUpload = SdkBytes.fromInputStream(is);
            FunctionCode code = FunctionCode.builder()
                    .zipFile(fileToUpload)
                    .build();

            CreateFunctionRequest functionRequest = CreateFunctionRequest.builder()
```

```
                    .functionName(functionName)
                    .description("SageMaker example function.")
                    .code(code)
                    .handler(handler)
                    .runtime(Runtime.JAVA11)
                    .timeout(200)
                    .memorySize(1024)
                    .role(role)
                    .build();

            // Create a Lambda function using a waiter.
            CreateFunctionResponse functionResponse =
awsLambda.createFunction(functionRequest);
            GetFunctionRequest getFunctionRequest = GetFunctionRequest.builder()
                    .functionName(functionName)
                    .build();
            WaiterResponse<GetFunctionResponse> waiterResponse =
waiter.waitUntilFunctionExists(getFunctionRequest);
            waiterResponse.matched().response().ifPresent(System.out::println);
            System.out.println("The function ARN is " +
functionResponse.functionArn());
            return functionResponse.functionArn();

        } catch (LambdaException | FileNotFoundException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSageMakerRole(IamClient iam, String roleName) {
        String[] sageMakerRolePolicies = getSageMakerRolePolicies();
        System.out.println("Creating a role to use with SageMaker.");
        String assumeRolePolicy = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": [" +
                "\"sagemaker.amazonaws.com\"," +
                "\"sagemaker-geospatial.amazonaws.com\"," +
                "\"lambda.amazonaws.com\"," +
                "\"s3.amazonaws.com\"" +
                "]" +
```

```
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(roleName)
                    .assumeRolePolicyDocument(assumeRolePolicy)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse roleResult = iam.createRole(request);

            // Attach the policies to the role.
            for (String policy : sageMakerRolePolicies) {
                AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(policy)
                        .build();

                iam.attachRolePolicy(attachRequest);
            }

            // Allow time for the role to be ready.
            TimeUnit.SECONDS.sleep(15);
            System.out.println("Role ready with ARN " + roleResult.role().arn());
            return roleResult.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
        return "";
    }

    private static String createLambdaRole(IamClient iam, String roleName) {
        String[] lambdaRolePolicies = getLambdaRolePolicies();
        String assumeRolePolicy = "{" +
                "\"Version\": \"2012-10-17\"," +
                "\"Statement\": [{" +
```

```
                "\"Effect\": \"Allow\"," +
                "\"Principal\": {" +
                "\"Service\": [" +
                "\"sagemaker.amazonaws.com\"," +
                "\"sagemaker-geospatial.amazonaws.com\"," +
                "\"lambda.amazonaws.com\"," +
                "\"s3.amazonaws.com\"" +
                "]" +
                "}," +
                "\"Action\": \"sts:AssumeRole\"" +
                "}]" +
                "}";

        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                    .roleName(roleName)
                    .assumeRolePolicyDocument(assumeRolePolicy)
                    .description("Created using the AWS SDK for Java")
                    .build();

            CreateRoleResponse roleResult = iam.createRole(request);

            // Attach the policies to the role.
            for (String policy : lambdaRolePolicies) {
                AttachRolePolicyRequest attachRequest =
AttachRolePolicyRequest.builder()
                        .roleName(roleName)
                        .policyArn(policy)
                        .build();

                iam.attachRolePolicy(attachRequest);
            }

            // Allow time for the role to be ready.
            TimeUnit.SECONDS.sleep(15);
            System.out.println("Role ready with ARN " + roleResult.role().arn());
            return roleResult.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());

        } catch (InterruptedException e) {
            throw new RuntimeException(e);
        }
```

```
        return "";
    }

    public static String checkFunction(LambdaClient lambdaClient, String
functionName, String filePath, String role,
            String handler) {
        System.out.println("Create an AWS Lambda function used in this workflow.");
        String functionArn;
        try {
            // Does this function already exist.
            GetFunctionRequest functionRequest = GetFunctionRequest.builder()
                    .functionName(functionName)
                    .build();

            GetFunctionResponse response =
lambdaClient.getFunction(functionRequest);
            functionArn = response.configuration().functionArn();

        } catch (LambdaException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            functionArn = createLambdaFunction(lambdaClient, functionName, filePath,
role, handler);
        }
        return functionArn;
    }

    // Check to see if the specific S3 bucket exists. If the S3 bucket exists, this
    // method returns true.
    public static boolean checkBucket(S3Client s3, String bucketName) {
        try {
            HeadBucketRequest headBucketRequest = HeadBucketRequest.builder()
                    .bucket(bucketName)
                    .build();

            s3.headBucket(headBucketRequest);
            System.out.println(bucketName + " exists");
            return true;

        } catch (S3Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
        }
        return false;
    }
```

```
    // Checks to see if the Amazon SQS queue exists. If not, this method creates a
    // new queue
    // and returns the ARN value.
    public static String checkQueue(SqsClient sqsClient, LambdaClient lambdaClient,
String queueName,
            String lambdaName) {
        System.out.println("Creating a queue for this use case.");
        String queueUrl;
        try {
            GetQueueUrlRequest request = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            GetQueueUrlResponse response = sqsClient.getQueueUrl(request);
            queueUrl = response.queueUrl();
            System.out.println(queueUrl);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            queueUrl = setupQueue(sqsClient, lambdaClient, queueName, lambdaName);
        }
        return queueUrl;
    }

    // Checks to see if the Lambda role exists. If not, this method creates it.
    public static String checkLambdaRole(IamClient iam, String roleName) {
        System.out.println("Creating a role to for AWS Lambda to use.");
        String roleArn;
        try {
            GetRoleRequest roleRequest = GetRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            GetRoleResponse response = iam.getRole(roleRequest);
            roleArn = response.role().arn();
            System.out.println(roleArn);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            roleArn = createLambdaRole(iam, roleName);
        }
        return roleArn;
    }
```

```
    // Checks to see if the SageMaker role exists. If not, this method creates it.
    public static String checkSageMakerRole(IamClient iam, String roleName) {
        System.out.println("Creating a role to for AWS SageMaker to use.");
        String roleArn;
        try {
            GetRoleRequest roleRequest = GetRoleRequest.builder()
                    .roleName(roleName)
                    .build();

            GetRoleResponse response = iam.getRole(roleRequest);
            roleArn = response.role().arn();
            System.out.println(roleArn);

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            roleArn = createSageMakerRole(iam, roleName);
        }
        return roleArn;
    }

    private static String[] getSageMakerRolePolicies() {
        String[] sageMakerRolePolicies = new String[3];
        sageMakerRolePolicies[0] = "arn:aws:iam::aws:policy/
AmazonSageMakerFullAccess";
        sageMakerRolePolicies[1] = "arn:aws:iam::aws:policy/" +
 "AmazonSageMakerGeospatialFullAccess";
        sageMakerRolePolicies[2] = "arn:aws:iam::aws:policy/AmazonSQSFullAccess";
        return sageMakerRolePolicies;
    }

    private static String[] getLambdaRolePolicies() {
        String[] lambdaRolePolicies = new String[5];
        lambdaRolePolicies[0] = "arn:aws:iam::aws:policy/AmazonSageMakerFullAccess";
        lambdaRolePolicies[1] = "arn:aws:iam::aws:policy/AmazonSQSFullAccess";
        lambdaRolePolicies[2] = "arn:aws:iam::aws:policy/service-role/" +
 "AmazonSageMakerGeospatialFullAccess";
        lambdaRolePolicies[3] = "arn:aws:iam::aws:policy/service-role/"
                + "AmazonSageMakerServiceCatalogProductsLambdaServiceRolePolicy";
        lambdaRolePolicies[4] = "arn:aws:iam::aws:policy/service-role/" +
 "AWSLambdaSQSQueueExecutionRole";
        return lambdaRolePolicies;
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreatePipeline
  - DeletePipeline
  - DescribePipelineExecution
  - StartPipelineExecution
  - UpdatePipeline

# Secrets Manager contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan Secrets Manager AWS SDK for Java 2.x with.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan

## Tindakan

### `GetSecretValue`

Contoh kode berikut menunjukkan cara menggunakan`GetSecretValue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.secretsmanager.SecretsManagerClient;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueRequest;
import software.amazon.awssdk.services.secretsmanager.model.GetSecretValueResponse;
import software.amazon.awssdk.services.secretsmanager.model.SecretsManagerException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * We recommend that you cache your secret values by using client-side caching.
 *
 * Caching secrets improves speed and reduces your costs. For more information,
 * see the following documentation topic:
 *
 * https://docs.aws.amazon.com/secretsmanager/latest/userguide/retrieving-
secrets.html
 */
public class GetSecretValue {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <secretName>\s

                Where:
                    secretName - The name of the secret (for example, tutorials/
MyFirstSecret).\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String secretName = args[0];
        Region region = Region.US_EAST_1;
        SecretsManagerClient secretsClient = SecretsManagerClient.builder()
                .region(region)
```

```
                .build();

        getValue(secretsClient, secretName);
        secretsClient.close();
    }

    public static void getValue(SecretsManagerClient secretsClient, String
 secretName) {
        try {
            GetSecretValueRequest valueRequest = GetSecretValueRequest.builder()
                    .secretId(secretName)
                    .build();

            GetSecretValueResponse valueResponse =
 secretsClient.getSecretValue(valueRequest);
            String secret = valueResponse.secretString();
            System.out.println(secret);

        } catch (SecretsManagerException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetSecretValuedi Referensi AWS SDK for Java 2.x API.

# Amazon SES contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x With Amazon SES.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


# Tindakan

### `ListIdentities`

Contoh kode berikut menunjukkan cara menggunakan`ListIdentities`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import software.amazon.awssdk.services.ses.model.ListIdentitiesResponse;
import software.amazon.awssdk.services.ses.model.SesException;
import java.io.IOException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListIdentities {

    public static void main(String[] args) throws IOException {
        Region region = Region.US_WEST_2;
```

```
        SesClient client = SesClient.builder()
                .region(region)
                .build();

        listSESIdentities(client);
    }

    public static void listSESIdentities(SesClient client) {
        try {
            ListIdentitiesResponse identitiesResponse = client.listIdentities();
            List<String> identities = identitiesResponse.identities();
            for (String identity : identities) {
                System.out.println("The identity is " + identity);
            }

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListIdentitiesdi Referensi AWS SDK for Java 2.x API.

### `ListTemplates`

Contoh kode berikut menunjukkan cara menggunakan`ListTemplates`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.SesV2Client;
import software.amazon.awssdk.services.sesv2.model.ListEmailTemplatesRequest;
import software.amazon.awssdk.services.sesv2.model.ListEmailTemplatesResponse;
```

```
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;

public class ListTemplates {

    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        listAllTemplates(sesv2Client);
    }

    public static void listAllTemplates(SesV2Client sesv2Client) {
        try {
            ListEmailTemplatesRequest templatesRequest =
 ListEmailTemplatesRequest.builder()
                    .pageSize(1)
                    .build();

            ListEmailTemplatesResponse response =
 sesv2Client.listEmailTemplates(templatesRequest);
            response.templatesMetadata()
                    .forEach(template -> System.out.println("Template name: " +
 template.templateName()));

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListTemplatesdi Referensi AWS SDK for Java 2.x API.

### `SendEmail`

Contoh kode berikut menunjukkan cara menggunakan`SendEmail`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import software.amazon.awssdk.services.ses.model.Content;
import software.amazon.awssdk.services.ses.model.Destination;
import software.amazon.awssdk.services.ses.model.Message;
import software.amazon.awssdk.services.ses.model.Body;
import software.amazon.awssdk.services.ses.model.SendEmailRequest;
import software.amazon.awssdk.services.ses.model.SesException;

import javax.mail.MessagingException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessageEmailRequest {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <sender> <recipient> <subject>\s

                Where:
                    sender - An email address that represents the sender.\s
                    recipient -  An email address that represents the recipient.\s
                    subject - The  subject line.\s
                """;

        if (args.length != 3) {
            System.out.println(usage);
```

```
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];

        Region region = Region.US_EAST_1;
        SesClient client = SesClient.builder()
                .region(region)
                .build();

        // The HTML body of the email.
        String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
                + "<p> See the list of customers.</p>" + "</body>" + "</html>";

        try {
            send(client, sender, recipient, subject, bodyHTML);
            client.close();
            System.out.println("Done");

        } catch (MessagingException e) {
            e.printStackTrace();
        }
    }

    public static void send(SesClient client,
            String sender,
            String recipient,
            String subject,
            String bodyHTML) throws MessagingException {

        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();

        Content content = Content.builder()
                .data(bodyHTML)
                .build();

        Content sub = Content.builder()
                .data(subject)
                .build();
```

```
        Body body = Body.builder()
                .html(content)
                .build();

        Message msg = Message.builder()
                .subject(sub)
                .body(body)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
                .message(msg)
                .source(sender)
                .build();

        try {
            System.out.println("Attempting to send an email through Amazon SES " +
 "using the AWS SDK for Java...");
            client.sendEmail(emailRequest);

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ses.SesClient;
import javax.activation.DataHandler;
import javax.activation.DataSource;
import javax.mail.Message;
import javax.mail.MessagingException;
import javax.mail.Session;
import javax.mail.internet.AddressException;
import javax.mail.internet.InternetAddress;
import javax.mail.internet.MimeMessage;
import javax.mail.internet.MimeMultipart;
import javax.mail.internet.MimeBodyPart;
import javax.mail.util.ByteArrayDataSource;
import java.io.ByteArrayOutputStream;
import java.io.IOException;
import java.nio.ByteBuffer;
import java.nio.file.Files;
```

```
import java.util.Properties;
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.services.ses.model.SendRawEmailRequest;
import software.amazon.awssdk.services.ses.model.RawMessage;
import software.amazon.awssdk.services.ses.model.SesException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class SendMessageAttachment {
    public static void main(String[] args) throws IOException {
        final String usage = """

                Usage:
                    <sender> <recipient> <subject> <fileLocation>\s

                Where:
                    sender - An email address that represents the sender.\s
                    recipient -  An email address that represents the recipient.\s
                    subject - The  subject line.\s
                    fileLocation - The location of a Microsoft Excel file to use as
 an attachment (C:/AWS/customers.xls).\s
                """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];
        String fileLocation = args[3];

        // The email body for recipients with non-HTML email clients.
        String bodyText = "Hello,\r\n" + "Please see the attached file for a list "
                + "of customers to contact.";
```

```
        // The HTML body of the email.
        String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
                + "<p>Please see the attached file for a " + "list of customers to
contact.</p>" + "</body>"
                + "</html>";

        Region region = Region.US_WEST_2;
        SesClient client = SesClient.builder()
                .region(region)
                .build();

        try {
            sendemailAttachment(client, sender, recipient, subject, bodyText,
bodyHTML, fileLocation);
            client.close();
            System.out.println("Done");

        } catch (IOException | MessagingException e) {
            e.printStackTrace();
        }
    }

    public static void sendemailAttachment(SesClient client,
            String sender,
            String recipient,
            String subject,
            String bodyText,
            String bodyHTML,
            String fileLocation) throws AddressException, MessagingException,
IOException {

        java.io.File theFile = new java.io.File(fileLocation);
        byte[] fileContent = Files.readAllBytes(theFile.toPath());

        Session session = Session.getDefaultInstance(new Properties());

        // Create a new MimeMessage object.
        MimeMessage message = new MimeMessage(session);

        // Add subject, from and to lines.
        message.setSubject(subject, "UTF-8");
        message.setFrom(new InternetAddress(sender));
        message.setRecipients(Message.RecipientType.TO,
InternetAddress.parse(recipient));
```

```
        // Create a multipart/alternative child container.
        MimeMultipart msgBody = new MimeMultipart("alternative");

        // Create a wrapper for the HTML and text parts.
        MimeBodyPart wrap = new MimeBodyPart();

        // Define the text part.
        MimeBodyPart textPart = new MimeBodyPart();
        textPart.setContent(bodyText, "text/plain; charset=UTF-8");

        // Define the HTML part.
        MimeBodyPart htmlPart = new MimeBodyPart();
        htmlPart.setContent(bodyHTML, "text/html; charset=UTF-8");

        // Add the text and HTML parts to the child container.
        msgBody.addBodyPart(textPart);
        msgBody.addBodyPart(htmlPart);

        // Add the child container to the wrapper object.
        wrap.setContent(msgBody);

        // Create a multipart/mixed parent container.
        MimeMultipart msg = new MimeMultipart("mixed");

        // Add the parent container to the message.
        message.setContent(msg);
        msg.addBodyPart(wrap);

        // Define the attachment.
        MimeBodyPart att = new MimeBodyPart();
        DataSource fds = new ByteArrayDataSource(fileContent,
                "application/vnd.openxmlformats-
officedocument.spreadsheetml.sheet");
        att.setDataHandler(new DataHandler(fds));

        String reportName = "WorkReport.xls";
        att.setFileName(reportName);

        // Add the attachment to the message.
        msg.addBodyPart(att);

        try {
```

```
            System.out.println("Attempting to send an email through Amazon SES " +
 "using the AWS SDK for Java...");

            ByteArrayOutputStream outputStream = new ByteArrayOutputStream();
            message.writeTo(outputStream);

            ByteBuffer buf = ByteBuffer.wrap(outputStream.toByteArray());

            byte[] arr = new byte[buf.remaining()];
            buf.get(arr);

            SdkBytes data = SdkBytes.fromByteArray(arr);
            RawMessage rawMessage = RawMessage.builder()
                    .data(data)
                    .build();

            SendRawEmailRequest rawEmailRequest = SendRawEmailRequest.builder()
                    .rawMessage(rawMessage)
                    .build();

            client.sendRawEmail(rawEmailRequest);

        } catch (SesException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        System.out.println("Email sent using SesClient with attachment");
    }
}
```

- Untuk detail API, lihat SendEmaildi Referensi AWS SDK for Java 2.x API.

### `SendTemplatedEmail`

Contoh kode berikut menunjukkan cara menggunakan`SendTemplatedEmail`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.model.Destination;
import software.amazon.awssdk.services.sesv2.model.EmailContent;
import software.amazon.awssdk.services.sesv2.model.SendEmailRequest;
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;
import software.amazon.awssdk.services.sesv2.SesV2Client;
import software.amazon.awssdk.services.sesv2.model.Template;

/**
 * Before running this AWS SDK for Java (v2) example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * Also, make sure that you create a template. See the following documentation
 * topic:
 *
 * https://docs.aws.amazon.com/ses/latest/dg/send-personalized-email-api.html
 */

public class SendEmailTemplate {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <template> <sender> <recipient>\s

                Where:
                    template - The name of the email template.
                    sender - An email address that represents the sender.\s
                    recipient - An email address that represents the recipient.\s
                """;
```

```
        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String templateName = args[0];
        String sender = args[1];
        String recipient = args[2];
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        send(sesv2Client, sender, recipient, templateName);
    }

    public static void send(SesV2Client client, String sender, String recipient,
String templateName) {
        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();

        /*
         * Specify both name and favorite animal (favoriteanimal) in your code when
         * defining the Template object.
         * If you don't specify all the variables in the template, Amazon SES
doesn't
         * send the email.
         */
        Template myTemplate = Template.builder()
                .templateName(templateName)
                .templateData("{\n" +
                        "  \"name\": \"Jason\"\n," +
                        "  \"favoriteanimal\": \"Cat\"\n" +
                        "}")
                .build();

        EmailContent emailContent = EmailContent.builder()
                .template(myTemplate)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
```

```
                .content(emailContent)
                .fromEmailAddress(sender)
                .build();

        try {
            System.out.println("Attempting to send an email based on a template
 using the AWS SDK for Java (v2)...");
            client.sendEmail(emailRequest);
            System.out.println("email based on a template was sent");

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SendTemplatedEmaildi Referensi AWS SDK for Java 2.x API.

## Skenario

Membuat aplikasi web untuk melacak data DynamoDB

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item kerja dalam tabel Amazon DynamoDB dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon DynamoDB API untuk membuat aplikasi web dinamis yang melacak data kerja DynamoDB.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon SES

### Buat aplikasi web untuk melacak data Amazon Redshift

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak dan melaporkan item pekerjaan menggunakan database Amazon Redshift.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan item pekerjaan yang disimpan dalam database Amazon Redshift.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Redshift dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Amazon Redshift
- Amazon SES

### Buat pelacak butir kerja Aurora Nirserver

Contoh kode berikut menunjukkan cara membuat aplikasi web yang melacak item pekerjaan dalam database Amazon Aurora Tanpa Server dan menggunakan Amazon Simple Email Service (Amazon SES) untuk mengirim laporan.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web yang melacak dan melaporkan butir kerja yang tersimpan dalam basis data Amazon RDS.

Untuk kode sumber lengkap dan petunjuk tentang cara menyiapkan Spring REST API yang menanyakan data Amazon Aurora Tanpa Server dan untuk digunakan oleh aplikasi React, lihat contoh lengkapnya di. GitHub

Untuk kode sumber lengkap dan instruksi tentang cara menyiapkan dan menjalankan contoh yang menggunakan JDBC API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Aurora
- Amazon RDS

- Layanan Data Amazon RDS
- Amazon SES

### Mendeteksi APD dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi Alat Pelindung Diri (APD) dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi yang mendeteksi gambar dengan Alat Pelindung Diri.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon Rekognition
- Amazon S3
- Amazon SES

### Mendeteksi objek dalam gambar

Contoh kode berikut menunjukkan cara membuat aplikasi yang menggunakan Amazon Rekognition untuk mendeteksi objek berdasarkan kategori dalam gambar.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi yang menggunakan Amazon Rekognition untuk mengidentifikasi objek berdasarkan kategori dalam gambar yang terletak di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES

Mendeteksi orang dan objek dalam video

Contoh kode berikut menunjukkan cara mendeteksi orang dan objek dalam video dengan Amazon Rekognition.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi guna mendeteksi wajah dan objek di video yang berada di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Menggunakan Step Functions untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat mesin AWS Step Functions status yang memanggil AWS Lambda fungsi secara berurutan.

SDK untuk Java 2.x

Menunjukkan cara membuat alur kerja AWS tanpa server dengan menggunakan AWS Step Functions dan. AWS SDK for Java 2.x Setiap langkah alur kerja diimplementasikan menggunakan AWS Lambda fungsi.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

# Amazon SES API v2 contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Amazon SES API v2.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


## Tindakan

### `CreateContact`

Contoh kode berikut menunjukkan cara menggunakan`CreateContact`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
      try {
        // Create a new contact with the provided email address in the
        CreateContactRequest contactRequest = CreateContactRequest.builder()
            .contactListName(CONTACT_LIST_NAME)
            .emailAddress(emailAddress)
            .build();

        sesClient.createContact(contactRequest);
        contacts.add(emailAddress);

        System.out.println("Contact created: " + emailAddress);

        // Send a welcome email to the new contact
        String welcomeHtml = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.html"));
        String welcomeText = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.txt"));

        SendEmailRequest welcomeEmailRequest = SendEmailRequest.builder()
            .fromEmailAddress(this.verifiedEmail)
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .simple(
                    Message.builder()
                        .subject(Content.builder().data("Welcome to the Weekly
 Coupons Newsletter").build())
                        .body(Body.builder()
                            .text(Content.builder().data(welcomeText).build())
                            .html(Content.builder().data(welcomeHtml).build())
                            .build())
                        .build())
                .build())
            .build();
```

```
        SendEmailResponse welcomeEmailResponse =
sesClient.sendEmail(welcomeEmailRequest);
        System.out.println("Welcome email sent: " +
welcomeEmailResponse.messageId());
      } catch (AlreadyExistsException e) {
        // If the contact already exists, skip this step for that contact and
proceed
        // with the next contact
        System.out.println("Contact already exists, skipping creation...");
      } catch (Exception e) {
        System.err.println("Error occurred while processing email address " +
emailAddress + ": " + e.getMessage());
        throw e;
      }
    }
```

- Untuk detail API, lihat CreateContactdi Referensi AWS SDK for Java 2.x API.

### `CreateContactList`

Contoh kode berikut menunjukkan cara menggunakan`CreateContactList`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    try {
      // 2. Create a contact list
      String contactListName = CONTACT_LIST_NAME;
      CreateContactListRequest createContactListRequest =
CreateContactListRequest.builder()
          .contactListName(contactListName)
          .build();
      sesClient.createContactList(createContactListRequest);
      System.out.println("Contact list created: " + contactListName);
    } catch (AlreadyExistsException e) {
```

```
      System.out.println("Contact list already exists, skipping creation: weekly-
coupons-newsletter");
    } catch (LimitExceededException e) {
      System.err.println("Limit for contact lists has been exceeded.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating contact list: " + e.getMessage());
      throw e;
    }
```

- Untuk detail API, lihat CreateContactListdi Referensi AWS SDK for Java 2.x API.

### `CreateEmailIdentity`

Contoh kode berikut menunjukkan cara menggunakan`CreateEmailIdentity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   try {
     CreateEmailIdentityRequest createEmailIdentityRequest =
 CreateEmailIdentityRequest.builder()
         .emailIdentity(verifiedEmail)
         .build();
     sesClient.createEmailIdentity(createEmailIdentityRequest);
     System.out.println("Email identity created: " + verifiedEmail);
   } catch (AlreadyExistsException e) {
     System.out.println("Email identity already exists, skipping creation: " +
 verifiedEmail);
   } catch (NotFoundException e) {
     System.err.println("The provided email address is not verified: " +
 verifiedEmail);
     throw e;
   } catch (LimitExceededException e) {
     System.err
```

```
            .println("You have reached the limit for email identities. Please remove
 some identities and try again.");
        throw e;
      } catch (SesV2Exception e) {
        System.err.println("Error creating email identity: " + e.getMessage());
        throw e;
      }
```

- Untuk detail API, lihat CreateEmailIdentitydi Referensi AWS SDK for Java 2.x API.

### `CreateEmailTemplate`

Contoh kode berikut menunjukkan cara menggunakan`CreateEmailTemplate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    try {
      // Create an email template named "weekly-coupons"
      String newsletterHtml = loadFile("resources/coupon_newsletter/coupon-
newsletter.html");
      String newsletterText = loadFile("resources/coupon_newsletter/coupon-
newsletter.txt");

      CreateEmailTemplateRequest templateRequest =
 CreateEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .templateContent(EmailTemplateContent.builder()
              .subject("Weekly Coupons Newsletter")
              .html(newsletterHtml)
              .text(newsletterText)
              .build())
          .build();

      sesClient.createEmailTemplate(templateRequest);
```

```
      System.out.println("Email template created: " + TEMPLATE_NAME);
    } catch (AlreadyExistsException e) {
      // If the template already exists, skip this step and proceed with the next
      // operation
      System.out.println("Email template already exists, skipping creation...");
    } catch (LimitExceededException e) {
      // If the limit for email templates is exceeded, fail the workflow and inform
      // the user
      System.err.println("You have reached the limit for email templates. Please
remove some templates and try again.");
      throw e;
    } catch (Exception e) {
      System.err.println("Error occurred while creating email template: " +
e.getMessage());
      throw e;
    }
```

- Untuk detail API, lihat CreateEmailTemplatedi Referensi AWS SDK for Java 2.x API.

### `DeleteContactList`

Contoh kode berikut menunjukkan cara menggunakan`DeleteContactList`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    try {
      // Delete the contact list
      DeleteContactListRequest deleteContactListRequest =
DeleteContactListRequest.builder()
          .contactListName(CONTACT_LIST_NAME)
          .build();

      sesClient.deleteContactList(deleteContactListRequest);
```

```
      System.out.println("Contact list deleted: " + CONTACT_LIST_NAME);
    } catch (NotFoundException e) {
      // If the contact list does not exist, log the error and proceed
      System.out.println("Contact list not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the contact list: " +
e.getMessage());
      e.printStackTrace();
    }
```

- Untuk detail API, lihat DeleteContactListdi Referensi AWS SDK for Java 2.x API.

### `DeleteEmailIdentity`

Contoh kode berikut menunjukkan cara menggunakan`DeleteEmailIdentity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
     try {
       // Delete the email identity
       DeleteEmailIdentityRequest deleteIdentityRequest =
DeleteEmailIdentityRequest.builder()
           .emailIdentity(this.verifiedEmail)
           .build();

       sesClient.deleteEmailIdentity(deleteIdentityRequest);

       System.out.println("Email identity deleted: " + this.verifiedEmail);
     } catch (NotFoundException e) {
       // If the email identity does not exist, log the error and proceed
       System.out.println("Email identity not found. Skipping deletion...");
     } catch (Exception e) {
       System.err.println("Error occurred while deleting the email identity: " +
e.getMessage());
       e.printStackTrace();
```

```
      }
    } else {
      System.out.println("Skipping email identity deletion.");
    }
```

- Untuk detail API, lihat DeleteEmailIdentitydi Referensi AWS SDK for Java 2.x API.

### `DeleteEmailTemplate`

Contoh kode berikut menunjukkan cara menggunakan`DeleteEmailTemplate`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    try {
      // Delete the template
      DeleteEmailTemplateRequest deleteTemplateRequest =
DeleteEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .build();

      sesClient.deleteEmailTemplate(deleteTemplateRequest);

      System.out.println("Email template deleted: " + TEMPLATE_NAME);
    } catch (NotFoundException e) {
      // If the email template does not exist, log the error and proceed
      System.out.println("Email template not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the email template: " +
e.getMessage());
      e.printStackTrace();
    }
```

- Untuk detail API, lihat DeleteEmailTemplatedi Referensi AWS SDK for Java 2.x API.

### `ListContacts`

Contoh kode berikut menunjukkan cara menggunakan`ListContacts`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
     ListContactsRequest contactListRequest = ListContactsRequest.builder()
         .contactListName(CONTACT_LIST_NAME)
         .build();

     List<String> contactEmails;
     try {
       ListContactsResponse contactListResponse =
sesClient.listContacts(contactListRequest);

       contactEmails = contactListResponse.contacts().stream()
           .map(Contact::emailAddress)
           .toList();
     } catch (Exception e) {
       // TODO: Remove when listContacts's GET body issue is resolved.
       contactEmails = this.contacts;
     }
```

- Untuk detail API, lihat ListContactsdi Referensi AWS SDK for Java 2.x API.

### `SendEmail`

Contoh kode berikut menunjukkan cara menggunakan`SendEmail`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mengirim pesan.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sesv2.model.Body;
import software.amazon.awssdk.services.sesv2.model.Content;
import software.amazon.awssdk.services.sesv2.model.Destination;
import software.amazon.awssdk.services.sesv2.model.EmailContent;
import software.amazon.awssdk.services.sesv2.model.Message;
import software.amazon.awssdk.services.sesv2.model.SendEmailRequest;
import software.amazon.awssdk.services.sesv2.model.SesV2Exception;
import software.amazon.awssdk.services.sesv2.SesV2Client;

/**
 * Before running this AWS SDK for Java (v2) example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class SendEmail {
    public static void main(String[] args) {
        final String usage = """

                             Usage:
                                 <sender> <recipient> <subject>\s

                             Where:
                                 sender - An email address that represents the
 sender.\s
                                 recipient - An email address that represents the
 recipient.\s
                                 subject - The subject line.\s
```

```
                            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];

        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        // The HTML body of the email.
        String bodyHTML = "<html>" + "<head></head>" + "<body>" + "<h1>Hello!</h1>"
                + "<p> See the list of customers.</p>" + "</body>" + "</html>";

        send(sesv2Client, sender, recipient, subject, bodyHTML);
    }

    public static void send(SesV2Client client,
                            String sender,
                            String recipient,
                            String subject,
                            String bodyHTML) {

        Destination destination = Destination.builder()
                .toAddresses(recipient)
                .build();

        Content content = Content.builder()
                .data(bodyHTML)
                .build();

        Content sub = Content.builder()
                .data(subject)
                .build();

        Body body = Body.builder()
                .html(content)
                .build();
```

```
        Message msg = Message.builder()
                .subject(sub)
                .body(body)
                .build();

        EmailContent emailContent = EmailContent.builder()
                .simple(msg)
                .build();

        SendEmailRequest emailRequest = SendEmailRequest.builder()
                .destination(destination)
                .content(emailContent)
                .fromEmailAddress(sender)
                .build();

        try {
            System.out.println("Attempting to send an email through Amazon SES "
                    + "using the AWS SDK for Java...");
            client.sendEmail(emailRequest);
            System.out.println("email was sent");

        } catch (SesV2Exception e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Mengirim pesan menggunakan template.

```
      String coupons = Files.readString(Paths.get("resources/coupon_newsletter/
sample_coupons.json"));
      for (String emailAddress : contactEmails) {
        SendEmailRequest newsletterRequest = SendEmailRequest.builder()
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .template(Template.builder()
                    .templateName(TEMPLATE_NAME)
                    .templateData(coupons)
                    .build())
                .build())
```

```
            .fromEmailAddress(this.verifiedEmail)
            .listManagementOptions(ListManagementOptions.builder()
                .contactListName(CONTACT_LIST_NAME)
                .build())
            .build();
        SendEmailResponse newsletterResponse =
sesClient.sendEmail(newsletterRequest);
        System.out.println("Newsletter sent to " + emailAddress + ": " +
newsletterResponse.messageId());
     }
```

Mengirim pesan dengan informasi header.

```
public class SendwithHeader {

    public static void main(String[] args) {
        final String usage = """

            Usage:
                <sender> <recipient> <subject>\s

            Where:
                sender - An email address that represents the sender.\s
                recipient - An email address that represents the recipient.\s
                subject - The subject line.\s
            """;

        if (args.length != 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String sender = args[0];
        String recipient = args[1];
        String subject = args[2];
        Region region = Region.US_EAST_1;
        SesV2Client sesv2Client = SesV2Client.builder()
                .region(region)
                .build();

        String bodyHTML = """
                <html>
```

```
                    <head></head>
                    <body>
                        <h1>Hello!</h1>
                        <p>See the list of customers.</p>
                    </body>
                </html>
                """;

        sendWithHeader(sesv2Client, sender, recipient, subject, bodyHTML);
        sesv2Client.close();
    }

    /**
     * Sends an email using the AWS SES V2 client.
     *
     * @param sesv2Client the SES V2 client to use for sending the email
     * @param sender the email address of the sender
     * @param recipient the email address of the recipient
     * @param subject the subject of the email
     * @param bodyHTML the HTML content of the email body
     */
    public static void sendWithHeader(SesV2Client sesv2Client,
                                      String sender,
                                      String recipient,
                                      String subject,
                                      String bodyHTML) {
        EmailContent emailContent = EmailContent.builder()
                .simple(Message.builder()
                        .body(b -> b.html(c ->
 c.charset(UTF_8.name()).data(bodyHTML))
                                .text(c -> c.charset(UTF_8.name()).data(bodyHTML)))
                        .subject(c -> c.charset(UTF_8.name()).data(subject))
                        .headers(List.of(
                                MessageHeader.builder()
                                        .name("List-Unsubscribe")
                                        .value("<https://nutrition.co/?
address=x&topic=x>, <mailto:unsubscribe@nutrition.co?subject=TopicUnsubscribe>")
                                        .build(),
                                MessageHeader.builder()
                                        .name("List-Unsubscribe-Post")
                                        .value("List-Unsubscribe=One-Click")
                                        .build()))
                        .build())
                .build();
```

```
        SendEmailRequest request = SendEmailRequest.builder()
                .fromEmailAddress(sender)
                .destination(d -> d.toAddresses(recipient))
                .content(emailContent)
                .build();

        try {
            SendEmailResponse response = sesv2Client.sendEmail(request);
            System.out.println("Email sent! Message ID: " + response.messageId());
        } catch (SesV2Exception e) {
            System.err.println("Failed to send email: " +
 e.awsErrorDetails().errorMessage());
            throw new RuntimeException(e);
        }
    }
}
```

- Untuk detail API, lihat SendEmaildi Referensi AWS SDK for Java 2.x API.

## Skenario

### Skenario buletin

Contoh kode berikut menunjukkan cara menjalankan skenario buletin Amazon SES API v2.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
    try {
      // 2. Create a contact list
      String contactListName = CONTACT_LIST_NAME;
      CreateContactListRequest createContactListRequest =
 CreateContactListRequest.builder()
          .contactListName(contactListName)
```

```
            .build();
      sesClient.createContactList(createContactListRequest);
      System.out.println("Contact list created: " + contactListName);
    } catch (AlreadyExistsException e) {
      System.out.println("Contact list already exists, skipping creation: weekly-
coupons-newsletter");
    } catch (LimitExceededException e) {
      System.err.println("Limit for contact lists has been exceeded.");
      throw e;
    } catch (SesV2Exception e) {
      System.err.println("Error creating contact list: " + e.getMessage());
      throw e;
    }

      try {
        // Create a new contact with the provided email address in the
        CreateContactRequest contactRequest = CreateContactRequest.builder()
            .contactListName(CONTACT_LIST_NAME)
            .emailAddress(emailAddress)
            .build();

        sesClient.createContact(contactRequest);
        contacts.add(emailAddress);

        System.out.println("Contact created: " + emailAddress);

        // Send a welcome email to the new contact
        String welcomeHtml = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.html"));
        String welcomeText = Files.readString(Paths.get("resources/
coupon_newsletter/welcome.txt"));

        SendEmailRequest welcomeEmailRequest = SendEmailRequest.builder()
            .fromEmailAddress(this.verifiedEmail)
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .simple(
                    Message.builder()
                        .subject(Content.builder().data("Welcome to the Weekly
 Coupons Newsletter").build())
                        .body(Body.builder()
                            .text(Content.builder().data(welcomeText).build())
                            .html(Content.builder().data(welcomeHtml).build())
                            .build())
```

```
                        .build())
                .build())
            .build();
        SendEmailResponse welcomeEmailResponse =
 sesClient.sendEmail(welcomeEmailRequest);
        System.out.println("Welcome email sent: " +
 welcomeEmailResponse.messageId());
     } catch (AlreadyExistsException e) {
        // If the contact already exists, skip this step for that contact and
 proceed
        // with the next contact
        System.out.println("Contact already exists, skipping creation...");
     } catch (Exception e) {
        System.err.println("Error occurred while processing email address " +
 emailAddress + ": " + e.getMessage());
        throw e;
     }
   }

     ListContactsRequest contactListRequest = ListContactsRequest.builder()
         .contactListName(CONTACT_LIST_NAME)
         .build();

     List<String> contactEmails;
     try {
        ListContactsResponse contactListResponse =
 sesClient.listContacts(contactListRequest);

        contactEmails = contactListResponse.contacts().stream()
            .map(Contact::emailAddress)
            .toList();
     } catch (Exception e) {
        // TODO: Remove when listContacts's GET body issue is resolved.
        contactEmails = this.contacts;
     }


     String coupons = Files.readString(Paths.get("resources/coupon_newsletter/
sample_coupons.json"));
     for (String emailAddress : contactEmails) {
        SendEmailRequest newsletterRequest = SendEmailRequest.builder()
            .destination(Destination.builder().toAddresses(emailAddress).build())
            .content(EmailContent.builder()
                .template(Template.builder()
```

```
                    .templateName(TEMPLATE_NAME)
                    .templateData(coupons)
                    .build())
                .build())
            .fromEmailAddress(this.verifiedEmail)
            .listManagementOptions(ListManagementOptions.builder()
                .contactListName(CONTACT_LIST_NAME)
                .build())
            .build();
        SendEmailResponse newsletterResponse =
 sesClient.sendEmail(newsletterRequest);
        System.out.println("Newsletter sent to " + emailAddress + ": " +
 newsletterResponse.messageId());
     }

   try {
     CreateEmailIdentityRequest createEmailIdentityRequest =
 CreateEmailIdentityRequest.builder()
         .emailIdentity(verifiedEmail)
         .build();
     sesClient.createEmailIdentity(createEmailIdentityRequest);
     System.out.println("Email identity created: " + verifiedEmail);
   } catch (AlreadyExistsException e) {
     System.out.println("Email identity already exists, skipping creation: " +
 verifiedEmail);
   } catch (NotFoundException e) {
     System.err.println("The provided email address is not verified: " +
 verifiedEmail);
     throw e;
   } catch (LimitExceededException e) {
     System.err
         .println("You have reached the limit for email identities. Please remove
 some identities and try again.");
     throw e;
   } catch (SesV2Exception e) {
     System.err.println("Error creating email identity: " + e.getMessage());
     throw e;
   }

   try {
     // Create an email template named "weekly-coupons"
     String newsletterHtml = loadFile("resources/coupon_newsletter/coupon-
newsletter.html");
```

```
      String newsletterText = loadFile("resources/coupon_newsletter/coupon-
newsletter.txt");

      CreateEmailTemplateRequest templateRequest =
 CreateEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .templateContent(EmailTemplateContent.builder()
              .subject("Weekly Coupons Newsletter")
              .html(newsletterHtml)
              .text(newsletterText)
              .build())
          .build();

      sesClient.createEmailTemplate(templateRequest);

      System.out.println("Email template created: " + TEMPLATE_NAME);
    } catch (AlreadyExistsException e) {
      // If the template already exists, skip this step and proceed with the next
      // operation
      System.out.println("Email template already exists, skipping creation...");
    } catch (LimitExceededException e) {
      // If the limit for email templates is exceeded, fail the workflow and inform
      // the user
      System.err.println("You have reached the limit for email templates. Please
 remove some templates and try again.");
      throw e;
    } catch (Exception e) {
      System.err.println("Error occurred while creating email template: " +
 e.getMessage());
      throw e;
    }

    try {
      // Delete the contact list
      DeleteContactListRequest deleteContactListRequest =
 DeleteContactListRequest.builder()
          .contactListName(CONTACT_LIST_NAME)
          .build();

      sesClient.deleteContactList(deleteContactListRequest);

      System.out.println("Contact list deleted: " + CONTACT_LIST_NAME);
    } catch (NotFoundException e) {
      // If the contact list does not exist, log the error and proceed
```

```
      System.out.println("Contact list not found. Skipping deletion...");
    } catch (Exception e) {
      System.err.println("Error occurred while deleting the contact list: " +
e.getMessage());
      e.printStackTrace();
    }

      try {
        // Delete the email identity
        DeleteEmailIdentityRequest deleteIdentityRequest =
DeleteEmailIdentityRequest.builder()
            .emailIdentity(this.verifiedEmail)
            .build();

        sesClient.deleteEmailIdentity(deleteIdentityRequest);

        System.out.println("Email identity deleted: " + this.verifiedEmail);
      } catch (NotFoundException e) {
        // If the email identity does not exist, log the error and proceed
        System.out.println("Email identity not found. Skipping deletion...");
      } catch (Exception e) {
        System.err.println("Error occurred while deleting the email identity: " +
e.getMessage());
        e.printStackTrace();
      }
    } else {
      System.out.println("Skipping email identity deletion.");
    }

    try {
      // Delete the template
      DeleteEmailTemplateRequest deleteTemplateRequest =
DeleteEmailTemplateRequest.builder()
          .templateName(TEMPLATE_NAME)
          .build();

      sesClient.deleteEmailTemplate(deleteTemplateRequest);

      System.out.println("Email template deleted: " + TEMPLATE_NAME);
    } catch (NotFoundException e) {
      // If the email template does not exist, log the error and proceed
      System.out.println("Email template not found. Skipping deletion...");
    } catch (Exception e) {
```

```
        System.err.println("Error occurred while deleting the email template: " +
e.getMessage());
        e.printStackTrace();
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateContact
  - CreateContactList
  - CreateEmailIdentity
  - CreateEmailTemplate
  - DeleteContactList
  - DeleteEmailIdentity
  - DeleteEmailTemplate
  - ListContacts
  - SendEmail.sederhana
  - SendEmail.template

# Contoh Amazon SNS menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan AWS SDK for Java 2.x dengan Amazon SNS.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai

- Tindakan
- Skenario
- Contoh nirserver

## Memulai

### Halo Amazon SNS

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon SNS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
package com.example.sns;

import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.paginators.ListTopicsIterable;

public class HelloSNS {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSTopics(snsClient);
        snsClient.close();
    }

    public static void listSNSTopics(SnsClient snsClient) {
        try {
            ListTopicsIterable listTopics = snsClient.listTopicsPaginator();
            listTopics.stream()
                    .flatMap(r -> r.topics().stream())
```

```
                    .forEach(content -> System.out.println(" Topic ARN: " +
 content.topicArn()));

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListTopicsdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `CheckIfPhoneNumberIsOptedOut`

Contoh kode berikut menunjukkan cara menggunakan`CheckIfPhoneNumberIsOptedOut`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import
 software.amazon.awssdk.services.sns.model.CheckIfPhoneNumberIsOptedOutRequest;
import
 software.amazon.awssdk.services.sns.model.CheckIfPhoneNumberIsOptedOutResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CheckOptOut {
    public static void main(String[] args) {

        final String usage = """

                Usage:    <phoneNumber>

                Where:
                   phoneNumber - The mobile phone number to look up (for example,
 +1XXX5550100).

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String phoneNumber = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        checkPhone(snsClient, phoneNumber);
        snsClient.close();
    }

    public static void checkPhone(SnsClient snsClient, String phoneNumber) {
        try {
            CheckIfPhoneNumberIsOptedOutRequest request =
 CheckIfPhoneNumberIsOptedOutRequest.builder()
                    .phoneNumber(phoneNumber)
                    .build();

            CheckIfPhoneNumberIsOptedOutResponse result =
 snsClient.checkIfPhoneNumberIsOptedOut(request);
            System.out.println(
                    result.isOptedOut() + "Phone Number " + phoneNumber + " has
 Opted Out of receiving sns messages." +
                            "\n\nStatus was " +
 result.sdkHttpResponse().statusCode());
```

```
        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CheckIfPhoneNumberIsOptedOutdi Referensi AWS SDK for Java 2.x API.

### `ConfirmSubscription`

Contoh kode berikut menunjukkan cara menggunakan`ConfirmSubscription`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ConfirmSubscriptionRequest;
import software.amazon.awssdk.services.sns.model.ConfirmSubscriptionResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ConfirmSubscription {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:    <subscriptionToken> <topicArn>

                Where:
                   subscriptionToken - A short-lived token sent to an endpoint
 during the Subscribe action.
                   topicArn - The ARN of the topic.\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionToken = args[0];
        String topicArn = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        confirmSub(snsClient, subscriptionToken, topicArn);
        snsClient.close();
    }

    public static void confirmSub(SnsClient snsClient, String subscriptionToken,
 String topicArn) {
        try {
            ConfirmSubscriptionRequest request =
 ConfirmSubscriptionRequest.builder()
                    .token(subscriptionToken)
                    .topicArn(topicArn)
                    .build();

            ConfirmSubscriptionResponse result =
 snsClient.confirmSubscription(request);
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode() + "\n\nSubscription Arn: \n\n"
                    + result.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ConfirmSubscriptiondi Referensi AWS SDK for Java 2.x API.

### `CreateTopic`

Contoh kode berikut menunjukkan cara menggunakan`CreateTopic`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicName>

                Where:
                   topicName - The name of the topic to create (for example,
 mytopic).

                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicName = args[0];
        System.out.println("Creating a topic with name: " + topicName);
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String arnVal = createSNSTopic(snsClient, topicName);
        System.out.println("The topic ARN is" + arnVal);
        snsClient.close();
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat CreateTopicdi Referensi AWS SDK for Java 2.x API.

### `DeleteTopic`

Contoh kode berikut menunjukkan cara menggunakan`DeleteTopic`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:     <topicArn>

                Where:
                   topicArn - The ARN of the topic to delete.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        System.out.println("Deleting a topic with name: " + topicArn);
        deleteSNSTopic(snsClient, topicArn);
        snsClient.close();
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                    .topicArn(topicArn)
                    .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteTopicdi Referensi AWS SDK for Java 2.x API.

### `GetSMSAttributes`

Contoh kode berikut menunjukkan cara menggunakan`GetSMSAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.GetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.GetSubscriptionAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

```
import java.util.Iterator;
import java.util.Map;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetSMSAtrributes {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic from which to retrieve
 attributes.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        getSNSAttrutes(snsClient, topicArn);
        snsClient.close();
    }

    public static void getSNSAttrutes(SnsClient snsClient, String topicArn) {
        try {
            GetSubscriptionAttributesRequest request =
 GetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(topicArn)
                    .build();

            // Get the Subscription attributes
```

```
            GetSubscriptionAttributesResponse res =
 snsClient.getSubscriptionAttributes(request);
            Map<String, String> map = res.attributes();

            // Iterate through the map
            Iterator iter = map.entrySet().iterator();
            while (iter.hasNext()) {
                Map.Entry entry = (Map.Entry) iter.next();
                System.out.println("[Key] : " + entry.getKey() + " [Value] : " +
 entry.getValue());
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }

        System.out.println("\n\nStatus was good");
    }
}
```

- Untuk detail API, lihat Dapatkan SMSAttributes Referensi AWS SDK for Java 2.x API.

### `GetTopicAttributes`

Contoh kode berikut menunjukkan cara menggunakan`GetTopicAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.GetTopicAttributesRequest;
import software.amazon.awssdk.services.sns.model.GetTopicAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetTopicAttributes {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic to look up.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        System.out.println("Getting attributes for a topic with name: " + topicArn);
        getSNSTopicAttributes(snsClient, topicArn);
        snsClient.close();
    }

    public static void getSNSTopicAttributes(SnsClient snsClient, String topicArn) {
        try {
            GetTopicAttributesRequest request = GetTopicAttributesRequest.builder()
                    .topicArn(topicArn)
                    .build();

            GetTopicAttributesResponse result =
 snsClient.getTopicAttributes(request);
            System.out.println("\n\nStatus is " +
 result.sdkHttpResponse().statusCode() + "\n\nAttributes: \n\n"
                    + result.attributes());
```

```
        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat GetTopicAttributesdi Referensi AWS SDK for Java 2.x API.

### `ListPhoneNumbersOptedOut`

Contoh kode berikut menunjukkan cara menggunakan`ListPhoneNumbersOptedOut`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListPhoneNumbersOptedOutRequest;
import software.amazon.awssdk.services.sns.model.ListPhoneNumbersOptedOutResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListOptOut {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
```

```
                .build();

        listOpts(snsClient);
        snsClient.close();
    }

    public static void listOpts(SnsClient snsClient) {
        try {
            ListPhoneNumbersOptedOutRequest request =
 ListPhoneNumbersOptedOutRequest.builder().build();
            ListPhoneNumbersOptedOutResponse result =
 snsClient.listPhoneNumbersOptedOut(request);
            System.out.println("Status is " + result.sdkHttpResponse().statusCode()
 + "\n\nPhone Numbers: \n\n"
                    + result.phoneNumbers());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListPhoneNumbersOptedOutdi Referensi AWS SDK for Java 2.x API.

### `ListSubscriptions`

Contoh kode berikut menunjukkan cara menggunakan`ListSubscriptions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListSubscriptionsRequest;
```

```
import software.amazon.awssdk.services.sns.model.ListSubscriptionsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListSubscriptions {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSSubscriptions(snsClient);
        snsClient.close();
    }

    public static void listSNSSubscriptions(SnsClient snsClient) {
        try {
            ListSubscriptionsRequest request = ListSubscriptionsRequest.builder()
                    .build();

            ListSubscriptionsResponse result = snsClient.listSubscriptions(request);
            System.out.println(result.subscriptions());

        } catch (SnsException e) {

            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListSubscriptionsdi Referensi AWS SDK for Java 2.x API.

### `ListTopics`

Contoh kode berikut menunjukkan cara menggunakan`ListTopics`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.ListTopicsRequest;
import software.amazon.awssdk.services.sns.model.ListTopicsResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListTopics {
    public static void main(String[] args) {
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        listSNSTopics(snsClient);
        snsClient.close();
    }

    public static void listSNSTopics(SnsClient snsClient) {
        try {
            ListTopicsRequest request = ListTopicsRequest.builder()
                    .build();

            ListTopicsResponse result = snsClient.listTopics(request);
            System.out.println(
                    "Status was " + result.sdkHttpResponse().statusCode() + "\n
\nTopics\n\n" + result.topics());
```

```
        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListTopicsdi Referensi AWS SDK for Java 2.x API.

### `Publish`

Contoh kode berikut menunjukkan cara menggunakan`Publish`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <message> <topicArn>
```

```
                Where:
                   message - The message text to send.
                   topicArn - The ARN of the topic to publish.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String topicArn = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        pubTopic(snsClient, message, topicArn);
        snsClient.close();
    }

    public static void pubTopic(SnsClient snsClient, String message, String
 topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .topicArn(topicArn)
                    .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                    .println(result.messageId() + " Message sent. Status is " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Publikasikan di Referensi AWS SDK for Java 2.x API.

### `SetSMSAttributes`

Contoh kode berikut menunjukkan cara menggunakan`SetSMSAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetSMSAttributes {
    public static void main(String[] args) {
        HashMap<String, String> attributes = new HashMap<>(1);
        attributes.put("DefaultSMSType", "Transactional");
        attributes.put("UsageReportS3Bucket", "janbucket");

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        setSNSAttributes(snsClient, attributes);
        snsClient.close();
    }

    public static void setSNSAttributes(SnsClient snsClient, HashMap<String, String>
 attributes) {
        try {
```

```
            SetSmsAttributesRequest request = SetSmsAttributesRequest.builder()
                    .attributes(attributes)
                    .build();

            SetSmsAttributesResponse result = snsClient.setSMSAttributes(request);
            System.out.println("Set default Attributes to " + attributes + ". Status
 was "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Menyetel SMSAttributes di Referensi AWS SDK for Java 2.x API.

### `SetSubscriptionAttributes`

Contoh kode berikut menunjukkan cara menggunakan`SetSubscriptionAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.ArrayList;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class UseMessageFilterPolicy {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <subscriptionArn>

                Where:
                   subscriptionArn - The ARN of a subscription.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        usePolicy(snsClient, subscriptionArn);
        snsClient.close();
    }

    public static void usePolicy(SnsClient snsClient, String subscriptionArn) {
        try {
            SNSMessageFilterPolicy fp = new SNSMessageFilterPolicy();
            // Add a filter policy attribute with a single value
            fp.addAttribute("store", "example_corp");
            fp.addAttribute("event", "order_placed");

            // Add a prefix attribute
            fp.addAttributePrefix("customer_interests", "bas");

            // Add an anything-but attribute
            fp.addAttributeAnythingBut("customer_interests", "baseball");

            // Add a filter policy attribute with a list of values
            ArrayList<String> attributeValues = new ArrayList<>();
            attributeValues.add("rugby");
            attributeValues.add("soccer");
```

```
            attributeValues.add("hockey");
            fp.addAttribute("customer_interests", attributeValues);

            // Add a numeric attribute
            fp.addAttribute("price_usd", "=", 0);

            // Add a numeric attribute with a range
            fp.addAttributeRange("price_usd", ">", 0, "<=", 100);

            // Apply the filter policy attributes to an Amazon SNS subscription
            fp.apply(snsClient, subscriptionArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SetSubscriptionAttributesdi Referensi AWS SDK for Java 2.x API.

### `SetTopicAttributes`

Contoh kode berikut menunjukkan cara menggunakan`SetTopicAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetTopicAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetTopicAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetTopicAttributes {

    public static void main(String[] args) {
        final String usage = """

                Usage:    <attribute> <topicArn> <value>

                Where:
                   attribute - The attribute action to use. Valid parameters are:
 Policy | DisplayName | DeliveryPolicy .
                   topicArn - The ARN of the topic.\s
                   value - The value for the attribute.
                """;

        if (args.length < 3) {
            System.out.println(usage);
            System.exit(1);
        }

        String attribute = args[0];
        String topicArn = args[1];
        String value = args[2];

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        setTopAttr(snsClient, attribute, topicArn, value);
        snsClient.close();
    }

    public static void setTopAttr(SnsClient snsClient, String attribute, String
 topicArn, String value) {
        try {
            SetTopicAttributesRequest request = SetTopicAttributesRequest.builder()
                    .attributeName(attribute)
                    .attributeValue(value)
                    .topicArn(topicArn)
```

```
                    .build();

            SetTopicAttributesResponse result =
 snsClient.setTopicAttributes(request);
            System.out.println(
                    "\n\nStatus was " + result.sdkHttpResponse().statusCode() + "\n
\nTopic " + request.topicArn()
                            + " updated " + request.attributeName() + " to " +
 request.attributeValue());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat SetTopicAttributesdi Referensi AWS SDK for Java 2.x API.

### `Subscribe`

Contoh kode berikut menunjukkan cara menggunakan`Subscribe`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Berlangganan alamat email ke suatu topik.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
```

```
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeEmail {
    public static void main(String[] args) {
        final String usage = """
                Usage:     <topicArn> <email>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   email - The email address to use.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String email = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        subEmail(snsClient, topicArn, email);
        snsClient.close();
    }

    public static void subEmail(SnsClient snsClient, String topicArn, String email)
 {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("email")
                    .endpoint(email)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
```

```
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Berlangganan titik akhir HTTP ke suatu topik.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeHTTPS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn> <url>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   url - The HTTPS endpoint that you want to receive notifications.
                """;

        if (args.length < 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
```

```
        String url = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        subHTTPS(snsClient, topicArn, url);
        snsClient.close();
    }

    public static void subHTTPS(SnsClient snsClient, String topicArn, String url) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("https")
                    .endpoint(url)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN is " + result.subscriptionArn() +
 "\n\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Berlangganan fungsi Lambda ke suatu topik.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeLambda {

    public static void main(String[] args) {

        final String usage = """

                Usage:    <topicArn> <lambdaArn>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   lambdaArn - The ARN of an AWS Lambda function.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String lambdaArn = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String arnValue = subLambda(snsClient, topicArn, lambdaArn);
        System.out.println("Subscription ARN: " + arnValue);
        snsClient.close();
    }

    public static String subLambda(SnsClient snsClient, String topicArn, String
 lambdaArn) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("lambda")
                    .endpoint(lambdaArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
```

```
            return result.subscriptionArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat Berlangganan di Referensi AWS SDK for Java 2.x API.

### `TagResource`

Contoh kode berikut menunjukkan cara menggunakan`TagResource`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.Tag;
import software.amazon.awssdk.services.sns.model.TagResourceRequest;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AddTags {
```

```
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn>

                Where:
                   topicArn - The ARN of the topic to which tags are added.

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        addTopicTags(snsClient, topicArn);
        snsClient.close();
    }

    public static void addTopicTags(SnsClient snsClient, String topicArn) {
        try {
            Tag tag = Tag.builder()
                    .key("Team")
                    .value("Development")
                    .build();

            Tag tag2 = Tag.builder()
                    .key("Environment")
                    .value("Gamma")
                    .build();

            List<Tag> tagList = new ArrayList<>();
            tagList.add(tag);
            tagList.add(tag2);

            TagResourceRequest tagResourceRequest = TagResourceRequest.builder()
                    .resourceArn(topicArn)
                    .tags(tagList)
                    .build();
```

```
            snsClient.tagResource(tagResourceRequest);
            System.out.println("Tags have been added to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat TagResourcedi Referensi AWS SDK for Java 2.x API.

### `Unsubscribe`

Contoh kode berikut menunjukkan cara menggunakan`Unsubscribe`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class Unsubscribe {
```

```
    public static void main(String[] args) {
        final String usage = """

                Usage:    <subscriptionArn>

                Where:
                   subscriptionArn - The ARN of the subscription to delete.
                """;

        if (args.length < 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String subscriptionArn = args[0];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        unSub(snsClient, subscriptionArn);
        snsClient.close();
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                    .subscriptionArn(subscriptionArn)
                    .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);
            System.out.println("\n\nStatus was " +
 result.sdkHttpResponse().statusCode()
                    + "\n\nSubscription was removed for " +
 request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Berhenti berlangganan di Referensi AWS SDK for Java 2.x API.

# Skenario

Membangun aplikasi untuk mengirimkan data ke tabel DynamoDB

Contoh kode berikut menunjukkan cara membuat aplikasi yang mengirimkan data ke tabel Amazon DynamoDB dan memberi tahu Anda saat pengguna memperbarui tabel.

SDK untuk Java 2.x

Menunjukkan cara membuat aplikasi web dinamis yang mengirimkan data menggunakan API Java Amazon DynamoDB dan mengirim pesan teks menggunakan API Java Amazon Simple Notification Service.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Amazon SNS

Membangun aplikasi Amazon SNS

Contoh kode berikut menunjukkan cara membuat aplikasi yang memiliki langganan dan mempublikasikan fungsionalitas dan menerjemahkan pesan.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Simple Notification Service Java API untuk membuat aplikasi web yang memiliki fungsi berlangganan dan mempublikasikan. Selain itu, contoh aplikasi ini juga menerjemahkan pesan.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan contoh yang menggunakan Java Async API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Amazon SNS
- Amazon Translate

Buat titik akhir platform untuk pemberitahuan push

Contoh kode berikut menunjukkan cara membuat titik akhir platform untuk notifikasi push Amazon SNS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreatePlatformEndpointRequest;
import software.amazon.awssdk.services.sns.model.CreatePlatformEndpointResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, create a platform application using the AWS Management Console.
 * See this doc topic:
 *
 * https://docs.aws.amazon.com/sns/latest/dg/mobile-push-send-register.html
 *
 * Without the values created by following the previous link, this code examples
 * does not work.
 */

public class RegistrationExample {
    public static void main(String[] args) {
        final String usage = """

            Usage:     <token> <platformApplicationArn>
```

```
            Where:
               token - The device token or registration ID of the mobile device.
This is a unique
               identifier provided by the device platform (e.g., Apple Push
Notification Service (APNS) for iOS devices, Firebase Cloud Messaging (FCM)
               for Android devices) when the mobile app is registered to receive
push notifications.

               platformApplicationArn - The ARN value of platform application. You
can get this value from the AWS Management Console.\s

            """;

       if (args.length != 2) {
           System.out.println(usage);
           return;
       }

       String token = args[0];
       String platformApplicationArn = args[1];
       SnsClient snsClient = SnsClient.builder()
           .region(Region.US_EAST_1)
           .build();

       createEndpoint(snsClient, token, platformApplicationArn);
   }
   public static void createEndpoint(SnsClient snsClient, String token, String
platformApplicationArn) {
       System.out.println("Creating platform endpoint with token " + token);
       try {
           CreatePlatformEndpointRequest endpointRequest =
CreatePlatformEndpointRequest.builder()
               .token(token)
               .platformApplicationArn(platformApplicationArn)
               .build();

           CreatePlatformEndpointResponse response =
snsClient.createPlatformEndpoint(endpointRequest);
           System.out.println("The ARN of the endpoint is " +
response.endpointArn());

       } catch (SnsException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
       }
```

```
    }
}
```

Membuat aplikasi nirserver untuk mengelola foto

Contoh kode berikut menunjukkan cara membuat aplikasi tanpa server yang memungkinkan pengguna mengelola foto menggunakan label.

SDK untuk Java 2.x

Menunjukkan cara mengembangkan aplikasi manajemen aset foto yang mendeteksi label dalam gambar menggunakan Amazon Rekognition dan menyimpannya untuk pengambilan nanti.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk mendalami tentang asal usul contoh ini, lihat postingan di Komunitas AWS.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon Rekognition
- Amazon S3
- Amazon SNS

Membuat dan mempublikasikan ke topik FIFO

Contoh kode berikut menunjukkan cara membuat dan mempublikasikan ke topik FIFO Amazon SNS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini

- membuat topik Amazon SNS FIFO, dua antrian FIFO Amazon SQS, dan satu antrian Standar.
- berlangganan antrian ke topik dan menerbitkan pesan ke topik tersebut.

Tes memverifikasi penerimaan pesan ke setiap antrian. Contoh lengkap juga menunjukkan penambahan kebijakan akses dan menghapus sumber daya di akhir.

```
public class PriceUpdateExample {
    public final static SnsClient snsClient = SnsClient.create();
    public final static SqsClient sqsClient = SqsClient.create();

    public static void main(String[] args) {

        final String usage = "\n" +
            "Usage: " +
            "    <topicName> <wholesaleQueueFifoName> <retailQueueFifoName>
 <analyticsQueueName>\n\n" +
            "Where:\n" +
            "   fifoTopicName - The name of the FIFO topic that you want to create.
 \n\n" +
            "   wholesaleQueueARN - The name of a SQS FIFO queue that will be
 created for the wholesale consumer. \n\n"
            +
            "   retailQueueARN - The name of a SQS FIFO queue that will created for
 the retail consumer. \n\n" +
            "   analyticsQueueARN - The name of a SQS standard queue that will be
 created for the analytics consumer. \n\n";
        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        final String fifoTopicName = args[0];
        final String wholeSaleQueueName = args[1];
        final String retailQueueName = args[2];
        final String analyticsQueueName = args[3];

        // For convenience, the QueueData class holds metadata about a queue: ARN,
 URL,
        // name and type.
        List<QueueData> queues = List.of(
            new QueueData(wholeSaleQueueName, QueueType.FIFO),
            new QueueData(retailQueueName, QueueType.FIFO),
```

```
            new QueueData(analyticsQueueName, QueueType.Standard));

        // Create queues.
        createQueues(queues);

        // Create a topic.
        String topicARN = createFIFOTopic(fifoTopicName);

        // Subscribe each queue to the topic.
        subscribeQueues(queues, topicARN);

        // Allow the newly created topic to send messages to the queues.
        addAccessPolicyToQueuesFINAL(queues, topicARN);

        // Publish a sample price update message with payload.
        publishPriceUpdate(topicARN, "{\"product\": 214, \"price\": 79.99}",
"Consumables");

        // Clean up resources.
        deleteSubscriptions(queues);
        deleteQueues(queues);
        deleteTopic(topicARN);
    }

    public static String createFIFOTopic(String topicName) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = Map.of(
                "FifoTopic", "true",
                "ContentBasedDeduplication", "false",
                "FifoThroughputScope", "MessageGroup");

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            String topicArn = response.topicArn();
            System.out.println("The topic ARN is" + topicArn);

            return topicArn;

        } catch (SnsException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void subscribeQueues(List<QueueData> queues, String topicARN) {
        queues.forEach(queue -> {
            SubscribeRequest subscribeRequest = SubscribeRequest.builder()
                .topicArn(topicARN)
                .endpoint(queue.queueARN)
                .protocol("sqs")
                .build();

            // Subscribe to the endpoint by using the SNS service client.
            // Only Amazon SQS queues can receive notifications from an Amazon SNS
FIFO
            // topic.
            SubscribeResponse subscribeResponse =
snsClient.subscribe(subscribeRequest);
            System.out.println("The queue [" + queue.queueARN + "] subscribed to the
topic [" + topicARN + "]");
            queue.subscriptionARN = subscribeResponse.subscriptionArn();
        });
    }

    public static void publishPriceUpdate(String topicArn, String payload, String
groupId) {

        try {
            // Create and publish a message that updates the wholesale price.
            String subject = "Price Update";
            String dedupId = UUID.randomUUID().toString();
            String attributeName = "business";
            String attributeValue = "wholesale";

            MessageAttributeValue msgAttValue = MessageAttributeValue.builder()
                .dataType("String")
                .stringValue(attributeValue)
                .build();

            Map<String, MessageAttributeValue> attributes = new HashMap<>();
            attributes.put(attributeName, msgAttValue);
            PublishRequest pubRequest = PublishRequest.builder()
```

```
                .topicArn(topicArn)
                .subject(subject)
                .message(payload)
                .messageGroupId(groupId)
                .messageDeduplicationId(dedupId)
                .messageAttributes(attributes)
                .build();

            final PublishResponse response = snsClient.publish(pubRequest);
            System.out.println(response.messageId());
            System.out.println(response.sequenceNumber());
            System.out.println("Message was published to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateTopic
  - Publikasikan
  - Berlangganan

Mendeteksi orang dan objek dalam video

Contoh kode berikut menunjukkan cara mendeteksi orang dan objek dalam video dengan Amazon Rekognition.

SDK untuk Java 2.x

> Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi guna mendeteksi wajah dan objek di video yang berada di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).
>
> Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Publikasikan pesan SMS ke suatu topik

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat topik Amazon SNS.
- Berlangganan nomor telepon ke topik.
- Publikasikan pesan SMS ke topik sehingga semua nomor telepon berlangganan menerima pesan sekaligus.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Buat topik dan kembalikan ARN-nya.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
```

```
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class CreateTopic {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicName>

                Where:
                   topicName - The name of the topic to create (for example,
 mytopic).

                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicName = args[0];
        System.out.println("Creating a topic with name: " + topicName);
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();

        String arnVal = createSNSTopic(snsClient, topicName);
        System.out.println("The topic ARN is" + arnVal);
        snsClient.close();
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                    .name(topicName)
                    .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
        return "";
    }
}
```

Berlangganan titik akhir ke suatu topik.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SubscribeTextSMS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <topicArn> <phoneNumber>

                Where:
                   topicArn - The ARN of the topic to subscribe.
                   phoneNumber - A mobile phone number that receives notifications
 (for example, +1XXX5550100).
                """;

        if (args.length < 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String topicArn = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
```

```
        subTextSNS(snsClient, topicArn, phoneNumber);
        snsClient.close();
    }

    public static void subTextSNS(SnsClient snsClient, String topicArn, String
 phoneNumber) {
        try {
            SubscribeRequest request = SubscribeRequest.builder()
                    .protocol("sms")
                    .endpoint(phoneNumber)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

            SubscribeResponse result = snsClient.subscribe(request);
            System.out.println("Subscription ARN: " + result.subscriptionArn() + "\n
\n Status is "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Tetapkan atribut pada pesan, seperti ID pengirim, harga maksimum, dan jenisnya. Atribut pesan bersifat opsional.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesRequest;
import software.amazon.awssdk.services.sns.model.SetSmsAttributesResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
import java.util.HashMap;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SetSMSAttributes {
    public static void main(String[] args) {
        HashMap<String, String> attributes = new HashMap<>(1);
        attributes.put("DefaultSMSType", "Transactional");
        attributes.put("UsageReportS3Bucket", "janbucket");

        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        setSNSAttributes(snsClient, attributes);
        snsClient.close();
    }

    public static void setSNSAttributes(SnsClient snsClient, HashMap<String, String>
 attributes) {
        try {
            SetSmsAttributesRequest request = SetSmsAttributesRequest.builder()
                    .attributes(attributes)
                    .build();

            SetSmsAttributesResponse result = snsClient.setSMSAttributes(request);
            System.out.println("Set default Attributes to " + attributes + ". Status
 was "
                    + result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Publikasikan pesan ke topik. Pesan dikirim ke setiap pelanggan.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTextSMS {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <message> <phoneNumber>

                Where:
                   message - The message text to send.
                   phoneNumber - The mobile phone number to which a message is sent
 (for example, +1XXX5550100).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        pubTextSMS(snsClient, message, phoneNumber);
        snsClient.close();
    }

    public static void pubTextSMS(SnsClient snsClient, String message, String
 phoneNumber) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .phoneNumber(phoneNumber)
                    .build();

            PublishResponse result = snsClient.publish(request);
```

```
            System.out
                    .println(result.messageId() + " Message sent. Status was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Publikasikan pesan teks SMS

Contoh kode berikut menunjukkan cara mempublikasikan pesan SMS menggunakan Amazon SNS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SnsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class PublishTextSMS {
    public static void main(String[] args) {
        final String usage = """
```

```
                Usage:    <message> <phoneNumber>

                Where:
                   message - The message text to send.
                   phoneNumber - The mobile phone number to which a message is sent
 (for example, +1XXX5550100).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String message = args[0];
        String phoneNumber = args[1];
        SnsClient snsClient = SnsClient.builder()
                .region(Region.US_EAST_1)
                .build();
        pubTextSMS(snsClient, message, phoneNumber);
        snsClient.close();
    }

    public static void pubTextSMS(SnsClient snsClient, String message, String
 phoneNumber) {
        try {
            PublishRequest request = PublishRequest.builder()
                    .message(message)
                    .phoneNumber(phoneNumber)
                    .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                    .println(result.messageId() + " Message sent. Status was " +
 result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat Publikasikan di Referensi AWS SDK for Java 2.x API.

### Publikasikan pesan ke antrian

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat topik (FIFO atau non-FIFO).
- Berlangganan beberapa antrian ke topik dengan opsi untuk menerapkan filter.
- Publikasikan pesan ke topik.
- Polling antrian untuk pesan yang diterima.

#### SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
package com.example.sns;

import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.MessageAttributeValue;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
```

```
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesResponse;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

import com.google.gson.Gson;
import com.google.gson.JsonArray;
import com.google.gson.JsonObject;
import com.google.gson.JsonPrimitive;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Gives the user three options to choose from.
 * 2. Creates an Amazon Simple Notification Service (Amazon SNS) topic.
 * 3. Creates an Amazon Simple Queue Service (Amazon SQS) queue.
 * 4. Gets the SQS queue Amazon Resource Name (ARN) attribute.
 * 5. Attaches an AWS Identity and Access Management (IAM) policy to the queue.
 * 6. Subscribes to the SQS queue.
 * 7. Publishes a message to the topic.
 * 8. Displays the messages.
 * 9. Deletes the received message.
 * 10. Unsubscribes from the topic.
```

```
 * 11. Deletes the SNS topic.
 */
public class SNSWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:\n" +
            "    <fifoQueueARN>\n\n" +
            "Where:\n" +
            "    accountId - Your AWS account Id value.";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        SnsClient snsClient = SnsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        SqsClient sqsClient = SqsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        Scanner in = new Scanner(System.in);
        String accountId = args[0];
        String useFIFO;
        String duplication = "n";
        String topicName;
        String deduplicationID = null;
        String groupId = null;

        String topicArn;
        String sqsQueueName;
        String sqsQueueUrl;
        String sqsQueueArn;
        String subscriptionArn;
        boolean selectFIFO = false;

        String message;
        List<Message> messageList;
```

```
        List<String> filterList = new ArrayList<>();
        String msgAttValue = "";

        System.out.println(DASHES);
        System.out.println("Welcome to messaging with topics and queues.");
        System.out.println("In this scenario, you will create an SNS topic and
 subscribe an SQS queue to the topic.\n" +
            "You can select from several options for configuring the topic and the
 subscriptions for the queue.\n" +
            "You can then post to the topic and see the results in the queue.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("SNS topics can be configured as FIFO (First-In-First-
Out).\n" +
            "FIFO topics deliver messages in order and support deduplication and
 message filtering.\n" +
            "Would you like to work with FIFO topics? (y/n)");
        useFIFO = in.nextLine();
        if (useFIFO.compareTo("y") == 0) {
            selectFIFO = true;
            System.out.println("You have selected FIFO");
            System.out.println(" Because you have chosen a FIFO topic, deduplication
 is supported.\n" +
                "        Deduplication IDs are either set in the message or
 automatically generated from content using a hash function.\n"
                +
                "        If a message is successfully published to an SNS FIFO
 topic, any message published and determined to have the same deduplication ID,\n"
                +
                "        within the five-minute deduplication interval, is accepted
 but not delivered.\n" +
                "        For more information about deduplication, see https://
docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.");

            System.out.println(
                "Would you like to use content-based deduplication instead of
 entering a deduplication ID? (y/n)");
            duplication = in.nextLine();
            if (duplication.compareTo("y") == 0) {
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            } else {
                System.out.println("Please enter deduplication Id value");
```

```
                deduplicationID = in.nextLine();
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            }
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a topic.");
        System.out.println("Enter a name for your SNS topic.");
        topicName = in.nextLine();
        if (selectFIFO) {
            System.out.println("Because you have selected a FIFO topic, '.fifo' must
be appended to the topic name.");
            topicName = topicName + ".fifo";
            System.out.println("The name of the topic is " + topicName);
            topicArn = createFIFO(snsClient, topicName, duplication);
            System.out.println("The ARN of the FIFO topic is " + topicArn);

        } else {
            System.out.println("The name of the topic is " + topicName);
            topicArn = createSNSTopic(snsClient, topicName);
            System.out.println("The ARN of the non-FIFO topic is " + topicArn);

        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Create an SQS queue.");
        System.out.println("Enter a name for your SQS queue.");
        sqsQueueName = in.nextLine();
        if (selectFIFO) {
            sqsQueueName = sqsQueueName + ".fifo";
        }
        sqsQueueUrl = createQueue(sqsClient, sqsQueueName, selectFIFO);
        System.out.println("The queue URL is " + sqsQueueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the SQS queue ARN attribute.");
        sqsQueueArn = getSQSQueueAttrs(sqsClient, sqsQueueUrl);
        System.out.println("The ARN of the new queue is " + sqsQueueArn);
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("5. Attach an IAM policy to the queue.");

        // Define the policy to use. Make sure that you change the REGION if you are
        // running this code
        // in a different region.
        String policy = """
        {
             "Statement": [
             {
                 "Effect": "Allow",
                         "Principal": {
                     "Service": "sns.amazonaws.com"
                 },
                 "Action": "sqs:SendMessage",
                         "Resource": "arn:aws:sqs:us-east-1:%s:%s",
                         "Condition": {
                     "ArnEquals": {
                         "aws:SourceArn": "arn:aws:sns:us-east-1:%s:%s"
                     }
                 }
             }
             ]
         }
        """.formatted(accountId, sqsQueueName, accountId, topicName);

        setQueueAttr(sqsClient, sqsQueueUrl, policy);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Subscribe to the SQS queue.");
        if (selectFIFO) {
            System.out.println(
                "If you add a filter to this subscription, then only the filtered
 messages will be received in the queue.\n"
                    +
                    "For information about message filtering, see https://
docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n"
                    +
                    "For this example, you can filter messages by a \"tone\"
 attribute.");
            System.out.println("Would you like to filter messages for " +
 sqsQueueName + "'s subscription to the topic "
                + topicName + "?  (y/n)");
```

```
            String filterAns = in.nextLine();
            if (filterAns.compareTo("y") == 0) {
                boolean moreAns = false;
                System.out.println("You can filter messages by one or more of the
following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                while (!moreAns) {
                    System.out.println("Select a number or choose 0 to end.");
                    String ans = in.nextLine();
                    switch (ans) {
                        case "1":
                            filterList.add("cheerful");
                            break;
                        case "2":
                            filterList.add("funny");
                            break;
                        case "3":
                            filterList.add("serious");
                            break;
                        case "4":
                            filterList.add("sincere");
                            break;
                        default:
                            moreAns = true;
                            break;
                    }
                }
            }
        }
        subscriptionArn = subQueue(snsClient, topicArn, sqsQueueArn, filterList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Publish a message to the topic.");
        if (selectFIFO) {
            System.out.println("Would you like to add an attribute to this message?
(y/n)");
            String msgAns = in.nextLine();
            if (msgAns.compareTo("y") == 0) {
                System.out.println("You can filter messages by one or more of the
following \"tone\" attributes.");
```

```
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                System.out.println("Select a number or choose 0 to end.");
                String ans = in.nextLine();
                switch (ans) {
                    case "1":
                        msgAttValue = "cheerful";
                        break;
                    case "2":
                        msgAttValue = "funny";
                        break;
                    case "3":
                        msgAttValue = "serious";
                        break;
                    default:
                        msgAttValue = "sincere";
                        break;
                }

                System.out.println("Selected value is " + msgAttValue);
            }
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessageFIFO(snsClient, message, topicArn, msgAttValue, duplication,
groupId, deduplicationID);

        } else {
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessage(snsClient, message, topicArn);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Display the message. Press any key to continue.");
        in.nextLine();
        messageList = receiveMessages(sqsClient, sqsQueueUrl, msgAttValue);
        for (Message mes : messageList) {
            System.out.println("Message Id: " + mes.messageId());
            System.out.println("Full Message: " + mes.body());
        }
        System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("9. Delete the received message. Press any key to
continue.");
        in.nextLine();
        deleteMessages(sqsClient, sqsQueueUrl, messageList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Unsubscribe from the topic and delete the queue.
Press any key to continue.");
        in.nextLine();
        unSub(snsClient, subscriptionArn);
        deleteSQSQueue(sqsClient, sqsQueueName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete the topic. Press any key to continue.");
        in.nextLine();
        deleteSNSTopic(snsClient, topicArn);

        System.out.println(DASHES);
        System.out.println("The SNS/SQS workflow has completed successfully.");
        System.out.println(DASHES);
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
```

```
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                .queueUrl(queueUrl)
                .build();

            sqsClient.deleteQueue(deleteQueueRequest);
            System.out.println(queueName + " was successfully deleted.");

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();

            UnsubscribeResponse result = snsClient.unsubscribe(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode()
                + "\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        try {
            List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();
            for (Message msg : messages) {
                DeleteMessageBatchRequestEntry entry =
DeleteMessageBatchRequestEntry.builder()
                    .id(msg.messageId())
                    .build();
```

```
                entries.add(entry);
            }

            DeleteMessageBatchRequest deleteMessageBatchRequest =
DeleteMessageBatchRequest.builder()
                .queueUrl(queueUrl)
                .entries(entries)
                .build();

            sqsClient.deleteMessageBatch(deleteMessageBatchRequest);
            System.out.println("The batch delete of messages was successful");

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl, String msgAttValue) {
        try {
            if (msgAttValue.isEmpty()) {
                ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
                return sqsClient.receiveMessage(receiveMessageRequest).messages();
            } else {
                // We know there are filters on the message.
                ReceiveMessageRequest receiveRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageAttributeNames(msgAttValue) // Include other message
attributes if needed.
                    .maxNumberOfMessages(5)
                    .build();

                return sqsClient.receiveMessage(receiveRequest).messages();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
        return null;
    }

    public static void pubMessage(SnsClient snsClient, String message, String
topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void pubMessageFIFO(SnsClient snsClient,
                                      String message,
                                      String topicArn,
                                      String msgAttValue,
                                      String duplication,
                                      String groupId,
                                      String deduplicationID) {

        try {
            PublishRequest request;
            // Means the user did not choose to use a message attribute.
            if (msgAttValue.isEmpty()) {
                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    request = PublishRequest.builder()
                        .message(message)
```

```
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                }

            } else {
                Map<String, MessageAttributeValue> messageAttributes = new
HashMap<>();
                messageAttributes.put(msgAttValue, MessageAttributeValue.builder()
                    .dataType("String")
                    .stringValue("true")
                    .build());

                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    // Create a publish request with the message and attributes.
                    request = PublishRequest.builder()
                        .topicArn(topicArn)
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .messageAttributes(messageAttributes)
                        .build();
                }
            }

            // Publish the message to the topic.
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

```
   // Subscribe to the SQS queue.
   public static String subQueue(SnsClient snsClient, String topicArn, String
queueArn, List<String> filterList) {
       try {
           SubscribeRequest request;
           if (filterList.isEmpty()) {
               // No filter subscription is added.
               request = SubscribeRequest.builder()
                   .protocol("sqs")
                   .endpoint(queueArn)
                   .returnSubscriptionArn(true)
                   .topicArn(topicArn)
                   .build();

               SubscribeResponse result = snsClient.subscribe(request);
               System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                   "with the subscription ARN " + result.subscriptionArn());
               return result.subscriptionArn();
           } else {
               request = SubscribeRequest.builder()
                   .protocol("sqs")
                   .endpoint(queueArn)
                   .returnSubscriptionArn(true)
                   .topicArn(topicArn)
                   .build();

               SubscribeResponse result = snsClient.subscribe(request);
               System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                   "with the subscription ARN " + result.subscriptionArn());

               String attributeName = "FilterPolicy";
               Gson gson = new Gson();
               String jsonString = "{\"tone\": []}";
               JsonObject jsonObject = gson.fromJson(jsonString, JsonObject.class);
               JsonArray toneArray = jsonObject.getAsJsonArray("tone");
               for (String value : filterList) {
                   toneArray.add(new JsonPrimitive(value));
               }

               String updatedJsonString = gson.toJson(jsonObject);
               System.out.println(updatedJsonString);
```

```
                SetSubscriptionAttributesRequest attRequest =
SetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(result.subscriptionArn())
                    .attributeName(attributeName)
                    .attributeValue(updatedJsonString)
                    .build();

                snsClient.setSubscriptionAttributes(attRequest);
                return result.subscriptionArn();
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    // Attach a policy to the queue.
    public static void setQueueAttr(SqsClient sqsClient, String queueUrl, String
policy) {
        try {
            Map<software.amazon.awssdk.services.sqs.model.QueueAttributeName,
String> attrMap = new HashMap<>();
            attrMap.put(QueueAttributeName.POLICY, policy);

            SetQueueAttributesRequest attributesRequest =
SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attrMap)
                .build();

            sqsClient.setQueueAttributes(attributesRequest);
            System.out.println("The policy has been successfully attached.");

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSQSQueueAttrs(SqsClient sqsClient, String queueUrl) {
        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
```

```
        atts.add(QueueAttributeName.QUEUE_ARN);

        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
            .queueUrl(queueUrl)
            .attributeNames(atts)
            .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet())
            return queueAtt.getValue();

        return "";
    }

    public static String createQueue(SqsClient sqsClient, String queueName, Boolean
selectFIFO) {
        try {
            System.out.println("\nCreate Queue");
            if (selectFIFO) {
                Map<QueueAttributeName, String> attrs = new HashMap<>();
                attrs.put(QueueAttributeName.FIFO_QUEUE, "true");
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .attributes(attrs)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            } else {
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient
```

```
.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                .name(topicName)
                .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createFIFO(SnsClient snsClient, String topicName, String
duplication) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = new HashMap<>();
            if (duplication.compareTo("n") == 0) {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "false");
            } else {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "true");
            }

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
```

```
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            return response.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publikasikan
  - ReceiveMessage
  - SetQueueAttributes
  - Berlangganan
  - Berhenti berlangganan

Menggunakan API Gateway untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh Amazon API Gateway.

SDK untuk Java 2.x

Menunjukkan cara membuat AWS Lambda fungsi dengan menggunakan Lambda Java runtime API. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat fungsi Lambda yang diinvokasi oleh Amazon

API Gateway yang memindai peringatan hari jadi kerja di tabel Amazon DynamoDB dan menggunakan Amazon Simple Notification Service (Amazon SNS) untuk mengirim pesan teks berisi ucapan selamat kepada karyawan Anda pada tanggal hari jadi kerja satu tahun mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- API Gateway
- DynamoDB
- Lambda
- Amazon SNS

Menggunakan peristiwa terjadwal untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat AWS Lambda fungsi yang dipanggil oleh acara EventBridge terjadwal Amazon.

SDK untuk Java 2.x

Menunjukkan cara membuat acara EventBridge terjadwal Amazon yang memanggil AWS Lambda fungsi. Konfigurasikan EventBridge untuk menggunakan ekspresi cron untuk menjadwalkan saat fungsi Lambda dipanggil. Dalam contoh ini, Anda membuat fungsi Lambda menggunakan API runtime Java Lambda. Contoh ini memanggil AWS layanan yang berbeda untuk melakukan kasus penggunaan tertentu. Contoh ini menunjukkan cara membuat aplikasi yang mengirimkan pesan teks seluler kepada karyawan Anda berisi ucapan selamat pada hari jadi setahun kerja mereka.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- CloudWatch Log
- DynamoDB
- EventBridge
- Lambda
- Amazon SNS

# Contoh nirserver

Memanggil fungsi Lambda dari pemicu Amazon SNS

Contoh kode berikut menunjukkan cara menerapkan fungsi Lambda yang menerima peristiwa yang dipicu dengan menerima pesan dari topik SNS. Fungsi mengambil pesan dari parameter acara dan mencatat konten setiap pesan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara SNS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package example;

import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.LambdaLogger;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SNSEvent;
import com.amazonaws.services.lambda.runtime.events.SNSEvent.SNSRecord;


import java.util.Iterator;
import java.util.List;

public class SNSEventHandler implements RequestHandler<SNSEvent, Boolean> {
    LambdaLogger logger;

    @Override
    public Boolean handleRequest(SNSEvent event, Context context) {
        logger = context.getLogger();
        List<SNSRecord> records = event.getRecords();
        if (!records.isEmpty()) {
            Iterator<SNSRecord> recordsIter = records.iterator();
            while (recordsIter.hasNext()) {
```

```
                processRecord(recordsIter.next());
            }
        }
        return Boolean.TRUE;
    }

    public void processRecord(SNSRecord record) {
        try {
            String message = record.getSNS().getMessage();
            logger.log("message: " + message);
        } catch (Exception e) {
            throw new RuntimeException(e);
        }
    }

}
```

# Contoh Amazon SQS menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon SQS. AWS SDK for Java 2.x

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Memulai
- Tindakan

- Skenario
- Contoh nirserver

# Memulai

## Halo Amazon SQS

Contoh kode berikut menunjukkan cara memulai menggunakan Amazon SQS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.SqsException;
import software.amazon.awssdk.services.sqs.paginators.ListQueuesIterable;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class HelloSQS {
    public static void main(String[] args) {
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        listQueues(sqsClient);
        sqsClient.close();
    }

    public static void listQueues(SqsClient sqsClient) {
```

```
        try {
            ListQueuesIterable listQueues = sqsClient.listQueuesPaginator();
            listQueues.stream()
                    .flatMap(r -> r.queueUrls().stream())
                    .forEach(content -> System.out.println(" Queue URL: " +
 content.toLowerCase()));

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListQueuesdi Referensi AWS SDK for Java 2.x API.

## Tindakan

### `CreateQueue`

Contoh kode berikut menunjukkan cara menggunakan`CreateQueue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.ChangeMessageVisibilityRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.ListQueuesRequest;
import software.amazon.awssdk.services.sqs.model.ListQueuesResponse;
import software.amazon.awssdk.services.sqs.model.Message;
```

```
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SQSExample {
    public static void main(String[] args) {
        String queueName = "queue" + System.currentTimeMillis();
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        // Perform various tasks on the Amazon SQS queue.
        String queueUrl = createQueue(sqsClient, queueName);
        listQueues(sqsClient);
        listQueuesFilter(sqsClient, queueUrl);
        List<Message> messages = receiveMessages(sqsClient, queueUrl);
        sendBatchMessages(sqsClient, queueUrl);
        changeMessages(sqsClient, queueUrl, messages);
        deleteMessages(sqsClient, queueUrl, messages);
        sqsClient.close();
    }

    public static String createQueue(SqsClient sqsClient, String queueName) {
        try {
            System.out.println("\nCreate Queue");

            CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

            sqsClient.createQueue(createQueueRequest);

            System.out.println("\nGet queue url");
```

```
            GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            return getQueueUrlResponse.queueUrl();

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void listQueues(SqsClient sqsClient) {

        System.out.println("\nList Queues");
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
sqsClient.listQueues(listQueuesRequest);
            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void listQueuesFilter(SqsClient sqsClient, String queueUrl) {
        // List queues with filters
        String namePrefix = "queue";
        ListQueuesRequest filterListRequest = ListQueuesRequest.builder()
                .queueNamePrefix(namePrefix)
                .build();

        ListQueuesResponse listQueuesFilteredResponse =
sqsClient.listQueues(filterListRequest);
        System.out.println("Queue URLs with prefix: " + namePrefix);
        for (String url : listQueuesFilteredResponse.queueUrls()) {
```

```
            System.out.println(url);
        }

        System.out.println("\nSend message");
        try {
            sqsClient.sendMessage(SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody("Hello world!")
                    .delaySeconds(10)
                    .build());

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void sendBatchMessages(SqsClient sqsClient, String queueUrl) {

        System.out.println("\nSend multiple messages");
        try {
            SendMessageBatchRequest sendMessageBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)

.entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from
msg 1").build(),

SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
2").delaySeconds(10)
                                    .build())
                    .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl) {

        System.out.println("\nReceive messages");
```

```
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
            return sqsClient.receiveMessage(receiveMessageRequest).messages();

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static void changeMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {

        System.out.println("\nChange Message Visibility");
        try {

            for (Message message : messages) {
                ChangeMessageVisibilityRequest req =
ChangeMessageVisibilityRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .visibilityTimeout(100)
                        .build();
                sqsClient.changeMessageVisibility(req);
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        System.out.println("\nDelete Messages");

        try {
            for (Message message : messages) {
```

```
                DeleteMessageRequest deleteMessageRequest =
 DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat CreateQueuedi Referensi AWS SDK for Java 2.x API.

### `DeleteMessage`

Contoh kode berikut menunjukkan cara menggunakan`DeleteMessage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
        try {
            for (Message message : messages) {
                DeleteMessageRequest deleteMessageRequest =
 DeleteMessageRequest.builder()
                        .queueUrl(queueUrl)
                        .receiptHandle(message.receiptHandle())
                        .build();
                sqsClient.deleteMessage(deleteMessageRequest);
            }
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
```

- Untuk detail API, lihat DeleteMessagedi Referensi AWS SDK for Java 2.x API.

### `DeleteQueue`

Contoh kode berikut menunjukkan cara menggunakan`DeleteQueue`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DeleteQueue {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <queueName>

                Where:
                   queueName - The name of the Amazon SQS queue to delete.

                """;
```

```
        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String queueName = args[0];
        SqsClient sqs = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();

        deleteSQSQueue(sqs, queueName);
        sqs.close();
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                    .queueUrl(queueUrl)
                    .build();

            sqsClient.deleteQueue(deleteQueueRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DeleteQueuedi Referensi AWS SDK for Java 2.x API.

### `GetQueueUrl`

Contoh kode berikut menunjukkan cara menggunakan`GetQueueUrl`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
            GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
            return getQueueUrlResponse.queueUrl();
```

- Untuk detail API, lihat GetQueueUrldi Referensi AWS SDK for Java 2.x API.

### `ListQueues`

Contoh kode berikut menunjukkan cara menggunakan`ListQueues`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
        String prefix = "que";

        try {
            ListQueuesRequest listQueuesRequest =
ListQueuesRequest.builder().queueNamePrefix(prefix).build();
            ListQueuesResponse listQueuesResponse =
sqsClient.listQueues(listQueuesRequest);
            for (String url : listQueuesResponse.queueUrls()) {
                System.out.println(url);
            }
```

```
        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

- Untuk detail API, lihat ListQueuesdi Referensi AWS SDK for Java 2.x API.

### `ReceiveMessage`

Contoh kode berikut menunjukkan cara menggunakan`ReceiveMessage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
        try {
            ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
            return sqsClient.receiveMessage(receiveMessageRequest).messages();

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
```

- Untuk detail API, lihat ReceiveMessagedi Referensi AWS SDK for Java 2.x API.

### `SendMessage`

Contoh kode berikut menunjukkan cara menggunakan`SendMessage`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Dua contoh `SendMessage` operasi berikut:

- Kirim pesan dengan tubuh dan penundaan
- Mengirim pesan dengan atribut isi dan pesan

Kirim pesan dengan tubuh dan penundaan.

```
import software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class SendMessages {
    public static void main(String[] args) {
        final String usage = """

                Usage:    <queueName> <message>

                Where:
                   queueName - The name of the queue.
                   message - The message to send.
                """;

        if (args.length != 2) {
```

```
            System.out.println(usage);
            System.exit(1);
        }

        String queueName = args[0];
        String message = args[1];
        SqsClient sqsClient = SqsClient.builder()
                .region(Region.US_WEST_2)
                .build();
        sendMessage(sqsClient, queueName, message);
        sqsClient.close();
    }

    public static void sendMessage(SqsClient sqsClient, String queueName, String
 message) {
        try {
            CreateQueueRequest request = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();
            sqsClient.createQueue(request);

            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                    .queueName(queueName)
                    .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            SendMessageRequest sendMsgRequest = SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(message)
                    .delaySeconds(5)
                    .build();

            sqsClient.sendMessage(sendMsgRequest);

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

Kirim pesan dengan atribut tubuh dan pesan.

```
    /**
     * <p>This method demonstrates how to add message attributes to a message.
     * Each attribute must specify a name, value, and data type. You use a Java Map
 to supply the attributes. The map's
     * key is the attribute name, and you specify the map's entry value using a
 builder that includes the attribute
     * value and data type.</p>
     *
     * <p>The data type must start with one of "String", "Number" or "Binary". You
 can optionally
     * define a custom extension by using a "." and your extension.</p>
     *
     * <p>The SQS Developer Guide provides more information on @see <a
     * href="https://docs.aws.amazon.com/AWSSimpleQueueService/latest/
SQSDeveloperGuide/sqs-message-metadata.html#sqs-message-attributes">message
     * attributes</a>.</p>
     *
     * @param thumbailPath Filesystem path of the image.
     * @param queueUrl     URL of the SQS queue.
     */
    static void sendMessageWithAttributes(Path thumbailPath, String queueUrl) {
        Map<String, MessageAttributeValue> messageAttributeMap;
        try {
            messageAttributeMap = Map.of(
                    "Name", MessageAttributeValue.builder()
                            .stringValue("Jane Doe")
                            .dataType("String").build(),
                    "Age", MessageAttributeValue.builder()
                            .stringValue("42")
                            .dataType("Number.int").build(),
                    "Image", MessageAttributeValue.builder()

 .binaryValue(SdkBytes.fromByteArray(Files.readAllBytes(thumbailPath)))
                            .dataType("Binary.jpg").build()
            );
        } catch (IOException e) {
            LOGGER.error("An I/O exception occurred reading thumbnail image: {}",
 e.getMessage(), e);
            throw new RuntimeException(e);
        }

        SendMessageRequest request = SendMessageRequest.builder()
                .queueUrl(queueUrl)
```

```
                .messageBody("Hello SQS")
                .messageAttributes(messageAttributeMap)
                .build();
        try {
            SendMessageResponse sendMessageResponse =
SQS_CLIENT.sendMessage(request);
            LOGGER.info("Message ID: {}", sendMessageResponse.messageId());
        } catch (SqsException e) {
            LOGGER.error("Exception occurred sending message: {}", e.getMessage(),
e);
            throw new RuntimeException(e);
        }
    }
```

- Untuk detail API, lihat SendMessagedi Referensi AWS SDK for Java 2.x API.

### `SendMessageBatch`

Contoh kode berikut menunjukkan cara menggunakan`SendMessageBatch`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
            SendMessageBatchRequest sendMessageBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)

.entries(SendMessageBatchRequestEntry.builder().id("id1").messageBody("Hello from
msg 1").build(),

SendMessageBatchRequestEntry.builder().id("id2").messageBody("msg
2").delaySeconds(10)
                                    .build())
                    .build();
            sqsClient.sendMessageBatch(sendMessageBatchRequest);
```

- Untuk detail API, lihat SendMessageBatchdi Referensi AWS SDK for Java 2.x API.

### `SetQueueAttributes`

Contoh kode berikut menunjukkan cara menggunakan`SetQueueAttributes`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Konfigurasikan Amazon SQS untuk menggunakan enkripsi sisi server (SSE) menggunakan kunci KMS kustom.

```
    public static void addEncryption(String queueName, String kmsMasterKeyAlias) {
        SqsClient sqsClient = SqsClient.create();

        GetQueueUrlRequest urlRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

        GetQueueUrlResponse getQueueUrlResponse;
        try {
            getQueueUrlResponse = sqsClient.getQueueUrl(urlRequest);
        } catch (QueueDoesNotExistException e) {
            LOGGER.error(e.getMessage(), e);
            throw new RuntimeException(e);
        }
        String queueUrl = getQueueUrlResponse.queueUrl();


        Map<QueueAttributeName, String> attributes = Map.of(
                QueueAttributeName.KMS_MASTER_KEY_ID, kmsMasterKeyAlias,
                QueueAttributeName.KMS_DATA_KEY_REUSE_PERIOD_SECONDS, "140" // Set
the data key reuse period to 140 seconds.
        );                                                                  // This
is how long SQS can reuse the data key before requesting a new one from KMS.
```

```
        SetQueueAttributesRequest attRequest = SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attributes)
                .build();
        try {
            sqsClient.setQueueAttributes(attRequest);
            LOGGER.info("The attributes have been applied to {}", queueName);
        } catch (InvalidAttributeNameException | InvalidAttributeValueException e) {
            LOGGER.error(e.getMessage(), e);
            throw new RuntimeException(e);
        } finally {
            sqsClient.close();
        }
    }
```

- Untuk detail API, lihat SetQueueAttributesdi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat aplikasi perpesanan

Contoh kode berikut menunjukkan cara membuat aplikasi pesan dengan menggunakan Amazon SQS.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon SQS API untuk mengembangkan Spring REST API yang mengirim dan mengambil pesan.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Amazon SQS

Membuat dan mempublikasikan ke topik FIFO

Contoh kode berikut menunjukkan cara membuat dan mempublikasikan ke topik FIFO Amazon SNS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini

- membuat topik Amazon SNS FIFO, dua antrian FIFO Amazon SQS, dan satu antrian Standar.
- berlangganan antrian ke topik dan menerbitkan pesan ke topik tersebut.

Tes memverifikasi penerimaan pesan ke setiap antrian. Contoh lengkap juga menunjukkan penambahan kebijakan akses dan menghapus sumber daya di akhir.

```
public class PriceUpdateExample {
    public final static SnsClient snsClient = SnsClient.create();
    public final static SqsClient sqsClient = SqsClient.create();

    public static void main(String[] args) {

        final String usage = "\n" +
            "Usage: " +
            "    <topicName> <wholesaleQueueFifoName> <retailQueueFifoName>
 <analyticsQueueName>\n\n" +
            "Where:\n" +
            "   fifoTopicName - The name of the FIFO topic that you want to create.
 \n\n" +
            "   wholesaleQueueARN - The name of a SQS FIFO queue that will be
 created for the wholesale consumer. \n\n"
            +
            "   retailQueueARN - The name of a SQS FIFO queue that will created for
 the retail consumer. \n\n" +
            "   analyticsQueueARN - The name of a SQS standard queue that will be
 created for the analytics consumer. \n\n";
        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        final String fifoTopicName = args[0];
        final String wholeSaleQueueName = args[1];
```

```
        final String retailQueueName = args[2];
        final String analyticsQueueName = args[3];

        // For convenience, the QueueData class holds metadata about a queue: ARN,
URL,
        // name and type.
        List<QueueData> queues = List.of(
            new QueueData(wholeSaleQueueName, QueueType.FIFO),
            new QueueData(retailQueueName, QueueType.FIFO),
            new QueueData(analyticsQueueName, QueueType.Standard));

        // Create queues.
        createQueues(queues);

        // Create a topic.
        String topicARN = createFIFOTopic(fifoTopicName);

        // Subscribe each queue to the topic.
        subscribeQueues(queues, topicARN);

        // Allow the newly created topic to send messages to the queues.
        addAccessPolicyToQueuesFINAL(queues, topicARN);

        // Publish a sample price update message with payload.
        publishPriceUpdate(topicARN, "{\"product\": 214, \"price\": 79.99}",
"Consumables");

        // Clean up resources.
        deleteSubscriptions(queues);
        deleteQueues(queues);
        deleteTopic(topicARN);
    }

    public static String createFIFOTopic(String topicName) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = Map.of(
                "FifoTopic", "true",
                "ContentBasedDeduplication", "false",
                "FifoThroughputScope", "MessageGroup");

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
```

```
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            String topicArn = response.topicArn();
            System.out.println("The topic ARN is" + topicArn);

            return topicArn;

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void subscribeQueues(List<QueueData> queues, String topicARN) {
        queues.forEach(queue -> {
            SubscribeRequest subscribeRequest = SubscribeRequest.builder()
                .topicArn(topicARN)
                .endpoint(queue.queueARN)
                .protocol("sqs")
                .build();

            // Subscribe to the endpoint by using the SNS service client.
            // Only Amazon SQS queues can receive notifications from an Amazon SNS
FIFO
            // topic.
            SubscribeResponse subscribeResponse =
snsClient.subscribe(subscribeRequest);
            System.out.println("The queue [" + queue.queueARN + "] subscribed to the
topic [" + topicARN + "]");
            queue.subscriptionARN = subscribeResponse.subscriptionArn();
        });
    }

    public static void publishPriceUpdate(String topicArn, String payload, String
groupId) {

        try {
            // Create and publish a message that updates the wholesale price.
            String subject = "Price Update";
            String dedupId = UUID.randomUUID().toString();
            String attributeName = "business";
            String attributeValue = "wholesale";
```

```
            MessageAttributeValue msgAttValue = MessageAttributeValue.builder()
                .dataType("String")
                .stringValue(attributeValue)
                .build();

            Map<String, MessageAttributeValue> attributes = new HashMap<>();
            attributes.put(attributeName, msgAttValue);
            PublishRequest pubRequest = PublishRequest.builder()
                .topicArn(topicArn)
                .subject(subject)
                .message(payload)
                .messageGroupId(groupId)
                .messageDeduplicationId(dedupId)
                .messageAttributes(attributes)
                .build();

            final PublishResponse response = snsClient.publish(pubRequest);
            System.out.println(response.messageId());
            System.out.println(response.sequenceNumber());
            System.out.println("Message was published to " + topicArn);

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateTopic
  - Publikasikan
  - Berlangganan

Mendeteksi orang dan objek dalam video

Contoh kode berikut menunjukkan cara mendeteksi orang dan objek dalam video dengan Amazon Rekognition.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Rekognition Java API untuk membuat aplikasi guna mendeteksi wajah dan objek di video yang berada di bucket Amazon Simple Storage Service (Amazon S3). Aplikasi ini mengirimkan notifikasi email kepada admin beserta hasilnya menggunakan Amazon Simple Email Service (Amazon SES).

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Rekognition
- Amazon S3
- Amazon SES
- Amazon SNS
- Amazon SQS

Kelola pesan besar menggunakan S3

Contoh kode berikut menunjukkan cara menggunakan Amazon SQS Extended Client Library untuk bekerja dengan pesan Amazon SQS besar.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import com.amazon.sqs.javamessaging.AmazonSQSExtendedClient;
import com.amazon.sqs.javamessaging.ExtendedClientConfiguration;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.joda.time.DateTime;
import org.joda.time.format.DateTimeFormat;
import software.amazon.awssdk.services.s3.S3Client;
import software.amazon.awssdk.services.s3.model.BucketLifecycleConfiguration;
import software.amazon.awssdk.services.s3.model.CreateBucketRequest;
```

```
import software.amazon.awssdk.services.s3.model.DeleteBucketRequest;
import software.amazon.awssdk.services.s3.model.DeleteObjectRequest;
import software.amazon.awssdk.services.s3.model.ExpirationStatus;
import software.amazon.awssdk.services.s3.model.LifecycleExpiration;
import software.amazon.awssdk.services.s3.model.LifecycleRule;
import software.amazon.awssdk.services.s3.model.LifecycleRuleFilter;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsRequest;
import software.amazon.awssdk.services.s3.model.ListObjectVersionsResponse;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Request;
import software.amazon.awssdk.services.s3.model.ListObjectsV2Response;
import
 software.amazon.awssdk.services.s3.model.PutBucketLifecycleConfigurationRequest;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.CreateQueueResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

import java.util.Arrays;
import java.util.List;
import java.util.UUID;

/**
 * Example of using Amazon SQS Extended Client Library for Java 2.x.
 */
public class SqsExtendedClientExample {
    private static final Logger logger =
 LoggerFactory.getLogger(SqsExtendedClientExample.class);

    private String s3BucketName;
    private String queueUrl;
    private final String queueName;
    private final S3Client s3Client;
    private final SqsClient sqsExtendedClient;
    private final int messageSize;

    /**
     * Constructor with default clients and message size.
     */
    public SqsExtendedClientExample() {
```

```
        this(S3Client.create(), 300000);
    }

    /**
     * Constructor with custom S3 client and message size.
     *
     * @param s3Client The S3 client to use
     * @param messageSize The size of the test message to create
     */
    public SqsExtendedClientExample(S3Client s3Client, int messageSize) {
        this.s3Client = s3Client;
        this.messageSize = messageSize;

        // Generate a unique bucket name.
        this.s3BucketName = UUID.randomUUID() + "-" +
                DateTimeFormat.forPattern("yyMMdd-hhmmss").print(new DateTime());

        // Generate a unique queue name.
        this.queueName = "MyQueue-" + UUID.randomUUID();

        // Configure the SQS extended client.
        final ExtendedClientConfiguration extendedClientConfig = new
ExtendedClientConfiguration()
                .withPayloadSupportEnabled(s3Client, s3BucketName);

        this.sqsExtendedClient = new
AmazonSQSExtendedClient(SqsClient.builder().build(), extendedClientConfig);
    }

    public static void main(String[] args) {
        SqsExtendedClientExample example = new SqsExtendedClientExample();
        try {
            example.setup();
            example.sendAndReceiveMessage();
        } finally {
            example.cleanup();
        }
    }

    /**
     * Send a large message and receive it back.
     *
     * @return The received message
     */
```

```
    public Message sendAndReceiveMessage() {
        try {
            // Create a large message.
            char[] chars = new char[messageSize];
            Arrays.fill(chars, 'x');
            String largeMessage = new String(chars);

            // Send the message.
            final SendMessageRequest sendMessageRequest =
SendMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageBody(largeMessage)
                    .build();

            sqsExtendedClient.sendMessage(sendMessageRequest);
            logger.info("Sent message of size: {}", largeMessage.length());

            // Receive and return the message.
            final ReceiveMessageResponse receiveMessageResponse =
sqsExtendedClient.receiveMessage(
                    ReceiveMessageRequest.builder().queueUrl(queueUrl).build());

            List<Message> messages = receiveMessageResponse.messages();
            if (messages.isEmpty()) {
                throw new RuntimeException("No messages received");
            }

            Message message = messages.getFirst();
            logger.info("\nMessage received.");
            logger.info("  ID: {}", message.messageId());
            logger.info("  Receipt handle: {}", message.receiptHandle());
            logger.info("  Message body size: {}", message.body().length());
            logger.info("  Message body (first 5 characters): {}",
message.body().substring(0, 5));

            return message;
        } catch (RuntimeException e) {
            logger.error("Error during message processing: {}", e.getMessage(), e);
            throw e;
        }
    }
```

- Untuk informasi selengkapnya, silakan lihat Panduan Developer AWS SDK for Java 2.x.

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateBucket
  - PutBucketLifecycleConfiguration
  - ReceiveMessage
  - SendMessage

Memproses pemberitahuan acara S3

Contoh kode berikut menunjukkan cara bekerja dengan pemberitahuan acara S3 dengan cara berorientasi objek.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh ini menunjukkan cara memproses acara notifikasi S3 dengan menggunakan Amazon SQS.

```
    /**
     * This method receives S3 event notifications by using an SqsAsyncClient.
     * After the client receives the messages it deserializes the JSON payload and
 logs them. It uses
     * the S3EventNotification class (part of the S3 event notification API for
 Java) to deserialize
     * the JSON payload and access the messages in an object-oriented way.
     *
     * @param queueUrl The URL of the AWS SQS queue that receives the S3 event
 notifications.
     * @see <a href="https://sdk.amazonaws.com/java/api/latest/software/amazon/
awssdk/eventnotifications/s3/model/package-summary.html">S3EventNotification API</
a>.
     * <p>
     * To use S3 event notification serialization/deserialization to objects, add
 the following
     * dependency to your Maven pom.xml file.
     * <dependency>
```

```
    * <groupId>software.amazon.awssdk</groupId>
    * <artifactId>s3-event-notifications</artifactId>
    * <version><LATEST></version>
    * </dependency>
    * <p>
    * The S3 event notification API became available with version 2.25.11 of the
Java SDK.
    * <p>
    * This example shows the use of the API with AWS SQS, but it can be used to
process S3 event notifications
    * in AWS SNS or AWS Lambda as well.
    * <p>
    * Note: The S3EventNotification class does not work with messages routed
through AWS EventBridge.
    */
   static void processS3Events(String bucketName, String queueUrl, String queueArn)
{
       try {
           // Configure the bucket to send Object Created and Object Tagging
notifications to an existing SQS queue.
           s3Client.putBucketNotificationConfiguration(b -> b
                   .notificationConfiguration(ncb -> ncb
                           .queueConfigurations(qcb -> qcb
                                   .events(Event.S3_OBJECT_CREATED,
Event.S3_OBJECT_TAGGING)
                                   .queueArn(queueArn)))
                           .bucket(bucketName)
           ).join();

           triggerS3EventNotifications(bucketName);
           // Wait for event notifications to propagate.
           Thread.sleep(Duration.ofSeconds(5).toMillis());

           boolean didReceiveMessages = true;
           while (didReceiveMessages) {
               // Display the number of messages that are available in the queue.
               sqsClient.getQueueAttributes(b -> b
                               .queueUrl(queueUrl)

.attributeNames(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)
                       ).thenAccept(attributeResponse ->
                               logger.info("Approximate number of messages in the
queue: {}",
```

```
attributeResponse.attributes().get(QueueAttributeName.APPROXIMATE_NUMBER_OF_MESSAGES)))
                        .join();

                // Receive the messages.
                ReceiveMessageResponse response = sqsClient.receiveMessage(b -> b
                        .queueUrl(queueUrl)
                ).get();
                logger.info("Count of received messages: {}",
response.messages().size());
                didReceiveMessages = !response.messages().isEmpty();

                // Create a collection to hold the received message for deletion
                // after we log the messages.
                HashSet<DeleteMessageBatchRequestEntry> messagesToDelete = new
HashSet<>();
                // Process each message.
                response.messages().forEach(message -> {
                    logger.info("Message id: {}", message.messageId());
                    // Deserialize JSON message body to a S3EventNotification object
                    // to access messages in an object-oriented way.
                    S3EventNotification event =
S3EventNotification.fromJson(message.body());

                    // Log the S3 event notification record details.
                    if (event.getRecords() != null) {
                        event.getRecords().forEach(record -> {
                            String eventName = record.getEventName();
                            String key = record.getS3().getObject().getKey();
                            logger.info(record.toString());
                            logger.info("Event name is {} and key is {}", eventName,
key);
                        });
                    }
                    // Add logged messages to collection for batch deletion.
                    messagesToDelete.add(DeleteMessageBatchRequestEntry.builder()
                            .id(message.messageId())
                            .receiptHandle(message.receiptHandle())
                            .build());
                });
                // Delete messages.
                if (!messagesToDelete.isEmpty()) {
                    sqsClient.deleteMessageBatch(DeleteMessageBatchRequest.builder()
                            .queueUrl(queueUrl)
```

```
                        .entries(messagesToDelete)
                        .build()
                ).join();
            }
        } // End of while block.
    } catch (InterruptedException | ExecutionException e) {
        throw new RuntimeException(e);
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - DeleteMessageBatch
  - GetQueueAttributes
  - PutBucketNotificationConfiguration
  - ReceiveMessage

Publikasikan pesan ke antrian

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat topik (FIFO atau non-FIFO).
- Berlangganan beberapa antrian ke topik dengan opsi untuk menerapkan filter.
- Publikasikan pesan ke topik.
- Polling antrian untuk pesan yang diterima.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
package com.example.sns;
```

```
import
 software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sns.SnsClient;
import software.amazon.awssdk.services.sns.model.CreateTopicRequest;
import software.amazon.awssdk.services.sns.model.CreateTopicResponse;
import software.amazon.awssdk.services.sns.model.DeleteTopicRequest;
import software.amazon.awssdk.services.sns.model.DeleteTopicResponse;
import software.amazon.awssdk.services.sns.model.MessageAttributeValue;
import software.amazon.awssdk.services.sns.model.PublishRequest;
import software.amazon.awssdk.services.sns.model.PublishResponse;
import software.amazon.awssdk.services.sns.model.SetSubscriptionAttributesRequest;
import software.amazon.awssdk.services.sns.model.SnsException;
import software.amazon.awssdk.services.sns.model.SubscribeRequest;
import software.amazon.awssdk.services.sns.model.SubscribeResponse;
import software.amazon.awssdk.services.sns.model.UnsubscribeRequest;
import software.amazon.awssdk.services.sns.model.UnsubscribeResponse;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueAttributesResponse;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlResponse;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SetQueueAttributesRequest;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import java.util.Scanner;

import com.google.gson.Gson;
import com.google.gson.JsonArray;
import com.google.gson.JsonObject;
import com.google.gson.JsonPrimitive;

/**
```

```
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 * <p>
 * For more information, see the following documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java example performs these tasks:
 * <p>
 * 1. Gives the user three options to choose from.
 * 2. Creates an Amazon Simple Notification Service (Amazon SNS) topic.
 * 3. Creates an Amazon Simple Queue Service (Amazon SQS) queue.
 * 4. Gets the SQS queue Amazon Resource Name (ARN) attribute.
 * 5. Attaches an AWS Identity and Access Management (IAM) policy to the queue.
 * 6. Subscribes to the SQS queue.
 * 7. Publishes a message to the topic.
 * 8. Displays the messages.
 * 9. Deletes the received message.
 * 10. Unsubscribes from the topic.
 * 11. Deletes the SNS topic.
 */
public class SNSWorkflow {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = "\n" +
            "Usage:\n" +
            "    <fifoQueueARN>\n\n" +
            "Where:\n" +
            "    accountId - Your AWS account Id value.";

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        SnsClient snsClient = SnsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
            .build();

        SqsClient sqsClient = SqsClient.builder()
            .region(Region.US_EAST_1)
            .credentialsProvider(EnvironmentVariableCredentialsProvider.create())
```

```
            .build();

        Scanner in = new Scanner(System.in);
        String accountId = args[0];
        String useFIFO;
        String duplication = "n";
        String topicName;
        String deduplicationID = null;
        String groupId = null;

        String topicArn;
        String sqsQueueName;
        String sqsQueueUrl;
        String sqsQueueArn;
        String subscriptionArn;
        boolean selectFIFO = false;

        String message;
        List<Message> messageList;
        List<String> filterList = new ArrayList<>();
        String msgAttValue = "";

        System.out.println(DASHES);
        System.out.println("Welcome to messaging with topics and queues.");
        System.out.println("In this scenario, you will create an SNS topic and
 subscribe an SQS queue to the topic.\n" +
            "You can select from several options for configuring the topic and the
 subscriptions for the queue.\n" +
            "You can then post to the topic and see the results in the queue.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("SNS topics can be configured as FIFO (First-In-First-
Out).\n" +
            "FIFO topics deliver messages in order and support deduplication and
 message filtering.\n" +
            "Would you like to work with FIFO topics? (y/n)");
        useFIFO = in.nextLine();
        if (useFIFO.compareTo("y") == 0) {
            selectFIFO = true;
            System.out.println("You have selected FIFO");
            System.out.println(" Because you have chosen a FIFO topic, deduplication
 is supported.\n" +
```

```
                "        Deduplication IDs are either set in the message or
 automatically generated from content using a hash function.\n"
                +
                "        If a message is successfully published to an SNS FIFO
 topic, any message published and determined to have the same deduplication ID,\n"
                +
                "        within the five-minute deduplication interval, is accepted
 but not delivered.\n" +
                "        For more information about deduplication, see https://
docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.");

            System.out.println(
                "Would you like to use content-based deduplication instead of
 entering a deduplication ID? (y/n)");
            duplication = in.nextLine();
            if (duplication.compareTo("y") == 0) {
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            } else {
                System.out.println("Please enter deduplication Id value");
                deduplicationID = in.nextLine();
                System.out.println("Please enter a group id value");
                groupId = in.nextLine();
            }
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("2. Create a topic.");
        System.out.println("Enter a name for your SNS topic.");
        topicName = in.nextLine();
        if (selectFIFO) {
            System.out.println("Because you have selected a FIFO topic, '.fifo' must
 be appended to the topic name.");
            topicName = topicName + ".fifo";
            System.out.println("The name of the topic is " + topicName);
            topicArn = createFIFO(snsClient, topicName, duplication);
            System.out.println("The ARN of the FIFO topic is " + topicArn);

        } else {
            System.out.println("The name of the topic is " + topicName);
            topicArn = createSNSTopic(snsClient, topicName);
            System.out.println("The ARN of the non-FIFO topic is " + topicArn);
```

```
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Create an SQS queue.");
        System.out.println("Enter a name for your SQS queue.");
        sqsQueueName = in.nextLine();
        if (selectFIFO) {
            sqsQueueName = sqsQueueName + ".fifo";
        }
        sqsQueueUrl = createQueue(sqsClient, sqsQueueName, selectFIFO);
        System.out.println("The queue URL is " + sqsQueueUrl);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("4. Get the SQS queue ARN attribute.");
        sqsQueueArn = getSQSQueueAttrs(sqsClient, sqsQueueUrl);
        System.out.println("The ARN of the new queue is " + sqsQueueArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Attach an IAM policy to the queue.");

        // Define the policy to use. Make sure that you change the REGION if you are
        // running this code
        // in a different region.
        String policy = """
        {
             "Statement": [
             {
                 "Effect": "Allow",
                         "Principal": {
                     "Service": "sns.amazonaws.com"
                 },
                 "Action": "sqs:SendMessage",
                         "Resource": "arn:aws:sqs:us-east-1:%s:%s",
                         "Condition": {
                     "ArnEquals": {
                         "aws:SourceArn": "arn:aws:sns:us-east-1:%s:%s"
                     }
                 }
             }
             ]
         }
```

```
        """.formatted(accountId, sqsQueueName, accountId, topicName);

        setQueueAttr(sqsClient, sqsQueueUrl, policy);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Subscribe to the SQS queue.");
        if (selectFIFO) {
            System.out.println(
                "If you add a filter to this subscription, then only the filtered
 messages will be received in the queue.\n"
                    +
                    "For information about message filtering, see https://
docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n"
                    +
                    "For this example, you can filter messages by a \"tone\"
 attribute.");
            System.out.println("Would you like to filter messages for " +
 sqsQueueName + "'s subscription to the topic "
                + topicName + "?  (y/n)");
            String filterAns = in.nextLine();
            if (filterAns.compareTo("y") == 0) {
                boolean moreAns = false;
                System.out.println("You can filter messages by one or more of the
 following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                while (!moreAns) {
                    System.out.println("Select a number or choose 0 to end.");
                    String ans = in.nextLine();
                    switch (ans) {
                        case "1":
                            filterList.add("cheerful");
                            break;
                        case "2":
                            filterList.add("funny");
                            break;
                        case "3":
                            filterList.add("serious");
                            break;
                        case "4":
                            filterList.add("sincere");
```

```
                            break;
                        default:
                            moreAns = true;
                            break;
                    }
                }
            }
        }
        subscriptionArn = subQueue(snsClient, topicArn, sqsQueueArn, filterList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Publish a message to the topic.");
        if (selectFIFO) {
            System.out.println("Would you like to add an attribute to this message?
(y/n)");
            String msgAns = in.nextLine();
            if (msgAns.compareTo("y") == 0) {
                System.out.println("You can filter messages by one or more of the
following \"tone\" attributes.");
                System.out.println("1. cheerful");
                System.out.println("2. funny");
                System.out.println("3. serious");
                System.out.println("4. sincere");
                System.out.println("Select a number or choose 0 to end.");
                String ans = in.nextLine();
                switch (ans) {
                    case "1":
                        msgAttValue = "cheerful";
                        break;
                    case "2":
                        msgAttValue = "funny";
                        break;
                    case "3":
                        msgAttValue = "serious";
                        break;
                    default:
                        msgAttValue = "sincere";
                        break;
                }

                System.out.println("Selected value is " + msgAttValue);
            }
            System.out.println("Enter a message.");
```

```
            message = in.nextLine();
            pubMessageFIFO(snsClient, message, topicArn, msgAttValue, duplication,
groupId, deduplicationID);

        } else {
            System.out.println("Enter a message.");
            message = in.nextLine();
            pubMessage(snsClient, message, topicArn);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Display the message. Press any key to continue.");
        in.nextLine();
        messageList = receiveMessages(sqsClient, sqsQueueUrl, msgAttValue);
        for (Message mes : messageList) {
            System.out.println("Message Id: " + mes.messageId());
            System.out.println("Full Message: " + mes.body());
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Delete the received message. Press any key to
continue.");
        in.nextLine();
        deleteMessages(sqsClient, sqsQueueUrl, messageList);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Unsubscribe from the topic and delete the queue.
Press any key to continue.");
        in.nextLine();
        unSub(snsClient, subscriptionArn);
        deleteSQSQueue(sqsClient, sqsQueueName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("11. Delete the topic. Press any key to continue.");
        in.nextLine();
        deleteSNSTopic(snsClient, topicArn);

        System.out.println(DASHES);
        System.out.println("The SNS/SQS workflow has completed successfully.");
        System.out.println(DASHES);
```

```
    }

    public static void deleteSNSTopic(SnsClient snsClient, String topicArn) {
        try {
            DeleteTopicRequest request = DeleteTopicRequest.builder()
                .topicArn(topicArn)
                .build();

            DeleteTopicResponse result = snsClient.deleteTopic(request);
            System.out.println("Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteSQSQueue(SqsClient sqsClient, String queueName) {
        try {
            GetQueueUrlRequest getQueueRequest = GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build();

            String queueUrl = sqsClient.getQueueUrl(getQueueRequest).queueUrl();
            DeleteQueueRequest deleteQueueRequest = DeleteQueueRequest.builder()
                .queueUrl(queueUrl)
                .build();

            sqsClient.deleteQueue(deleteQueueRequest);
            System.out.println(queueName + " was successfully deleted.");

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void unSub(SnsClient snsClient, String subscriptionArn) {
        try {
            UnsubscribeRequest request = UnsubscribeRequest.builder()
                .subscriptionArn(subscriptionArn)
                .build();
```

```
            UnsubscribeResponse result = snsClient.unsubscribe(request);
            System.out.println("Status was " + result.sdkHttpResponse().statusCode()
                + "\nSubscription was removed for " + request.subscriptionArn());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void deleteMessages(SqsClient sqsClient, String queueUrl,
List<Message> messages) {
        try {
            List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();
            for (Message msg : messages) {
                DeleteMessageBatchRequestEntry entry =
DeleteMessageBatchRequestEntry.builder()
                    .id(msg.messageId())
                    .build();

                entries.add(entry);
            }

            DeleteMessageBatchRequest deleteMessageBatchRequest =
DeleteMessageBatchRequest.builder()
                .queueUrl(queueUrl)
                .entries(entries)
                .build();

            sqsClient.deleteMessageBatch(deleteMessageBatchRequest);
            System.out.println("The batch delete of messages was successful");

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<Message> receiveMessages(SqsClient sqsClient, String
queueUrl, String msgAttValue) {
        try {
            if (msgAttValue.isEmpty()) {
                ReceiveMessageRequest receiveMessageRequest =
ReceiveMessageRequest.builder()
```

```
                    .queueUrl(queueUrl)
                    .maxNumberOfMessages(5)
                    .build();
                return sqsClient.receiveMessage(receiveMessageRequest).messages();
            } else {
                // We know there are filters on the message.
                ReceiveMessageRequest receiveRequest =
ReceiveMessageRequest.builder()
                    .queueUrl(queueUrl)
                    .messageAttributeNames(msgAttValue) // Include other message
attributes if needed.
                    .maxNumberOfMessages(5)
                    .build();

                return sqsClient.receiveMessage(receiveRequest).messages();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return null;
    }

    public static void pubMessage(SnsClient snsClient, String message, String
topicArn) {
        try {
            PublishRequest request = PublishRequest.builder()
                .message(message)
                .topicArn(topicArn)
                .build();

            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status is " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void pubMessageFIFO(SnsClient snsClient,
```

```
                                    String message,
                                    String topicArn,
                                    String msgAttValue,
                                    String duplication,
                                    String groupId,
                                    String deduplicationID) {

        try {
            PublishRequest request;
            // Means the user did not choose to use a message attribute.
            if (msgAttValue.isEmpty()) {
                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                }

            } else {
                Map<String, MessageAttributeValue> messageAttributes = new
HashMap<>();
                messageAttributes.put(msgAttValue, MessageAttributeValue.builder()
                    .dataType("String")
                    .stringValue("true")
                    .build());

                if (duplication.compareTo("y") == 0) {
                    request = PublishRequest.builder()
                        .message(message)
                        .messageGroupId(groupId)
                        .topicArn(topicArn)
                        .build();
                } else {
                    // Create a publish request with the message and attributes.
                    request = PublishRequest.builder()
                        .topicArn(topicArn)
```

```
                        .message(message)
                        .messageDeduplicationId(deduplicationID)
                        .messageGroupId(groupId)
                        .messageAttributes(messageAttributes)
                        .build();
                }
            }

            // Publish the message to the topic.
            PublishResponse result = snsClient.publish(request);
            System.out
                .println(result.messageId() + " Message sent. Status was " +
result.sdkHttpResponse().statusCode());

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    // Subscribe to the SQS queue.
    public static String subQueue(SnsClient snsClient, String topicArn, String
queueArn, List<String> filterList) {
        try {
            SubscribeRequest request;
            if (filterList.isEmpty()) {
                // No filter subscription is added.
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
                    .topicArn(topicArn)
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());
                return result.subscriptionArn();
            } else {
                request = SubscribeRequest.builder()
                    .protocol("sqs")
                    .endpoint(queueArn)
                    .returnSubscriptionArn(true)
```

```
                    .topicArn(topicArn)
                    .build();

                SubscribeResponse result = snsClient.subscribe(request);
                System.out.println("The queue " + queueArn + " has been subscribed
to the topic " + topicArn + "\n" +
                    "with the subscription ARN " + result.subscriptionArn());

                String attributeName = "FilterPolicy";
                Gson gson = new Gson();
                String jsonString = "{\"tone\": []}";
                JsonObject jsonObject = gson.fromJson(jsonString, JsonObject.class);
                JsonArray toneArray = jsonObject.getAsJsonArray("tone");
                for (String value : filterList) {
                    toneArray.add(new JsonPrimitive(value));
                }

                String updatedJsonString = gson.toJson(jsonObject);
                System.out.println(updatedJsonString);
                SetSubscriptionAttributesRequest attRequest =
SetSubscriptionAttributesRequest.builder()
                    .subscriptionArn(result.subscriptionArn())
                    .attributeName(attributeName)
                    .attributeValue(updatedJsonString)
                    .build();

                snsClient.setSubscriptionAttributes(attRequest);
                return result.subscriptionArn();
            }

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    // Attach a policy to the queue.
    public static void setQueueAttr(SqsClient sqsClient, String queueUrl, String
policy) {
        try {
            Map<software.amazon.awssdk.services.sqs.model.QueueAttributeName,
String> attrMap = new HashMap<>();
            attrMap.put(QueueAttributeName.POLICY, policy);
```

```
            SetQueueAttributesRequest attributesRequest =
SetQueueAttributesRequest.builder()
                .queueUrl(queueUrl)
                .attributes(attrMap)
                .build();

            sqsClient.setQueueAttributes(attributesRequest);
            System.out.println("The policy has been successfully attached.");

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static String getSQSQueueAttrs(SqsClient sqsClient, String queueUrl) {
        // Specify the attributes to retrieve.
        List<QueueAttributeName> atts = new ArrayList<>();
        atts.add(QueueAttributeName.QUEUE_ARN);

        GetQueueAttributesRequest attributesRequest =
GetQueueAttributesRequest.builder()
            .queueUrl(queueUrl)
            .attributeNames(atts)
            .build();

        GetQueueAttributesResponse response =
sqsClient.getQueueAttributes(attributesRequest);
        Map<String, String> queueAtts = response.attributesAsStrings();
        for (Map.Entry<String, String> queueAtt : queueAtts.entrySet())
            return queueAtt.getValue();

        return "";
    }

    public static String createQueue(SqsClient sqsClient, String queueName, Boolean
selectFIFO) {
        try {
            System.out.println("\nCreate Queue");
            if (selectFIFO) {
                Map<QueueAttributeName, String> attrs = new HashMap<>();
                attrs.put(QueueAttributeName.FIFO_QUEUE, "true");
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
```

```
                    .queueName(queueName)
                    .attributes(attrs)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            } else {
                CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();

                sqsClient.createQueue(createQueueRequest);
                System.out.println("\nGet queue url");
                GetQueueUrlResponse getQueueUrlResponse = sqsClient

.getQueueUrl(GetQueueUrlRequest.builder().queueName(queueName).build());
                return getQueueUrlResponse.queueUrl();
            }

        } catch (SqsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createSNSTopic(SnsClient snsClient, String topicName) {
        CreateTopicResponse result;
        try {
            CreateTopicRequest request = CreateTopicRequest.builder()
                .name(topicName)
                .build();

            result = snsClient.createTopic(request);
            return result.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
```

```
        return "";
    }

    public static String createFIFO(SnsClient snsClient, String topicName, String
 duplication) {
        try {
            // Create a FIFO topic by using the SNS service client.
            Map<String, String> topicAttributes = new HashMap<>();
            if (duplication.compareTo("n") == 0) {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "false");
            } else {
                topicAttributes.put("FifoTopic", "true");
                topicAttributes.put("ContentBasedDeduplication", "true");
            }

            CreateTopicRequest topicRequest = CreateTopicRequest.builder()
                .name(topicName)
                .attributes(topicAttributes)
                .build();

            CreateTopicResponse response = snsClient.createTopic(topicRequest);
            return response.topicArn();

        } catch (SnsException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes

- Publikasikan
- ReceiveMessage
- SetQueueAttributes
- Berlangganan
- Berhenti berlangganan

Mengirim dan menerima batch pesan

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Membuat antrean Amazon SQS.
- Kirim batch pesan ke antrian.
- Menerima kumpulan pesan dari antrian.
- Hapus kumpulan pesan dari antrian.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Seperti yang ditunjukkan dalam contoh berikut, Anda dapat menangani operasi pesan batch dengan Amazon SQS menggunakan dua pendekatan berbeda dengan: AWS SDK for Java 2.x

SendRecvBatch.java menggunakan operasi batch eksplisit. Anda secara manual membuat batch pesan dan menelepon `sendMessageBatch()` dan `deleteMessageBatch()` langsung. Anda juga menangani tanggapan batch, termasuk pesan yang gagal. Pendekatan ini memberi Anda kontrol penuh atas ukuran batch dan penanganan kesalahan. Namun, diperlukan lebih banyak kode untuk mengelola logika batching.

SimpleProducerConsumer.java menggunakan `SqsAsyncBatchManager` pustaka tingkat tinggi untuk batching permintaan otomatis. Anda membuat individu `sendMessage()` dan `deleteMessage()` panggilan dengan tanda tangan metode yang sama dengan klien standar. SDK secara otomatis menyangga panggilan ini dan mengirimkannya sebagai operasi batch.

Pendekatan ini membutuhkan perubahan kode minimal sambil memberikan manfaat kinerja batching.

Gunakan batching eksplisit saat Anda membutuhkan kontrol halus atas komposisi batch dan penanganan kesalahan. Gunakan batching otomatis saat Anda ingin mengoptimalkan kinerja dengan perubahan kode minimal.

SendRecvBatch.java - Menggunakan operasi batch eksplisit dengan pesan.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.BatchResultErrorEntry;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchResponse;
import software.amazon.awssdk.services.sqs.model.DeleteMessageBatchResultEntry;
import software.amazon.awssdk.services.sqs.model.DeleteQueueRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.MessageAttributeValue;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchRequestEntry;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageBatchResultEntry;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStream;
import java.io.InputStreamReader;
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;


/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
```

```
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

/**
 * This code demonstrates basic message operations in Amazon Simple Queue Service
 (Amazon SQS).
 */

public class SendRecvBatch {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SendRecvBatch.class);
    private static final SqsClient sqsClient = SqsClient.create();


    public static void main(String[] args) {
        usageDemo();
    }
    /**
     * Send a batch of messages in a single request to an SQS queue.
     * This request may return overall success even when some messages were not
 sent.
     * The caller must inspect the Successful and Failed lists in the response and
     * resend any failed messages.
     *
     * @param queueUrl  The URL of the queue to receive the messages.
     * @param messages  The messages to send to the queue. Each message contains a
 body and attributes.
     * @return The response from SQS that contains the list of successful and failed
 messages.
     */
    public static SendMessageBatchResponse sendMessages(
            String queueUrl, List<MessageEntry> messages) {

        try {
            List<SendMessageBatchRequestEntry> entries = new ArrayList<>();

            for (int i = 0; i < messages.size(); i++) {
                MessageEntry message = messages.get(i);
                entries.add(SendMessageBatchRequestEntry.builder()
                        .id(String.valueOf(i))
                        .messageBody(message.getBody())
                        .messageAttributes(message.getAttributes())
                        .build());
```

```
            }

            SendMessageBatchRequest sendBatchRequest =
SendMessageBatchRequest.builder()
                    .queueUrl(queueUrl)
                    .entries(entries)
                    .build();

            SendMessageBatchResponse response =
sqsClient.sendMessageBatch(sendBatchRequest);

            if (!response.successful().isEmpty()) {
                for (SendMessageBatchResultEntry resultEntry :
response.successful()) {
                    LOGGER.info("Message sent: {}: {}", resultEntry.messageId(),

messages.get(Integer.parseInt(resultEntry.id())).getBody());
                }
            }

            if (!response.failed().isEmpty()) {
                for (BatchResultErrorEntry errorEntry : response.failed()) {
                    LOGGER.warn("Failed to send: {}: {}", errorEntry.id(),

messages.get(Integer.parseInt(errorEntry.id())).getBody());
                }
            }

            return response;

        } catch (SqsException e) {
            LOGGER.error("Send messages failed to queue: {}", queueUrl, e);
            throw e;
        }
    }

    /**
     * Receive a batch of messages in a single request from an SQS queue.
     *
     * @param queueUrl   The URL of the queue from which to receive messages.
     * @param maxNumber  The maximum number of messages to receive (capped at 10 by
SQS).
     *                   The actual number of messages received might be less.
```

```
    * @param waitTime   The maximum time to wait (in seconds) before returning.
When
    *                   this number is greater than zero, long polling is used.
This
    *                   can result in reduced costs and fewer false empty
responses.
    * @return The list of Message objects received. These each contain the body
    *         of the message and metadata and custom attributes.
    */
   public static List<Message> receiveMessages(String queueUrl, int maxNumber, int
waitTime) {
       try {
           ReceiveMessageRequest receiveRequest = ReceiveMessageRequest.builder()
                   .queueUrl(queueUrl)
                   .maxNumberOfMessages(maxNumber)
                   .waitTimeSeconds(waitTime)
                   .messageAttributeNames("All")
                   .build();

           List<Message> messages =
sqsClient.receiveMessage(receiveRequest).messages();

           for (Message message : messages) {
               LOGGER.info("Received message: {}: {}", message.messageId(),
message.body());
           }

           return messages;

       } catch (SqsException e) {
           LOGGER.error("Couldn't receive messages from queue: {}", queueUrl, e);
           throw e;
       }
   }

   /**
    * Delete a batch of messages from a queue in a single request.
    *
    * @param queueUrl  The URL of the queue from which to delete the messages.
    * @param messages  The list of messages to delete.
    * @return The response from SQS that contains the list of successful and failed
    *         message deletions.
    */
```

```
   public static DeleteMessageBatchResponse deleteMessages(String queueUrl,
List<Message> messages) {
       try {
           List<DeleteMessageBatchRequestEntry> entries = new ArrayList<>();

           for (int i = 0; i < messages.size(); i++) {
               entries.add(DeleteMessageBatchRequestEntry.builder()
                       .id(String.valueOf(i))
                       .receiptHandle(messages.get(i).receiptHandle())
                       .build());
           }

           DeleteMessageBatchRequest deleteRequest =
DeleteMessageBatchRequest.builder()
                   .queueUrl(queueUrl)
                   .entries(entries)
                   .build();

           DeleteMessageBatchResponse response =
sqsClient.deleteMessageBatch(deleteRequest);

           if (!response.successful().isEmpty()) {
               for (DeleteMessageBatchResultEntry resultEntry :
response.successful()) {
                   LOGGER.info("Deleted {}",
messages.get(Integer.parseInt(resultEntry.id())).receiptHandle());
               }
           }

           if (!response.failed().isEmpty()) {
               for (BatchResultErrorEntry errorEntry : response.failed()) {
                   LOGGER.warn("Could not delete {}",
messages.get(Integer.parseInt(errorEntry.id())).receiptHandle());
               }
           }

           return response;

       } catch (SqsException e) {
           LOGGER.error("Couldn't delete messages from queue {}", queueUrl, e);
           throw e;
       }
   }
```

```
    /**
     * Helper class to represent a message with body and attributes.
     */
    public static class MessageEntry {
        private final String body;
        private final Map<String, MessageAttributeValue> attributes;

        public MessageEntry(String body, Map<String, MessageAttributeValue>
attributes) {
            this.body = body;
            this.attributes = attributes != null ? attributes : new HashMap<>();
        }

        public String getBody() {
            return body;
        }

        public Map<String, MessageAttributeValue> getAttributes() {
            return attributes;
        }
    }

    /**
     * Shows how to:
     * * Read the lines from a file and send the lines in
     *   batches of 10 as messages to a queue.
     * * Receive the messages in batches until the queue is empty.
     * * Reassemble the lines of the file and verify they match the original file.
     */
    public static void usageDemo() {
        LOGGER.info("-".repeat(88));
        LOGGER.info("Welcome to the Amazon Simple Queue Service (Amazon SQS)
demo!");
        LOGGER.info("-".repeat(88));

        String queueUrl = null;
        try {
            // Create a queue for the demo.
            String queueName = "sqs-usage-demo-message-wrapper-" +
System.currentTimeMillis();
            CreateQueueRequest createRequest = CreateQueueRequest.builder()
                    .queueName(queueName)
                    .build();
            queueUrl = sqsClient.createQueue(createRequest).queueUrl();
```

```
            LOGGER.info("Created queue: {}", queueUrl);

            try (InputStream inputStream =
SendRecvBatch.class.getResourceAsStream("/log4j2.xml");
                 BufferedReader reader = new BufferedReader(new
InputStreamReader(inputStream))) {

                List<String> lines = reader.lines().toList();

                // Send file lines in batches.
                int batchSize = 10;
                LOGGER.info("Sending file lines in batches of {} as messages.",
batchSize);

                for (int i = 0; i < lines.size(); i += batchSize) {
                    List<MessageEntry> messageBatch = new ArrayList<>();

                    for (int j = i; j < Math.min(i + batchSize, lines.size()); j++)
{
                        String line = lines.get(j);
                        if (line == null || line.trim().isEmpty()) {
                            continue; // Skip empty lines.
                        }

                        Map<String, MessageAttributeValue> attributes = new
HashMap<>();
                        attributes.put("line", MessageAttributeValue.builder()
                                .dataType("String")
                                .stringValue(String.valueOf(j))
                                .build());

                        messageBatch.add(new MessageEntry(lines.get(j),
attributes));
                    }

                    sendMessages(queueUrl, messageBatch);
                    System.out.print(".");
                    System.out.flush();
                }

                LOGGER.info("\nDone. Sent {} messages.", lines.size());

                // Receive and process messages.
```

```
                LOGGER.info("Receiving, handling, and deleting messages in batches
of {}.", batchSize);
                String[] receivedLines = new String[lines.size()];
                boolean moreMessages = true;

                while (moreMessages) {
                    List<Message> receivedMessages = receiveMessages(queueUrl,
batchSize, 5);

                    for (Message message : receivedMessages) {
                        int lineNumber =
Integer.parseInt(message.messageAttributes().get("line").stringValue());
                        receivedLines[lineNumber] = message.body();
                    }

                    if (!receivedMessages.isEmpty()) {
                        deleteMessages(queueUrl, receivedMessages);
                    } else {
                        moreMessages = false;
                    }
                }

                LOGGER.info("\nDone.");

                // Verify that all lines were received correctly.
                boolean allLinesMatch = true;
                for (int i = 0; i < lines.size(); i++) {
                    String originalLine = lines.get(i);
                    String receivedLine = receivedLines[i] == null ? "" :
receivedLines[i];

                    if (!originalLine.equals(receivedLine)) {
                        allLinesMatch = false;
                        break;
                    }
                }

                if (allLinesMatch) {
                    LOGGER.info("Successfully reassembled all file lines!");
                } else {
                    LOGGER.info("Uh oh, some lines were missed!");
                }
            }
        } catch (SqsException e) {
```

```
            LOGGER.error("SQS operation failed", e);
        } catch (RuntimeException | IOException e) {
            LOGGER.error("Unexpected runtime error during demo", e);
        } finally {
            // Clean up by deleting the queue if it was created.
            if (queueUrl != null) {
                try {
                    DeleteQueueRequest deleteQueueRequest =
 DeleteQueueRequest.builder()
                            .queueUrl(queueUrl)
                            .build();
                    sqsClient.deleteQueue(deleteQueueRequest);
                    LOGGER.info("Deleted queue: {}", queueUrl);
                } catch (SqsException e) {
                    LOGGER.error("Failed to delete queue: {}", queueUrl, e);
                }
            }
        }

        LOGGER.info("Thanks for watching!");
        LOGGER.info("-".repeat(88));
    }
 }
```

SimpleProducerConsumer.java - Menggunakan batching otomatis pesan.

```
package com.example.sqs;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsAsyncClient;
import software.amazon.awssdk.services.sqs.batchmanager.SqsAsyncBatchManager;
import software.amazon.awssdk.services.sqs.model.DeleteMessageRequest;
import software.amazon.awssdk.services.sqs.model.DeleteMessageResponse;
import software.amazon.awssdk.services.sqs.model.GetQueueUrlRequest;
import software.amazon.awssdk.services.sqs.model.Message;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageRequest;
import software.amazon.awssdk.services.sqs.model.ReceiveMessageResponse;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import software.amazon.awssdk.services.sqs.model.SendMessageResponse;
import software.amazon.awssdk.core.exception.SdkException;
```

```
import java.math.BigInteger;
import java.util.List;
import java.util.Random;
import java.util.Scanner;
import java.util.concurrent.CompletableFuture;
import java.util.concurrent.TimeUnit;
import java.util.concurrent.atomic.AtomicBoolean;
import java.util.concurrent.atomic.AtomicInteger;

/**
 * Demonstrates the AWS SDK for Java 2.x Automatic Request Batching API for Amazon
 SQS.
 *
 * This example showcases the high-level SqsAsyncBatchManager library that provides
 * efficient batching and buffering for SQS operations. The batch manager offers
 * methods that directly mirror SqsAsyncClient methods—sendMessage,
 changeMessageVisibility,
 * deleteMessage, and receiveMessage—making it a drop-in replacement with minimal
 code changes.
 *
 * Key features of the SqsAsyncBatchManager:
 * - Automatic batching: The SDK automatically buffers individual requests and sends
 them
 *   as batches when maxBatchSize (default: 10) or sendRequestFrequency (default:
 200ms)
 *   thresholds are reached
 * - Familiar API: Method signatures match SqsAsyncClient exactly, requiring no
 learning curve
 * - Background optimization: The batch manager maintains internal buffers and
 handles
 *   batching logic transparently
 * - Asynchronous operations: All methods return CompletableFuture for non-blocking
 execution
 *
 * Performance benefits demonstrated:
 * - Reduced API calls: Multiple individual requests are consolidated into single
 batch operations
 * - Lower costs: Fewer API calls result in reduced SQS charges
 * - Higher throughput: Batch operations process more messages per second
 * - Efficient resource utilization: Fewer network round trips and better connection
 reuse
 *
 * This example compares:
 * 1. Single-message operations using SqsAsyncClient directly
```

```
 * 2. Batch operations using SqsAsyncBatchManager with identical method calls
 *
 * Usage patterns:
 * - Set batch size to 1 to use SqsAsyncClient for baseline performance measurement
 * - Set batch size > 1 to use SqsAsyncBatchManager for optimized batch processing
 * - Monitor real-time throughput metrics to observe performance improvements
 *
 * Prerequisites:
 * - AWS SDK for Java 2.x version 2.28.0 or later
 * - An existing SQS queue
 * - Valid AWS credentials configured
 *
 * The program displays real-time metrics showing the dramatic performance
 difference
 * between individual operations and automatic batching.
 */
public class SimpleProducerConsumer {

    // The maximum runtime of the program.
    private final static int MAX_RUNTIME_MINUTES = 60;
    private final static Logger log =
 LoggerFactory.getLogger(SimpleProducerConsumer.class);

    /**
     * Runs the SQS batching demonstration with user-configured parameters.
     *
     * Prompts for queue name, thread counts, batch size, message size, and runtime.
     * Creates producer and consumer threads to demonstrate batching performance.
     *
     * @param args command line arguments (not used)
     * @throws InterruptedException if thread operations are interrupted
     */
    public static void main(String[] args) throws InterruptedException {

        final Scanner input = new Scanner(System.in);

        System.out.print("Enter the queue name: ");
        final String queueName = input.nextLine();

        System.out.print("Enter the number of producers: ");
        final int producerCount = input.nextInt();

        System.out.print("Enter the number of consumers: ");
        final int consumerCount = input.nextInt();
```

```
        System.out.print("Enter the number of messages per batch: ");
        final int batchSize = input.nextInt();

        System.out.print("Enter the message size in bytes: ");
        final int messageSizeByte = input.nextInt();

        System.out.print("Enter the run time in minutes: ");
        final int runTimeMinutes = input.nextInt();

        // Create SQS async client and batch manager for all operations.
        // The SqsAsyncBatchManager is created from the SqsAsyncClient using the
        // batchManager() factory method, which provides default batching
configuration.
        // This high-level library automatically handles request buffering and
batching
        // while maintaining the same method signatures as SqsAsyncClient.
        final SqsAsyncClient sqsAsyncClient = SqsAsyncClient.create();
        final SqsAsyncBatchManager batchManager = sqsAsyncClient.batchManager();

        final String queueUrl =
sqsAsyncClient.getQueueUrl(GetQueueUrlRequest.builder()
                .queueName(queueName)
                .build()).join().queueUrl();

        // The flag used to stop producer, consumer, and monitor threads.
        final AtomicBoolean stop = new AtomicBoolean(false);

        // Start the producers.
        final AtomicInteger producedCount = new AtomicInteger();
        final Thread[] producers = new Thread[producerCount];
        for (int i = 0; i < producerCount; i++) {
            if (batchSize == 1) {
                producers[i] = new Producer(sqsAsyncClient, queueUrl,
messageSizeByte,
                        producedCount, stop);
            } else {
                producers[i] = new BatchProducer(batchManager, queueUrl, batchSize,
                        messageSizeByte, producedCount, stop);
            }
            producers[i].start();
        }

        // Start the consumers.
```

```
        final AtomicInteger consumedCount = new AtomicInteger();
        final Thread[] consumers = new Thread[consumerCount];
        for (int i = 0; i < consumerCount; i++) {
            if (batchSize == 1) {
                consumers[i] = new Consumer(sqsAsyncClient, queueUrl, consumedCount,
stop);
            } else {
                consumers[i] = new BatchConsumer(batchManager, queueUrl, batchSize,
                        consumedCount, stop);
            }
            consumers[i].start();
        }

        // Start the monitor thread.
        final Thread monitor = new Monitor(producedCount, consumedCount, stop);
        monitor.start();

        // Wait for the specified amount of time then stop.
        Thread.sleep(TimeUnit.MINUTES.toMillis(Math.min(runTimeMinutes,
                MAX_RUNTIME_MINUTES)));
        stop.set(true);

        // Join all threads.
        for (int i = 0; i < producerCount; i++) {
            producers[i].join();
        }

        for (int i = 0; i < consumerCount; i++) {
            consumers[i].join();
        }

        monitor.interrupt();
        monitor.join();

        // Close resources
        batchManager.close();
        sqsAsyncClient.close();
    }

    /**
     * Creates a random string of approximately the specified size in bytes.
     *
     * @param sizeByte the target size in bytes for the generated string
     * @return a random string encoded in base-32
```

```
     */
    private static String makeRandomString(int sizeByte) {
        final byte[] bs = new byte[(int) Math.ceil(sizeByte * 5 / 8)];
        new Random().nextBytes(bs);
        bs[0] = (byte) ((bs[0] | 64) & 127);
        return new BigInteger(bs).toString(32);
    }

    /**
     * Sends messages individually using SqsAsyncClient for baseline performance
measurement.
     *
     * This producer demonstrates traditional single-message operations without
batching.
     * Each sendMessage() call results in a separate API request to SQS, providing
     * a performance baseline for comparison with the batch operations.
     *
     * The sendMessage() method signature is identical to
SqsAsyncBatchManager.sendMessage(),
     * showing how the high-level batching library maintains API compatibility while
     * adding automatic optimization behind the scenes.
     */
    private static class Producer extends Thread {
        final SqsAsyncClient sqsAsyncClient;
        final String queueUrl;
        final AtomicInteger producedCount;
        final AtomicBoolean stop;
        final String theMessage;

        /**
         * Creates a producer thread for single-message operations.
         *
         * @param sqsAsyncClient the SQS client for sending messages
         * @param queueUrl the URL of the target queue
         * @param messageSizeByte the size of messages to generate
         * @param producedCount shared counter for tracking sent messages
         * @param stop shared flag to signal thread termination
         */
        Producer(SqsAsyncClient sqsAsyncClient, String queueUrl, int
messageSizeByte,
                 AtomicInteger producedCount, AtomicBoolean stop) {
            this.sqsAsyncClient = sqsAsyncClient;
            this.queueUrl = queueUrl;
            this.producedCount = producedCount;
```

```
            this.stop = stop;
            this.theMessage = makeRandomString(messageSizeByte);
        }

        /**
         * Continuously sends messages until the stop flag is set.
         *
         * Uses SqsAsyncClient.sendMessage() directly, resulting in one API call per
message.
         * This approach provides baseline performance metrics for comparison with
batching.
         * Each call blocks until the individual message is sent, demonstrating
traditional
         * one-request-per-operation behavior.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    sqsAsyncClient.sendMessage(SendMessageRequest.builder()
                            .queueUrl(queueUrl)
                            .messageBody(theMessage)
                            .build()).join();
                    producedCount.incrementAndGet();
                }
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
                // If this unlikely condition occurs, stop.
                log.error("Producer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Sends messages using SqsAsyncBatchManager for automatic request batching and
optimization.
     *
     * This producer demonstrates the AWS SDK for Java 2.x high-level batching
library.
     * The SqsAsyncBatchManager automatically buffers individual sendMessage() calls
and
     * sends them as batches when thresholds are reached:
     * - maxBatchSize: Maximum 10 messages per batch (default)
```

```
    * - sendRequestFrequency: 200ms timeout before sending partial batches
(default)
    *
    * Key advantages of the batching approach:
    * - Identical API: batchManager.sendMessage() has the same signature as
sqsAsyncClient.sendMessage()
    * - Automatic optimization: No code changes needed to benefit from batching
    * - Transparent buffering: The SDK handles batching logic internally
    * - Reduced API calls: Multiple messages sent in single batch requests
    * - Lower costs: Fewer API calls result in reduced SQS charges
    * - Higher throughput: Batch operations process significantly more messages per
second
    */
   private static class BatchProducer extends Thread {
       final SqsAsyncBatchManager batchManager;
       final String queueUrl;
       final int batchSize;
       final AtomicInteger producedCount;
       final AtomicBoolean stop;
       final String theMessage;

       /**
        * Creates a producer thread for batch operations.
        *
        * @param batchManager the batch manager for efficient message sending
        * @param queueUrl the URL of the target queue
        * @param batchSize the number of messages to send per batch
        * @param messageSizeByte the size of messages to generate
        * @param producedCount shared counter for tracking sent messages
        * @param stop shared flag to signal thread termination
        */
       BatchProducer(SqsAsyncBatchManager batchManager, String queueUrl, int
batchSize,
                     int messageSizeByte, AtomicInteger producedCount,
                     AtomicBoolean stop) {
           this.batchManager = batchManager;
           this.queueUrl = queueUrl;
           this.batchSize = batchSize;
           this.producedCount = producedCount;
           this.stop = stop;
           this.theMessage = makeRandomString(messageSizeByte);
       }

       /**
```

```
        * Continuously sends batches of messages using the high-level batching
library.
        *
        * Notice how batchManager.sendMessage() uses the exact same method
signature
        * and request builder pattern as SqsAsyncClient.sendMessage(). This
demonstrates
        * the drop-in replacement capability of the SqsAsyncBatchManager.
        *
        * The SDK automatically:
        * - Buffers individual sendMessage() calls internally
        * - Groups them into batch requests when thresholds are met
        * - Sends SendMessageBatchRequest operations to SQS
        * - Returns individual CompletableFuture responses for each message
        *
        * This transparent batching provides significant performance improvements
        * without requiring changes to application logic or error handling
patterns.
        */
       public void run() {
           try {
               while (!stop.get()) {
                   // Send multiple messages using the high-level batch manager.
                   // Each batchManager.sendMessage() call uses identical syntax to
                   // sqsAsyncClient.sendMessage(), demonstrating API
compatibility.
                   // The SDK automatically buffers these calls and sends them as
                   // batch operations when maxBatchSize (10) or
sendRequestFrequency (200ms)
                   // thresholds are reached, significantly improving throughput.
                   for (int i = 0; i < batchSize; i++) {
                       CompletableFuture<SendMessageResponse> future =
batchManager.sendMessage(
                                SendMessageRequest.builder()
                                        .queueUrl(queueUrl)
                                        .messageBody(theMessage)
                                        .build());

                       // Handle the response asynchronously
                       future.whenComplete((response, throwable) -> {
                           if (throwable == null) {
                               producedCount.incrementAndGet();
                           } else if (!(throwable instanceof
java.util.concurrent.CancellationException) &&
```

```
                                        !(throwable.getMessage() != null &&
throwable.getMessage().contains("executor not accepting a task"))) {
                                    log.error("BatchProducer: Failed to send message",
throwable);
                                }
                                // Ignore CancellationException and executor shutdown
errors - expected during shutdown
                            });
                    }

                    // Small delay to allow batching to occur
                    Thread.sleep(10);
                }
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                log.error("BatchProducer interrupted: " + e.getMessage());
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                log.error("BatchProducer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Receives and deletes messages individually using SqsAsyncClient for baseline
measurement.
     *
     * This consumer demonstrates traditional single-message operations without
batching.
     * Each receiveMessage() and deleteMessage() call results in separate API
requests,
     * providing a performance baseline for comparison with batch operations.
     *
     * The method signatures are identical to SqsAsyncBatchManager methods:
     * - receiveMessage() matches batchManager.receiveMessage()
     * - deleteMessage() matches batchManager.deleteMessage()
     *
     * This API consistency allows easy migration to the high-level batching
library.
     */
    private static class Consumer extends Thread {
        final SqsAsyncClient sqsAsyncClient;
        final String queueUrl;
        final AtomicInteger consumedCount;
```

```
        final AtomicBoolean stop;

        /**
         * Creates a consumer thread for single-message operations.
         *
         * @param sqsAsyncClient the SQS client for receiving messages
         * @param queueUrl the URL of the source queue
         * @param consumedCount shared counter for tracking processed messages
         * @param stop shared flag to signal thread termination
         */
        Consumer(SqsAsyncClient sqsAsyncClient, String queueUrl, AtomicInteger
 consumedCount,
                 AtomicBoolean stop) {
            this.sqsAsyncClient = sqsAsyncClient;
            this.queueUrl = queueUrl;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Continuously receives and deletes messages using traditional single-
request operations.
         *
         * Uses SqsAsyncClient methods directly:
         * - receiveMessage(): One API call per receive operation
         * - deleteMessage(): One API call per delete operation
         *
         * This approach demonstrates the baseline performance without batching
 optimization.
         * Compare these method calls with the identical signatures used in
 BatchConsumer
         * to see how the high-level batching library maintains API compatibility.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    try {
                        final ReceiveMessageResponse result =
 sqsAsyncClient.receiveMessage(
                                ReceiveMessageRequest.builder()
                                        .queueUrl(queueUrl)
                                        .build()).join();

                        if (!result.messages().isEmpty()) {
```

```
                            final Message m = result.messages().get(0);
                            // Note: deleteMessage() signature identical to
batchManager.deleteMessage()

sqsAsyncClient.deleteMessage(DeleteMessageRequest.builder()
                                    .queueUrl(queueUrl)
                                    .receiptHandle(m.receiptHandle())
                                    .build()).join();
                            consumedCount.incrementAndGet();
                        }
                    } catch (SdkException | java.util.concurrent.CompletionException
e) {
                        log.error(e.getMessage());
                    }
                }
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
                // If this unlikely condition occurs, stop.
                log.error("Consumer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Receives and deletes messages using SqsAsyncBatchManager for automatic
optimization.
     *
     * This consumer demonstrates the AWS SDK for Java 2.x high-level batching
library
     * for message consumption. The SqsAsyncBatchManager provides two key
optimizations:
     *
     * 1. Receive optimization: Maintains an internal buffer of messages fetched in
the
     *    background, so receiveMessage() calls return immediately from the buffer
     * 2. Delete batching: Automatically buffers deleteMessage() calls and sends
them
     *    as DeleteMessageBatchRequest operations when thresholds are reached
     *
     * Key features:
     * - Identical API: receiveMessage() and deleteMessage() have the same
signatures
```

```
     *   as SqsAsyncClient methods, making this a true drop-in replacement
     * - Background fetching: The batch manager continuously fetches messages to
keep
     *   the internal buffer populated, reducing receive latency
     * - Automatic delete batching: Individual deleteMessage() calls are buffered
and
     *   sent as batch operations (up to 10 per batch, 200ms frequency)
     * - Transparent optimization: No application logic changes needed to benefit
     *
     * Performance benefits:
     * - Reduced API calls through automatic batching of delete operations
     * - Lower latency for receives due to background message buffering
     * - Higher overall throughput with fewer network round trips
     */
    private static class BatchConsumer extends Thread {
        final SqsAsyncBatchManager batchManager;
        final String queueUrl;
        final int batchSize;
        final AtomicInteger consumedCount;
        final AtomicBoolean stop;

        /**
         * Creates a consumer thread for batch operations.
         *
         * @param batchManager the batch manager for efficient message processing
         * @param queueUrl the URL of the source queue
         * @param batchSize the maximum number of messages to receive per batch
         * @param consumedCount shared counter for tracking processed messages
         * @param stop shared flag to signal thread termination
         */
        BatchConsumer(SqsAsyncBatchManager batchManager, String queueUrl, int
batchSize,
                      AtomicInteger consumedCount, AtomicBoolean stop) {
            this.batchManager = batchManager;
            this.queueUrl = queueUrl;
            this.batchSize = batchSize;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Continuously receives and deletes messages using the high-level batching
library.
         *
```

```
        * Demonstrates the key advantage of SqsAsyncBatchManager: identical method
signatures
        * with automatic optimization. Notice how:
        *
        * - batchManager.receiveMessage() uses the same syntax as
sqsAsyncClient.receiveMessage()
        * - batchManager.deleteMessage() uses the same syntax as
sqsAsyncClient.deleteMessage()
        *
        * Behind the scenes, the batch manager:
        * 1. Maintains an internal message buffer populated by background fetching
        * 2. Returns messages immediately from the buffer (reduced latency)
        * 3. Automatically batches deleteMessage() calls into
DeleteMessageBatchRequest operations
        * 4. Sends batch deletes when maxBatchSize (10) or sendRequestFrequency
(200ms) is reached
        *
        * This provides significant performance improvements with zero code changes
        * compared to traditional SqsAsyncClient usage patterns.
        */
       public void run() {
           try {
               while (!stop.get()) {
                   // Receive messages using the high-level batch manager.
                   // This call uses identical syntax to
sqsAsyncClient.receiveMessage()
                   // but benefits from internal message buffering for improved
performance.
                   final ReceiveMessageResponse result =
batchManager.receiveMessage(
                           ReceiveMessageRequest.builder()
                                   .queueUrl(queueUrl)
                                   .maxNumberOfMessages(Math.min(batchSize, 10))
                                   .build()).join();

                   if (!result.messages().isEmpty()) {
                       final List<Message> messages = result.messages();

                       // Delete messages using the batch manager.
                       // Each deleteMessage() call uses identical syntax to
SqsAsyncClient
                       // but the SDK automatically buffers these calls and sends
them
```

```
                        // as DeleteMessageBatchRequest operations for optimal
performance.
                        for (Message message : messages) {
                            CompletableFuture<DeleteMessageResponse> future =
batchManager.deleteMessage(
                                    DeleteMessageRequest.builder()
                                            .queueUrl(queueUrl)
                                            .receiptHandle(message.receiptHandle())
                                            .build());

                            future.whenComplete((response, throwable) -> {
                                if (throwable == null) {
                                    consumedCount.incrementAndGet();
                                } else if (!(throwable instanceof
java.util.concurrent.CancellationException) &&
                                        !(throwable.getMessage() != null &&
throwable.getMessage().contains("executor not accepting a task"))) {
                                    log.error("BatchConsumer: Failed to delete
message", throwable);
                                }
                                // Ignore CancellationException and executor
shutdown errors - expected during shutdown
                            });
                        }
                    }

                    // Small delay to prevent tight polling
                    Thread.sleep(10);
                }
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                log.error("BatchConsumer interrupted: " + e.getMessage());
            } catch (SdkException | java.util.concurrent.CompletionException e) {
                // Handle both SdkException and CompletionException from async
operations.
                // If this unlikely condition occurs, stop.
                log.error("BatchConsumer: " + e.getMessage());
                System.exit(1);
            }
        }
    }

    /**
     * Displays real-time throughput statistics every second.
```

```
     *
     * This thread logs the current count of produced and consumed messages
     * to help you monitor the performance comparison.
     */
    private static class Monitor extends Thread {
        private final AtomicInteger producedCount;
        private final AtomicInteger consumedCount;
        private final AtomicBoolean stop;

        /**
         * Creates a monitoring thread that displays throughput statistics.
         *
         * @param producedCount shared counter for messages sent
         * @param consumedCount shared counter for messages processed
         * @param stop shared flag to signal thread termination
         */
        Monitor(AtomicInteger producedCount, AtomicInteger consumedCount,
                AtomicBoolean stop) {
            this.producedCount = producedCount;
            this.consumedCount = consumedCount;
            this.stop = stop;
        }

        /**
         * Logs throughput statistics every second until stopped.
         *
         * Displays the current count of produced and consumed messages
         * to help monitor the performance comparison between batching strategies.
         */
        public void run() {
            try {
                while (!stop.get()) {
                    Thread.sleep(1000);
                    log.info("produced messages = " + producedCount.get()
                            + ", consumed messages = " + consumedCount.get());
                }
            } catch (InterruptedException e) {
                // Allow the thread to exit.
            }
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateQueue
  - DeleteMessage
  - DeleteMessageBatch
  - DeleteQueue
  - ReceiveMessage
  - SendMessage
  - SendMessageBatch

Gunakan Amazon SQS Java Messaging Library untuk bekerja dengan antarmuka JMS

Contoh kode berikut menunjukkan cara menggunakan Amazon SQS Java Messaging Library untuk bekerja dengan antarmuka JMS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh berikut bekerja dengan antrian Amazon SQS standar dan termasuk:

- Mengirim pesan teks.
- Menerima pesan secara sinkron.
- Menerima pesan secara asinkron.
- Menerima pesan menggunakan mode CLIENT_ACCOGNEWNED.
- Menerima pesan menggunakan mode UNORDERED_ACCOGNEWNED.
- Menggunakan Spring untuk menyuntikkan dependensi.
- Kelas utilitas yang menyediakan metode umum yang digunakan oleh contoh lain.

Untuk informasi selengkapnya tentang penggunaan JMS dengan Amazon SQS, lihat Panduan Pengembang Amazon SQS.

Mengirim pesan teks.

```
   /**
    * This method establishes a connection to a standard Amazon SQS queue using the
Amazon SQS
    * Java Messaging Library and sends text messages to it. It uses JMS (Java
Message Service) API
    * with automatic acknowledgment mode to ensure reliable message delivery, and
automatically
    * manages all messaging resources.
    *
    * @throws JMSException If there is a problem connecting to or sending messages
to the queue
    */
   public static void doSendTextMessage() throws JMSException {
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create the connection in a try-with-resources statement so that it's
closed automatically.
       try (SQSConnection connection = connectionFactory.createConnection()) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

           // Create a session that uses the JMS auto-acknowledge mode.
           Session session = connection.createSession(false,
Session.AUTO_ACKNOWLEDGE);
           MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));

           createAndSendMessages(session, producer);
       } // The connection closes automatically. This also closes the session.
       LOGGER.info("Connection closed");
   }

   /**
    * This method reads text input from the keyboard and sends each line as a
separate message
    * to a standard Amazon SQS queue using the Amazon SQS Java Messaging Library.
It continues
```

```
    * to accept input until the user enters an empty line, using JMS (Java Message
Service) API to
    * handle the message delivery.
    *
    * @param session The JMS session used to create messages
    * @param producer The JMS message producer used to send messages to the queue
    */
   private static void createAndSendMessages(Session session, MessageProducer
producer) {
       BufferedReader inputReader = new BufferedReader(
               new InputStreamReader(System.in, Charset.defaultCharset()));

       try {
           String input;
           while (true) {
               LOGGER.info("Enter message to send (leave empty to exit): ");
               input = inputReader.readLine();
               if (input == null || input.isEmpty()) break;

               TextMessage message = session.createTextMessage(input);
               producer.send(message);
               LOGGER.info("Send message {}", message.getJMSMessageID());
           }
       } catch (EOFException e) {
           // Just return on EOF
       } catch (IOException e) {
           LOGGER.error("Failed reading input: {}", e.getMessage(), e);
       } catch (JMSException e) {
           LOGGER.error("Failed sending message: {}", e.getMessage(), e);
       }
   }
```

Menerima pesan secara sinkron.

```
   /**
    * This method receives messages from a standard Amazon SQS queue using the
Amazon SQS Java
    * Messaging Library. It creates a connection to the queue using JMS (Java
Message Service),
    * waits for messages to arrive, and processes them one at a time. The method
handles all
    * necessary setup and cleanup of messaging resources.
```

```
    *
    * @throws JMSException If there is a problem connecting to or receiving
messages from the queue
    */
   public static void doReceiveMessageSync() throws JMSException {
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create a connection.
       try (SQSConnection connection = connectionFactory.createConnection() ) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

           // Create a session.
           Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);
           MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

           connection.start();

           receiveMessages(consumer);
       }  // The connection closes automatically. This also closes the session.
       LOGGER.info("Connection closed");
   }

   /**
    * This method continuously checks for new messages from a standard Amazon SQS
queue using
    * the Amazon SQS Java Messaging Library. It waits up to 20 seconds for each
message, processes
    * it using JMS (Java Message Service), and confirms receipt. The method stops
checking for
    * messages after 20 seconds of no activity.
    *
    * @param consumer The JMS message consumer that receives messages from the
queue
    */
   private static void receiveMessages(MessageConsumer consumer) {
```

```
        try {
            while (true) {
                LOGGER.info("Waiting for messages...");
                // Wait 1 minute for a message
                Message message =
consumer.receive(Duration.ofSeconds(20).toMillis());
                if (message == null) {
                    LOGGER.info("Shutting down after 20 seconds of silence.");
                    break;
                }
                SqsJmsExampleUtils.handleMessage(message);
                message.acknowledge();
                LOGGER.info("Acknowledged message {}", message.getJMSMessageID());
            }
        } catch (JMSException e) {
            LOGGER.error("Error receiving from SQS: {}", e.getMessage(), e);
        }
    }
```

Menerima pesan secara asinkron.

```
    /**
     * This method sets up automatic message handling for a standard Amazon SQS
queue using the
     * Amazon SQS Java Messaging Library. It creates a listener that processes
messages as soon
     * as they arrive using JMS (Java Message Service), runs for 5 seconds, then
cleans up all
     * messaging resources.
     *
     * @throws JMSException If there is a problem connecting to or receiving
messages from the queue
     */
    public static void doReceiveMessageAsync() throws JMSException {
        // Create a connection factory.
        SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                new ProviderConfiguration(),
                SqsClient.create()
        );

        // Create a connection.
        try (SQSConnection connection = connectionFactory.createConnection() ) {
```

```
            // Create the queue if needed.
            SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);

            // Create a session.
            Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

            try {
                // Create a consumer for the queue.
                MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));
                // Provide an implementation of the MessageListener interface, which
has a single 'onMessage' method.
                // We use a lambda expression for the implementation.
                consumer.setMessageListener(message -> {
                    try {
                        SqsJmsExampleUtils.handleMessage(message);
                        message.acknowledge();
                    } catch (JMSException e) {
                        LOGGER.error("Error processing message: {}",
e.getMessage());
                    }
                });
                // Start receiving incoming messages.
                connection.start();
                LOGGER.info("Waiting for messages...");
            } catch (JMSException e) {
                throw new RuntimeException(e);
            }
            try {
                Thread.sleep(5000);
            } catch (InterruptedException e) {
                throw new RuntimeException(e);
            }
        }  // The connection closes automatically. This also closes the session.
        LOGGER.info( "Connection closed" );
    }
```

Menerima pesan menggunakan mode CLIENT_ACCOGNEWNED.

```
   /**
    * This method demonstrates how message acknowledgment affects message
processing in a standard
    * Amazon SQS queue using the Amazon SQS Java Messaging Library. It sends
messages to the queue,
    * then shows how JMS (Java Message Service) client acknowledgment mode handles
both explicit
    * and implicit message confirmations, including how acknowledging one message
can automatically
    * acknowledge previous messages.
    *
    * @throws JMSException If there is a problem with the messaging operations
    */
   public static void doReceiveMessagesSyncClientAcknowledge() throws JMSException
{
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create the connection in a try-with-resources statement so that it's
closed automatically.
       try (SQSConnection connection = connectionFactory.createConnection() ) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
TIME_OUT_SECONDS);

           // Create a session with client acknowledge mode.
           Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

           // Create a producer and consumer.
           MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));
           MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

           // Open the connection.
           connection.start();

           // Send two text messages.
```

```
            sendMessage(producer, session, "Message 1");
            sendMessage(producer, session, "Message 2");

            // Receive a message and don't acknowledge it.
            receiveMessage(consumer, false);

            // Receive another message and acknowledge it.
            receiveMessage(consumer, true);

            // Wait for the visibility time out, so that unacknowledged messages
reappear in the queue,
            LOGGER.info("Waiting for visibility timeout...");
            try {
                Thread.sleep(TIME_OUT_MILLIS);
            } catch (InterruptedException e) {
                LOGGER.error("Interrupted while waiting for visibility timeout", e);
                Thread.currentThread().interrupt();
                throw new RuntimeException("Processing interrupted", e);
            }

            /*  We will attempt to receive another message, but none will be
available. This is because in
                CLIENT_ACKNOWLEDGE mode, when we acknowledged the second message,
all previous messages were
                automatically acknowledged as well. Therefore, although we never
directly acknowledged the first
                message, it was implicitly acknowledged when we confirmed the second
one. */
            receiveMessage(consumer, true);
        } // The connection closes automatically. This also closes the session.
        LOGGER.info("Connection closed.");

    }


    /**
     * Sends a text message using the specified JMS MessageProducer and Session.
     *
     * @param producer    The JMS MessageProducer used to send the message
     * @param session     The JMS Session used to create the text message
     * @param messageText The text content to be sent in the message
     * @throws JMSException If there is an error creating or sending the message
     */
```

```
   private static void sendMessage(MessageProducer producer, Session session,
String messageText) throws JMSException {
       // Create a text message and send it.
       producer.send(session.createTextMessage(messageText));
   }

   /**
    * Receives and processes a message from a JMS queue using the specified
consumer.
    * The method waits for a message until the configured timeout period is
reached.
    * If a message is received, it is logged and optionally acknowledged based on
the
    * acknowledge parameter.
    *
    * @param consumer    The JMS MessageConsumer used to receive messages from the
queue
    * @param acknowledge Boolean flag indicating whether to acknowledge the
message.
    *                    If true, the message will be acknowledged after processing
    * @throws JMSException If there is an error receiving, processing, or
acknowledging the message
    */
   private static void receiveMessage(MessageConsumer consumer, boolean
acknowledge) throws JMSException {
       // Receive a message.
       Message message = consumer.receive(TIME_OUT_MILLIS);

       if (message == null) {
           LOGGER.info("Queue is empty!");
       } else {
           // Since this queue has only text messages, cast the message object and
print the text.
           LOGGER.info("Received: {}    Acknowledged: {}", ((TextMessage)
message).getText(), acknowledge);

           // Acknowledge the message if asked.
           if (acknowledge) message.acknowledge();
       }
   }
```

Menerima pesan menggunakan mode UNORDERED_ACCOGNEWNED.

```
   /**
    * Demonstrates message acknowledgment behavior in UNORDERED_ACKNOWLEDGE mode
with Amazon SQS JMS.
    * In this mode, each message must be explicitly acknowledged regardless of
receive order.
    * Unacknowledged messages return to the queue after the visibility timeout
expires,
    * unlike CLIENT_ACKNOWLEDGE mode where acknowledging one message acknowledges
all previous messages.
    *
    * @throws JMSException         If a JMS-related error occurs during message
operations
    */
   public static void doReceiveMessagesUnorderedAcknowledge() throws JMSException {
       // Create a connection factory.
       SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
               new ProviderConfiguration(),
               SqsClient.create()
       );

       // Create the connection in a try-with-resources statement so that it's
closed automatically.
       try( SQSConnection connection = connectionFactory.createConnection() ) {

           // Create the queue if needed.
           SqsJmsExampleUtils.ensureQueueExists(connection, QUEUE_NAME,
TIME_OUT_SECONDS);

           // Create a session with unordered acknowledge mode.
           Session session = connection.createSession(false,
SQSSession.UNORDERED_ACKNOWLEDGE);

           // Create the producer and consumer.
           MessageProducer producer =
session.createProducer(session.createQueue(QUEUE_NAME));
           MessageConsumer consumer =
session.createConsumer(session.createQueue(QUEUE_NAME));

           // Open a connection.
           connection.start();

           // Send two text messages.
           sendMessage(producer, session, "Message 1");
```

```
            sendMessage(producer, session, "Message 2");

            // Receive a message and don't acknowledge it.
            receiveMessage(consumer, false);

            // Receive another message and acknowledge it.
            receiveMessage(consumer, true);

            // Wait for the visibility time out, so that unacknowledged messages
reappear in the queue.
            LOGGER.info("Waiting for visibility timeout...");
            try {
                Thread.sleep(TIME_OUT_MILLIS);
            } catch (InterruptedException e) {
                LOGGER.error("Interrupted while waiting for visibility timeout", e);
                Thread.currentThread().interrupt();
                throw new RuntimeException("Processing interrupted", e);
            }

            /*  We will attempt to receive another message, and we'll get the first
message again. This occurs
                because in UNORDERED_ACKNOWLEDGE mode, each message requires its own
separate acknowledgment.
                Since we only acknowledged the second message, the first message
remains in the queue for
                redelivery. */
            receiveMessage(consumer, true);

            LOGGER.info("Connection closed.");
        } // The connection closes automatically. This also closes the session.
    }

    /**
     * Sends a text message to an Amazon SQS queue using JMS.
     *
     * @param producer    The JMS MessageProducer for the queue
     * @param session     The JMS Session for message creation
     * @param messageText The message content
     * @throws JMSException If message creation or sending fails
     */
    private static void sendMessage(MessageProducer producer, Session session,
String messageText) throws JMSException {
        // Create a text message and send it.
        producer.send(session.createTextMessage(messageText));
```

```
    }
    /**
     * Synchronously receives a message from an Amazon SQS queue using the JMS API
     * with an acknowledgment parameter.
     *
     * @param consumer    The JMS MessageConsumer for the queue
     * @param acknowledge If true, acknowledges the message after receipt
     * @throws JMSException If message reception or acknowledgment fails
     */
    private static void receiveMessage(MessageConsumer consumer, boolean
 acknowledge) throws JMSException {
        // Receive a message.
        Message message = consumer.receive(TIME_OUT_MILLIS);

        if (message == null) {
            LOGGER.info("Queue is empty!");
        } else {
            // Since this queue has only text messages, cast the message object and
 print the text.
            LOGGER.info("Received: {}    Acknowledged: {}", ((TextMessage)
 message).getText(), acknowledge);

            // Acknowledge the message if asked.
            if (acknowledge) message.acknowledge();
        }
    }
```

Menggunakan Spring untuk menyuntikkan dependensi.

```
package com.example.sqs.jms.spring;

import com.amazon.sqs.javamessaging.SQSConnection;
import com.example.sqs.jms.SqsJmsExampleUtils;
import jakarta.jms.*;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.beans.factory.NoSuchBeanDefinitionException;
import org.springframework.context.support.FileSystemXmlApplicationContext;

import java.io.File;
import java.net.URL;
import java.util.concurrent.TimeUnit;
```

```
/**
 * Demonstrates how to send and receive messages using the Amazon SQS Java Messaging
 Library
 * with Spring Framework integration. This example connects to a standard Amazon SQS
 message
 * queue using Spring's dependency injection to configure the connection and
 messaging components.
 * The application uses the JMS (Java Message Service) API to handle message
 operations.
 */
public class SpringExample {
    private static final Integer POLLING_SECONDS = 15;
    private static final String SPRING_XML_CONFIG_FILE =
 "SpringExampleConfiguration.xml.txt";
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SpringExample.class);

    /**
     * Demonstrates sending and receiving messages through a standard Amazon SQS
 message queue
     * using Spring Framework configuration. This method loads connection settings
 from an XML file,
     * establishes a messaging session using the Amazon SQS Java Messaging Library,
 and processes
     * messages using JMS (Java Message Service) operations. If the queue doesn't
 exist, it will
     * be created automatically.
     *
     * @param args Command line arguments (not used)
     */
    public static void main(String[] args) {

        URL resource =
 SpringExample.class.getClassLoader().getResource(SPRING_XML_CONFIG_FILE);
        File springFile = new File(resource.getFile());
        if (!springFile.exists() || !springFile.canRead()) {
            LOGGER.error("File " + SPRING_XML_CONFIG_FILE + " doesn't exist or isn't
 readable.");
            System.exit(1);
        }

        try (FileSystemXmlApplicationContext context =
```

```
                    new FileSystemXmlApplicationContext("file://" +
springFile.getAbsolutePath())) {

            Connection connection;
            try {
                connection = context.getBean(Connection.class);
            } catch (NoSuchBeanDefinitionException e) {
                LOGGER.error("Can't find the JMS connection to use: " +
e.getMessage(), e);
                System.exit(2);
                return;
            }

            String queueName;
            try {
                queueName = context.getBean("queueName", String.class);
            } catch (NoSuchBeanDefinitionException e) {
                LOGGER.error("Can't find the name of the queue to use: " +
e.getMessage(), e);
                System.exit(3);
                return;
            }
            try {
                if (connection instanceof SQSConnection) {
                    SqsJmsExampleUtils.ensureQueueExists((SQSConnection) connection,
queueName, SqsJmsExampleUtils.QUEUE_VISIBILITY_TIMEOUT);
                }
                // Create the JMS session.
                Session session = connection.createSession(false,
Session.CLIENT_ACKNOWLEDGE);

                SqsJmsExampleUtils.sendTextMessage(session, queueName);
                MessageConsumer consumer =
session.createConsumer(session.createQueue(queueName));

                receiveMessages(consumer);
            } catch (JMSException e) {
                LOGGER.error(e.getMessage(), e);
                throw new RuntimeException(e);
            }
        }   // Spring context autocloses. Managed Spring beans that implement
AutoClosable, such as the
        // 'connection' bean, are also closed.
        LOGGER.info("Context closed");
```

```
    }

    /**
     * Continuously checks for and processes messages from a standard Amazon SQS
 message queue
     * using the Amazon SQS Java Messaging Library underlying the JMS API. This
 method waits for incoming messages,
     * processes them when they arrive, and acknowledges their receipt using JMS
 (Java Message
     * Service) operations. The method will stop checking for messages after 15
 seconds of
     * inactivity.
     *
     * @param consumer The JMS message consumer used to receive messages from the
 queue
     */
    private static void receiveMessages(MessageConsumer consumer) {
        try {
            while (true) {
                LOGGER.info("Waiting for messages...");
                // Wait 15 seconds for a message.
                Message message =
 consumer.receive(TimeUnit.SECONDS.toMillis(POLLING_SECONDS));
                if (message == null) {
                    LOGGER.info("Shutting down after {} seconds of silence.",
 POLLING_SECONDS);
                    break;
                }
                SqsJmsExampleUtils.handleMessage(message);
                message.acknowledge();
                LOGGER.info("Message acknowledged.");
            }
        } catch (JMSException e) {
            LOGGER.error("Error receiving from SQS.", e);
        }
    }
}
```

Definisi kacang musim semi.

```
<?xml version="1.0" encoding="UTF-8"?>
<beans
```

```
        xmlns="http://www.springframework.org/schema/beans"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="
http://www.springframework.org/schema/beans http://www.springframework.org/schema/
beans/spring-beans-3.0.xsd
        ">
    <!-- Define the AWS Region -->
    <bean id="region" class="software.amazon.awssdk.regions.Region" factory-
method="of">
        <constructor-arg value="us-east-1"/>
    </bean>

    <bean id="credentialsProviderBean"
 class="software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider"
          factory-method="create"/>

    <bean id="clientBuilder" class="software.amazon.awssdk.services.sqs.SqsClient"
 factory-method="builder"/>

    <bean id="regionSetClientBuilder" factory-bean="clientBuilder" factory-
method="region">
        <constructor-arg ref="region"/>
    </bean>

    <!-- Configure the Builder with Credentials Provider -->
    <bean id="sqsClient" factory-bean="regionSetClientBuilder" factory-
method="credentialsProvider">
        <constructor-arg ref="credentialsProviderBean"/>
    </bean>

    <bean id="providerConfiguration"
 class="com.amazon.sqs.javamessaging.ProviderConfiguration">
        <property name="numberOfMessagesToPrefetch" value="5"/>
    </bean>

    <bean id="connectionFactory"
 class="com.amazon.sqs.javamessaging.SQSConnectionFactory">
        <constructor-arg ref="providerConfiguration"/>
        <constructor-arg ref="clientBuilder"/>
    </bean>

    <bean id="connection"
          factory-bean="connectionFactory"
          factory-method="createConnection"
```

```
          init-method="start"
          destroy-method="close"/>

    <bean id="queueName" class="java.lang.String">
        <constructor-arg value="SQSJMSClientExampleQueue"/>
    </bean>
</beans>
```

Kelas utilitas yang menyediakan metode umum yang digunakan oleh contoh lain.

```
package com.example.sqs.jms;

import com.amazon.sqs.javamessaging.AmazonSQSMessagingClientWrapper;
import com.amazon.sqs.javamessaging.ProviderConfiguration;
import com.amazon.sqs.javamessaging.SQSConnection;
import com.amazon.sqs.javamessaging.SQSConnectionFactory;
import jakarta.jms.*;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.core.exception.SdkException;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.CreateQueueRequest;
import software.amazon.awssdk.services.sqs.model.QueueAttributeName;

import java.time.Duration;
import java.util.Base64;
import java.util.Map;

/**
 * This utility class provides helper methods for working with Amazon Simple Queue
 Service (Amazon SQS)
 * through the Java Message Service (JMS) interface. It contains common operations
 for managing message
 * queues and handling message delivery.
 */
public class SqsJmsExampleUtils {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(SqsJmsExampleUtils.class);
    public static final Long QUEUE_VISIBILITY_TIMEOUT = 5L;

    /**
```

```
    * This method verifies that a message queue exists and creates it if necessary.
The method checks for
    * an existing queue first to optimize performance.
    *
    * @param connection The active connection to the messaging service
    * @param queueName The name of the queue to verify or create
    * @param visibilityTimeout The duration in seconds that messages will be hidden
after being received
    * @throws JMSException If there is an error accessing or creating the queue
    */
   public static void ensureQueueExists(SQSConnection connection, String queueName,
Long visibilityTimeout) throws JMSException {
       AmazonSQSMessagingClientWrapper client =
connection.getWrappedAmazonSQSClient();

      /* In most cases, you can do this with just a 'createQueue' call, but
'getQueueUrl'
      (called by 'queueExists') is a faster operation for the common case where the
queue
      already exists. Also, many users and roles have permission to call
'getQueueUrl'
      but don't have permission to call 'createQueue'.
      */
       if( !client.queueExists(queueName) ) {
           CreateQueueRequest createQueueRequest = CreateQueueRequest.builder()
                   .queueName(queueName)
                   .attributes(Map.of(QueueAttributeName.VISIBILITY_TIMEOUT,
String.valueOf(visibilityTimeout)))
                   .build();
           client.createQueue( createQueueRequest );
       }
   }

   /**
    * This method sends a simple text message to a specified message queue. It
handles all necessary
    * setup for the message delivery process.
    *
    * @param session The active messaging session used to create and send the
message
    * @param queueName The name of the queue where the message will be sent
    */
   public static void sendTextMessage(Session session, String queueName) {
       // Rest of implementation...
```

```
        try {
            MessageProducer producer =
session.createProducer( session.createQueue( queueName) );
            Message message = session.createTextMessage("Hello world!");
            producer.send(message);
        } catch (JMSException e) {
            LOGGER.error( "Error receiving from SQS", e );
        }
    }

    /**
     * This method processes incoming messages and logs their content based on the
message type.
     * It supports text messages, binary data, and Java objects.
     *
     * @param message The message to be processed and logged
     * @throws JMSException If there is an error reading the message content
     */
    public static void handleMessage(Message message) throws JMSException {
        // Rest of implementation...
        LOGGER.info( "Got message {}", message.getJMSMessageID() );
        LOGGER.info( "Content: ");
        if(message instanceof TextMessage txtMessage) {
            LOGGER.info( "\t{}", txtMessage.getText() );
        } else if(message instanceof BytesMessage byteMessage){
            // Assume the length fits in an int - SQS only supports sizes up to 256k
so that
            // should be true
            byte[] bytes = new byte[(int)byteMessage.getBodyLength()];
            byteMessage.readBytes(bytes);
            LOGGER.info( "\t{}", Base64.getEncoder().encodeToString( bytes ) );
        } else if( message instanceof ObjectMessage) {
            ObjectMessage objMessage = (ObjectMessage) message;
            LOGGER.info( "\t{}", objMessage.getObject() );
        }
    }

    /**
     * This method sets up automatic message processing for a specified queue. It
creates a listener
     * that will receive and handle incoming messages without blocking the main
program.
     *
```

```
    * @param session The active messaging session
    * @param queueName The name of the queue to monitor
    * @param connection The active connection to the messaging service
    */
   public static void receiveMessagesAsync(Session session, String queueName,
Connection connection) {
       // Rest of implementation...
       try {
           // Create a consumer for the queue.
           MessageConsumer consumer =
session.createConsumer(session.createQueue(queueName));
           // Provide an implementation of the MessageListener interface, which has
a single 'onMessage' method.
           // We use a lambda expression for the implementation.
           consumer.setMessageListener(message -> {
               try {
                   SqsJmsExampleUtils.handleMessage(message);
                   message.acknowledge();
               } catch (JMSException e) {
                   LOGGER.error("Error processing message: {}", e.getMessage());
               }
           });
           // Start receiving incoming messages.
           connection.start();
       } catch (JMSException e) {
           throw new RuntimeException(e);
       }
       try {
           Thread.sleep(2000);
       } catch (InterruptedException e) {
           throw new RuntimeException(e);
       }
   }


   /**
    * This method performs cleanup operations after message processing is complete.
It receives
    * any messages in the specified queue, removes the message queue and closes all
    * active connections to prevent resource leaks.
    *
    * @param queueName The name of the queue to be removed
    * @param visibilityTimeout The duration in seconds that messages are hidden
after being received
```

```
     * @throws JMSException If there is an error during the cleanup process
     */
    public static void cleanUpExample(String queueName, Long visibilityTimeout)
throws JMSException {
        LOGGER.info("Performing cleanup.");

        SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                new ProviderConfiguration(),
                SqsClient.create()
        );

        try (SQSConnection connection = connectionFactory.createConnection() ) {
            ensureQueueExists(connection, queueName, visibilityTimeout);
            Session session = connection.createSession(false,
Session.AUTO_ACKNOWLEDGE);

            receiveMessagesAsync(session, queueName, connection);

            SqsClient sqsClient =
connection.getWrappedAmazonSQSClient().getAmazonSQSClient();
            try {
                String queueUrl = sqsClient.getQueueUrl(b ->
b.queueName(queueName)).queueUrl();
                sqsClient.deleteQueue(b -> b.queueUrl(queueUrl));
                LOGGER.info("Queue deleted: {}", queueUrl);
            } catch (SdkException e) {
                LOGGER.error("Error during SQS operations: ", e);
            }
        }
        LOGGER.info("Clean up: Connection closed");
    }

    /**
     * This method creates a background task that sends multiple messages to a
specified queue
     * after waiting for a set time period. The task operates independently to
ensure efficient
     * message processing without interrupting other operations.
     *
     * @param queueName The name of the queue where messages will be sent
     * @param secondsToWait The number of seconds to wait before sending messages
     * @param numMessages The number of messages to send
     * @param visibilityTimeout The duration in seconds that messages remain hidden
after being received
```

```
     * @return A task that can be executed to send the messages
     */
    public static Runnable sendAMessageAsync(String queueName, Long secondsToWait,
 Integer numMessages, Long visibilityTimeout) {
        return () -> {
            try {
                Thread.sleep(Duration.ofSeconds(secondsToWait).toMillis());
            } catch (InterruptedException e) {
                Thread.currentThread().interrupt();
                throw new RuntimeException(e);
            }
            try {
                SQSConnectionFactory connectionFactory = new SQSConnectionFactory(
                        new ProviderConfiguration(),
                        SqsClient.create()
                );
                try (SQSConnection connection =
 connectionFactory.createConnection()) {
                    ensureQueueExists(connection, queueName, visibilityTimeout);
                    Session session = connection.createSession(false,
 Session.CLIENT_ACKNOWLEDGE);
                    for (int i = 1; i <= numMessages; i++) {
                        MessageProducer producer =
 session.createProducer(session.createQueue(queueName));
                        producer.send(session.createTextMessage("Hello World " + i +
 "!"));
                    }
                }
            } catch (JMSException e) {
                LOGGER.error(e.getMessage(), e);
                throw new RuntimeException(e);
            }
        };
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateQueue
  - DeleteQueue

Bekerja dengan tag antrian

Contoh kode berikut menunjukkan cara melakukan operasi penandaan dengan Amazon SQS.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Contoh berikut membuat tag untuk antrian, daftar tag, dan menghapus tag.

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.ListQueueTagsResponse;
import software.amazon.awssdk.services.sqs.model.QueueDoesNotExistException;
import software.amazon.awssdk.services.sqs.model.SqsException;

import java.util.Map;
import java.util.UUID;

/**
 * Before running this Java V2 code example, set up your development environment,
 including your credentials. For more
 * information, see the <a href="https://docs.aws.amazon.com/sdk-for-java/latest/
developer-guide/get-started.html">AWS
 * SDK for Java Developer Guide</a>.
 */
public class TagExamples {
    static final SqsClient sqsClient = SqsClient.create();
    static final String queueName = "TagExamples-queue-" +
 UUID.randomUUID().toString().replace("-", "").substring(0, 20);
    private static final Logger LOGGER = LoggerFactory.getLogger(TagExamples.class);

    public static void main(String[] args) {
        final String queueUrl;
        try {
```

```
            queueUrl = sqsClient.createQueue(b ->
b.queueName(queueName)).queueUrl();
            LOGGER.info("Queue created. The URL is: {}", queueUrl);
        } catch (RuntimeException e) {
            LOGGER.error("Program ending because queue was not created.");
            throw new RuntimeException(e);
        }
        try {
            addTags(queueUrl);
            listTags(queueUrl);
            removeTags(queueUrl);
        } catch (RuntimeException e) {
            LOGGER.error("Program ending because of an error in a method.");
        } finally {
            try {
                sqsClient.deleteQueue(b -> b.queueUrl(queueUrl));
                LOGGER.info("Queue successfully deleted. Program ending.");
                sqsClient.close();
            } catch (RuntimeException e) {
                LOGGER.error("Program ending.");
            } finally {
                sqsClient.close();
            }
        }
    }

    /** This method demonstrates how to use a Java Map to a tag a aueue.
     * @param queueUrl The URL of the queue to tag.
     */
    public static void addTags(String queueUrl) {
        // Build a map of the tags.
        final Map<String, String> tagsToAdd = Map.of(
                "Team", "Development",
                "Priority", "Beta",
                "Accounting ID", "456def");

        try {
            // Add tags to the queue using a Consumer<TagQueueRequest.Builder>
parameter.
            sqsClient.tagQueue(b -> b
                    .queueUrl(queueUrl)
                    .tags(tagsToAdd)
            );
        } catch (QueueDoesNotExistException e) {
```

```
            LOGGER.error("Queue does not exist: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }
    }

    /** This method demonstrates how to view the tags for a queue.
     * @param queueUrl The URL of the queue whose tags you want to list.
     */
    public static void listTags(String queueUrl) {
        ListQueueTagsResponse response;
        try {
            // Call the listQueueTags method with a
Consumer<ListQueueTagsRequest.Builder> parameter that creates a
ListQueueTagsRequest.
            response = sqsClient.listQueueTags(b -> b
                    .queueUrl(queueUrl));
        } catch (SqsException e) {
            LOGGER.error("Exception thrown: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }

        // Log the tags.
        response.tags()
                .forEach((k, v) ->
                        LOGGER.info("Key: {} -> Value: {}", k, v));
    }

    /**
     * This method demonstrates how to remove tags from a queue.
     * @param queueUrl The URL of the queue whose tags you want to remove.
     */
    public static void removeTags(String queueUrl) {
        try {
            // Call the untagQueue method with a Consumer<UntagQueueRequest.Builder>
parameter.
            sqsClient.untagQueue(b -> b
                    .queueUrl(queueUrl)
                    .tagKeys("Accounting ID") // Remove a single tag.
            );
        } catch (SqsException e) {
            LOGGER.error("Exception thrown: {}", e.getMessage(), e);
            throw new RuntimeException(e);
        }
    }
```

```
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - ListQueueTags
  - TagQueue
  - UntagQueue

## Contoh nirserver

Memanggil fungsi Lambda dari pemicu Amazon SQS

Contoh kode berikut menunjukkan bagaimana menerapkan fungsi Lambda yang menerima peristiwa yang dipicu oleh menerima pesan dari antrian SQS. Fungsi mengambil pesan dari parameter acara dan mencatat konten setiap pesan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Mengkonsumsi acara SQS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSEvent.SQSMessage;

public class Function implements RequestHandler<SQSEvent, Void> {
    @Override
    public Void handleRequest(SQSEvent sqsEvent, Context context) {
        for (SQSMessage msg : sqsEvent.getRecords()) {
            processMessage(msg, context);
        }
```

```
        context.getLogger().log("done");
        return null;
    }

    private void processMessage(SQSMessage msg, Context context) {
        try {
            context.getLogger().log("Processed message " + msg.getBody());

            // TODO: Do interesting work based on the new message

        } catch (Exception e) {
            context.getLogger().log("An error occurred");
            throw e;
        }

    }
}
```

Melaporkan kegagalan item batch untuk fungsi Lambda dengan pemicu Amazon SQS

Contoh kode berikut menunjukkan cara mengimplementasikan respons batch sebagian untuk fungsi Lambda yang menerima peristiwa dari antrian SQS. Fungsi melaporkan kegagalan item batch dalam respons, memberi sinyal ke Lambda untuk mencoba lagi pesan tersebut nanti.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di repositori contoh Nirserver.

Melaporkan kegagalan item batch SQS dengan Lambda menggunakan Java.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
import com.amazonaws.services.lambda.runtime.Context;
import com.amazonaws.services.lambda.runtime.RequestHandler;
import com.amazonaws.services.lambda.runtime.events.SQSEvent;
import com.amazonaws.services.lambda.runtime.events.SQSBatchResponse;
```

```
import java.util.ArrayList;
import java.util.List;

public class ProcessSQSMessageBatch implements RequestHandler<SQSEvent,
 SQSBatchResponse> {
    @Override
    public SQSBatchResponse handleRequest(SQSEvent sqsEvent, Context context) {
         List<SQSBatchResponse.BatchItemFailure> batchItemFailures = new
 ArrayList<SQSBatchResponse.BatchItemFailure>();

         for (SQSEvent.SQSMessage message : sqsEvent.getRecords()) {
             try {
                 //process your message
             } catch (Exception e) {
                 //Add failed message identifier to the batchItemFailures list
                 batchItemFailures.add(new
 SQSBatchResponse.BatchItemFailure(message.getMessageId()));
             }
         }
         return new SQSBatchResponse(batchItemFailures);
     }
}
```

# Contoh Step Functions menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Step Functions.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan
- Skenario


# Memulai

Hello Step Functions

Contoh kode berikut menunjukkan cara memulai menggunakan Step Functions.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Hello versi Java.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListStateMachinesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.StateMachineListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListStateMachines {
    public static void main(String[] args) {
```

```
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listMachines(sfnClient);
        sfnClient.close();
    }

    public static void listMachines(SfnClient sfnClient) {
        try {
            ListStateMachinesResponse response = sfnClient.listStateMachines();
            List<StateMachineListItem> machines = response.stateMachines();
            for (StateMachineListItem machine : machines) {
                System.out.println("The name of the state machine is: " +
 machine.name());
                System.out.println("The ARN value is : " +
 machine.stateMachineArn());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListStateMachinesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat aktivitas.
- Buat mesin status dari definisi Amazon States Language yang berisi aktivitas yang dibuat sebelumnya sebagai langkah.
- Jalankan mesin status dan tanggapi aktivitas dengan input pengguna.
- Dapatkan status dan output akhir setelah proses selesai, lalu bersihkan sumber daya.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkap dan pelajari cara menyiapkan dan menjalankan di Repositori Contoh Kode AWS.

```
/**
 * You can obtain the JSON file to create a state machine in the following
 * GitHub location.
 * <p>
 * https://github.com/awsdocs/aws-doc-sdk-examples/tree/main/resources/sample_files
 * <p>
 * To run this code example, place the chat_sfn_state_machine.json file into
 * your project's resources folder.
 * <p>
 * Also, set up your development environment, including your credentials.
 * <p>
 * For information, see this documentation topic:
 * <p>
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 * <p>
 * This Java code example performs the following tasks:
 * <p>
 * 1. Creates an activity.
 * 2. Creates a state machine.
 * 3. Describes the state machine.
 * 4. Starts execution of the state machine and interacts with it.
 * 5. Describes the execution.
 * 6. Delete the activity.
 * 7. Deletes the state machine.
 */
public class StepFunctionsScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) throws Exception {
        final String usage = """

            Usage:
                <roleARN> <activityName> <stateMachineName>
```

```
            Where:
                roleName - The name of the IAM role to create for this state
machine.
                activityName - The name of an activity to create.
                stateMachineName - The name of the state machine to create.
                jsonFile - The location of the chat_sfn_state_machine.json file. You
can located it in resources/sample_files.
            """;

        if (args.length != 4) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleName = args[0];
        String activityName = args[1];
        String stateMachineName = args[2];
        String jsonFile = args[3];
        String polJSON = """
            {
                "Version":"2012-10-17",
                "Statement": [
                    {
                        "Sid": "",
                        "Effect": "Allow",
                        "Principal": {
                            "Service": "states.amazonaws.com"
                        },
                        "Action": "sts:AssumeRole"
                    }
                ]
            }
            """;


        Scanner sc = new Scanner(System.in);
        boolean action = false;

        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
            .region(region)
            .build();
```

```
        Region regionGl = Region.AWS_GLOBAL;
        IamClient iam = IamClient.builder()
            .region(regionGl)
            .build();

        System.out.println(DASHES);
        System.out.println("Welcome to the AWS Step Functions example scenario.");
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("1. Create an activity.");
        String activityArn = createActivity(sfnClient, activityName);
        System.out.println("The ARN of the activity is " + activityArn);
        System.out.println(DASHES);

        // Read the file using FileInputStream
        FileInputStream inputStream = new FileInputStream(jsonFile);
        ObjectMapper mapper = new ObjectMapper();
        JsonNode jsonNode = mapper.readValue(inputStream, JsonNode.class);
        String jsonString = mapper.writeValueAsString(jsonNode);

        // Modify the Resource node.
        ObjectMapper objectMapper = new ObjectMapper();
        JsonNode root = objectMapper.readTree(jsonString);
        ((ObjectNode) root.path("States").path("GetInput")).put("Resource",
activityArn);

        // Convert the modified Java object back to a JSON string.
        String stateDefinition = objectMapper.writeValueAsString(root);
        System.out.println(stateDefinition);

        System.out.println(DASHES);
        System.out.println("2. Create a state machine.");
        String roleARN = createIAMRole(iam, roleName, polJSON);
        String stateMachineArn = createMachine(sfnClient, roleARN, stateMachineName,
stateDefinition);
        System.out.println("The ARN of the state machine is " + stateMachineArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("3. Describe the state machine.");
        describeStateMachine(sfnClient, stateMachineArn);
        System.out.println("What should ChatSFN call you?");
        String userName = sc.nextLine();
```

```
        System.out.println("Hello " + userName);
        System.out.println(DASHES);

        System.out.println(DASHES);
        // The JSON to pass to the StartExecution call.
        String executionJson = "{ \"name\" : \"" + userName + "\" }";
        System.out.println(executionJson);
        System.out.println("4. Start execution of the state machine and interact
with it.");
        String runArn = startWorkflow(sfnClient, stateMachineArn, executionJson);
        System.out.println("The ARN of the state machine execution is " + runArn);
        List<String> myList;
        while (!action) {
            myList = getActivityTask(sfnClient, activityArn);
            System.out.println("ChatSFN: " + myList.get(1));
            System.out.println(userName + " please specify a value.");
            String myAction = sc.nextLine();
            if (myAction.compareTo("done") == 0)
                action = true;

            System.out.println("You have selected " + myAction);
            String taskJson = "{ \"action\" : \"" + myAction + "\" }";
            System.out.println(taskJson);
            sendTaskSuccess(sfnClient, myList.get(0), taskJson);
        }
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("5. Describe the execution.");
        describeExe(sfnClient, runArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Delete the activity.");
        deleteActivity(sfnClient, activityArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Delete the state machines.");
        deleteMachine(sfnClient, stateMachineArn);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("The AWS Step Functions example scenario is complete.");
```

```
        System.out.println(DASHES);
    }

    public static String createIAMRole(IamClient iam, String rolename, String
polJSON) {
        try {
            CreateRoleRequest request = CreateRoleRequest.builder()
                .roleName(rolename)
                .assumeRolePolicyDocument(polJSON)
                .description("Created using the AWS SDK for Java")
                .build();

            CreateRoleResponse response = iam.createRole(request);
            return response.role().arn();

        } catch (IamException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static void describeExe(SfnClient sfnClient, String executionArn) {
        try {
            DescribeExecutionRequest executionRequest =
DescribeExecutionRequest.builder()
                .executionArn(executionArn)
                .build();

            String status = "";
            boolean hasSucceeded = false;
            while (!hasSucceeded) {
                DescribeExecutionResponse response =
sfnClient.describeExecution(executionRequest);
                status = response.statusAsString();
                if (status.compareTo("RUNNING") == 0) {
                    System.out.println("The state machine is still running, let's
wait for it to finish.");
                    Thread.sleep(2000);
                } else if (status.compareTo("SUCCEEDED") == 0) {
                    System.out.println("The Step Function workflow has succeeded");
                    hasSucceeded = true;
                } else {
```

```
                    System.out.println("The Status is neither running or
succeeded");
                }
            }
            System.out.println("The Status is " + status);

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }

    public static void sendTaskSuccess(SfnClient sfnClient, String token, String
json) {
        try {
            SendTaskSuccessRequest successRequest = SendTaskSuccessRequest.builder()
                .taskToken(token)
                .output(json)
                .build();

            sfnClient.sendTaskSuccess(successRequest);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static List<String> getActivityTask(SfnClient sfnClient, String actArn) {
        List<String> myList = new ArrayList<>();
        GetActivityTaskRequest getActivityTaskRequest =
GetActivityTaskRequest.builder()
            .activityArn(actArn)
            .build();

        GetActivityTaskResponse response =
sfnClient.getActivityTask(getActivityTaskRequest);
        myList.add(response.taskToken());
        myList.add(response.input());
        return myList;
    }

    public static void deleteActivity(SfnClient sfnClient, String actArn) {
        try {
```

```
            DeleteActivityRequest activityRequest = DeleteActivityRequest.builder()
                .activityArn(actArn)
                .build();

            sfnClient.deleteActivity(activityRequest);
            System.out.println("You have deleted " + actArn);

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }

    public static void describeStateMachine(SfnClient sfnClient, String
stateMachineArn) {
        try {
            DescribeStateMachineRequest stateMachineRequest =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            DescribeStateMachineResponse response =
sfnClient.describeStateMachine(stateMachineRequest);
            System.out.println("The name of the State machine is " +
response.name());
            System.out.println("The status of the State machine is " +
response.status());
            System.out.println("The ARN value of the State machine is " +
response.stateMachineArn());
            System.out.println("The role ARN value is " + response.roleArn());

        } catch (SfnException e) {
            System.err.println(e.getMessage());
        }
    }

    public static void deleteMachine(SfnClient sfnClient, String stateMachineArn) {
        try {
            DeleteStateMachineRequest deleteStateMachineRequest =
DeleteStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            sfnClient.deleteStateMachine(deleteStateMachineRequest);
```

```
            DescribeStateMachineRequest describeStateMachine =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

            while (true) {
                DescribeStateMachineResponse response =
sfnClient.describeStateMachine(describeStateMachine);
                System.out.println("The state machine is not deleted yet. The status
is " + response.status());
                Thread.sleep(3000);
            }

        } catch (SfnException | InterruptedException e) {
            System.err.println(e.getMessage());
        }
        System.out.println(stateMachineArn + " was successfully deleted.");
    }

    public static String startWorkflow(SfnClient sfnClient, String stateMachineArn,
String jsonEx) {
        UUID uuid = UUID.randomUUID();
        String uuidValue = uuid.toString();
        try {
            StartExecutionRequest executionRequest = StartExecutionRequest.builder()
                .input(jsonEx)
                .stateMachineArn(stateMachineArn)
                .name(uuidValue)
                .build();

            StartExecutionResponse response =
sfnClient.startExecution(executionRequest);
            return response.executionArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createMachine(SfnClient sfnClient, String roleARN, String
stateMachineName, String json) {
        try {
```

```
            CreateStateMachineRequest machineRequest =
 CreateStateMachineRequest.builder()
                .definition(json)
                .name(stateMachineName)
                .roleArn(roleARN)
                .type(StateMachineType.STANDARD)
                .build();

            CreateStateMachineResponse response =
 sfnClient.createStateMachine(machineRequest);
            return response.stateMachineArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }

    public static String createActivity(SfnClient sfnClient, String activityName) {
        try {
            CreateActivityRequest activityRequest = CreateActivityRequest.builder()
                .name(activityName)
                .build();

            CreateActivityResponse response =
 sfnClient.createActivity(activityRequest);
            return response.activityArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateActivity
  - CreateStateMachine
  - DeleteActivity

- DeleteStateMachine
- DescribeExecution
- DescribeStateMachine
- GetActivityTask
- ListActivities
- ListStateMachines
- SendTaskSuccess
- StartExecution
- StopExecution

## Tindakan

### `CreateActivity`

Contoh kode berikut menunjukkan cara menggunakan`CreateActivity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String createActivity(SfnClient sfnClient, String activityName) {
        try {
            CreateActivityRequest activityRequest = CreateActivityRequest.builder()
                .name(activityName)
                .build();

            CreateActivityResponse response =
sfnClient.createActivity(activityRequest);
            return response.activityArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
```

```
        }
        return "";
    }
```

- Untuk detail API, lihat CreateActivitydi Referensi AWS SDK for Java 2.x API.

### `CreateStateMachine`

Contoh kode berikut menunjukkan cara menggunakan`CreateStateMachine`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createMachine(SfnClient sfnClient, String roleARN, String
stateMachineName, String json) {
       try {
           CreateStateMachineRequest machineRequest =
CreateStateMachineRequest.builder()
                   .definition(json)
                   .name(stateMachineName)
                   .roleArn(roleARN)
                   .type(StateMachineType.STANDARD)
                   .build();

           CreateStateMachineResponse response =
sfnClient.createStateMachine(machineRequest);
           return response.stateMachineArn();

       } catch (SfnException e) {
           System.err.println(e.awsErrorDetails().errorMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat CreateStateMachinedi Referensi AWS SDK for Java 2.x API.

### `DeleteActivity`

Contoh kode berikut menunjukkan cara menggunakan`DeleteActivity`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public static void deleteActivity(SfnClient sfnClient, String actArn) {
    try {
        DeleteActivityRequest activityRequest = DeleteActivityRequest.builder()
            .activityArn(actArn)
            .build();

        sfnClient.deleteActivity(activityRequest);
        System.out.println("You have deleted " + actArn);

    } catch (SfnException e) {
        System.err.println(e.awsErrorDetails().errorMessage());
        System.exit(1);
    }
}
```

- Untuk detail API, lihat DeleteActivitydi Referensi AWS SDK for Java 2.x API.

### `DeleteStateMachine`

Contoh kode berikut menunjukkan cara menggunakan`DeleteStateMachine`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void deleteMachine(SfnClient sfnClient, String stateMachineArn) {
       try {
           DeleteStateMachineRequest deleteStateMachineRequest =
DeleteStateMachineRequest.builder()
                   .stateMachineArn(stateMachineArn)
                   .build();

           sfnClient.deleteStateMachine(deleteStateMachineRequest);
           DescribeStateMachineRequest describeStateMachine =
DescribeStateMachineRequest.builder()
                   .stateMachineArn(stateMachineArn)
                   .build();

           while (true) {
               DescribeStateMachineResponse response =
sfnClient.describeStateMachine(describeStateMachine);
               System.out.println("The state machine is not deleted yet. The status
is " + response.status());
               Thread.sleep(3000);
           }

       } catch (SfnException | InterruptedException e) {
           System.err.println(e.getMessage());
       }
       System.out.println(stateMachineArn + " was successfully deleted.");
   }
```

- Untuk detail API, lihat DeleteStateMachinedi Referensi AWS SDK for Java 2.x API.

### `DescribeExecution`

Contoh kode berikut menunjukkan cara menggunakan`DescribeExecution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeExe(SfnClient sfnClient, String executionArn) {
       try {
           DescribeExecutionRequest executionRequest =
DescribeExecutionRequest.builder()
                   .executionArn(executionArn)
                   .build();

           String status = "";
           boolean hasSucceeded = false;
           while (!hasSucceeded) {
               DescribeExecutionResponse response =
sfnClient.describeExecution(executionRequest);
               status = response.statusAsString();
               if (status.compareTo("RUNNING") == 0) {
                   System.out.println("The state machine is still running, let's
wait for it to finish.");
                   Thread.sleep(2000);
               } else if (status.compareTo("SUCCEEDED") == 0) {
                   System.out.println("The Step Function workflow has succeeded");
                   hasSucceeded = true;
               } else {
                   System.out.println("The Status is neither running or
succeeded");
               }
           }
           System.out.println("The Status is " + status);

       } catch (SfnException | InterruptedException e) {
           System.err.println(e.getMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeExecutiondi Referensi AWS SDK for Java 2.x API.

### `DescribeStateMachine`

Contoh kode berikut menunjukkan cara menggunakan`DescribeStateMachine`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeStateMachine(SfnClient sfnClient, String
stateMachineArn) {
       try {
           DescribeStateMachineRequest stateMachineRequest =
DescribeStateMachineRequest.builder()
                .stateMachineArn(stateMachineArn)
                .build();

           DescribeStateMachineResponse response =
sfnClient.describeStateMachine(stateMachineRequest);
           System.out.println("The name of the State machine is " +
response.name());
           System.out.println("The status of the State machine is " +
response.status());
           System.out.println("The ARN value of the State machine is " +
response.stateMachineArn());
           System.out.println("The role ARN value is " + response.roleArn());

       } catch (SfnException e) {
           System.err.println(e.getMessage());
       }
   }
```

- Untuk detail API, lihat DescribeStateMachinedi Referensi AWS SDK for Java 2.x API.

### `GetActivityTask`

Contoh kode berikut menunjukkan cara menggunakan`GetActivityTask`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static List<String> getActivityTask(SfnClient sfnClient, String actArn) {
       List<String> myList = new ArrayList<>();
       GetActivityTaskRequest getActivityTaskRequest =
GetActivityTaskRequest.builder()
           .activityArn(actArn)
           .build();

       GetActivityTaskResponse response =
sfnClient.getActivityTask(getActivityTaskRequest);
       myList.add(response.taskToken());
       myList.add(response.input());
       return myList;
   }
```

- Untuk detail API, lihat GetActivityTaskdi Referensi AWS SDK for Java 2.x API.

### `ListActivities`

Contoh kode berikut menunjukkan cara menggunakan`ListActivities`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListActivitiesRequest;
import software.amazon.awssdk.services.sfn.model.ListActivitiesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.ActivityListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListActivities {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listAllActivites(sfnClient);
        sfnClient.close();
    }

    public static void listAllActivites(SfnClient sfnClient) {
        try {
            ListActivitiesRequest activitiesRequest =
 ListActivitiesRequest.builder()
                    .maxResults(10)
                    .build();

            ListActivitiesResponse response =
 sfnClient.listActivities(activitiesRequest);
            List<ActivityListItem> items = response.activities();
            for (ActivityListItem item : items) {
                System.out.println("The activity ARN is " + item.activityArn());
                System.out.println("The activity name is " + item.name());
            }

        } catch (SfnException e) {
```

```
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListActivitiesdi Referensi AWS SDK for Java 2.x API.

### `ListExecutions`

Contoh kode berikut menunjukkan cara menggunakan`ListExecutions`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void getExeHistory(SfnClient sfnClient, String exeARN) {
        try {
            GetExecutionHistoryRequest historyRequest =
GetExecutionHistoryRequest.builder()
                    .executionArn(exeARN)
                    .maxResults(10)
                    .build();

            GetExecutionHistoryResponse historyResponse =
sfnClient.getExecutionHistory(historyRequest);
            List<HistoryEvent> events = historyResponse.events();
            for (HistoryEvent event : events) {
                System.out.println("The event type is " + event.type().toString());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat ListExecutionsdi Referensi AWS SDK for Java 2.x API.

### `ListStateMachines`

Contoh kode berikut menunjukkan cara menggunakan`ListStateMachines`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sfn.SfnClient;
import software.amazon.awssdk.services.sfn.model.ListStateMachinesResponse;
import software.amazon.awssdk.services.sfn.model.SfnException;
import software.amazon.awssdk.services.sfn.model.StateMachineListItem;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class ListStateMachines {
    public static void main(String[] args) {
        Region region = Region.US_EAST_1;
        SfnClient sfnClient = SfnClient.builder()
                .region(region)
                .build();

        listMachines(sfnClient);
        sfnClient.close();
    }
```

```
    public static void listMachines(SfnClient sfnClient) {
        try {
            ListStateMachinesResponse response = sfnClient.listStateMachines();
            List<StateMachineListItem> machines = response.stateMachines();
            for (StateMachineListItem machine : machines) {
                System.out.println("The name of the state machine is: " +
 machine.name());
                System.out.println("The ARN value is : " +
 machine.stateMachineArn());
            }

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat ListStateMachinesdi Referensi AWS SDK for Java 2.x API.

### `SendTaskSuccess`

Contoh kode berikut menunjukkan cara menggunakan`SendTaskSuccess`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static void sendTaskSuccess(SfnClient sfnClient, String token, String
 json) {
        try {
            SendTaskSuccessRequest successRequest = SendTaskSuccessRequest.builder()
                .taskToken(token)
                .output(json)
                .build();

            sfnClient.sendTaskSuccess(successRequest);
```

```
        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat SendTaskSuccessdi Referensi AWS SDK for Java 2.x API.

### `StartExecution`

Contoh kode berikut menunjukkan cara menggunakan`StartExecution`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String startWorkflow(SfnClient sfnClient, String stateMachineArn,
String jsonEx) {
        UUID uuid = UUID.randomUUID();
        String uuidValue = uuid.toString();
        try {
            StartExecutionRequest executionRequest = StartExecutionRequest.builder()
                .input(jsonEx)
                .stateMachineArn(stateMachineArn)
                .name(uuidValue)
                .build();

            StartExecutionResponse response =
sfnClient.startExecution(executionRequest);
            return response.executionArn();

        } catch (SfnException e) {
            System.err.println(e.awsErrorDetails().errorMessage());
            System.exit(1);
        }
        return "";
```

```
    }
```

- Untuk detail API, lihat StartExecutiondi Referensi AWS SDK for Java 2.x API.

### Skenario

Menggunakan Step Functions untuk menginvokasi fungsi Lambda

Contoh kode berikut menunjukkan cara membuat mesin AWS Step Functions status yang memanggil AWS Lambda fungsi secara berurutan.

SDK untuk Java 2.x

Menunjukkan cara membuat alur kerja AWS tanpa server dengan menggunakan AWS Step Functions dan. AWS SDK for Java 2.x Setiap langkah alur kerja diimplementasikan menggunakan AWS Lambda fungsi.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- DynamoDB
- Lambda
- Amazon SES
- Step Functions

## AWS STS contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with AWS STS.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan


# Tindakan

### `AssumeRole`

Contoh kode berikut menunjukkan cara menggunakan`AssumeRole`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.sts.StsClient;
import software.amazon.awssdk.services.sts.model.AssumeRoleRequest;
import software.amazon.awssdk.services.sts.model.StsException;
import software.amazon.awssdk.services.sts.model.AssumeRoleResponse;
import software.amazon.awssdk.services.sts.model.Credentials;
import java.time.Instant;
import java.time.ZoneId;
import java.time.format.DateTimeFormatter;
import java.time.format.FormatStyle;
import java.util.Locale;

/**
 * To make this code example work, create a Role that you want to assume.
 * Then define a Trust Relationship in the AWS Console. You can use this as an
 * example:
 *
 * {
 * "Version":"2012-10-17",
 * "Statement": [
 * {
 * "Effect": "Allow",
 * "Principal": {
 * "AWS": "<Specify the ARN of your IAM user you are using in this code example>"
```

```
 * },
 * "Action": "sts:AssumeRole"
 * }
 * ]
 * }
 *
 * For more information, see "Editing the Trust Relationship for an Existing
 * Role" in the AWS Directory Service guide.
 *
 * Also, set up your development environment, including your credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AssumeRole {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <roleArn> <roleSessionName>\s

                Where:
                    roleArn - The Amazon Resource Name (ARN) of the role to assume
 (for example, arn:aws:iam::000008047983:role/s3role).\s
                    roleSessionName - An identifier for the assumed role session
 (for example, mysession).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String roleArn = args[0];
        String roleSessionName = args[1];
        Region region = Region.US_EAST_1;
        StsClient stsClient = StsClient.builder()
                .region(region)
                .build();

        assumeGivenRole(stsClient, roleArn, roleSessionName);
        stsClient.close();
    }
```

```
    public static void assumeGivenRole(StsClient stsClient, String roleArn, String
 roleSessionName) {
        try {
            AssumeRoleRequest roleRequest = AssumeRoleRequest.builder()
                    .roleArn(roleArn)
                    .roleSessionName(roleSessionName)
                    .build();

            AssumeRoleResponse roleResponse = stsClient.assumeRole(roleRequest);
            Credentials myCreds = roleResponse.credentials();

            // Display the time when the temp creds expire.
            Instant exTime = myCreds.expiration();
            String tokenInfo = myCreds.sessionToken();

            // Convert the Instant to readable date.
            DateTimeFormatter formatter =
 DateTimeFormatter.ofLocalizedDateTime(FormatStyle.SHORT)
                    .withLocale(Locale.US)
                    .withZone(ZoneId.systemDefault());

            formatter.format(exTime);
            System.out.println("The token " + tokenInfo + "  expires on " + exTime);

        } catch (StsException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat AssumeRoledi Referensi AWS SDK for Java 2.x API.

## Dukungan contoh menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Dukungan.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Halo Dukungan

Contoh kode berikut menunjukkan bagaimana untuk mulai menggunakan Dukungan.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.support.SupportClient;
import software.amazon.awssdk.services.support.model.Category;
import software.amazon.awssdk.services.support.model.DescribeServicesRequest;
import software.amazon.awssdk.services.support.model.DescribeServicesResponse;
import software.amazon.awssdk.services.support.model.Service;
import software.amazon.awssdk.services.support.model.SupportException;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
```

```
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you must have the AWS Business Support Plan to use the AWS
 * Support Java API. For more information, see:
 *
 * https://aws.amazon.com/premiumsupport/plans/
 *
 * This Java example performs the following task:
 *
 * 1. Gets and displays available services.
 *
 *
 * NOTE: To see multiple operations, see SupportScenario.
 */

public class HelloSupport {
    public static void main(String[] args) {
        Region region = Region.US_WEST_2;
        SupportClient supportClient = SupportClient.builder()
                .region(region)
                .build();

        System.out.println("***** Step 1. Get and display available services.");
        displayServices(supportClient);
    }

    // Return a List that contains a Service name and Category name.
    public static void displayServices(SupportClient supportClient) {
        try {
            DescribeServicesRequest servicesRequest =
 DescribeServicesRequest.builder()
                    .language("en")
                    .build();

            DescribeServicesResponse response =
 supportClient.describeServices(servicesRequest);
            List<Service> services = response.services();

            System.out.println("Get the first 10 services");
            int index = 1;
            for (Service service : services) {
                if (index == 11)
```

```
                    break;

                System.out.println("The Service name is: " + service.name());

                // Display the Categories for this service.
                List<Category> categories = service.categories();
                for (Category cat : categories) {
                    System.out.println("The category name is: " + cat.name());
                }
                index++;
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeServicesdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Dapatkan dan tampilkan layanan yang tersedia dan tingkat keparahan untuk kasus.
- Buat kasus dukungan menggunakan layanan, kategori, dan tingkat keparahan yang dipilih.
- Dapatkan dan tampilkan daftar kasus terbuka untuk hari ini.
- Tambahkan set lampiran dan komunikasi ke kasus baru.
- Jelaskan keterikatan dan komunikasi baru untuk kasus ini.
- Selesaikan kasusnya.
- Dapatkan dan tampilkan daftar kasus yang diselesaikan untuk hari ini.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Jalankan berbagai Dukungan operasi.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.support.SupportClient;
import software.amazon.awssdk.services.support.model.AddAttachmentsToSetResponse;
import software.amazon.awssdk.services.support.model.AddCommunicationToCaseRequest;
import software.amazon.awssdk.services.support.model.AddCommunicationToCaseResponse;
import software.amazon.awssdk.services.support.model.Attachment;
import software.amazon.awssdk.services.support.model.AttachmentDetails;
import software.amazon.awssdk.services.support.model.CaseDetails;
import software.amazon.awssdk.services.support.model.Category;
import software.amazon.awssdk.services.support.model.Communication;
import software.amazon.awssdk.services.support.model.CreateCaseRequest;
import software.amazon.awssdk.services.support.model.CreateCaseResponse;
import software.amazon.awssdk.services.support.model.DescribeAttachmentRequest;
import software.amazon.awssdk.services.support.model.DescribeAttachmentResponse;
import software.amazon.awssdk.services.support.model.DescribeCasesRequest;
import software.amazon.awssdk.services.support.model.DescribeCasesResponse;
import software.amazon.awssdk.services.support.model.DescribeCommunicationsRequest;
import software.amazon.awssdk.services.support.model.DescribeCommunicationsResponse;
import software.amazon.awssdk.services.support.model.DescribeServicesRequest;
import software.amazon.awssdk.services.support.model.DescribeServicesResponse;
import software.amazon.awssdk.services.support.model.DescribeSeverityLevelsRequest;
import software.amazon.awssdk.services.support.model.DescribeSeverityLevelsResponse;
import software.amazon.awssdk.services.support.model.ResolveCaseRequest;
import software.amazon.awssdk.services.support.model.ResolveCaseResponse;
import software.amazon.awssdk.services.support.model.Service;
import software.amazon.awssdk.services.support.model.SeverityLevel;
import software.amazon.awssdk.services.support.model.SupportException;
import software.amazon.awssdk.services.support.model.AddAttachmentsToSetRequest;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
```

```
import java.time.Instant;
import java.time.temporal.ChronoUnit;
import java.util.ArrayList;
import java.util.List;

/**
 * Before running this Java (v2) code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 *
 * In addition, you must have the AWS Business Support Plan to use the AWS
 * Support Java API. For more information, see:
 *
 * https://aws.amazon.com/premiumsupport/plans/
 *
 * This Java example performs the following tasks:
 *
 * 1. Gets and displays available services.
 * 2. Gets and displays severity levels.
 * 3. Creates a support case by using the selected service, category, and
 * severity level.
 * 4. Gets a list of open cases for the current day.
 * 5. Creates an attachment set with a generated file.
 * 6. Adds a communication with the attachment to the support case.
 * 7. Lists the communications of the support case.
 * 8. Describes the attachment set included with the communication.
 * 9. Resolves the support case.
 * 10. Gets a list of resolved cases for the current day.
 */
public class SupportScenario {

    public static final String DASHES = new String(new char[80]).replace("\0", "-");

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <fileAttachment>Where:
                    fileAttachment - The file can be a simple saved .txt file to use
 as an email attachment.\s
                """;
```

```
     //  if (args.length != 1) {
     //      System.out.println(usage);
     //      System.exit(1);
     //  }

       String fileAttachment = "C:\\AWS\\test.txt" ; //args[0];
       Region region = Region.US_WEST_2;
       SupportClient supportClient = SupportClient.builder()
               .region(region)
               .build();

       System.out.println(DASHES);
       System.out.println("***** Welcome to the AWS Support case example
scenario.");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("1. Get and display available services.");
       List<String> sevCatList = displayServices(supportClient);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("2. Get and display Support severity levels.");
       String sevLevel = displaySevLevels(supportClient);
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("3. Create a support case using the selected service,
category, and severity level.");
       String caseId = createSupportCase(supportClient, sevCatList, sevLevel);
       if (caseId.compareTo("") == 0) {
           System.out.println("A support case was not successfully created!");
           System.exit(1);
       } else
           System.out.println("Support case " + caseId + " was successfully
created!");
       System.out.println(DASHES);

       System.out.println(DASHES);
       System.out.println("4. Get open support cases.");
       getOpenCase(supportClient);
       System.out.println(DASHES);
```

```
        System.out.println(DASHES);
        System.out.println("5. Create an attachment set with a generated file to add
to the case.");
        String attachmentSetId = addAttachment(supportClient, fileAttachment);
        System.out.println("The Attachment Set id value is" + attachmentSetId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("6. Add communication with the attachment to the support
case.");
        addAttachSupportCase(supportClient, caseId, attachmentSetId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. List the communications of the support case.");
        String attachId = listCommunications(supportClient, caseId);
        System.out.println("The Attachment id value is" + attachId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("8. Describe the attachment set included with the
communication.");
        describeAttachment(supportClient, attachId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("9. Resolve the support case.");
        resolveSupportCase(supportClient, caseId);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("10. Get a list of resolved cases for the current day.");
        getResolvedCase(supportClient);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("***** This Scenario has successfully completed");
        System.out.println(DASHES);
    }

    public static void getResolvedCase(SupportClient supportClient) {
        try {
            // Specify the start and end time.
            Instant now = Instant.now();
```

```
            java.time.LocalDate.now();
            Instant yesterday = now.minus(1, ChronoUnit.DAYS);

            DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                    .maxResults(30)
                    .afterTime(yesterday.toString())
                    .beforeTime(now.toString())
                    .includeResolvedCases(true)
                    .build();

            DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
            List<CaseDetails> cases = response.cases();
            for (CaseDetails sinCase : cases) {
                if (sinCase.status().compareTo("resolved") == 0)
                    System.out.println("The case status is " + sinCase.status());
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void resolveSupportCase(SupportClient supportClient, String
caseId) {
        try {
            ResolveCaseRequest caseRequest = ResolveCaseRequest.builder()
                    .caseId(caseId)
                    .build();

            ResolveCaseResponse response = supportClient.resolveCase(caseRequest);
            System.out.println("The status of case " + caseId + " is " +
response.finalCaseStatus());

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static void describeAttachment(SupportClient supportClient, String
attachId) {
```

```
        try {
            DescribeAttachmentRequest attachmentRequest =
DescribeAttachmentRequest.builder()
                    .attachmentId(attachId)
                    .build();

            DescribeAttachmentResponse response =
supportClient.describeAttachment(attachmentRequest);
            System.out.println("The name of the file is " +
response.attachment().fileName());

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static String listCommunications(SupportClient supportClient, String
caseId) {
        try {
            String attachId = null;
            DescribeCommunicationsRequest communicationsRequest =
DescribeCommunicationsRequest.builder()
                    .caseId(caseId)
                    .maxResults(10)
                    .build();

            DescribeCommunicationsResponse response =
supportClient.describeCommunications(communicationsRequest);
            List<Communication> communications = response.communications();
            for (Communication comm : communications) {
                System.out.println("the body is: " + comm.body());

                // Get the attachment id value.
                List<AttachmentDetails> attachments = comm.attachmentSet();
                for (AttachmentDetails detail : attachments) {
                    attachId = detail.attachmentId();
                }
            }
            return attachId;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
```

```
        }
        return "";
    }

    public static void addAttachSupportCase(SupportClient supportClient, String
caseId, String attachmentSetId) {
        try {
            AddCommunicationToCaseRequest caseRequest =
AddCommunicationToCaseRequest.builder()
                    .caseId(caseId)
                    .attachmentSetId(attachmentSetId)
                    .communicationBody("Please refer to attachment for details.")
                    .build();

            AddCommunicationToCaseResponse response =
supportClient.addCommunicationToCase(caseRequest);
            if (response.result())
                System.out.println("You have successfully added a communication to
an AWS Support case");
            else
                System.out.println("There was an error adding the communication to
an AWS Support case");

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static String addAttachment(SupportClient supportClient, String
fileAttachment) {
        try {
            File myFile = new File(fileAttachment);
            InputStream sourceStream = new FileInputStream(myFile);
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

            Attachment attachment = Attachment.builder()
                    .fileName(myFile.getName())
                    .data(sourceBytes)
                    .build();

            AddAttachmentsToSetRequest setRequest =
AddAttachmentsToSetRequest.builder()
                    .attachments(attachment)
```

```
                    .build();

            AddAttachmentsToSetResponse response =
supportClient.addAttachmentsToSet(setRequest);
            return response.attachmentSetId();

        } catch (SupportException | FileNotFoundException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    public static void getOpenCase(SupportClient supportClient) {
        try {
            // Specify the start and end time.
            Instant now = Instant.now();
            java.time.LocalDate.now();
            Instant yesterday = now.minus(1, ChronoUnit.DAYS);

            DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                    .maxResults(20)
                    .afterTime(yesterday.toString())
                    .beforeTime(now.toString())
                    .build();

            DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
            List<CaseDetails> cases = response.cases();
            for (CaseDetails sinCase : cases) {
                System.out.println("The case status is " + sinCase.status());
                System.out.println("The case Id is " + sinCase.caseId());
                System.out.println("The case subject is " + sinCase.subject());
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }

    public static String createSupportCase(SupportClient supportClient, List<String>
sevCatList, String sevLevel) {
```

```
        try {
            String serviceCode = sevCatList.get(0);
            String caseCat = sevCatList.get(1);
            CreateCaseRequest caseRequest = CreateCaseRequest.builder()
                    .categoryCode(caseCat.toLowerCase())
                    .serviceCode(serviceCode.toLowerCase())
                    .severityCode(sevLevel.toLowerCase())
                    .communicationBody("Test issue with " +
serviceCode.toLowerCase())
                    .subject("Test case, please ignore")
                    .language("en")
                    .issueType("technical")
                    .build();

            CreateCaseResponse response = supportClient.createCase(caseRequest);
            return response.caseId();

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    public static String displaySevLevels(SupportClient supportClient) {
        try {
            DescribeSeverityLevelsRequest severityLevelsRequest =
DescribeSeverityLevelsRequest.builder()
                    .language("en")
                    .build();

            DescribeSeverityLevelsResponse response =
supportClient.describeSeverityLevels(severityLevelsRequest);
            List<SeverityLevel> severityLevels = response.severityLevels();
            String levelName = null;
            for (SeverityLevel sevLevel : severityLevels) {
                System.out.println("The severity level name is: " +
sevLevel.name());
                if (sevLevel.name().compareTo("High") == 0)
                    levelName = sevLevel.name();
            }
            return levelName;

        } catch (SupportException e) {
```

```
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }

    // Return a List that contains a Service name and Category name.
    public static List<String> displayServices(SupportClient supportClient) {
        try {
            DescribeServicesRequest servicesRequest =
DescribeServicesRequest.builder()
                    .language("en")
                    .build();

            DescribeServicesResponse response =
supportClient.describeServices(servicesRequest);
            String serviceCode = null;
            String catName = null;
            List<String> sevCatList = new ArrayList<>();
            List<Service> services = response.services();

            System.out.println("Get the first 10 services");
            int index = 1;
            for (Service service : services) {
                if (index == 11)
                    break;

                System.out.println("The Service name is: " + service.name());
                if (service.name().compareTo("Account") == 0)
                    serviceCode = service.code();

                // Get the Categories for this service.
                List<Category> categories = service.categories();
                for (Category cat : categories) {
                    System.out.println("The category name is: " + cat.name());
                    if (cat.name().compareTo("Security") == 0)
                        catName = cat.name();
                }
                index++;
            }

            // Push the two values to the list.
            sevCatList.add(serviceCode);
            sevCatList.add(catName);
```

```
            return sevCatList;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return null;
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - AddAttachmentsToSet
  - AddCommunicationToCase
  - CreateCase
  - DescribeAttachment
  - DescribeCases
  - DescribeCommunications
  - DescribeServices
  - DescribeSeverityLevels
  - ResolveCase

## Tindakan

### `AddAttachmentsToSet`

Contoh kode berikut menunjukkan cara menggunakan`AddAttachmentsToSet`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String addAttachment(SupportClient supportClient, String
fileAttachment) {
       try {
           File myFile = new File(fileAttachment);
           InputStream sourceStream = new FileInputStream(myFile);
           SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

           Attachment attachment = Attachment.builder()
                   .fileName(myFile.getName())
                   .data(sourceBytes)
                   .build();

           AddAttachmentsToSetRequest setRequest =
AddAttachmentsToSetRequest.builder()
                   .attachments(attachment)
                   .build();

           AddAttachmentsToSetResponse response =
supportClient.addAttachmentsToSet(setRequest);
           return response.attachmentSetId();

       } catch (SupportException | FileNotFoundException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat AddAttachmentsToSetdi Referensi AWS SDK for Java 2.x API.

### `AddCommunicationToCase`

Contoh kode berikut menunjukkan cara menggunakan`AddCommunicationToCase`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void addAttachSupportCase(SupportClient supportClient, String
caseId, String attachmentSetId) {
       try {
           AddCommunicationToCaseRequest caseRequest =
AddCommunicationToCaseRequest.builder()
                   .caseId(caseId)
                   .attachmentSetId(attachmentSetId)
                   .communicationBody("Please refer to attachment for details.")
                   .build();

           AddCommunicationToCaseResponse response =
supportClient.addCommunicationToCase(caseRequest);
           if (response.result())
               System.out.println("You have successfully added a communication to
an AWS Support case");
           else
               System.out.println("There was an error adding the communication to
an AWS Support case");

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat AddCommunicationToCasedi Referensi AWS SDK for Java 2.x API.

### `CreateCase`

Contoh kode berikut menunjukkan cara menggunakan`CreateCase`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static String createSupportCase(SupportClient supportClient, List<String>
sevCatList, String sevLevel) {
       try {
           String serviceCode = sevCatList.get(0);
           String caseCat = sevCatList.get(1);
           CreateCaseRequest caseRequest = CreateCaseRequest.builder()
                   .categoryCode(caseCat.toLowerCase())
                   .serviceCode(serviceCode.toLowerCase())
                   .severityCode(sevLevel.toLowerCase())
                   .communicationBody("Test issue with " +
serviceCode.toLowerCase())
                   .subject("Test case, please ignore")
                   .language("en")
                   .issueType("technical")
                   .build();

           CreateCaseResponse response = supportClient.createCase(caseRequest);
           return response.caseId();

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
       return "";
   }
```

- Untuk detail API, lihat CreateCasedi Referensi AWS SDK for Java 2.x API.

### `DescribeAttachment`

Contoh kode berikut menunjukkan cara menggunakan`DescribeAttachment`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void describeAttachment(SupportClient supportClient, String
attachId) {
       try {
           DescribeAttachmentRequest attachmentRequest =
DescribeAttachmentRequest.builder()
                   .attachmentId(attachId)
                   .build();

           DescribeAttachmentResponse response =
supportClient.describeAttachment(attachmentRequest);
           System.out.println("The name of the file is " +
response.attachment().fileName());

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat DescribeAttachmentdi Referensi AWS SDK for Java 2.x API.

### `DescribeCases`

Contoh kode berikut menunjukkan cara menggunakan`DescribeCases`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void getOpenCase(SupportClient supportClient) {
       try {
           // Specify the start and end time.
           Instant now = Instant.now();
           java.time.LocalDate.now();
           Instant yesterday = now.minus(1, ChronoUnit.DAYS);
```

```
            DescribeCasesRequest describeCasesRequest =
DescribeCasesRequest.builder()
                    .maxResults(20)
                    .afterTime(yesterday.toString())
                    .beforeTime(now.toString())
                    .build();

            DescribeCasesResponse response =
supportClient.describeCases(describeCasesRequest);
            List<CaseDetails> cases = response.cases();
            for (CaseDetails sinCase : cases) {
                System.out.println("The case status is " + sinCase.status());
                System.out.println("The case Id is " + sinCase.caseId());
                System.out.println("The case subject is " + sinCase.subject());
            }

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
    }
```

- Untuk detail API, lihat DescribeCasesdi Referensi AWS SDK for Java 2.x API.

### `DescribeCommunications`

Contoh kode berikut menunjukkan cara menggunakan`DescribeCommunications`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String listCommunications(SupportClient supportClient, String
caseId) {
        try {
            String attachId = null;
```

```
            DescribeCommunicationsRequest communicationsRequest =
DescribeCommunicationsRequest.builder()
                    .caseId(caseId)
                    .maxResults(10)
                    .build();

            DescribeCommunicationsResponse response =
supportClient.describeCommunications(communicationsRequest);
            List<Communication> communications = response.communications();
            for (Communication comm : communications) {
                System.out.println("the body is: " + comm.body());

                // Get the attachment id value.
                List<AttachmentDetails> attachments = comm.attachmentSet();
                for (AttachmentDetails detail : attachments) {
                    attachId = detail.attachmentId();
                }
            }
            return attachId;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
        }
        return "";
    }
```

- Untuk detail API, lihat DescribeCommunicationsdi Referensi AWS SDK for Java 2.x API.

### `DescribeServices`

Contoh kode berikut menunjukkan cara menggunakan`DescribeServices`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   // Return a List that contains a Service name and Category name.
   public static List<String> displayServices(SupportClient supportClient) {
       try {
           DescribeServicesRequest servicesRequest =
DescribeServicesRequest.builder()
                   .language("en")
                   .build();

           DescribeServicesResponse response =
supportClient.describeServices(servicesRequest);
           String serviceCode = null;
           String catName = null;
           List<String> sevCatList = new ArrayList<>();
           List<Service> services = response.services();

           System.out.println("Get the first 10 services");
           int index = 1;
           for (Service service : services) {
               if (index == 11)
                   break;

               System.out.println("The Service name is: " + service.name());
               if (service.name().compareTo("Account") == 0)
                   serviceCode = service.code();

               // Get the Categories for this service.
               List<Category> categories = service.categories();
               for (Category cat : categories) {
                   System.out.println("The category name is: " + cat.name());
                   if (cat.name().compareTo("Security") == 0)
                       catName = cat.name();
               }
               index++;
           }

           // Push the two values to the list.
           sevCatList.add(serviceCode);
           sevCatList.add(catName);
           return sevCatList;

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
```

```
        }
        return null;
    }
```

- Untuk detail API, lihat DescribeServicesdi Referensi AWS SDK for Java 2.x API.

### `DescribeSeverityLevels`

Contoh kode berikut menunjukkan cara menggunakan`DescribeSeverityLevels`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    public static String displaySevLevels(SupportClient supportClient) {
        try {
            DescribeSeverityLevelsRequest severityLevelsRequest =
DescribeSeverityLevelsRequest.builder()
                    .language("en")
                    .build();

            DescribeSeverityLevelsResponse response =
supportClient.describeSeverityLevels(severityLevelsRequest);
            List<SeverityLevel> severityLevels = response.severityLevels();
            String levelName = null;
            for (SeverityLevel sevLevel : severityLevels) {
                System.out.println("The severity level name is: " +
sevLevel.name());
                if (sevLevel.name().compareTo("High") == 0)
                    levelName = sevLevel.name();
            }
            return levelName;

        } catch (SupportException e) {
            System.out.println(e.getLocalizedMessage());
            System.exit(1);
```

```
        }
        return "";
    }
```

- Untuk detail API, lihat DescribeSeverityLevelsdi Referensi AWS SDK for Java 2.x API.

### `ResolveCase`

Contoh kode berikut menunjukkan cara menggunakan`ResolveCase`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   public static void resolveSupportCase(SupportClient supportClient, String
caseId) {
       try {
           ResolveCaseRequest caseRequest = ResolveCaseRequest.builder()
                   .caseId(caseId)
                   .build();

           ResolveCaseResponse response = supportClient.resolveCase(caseRequest);
           System.out.println("The status of case " + caseId + " is " +
response.finalCaseStatus());

       } catch (SupportException e) {
           System.out.println(e.getLocalizedMessage());
           System.exit(1);
       }
   }
```

- Untuk detail API, lihat ResolveCasedi Referensi AWS SDK for Java 2.x API.

# Contoh Systems Manager menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Systems Manager.

Dasar-dasar adalah contoh kode yang menunjukkan kepada Anda bagaimana melakukan operasi penting dalam suatu layanan.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Memulai
- Hal-hal mendasar
- Tindakan


## Memulai

### Hello Systems Manager

Contoh kode berikut menunjukkan cara memulai menggunakan Systems Manager.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.DocumentFilter;
import software.amazon.awssdk.services.ssm.model.ListDocumentsRequest;
import software.amazon.awssdk.services.ssm.model.ListDocumentsResponse;
```

```
public class HelloSSM {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <awsAccount>

                Where:
                    awsAccount - Your AWS Account number.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String awsAccount = args[0] ;
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
            .region(region)
            .build();

        listDocuments(ssmClient, awsAccount);
    }

    /*
    This code automatically fetches the next set of results using the `nextToken`
 and
    stops once the desired maxResults (20 in this case) have been reached.
    */
    public static void listDocuments(SsmClient ssmClient, String awsAccount) {
        String nextToken = null;
        int totalDocumentsReturned = 0;
        int maxResults = 20;
        do {
            ListDocumentsRequest request = ListDocumentsRequest.builder()
                .documentFilterList(
                    DocumentFilter.builder()
                        .key("Owner")
                        .value(awsAccount)
                        .build()
                    )
```

```
                .maxResults(maxResults)
                .nextToken(nextToken)
                .build();

            ListDocumentsResponse response = ssmClient.listDocuments(request);
            response.documentIdentifiers().forEach(identifier ->
 System.out.println("Document Name: " + identifier.name()));
            nextToken = response.nextToken();
            totalDocumentsReturned += response.documentIdentifiers().size();
        } while (nextToken != null && totalDocumentsReturned < maxResults);
    }
}
```

- Untuk detail API, lihat ListDocumentsdi Referensi AWS SDK for Java 2.x API.

## Hal-hal mendasar

Pelajari dasar-dasarnya

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Buat jendela pemeliharaan.
- Ubah jadwal jendela pemeliharaan.
- Buat dokumen.
- Kirim perintah ke instance EC2 tertentu.
- Buat sebuah OpsItem.
- Perbarui dan selesaikan OpsItem.
- Hapus jendela pemeliharaan, OpsItem, dan dokumen.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.services.ssm.model.DocumentAlreadyExistsException;
import software.amazon.awssdk.services.ssm.model.SsmException;

import java.util.Map;
import java.util.Scanner;
public class SSMScenario {
    public static final String DASHES = new String(new char[80]).replace("\0", "-");
    private static final String ROLES_STACK = "SsmStack3`1";

    public static void main(String[] args) {
        String usage = """
            Usage:
              <title> <source> <category> <severity>

            Where:
                title - The title of the parameter (default is Disk Space Alert).
                source - The source of the parameter (default is EC2).
                category - The category of the parameter. Valid values are
 'Availability', 'Cost', 'Performance', 'Recovery', 'Security' (default is
 Performance).
                severity - The severity of the parameter. Severity should be a
 number from 1 to 4 (default is 2).
        """;

        Scanner scanner = new Scanner(System.in);
        SSMActions actions = new SSMActions();
        String documentName;
        String windowName;

        System.out.println("Use AWS CloudFormation to create the EC2 instance that
 is required for this scenario.");
        CloudFormationHelper.deployCloudFormationStack(ROLES_STACK);
        Map<String, String> stackOutputs =
 CloudFormationHelper.getStackOutputsAsync(ROLES_STACK).join();
        String instanceId = stackOutputs.get("InstanceId");
        System.out.println("The Instance ID: " + instanceId +" was created.");
        String title = "Disk Space Alert" ;
        String source = "EC2" ;
        String category = "Availability" ;
        String severity = "2" ;

        System.out.println(DASHES);
        System.out.println("""
```

```
                Welcome to the AWS Systems Manager SDK Basics scenario.
                This Java program demonstrates how to interact with AWS Systems
Manager using the AWS SDK for Java (v2).
                AWS Systems Manager is the operations hub for your AWS applications
and resources and a secure end-to-end management solution.
                The program's primary functionalities include creating a maintenance
window, creating a document, sending a command to a document,
                listing documents, listing commands, creating an OpsItem, modifying
an OpsItem, and deleting AWS SSM resources.
                Upon completion of the program, all AWS resources are cleaned up.
                Let's get started...

                """);
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("1. Create an SSM maintenance window.");
        System.out.println("Please enter the maintenance window name (default is
ssm-maintenance-window):");
        String win = scanner.nextLine();
        windowName = win.isEmpty() ? "ssm-maintenance-window" : win;
        String winId = null;
        try {
            winId = actions.createMaintenanceWindow(windowName);
            waitForInputToContinue(scanner);
            System.out.println("The maintenance window ID is: " + winId);
        } catch (DocumentAlreadyExistsException e) {
            System.err.println("The SSM maintenance window already exists.
Retrieving existing window ID...");
            String existingWinId = actions.createMaintenanceWindow(windowName);
            System.out.println("Existing window ID: " + existingWinId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("2. Modify the maintenance window by changing the
schedule");
        waitForInputToContinue(scanner);
```

```
        try {
            actions.updateSSMMaintenanceWindow(winId, windowName);
            waitForInputToContinue(scanner);
            System.out.println("The SSM maintenance window was successfully
updated");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("3. Create an SSM document that defines the actions that
Systems Manager performs on your managed nodes.");
        System.out.println("Please enter the document name (default is
ssmdocument):");
        String doc = scanner.nextLine();
        documentName = doc.isEmpty() ? "ssmdocument" : doc;
        try {
            actions.createSSMDoc(documentName);
            waitForInputToContinue(scanner);
            System.out.println("The SSM document was successfully created");
        } catch (DocumentAlreadyExistsException e) {
            System.err.println("The SSM document already exists. Moving on");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("4. Now we are going to run a command on an EC2
instance");
        waitForInputToContinue(scanner);
        String commandId="";
        try {
            commandId = actions.sendSSMCommand(documentName, instanceId);
            waitForInputToContinue(scanner);
```

```
            System.out.println("The command was successfully sent. Command ID: " +
commandId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
        } catch (InterruptedException e) {
            System.err.println("Thread was interrupted: " + e.getMessage());
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println("5. Lets get the time when the specific command was sent
to the specific managed node");
        waitForInputToContinue(scanner);
        try {
            actions.displayCommands(commandId);
            System.out.println("The command invocations were successfully
displayed.");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("""
             6. Now we will create an SSM OpsItem.
             A SSM OpsItem is a feature provided by Amazon's Systems Manager (SSM)
service.
             It is a type of operational data item that allows you to manage and
track various operational issues,
             events, or tasks within your AWS environment.

             You can create OpsItems to track and manage operational issues as they
arise.
             For example, you could create an OpsItem whenever your application
detects a critical error
             or an anomaly in your infrastructure.
            """);
```

```
        waitForInputToContinue(scanner);
        String opsItemId;
        try {
            opsItemId = actions.createSSMOpsItem(title, source, category, severity);
            System.out.println(opsItemId + " was created");
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
        waitForInputToContinue(scanner);
        System.out.println(DASHES);

        System.out.println(DASHES);
        System.out.println("7. Now we will update the SSM OpsItem "+opsItemId);
        waitForInputToContinue(scanner);
        String description = "An update to "+opsItemId ;
        try {
            actions.updateOpsItem(opsItemId, title, description);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        System.out.println(DASHES);
        System.out.println("8. Now we will get the status of the SSM OpsItem
"+opsItemId);
        waitForInputToContinue(scanner);
        try {
            actions.describeOpsItems(opsItemId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }
```

```
        System.out.println(DASHES);
        System.out.println("9. Now we will resolve the SSM OpsItem "+opsItemId);
        waitForInputToContinue(scanner);
        try {
            actions.resolveOpsItem(opsItemId);
        } catch (SsmException e) {
            System.err.println("SSM error: " + e.getMessage());
            return;
        } catch (RuntimeException e) {
            System.err.println("Unexpected error: " + e.getMessage());
            return;
        }

        System.out.println(DASHES);
        System.out.println("10. Would you like to delete the AWS Systems Manager
resources? (y/n)");
        String delAns = scanner.nextLine().trim();
        if (delAns.equalsIgnoreCase("y")) {
            System.out.println("You selected to delete the resources.");
            waitForInputToContinue(scanner);
            try {
                actions.deleteMaintenanceWindow(winId);
                actions.deleteDoc(documentName);
            } catch (SsmException e) {
                System.err.println("SSM error: " + e.getMessage());
                return;
            } catch (RuntimeException e) {
                System.err.println("Unexpected error: " + e.getMessage());
                return;
            }
        } else {
            System.out.println("The AWS Systems Manager resources will not be
deleted");
        }
        System.out.println(DASHES);
        CloudFormationHelper.destroyCloudFormationStack(ROLES_STACK);
        System.out.println("This concludes the AWS Systems Manager SDK Basics
scenario.");
        System.out.println(DASHES);
    }

    private static void waitForInputToContinue(Scanner scanner) {
        while (true) {
            System.out.println("");
```

```
            System.out.println("Enter 'c' followed by <ENTER> to continue:");
            String input = scanner.nextLine();

            if (input.trim().equalsIgnoreCase("c")) {
                System.out.println("Continuing with the program...");
                System.out.println("");
                break;
            } else {
                // Handle invalid input.
                System.out.println("Invalid input. Please try again.");
            }
        }
    }
}
```

Kelas pembungkus untuk metode SDK Systems Manager.

```
public class SSMActions {

    private static SsmAsyncClient ssmAsyncClient;

    private static SsmAsyncClient getAsyncClient() {
        if (ssmAsyncClient == null) {
            SdkAsyncHttpClient httpClient = NettyNioAsyncHttpClient.builder()
                    .maxConcurrency(100)
                    .connectionTimeout(Duration.ofSeconds(60))
                    .readTimeout(Duration.ofSeconds(60))
                    .writeTimeout(Duration.ofSeconds(60))
                    .build();

            ClientOverrideConfiguration overrideConfig =
 ClientOverrideConfiguration.builder()
                    .apiCallTimeout(Duration.ofMinutes(2))
                    .apiCallAttemptTimeout(Duration.ofSeconds(90))
                    .retryPolicy(RetryPolicy.builder()
                            .numRetries(3)
                            .build())
                    .build();

            ssmAsyncClient = SsmAsyncClient.builder()
                    .region(Region.US_WEST_2)
                    .httpClient(httpClient)
```

```
                    .overrideConfiguration(overrideConfig)
                    .build();
        }
        return ssmAsyncClient;
    }

    /**
     * Deletes an AWS SSM document asynchronously.
     *
     * @param documentName The name of the document to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM document.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteDoc(String documentName) {
        DeleteDocumentRequest documentRequest = DeleteDocumentRequest.builder()
                .name(documentName)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteDocument(documentRequest)
                    .thenAccept(response -> {
                        System.out.println("The SSM document was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
```

```
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Deletes an AWS SSM Maintenance Window asynchronously.
     *
     * @param winId The ID of the Maintenance Window to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM Maintenance
Window.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteMaintenanceWindow(String winId) {
        DeleteMaintenanceWindowRequest windowRequest =
DeleteMaintenanceWindowRequest.builder()
                .windowId(winId)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteMaintenanceWindow(windowRequest)
                    .thenAccept(response -> {
                        System.out.println("The maintenance window was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
```

```
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }

    /**
     * Resolves an AWS SSM OpsItem asynchronously.
     *
     * @param opsID The ID of the OpsItem to resolve.
     * <p>
     * This method initiates an asynchronous request to resolve an SSM OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void resolveOpsItem(String opsID) {
        UpdateOpsItemRequest opsItemRequest = UpdateOpsItemRequest.builder()
                .opsItemId(opsID)
                .status(OpsItemStatus.RESOLVED)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().updateOpsItem(opsItemRequest)
                    .thenAccept(response -> {
                        System.out.println("OpsItem resolved successfully.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
```

```
        }
    }

    /**
     * Describes AWS SSM OpsItems asynchronously.
     *
     * @param key The key to filter OpsItems by (e.g., OPS_ITEM_ID).
     *
     * This method initiates an asynchronous request to describe SSM OpsItems.
     * If the request is successful, it prints the title and status of each OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void describeOpsItems(String key) {
        OpsItemFilter filter = OpsItemFilter.builder()
                .key(OpsItemFilterKey.OPS_ITEM_ID)
                .values(key)
                .operator(OpsItemFilterOperator.EQUAL)
                .build();

        DescribeOpsItemsRequest itemsRequest = DescribeOpsItemsRequest.builder()
                .maxResults(10)
                .opsItemFilters(filter)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().describeOpsItems(itemsRequest)
                    .thenAccept(itemsResponse -> {
                        List<OpsItemSummary> items =
itemsResponse.opsItemSummaries();
                        for (OpsItemSummary item : items) {
                            System.out.println("The item title is " + item.title() +
" and the status is " + item.status().toString());
                        }
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
```

```
                throw new RuntimeException("Unexpected error: " +
 cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
 ex.getCause() : ex;
        }
    }

    /**
     * Updates the AWS SSM OpsItem asynchronously.
     *
     * @param opsItemId The ID of the OpsItem to update.
     * @param title The new title of the OpsItem.
     * @param description The new description of the OpsItem.
     * <p>
     * This method initiates an asynchronous request to update an SSM OpsItem.
     * If the request is successful, it completes without returning a value.
     * If an exception occurs, it handles the error appropriately.
     */
    public void updateOpsItem(String opsItemId, String title, String description) {
        Map<String, OpsItemDataValue> operationalData = new HashMap<>();
        operationalData.put("key1",
 OpsItemDataValue.builder().value("value1").build());
        operationalData.put("key2",
 OpsItemDataValue.builder().value("value2").build());

        CompletableFuture<Void> future = getOpsItem(opsItemId).thenCompose(opsItem -
> {
            UpdateOpsItemRequest request = UpdateOpsItemRequest.builder()
                    .opsItemId(opsItemId)
                    .title(title)
                    .operationalData(operationalData)
                    .status(opsItem.statusAsString())
                    .description(description)
                    .build();

            return getAsyncClient().updateOpsItem(request).thenAccept(response -> {
                System.out.println(opsItemId + " updated successfully.");
            }).exceptionally(ex -> {
```

```
                throw new CompletionException(ex);
            });
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }


    private static CompletableFuture<OpsItem> getOpsItem(String opsItemId) {
        GetOpsItemRequest request =
GetOpsItemRequest.builder().opsItemId(opsItemId).build();
        return
getAsyncClient().getOpsItem(request).thenApply(GetOpsItemResponse::opsItem);
    }

    /**
     * Creates an SSM OpsItem asynchronously.
     *
     * @param title The title of the OpsItem.
     * @param source The source of the OpsItem.
     * @param category The category of the OpsItem.
     * @param severity The severity of the OpsItem.
     * @return The ID of the created OpsItem.
     * <p>
     * This method initiates an asynchronous request to create an SSM OpsItem.
     * If the request is successful, it returns the OpsItem ID.
     * If an exception occurs, it handles the error appropriately.
     */
```

```
   public String createSSMOpsItem(String title, String source, String category,
String severity) {
       CreateOpsItemRequest opsItemRequest = CreateOpsItemRequest.builder()
               .description("Created by the SSM Java API")
               .title(title)
               .source(source)
               .category(category)
               .severity(severity)
               .build();

       CompletableFuture<CreateOpsItemResponse> future =
getAsyncClient().createOpsItem(opsItemRequest);

       try {
           CreateOpsItemResponse response = future.join();
           return response.opsItemId();
       } catch (CompletionException e) {
           Throwable cause = e.getCause();
           if (cause instanceof SsmException) {
               throw (SsmException) cause;
           } else {
               throw new RuntimeException(cause);
           }
       }
   }

   /**
    * Displays the date and time when the specific command was invoked.
    *
    * @param commandId The ID of the command to describe.
    * <p>
    * This method initiates an asynchronous request to list command invocations and
prints the date and time of each command invocation.
    * If an exception occurs, it handles the error appropriately.
    */
   public void displayCommands(String commandId) {
       ListCommandInvocationsRequest commandInvocationsRequest =
ListCommandInvocationsRequest.builder()
               .commandId(commandId)
               .build();

       CompletableFuture<ListCommandInvocationsResponse> future =
getAsyncClient().listCommandInvocations(commandInvocationsRequest);
       future.thenAccept(response -> {
```

```
            List<CommandInvocation> commandList = response.commandInvocations();
            DateTimeFormatter formatter = DateTimeFormatter.ofPattern("yyyy-MM-dd
HH:mm:ss").withZone(ZoneId.systemDefault());
            for (CommandInvocation invocation : commandList) {
                System.out.println("The time of the command invocation is " +
formatter.format(invocation.requestedDateTime()));
            }
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw (SsmException) cause;
            } else {
                throw new RuntimeException(cause);
            }
        }).join();
    }

    /**
     * Sends a SSM command to a managed node asynchronously.
     *
     * @param documentName The name of the document to use.
     * @param instanceId The ID of the instance to send the command to.
     * @return The command ID.
     * <p>
     * This method initiates asynchronous requests to send a SSM command to a
managed node.
     * It waits until the document is active, sends the command, and checks the
command execution status.
     */
    public String sendSSMCommand(String documentName, String instanceId) throws
InterruptedException, SsmException {
        // Before we use Document to send a command - make sure it is active.
        CompletableFuture<Void> documentActiveFuture = CompletableFuture.runAsync(()
-> {
            boolean isDocumentActive = false;
            DescribeDocumentRequest request = DescribeDocumentRequest.builder()
                    .name(documentName)
                    .build();

            while (!isDocumentActive) {
                CompletableFuture<DescribeDocumentResponse> response =
getAsyncClient().describeDocument(request);
                String documentStatus = response.join().document().statusAsString();
```

```
                if (documentStatus.equals("Active")) {
                    System.out.println("The SSM document is active and ready to
use.");
                    isDocumentActive = true;
                } else {
                    System.out.println("The SSM document is not active. Status: " +
documentStatus);
                    try {
                        Thread.sleep(5000);
                    } catch (InterruptedException e) {
                        throw new RuntimeException(e);
                    }
                }
            }
        });

        documentActiveFuture.join();

        // Create the SendCommandRequest.
        SendCommandRequest commandRequest = SendCommandRequest.builder()
                .documentName(documentName)
                .instanceIds(instanceId)
                .build();

        // Send the command.
        CompletableFuture<SendCommandResponse> commandFuture =
getAsyncClient().sendCommand(commandRequest);
        final String[] commandId = {null};

        commandFuture.whenComplete((commandResponse, ex) -> {
            if (commandResponse != null) {
                commandId[0] = commandResponse.command().commandId();
                System.out.println("Command ID: " + commandId[0]);

                // Wait for the command execution to complete.
                GetCommandInvocationRequest invocationRequest =
GetCommandInvocationRequest.builder()
                        .commandId(commandId[0])
                        .instanceId(instanceId)
                        .build();

                try {
                    System.out.println("Wait 5 secs");
                    TimeUnit.SECONDS.sleep(5);
```

```
                    // Retrieve the command execution details.
                    CompletableFuture<GetCommandInvocationResponse> invocationFuture
= getAsyncClient().getCommandInvocation(invocationRequest);
                    invocationFuture.whenComplete((commandInvocationResponse,
invocationEx) -> {
                        if (commandInvocationResponse != null) {
                            // Check the status of the command execution.
                            CommandInvocationStatus status =
commandInvocationResponse.status();
                            if (status == CommandInvocationStatus.SUCCESS) {
                                System.out.println("Command execution successful");
                            } else {
                                System.out.println("Command execution failed.
Status: " + status);
                            }
                        } else {
                            Throwable invocationCause = (invocationEx instanceof
CompletionException) ? invocationEx.getCause() : invocationEx;
                            throw new CompletionException(invocationCause);
                        }
                    }).join();
                } catch (InterruptedException e) {
                    throw new RuntimeException(e);
                }
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw (SsmException) cause;
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        return commandId[0];
    }

    /**
     * Creates an AWS SSM document asynchronously.
     *
     * @param docName The name of the document to create.
     * <p>
```

```
     * This method initiates an asynchronous request to create an SSM document.
     * If the request is successful, it prints the document status.
     * If an exception occurs, it handles the error appropriately.
     */
    public void createSSMDoc(String docName) throws SsmException {
        String jsonData = """
        {
        "schemaVersion": "2.2",
        "description": "Run a simple shell command",
        "mainSteps": [
            {
                "action": "aws:runShellScript",
                "name": "runEchoCommand",
                "inputs": {
                  "runCommand": [
                    "echo 'Hello, world!'"
                  ]
                }
              }
            ]
        }
        """;

        CreateDocumentRequest request = CreateDocumentRequest.builder()
                .content(jsonData)
                .name(docName)
                .documentType(DocumentType.COMMAND)
                .build();

        CompletableFuture<CreateDocumentResponse> future =
getAsyncClient().createDocument(request);
        future.thenAccept(response -> {
            System.out.println("The status of the SSM document is " +
response.documentDescription().status());
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof DocumentAlreadyExistsException) {
                throw new CompletionException(cause);
            } else if (cause instanceof SsmException) {
                throw new CompletionException(cause);
            } else {
                throw new RuntimeException(cause);
            }
```

```
        }).join();
    }

    /**
     * Updates an SSM maintenance window asynchronously.
     *
     * @param id The ID of the maintenance window to update.
     * @param name The new name for the maintenance window.
     * <p>
     * This method initiates an asynchronous request to update an SSM maintenance
window.
     * If the request is successful, it prints a success message.
     * If an exception occurs, it handles the error appropriately.
     */
    public void updateSSMMaintenanceWindow(String id, String name) throws
SsmException {
        UpdateMaintenanceWindowRequest updateRequest =
UpdateMaintenanceWindowRequest.builder()
                .windowId(id)
                .allowUnassociatedTargets(true)
                .duration(24)
                .enabled(true)
                .name(name)
                .schedule("cron(0 0 ? * MON *)")
                .build();

        CompletableFuture<UpdateMaintenanceWindowResponse> future =
getAsyncClient().updateMaintenanceWindow(updateRequest);
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("The SSM maintenance window was successfully
updated");
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();
    }
```

```
   /**
    * Creates an SSM maintenance window asynchronously.
    *
    * @param winName The name of the maintenance window.
    * @return The ID of the created or existing maintenance window.
    * <p>
    * This method initiates an asynchronous request to create an SSM maintenance
window.
    * If the request is successful, it prints the maintenance window ID.
    * If an exception occurs, it handles the error appropriately.
    */
   public String createMaintenanceWindow(String winName) throws SsmException,
DocumentAlreadyExistsException {
       CreateMaintenanceWindowRequest request =
CreateMaintenanceWindowRequest.builder()
               .name(winName)
               .description("This is my maintenance window")
               .allowUnassociatedTargets(true)
               .duration(2)
               .cutoff(1)
               .schedule("cron(0 10 ? * MON-FRI *)")
               .build();

       CompletableFuture<CreateMaintenanceWindowResponse> future =
getAsyncClient().createMaintenanceWindow(request);
       final String[] windowId = {null};
       future.whenComplete((response, ex) -> {
           if (response != null) {
               String maintenanceWindowId = response.windowId();
               System.out.println("The maintenance window id is " +
maintenanceWindowId);
               windowId[0] = maintenanceWindowId;
           } else {
               Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
               if (cause instanceof DocumentAlreadyExistsException) {
                   throw new CompletionException(cause);
               } else if (cause instanceof SsmException) {
                   throw new CompletionException(cause);
               } else {
                   throw new RuntimeException(cause);
               }
           }
       }).join();
```

```
        if (windowId[0] == null) {
            MaintenanceWindowFilter filter = MaintenanceWindowFilter.builder()
                    .key("name")
                    .values(winName)
                    .build();

            DescribeMaintenanceWindowsRequest winRequest =
 DescribeMaintenanceWindowsRequest.builder()
                    .filters(filter)
                    .build();

            CompletableFuture<DescribeMaintenanceWindowsResponse> describeFuture =
 getAsyncClient().describeMaintenanceWindows(winRequest);
            describeFuture.whenComplete((describeResponse, describeEx) -> {
                if (describeResponse != null) {
                    List<MaintenanceWindowIdentity> windows =
 describeResponse.windowIdentities();
                    if (!windows.isEmpty()) {
                        windowId[0] = windows.get(0).windowId();
                        System.out.println("Window ID: " + windowId[0]);
                    } else {
                        System.out.println("Window not found.");
                        windowId[0] = "";
                    }
                } else {
                    Throwable describeCause = (describeEx instanceof
 CompletionException) ? describeEx.getCause() : describeEx;
                    throw new RuntimeException("Error describing maintenance
 windows: " + describeCause.getMessage(), describeCause);
                }
            }).join();
        }

        return windowId[0];
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - CreateDocument
  - CreateMaintenanceWindow

- CreateOpsItem
- DeleteMaintenanceWindow
- ListCommandInvocations
- SendCommand
- UpdateOpsItem

## Tindakan

### `CreateDocument`

Contoh kode berikut menunjukkan cara menggunakan`CreateDocument`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * Creates an AWS SSM document asynchronously.
 *
 * @param docName The name of the document to create.
 * <p>
 * This method initiates an asynchronous request to create an SSM document.
 * If the request is successful, it prints the document status.
 * If an exception occurs, it handles the error appropriately.
 */
public void createSSMDoc(String docName) throws SsmException {
    String jsonData = """
    {
    "schemaVersion": "2.2",
    "description": "Run a simple shell command",
    "mainSteps": [
        {
            "action": "aws:runShellScript",
            "name": "runEchoCommand",
            "inputs": {
```

```
                "runCommand": [
                  "echo 'Hello, world!'"
                ]
              }
            }
          ]
      }
      """;

      CreateDocumentRequest request = CreateDocumentRequest.builder()
              .content(jsonData)
              .name(docName)
              .documentType(DocumentType.COMMAND)
              .build();

      CompletableFuture<CreateDocumentResponse> future =
getAsyncClient().createDocument(request);
      future.thenAccept(response -> {
          System.out.println("The status of the SSM document is " +
response.documentDescription().status());
      }).exceptionally(ex -> {
          Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
          if (cause instanceof DocumentAlreadyExistsException) {
              throw new CompletionException(cause);
          } else if (cause instanceof SsmException) {
              throw new CompletionException(cause);
          } else {
              throw new RuntimeException(cause);
          }
      }).join();
  }
```

- Untuk detail API, lihat CreateDocumentdi Referensi AWS SDK for Java 2.x API.

### `CreateMaintenanceWindow`

Contoh kode berikut menunjukkan cara menggunakan`CreateMaintenanceWindow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Creates an SSM maintenance window asynchronously.
    *
    * @param winName The name of the maintenance window.
    * @return The ID of the created or existing maintenance window.
    * <p>
    * This method initiates an asynchronous request to create an SSM maintenance
window.
    * If the request is successful, it prints the maintenance window ID.
    * If an exception occurs, it handles the error appropriately.
    */
   public String createMaintenanceWindow(String winName) throws SsmException,
DocumentAlreadyExistsException {
       CreateMaintenanceWindowRequest request =
CreateMaintenanceWindowRequest.builder()
               .name(winName)
               .description("This is my maintenance window")
               .allowUnassociatedTargets(true)
               .duration(2)
               .cutoff(1)
               .schedule("cron(0 10 ? * MON-FRI *)")
               .build();

       CompletableFuture<CreateMaintenanceWindowResponse> future =
getAsyncClient().createMaintenanceWindow(request);
       final String[] windowId = {null};
       future.whenComplete((response, ex) -> {
           if (response != null) {
               String maintenanceWindowId = response.windowId();
               System.out.println("The maintenance window id is " +
maintenanceWindowId);
               windowId[0] = maintenanceWindowId;
           } else {
```

```
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof DocumentAlreadyExistsException) {
                    throw new CompletionException(cause);
                } else if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        if (windowId[0] == null) {
            MaintenanceWindowFilter filter = MaintenanceWindowFilter.builder()
                    .key("name")
                    .values(winName)
                    .build();

            DescribeMaintenanceWindowsRequest winRequest =
DescribeMaintenanceWindowsRequest.builder()
                    .filters(filter)
                    .build();

            CompletableFuture<DescribeMaintenanceWindowsResponse> describeFuture =
getAsyncClient().describeMaintenanceWindows(winRequest);
            describeFuture.whenComplete((describeResponse, describeEx) -> {
                if (describeResponse != null) {
                    List<MaintenanceWindowIdentity> windows =
describeResponse.windowIdentities();
                    if (!windows.isEmpty()) {
                        windowId[0] = windows.get(0).windowId();
                        System.out.println("Window ID: " + windowId[0]);
                    } else {
                        System.out.println("Window not found.");
                        windowId[0] = "";
                    }
                } else {
                    Throwable describeCause = (describeEx instanceof
CompletionException) ? describeEx.getCause() : describeEx;
                    throw new RuntimeException("Error describing maintenance
windows: " + describeCause.getMessage(), describeCause);
                }
            }).join();
        }
```

```
        return windowId[0];
    }
```

- Untuk detail API, lihat CreateMaintenanceWindowdi Referensi AWS SDK for Java 2.x API.

### `CreateOpsItem`

Contoh kode berikut menunjukkan cara menggunakan`CreateOpsItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Creates an SSM OpsItem asynchronously.
     *
     * @param title The title of the OpsItem.
     * @param source The source of the OpsItem.
     * @param category The category of the OpsItem.
     * @param severity The severity of the OpsItem.
     * @return The ID of the created OpsItem.
     * <p>
     * This method initiates an asynchronous request to create an SSM OpsItem.
     * If the request is successful, it returns the OpsItem ID.
     * If an exception occurs, it handles the error appropriately.
     */
    public String createSSMOpsItem(String title, String source, String category,
String severity) {
        CreateOpsItemRequest opsItemRequest = CreateOpsItemRequest.builder()
                .description("Created by the SSM Java API")
                .title(title)
                .source(source)
                .category(category)
                .severity(severity)
                .build();
```

```
        CompletableFuture<CreateOpsItemResponse> future =
getAsyncClient().createOpsItem(opsItemRequest);

        try {
            CreateOpsItemResponse response = future.join();
            return response.opsItemId();
        } catch (CompletionException e) {
            Throwable cause = e.getCause();
            if (cause instanceof SsmException) {
                throw (SsmException) cause;
            } else {
                throw new RuntimeException(cause);
            }
        }
    }
```

- Untuk detail API, lihat CreateOpsItemdi Referensi AWS SDK for Java 2.x API.

### `DeleteDocument`

Contoh kode berikut menunjukkan cara menggunakan`DeleteDocument`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Deletes an AWS SSM document asynchronously.
     *
     * @param documentName The name of the document to delete.
     * <p>
     * This method initiates an asynchronous request to delete an SSM document.
     * If an exception occurs, it handles the error appropriately.
     */
    public void deleteDoc(String documentName) {
```

```
        DeleteDocumentRequest documentRequest = DeleteDocumentRequest.builder()
                .name(documentName)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().deleteDocument(documentRequest)
                    .thenAccept(response -> {
                        System.out.println("The SSM document was successfully
deleted.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Untuk detail API, lihat DeleteDocumentdi Referensi AWS SDK for Java 2.x API.

### `DeleteMaintenanceWindow`

Contoh kode berikut menunjukkan cara menggunakan`DeleteMaintenanceWindow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Deletes an AWS SSM Maintenance Window asynchronously.
    *
    * @param winId The ID of the Maintenance Window to delete.
    * <p>
    * This method initiates an asynchronous request to delete an SSM Maintenance
Window.
    * If an exception occurs, it handles the error appropriately.
    */
   public void deleteMaintenanceWindow(String winId) {
       DeleteMaintenanceWindowRequest windowRequest =
DeleteMaintenanceWindowRequest.builder()
               .windowId(winId)
               .build();

       CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
           getAsyncClient().deleteMaintenanceWindow(windowRequest)
                   .thenAccept(response -> {
                       System.out.println("The maintenance window was successfully
deleted.");
                   })
                   .exceptionally(ex -> {
                       throw new CompletionException(ex);
                   }).join();
       }).exceptionally(ex -> {
           Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
           if (cause instanceof SsmException) {
               throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
           } else {
               throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
           }
```

```
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Untuk detail API, lihat DeleteMaintenanceWindowdi Referensi AWS SDK for Java 2.x API.

### `DescribeOpsItems`

Contoh kode berikut menunjukkan cara menggunakan`DescribeOpsItems`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Describes AWS SSM OpsItems asynchronously.
     *
     * @param key The key to filter OpsItems by (e.g., OPS_ITEM_ID).
     *
     * This method initiates an asynchronous request to describe SSM OpsItems.
     * If the request is successful, it prints the title and status of each OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void describeOpsItems(String key) {
        OpsItemFilter filter = OpsItemFilter.builder()
                .key(OpsItemFilterKey.OPS_ITEM_ID)
                .values(key)
                .operator(OpsItemFilterOperator.EQUAL)
                .build();

        DescribeOpsItemsRequest itemsRequest = DescribeOpsItemsRequest.builder()
```

```
                .maxResults(10)
                .opsItemFilters(filter)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().describeOpsItems(itemsRequest)
                    .thenAccept(itemsResponse -> {
                        List<OpsItemSummary> items =
itemsResponse.opsItemSummaries();
                        for (OpsItemSummary item : items) {
                            System.out.println("The item title is " + item.title() +
" and the status is " + item.status().toString());
                        }
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Untuk detail API, lihat DescribeOpsItemsdi Referensi AWS SDK for Java 2.x API.

### `DescribeParameters`

Contoh kode berikut menunjukkan cara menggunakan`DescribeParameters`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.GetParameterRequest;
import software.amazon.awssdk.services.ssm.model.GetParameterResponse;
import software.amazon.awssdk.services.ssm.model.SsmException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class GetParameter {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <paraName>

                Where:
                    paraName - The name of the parameter.
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String paraName = args[0];
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
                .region(region)
```

```
                .build();

        getParaValue(ssmClient, paraName);
        ssmClient.close();
    }

    public static void getParaValue(SsmClient ssmClient, String paraName) {
        try {
            GetParameterRequest parameterRequest = GetParameterRequest.builder()
                    .name(paraName)
                    .build();

            GetParameterResponse parameterResponse =
 ssmClient.getParameter(parameterRequest);
            System.out.println("The parameter value is " +
 parameterResponse.parameter().value());

        } catch (SsmException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DescribeParametersdi Referensi AWS SDK for Java 2.x API.

### `PutParameter`

Contoh kode berikut menunjukkan cara menggunakan`PutParameter`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.ssm.SsmClient;
import software.amazon.awssdk.services.ssm.model.ParameterType;
```

```
import software.amazon.awssdk.services.ssm.model.PutParameterRequest;
import software.amazon.awssdk.services.ssm.model.SsmException;

public class PutParameter {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <paraName>

                Where:
                    paraName - The name of the parameter.
                    paraValue - The value of the parameter.
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String paraName = args[0];
        String paraValue = args[1];
        Region region = Region.US_EAST_1;
        SsmClient ssmClient = SsmClient.builder()
                .region(region)
                .build();

        putParaValue(ssmClient, paraName, paraValue);
        ssmClient.close();
    }

    public static void putParaValue(SsmClient ssmClient, String paraName, String
 value) {
        try {
            PutParameterRequest parameterRequest = PutParameterRequest.builder()
                    .name(paraName)
                    .type(ParameterType.STRING)
                    .value(value)
                    .build();

            ssmClient.putParameter(parameterRequest);
            System.out.println("The parameter was successfully added.");
```

```
        } catch (SsmException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat PutParameterdi Referensi AWS SDK for Java 2.x API.

### `SendCommand`

Contoh kode berikut menunjukkan cara menggunakan`SendCommand`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Sends a SSM command to a managed node asynchronously.
    *
    * @param documentName The name of the document to use.
    * @param instanceId The ID of the instance to send the command to.
    * @return The command ID.
    * <p>
    * This method initiates asynchronous requests to send a SSM command to a
managed node.
    * It waits until the document is active, sends the command, and checks the
command execution status.
    */
   public String sendSSMCommand(String documentName, String instanceId) throws
InterruptedException, SsmException {
       // Before we use Document to send a command - make sure it is active.
       CompletableFuture<Void> documentActiveFuture = CompletableFuture.runAsync(()
-> {
           boolean isDocumentActive = false;
           DescribeDocumentRequest request = DescribeDocumentRequest.builder()
                   .name(documentName)
```

```
                    .build();

            while (!isDocumentActive) {
                CompletableFuture<DescribeDocumentResponse> response =
getAsyncClient().describeDocument(request);
                String documentStatus = response.join().document().statusAsString();
                if (documentStatus.equals("Active")) {
                    System.out.println("The SSM document is active and ready to
use.");
                    isDocumentActive = true;
                } else {
                    System.out.println("The SSM document is not active. Status: " +
documentStatus);
                    try {
                        Thread.sleep(5000);
                    } catch (InterruptedException e) {
                        throw new RuntimeException(e);
                    }
                }
            }
        });

        documentActiveFuture.join();

        // Create the SendCommandRequest.
        SendCommandRequest commandRequest = SendCommandRequest.builder()
                .documentName(documentName)
                .instanceIds(instanceId)
                .build();

        // Send the command.
        CompletableFuture<SendCommandResponse> commandFuture =
getAsyncClient().sendCommand(commandRequest);
        final String[] commandId = {null};

        commandFuture.whenComplete((commandResponse, ex) -> {
            if (commandResponse != null) {
                commandId[0] = commandResponse.command().commandId();
                System.out.println("Command ID: " + commandId[0]);

                // Wait for the command execution to complete.
                GetCommandInvocationRequest invocationRequest =
GetCommandInvocationRequest.builder()
                        .commandId(commandId[0])
```

```
                        .instanceId(instanceId)
                        .build();

                try {
                    System.out.println("Wait 5 secs");
                    TimeUnit.SECONDS.sleep(5);

                    // Retrieve the command execution details.
                    CompletableFuture<GetCommandInvocationResponse> invocationFuture
= getAsyncClient().getCommandInvocation(invocationRequest);
                    invocationFuture.whenComplete((commandInvocationResponse,
invocationEx) -> {
                        if (commandInvocationResponse != null) {
                            // Check the status of the command execution.
                            CommandInvocationStatus status =
commandInvocationResponse.status();
                            if (status == CommandInvocationStatus.SUCCESS) {
                                System.out.println("Command execution successful");
                            } else {
                                System.out.println("Command execution failed.
Status: " + status);
                            }
                        } else {
                            Throwable invocationCause = (invocationEx instanceof
CompletionException) ? invocationEx.getCause() : invocationEx;
                            throw new CompletionException(invocationCause);
                        }
                    }).join();
                } catch (InterruptedException e) {
                    throw new RuntimeException(e);
                }
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw (SsmException) cause;
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();

        return commandId[0];
    }
```

- Untuk detail API, lihat SendCommanddi Referensi AWS SDK for Java 2.x API.

### `UpdateMaintenanceWindow`

Contoh kode berikut menunjukkan cara menggunakan`UpdateMaintenanceWindow`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
   /**
    * Updates an SSM maintenance window asynchronously.
    *
    * @param id The ID of the maintenance window to update.
    * @param name The new name for the maintenance window.
    * <p>
    * This method initiates an asynchronous request to update an SSM maintenance
window.
    * If the request is successful, it prints a success message.
    * If an exception occurs, it handles the error appropriately.
    */
   public void updateSSMMaintenanceWindow(String id, String name) throws
SsmException {
       UpdateMaintenanceWindowRequest updateRequest =
UpdateMaintenanceWindowRequest.builder()
               .windowId(id)
               .allowUnassociatedTargets(true)
               .duration(24)
               .enabled(true)
               .name(name)
               .schedule("cron(0 0 ? * MON *)")
               .build();

       CompletableFuture<UpdateMaintenanceWindowResponse> future =
getAsyncClient().updateMaintenanceWindow(updateRequest);
```

```
        future.whenComplete((response, ex) -> {
            if (response != null) {
                System.out.println("The SSM maintenance window was successfully
updated");
            } else {
                Throwable cause = (ex instanceof CompletionException) ?
ex.getCause() : ex;
                if (cause instanceof SsmException) {
                    throw new CompletionException(cause);
                } else {
                    throw new RuntimeException(cause);
                }
            }
        }).join();
    }
```

- Untuk detail API, lihat UpdateMaintenanceWindowdi Referensi AWS SDK for Java 2.x API.

### `UpdateOpsItem`

Contoh kode berikut menunjukkan cara menggunakan`UpdateOpsItem`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
    /**
     * Resolves an AWS SSM OpsItem asynchronously.
     *
     * @param opsID The ID of the OpsItem to resolve.
     * <p>
     * This method initiates an asynchronous request to resolve an SSM OpsItem.
     * If an exception occurs, it handles the error appropriately.
     */
    public void resolveOpsItem(String opsID) {
        UpdateOpsItemRequest opsItemRequest = UpdateOpsItemRequest.builder()
                .opsItemId(opsID)
```

```
                .status(OpsItemStatus.RESOLVED)
                .build();

        CompletableFuture<Void> future = CompletableFuture.runAsync(() -> {
            getAsyncClient().updateOpsItem(opsItemRequest)
                    .thenAccept(response -> {
                        System.out.println("OpsItem resolved successfully.");
                    })
                    .exceptionally(ex -> {
                        throw new CompletionException(ex);
                    }).join();
        }).exceptionally(ex -> {
            Throwable cause = (ex instanceof CompletionException) ? ex.getCause() :
ex;
            if (cause instanceof SsmException) {
                throw new RuntimeException("SSM error: " + cause.getMessage(),
cause);
            } else {
                throw new RuntimeException("Unexpected error: " +
cause.getMessage(), cause);
            }
        });

        try {
            future.join();
        } catch (CompletionException ex) {
            throw ex.getCause() instanceof RuntimeException ? (RuntimeException)
ex.getCause() : ex;
        }
    }
```

- Untuk detail API, lihat UpdateOpsItemdi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Texttract menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan menerapkan skenario umum dengan menggunakan Amazon Textract. AWS SDK for Java 2.x

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


## Tindakan

### `AnalyzeDocument`

Contoh kode berikut menunjukkan cara menggunakan`AnalyzeDocument`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.AnalyzeDocumentRequest;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.FeatureType;
import software.amazon.awssdk.services.textract.model.AnalyzeDocumentResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.TextractException;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.ArrayList;
import java.util.Iterator;
```

```
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class AnalyzeDocument {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <sourceDoc>\s

                Where:
                    sourceDoc - The path where the document is located (must be an
 image, for example, C:/AWS/book.png).\s
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String sourceDoc = args[0];
        Region region = Region.US_EAST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        analyzeDoc(textractClient, sourceDoc);
        textractClient.close();
    }

    public static void analyzeDoc(TextractClient textractClient, String sourceDoc) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceDoc));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

            // Get the input Document object as bytes
            Document myDoc = Document.builder()
```

```
                    .bytes(sourceBytes)
                    .build();

            List<FeatureType> featureTypes = new ArrayList<FeatureType>();
            featureTypes.add(FeatureType.FORMS);
            featureTypes.add(FeatureType.TABLES);

            AnalyzeDocumentRequest analyzeDocumentRequest =
 AnalyzeDocumentRequest.builder()
                    .featureTypes(featureTypes)
                    .document(myDoc)
                    .build();

            AnalyzeDocumentResponse analyzeDocument =
 textractClient.analyzeDocument(analyzeDocumentRequest);
            List<Block> docInfo = analyzeDocument.blocks();
            Iterator<Block> blockIterator = docInfo.iterator();

            while (blockIterator.hasNext()) {
                Block block = blockIterator.next();
                System.out.println("The block type is " +
 block.blockType().toString());
            }

        } catch (TextractException | FileNotFoundException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat AnalyzeDocumentdi Referensi AWS SDK for Java 2.x API.

### `DetectDocumentText`

Contoh kode berikut menunjukkan cara menggunakan`DetectDocumentText`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mendeteksi teks dari dokumen input.

```
import software.amazon.awssdk.core.SdkBytes;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextRequest;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.DocumentMetadata;
import software.amazon.awssdk.services.textract.model.TextractException;
import java.io.File;
import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.InputStream;
import java.util.List;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectDocumentText {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <sourceDoc>\s

                Where:
                    sourceDoc - The path where the document is located (must be an
 image, for example, C:/AWS/book.png).\s
```

```
                """;

        if (args.length != 1) {
            System.out.println(usage);
            System.exit(1);
        }

        String sourceDoc = args[0];
        Region region = Region.US_EAST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        detectDocText(textractClient, sourceDoc);
        textractClient.close();
    }

    public static void detectDocText(TextractClient textractClient, String
sourceDoc) {
        try {
            InputStream sourceStream = new FileInputStream(new File(sourceDoc));
            SdkBytes sourceBytes = SdkBytes.fromInputStream(sourceStream);

            // Get the input Document object as bytes.
            Document myDoc = Document.builder()
                    .bytes(sourceBytes)
                    .build();

            DetectDocumentTextRequest detectDocumentTextRequest =
DetectDocumentTextRequest.builder()
                    .document(myDoc)
                    .build();

            // Invoke the Detect operation.
            DetectDocumentTextResponse textResponse =
textractClient.detectDocumentText(detectDocumentTextRequest);
            List<Block> docInfo = textResponse.blocks();
            for (Block block : docInfo) {
                System.out.println("The block type is " +
block.blockType().toString());
            }

            DocumentMetadata documentMetadata = textResponse.documentMetadata();
```

```
            System.out.println("The number of pages in the document is " +
 documentMetadata.pages());

        } catch (TextractException | FileNotFoundException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

Mendeteksi teks dari dokumen yang terletak di bucket Amazon S3.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.model.S3Object;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.Document;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextRequest;
import software.amazon.awssdk.services.textract.model.DetectDocumentTextResponse;
import software.amazon.awssdk.services.textract.model.Block;
import software.amazon.awssdk.services.textract.model.DocumentMetadata;
import software.amazon.awssdk.services.textract.model.TextractException;

/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class DetectDocumentTextS3 {

    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName> <docName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket that contains the
 document.\s
```

```
                    docName - The document name (must be an image, i.e., book.png).
\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String docName = args[1];
        Region region = Region.US_WEST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        detectDocTextS3(textractClient, bucketName, docName);
        textractClient.close();
    }

    public static void detectDocTextS3(TextractClient textractClient, String
 bucketName, String docName) {
        try {
            S3Object s3Object = S3Object.builder()
                    .bucket(bucketName)
                    .name(docName)
                    .build();

            // Create a Document object and reference the s3Object instance.
            Document myDoc = Document.builder()
                    .s3Object(s3Object)
                    .build();

            DetectDocumentTextRequest detectDocumentTextRequest =
 DetectDocumentTextRequest.builder()
                    .document(myDoc)
                    .build();

            DetectDocumentTextResponse textResponse =
 textractClient.detectDocumentText(detectDocumentTextRequest);
            for (Block block : textResponse.blocks()) {
                System.out.println("The block type is " +
 block.blockType().toString());
```

```
            }

            DocumentMetadata documentMetadata = textResponse.documentMetadata();
            System.out.println("The number of pages in the document is " +
 documentMetadata.pages());

        } catch (TextractException e) {

            System.err.println(e.getMessage());
            System.exit(1);
        }
    }
}
```

- Untuk detail API, lihat DetectDocumentTextdi Referensi AWS SDK for Java 2.x API.

### `StartDocumentAnalysis`

Contoh kode berikut menunjukkan cara menggunakan`StartDocumentAnalysis`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.services.textract.model.S3Object;
import software.amazon.awssdk.services.textract.TextractClient;
import software.amazon.awssdk.services.textract.model.StartDocumentAnalysisRequest;
import software.amazon.awssdk.services.textract.model.DocumentLocation;
import software.amazon.awssdk.services.textract.model.TextractException;
import software.amazon.awssdk.services.textract.model.StartDocumentAnalysisResponse;
import software.amazon.awssdk.services.textract.model.GetDocumentAnalysisRequest;
import software.amazon.awssdk.services.textract.model.GetDocumentAnalysisResponse;
import software.amazon.awssdk.services.textract.model.FeatureType;
import java.util.ArrayList;
import java.util.List;
```

```
/**
 * Before running this Java V2 code example, set up your development
 * environment, including your credentials.
 *
 * For more information, see the following documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */
public class StartDocumentAnalysis {
    public static void main(String[] args) {
        final String usage = """

                Usage:
                    <bucketName> <docName>\s

                Where:
                    bucketName - The name of the Amazon S3 bucket that contains the
 document.\s
                    docName - The document name (must be an image, for example,
 book.png).\s
                """;

        if (args.length != 2) {
            System.out.println(usage);
            System.exit(1);
        }

        String bucketName = args[0];
        String docName = args[1];
        Region region = Region.US_WEST_2;
        TextractClient textractClient = TextractClient.builder()
                .region(region)
                .build();

        String jobId = startDocAnalysisS3(textractClient, bucketName, docName);
        System.out.println("Getting results for job " + jobId);
        String status = getJobResults(textractClient, jobId);
        System.out.println("The job status is " + status);
        textractClient.close();
    }

    public static String startDocAnalysisS3(TextractClient textractClient, String
 bucketName, String docName) {
        try {
```

```
            List<FeatureType> myList = new ArrayList<>();
            myList.add(FeatureType.TABLES);
            myList.add(FeatureType.FORMS);

            S3Object s3Object = S3Object.builder()
                    .bucket(bucketName)
                    .name(docName)
                    .build();

            DocumentLocation location = DocumentLocation.builder()
                    .s3Object(s3Object)
                    .build();

            StartDocumentAnalysisRequest documentAnalysisRequest =
StartDocumentAnalysisRequest.builder()
                    .documentLocation(location)
                    .featureTypes(myList)
                    .build();

            StartDocumentAnalysisResponse response =
textractClient.startDocumentAnalysis(documentAnalysisRequest);

            // Get the job ID
            String jobId = response.jobId();
            return jobId;

        } catch (TextractException e) {
            System.err.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }

    private static String getJobResults(TextractClient textractClient, String jobId)
{
        boolean finished = false;
        int index = 0;
        String status = "";

        try {
            while (!finished) {
                GetDocumentAnalysisRequest analysisRequest =
GetDocumentAnalysisRequest.builder()
                        .jobId(jobId)
```

```
                        .maxResults(1000)
                        .build();

                GetDocumentAnalysisResponse response =
 textractClient.getDocumentAnalysis(analysisRequest);
                status = response.jobStatus().toString();

                if (status.compareTo("SUCCEEDED") == 0)
                    finished = true;
                else {
                    System.out.println(index + " status is: " + status);
                    Thread.sleep(1000);
                }
                index++;
            }

            return status;

        } catch (InterruptedException e) {
            System.out.println(e.getMessage());
            System.exit(1);
        }
        return "";
    }
}
```

- Untuk detail API, lihat StartDocumentAnalysisdi Referensi AWS SDK for Java 2.x API.

## Skenario

Buat aplikasi untuk menganalisis umpan balik pelanggan

Contoh kode berikut menunjukkan cara membuat aplikasi yang menganalisis kartu komentar pelanggan, menerjemahkannya dari bahasa aslinya, menentukan sentimen mereka, dan menghasilkan file audio dari teks yang diterjemahkan.

SDK untuk Java 2.x

> Aplikasi contoh ini menganalisis dan menyimpan kartu umpan balik pelanggan. Secara khusus, ini memenuhi kebutuhan sebuah hotel fiktif di New York City. Hotel menerima umpan balik dari para tamu dalam berbagai bahasa dalam bentuk kartu komentar fisik. Umpan balik itu diunggah

ke aplikasi melalui klien web. Setelah gambar kartu komentar diunggah, langkah-langkah berikut terjadi:

- Teks diekstraksi dari gambar menggunakan Amazon Textract.
- Amazon Comprehend menentukan sentimen teks yang diekstraksi dan bahasanya.
- Teks yang diekstraksi diterjemahkan ke bahasa Inggris menggunakan Amazon Translate.
- Amazon Polly mensintesis file audio dari teks yang diekstraksi.

Aplikasi lengkap dapat digunakan dengan. AWS CDK Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

# Contoh Amazon Transcribe menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum menggunakan AWS SDK for Java 2.x with Amazon Transcribe.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Tindakan
- Skenario

# Tindakan

## `ListTranscriptionJobs`

Contoh kode berikut menunjukkan cara menggunakan`ListTranscriptionJobs`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class ListTranscriptionJobs {
    public static void main(String[] args) {
        TranscribeClient transcribeClient = TranscribeClient.builder()
            .region(Region.US_EAST_1)
            .build();

            listTranscriptionJobs(transcribeClient);
        }

        public static void listTranscriptionJobs(TranscribeClient transcribeClient)
 {
            ListTranscriptionJobsRequest listJobsRequest =
 ListTranscriptionJobsRequest.builder()
                .build();


 transcribeClient.listTranscriptionJobsPaginator(listJobsRequest).stream()
                .flatMap(response -> response.transcriptionJobSummaries().stream())
                .forEach(jobSummary -> {
                    System.out.println("Job Name: " +
 jobSummary.transcriptionJobName());
                    System.out.println("Job Status: " +
 jobSummary.transcriptionJobStatus());
                    System.out.println("Output Location: " +
 jobSummary.outputLocationType());
                    // Add more information as needed

                    // Retrieve additional details for the job if necessary
```

```
                    GetTranscriptionJobResponse jobDetails =
transcribeClient.getTranscriptionJob(
                        GetTranscriptionJobRequest.builder()
                            .transcriptionJobName(jobSummary.transcriptionJobName())
                            .build());

                    // Display additional details
                    System.out.println("Language Code: " +
jobDetails.transcriptionJob().languageCode());
                    System.out.println("Media Format: " +
jobDetails.transcriptionJob().mediaFormat());
                    // Add more details as needed

                    System.out.println("--------------");
                });
        }
    }
```

- Untuk detail API, lihat ListTranscriptionJobsdi Referensi AWS SDK for Java 2.x API.

## Skenario

Transcribe audio dan dapatkan data pekerjaan

Contoh kode berikut ini menunjukkan cara untuk melakukan:

- Mulai pekerjaan transkripsi dengan Amazon Transcribe.
- Tunggu hingga tugas selesai.
- Dapatkan URI tempat transkrip disimpan.

Untuk informasi selengkapnya, lihat Memulai Amazon Transcribe.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

Mentranskripsikan file PCM.

```
/**
 * To run this AWS code example, ensure that you have set up your development
 * environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
 */

public class TranscribeStreamingDemoFile {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[]) throws ExecutionException,
 InterruptedException {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    <file> \n\n" +
                "Where:\n" +
                "    file - the location of a PCM file to transcribe. In this
 example, ensure the PCM file is 16 hertz (Hz). \n";

        if (args.length != 1) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String file = args[0];
        client = TranscribeStreamingAsyncClient.builder()
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromFile(file)),
                getResponseHandler());

        result.get();
        client.close();
    }
```

```
    private static InputStream getStreamFromFile(String file) {
        try {
            File inputFile = new File(file);
            InputStream audioStream = new FileInputStream(inputFile);
            return audioStream;

        } catch (FileNotFoundException e) {
            throw new RuntimeException(e);
        }
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
 mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US)
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw.toString());
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
```

```
                })
                .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }
```

```
            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }
```

```
            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

Mentranskripsikan audio streaming dari mikrofon komputer Anda.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
 LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);
```

```
        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw);
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
event).transcript().results();
                    if (results.size() > 0) {
```

```
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
        private final AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
 {
            this.subscriber = s;
            this.inputStream = inputStream;
        }
```

```
        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
```

```
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Untuk detail API, lihat topik berikut di Referensi API AWS SDK for Java 2.x .
  - GetTranscriptionJob
  - StartTranscriptionJob

# Contoh Streaming Amazon Transcribe menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan streaming AWS SDK for Java 2.x with Amazon Transcribe.

Tindakan merupakan kutipan kode dari program yang lebih besar dan harus dijalankan dalam konteks. Sementara tindakan menunjukkan cara memanggil fungsi layanan individual, Anda dapat melihat tindakan dalam konteks dalam skenario terkait.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik


- Tindakan
- Skenario


# Tindakan

### `StartMedicalStreamTranscription`

Contoh kode berikut menunjukkan cara menggunakan`StartMedicalStreamTranscription`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/*
To run this AWS code example, ensure that you have set up your development
 environment, including your AWS credentials.

 For information, see this documentation topic:

 https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html

This code demonstrates the process of starting a medical transcription job using the
 AWS Transcribe
Streaming service, including setting up the audio input stream, configuring the
 transcription request,
and handling the transcription response.
 */

public class TranscribeMedicalStreamingDemoApp {
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[])
        throws ExecutionException, InterruptedException, LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
            .credentialsProvider(getCredentials())
```

```
            .build();

        CompletableFuture<Void> result =
client.startMedicalStreamTranscription(getMedicalRequest(16_000),
            new AudioStreamPublisher(getStreamFromMic()),
            getMedicalResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            throw new LineUnavailableException("The audio system microphone line is
not supported.");
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartMedicalStreamTranscriptionRequest getMedicalRequest(Integer
mediaSampleRateHertz) {
        return StartMedicalStreamTranscriptionRequest.builder()
            .languageCode(LanguageCode.EN_US.toString()) // For medical
transcription, EN_US is typically used.
            .mediaEncoding(MediaEncoding.PCM)
            .mediaSampleRateHertz(mediaSampleRateHertz)
            .specialty(Specialty.PRIMARYCARE) // Specify the medical specialty.
```

```
            .type(Type.CONVERSATION) // Set the type as CONVERSATION or DICTATION.
            .build();
    }

    private static StartMedicalStreamTranscriptionResponseHandler
 getMedicalResponseHandler() {
        return StartMedicalStreamTranscriptionResponseHandler.builder()
            .onResponse(r -> {
                System.out.println("Received Initial response");
            })
            .onError(e -> {
                System.out.println(e.getMessage());
                StringWriter sw = new StringWriter();
                e.printStackTrace(new PrintWriter(sw));
                System.out.println("Error Occurred: " + sw.toString());
            })
            .onComplete(() -> {
                System.out.println("=== All records streamed successfully ===");
            })
            .subscriber(event -> {
                List<MedicalResult> results = ((MedicalTranscriptEvent)
 event).transcript().results();
                if (results.size() > 0) {
                    if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                    }
                }
            })
            .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {
```

```
            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);
            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
```

```
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                .audioChunk(SdkBytes.fromByteBuffer(bb))
                .build();
        }
    }
}
```

- Untuk detail API, lihat StartMedicalStreamTranscriptiondi Referensi AWS SDK for Java 2.x API.

### `StartStreamTranscription`

Contoh kode berikut menunjukkan cara menggunakan`StartStreamTranscription`.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
 LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {

        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
```

```
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
 mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw);
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {
```

```
System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
        private final AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
```

```
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
```

```
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Untuk detail API, lihat StartStreamTranscriptiondi Referensi AWS SDK for Java 2.x API.

## Skenario

Transkripsikan file audio

Contoh kode berikut menunjukkan cara membuat transkripsi file audio sumber menggunakan streaming Amazon Transcribe.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
/**
 * To run this AWS code example, ensure that you have set up your development
 * environment, including your AWS credentials.
 *
 * For information, see this documentation topic:
 *
 * https://docs.aws.amazon.com/sdk-for-java/latest/developer-guide/get-started.html
```

```
 */

public class TranscribeStreamingDemoFile {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String args[]) throws ExecutionException,
 InterruptedException {

        final String USAGE = "\n" +
                "Usage:\n" +
                "    <file> \n\n" +
                "Where:\n" +
                "    file - the location of a PCM file to transcribe. In this
 example, ensure the PCM file is 16 hertz (Hz). \n";

        if (args.length != 1) {
            System.out.println(USAGE);
            System.exit(1);
        }

        String file = args[0];
        client = TranscribeStreamingAsyncClient.builder()
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromFile(file)),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromFile(String file) {
        try {
            File inputFile = new File(file);
            InputStream audioStream = new FileInputStream(inputFile);
            return audioStream;

        } catch (FileNotFoundException e) {
            throw new RuntimeException(e);
        }
```

```
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
 mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US)
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw.toString());
                })
                .onComplete(() -> {
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }

    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private final InputStream inputStream;
        private static Subscription currentSubscription;

        private AudioStreamPublisher(InputStream inputStream) {
```

```
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (this.currentSubscription == null) {
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                this.currentSubscription.cancel();
                this.currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024 * 1;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private ExecutorService executor = Executors.newFixedThreadPool(1);
        private AtomicLong demand = new AtomicLong(0);

        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
```

```
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];

            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
```

```
    }
}
```

- Untuk detail API, lihat StartStreamTranscriptiondi Referensi AWS SDK for Java 2.x API.

Transcribe audio dari mikrofon

Contoh kode berikut menunjukkan cara membuat transkripsi dari mikrofon menggunakan streaming Amazon Transcribe.

SDK untuk Java 2.x

> **Note**
>
> Ada lebih banyak tentang GitHub. Temukan contoh lengkapnya dan pelajari cara mengatur dan menjalankannya di Repositori Contoh Kode AWS.

```
public class TranscribeStreamingDemoApp {
    private static final Region REGION = Region.US_EAST_1;
    private static TranscribeStreamingAsyncClient client;

    public static void main(String[] args)
            throws URISyntaxException, ExecutionException, InterruptedException,
 LineUnavailableException {

        client = TranscribeStreamingAsyncClient.builder()
                .credentialsProvider(getCredentials())
                .region(REGION)
                .build();

        CompletableFuture<Void> result =
 client.startStreamTranscription(getRequest(16_000),
                new AudioStreamPublisher(getStreamFromMic()),
                getResponseHandler());

        result.get();
        client.close();
    }

    private static InputStream getStreamFromMic() throws LineUnavailableException {
```

```
        // Signed PCM AudioFormat with 16kHz, 16 bit sample size, mono
        int sampleRate = 16000;
        AudioFormat format = new AudioFormat(sampleRate, 16, 1, true, false);
        DataLine.Info info = new DataLine.Info(TargetDataLine.class, format);

        if (!AudioSystem.isLineSupported(info)) {
            System.out.println("Line not supported");
            System.exit(0);
        }

        TargetDataLine line = (TargetDataLine) AudioSystem.getLine(info);
        line.open(format);
        line.start();

        InputStream audioStream = new AudioInputStream(line);
        return audioStream;
    }

    private static AwsCredentialsProvider getCredentials() {
        return DefaultCredentialsProvider.create();
    }

    private static StartStreamTranscriptionRequest getRequest(Integer
mediaSampleRateHertz) {
        return StartStreamTranscriptionRequest.builder()
                .languageCode(LanguageCode.EN_US.toString())
                .mediaEncoding(MediaEncoding.PCM)
                .mediaSampleRateHertz(mediaSampleRateHertz)
                .build();
    }

    private static StartStreamTranscriptionResponseHandler getResponseHandler() {
        return StartStreamTranscriptionResponseHandler.builder()
                .onResponse(r -> {
                    System.out.println("Received Initial response");
                })
                .onError(e -> {
                    System.out.println(e.getMessage());
                    StringWriter sw = new StringWriter();
                    e.printStackTrace(new PrintWriter(sw));
                    System.out.println("Error Occurred: " + sw);
                })
                .onComplete(() -> {
```

```
                    System.out.println("=== All records stream successfully ===");
                })
                .subscriber(event -> {
                    List<Result> results = ((TranscriptEvent)
 event).transcript().results();
                    if (results.size() > 0) {
                        if (!
results.get(0).alternatives().get(0).transcript().isEmpty()) {

 System.out.println(results.get(0).alternatives().get(0).transcript());
                        }
                    }
                })
                .build();
    }


    private static class AudioStreamPublisher implements Publisher<AudioStream> {
        private static Subscription currentSubscription;
        private final InputStream inputStream;

        private AudioStreamPublisher(InputStream inputStream) {
            this.inputStream = inputStream;
        }

        @Override
        public void subscribe(Subscriber<? super AudioStream> s) {

            if (currentSubscription == null) {
                currentSubscription = new SubscriptionImpl(s, inputStream);
            } else {
                currentSubscription.cancel();
                currentSubscription = new SubscriptionImpl(s, inputStream);
            }
            s.onSubscribe(currentSubscription);
        }
    }

    public static class SubscriptionImpl implements Subscription {
        private static final int CHUNK_SIZE_IN_BYTES = 1024;
        private final Subscriber<? super AudioStream> subscriber;
        private final InputStream inputStream;
        private final ExecutorService executor = Executors.newFixedThreadPool(1);
        private final AtomicLong demand = new AtomicLong(0);
```

```
        SubscriptionImpl(Subscriber<? super AudioStream> s, InputStream inputStream)
{
            this.subscriber = s;
            this.inputStream = inputStream;
        }

        @Override
        public void request(long n) {
            if (n <= 0) {
                subscriber.onError(new IllegalArgumentException("Demand must be
positive"));
            }

            demand.getAndAdd(n);

            executor.submit(() -> {
                try {
                    do {
                        ByteBuffer audioBuffer = getNextEvent();
                        if (audioBuffer.remaining() > 0) {
                            AudioEvent audioEvent =
audioEventFromBuffer(audioBuffer);
                            subscriber.onNext(audioEvent);
                        } else {
                            subscriber.onComplete();
                            break;
                        }
                    } while (demand.decrementAndGet() > 0);
                } catch (Exception e) {
                    subscriber.onError(e);
                }
            });
        }

        @Override
        public void cancel() {
            executor.shutdown();
        }

        private ByteBuffer getNextEvent() {
            ByteBuffer audioBuffer = null;
            byte[] audioBytes = new byte[CHUNK_SIZE_IN_BYTES];
```

```
            int len = 0;
            try {
                len = inputStream.read(audioBytes);

                if (len <= 0) {
                    audioBuffer = ByteBuffer.allocate(0);
                } else {
                    audioBuffer = ByteBuffer.wrap(audioBytes, 0, len);
                }
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }

            return audioBuffer;
        }

        private AudioEvent audioEventFromBuffer(ByteBuffer bb) {
            return AudioEvent.builder()
                    .audioChunk(SdkBytes.fromByteBuffer(bb))
                    .build();
        }
    }
}
```

- Untuk detail API, lihat StartStreamTranscriptiondi Referensi AWS SDK for Java 2.x API.

# Contoh Amazon Translate menggunakan SDK for Java 2.x

Contoh kode berikut menunjukkan cara melakukan tindakan dan mengimplementasikan skenario umum dengan menggunakan AWS SDK for Java 2.x with Amazon Translate.

Skenario adalah contoh kode yang menunjukkan kepada Anda bagaimana menyelesaikan tugas tertentu dengan memanggil beberapa fungsi dalam layanan atau dikombinasikan dengan yang lain Layanan AWS.

Setiap contoh menyertakan tautan ke kode sumber lengkap, di mana Anda dapat menemukan instruksi tentang cara mengatur dan menjalankan kode dalam konteks.

Topik

- Skenario

# Skenario

## Membangun chatbot Amazon Lex

Contoh kode berikut menunjukkan cara membuat chatbot untuk melibatkan pengunjung situs web Anda.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Lex API untuk membuat Chatbot dalam aplikasi web untuk melibatkan pengunjung situs web Anda.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Amazon Lex
- Amazon Translate

## Membangun aplikasi Amazon SNS

Contoh kode berikut menunjukkan cara membuat aplikasi yang memiliki langganan dan mempublikasikan fungsionalitas dan menerjemahkan pesan.

SDK untuk Java 2.x

Menunjukkan cara menggunakan Amazon Simple Notification Service Java API untuk membuat aplikasi web yang memiliki fungsi berlangganan dan mempublikasikan. Selain itu, contoh aplikasi ini juga menerjemahkan pesan.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan, lihat contoh lengkapnya di GitHub.

Untuk kode sumber lengkap dan instruksi tentang cara mengatur dan menjalankan contoh yang menggunakan Java Async API, lihat contoh lengkapnya di. GitHub

Layanan yang digunakan dalam contoh ini

- Amazon SNS

- Amazon Translate

### Buat aplikasi untuk menganalisis umpan balik pelanggan

Contoh kode berikut menunjukkan cara membuat aplikasi yang menganalisis kartu komentar pelanggan, menerjemahkannya dari bahasa aslinya, menentukan sentimen mereka, dan menghasilkan file audio dari teks yang diterjemahkan.

SDK untuk Java 2.x

Aplikasi contoh ini menganalisis dan menyimpan kartu umpan balik pelanggan. Secara khusus, ini memenuhi kebutuhan sebuah hotel fiktif di New York City. Hotel menerima umpan balik dari para tamu dalam berbagai bahasa dalam bentuk kartu komentar fisik. Umpan balik itu diunggah ke aplikasi melalui klien web. Setelah gambar kartu komentar diunggah, langkah-langkah berikut terjadi:

- Teks diekstraksi dari gambar menggunakan Amazon Textract.
- Amazon Comprehend menentukan sentimen teks yang diekstraksi dan bahasanya.
- Teks yang diekstraksi diterjemahkan ke bahasa Inggris menggunakan Amazon Translate.
- Amazon Polly mensintesis file audio dari teks yang diekstraksi.

Aplikasi lengkap dapat digunakan dengan. AWS CDK Untuk kode sumber dan petunjuk penerapan, lihat proyek di GitHub.

Layanan yang digunakan dalam contoh ini

- Amazon Comprehend
- Lambda
- Amazon Polly
- Amazon Textract
- Amazon Translate

# Migrasi dari versi 1.x ke 2.x dari AWS SDK untuk Java

AWS SDK untuk Java 2.x adalah penulisan ulang utama dari basis kode 1.x yang dibangun di atas Java 8+. Ini mencakup banyak pembaruan, seperti peningkatan konsistensi, kemudahan penggunaan, dan kekekalan yang ditegakkan dengan kuat. Bagian ini menjelaskan fitur utama yang baru di versi 2.x, dan memberikan panduan tentang cara memigrasikan kode Anda ke versi 2.x dari 1.x.

Topik


- Apa yang baru di versi 2
- Cara memigrasikan kode Anda dari AWS SDK untuk Java 1.x ke 2.x
- Apa yang berbeda antara AWS SDK untuk Java 1.x dan 2.x
- Gunakan SDK for Java 1.x dan 2.x side-by-side
- Temukan aplikasi menggunakan klien AWS SDK untuk Java 1.x


## Apa yang baru di versi 2

- Anda dapat mengkonfigurasi klien HTTP Anda sendiri. Lihat konfigurasi transport HTTP.
- Klien async menampilkan I/O dukungan non-pemblokiran dan mengembalikan objek. `CompletableFuture` Lihat Pemrograman asinkron.
- Operasi yang mengembalikan beberapa halaman memiliki respons autopaginasi. Dengan cara ini, Anda dapat memfokuskan kode Anda pada apa yang harus dilakukan dengan respons, tanpa perlu memeriksa dan mendapatkan halaman berikutnya. Lihat Pagination.
- Kinerja waktu mulai SDK untuk AWS Lambda fungsi ditingkatkan. Lihat Peningkatan kinerja waktu mulai SDK.
- Versi 2.x mendukung metode singkatan baru untuk membuat permintaan.

  Example

```
dynamoDbClient.putItem(request -> request.tableName(TABLE))
```

Untuk detail lebih lanjut tentang fitur baru dan untuk melihat contoh kode tertentu, lihat bagian lain dari panduan ini.

- Mulai Cepat
- Menyiapkan
- Contoh kode untuk AWS SDK untuk Java 2.x
- Gunakan SDK
- Keamanan untuk AWS SDK untuk Java

# Cara memigrasikan kode Anda dari AWS SDK untuk Java 1.x ke 2.x

Anda dapat memigrasikan SDK for Java 1.x aplikasi yang ada dalam beberapa cara.

1. Pendekatan otomatis dengan menggunakan alat migrasi.
2. Pendekatan manual dengan mengganti impor 1.x secara bertahap dengan impor 2.x.

Kami menyarankan Anda memulai dengan menggunakan alat migrasi. Ini mengotomatiskan sebagian besar pekerjaan rutin, penggantian dari kode 1.x ke 2.x.

Karena alat tidak memigrasikan semua fitur, Anda harus mencari kode v1 yang tersisa setelah menjalankan alat. Bila Anda menemukan kode yang alat tidak bermigrasi, ikuti step-by-step petunjuk (pendekatan manual) dan gunakan artikel panduan migrasi untuk menyelesaikan migrasi.

Topik

- AWS SDK untuk Java alat migrasi
- step-by-stepInstruksi migrasi dengan contoh

## AWS SDK untuk Java alat migrasi

AWS SDK untuk Java Ini menyediakan alat migrasi yang membantu mengotomatiskan migrasi kode SDK for Java 1.x (V1) ke 2.x (V2). Alat ini menggunakan OpenRewrite—sumber terbuka, alat refactoring kode sumber—untuk melakukan migrasi. OpenRewrite menggunakan aturan modifikasi kode (disebut “resep”) untuk secara otomatis memperbarui kode sumber Anda dari sintaks dan pola V1 ke V2.

Alat ini mendukung aturan modifikasi kode untuk klien layanan SDK dan pustaka tingkat tinggi S3 Transfer Manager. Aturan modifikasi kode untuk tingkat tinggi lainnya APIs seperti DynamoDB Enhanced Client API V1 `DynamoDBMapperke` V2 tidak didukung.

Untuk detail lebih lanjut tentang batasan, lihat akhir halaman ini. Untuk contoh detail pola kode umum yang tidak didukung dengan langkah migrasi manual, lihat Pola kode tidak didukung.

## Gunakan alat migrasi

Migrasi proyek Maven

Ikuti petunjuk di bawah ini untuk memigrasikan SDK for Java 1.x proyek berbasis Maven dengan menggunakan alat plugin Maven. OpenRewrite

1. Arahkan ke direktori root proyek Maven Anda

   Buka jendela terminal (baris perintah) dan arahkan ke direktori root aplikasi berbasis MAVENN Anda.

2. Jalankan `rewrite-maven-plugin` perintah plugin

   Anda dapat memilih dari dua mode (tujuan Maven): `dryRun` dan. `run`

   **`dryRun`**modus

   Dalam `dryRun` mode, plugin menghasilkan log diff di output konsol dan file patch bernama `rewrite.patch` di `target/rewrite` folder. Mode ini memungkinkan Anda untuk melihat pratinjau perubahan yang akan dilakukan, karena tidak ada perubahan yang dilakukan pada file kode sumber.

   Contoh berikut menunjukkan cara memanggil plugin dalam `dryRun` mode.

```
mvn org.openrewrite.maven:rewrite-maven-plugin:<rewrite-plugin-version>*:dryRun \
  -Drewrite.recipeArtifactCoordinates=software.amazon.awssdk:v2-
migration:<sdkversion>** \
  -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
```

   *Ganti *`<rewrite-plugin-version>`* dengan `rewriteMavenPluginVersion` nilai yang Anda lihat di file pengujian ini.

   ** Ganti *`<sdkversion>`* dengan versi 2.x SDK. Kunjungi Maven Central untuk memeriksa versi terbaru.

> **Important**
>
> Pastikan untuk menggunakan versi yang `rewrite-maven-plugin` ditampilkan dalam file pengujian karena versi lain mungkin tidak berfungsi.

Output konsol Anda dari `dryRun` mode harus menyerupai output berikut.

```
[WARNING] These recipes would make changes to project/src/test/resources/maven/
before/pom.xml:
[WARNING]     software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
[WARNING]         software.amazon.awssdk.v2migration.UpgradeSdkDependencies
[WARNING]             org.openrewrite.java.dependencies.AddDependency:
 {groupId=software.amazon.awssdk, artifactId=apache-client, version=2.27.0,
 onlyIfUsing=com.amazonaws.ClientConfiguration}
[WARNING]             org.openrewrite.java.dependencies.AddDependency:
 {groupId=software.amazon.awssdk, artifactId=netty-nio-client, version=2.27.0,
 onlyIfUsing=com.amazonaws.ClientConfiguration}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-bom,
 newGroupId=software.amazon.awssdk, newArtifactId=bom, newVersion=2.27.0}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-s3,
 newGroupId=software.amazon.awssdk, newArtifactId=s3, newVersion=2.27.0}
[WARNING]             org.openrewrite.java.dependencies.ChangeDependency:
 {oldGroupId=com.amazonaws, oldArtifactId=aws-java-sdk-sqs,
 newGroupId=software.amazon.awssdk, newArtifactId=sqs, newVersion=2.27.0}
[WARNING] These recipes would make changes to project/src/test/resources/maven/
before/src/main/java/foo/bar/Application.java:
[WARNING]     software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
[WARNING]         software.amazon.awssdk.v2migration.S3GetObjectConstructorToFluent
[WARNING]             software.amazon.awssdk.v2migration.ConstructorToFluent
[WARNING]         software.amazon.awssdk.v2migration.S3StreamingResponseToV2
[WARNING]         software.amazon.awssdk.v2migration.ChangeSdkType
[WARNING]         software.amazon.awssdk.v2migration.ChangeSdkCoreTypes
[WARNING]             software.amazon.awssdk.v2migration.ChangeExceptionTypes
[WARNING]                 org.openrewrite.java.ChangeType:
 {oldFullyQualifiedTypeName=com.amazonaws.AmazonClientException,
 newFullyQualifiedTypeName=software.amazon.awssdk.core.exception.SdkException}
```

```
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRequestId(),
 newMethodName=requestId}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getErrorCode(),
 newMethodName=awsErrorDetails().errorCode}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getServiceName(),
 newMethodName=awsErrorDetails().serviceName}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getErrorMessage(),
 newMethodName=awsErrorDetails().errorMessage}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRawResponse(),
 newMethodName=awsErrorDetails().rawResponse().asByteArray}
[WARNING]                org.openrewrite.java.ChangeMethodName:
 {methodPattern=com.amazonaws.AmazonServiceException getRawResponseContent(),
 newMethodName=awsErrorDetails().rawResponse().asUtf8String}
[WARNING]                org.openrewrite.java.ChangeType:
 {oldFullyQualifiedTypeName=com.amazonaws.AmazonServiceException,
 newFullyQualifiedTypeName=software.amazon.awssdk.awscore.exception.AwsServiceException}
[WARNING]         software.amazon.awssdk.v2migration.NewClassToBuilderPattern
[WARNING]             software.amazon.awssdk.v2migration.NewClassToBuilder
[WARNING]             software.amazon.awssdk.v2migration.V1SetterToV2
[WARNING]         software.amazon.awssdk.v2migration.V1GetterToV2
...
[WARNING]         software.amazon.awssdk.v2migration.V1BuilderVariationsToV2Builder
[WARNING]         software.amazon.awssdk.v2migration.NewClassToBuilderPattern
[WARNING]             software.amazon.awssdk.v2migration.NewClassToBuilder
[WARNING]             software.amazon.awssdk.v2migration.V1SetterToV2
[WARNING]         software.amazon.awssdk.v2migration.HttpSettingsToHttpClient
[WARNING]         software.amazon.awssdk.v2migration.WrapSdkClientBuilderRegionStr
[WARNING] Patch file available:
[WARNING]     project/src/test/resources/maven/before/target/rewrite/rewrite.patch
[WARNING] Estimate time saved: 20m
[WARNING] Run 'mvn rewrite:run' to apply the recipes.
```

### **`run`**modus

Ketika Anda menjalankan plugin dalam `run` mode, itu memodifikasi kode sumber pada disk untuk menerapkan perubahan. Pastikan Anda memiliki cadangan kode sumber sebelum menjalankan perintah.

Contoh berikut menunjukkan cara memanggil plugin dalam `run` mode.

```
mvn org.openrewrite.maven:rewrite-maven-plugin:<rewrite-plugin-version>*:run \
  -Drewrite.recipeArtifactCoordinates=software.amazon.awssdk:v2-
migration:<sdkversion>** \
  -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
```

* Ganti *<rewrite-plugin-version>* dengan `rewriteMavenPluginVersion`value yang Anda lihat di file pengujian ini.

** Ganti *<sdkversion>* dengan versi 2.x SDK. Kunjungi Maven Central untuk memeriksa versi terbaru.

Setelah Anda menjalankan perintah, kompilasi aplikasi Anda dan jalankan tes untuk memverifikasi perubahan.

Migrasi proyek Gradle

Ikuti petunjuk di bawah ini untuk memigrasikan SDK for Java 1.x proyek berbasis Gradle dengan menggunakan alat plugin Gradle. OpenRewrite

1. Arahkan ke direktori root proyek Gradle

   Buka jendela terminal (baris perintah) dan arahkan ke direktori root aplikasi berbasis Gradle Anda.

2. Buat skrip init Gradle

   Buat `init.gradle` file dengan konten berikut di direktori.

```
initscript {
    repositories {
        maven { url "https://plugins.gradle.org/m2" }
    }
    dependencies {
        classpath("org.openrewrite:plugin:<rewrite-plugin-version>*")
    }
}

rootProject {
    plugins.apply(org.openrewrite.gradle.RewritePlugin)
    dependencies {
```

```
        rewrite("software.amazon.awssdk:v2-migration:latest.release")
    }

    afterEvaluate {
        if (repositories.isEmpty()) {
            repositories {
                mavenCentral()
            }
        }
    }
}
```

* Ganti *<rewrite-plugin-version>* dengan versi yang Anda lihat di file pengujian ini.

3. Jalankan `rewrite` perintah

   Seperti halnya plugin Maven, Anda dapat menjalankan plugin Gradle dalam `dryRun` mode atau. `run`

   **`dryRun`**modus

   Contoh berikut menunjukkan cara memanggil plugin dalam `dryRun` mode.

   ```
   gradle rewriteDryRun --init-script init.gradle \
     -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
   ```

   **`run`**modus

   Contoh berikut menunjukkan cara memanggil plugin dalam `run` mode.

   ```
   gradle rewriteRun --init-script init.gradle \
     -Drewrite.activeRecipes=software.amazon.awssdk.v2migration.AwsSdkJavaV1ToV2
   ```

## Keterbatasan saat ini

Meskipun migrasi mengunggah sebagian besar kode V1 melalui aturan modifikasi kode yang diperbarui ke setara V2, beberapa kelas dan metode tidak tercakup. Untuk kelas dan metode ini, ikuti step-by-step petunjuk untuk memigrasikan kode Anda secara manual.

Untuk beberapa aturan modifikasi kode yang tidak didukung, alat migrasi dapat menambahkan komentar yang dimulai dengan:

```
/*AWS SDK for Java v2 migration: Transform for ...
```

Mengikuti komentar, alat ini mengeluarkan rintisan generik dari versi V2 dari metode atau kelas. Misalnya, dalam output berikut, alat migrasi mencoba memigrasi metode klien V1 S3: `setBucketLifecycleConfiguration`

```
/*AWS SDK for Java v2 migration: Transform for setBucketLifecycleConfiguration method
 not supported.
Please manually migrate your code by using builder pattern, update from
 BucketLifecycleConfiguration.Rule
to LifecycleRule, StorageClass to TransitionStorageClass, and adjust imports and
 names.*/
s3.putBucketLifecycleConfiguration(
        PutBucketLifecycleConfigurationRequest.builder()
            .bucket(bucketName)
            .lifecycleConfiguration(BucketLifecycleConfiguration.builder()
                .build())
            .build());
```

Tautan dalam daftar di bawah ini, membawa Anda ke informasi migrasi untuk membantu Anda memigrasikan kode secara manual.

- the section called “Perbedaan klien S3”
- Manajer Transfer S3 () TransferManager
- Pemetaan objek DynamoDB (Dynamo) DBMapper
- EC2 utilitas metadata () EC2 MetadataUtils
- Pelayan () AmazonDynamo DBWaiters
- Pembangun Kebijakan IAM (Kebijakan)
- CloudFront presigning (CloudFrontUrlSigner, CloudFrontCookieSigner)
- Pemberitahuan Acara S3 (EventNotificationS3)
- Penerbitan metrik SDK (dokumentasi 1.x, dokumentasi 2.x)
- Pola kode yang tidak didukung —Contoh rinci pola kode umum yang memerlukan migrasi manual

## Pola kode alat migrasi yang tidak didukung

Alat migrasi secara otomatis mengonversi sebagian besar kode v1 ke v2. Namun, beberapa pola kode memerlukan migrasi manual. Topik ini memberikan contoh rinci tentang pola yang tidak didukung yang paling umum dan menunjukkan kepada Anda cara mengonversinya secara manual.

Daftar pola berikut ini tidak lengkap. Jika kode Anda tidak dikompilasi setelah menjalankan alat migrasi, ikuti petunjuk step-by-step migrasi untuk memigrasikan kode v1 yang tersisa secara manual.

Minta konstruktor objek dengan parameter

Untuk permintaan POJOs (tidak termasuk Amazon S3), alat migrasi hanya mengubah metode penyetel. Alat ini tidak mendukung konstruktor dengan parameter.

Pola yang didukung: Minta objek menggunakan setter (tidak ada parameter konstruktor)

Sebelum (kode v1 asli):

```
import com.amazonaws.services.sqs.model.SendMessageRequest;

SendMessageRequest request = new SendMessageRequest().withMessageBody("Hello World");
request.setQueueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue");
```

Setelah (hasil alat migrasi):

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

SendMessageRequest request = SendMessageRequest.builder()
    .messageBody("Hello World").build();
request = request.toBuilder()
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue").build();
```

Pola tidak didukung: Minta konstruktor objek dengan parameter

Alat migrasi tidak dapat mengonversi konstruktor dengan parameter:

Sebelum migrasi manual, tetapi setelah alat migrasi:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest; // Import updated
 to v2.

// This pattern requires manual migration.
SendMessageRequest request = new SendMessageRequest(
```

```
    "https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue",
    "Hello World");
```

Alat migrasi mengubah impor ke v2, tetapi kode konstruktor tetap tidak berubah dan memerlukan pembaruan manual untuk menggunakan pola pembangun.

Setelah migrasi manual:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;

SendMessageRequest request = SendMessageRequest.builder()
    .messageBody("Hello World")
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue")
    .build();
```

Metode klien layanan dengan parameter individual

Alat migrasi tidak dapat mengonversi metode klien layanan yang mengambil parameter individual alih-alih objek permintaan (tidak termasuk Amazon S3).

Sebelum (kode v1):

```
import com.amazonaws.services.sqs.AmazonSQS;
import com.amazonaws.services.sqs.AmazonSQSClient;

AmazonSQS sqs = new AmazonSQSClient();
// The following v1 method takes individual parameters.
sqs.sendMessage("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue", "Hello
 World");
```

Setelah (hasil alat migrasi — tidak dikompilasi):

```
import software.amazon.awssdk.services.sqs.SqsClient;  // Import updated to v2.
// No import statement for the v2 request POJO.

SqsClient sqs = SqsClient.builder().build();

// Does not compile–v2 methods only accept request POJOs.
sqs.sendMessage("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue", "Hello
 World");
```

Anda harus memperbarui argumen metode secara manual untuk menggunakan objek permintaan:

```
import software.amazon.awssdk.services.sqs.SqsClient;
import software.amazon.awssdk.services.sqs.model.SendMessageRequest; // Add manually.

SqsClient sqs = SqsClient.builder().build();

// Corrected v2 code.
SendMessageRequest request = SendMessageRequest.builder()
    .queueUrl("https://sqs.us-west-2.amazonaws.com/0123456789012/demo-queue")
    .messageBody("Hello World")
    .build();
sqs.sendMessage(request);
```

Minta metode batas waktu

Alat migrasi tidak mengonversi metode yang menetapkan batas waktu pada objek permintaan.

Sebelum (kode v1):

```
import com.amazonaws.services.sqs.model.SendMessageRequest;

SendMessageRequest request = new SendMessageRequest();
request.setSdkRequestTimeout(7);
```

Setelah (hasil alat migrasi — tidak dikompilasi):

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;  // Import updated
 to v2.

SendMessageRequest request = SendMessageRequest.builder().build();

// Does not compile.
request.setSdkRequestTimeout(7);
```

Anda harus melakukan migrasi secara manual untuk menggunakan `overrideConfiguration` metode v2:

```
import software.amazon.awssdk.services.sqs.model.SendMessageRequest;
import java.time.Duration;

SendMessageRequest request = SendMessageRequest.builder().build();
```

```
// Corrected v2 code.
request = request.toBuilder()
    .overrideConfiguration(o -> o.apiCallTimeout(Duration.ofSeconds(7)))
    .build();
```

Konstruktor klien layanan dengan parameter

Alat migrasi mengonversi konstruktor klien layanan kosong tetapi tidak dapat mengonversi konstruktor yang menerima parameter seperti kredensil atau konfigurasi.

Sebelum (kode v1):

```
import com.amazonaws.auth.AWSCredentials;
import com.amazonaws.auth.BasicAWSCredentials;
import com.amazonaws.services.sqs.AmazonSQS;
import com.amazonaws.services.sqs.AmazonSQSClient;

AWSCredentials awsCredentials = new BasicAWSCredentials("akid", "skid");
AmazonSQS sqs = new AmazonSQSClient(awsCredentials);
```

Setelah (hasil alat migrasi — tidak dikompilasi):

```
import software.amazon.awssdk.auth.credentials.AwsCredentials;
import software.amazon.awssdk.auth.credentials.AwsBasicCredentials;
import software.amazon.awssdk.services.sqs.SqsClient;  // Import updated to v2.

AwsCredentials awsCredentials = AwsBasicCredentials.create("akid", "skid");

// Does not compile.
SqsClient sqs = new SqsClient(awsCredentials);
```

Anda harus memperbarui konstruktor klien layanan secara manual untuk menggunakan pola pembangun:

```
import software.amazon.awssdk.auth.credentials.AwsCredentials;
import software.amazon.awssdk.auth.credentials.AwsBasicCredentials;
import software.amazon.awssdk.auth.credentials.StaticCredentialsProvider;  // Add
 manually.
import software.amazon.awssdk.services.sqs.SqsClient;

AwsCredentials awsCredentials = AwsBasicCredentials.create("akid", "skid");
```

```
// Corrected v2 code.
SqsClient sqs = SqsClient.builder()
    .credentialsProvider(StaticCredentialsProvider.create(awsCredentials))
    .build();
```

## step-by-stepInstruksi migrasi dengan contoh

Bagian ini menyediakan step-by-step panduan untuk memigrasikan aplikasi Anda yang saat ini menggunakan SDK for Java v1.x ke SDK for Java 2.x. Bagian pertama menyajikan ikhtisar langkah-langkah yang diikuti dengan contoh rinci migrasi.

Langkah-langkah yang dibahas di sini menjelaskan migrasi kasus penggunaan normal, di mana aplikasi memanggil Layanan AWS menggunakan klien layanan berbasis model. Jika Anda perlu memigrasikan kode yang menggunakan level yang lebih tinggi APIs seperti S3 Transfer Manager atau CloudFrontpresigning, lihat bagian di bawah the section called “Apa yang berbeda antara 1.x dan 2.x” daftar isi.

Pendekatan yang dijelaskan di sini adalah saran. Anda dapat menggunakan teknik lain dan memanfaatkan fitur pengeditan kode IDE Anda untuk mencapai hasil yang sama.

### Ikhtisar langkah-langkah

1. Mulailah dengan menambahkan SDK for Java 2.x BOM

Dengan menambahkan elemen Maven BOM (Bill of Materials) untuk SDK for Java 2.x ke file POM Anda, Anda memastikan bahwa semua ketergantungan v2 yang Anda butuhkan berasal dari versi yang sama. POM Anda dapat berisi dependensi v1 dan v2. Ini memungkinkan Anda untuk memigrasikan kode secara bertahap daripada mengubah semuanya sekaligus.

SDK for Java 2.x BOM

```
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>bom</artifactId>
      <version>2.27.21</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
```

```
</dependencyManagement>
```

Anda dapat menemukan versi terbaru di Maven Central Repository.

2. Cari file untuk pernyataan impor kelas v1

Dengan memindai file dalam aplikasi Anda untuk SERVICE_ yang IDs digunakan dalam impor v1, Anda akan menemukan SERVICE_ unik yang digunakan. IDs SERVICE_ID adalah nama pendek dan unik untuk sebuah. Layanan AWS Misalnya `cognitoidentity` adalah SERVICE_ID untuk Identitas Amazon Cognito.

3. Tentukan dependensi Maven v2 dari pernyataan impor v1

Setelah Anda menemukan semua v1 SERVICE_ yang unikIDs, Anda dapat menentukan artefak Maven yang sesuai untuk ketergantungan v2 dengan mengacu pada. the section called “Nama Package ke pemetaan ArtifactID”

4. Tambahkan elemen ketergantungan v2 ke file POM

Perbarui file Maven POM dengan elemen ketergantungan ditentukan pada langkah 3.

5. Dalam file Java, secara bertahap ubah kelas v1 ke kelas v2

Saat Anda mengganti kelas v1 dengan kelas v2, buat perubahan yang diperlukan untuk mendukung API v2 seperti menggunakan pembangun alih-alih konstruktor dan menggunakan pengambil dan penyetel yang lancar.

6. Hapus dependensi v1 Maven dari impor POM dan v1 dari file

Setelah memigrasikan kode untuk menggunakan kelas v2, hapus semua impor v1 yang tersisa dari file dan semua dependensi dari file build Anda.

7. Memfaktorkan ulang kode untuk menggunakan penyempurnaan API v2

Setelah kode berhasil mengkompilasi dan lulus tes, Anda dapat memanfaatkan penyempurnaan v2 seperti menggunakan klien HTTP atau paginator yang berbeda untuk menyederhanakan kode. Ini adalah langkah opsional.

## Contoh migrasi

Dalam contoh ini, kami memigrasikan aplikasi yang menggunakan SDK for Java v1 dan mengakses beberapa. Layanan AWS Kami bekerja melalui metode v1 berikut secara rinci di langkah 5. Ini adalah salah satu metode dalam kelas yang berisi delapan metode dan ada 32 kelas dalam aplikasi.

metode v1 untuk bermigrasi

Hanya impor SDK v1 yang tercantum di bawah ini dari file Java.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesResult;
import com.amazonaws.services.ec2.model.Instance;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Reservation;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;
...
private static List<Instance> getRunningInstances(AmazonEC2Client ec2, List<String>
 instanceIds) {
    List<Instance> runningInstances = new ArrayList<>();
    try {
        DescribeInstancesRequest request = new DescribeInstancesRequest()
                .withInstanceIds(instanceIds);
        DescribeInstancesResult result;
        do {
            // DescribeInstancesResponse is a paginated response, so use tokens with
 multiple requests.
            result = ec2.describeInstances(request);
            request.setNextToken(result.getNextToken());   // Prepare request for next
 page.
            for (final Reservation r : result.getReservations()) {
                for (final Instance instance : r.getInstances()) {
                    LOGGER.info("Examining instanceId: "+ instance.getInstanceId());
                    // if instance is in a running state, add it to runningInstances
 list.
                    if (RUNNING_STATES.contains(instance.getState().getName())) {
                        runningInstances.add(instance);
                    }
                }
            }
        } while (result.getNextToken() != null);
    } catch (final AmazonEC2Exception exception) {
        // if instance isn't found, assume its terminated and continue.
```

```
        if (exception.getErrorCode().equals(NOT_FOUND_ERROR_CODE)) {
            LOGGER.info("Instance probably terminated; moving on.");
        } else {
            throw exception;
        }
    }
    return runningInstances;
}
```

1. Tambahkan v2 Maven BOM

Tambahkan Maven BOM untuk SDK for Java 2.x ke POM di samping dependensi lain di bagian tersebut. `dependencyManagement` Jika file POM Anda memiliki BOM untuk v1 SDK, biarkan untuk saat ini. Ini akan dihapus pada langkah selanjutnya.

Manajemen Ketergantungan POM di awal

```
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>org.example</groupId>             <!--Existing dependency in POM. -->
      <artifactId>bom</artifactId>
      <version>1.3.4</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
    ...
    <dependency>
      <groupId>com.amazonaws</groupId>
      <artifactId>aws-java-sdk-bom</artifactId>  <!--Existing v1 BOM dependency. -->
      <version>1.11.1000</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
    ...
    <dependency>
      <groupId>software.amazon.awssdk</groupId>  <!--Add v2 BOM dependency. -->
      <artifactId>bom</artifactId>
      <version>2.27.21</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
```

```
</dependencyManagement>
```

2. Cari file untuk pernyataan impor kelas v1

Cari kode aplikasi untuk kejadian unik. `import com.amazonaws.services` Ini membantu kami menentukan dependensi v1 yang digunakan oleh proyek. Jika aplikasi Anda memiliki file POM Maven dengan dependensi v1 terdaftar, Anda dapat menggunakan informasi ini sebagai gantinya.

Untuk contoh ini kita menggunakan perintah [ripgrep(rg)] untuk mencari basis kode.

Dari root basis kode Anda, jalankan `ripgrep` perintah berikut. Setelah `ripgrep` menemukan pernyataan impor, mereka disalurkan `kecut`,`sort`, dan `uniq` perintah untuk mengisolasi SERVICE_. IDs

```
rg --no-filename 'import\s+com\.amazonaws\.services' | cut -d '.' -f 4 | sort | uniq
```

Untuk aplikasi ini, SERVICE_ IDs berikut dicatat ke konsol.

```
autoscaling
cloudformation
ec2
identitymanagement
```

Ini menunjukkan bahwa setidaknya ada satu kemunculan dari masing-masing nama paket berikut yang digunakan dalam `import` pernyataan. Untuk tujuan kita, nama kelas individu tidak masalah. Kita hanya perlu menemukan SERVICE_ IDs yang digunakan.

```
com.amazonaws.services.autoscaling.*
com.amazonaws.services.cloudformation.*
com.amazonaws.services.ec2.*
com.amazonaws.services.identitymanagement.*
```

3. Tentukan dependensi Maven v2 dari pernyataan impor v1

SERVICE_ IDs untuk v1 yang kami isolasi dari Langkah 2—misalnya `cloudformation` dan—dapat dipetakan ke `autoscaling` v2 SERVICE_ID yang sama untuk sebagian besar. Karena artifactID Maven v2 cocok dengan SERVICE_ID dalam banyak kasus, Anda memiliki informasi yang Anda perlukan untuk menambahkan blok ketergantungan ke file POM Anda.

Tabel berikut menunjukkan bagaimana kita dapat menentukan dependensi v2.

| v1 SERVICE_ID memetakan ke...<br><br>nama paket | v2 SERVICE_ID memetakan ke...<br><br>nama paket | v2 Ketergantungan Maven |
|---|---|---|
| ec2<br><br>`com.amazonaws.services. ec2.*` | ec2<br><br>`software.amazon.awssdk.services. ec2.*` | `<dependency> <groupId>software.amazon.awssdk</groupId> <artifactId> ec2</artifactId> </dependency>` |
| penskalaan otomatis<br><br>`com.amazonaws.services. autoscaling .*` | penskalaan otomatis<br><br>`software.amazon.awssdk.services. autoscaling .*` | `<dependency> <groupId>software.amazon.awssdk</groupId> <artifactId> autoscaling </artifactId> </dependency>` |
| pembentukan awan<br><br>`com.amazonaws.services. cloudformation .*` | pembentukan awan<br><br>`software.amazon.awssdk. cloudformation .*` | `<dependency> <groupId>software.amazon.awssdk</groupId> <artifactId> cloudformation </artifactId> </dependency>` |
| manajemen identitas*<br><br>`com.amazonaws.services. identitymanagement .*` | iam*<br><br>`software.amazon.awssdk. iam.*` | `<dependency> <groupId>software.amazon.awssdk</groupId> <artifactId> iam</artifactId> </dependency>` |

* The `identitymanagement` to `iam` mapping adalah pengecualian di mana SERVICE_ID berbeda antar versi. Lihat pengecualian the section called “Nama Package ke pemetaan ArtifactID” untuk jika Maven atau Gradle tidak dapat menyelesaikan ketergantungan v2.

4. Tambahkan elemen ketergantungan v2 ke file POM

Pada langkah 3, kami menentukan empat blok ketergantungan yang perlu ditambahkan ke file POM. Kami tidak perlu menambahkan versi karena kami telah menentukan BOM di langkah 1. Setelah impor ditambahkan, file POM kami memiliki elemen ketergantungan berikut.

```
  ...
<dependencies>
  ...
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>autoscaling</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>iam</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>cloudformation</artifactId>
  </dependency>
  <dependency>
    <groupId>software.amazon.awssdk</groupId>
    <artifactId>ec2</artifactId>
  </dependency>
  ...
</dependencies>
  ...
```

5. Dalam file Java, secara bertahap ubah kelas v1 ke kelas v2

Dalam metode yang kita migrasi, kita lihat

- Klien layanan EC2 dari`com.amazonaws.services.ec2.AmazonEC2Client`.
- Beberapa kelas model EC2 digunakan. Misalnya `DescribeInstancesRequest` dan`DescribeInstancesResult`.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesRequest;
import com.amazonaws.services.ec2.model.DescribeInstancesResult;
import com.amazonaws.services.ec2.model.Instance;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Reservation;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;
...
private static List<Instance> getRunningInstances(AmazonEC2Client ec2, List<String>
 instanceIds)
    List<Instance> runningInstances = new ArrayList<>();
    try {
        DescribeInstancesRequest request = new DescribeInstancesRequest()
                .withInstanceIds(instanceIds);
        DescribeInstancesResult result;
        do {
            // DescribeInstancesResponse is a paginated response, so use tokens with
 multiple re
            result = ec2.describeInstances(request);
            request.setNextToken(result.getNextToken());   // Prepare request for next
 page.
            for (final Reservation r : result.getReservations()) {
                for (final Instance instance : r.getInstances()) {
                    LOGGER.info("Examining instanceId: "+ instance.getInstanceId());
                    // if instance is in a running state, add it to runningInstances
 list.
                    if (RUNNING_STATES.contains(instance.getState().getName())) {
                        runningInstances.add(instance);
                    }
                }
            }
        } while (result.getNextToken() != null);
    } catch (final AmazonEC2Exception exception) {
        // if instance isn't found, assume its terminated and continue.
        if (exception.getErrorCode().equals(NOT_FOUND_ERROR_CODE)) {
            LOGGER.info("Instance probably terminated; moving on.");
        } else {
```

```
            throw exception;
        }
    }
    return runningInstances;
}
...
```

Tujuan kami adalah mengganti semua impor v1 dengan impor v2. Kami melanjutkan satu kelas pada satu waktu.

a. Ganti pernyataan impor atau nama kelas

Kita melihat bahwa parameter pertama untuk `describeRunningInstances` metode ini adalah `AmazonEC2Client` instance v1. Lakukan salah satu tindakan berikut:

- Ganti impor untuk `com.amazonaws.services.ec2.AmazonEC2Client` dengan `software.amazon.awssdk.services.ec2.Ec2Client` dan ubah `AmazonEC2Client` ke`Ec2Client`.
- Ubah tipe parameter menjadi `Ec2Client` dan biarkan IDE meminta kami untuk impor yang benar. IDE kami akan meminta kami untuk mengimpor kelas v2 karena nama klien berbeda—`AmazonEC2Client` dan`Ec2Client`. Pendekatan ini tidak berfungsi jika nama kelas sama di kedua versi.

b. Ganti kelas model v1 dengan setara v2

Setelah perubahan ke v2`Ec2Client`, jika kita menggunakan IDE, kita melihat kesalahan kompilasi dalam pernyataan berikut.

```
                    result = ec2.describeInstances(request);
```

Kesalahan kompilasi dihasilkan dari penggunaan instance v1 `DescribeInstancesRequest` sebagai parameter ke `Ec2Client` `describeInstances` metode v2. Untuk memperbaikinya, buat pernyataan penggantian atau impor berikut.

| menggantikan | dengan |
| --- | --- |
| `import com.amazonaws.services.ec2.model.DescribeInstancesRequest` | `import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest` |

c. Ubah konstruktor v1 menjadi pembangun v2.

Kami masih melihat kesalahan kompilasi karena tidak ada konstruktor di kelas v2. Untuk memperbaikinya, buat perubahan berikut.

| perubahan | kepada |
| --- | --- |
| `final DescribeInstancesRequest request = new DescribeInstancesRequest()`<br>`.withInstanceIds(instanceIdsCopy);` | `final DescribeInstancesRequest request = DescribeInstancesRequest.builder()`<br>`.instanceIds(instanceIdsCopy)`<br>`.build();` |

d. Ganti objek **`*Result`** respons v1 dengan ekuivalen v2 **`*Response`**

Perbedaan yang konsisten antara v1 dan v2 adalah bahwa semua objek respons di v2 diakhiri dengan `*Response` alih-alih. `*Result` Ganti impor v1 ke `DescribeInstancesResult` impor v2,`DescribeInstancesResponse`.

d. Buat perubahan API

Pernyataan berikut membutuhkan beberapa perubahan.

```
request.setNextToken(result.getNextToken());
```

Dalam v2, metode setter tidak menggunakan `set` atau dengan`prefix`. Metode getter yang diawali dengan `get` juga hilang di SDK for Java 2.x

Kelas model, seperti `request` instance, tidak dapat diubah di v2, jadi kita perlu membuat yang baru `DescribeInstancesRequest` dengan pembangun.

Dalam v2, pernyataan menjadi sebagai berikut.

```
request = DescribeInstancesRequest.builder()
        .nextToken(result.nextToken())
        .build();
```

d. Ulangi sampai metode dikompilasi dengan kelas v2

Lanjutkan dengan sisa kode. Ganti impor v1 dengan impor v2 dan perbaiki kesalahan kompilasi. Lihat Referensi API v2 dan Referensi apa yang berbeda sesuai kebutuhan.

Setelah kami memigrasikan metode tunggal ini, kami memiliki kode v2 berikut.

```
import com.amazonaws.ClientConfiguration;
import com.amazonaws.regions.Region;
import com.amazonaws.regions.RegionUtils;
import com.amazonaws.services.ec2.AmazonEC2Client;
import com.amazonaws.services.ec2.model.AmazonEC2Exception;
import com.amazonaws.services.ec2.model.CreateTagsRequest;
import com.amazonaws.services.ec2.model.InstanceStateName;
import com.amazonaws.services.ec2.model.Tag;
import com.amazonaws.services.ec2.model.TerminateInstancesRequest;

import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.Reservation;
...
private static List<Instance> getRunningInstances(Ec2Client ec2, List<String>
 instanceIds) {
    List<Instance> runningInstances = new ArrayList<>();
        try {
            DescribeInstancesRequest request = DescribeInstancesRequest.builder()
                    .instanceIds(instanceIds)
                    .build();
            DescribeInstancesResponse result;
            do {
                // DescribeInstancesResponse is a paginated response, so use tokens
 with multiple re
                result = ec2.describeInstances(request);
```

```
                request = DescribeInstancesRequest.builder()   // Prepare request for
 next page.
                        .nextToken(result.nextToken())
                        .build();
                for (final Reservation r : result.reservations()) {
                    for (final Instance instance : r.instances()) {
                        // if instance is in a running state, add it to
 runningInstances list.
                        if (RUNNING_STATES.contains(instance.state().nameAsString())) {
                            runningInstances.add(instance);
                        }
                    }
                }
            } while (result.nextToken() != null);
        } catch (final Ec2Exception exception) {
            // if instance isn't found, assume its terminated and continue.
            if (exception.awsErrorDetails().errorCode().equals(NOT_FOUND_ERROR_CODE)) {
                    LOGGER.info("Instance probably terminated; moving on.");
            } else {
                throw exception;
            }
        }
        return runningInstances;
    }
...
```

Karena kami memigrasikan satu metode dalam file Java dengan delapan metode, kami memiliki campuran impor v1 dan v2 saat kami mengerjakan file. Kami menambahkan enam pernyataan impor terakhir saat kami melakukan langkah-langkahnya.

Setelah kami memigrasikan semua kode, tidak akan ada lagi pernyataan impor v1.

6. Hapus dependensi v1 Maven dari impor POM dan v1 dari file

Setelah kami memigrasikan semua kode v1 dalam file, kami memiliki pernyataan impor SDK v2 berikut.

```
import software.amazon.awssdk.core.client.config.ClientOverrideConfiguration;
import software.amazon.awssdk.regions.Region;
import software.amazon.awssdk.regions.ServiceMetadata;
import software.amazon.awssdk.services.ec2.Ec2Client;
import software.amazon.awssdk.services.ec2.model.CreateTagsRequest;
import software.amazon.awssdk.services.ec2.model.DescribeInstancesRequest;
```

```
import software.amazon.awssdk.services.ec2.model.DescribeInstancesResponse;
import software.amazon.awssdk.services.ec2.model.Ec2Exception;
import software.amazon.awssdk.services.ec2.model.Instance;
import software.amazon.awssdk.services.ec2.model.InstanceStateName;
import software.amazon.awssdk.services.ec2.model.Reservation;
import software.amazon.awssdk.services.ec2.model.Tag;
import software.amazon.awssdk.services.ec2.model.TerminateInstancesRequest;
```

Setelah kita memigrasikan semua file dalam aplikasi kita, kita tidak lagi membutuhkan dependensi v1 dalam file POM kita. Hapus v1 BOM dari `dependencyManagement` bagian, jika menggunakan, dan semua blok ketergantungan v1.

7. Memfaktorkan ulang kode untuk menggunakan penyempurnaan API v2

Untuk cuplikan yang telah kami migrasi, kami dapat menggunakan paginator v2 secara opsional dan membiarkan SDK mengelola permintaan berbasis token untuk lebih banyak data.

Kita dapat mengganti seluruh do klausa dengan yang berikut ini.

```
                DescribeInstancesIterable responses =
ec2.describeInstancesPaginator(request);

                responses.reservations().stream()
                        .forEach(reservation -> reservation.instances()
                                .forEach(instance -> {
                                    if
(RUNNING_STATES.contains(instance.state().nameAsString())) {
                                        runningInstances.put(instance.instanceId(),
instance);
                                    }
                                }));
```

## Nama Package untuk pemetaan ArtifactID Maven

Saat memigrasikan project Maven atau Gradle dari v1 SDK for Java ke v2, Anda perlu mencari tahu dependensi mana yang akan ditambahkan ke file build Anda. Pendekatan yang dijelaskan dalam the section called “Step-by-step instruksi” (langkah 3) menggunakan nama paket dalam pernyataan import sebagai titik awal untuk menentukan dependensi (sebagai ArtifactIds) untuk ditambahkan ke file build Anda.

Anda dapat menggunakan informasi dalam topik ini untuk memetakan nama paket v1 ke v2 Artifactids.

Konvensi penamaan umum yang digunakan dalam nama paket dan Maven Artifactids

Tabel berikut menunjukkan konvensi penamaan umum yang SDKs digunakan untuk SERVICE_ID tertentu. SERVICE_ID adalah pengidentifikasi unik untuk file. Layanan AWS Misalnya, SERVICE_ID untuk layanan Amazon S3 adalah `s3` dan merupakan SERVICE_ID untuk Identitas Amazon `cognitoidentity` Cognito.

| nama paket v1 (pernyataan impor) | v1 Artifactid | v2 Artifactid | v2 nama paket (pernyataan impor) |
|---|---|---|---|
| com.amazonaws.services.service_id | aws-java-sdk-SERVICE_ID | SERVICE_ID | Software.amazon.awssdk.services.service_id |
| | | | |
| Contoh untuk Identitas Amazon Cognito (SERVICE_ID:) ***`cognitoidentity`*** | | | |
| com.amazonaws.services. kognitoidentitas | aws-java-sdk-kognitoidentitas | kognitoidentitas | software.amazon.awssdk.services. kognitoidentitas |

Perbedaan SERVICE_ID

Dalam v1

Dalam beberapa kasus, SERVICE_ID berbeda antara nama paket dan di ArtifactID untuk layanan yang sama. Misalnya, baris CloudWatch Metrik dari tabel berikut menunjukkan bahwa itu `metrics` adalah SERVICE_ID dalam nama paket tetapi `cloudwatchmetrics` merupakan SERVICE_ID ArtifactID.

Dalam v2

Tidak ada perbedaan dalam SERVICE_ID yang digunakan dalam nama paket dan Artifactids.

Antara v1 dan v2

Untuk sebagian besar layanan, SERVICE_ID di v2 sama dengan SERVICE_ID v1 di kedua nama paket dan Artifactids. Contoh dari ini adalah `cognitoedentity` SERVICE_ID seperti yang

ditunjukkan pada tabel sebelumnya. Namun, beberapa SERVICE_ IDs berbeda antara SDKs seperti yang ditunjukkan pada tabel berikut.

SERVICE_ID huruf tebal di salah satu kolom v1 menunjukkan bahwa itu berbeda dari SERVICE_ID yang digunakan di v2.

| Nama layanan | nama paket v1 | v1 Artifactid | v2 Artifactid | v2 nama paket |
|---|---|---|---|---|
| | Semua nama paket dimulai dengan `com.amazonaws.services` seperti yang ditunjukkan pada baris pertama. | Semua ArtifactID disertakan dalam tag seperti yang ditunjukkan pada baris pertama. | Semua ArtifactID disertakan dalam tag seperti yang ditunjukkan pada baris pertama. | Semua nama paket dimulai dengan `software.amazon.awssdk` seperti yang ditunjukkan pada baris pertama. |
| API Gateway | com.amazonaws.services.apigateway | <artifactId>aws-java-sdk- api-gateway</artifactId> | <artifactId>apigateway</artifactId> | software.amazon.awssdk.services.apigateway |
| Registri Aplikasi | appregistry | appregistry | servicecatalogappregistry | servicecatalogappregistry |
| Penemuan Aplikasi | aplikasipenemuan | penemuan | aplikasipenemuan | aplikasipenemuan |
| Runtime AI yang Augmented | augmentedairuntime | augmentedairuntime | sagemakera2iruntime | sagemakera2iruntime |
| Certificate Manager | Certificatemanager | acm | acm | acm |
| CloudControl API | cloudcontrolapi | cloudcontrolapi | cloudcontrol | cloudcontrol |

| Nama layanan | nama paket v1 | v1 Artifactid | v2 Artifactid | v2 nama paket |
|---|---|---|---|---|
| CloudSearch | cloudsearchv2 | cloudsearch | cloudsearch | cloudsearch |
| CloudSearch Domain | cloudsear chdomain | cloudsearch | cloudsear chdomain | cloudsear chdomain |
| CloudWatch Acara | cloudwatc hevents | acara | cloudwatc hevents | cloudwatc hevents |
| CloudWatch Terbukti | cloudwatc hevident | cloudwatc hevident | ternyata | ternyata |
| CloudWatch Log | log | log | cloudwatchlogs | cloudwatchlogs |
| CloudWatch Metrik | metrik | cloudwatc hmetrics | cloudwatch | cloudwatch |
| CloudWatch Rum | cloudwatchrum | cloudwatchrum | rum | rum |
| Penyedia Identitas Cognito | cognitoidp | cognitoidp | penyedia cognitoid entityprovider | penyedia cognitoid entityprovider |
| Kampanye Connect | connectca mpaign | connectca mpaign | connectca mpaign | connectca mpaign |
| Connect Wisdom | connectwisdom | connectwisdom | kebijaksanaan | kebijaksanaan |
| Database Migration Service | databasem igrationservice | dms | migrasi basis data | migrasi basis data |
| DataZone | datazone | datazonee ksternal | datazone | datazone |
| DynamoDB | dynamodbv2 | dynamodb | dynamodb | dynamodb |

| Nama layanan | nama paket v1 | v1 Artifactid | v2 Artifactid | v2 nama paket |
|---|---|---|---|---|
| Sistem File Elastis | sistem file elastis | efs | efs | efs |
| Kurangi Peta Elastis | elasticma preduce | emr | emr | emr |
| Glue DataBrew | gluedatabrew | gluedatabrew | databrew | databrew |
| IAM Roles Anywhere | iamrolesdi mana saja | iamrolesdi mana saja | peranandi mana saja | peranandi mana saja |
| Manajemen Identitas | manajemen identitas | iam | iam | iam |
| Data IoT | iotdata | iot | iotdataplane | iotdataplane |
| Analisis Kinesis | kinesisanalitik | kinesis | kinesisanalitik | kinesisanalitik |
| Kinesis Firehose | kinesisfirehose | kinesis | firehose | firehose |
| Saluran Sinyal Video Kinesis | kinesisvi deosignal ingchannels | kinesisvi deosignal ingchannels | kinesisvi deosignaling | kinesisvi deosignaling |
| Lex | lexruntime | lex | lexruntime | lexruntime |
| Lookout Untuk Visi | lookoutforvision | lookoutforvision | lookoutvision | lookoutvision |
| Modernisasi Mainframe | mainframe modernisasi | mainframe modernisasi | m2 | m2 |
| Pengukuran Marketplace | pemeteran pasar | layanan marketpla cemeterin gservice | pemeteran pasar | pemeteran pasar |

| Nama layanan | nama paket v1 | v1 Artifactid | v2 Artifactid | v2 nama paket |
|---|---|---|---|---|
| Grafana yang Dikelola | managedgrafana | managedgrafana | grafana | grafana |
| Mechanical Turk | mturk | mechanica lturkrequester | mturk | mturk |
| Rekomendasi Strategi Migrasi Hub | Migration hubstrate gyrecomme ndations | Migration hubstrate gyrecomme ndations | Migration hubstrategy | Migration hubstrategy |
| Nimble Studio | lincah studio | lincah studio | gesit | gesit |
| 5G pribadi | private5g | private5g | privatenetworks | privatenetworks |
| Prometheus | prometheus | prometheus | amp | amp |
| Tempat Sampah Daur Ulang | Recyclebin | Recyclebin | rbin | rbin |
| API Data Pergeseran Merah | redshiftdataapi | redshiftdataapi | data pergeseran merah | data pergeseran merah |
| Route 53 | route53domain | route53 | route53domain | route53domain |
| Manajer Tepi Pembuat Sage | sagemaker edgemanager | sagemaker edgemanager | sagemakeredge | sagemakeredge |
| Token Keamanan | securitytoken | sts | sts | sts |
| Migrasi Server | migrasi server | migrasi server | sms | sms |
| Email Sederhana | email sederhana | ses | ses | ses |
| Email Sederhana V2 | simpleemailv2 | sesv2 | sesv2 | sesv2 |

| Nama layanan | nama paket v1 | v1 Artifactid | v2 Artifactid | v2 nama paket |
|---|---|---|---|---|
| Manajemen Sistem Sederhana | manajemen sistem sederhana | ssm | ssm | ssm |
| Alur Kerja Sederhana | alur kerja sederhana | alur kerja sederhana | swf | swf |
| Step Functions | stepfungsi | stepfungsi | sfn | sfn |

# Apa yang berbeda antara AWS SDK untuk Java 1.x dan 2.x

Bagian ini menjelaskan perubahan utama yang harus diperhatikan saat mengonversi aplikasi dari menggunakan AWS SDK untuk Java versi 1.x ke versi 2.x.

## Perubahan nama Package

Perubahan nyata dari SDK for Java 1.x ke SDK for Java 2.x adalah perubahan nama paket. Nama Package dimulai dengan `software.amazon.awssdk` SDK 2.x, sedangkan SDK 1.x menggunakan. `com.amazonaws`

Nama yang sama ini membedakan artefak Maven dari SDK 1.x ke SDK 2.x. Artefak Maven untuk SDK 2.x menggunakan `software.amazon.awssdk` GroupId, sedangkan SDK 1.x menggunakan GroupId. `com.amazonaws`

Ada beberapa kali ketika kode Anda memerlukan `com.amazonaws` ketergantungan untuk proyek yang sebaliknya hanya menggunakan artefak SDK 2.x. Salah satu contohnya adalah ketika Anda bekerja dengan sisi server AWS Lambda. Ini ditunjukkan di bagian Siapkan proyek Apache Maven sebelumnya dalam panduan ini.

> **Note**
>
> Beberapa nama paket di SDK 1.x berisi. `v2` Penggunaan `v2` dalam kasus ini biasanya berarti bahwa kode dalam paket ditargetkan untuk bekerja dengan versi 2 dari layanan.
> Karena nama paket lengkap dimulai dengan`com.amazonaws`, ini adalah komponen SDK 1.x.
> Contoh nama paket ini di SDK 1.x adalah:
>
> - `com.amazonaws.services.dynamodbv2`

- `com.amazonaws.retry.v2`
- `com.amazonaws.services.apigatewayv2`
- `com.amazonaws.services.simpleemailv2`

## Menambahkan versi 2.x ke proyek Anda

Maven adalah cara yang disarankan untuk mengelola dependensi saat menggunakan 2.x. AWS SDK untuk Java Untuk menambahkan komponen versi 2.x ke project Anda, perbarui `pom.xml` file Anda dengan ketergantungan pada SDK.

Example

```
<dependencyManagement>
    <dependencies>
        <dependency>
          <groupId>software.amazon.awssdk</groupId>
          <artifactId>bom</artifactId>
          <version>2.27.21</version>
          <type>pom</type>
          <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb</artifactId>
    </dependency>
</dependencies>
```

Anda juga dapat menggunakan versi 1.x dan 2.x side-by-side saat memigrasikan proyek ke versi 2.x.

## Tidak berubah POJOs

Klien dan permintaan operasi dan objek respons sekarang tidak dapat diubah dan tidak dapat diubah setelah pembuatan. Untuk menggunakan kembali variabel permintaan atau respons, Anda harus membangun objek baru untuk menetapkan objek tersebut.

Example memperbarui objek permintaan di 1.x

```
DescribeAlarmsRequest request = new DescribeAlarmsRequest();
DescribeAlarmsResult response = cw.describeAlarms(request);

request.setNextToken(response.getNextToken());
```

Example memperbarui objek permintaan di 2.x

```
DescribeAlarmsRequest request = DescribeAlarmsRequest.builder().build();
DescribeAlarmsResponse response = cw.describeAlarms(request);

request = DescribeAlarmsRequest.builder()
        .nextToken(response.nextToken())
        .build();
```

## Metode setter dan getter

Di AWS SDK untuk Java 2.x, nama metode penyetel tidak menyertakan awalan `set` atau`with`. Misalnya, `*.withEndpoint()` sekarang`*.endpoint()`.

Nama metode getter tidak menggunakan `get` awalan.

Example menggunakan metode setter di 1.x

```
AmazonDynamoDB client = AmazonDynamoDBClientBuilder.standard()
          .withRegion("us-east-1")
          .build();
```

Example menggunakan metode setter di 2.x

```
DynamoDbClient client = DynamoDbClient.builder()
          .region(Region.US_EAST_1)
          .build();
```

Example menggunakan metode pengambil di 1.x

```
String token = request.getNextToken();
```

Example menggunakan metode pengambil di 2.x

```
String token = request.nextToken();
```

## Nama kelas model

Nama kelas model yang mewakili respons layanan diakhiri dengan `Response` in v2 alih-alih `Result` yang digunakan v1.

Example nama kelas yang mewakili respons di v1

```
CreateApiKeyResult
AllocateAddressResult
```

Example nama kelas yang mewakili respons di v2

```
CreateApiKeyResponse
AllocateAddressResponse
```

## Status migrasi perpustakaan dan utilitas

### SDK for Java library dan utilitas

Tabel berikut mencantumkan status migrasi pustaka dan utilitas untuk SDK for Java.

| Versi 1.12.x nama | Nama versi 2.x | Sejak versi di 2.x |
|---|---|---|
| Dinamo DBMapper | DynamoDbEnhancedClient | 2.12.0 |
| Pelayan | Pelayan | 2.15.0 |
| CloudFrontUrlSigner, CloudFrontCookieSigner | CloudFrontUtilities | 2.18.33 |
| TransferManager | S3 TransferManager | 2.19.0 |
| Klien Metadata EC2 | Klien Metadata EC2 | 2.19.29 |
| Pengurai URI S3 | Pengurai URI S3 | 2.20.41 |

| Versi 1.12.x nama | Nama versi 2.x | Sejak versi di 2.x |
|---|---|---|
| Pembangun Kebijakan IAM | Pembangun Kebijakan IAM | 2.20.126 |
| Notifikasi Peristiwa S3 | Pemberitahuan Acara S3 | 2.25.11 |
| Buffering sisi klien Amazon SQS | API Batching Permintaan Otomatis untuk Amazon SQS | 2.28.0 |
| Pendengar Kemajuan | Pendengar Kemajuan | belum dirilis |

## Perpustakaan terkait

Tabel berikut mencantumkan pustaka yang dirilis secara terpisah tetapi bekerja dengan SDK for Java 2.x.

| Nama yang digunakan dengan versi 2.x dari SDK for Java | Sejak versi |
|---|---|
| Klien Enkripsi Amazon S3 | 3.0.0 [1] |
| AWS SDK Enkripsi Database untuk DynamoDB | 3.0.0 [2] |

[1] Klien Enkripsi Amazon S3

Klien enkripsi untuk Amazon S3 tersedia dengan menggunakan ketergantungan Maven berikut.

```
<dependency>
    <groupId>software.amazon.encryption.s3</groupId>
    <artifactId>amazon-s3-encryption-client-java</artifactId>
    <version>3.x</version>
</dependency>
```

[2] SDK Enkripsi AWS Database untuk DynamoDB

SDK Enkripsi AWS Database untuk DynamoDB tersedia untuk V2 dengan menggunakan dependensi Maven berikut.

```
<dependency>
```

```
    <groupId>software.amazon.cryptography</groupId>
    <artifactId>aws-database-encryption-sdk-dynamodb</artifactId>
    <version>3.x</version>
</dependency>
```

Informasi tentang pustaka enkripsi untuk DynamoDB yang bekerja dengan v1 dari Java SDK tersedia di AWS Panduan Pengembang SDK Enkripsi Database (bernama Amazon DynamoDB Encryption Client for Java) dan di. GitHub

Untuk informasi selengkapnya tentang pustaka enkripsi DynamoDB yang kompatibel dengan V2 dari Java SDK, lihat Panduan Pengembang SDK Enkripsi Database dan AWS sumbernya. GitHub

Informasi migrasi tentang pustaka enkripsi tersedia di Panduan Pengembang SDK Enkripsi AWS Database.

### Detail migrasi untuk perpustakaan dan utilitas

- Manajer Transfer
- Utilitas metadata EC2
- CloudFrontprepenandatanganan
- Penguraian URI S3
- DynamoDB mapping/document APIs
- Pembangun Kebijakan IAM
- Pemberitahuan Acara S3
- Penerbitan metrik SDK (dokumentasi 1.x, dokumentasi 2.x)

## Perubahan klien

### Pembangun klien

Anda harus membuat semua klien menggunakan metode pembangun klien. Konstruktor tidak lagi tersedia.

Example membuat klien di versi 1.x

```
AmazonDynamoDB ddbClient = AmazonDynamoDBClientBuilder.defaultClient();
```

```
AmazonDynamoDBClient ddbClient = new AmazonDynamoDBClient();
```

Example membuat klien di versi 2.x

```
DynamoDbClient ddbClient = DynamoDbClient.create();
DynamoDbClient ddbClient = DynamoDbClient.builder().build();
```

## Nama kelas klien

Semua nama kelas klien sekarang sepenuhnya berselubung unta dan tidak lagi diawali oleh. Amazon Perubahan ini selaras dengan nama yang digunakan dalam. AWS CLI

Example nama kelas di 1.x

```
AmazonDynamoDB
AWSACMPCAAsyncClient
```

Example nama kelas di 2.x

```
DynamoDbClient
AcmAsyncClient
```

Perubahan nama kelas klien

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.acmpca.AWSACMPCAAsyncClient | software.amazon.awssdk.services.acm.AcmAsyncClient |
| com.amazonaws.services.acmpca.AWSACMPCAClient | software.amazon.awssdk.services.acm.AcmClient |
| com.amazonaws.services.alexaforbusiness.AmazonAlexaForBusinessAsyncClient | software.amazon.awssdk.services.alexaforbusiness.AlexaForBusinessAsyncClient |
| com.amazonaws.services.alexaforbusiness.AmazonAlexaForBusinessClient | software.amazon.awssdk.services.alexaforbusiness.AlexaForBusinessClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.apigateway.AmazonApiGatewayAsyncClient | software.amazon.awssdk.services.apigateway.ApiGatewayAsyncClient |
| com.amazonaws.services.apigateway.AmazonApiGatewayClient | software.amazon.awssdk.services.apigateway.ApiGatewayClient |
| com.amazonaws.services.applicationautoscaling.AWSApplicationAutoScalingAsyncClient | software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingAsyncClient |
| com.amazonaws.services.applicationautoscaling.AWSApplicationAutoScalingClient | software.amazon.awssdk.services.applicationautoscaling.ApplicationAutoScalingClient |
| com.amazonaws.services.applicationdiscovery.AWSApplicationDiscoveryAsyncClient | software.amazon.awssdk.services.applicationdiscovery.ApplicationDiscoveryAsyncClient |
| com.amazonaws.services.applicationdiscovery.AWSApplicationDiscoveryClient | software.amazon.awssdk.services.applicationdiscovery.ApplicationDiscoveryClient |
| com.amazonaws.services.appstream.AmazonAppStreamAsyncClient | software.amazon.awssdk.services.appstream.AppStreamAsyncClient |
| com.amazonaws.services.appstream.AmazonAppStreamClient | software.amazon.awssdk.services.appstream.AppStreamClient |
| com.amazonaws.services.appsync.AWSAppSyncAsyncClient | software.amazon.awssdk.services.appsync.AppSyncAsyncClient |
| com.amazonaws.services.appsync.AWSAppSyncClient | software.amazon.awssdk.services.appsync.AppSyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.athena.AmazonAthenaAsyncClient | software.amazon.awssdk.services.athena.AthenaAsyncClient |
| com.amazonaws.services.athena.AmazonAthenaClient | software.amazon.awssdk.services.athena.AthenaClient |
| com.amazonaws.services.autoscaling.AmazonAutoScalingAsyncClient | software.amazon.awssdk.services.autoscaling.AutoScalingAsyncClient |
| com.amazonaws.services.autoscaling.AmazonAutoScalingClient | software.amazon.awssdk.services.autoscaling.AutoScalingClient |
| com.amazonaws.services.autoscalingplans.AWSAutoScalingPlansAsyncClient | software.amazon.awssdk.services.autoscalingplans.AutoScalingPlansAsyncClient |
| com.amazonaws.services.autoscalingplans.AWSAutoScalingPlansClient | software.amazon.awssdk.services.autoscalingplans.AutoScalingPlansClient |
| com.amazonaws.services.batch.AWSBatchAsyncClient | software.amazon.awssdk.services.batch.BatchAsyncClient |
| com.amazonaws.services.batch.AWSBatchClient | software.amazon.awssdk.services.batch.BatchClient |
| com.amazonaws.services.budgets.AWSBudgetsAsyncClient | software.amazon.awssdk.services.budgets.BudgetsAsyncClient |
| com.amazonaws.services.budgets.AWSBudgetsClient | software.amazon.awssdk.services.budgets.BudgetsClient |
| com.amazonaws.services.certificatemanager.AWSCertificateManagerAsyncClient | software.amazon.awssdk.services.acm.AcmAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.certificatemanager.AWSCertificateManagerClient | software.amazon.awssdk.services.acm.AcmClient |
| com.amazonaws.services.cloud9.AWSCloud9AsyncClient | software.amazon.awssdk.services.cloud9.Cloud9AsyncClient |
| com.amazonaws.services.cloud9.AWSCloud9Client | software.amazon.awssdk.services.cloud9.Cloud9Client |
| com.amazonaws.services.clouddirectory.AmazonCloudDirectoryAsyncClient | software.amazon.awssdk.services.clouddirectory.CloudDirectoryAsyncClient |
| com.amazonaws.services.clouddirectory.AmazonCloudDirectoryClient | software.amazon.awssdk.services.clouddirectory.CloudDirectoryClient |
| com.amazonaws.services.cloudformation.AmazonCloudFormationAsyncClient | software.amazon.awssdk.services.cloudformation.CloudFormationAsyncClient |
| com.amazonaws.services.cloudformation.AmazonCloudFormationClient | software.amazon.awssdk.services.cloudformation.CloudFormationClient |
| com.amazonaws.services.cloudfront.AmazonCloudFrontAsyncClient | software.amazon.awssdk.services.cloudfront.CloudFrontAsyncClient |
| com.amazonaws.services.cloudfront.AmazonCloudFrontClient | software.amazon.awssdk.services.cloudfront.CloudFrontClient |
| com.amazonaws.services.cloudhsm.AWSCloudHSMAsyncClient | software.amazon.awssdk.services.cloudhsm.CloudHsmAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.cloudhsm.AWSCloudHSMClient | software.amazon.awssdk.services.cloudhsm.CloudHsmClient |
| com.amazonaws.services.cloudhsmv2.AWSCloudHSMV2AsyncClient | software.amazon.awssdk.services.cloudhsmv2.CloudHsmV2AsyncClient |
| com.amazonaws.services.cloudhsmv2.AWSCloudHSMV2Client | software.amazon.awssdk.services.cloudhsmv2.CloudHsmV2Client |
| com.amazonaws.services.cloudsearchdomain.AmazonCloudSearchDomainAsyncClient | software.amazon.awssdk.services.cloudsearchdomain.CloudSearchDomainAsyncClient |
| com.amazonaws.services.cloudsearchdomain.AmazonCloudSearchDomainClient | software.amazon.awssdk.services.cloudsearchdomain.CloudSearchDomainClient |
| com.amazonaws.services.cloudsearchv2.AmazonCloudSearchAsyncClient | software.amazon.awssdk.services.cloudsearch.CloudSearchAsyncClient |
| com.amazonaws.services.cloudsearchv2.AmazonCloudSearchClient | software.amazon.awssdk.services.cloudsearch.CloudSearchClient |
| com.amazonaws.services.cloudtrail.AWSCloudTrailAsyncClient | software.amazon.awssdk.services.cloudtrail.CloudTrailAsyncClient |
| com.amazonaws.services.cloudtrail.AWSCloudTrailClient | software.amazon.awssdk.services.cloudtrail.CloudTrailClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.cloudwatch.AmazonCloudWatchAsyncClient | software.amazon.awssdk.services.cloudwatch.CloudWatchAsyncClient |
| com.amazonaws.services.cloudwatch.AmazonCloudWatchClient | software.amazon.awssdk.services.cloudwatch.CloudWatchClient |
| com.amazonaws.services.cloudwatchevents.AmazonCloudWatchEventsAsyncClient | software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsAsyncClient |
| com.amazonaws.services.cloudwatchevents.AmazonCloudWatchEventsClient | software.amazon.awssdk.services.cloudwatchevents.CloudWatchEventsClient |
| com.amazonaws.services.codebuild.AWSCodeBuildAsyncClient | software.amazon.awssdk.services.codebuild.CodeBuildAsyncClient |
| com.amazonaws.services.codebuild.AWSCodeBuildClient | software.amazon.awssdk.services.codebuild.CodeBuildClient |
| com.amazonaws.services.codecommit.AWSCodeCommitAsyncClient | software.amazon.awssdk.services.codecommit.CodeCommitAsyncClient |
| com.amazonaws.services.codecommit.AWSCodeCommitClient | software.amazon.awssdk.services.codecommit.CodeCommitClient |
| com.amazonaws.services.codedeploy.AmazonCodeDeployAsyncClient | software.amazon.awssdk.services.codedeploy.CodeDeployAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.codedeploy.AmazonCodeDeployClient | software.amazon.awssdk.services.codedeploy.CodeDeployClient |
| com.amazonaws.services.codepipeline.AWSCodePipelineAsyncClient | software.amazon.awssdk.services.codepipeline.CodePipelineAsyncClient |
| com.amazonaws.services.codepipeline.AWSCodePipelineClient | software.amazon.awssdk.services.codepipeline.CodePipelineClient |
| com.amazonaws.services.codestar.AWSCodeStarAsyncClient | software.amazon.awssdk.services.codestar.CodeStarAsyncClient |
| com.amazonaws.services.codestar.AWSCodeStarClient | software.amazon.awssdk.services.codestar.CodeStarClient |
| com.amazonaws.services.cognitoidentity.AmazonCognitoIdentityAsyncClient | software.amazon.awssdk.services.cognitoidentity.CognitoIdentityAsyncClient |
| com.amazonaws.services.cognitoidentity.AmazonCognitoIdentityClient | software.amazon.awssdk.services.cognitoidentity.CognitoIdentityClient |
| com.amazonaws.services.cognitoidp.AWSCognitoIdentityProviderAsyncClient | software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderAsyncClient |
| com.amazonaws.services.cognitoidp.AWSCognitoIdentityProviderClient | software.amazon.awssdk.services.cognitoidentityprovider.CognitoIdentityProviderClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.cognitosync.AmazonCognitoSyncAsyncClient | software.amazon.awssdk.services.cognitosync.CognitoSyncAsyncClient |
| com.amazonaws.services.cognitosync.AmazonCognitoSyncClient | software.amazon.awssdk.services.cognitosync.CognitoSyncClient |
| com.amazonaws.services.comprehend.AmazonComprehendAsyncClient | software.amazon.awssdk.services.comprehend.ComprehendAsyncClient |
| com.amazonaws.services.comprehend.AmazonComprehendClient | software.amazon.awssdk.services.comprehend.ComprehendClient |
| com.amazonaws.services.config.AmazonConfigAsyncClient | software.amazon.awssdk.services.config.ConfigAsyncClient |
| com.amazonaws.services.config.AmazonConfigClient | software.amazon.awssdk.services.config.ConfigClient |
| com.amazonaws.services.connect.AmazonConnectAsyncClient | software.amazon.awssdk.services.connect.ConnectAsyncClient |
| com.amazonaws.services.connect.AmazonConnectClient | software.amazon.awssdk.services.connect.ConnectClient |
| com.amazonaws.services.costandusagereport.AWSCostAndUsageReportAsyncClient | software.amazon.awssdk.services.costandusagereport.CostAndUsageReportAsyncClient |
| com.amazonaws.services.costandusagereport.AWSCostAndUsageReportClient | software.amazon.awssdk.services.costandusagereport.CostAndUsageReportClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.costexplorer.AWSCostExplorerAsyncClient | software.amazon.awssdk.services.costexplorer.CostExplorerAsyncClient |
| com.amazonaws.services.costexplorer.AWSCostExplorerClient | software.amazon.awssdk.services.costexplorer.CostExplorerClient |
| com.amazonaws.services.databasemigrationservice.AWSDatabaseMigrationServiceAsyncClient | software.amazon.awssdk.services.databasemigration.DatabaseMigrationAsyncClient |
| com.amazonaws.services.databasemigrationservice.AWSDatabaseMigrationServiceClient | software.amazon.awssdk.services.databasemigration.DatabaseMigrationClient |
| com.amazonaws.services.datapipeline.DataPipelineAsyncClient | software.amazon.awssdk.services.datapipeline.DataPipelineAsyncClient |
| com.amazonaws.services.datapipeline.DataPipelineClient | software.amazon.awssdk.services.datapipeline.DataPipelineAsyncClient |
| com.amazonaws.services.dax.AmazonDaxAsyncClient | software.amazon.awssdk.services.dax.DaxAsyncClient |
| com.amazonaws.services.dax.AmazonDaxClient | software.amazon.awssdk.services.dax.DaxClient |
| com.amazonaws.services.devicefarm.AWSDeviceFarmAsyncClient | software.amazon.awssdk.services.devicefarm.DeviceFarmAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.devicefarm.AWSDeviceFarmClient | software.amazon.awssdk.services.devicefarm.DeviceFarmClient |
| com.amazonaws.services.directconnect.AmazonDirectConnectAsyncClient | software.amazon.awssdk.services.directconnect.DirectConnectAsyncClient |
| com.amazonaws.services.directconnect.AmazonDirectConnectClient | software.amazon.awssdk.services.directconnect.DirectConnectClient |
| com.amazonaws.services.directory.AWSDirectoryServiceAsyncClient | software.amazon.awssdk.services.directory.DirectoryAsyncClient |
| com.amazonaws.services.directory.AWSDirectoryServiceClient | software.amazon.awssdk.services.directory.DirectoryClient |
| com.amazonaws.services.dlm.AmazonDLMAsyncClient | software.amazon.awssdk.services.dlm.DlmAsyncClient |
| com.amazonaws.services.dlm.AmazonDLMClient | software.amazon.awssdk.services.dlm.DlmClient |
| com.amazonaws.services.dynamodbv2.AmazonDynamoDBAsyncClient | software.amazon.awssdk.services.dynamodb.DynamoDbAsyncClient |
| com.amazonaws.services.dynamodbv2.AmazonDynamoDBClient | software.amazon.awssdk.services.dynamodb.DynamoDbClient |
| com.amazonaws.services.dynamodbv2.AmazonDynamoDBStreamsAsyncClient | software.amazon.awssdk.services.dynamodb.streams.DynamoDbStreamsAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.dynamodbv2.AmazonDynamoDBStreamsClient | software.amazon.awssdk.services.dynamodb.streams.DynamoDbStreamsClient |
| com.amazonaws.services.ec2.AmazonEC2AsyncClient | software.amazon.awssdk.services.ec2.Ec2AsyncClient |
| com.amazonaws.services.ec2.AmazonEC2Client | software.amazon.awssdk.services.ec2.Ec2Client |
| com.amazonaws.services.ecr.AmazonECRAsyncClient | software.amazon.awssdk.services.ecr.EcrAsyncClient |
| com.amazonaws.services.ecr.AmazonECRClient | software.amazon.awssdk.services.ecr.EcrClient |
| com.amazonaws.services.ecs.AmazonECSAsyncClient | software.amazon.awssdk.services.ecs.EcsAsyncClient |
| com.amazonaws.services.ecs.AmazonECSClient | software.amazon.awssdk.services.ecs.EcsClient |
| com.amazonaws.services.eks.AmazonEKSAsyncClient | software.amazon.awssdk.services.eks.EksAsyncClient |
| com.amazonaws.services.eks.AmazonEKSClient | software.amazon.awssdk.services.eks.EksClient |
| com.amazonaws.services.elasticache.AmazonElastiCacheAsyncClient | software.amazon.awssdk.services.elasticache.ElastiCacheAsyncClient |
| com.amazonaws.services.elasticache.AmazonElastiCacheClient | software.amazon.awssdk.services.elasticache.ElastiCacheClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.elasticbeanstalk.AWSElasticBeanstalkAsyncClient | software.amazon.awssdk.services.elasticbeanstalk.ElasticBeanstalkAsyncClient |
| com.amazonaws.services.elasticbeanstalk.AWSElasticBeanstalkClient | software.amazon.awssdk.services.elasticbeanstalk.ElasticBeanstalkClient |
| com.amazonaws.services.elasticfilesystem.AmazonElasticFileSystemAsyncClient | software.amazon.awssdk.services.efs.EfsAsyncClient |
| com.amazonaws.services.elasticfilesystem.AmazonElasticFileSystemClient | software.amazon.awssdk.services.efs.EfsClient |
| com.amazonaws.services.elasticloadbalancing.AmazonElasticLoadBalancingAsyncClient | software.amazon.awssdk.services.elasticloadbalancing.ElasticLoadBalancingAsyncClient |
| com.amazonaws.services.elasticloadbalancing.AmazonElasticLoadBalancingClient | software.amazon.awssdk.services.elasticloadbalancing.ElasticLoadBalancingClient |
| com.amazonaws.services.elasticloadbalancingv2.AmazonElasticLoadBalancingAsyncClient | software.amazon.awssdk.services.elasticloadbalancingv2.ElasticLoadBalancingV2AsyncClient |
| com.amazonaws.services.elasticloadbalancingv2.AmazonElasticLoadBalancingClient | software.amazon.awssdk.services.elasticloadbalancingv2.ElasticLoadBalancingV2Client |
| com.amazonaws.services.elasticmapreduce.AmazonElasticMapReduceAsyncClient | software.amazon.awssdk.services.emr.EmrAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.elasticmapreduce.AmazonElasticMapReduceClient | software.amazon.awssdk.services.emr.EmrClient |
| com.amazonaws.services.elasticsearch.AWSElasticsearchAsyncClient | software.amazon.awssdk.services.elasticsearch.ElasticsearchAsyncClient |
| com.amazonaws.services.elasticsearch.AWSElasticsearchClient | software.amazon.awssdk.services.elasticsearch.ElasticsearchClient |
| com.amazonaws.services.elastictranscoder.AmazonElasticTranscoderAsyncClient | software.amazon.awssdk.services.elastictranscoder.ElasticTranscoderAsyncClient |
| com.amazonaws.services.elastictranscoder.AmazonElasticTranscoderClient | software.amazon.awssdk.services.elastictranscoder.ElasticTranscoderClient |
| com.amazonaws.services.fms.AWSFMSAsyncClient | software.amazon.awssdk.services.fms.FmsAsyncClient |
| com.amazonaws.services.fms.AWSFMSClient | software.amazon.awssdk.services.fms.FmsClient |
| com.amazonaws.services.gamelift.AmazonGameLiftAsyncClient | software.amazon.awssdk.services.gamelift.GameLiftAsyncClient |
| com.amazonaws.services.gamelift.AmazonGameLiftClient | software.amazon.awssdk.services.gamelift.GameLiftClient |
| com.amazonaws.services.glacier.AmazonGlacierAsyncClient | software.amazon.awssdk.services.glacier.GlacierAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.glacier.AmazonGlacierClient | software.amazon.awssdk.services.glacier.GlacierClient |
| com.amazonaws.services.glue.AWSGlueAsyncClient | software.amazon.awssdk.services.glue.GlueAsyncClient |
| com.amazonaws.services.glue.AWSGlueClient | software.amazon.awssdk.services.glue.GlueClient |
| com.amazonaws.services.greengrass.AWSGreengrassAsyncClient | software.amazon.awssdk.services.greengrass.GreengrassAsyncClient |
| com.amazonaws.services.greengrass.AWSGreengrassClient | software.amazon.awssdk.services.greengrass.GreengrassClient |
| com.amazonaws.services.guardduty.AmazonGuardDutyAsyncClient | software.amazon.awssdk.services.guardduty.GuardDutyAsyncClient |
| com.amazonaws.services.guardduty.AmazonGuardDutyClient | software.amazon.awssdk.services.guardduty.GuardDutyClient |
| com.amazonaws.services.health.AWSHealthAsyncClient | software.amazon.awssdk.services.health.HealthAsyncClient |
| com.amazonaws.services.health.AWSHealthClient | software.amazon.awssdk.services.health.HealthClient |
| com.amazonaws.services.identitymanagement.AmazonIdentityManagementAsyncClient | software.amazon.awssdk.services.iam.IamAsyncClient |
| com.amazonaws.services.identitymanagement.AmazonIdentityManagementClient | software.amazon.awssdk.services.iam.IamClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.importexport.AmazonImportExportAsyncClient | *Deprecated* |
| com.amazonaws.services.importexport.AmazonImportExportClient | *Deprecated* |
| com.amazonaws.services.inspector.AmazonInspectorAsyncClient | software.amazon.awssdk.services.inspector.InspectorAsyncClient |
| com.amazonaws.services.inspector.AmazonInspectorClient | software.amazon.awssdk.services.inspector.InspectorClient |
| com.amazonaws.services.iot.AWSIotAsyncClient | software.amazon.awssdk.services.iot.IotAsyncClient |
| com.amazonaws.services.iot.AWSIotClient | software.amazon.awssdk.services.iot.IotClient |
| com.amazonaws.services.iot1clickdevices.AWSIoT1ClickDevicesAsyncClient | software.amazon.awssdk.services.iot1clickdevices.Iot1ClickDevicesAsyncClient |
| com.amazonaws.services.iot1clickdevices.AWSIoT1ClickDevicesClient | software.amazon.awssdk.services.iot1clickdevices.Iot1ClickDevicesClient |
| com.amazonaws.services.iot1clickprojects.AWSIoT1ClickProjectsAsyncClient | software.amazon.awssdk.services.iot1clickprojects.Iot1ClickProjectsAsyncClient |
| com.amazonaws.services.iot1clickprojects.AWSIoT1ClickProjectsClient | software.amazon.awssdk.services.iot1clickprojects.Iot1ClickProjectsClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.iotanalytics.AWSIoTAnalyticsAsyncClient | software.amazon.awssdk.services.iotanalytics.IotAnalyticsAsyncClient |
| com.amazonaws.services.iotanalytics.AWSIoTAnalyticsClient | software.amazon.awssdk.services.iotanalytics.IotAnalyticsClient |
| com.amazonaws.services.iotdata.AWSIotDataAsyncClient | software.amazon.awssdk.services.iotdata.IotDataAsyncClient |
| com.amazonaws.services.iotdata.AWSIotDataClient | software.amazon.awssdk.services.iotdata.IotDataClient |
| com.amazonaws.services.iotjobsdataplane.AWSIoTJobsDataPlaneAsyncClient | software.amazon.awssdk.services.iotdataplane.IotDataPlaneAsyncClient |
| com.amazonaws.services.iotjobsdataplane.AWSIoTJobsDataPlaneClient | software.amazon.awssdk.services.iotdataplane.IotDataPlaneClient |
| com.amazonaws.services.kinesis.AmazonKinesisAsyncClient | software.amazon.awssdk.services.kinesis.KinesisAsyncClient |
| com.amazonaws.services.kinesis.AmazonKinesisClient | software.amazon.awssdk.services.kinesis.KinesisClient |
| com.amazonaws.services.kinesisanalytics.AmazonKinesisAnalyticsAsyncClient | software.amazon.awssdk.services.kinesisanalytics.KinesisAnalyticsAsyncClient |
| com.amazonaws.services.kinesisanalytics.AmazonKinesisAnalyticsClient | software.amazon.awssdk.services.kinesisanalytics.KinesisAnalyticsClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.kinesisfirehose.AmazonKinesisFirehoseAsyncClient | software.amazon.awssdk.services.firehose.FirehoseAsyncClient |
| com.amazonaws.services.kinesisfirehose.AmazonKinesisFirehoseClient | software.amazon.awssdk.services.firehose.FirehoseClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoArchivedMediaAsyncClient | software.amazon.awssdk.services.kinesisvideoarchivedmedia.KinesisVideoArchivedMediaAsyncClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoArchivedMediaClient | software.amazon.awssdk.services.kinesisvideoarchivedmedia.KinesisVideoArchivedMediaClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoAsyncClient | software.amazon.awssdk.services.kinesisvideo.KinesisVideoAsyncClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoClient | software.amazon.awssdk.services.kinesisvideo.KinesisVideoClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoMediaAsyncClient | software.amazon.awssdk.services.kinesisvideomedia.KinesisVideoMediaAsyncClient |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoMediaClient | software.amazon.awssdk.services.kinesisvideomedia.KinesisVideoMediaClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.kinesisvideo.AmazonKinesisVideoPutMediaClient | Tidak Didukung |
| com.amazonaws.services.kms.AWSKMSAsyncClient | software.amazon.awssdk.services.kms.KmsAsyncClient |
| com.amazonaws.services.kms.AWSKMSClient | software.amazon.awssdk.services.kms.KmsClient |
| com.amazonaws.services.lambda.AWSLambdaAsyncClient | software.amazon.awssdk.services.lambda.LambdaAsyncClient |
| com.amazonaws.services.lambda.AWSLambdaClient | software.amazon.awssdk.services.lambda.LambdaClient |
| com.amazonaws.services.lexmodelbuilding.AmazonLexModelBuildingAsyncClient | software.amazon.awssdk.services.lexmodelbuilding.LexModelBuildingAsyncClient |
| com.amazonaws.services.lexmodelbuilding.AmazonLexModelBuildingClient | software.amazon.awssdk.services.lexmodelbuilding.LexModelBuildingClient |
| com.amazonaws.services.lexruntime.AmazonLexRuntimeAsyncClient | software.amazon.awssdk.services.lexruntime.LexRuntimeAsyncClient |
| com.amazonaws.services.lexruntime.AmazonLexRuntimeClient | software.amazon.awssdk.services.lexruntime.LexRuntimeClient |
| com.amazonaws.services.lightsail.AmazonLightsailAsyncClient | software.amazon.awssdk.services.lightsail.LightsailAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.lightsail.AmazonLightsailClient | software.amazon.awssdk.services.lightsail.LightsailClient |
| com.amazonaws.services.logs.AWSLogsAsyncClient | software.amazon.awssdk.services.logs.LogsAsyncClient |
| com.amazonaws.services.logs.AWSLogsClient | software.amazon.awssdk.services.logs.LogsClient |
| com.amazonaws.services.machinelearning.AmazonMachineLearningAsyncClient | software.amazon.awssdk.services.machinelearning.MachineLearningAsyncClient |
| com.amazonaws.services.machinelearning.AmazonMachineLearningClient | software.amazon.awssdk.services.machinelearning.MachineLearningClient |
| com.amazonaws.services.macie.AmazonMacieAsyncClient | software.amazon.awssdk.services.macie.MacieAsyncClient |
| com.amazonaws.services.macie.AmazonMacieClient | software.amazon.awssdk.services.macie.MacieClient |
| com.amazonaws.services.marketplacecommerceanalytics.AWSMarketplaceCommerceAnalyticsAsyncClient | software.amazon.awssdk.services.marketplacecommerceanalytics.MarketplaceCommerceAnalyticsAsyncClient |
| com.amazonaws.services.marketplacecommerceanalytics.AWSMarketplaceCommerceAnalyticsClient | software.amazon.awssdk.services.marketplacecommerceanalytics.MarketplaceCommerceAnalyticsClient |
| com.amazonaws.services.marketplaceentitlement.AWSMarketplaceEntitlementAsyncClient | software.amazon.awssdk.services.marketplaceentitlement.MarketplaceEntitlementAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.marketplaceentitlement.AWSMarketplaceEntitlementClient | software.amazon.awssdk.services.marketplaceentitlement.MarketplaceEntitlementClient |
| com.amazonaws.services.marketplacemetering.AWSMarketplaceMeteringAsyncClient | software.amazon.awssdk.services.marketplacemetering.MarketplaceMeteringAsyncClient |
| com.amazonaws.services.marketplacemetering.AWSMarketplaceMeteringClient | software.amazon.awssdk.services.marketplacemetering.MarketplaceMeteringClient |
| com.amazonaws.services.mediaconvert.AWSMediaConvertAsyncClient | software.amazon.awssdk.services.mediaconvert.MediaConvertAsyncClient |
| com.amazonaws.services.mediaconvert.AWSMediaConvertClient | software.amazon.awssdk.services.mediaconvert.MediaConvertClient |
| com.amazonaws.services.medialive.AWSMediaLiveAsyncClient | software.amazon.awssdk.services.medialive.MediaLiveAsyncClient |
| com.amazonaws.services.medialive.AWSMediaLiveClient | software.amazon.awssdk.services.medialive.MediaLiveClient |
| com.amazonaws.services.mediapackage.AWSMediaPackageAsyncClient | software.amazon.awssdk.services.mediapackage.MediaPackageAsyncClient |
| com.amazonaws.services.mediapackage.AWSMediaPackageClient | software.amazon.awssdk.services.mediapackage.MediaPackageClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.mediastore.AWSMediaStoreAsyncClient | software.amazon.awssdk.services.mediastore.MediaStoreAsyncClient |
| com.amazonaws.services.mediastore.AWSMediaStoreClient | software.amazon.awssdk.services.mediastore.MediaStoreClient |
| com.amazonaws.services.mediastoredata.AWSMediaStoreDataAsyncClient | software.amazon.awssdk.services.mediastoredata.MediaStoreDataAsyncClient |
| com.amazonaws.services.mediastoredata.AWSMediaStoreDataClient | software.amazon.awssdk.services.mediastoredata.MediaStoreDataClient |
| com.amazonaws.services.mediatailor.AWSMediaTailorAsyncClient | software.amazon.awssdk.services.mediatailor.MediaTailorAsyncClient |
| com.amazonaws.services.mediatailor.AWSMediaTailorClient | software.amazon.awssdk.services.mediatailor.MediaTailorClient |
| com.amazonaws.services.migrationhub.AWSMigrationHubAsyncClient | software.amazon.awssdk.services.migrationhub.MigrationHubAsyncClient |
| com.amazonaws.services.migrationhub.AWSMigrationHubClient | software.amazon.awssdk.services.migrationhub.MigrationHubClient |
| com.amazonaws.services.mobile.AWSMobileAsyncClient | software.amazon.awssdk.services.mobile.MobileAsyncClient |
| com.amazonaws.services.mobile.AWSMobileClient | software.amazon.awssdk.services.mobile.MobileClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.mq.AmazonMQAsyncClient | software.amazon.awssdk.services.mq.MqAsyncClient |
| com.amazonaws.services.mq.AmazonMQClient | software.amazon.awssdk.services.mq.MqClient |
| com.amazonaws.services.mturk.AmazonMTurkAsyncClient | software.amazon.awssdk.services.mturk.MTurkAsyncClient |
| com.amazonaws.services.mturk.AmazonMTurkClient | software.amazon.awssdk.services.mturk.MTurkClient |
| com.amazonaws.services.neptune.AmazonNeptuneAsyncClient | software.amazon.awssdk.services.neptune.NeptuneAsyncClient |
| com.amazonaws.services.neptune.AmazonNeptuneClient | software.amazon.awssdk.services.neptune.NeptuneClient |
| com.amazonaws.services.opsworks.AWSOpsWorksAsyncClient | software.amazon.awssdk.services.opsworks.OpsWorksAsyncClient |
| com.amazonaws.services.opsworks.AWSOpsWorksClient | software.amazon.awssdk.services.opsworks.OpsWorksClient |
| com.amazonaws.services.opsworkscm.AWSOpsWorksCMAsyncClient | software.amazon.awssdk.services.opsworkscm.OpsWorksCmAsyncClient |
| com.amazonaws.services.opsworkscm.AWSOpsWorksCMClient | software.amazon.awssdk.services.opsworkscm.OpsWorksCmClient |
| com.amazonaws.services.organizations.AWSOrganizationsAsyncClient | software.amazon.awssdk.services.organizations.OrganizationsAsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.organizations.AWSOrganizationsClient | software.amazon.awssdk.services.organizations.OrganizationsClient |
| com.amazonaws.services.pi.AWSPIAsyncClient | software.amazon.awssdk.services.pi.PiAsyncClient |
| com.amazonaws.services.pi.AWSPIClient | software.amazon.awssdk.services.pi.PiClient |
| com.amazonaws.services.pinpoint.AmazonPinpointAsyncClient | software.amazon.awssdk.services.pinpoint.PinpointAsyncClient |
| com.amazonaws.services.pinpoint.AmazonPinpointClient | software.amazon.awssdk.services.pinpoint.PinpointClient |
| com.amazonaws.services.polly.AmazonPollyAsyncClient | software.amazon.awssdk.services.polly.PollyAsyncClient |
| com.amazonaws.services.polly.AmazonPollyClient | software.amazon.awssdk.services.polly.PollyClient |
| com.amazonaws.services.pricing.AWSPricingAsyncClient | software.amazon.awssdk.services.pricing.PricingAsyncClient |
| com.amazonaws.services.pricing.AWSPricingClient | software.amazon.awssdk.services.pricing.PricingClient |
| com.amazonaws.services.rds.AmazonRDSAsyncClient | software.amazon.awssdk.services.rds.RdsAsyncClient |
| com.amazonaws.services.rds.AmazonRDSClient | software.amazon.awssdk.services.rds.RdsClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.redshift.AmazonRedshiftAsyncClient | software.amazon.awssdk.services.redshift.RedshiftAsyncClient |
| com.amazonaws.services.redshift.AmazonRedshiftClient | software.amazon.awssdk.services.redshift.RedshiftClient |
| com.amazonaws.services.rekognition.AmazonRekognitionAsyncClient | software.amazon.awssdk.services.rekognition.RekognitionAsyncClient |
| com.amazonaws.services.rekognition.AmazonRekognitionClient | software.amazon.awssdk.services.rekognition.RekognitionClient |
| com.amazonaws.services.resourcegroups.AWSResourceGroupsAsyncClient | software.amazon.awssdk.services.resourcegroups.ResourceGroupsAsyncClient |
| com.amazonaws.services.resourcegroups.AWSResourceGroupsClient | software.amazon.awssdk.services.resourcegroups.ResourceGroupsClient |
| com.amazonaws.services.resourcegroupstaggingapi.AWSResourceGroupsTaggingAPIAsyncClient | software.amazon.awssdk.services.resourcegroupstaggingapi.ResourceGroupsTaggingApiAsyncClient |
| com.amazonaws.services.resourcegroupstaggingapi.AWSResourceGroupsTaggingAPIClient | software.amazon.awssdk.services.resourcegroupstaggingapi.ResourceGroupsTaggingApiClient |
| com.amazonaws.services.route53.AmazonRoute53AsyncClient | software.amazon.awssdk.services.route53.Route53AsyncClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.route53.AmazonRoute53Client | software.amazon.awssdk.services.route53.Route53Client |
| com.amazonaws.services.route53domains.AmazonRoute53DomainsAsyncClient | software.amazon.awssdk.services.route53domains.Route53DomainsAsyncClient |
| com.amazonaws.services.route53domains.AmazonRoute53DomainsClient | software.amazon.awssdk.services.route53domains.Route53DomainsClient |
| com.amazonaws.services.s3.AmazonS3Client | software.amazon.awssdk.services.s3.S3Client |
| com.amazonaws.services.sagemaker.AmazonSageMakerAsyncClient | software.amazon.awssdk.services.sagemaker.SageMakerAsyncClient |
| com.amazonaws.services.sagemaker.AmazonSageMakerClient | software.amazon.awssdk.services.sagemaker.SageMakerClient |
| com.amazonaws.services.sagemakerruntime.AmazonSageMakerRuntimeAsyncClient | software.amazon.awssdk.services.sagemakerruntime.SageMakerRuntimeAsyncClient |
| com.amazonaws.services.sagemakerruntime.AmazonSageMakerRuntimeClient | software.amazon.awssdk.services.sagemakerruntime.SageMakerRuntimeClient |
| com.amazonaws.services.secretsmanager.AWSSecretsManagerAsyncClient | software.amazon.awssdk.services.secretsmanager.SecretsManagerAsyncClient |
| com.amazonaws.services.secretsmanager.AWSSecretsManagerClient | software.amazon.awssdk.services.secretsmanager.SecretsManagerClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.securitytoken.AWSSecurityTokenServiceAsyncClient | software.amazon.awssdk.services.sts.StsAsyncClient |
| com.amazonaws.services.securitytoken.AWSSecurityTokenServiceClient | software.amazon.awssdk.services.sts.StsClient |
| com.amazonaws.services.serverlessapplicationrepository.AWSServerlessApplicationRepositoryAsyncClient | software.amazon.awssdk.services.serverlessapplicationrepository.ServerlessApplicationRepositoryAsyncClient |
| com.amazonaws.services.serverlessapplicationrepository.AWSServerlessApplicationRepositoryClient | software.amazon.awssdk.services.serverlessapplicationrepository.ServerlessApplicationRepositoryClient |
| com.amazonaws.services.servermigration.AWSServerMigrationAsyncClient | software.amazon.awssdk.services.sms.SmsAsyncClient |
| com.amazonaws.services.servermigration.AWSServerMigrationClient | software.amazon.awssdk.services.sms.SmsClient |
| com.amazonaws.services.servicecatalog.AWSServiceCatalogAsyncClient | software.amazon.awssdk.services.servicecatalog.ServiceCatalogAsyncClient |
| com.amazonaws.services.servicecatalog.AWSServiceCatalogClient | software.amazon.awssdk.services.servicecatalog.ServiceCatalogClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.servicediscovery.AWSServiceDiscoveryAsyncClient | software.amazon.awssdk.services.servicediscovery.ServiceDiscoveryAsyncClient |
| com.amazonaws.services.servicediscovery.AWSServiceDiscoveryClient | software.amazon.awssdk.services.servicediscovery.ServiceDiscoveryClient |
| com.amazonaws.services.shield.AWSShieldAsyncClient | software.amazon.awssdk.services.shield.ShieldAsyncClient |
| com.amazonaws.services.shield.AWSShieldClient | software.amazon.awssdk.services.shield.ShieldClient |
| com.amazonaws.services.simpledb.AmazonSimpleDBAsyncClient | software.amazon.awssdk.services.simpledb.SimpleDbAsyncClient |
| com.amazonaws.services.simpledb.AmazonSimpleDBClient | software.amazon.awssdk.services.simpledb.SimpleDbClient |
| com.amazonaws.services.simpleemail.AmazonSimpleEmailServiceAsyncClient | software.amazon.awssdk.services.ses.SesAsyncClient |
| com.amazonaws.services.simpleemail.AmazonSimpleEmailServiceClient | software.amazon.awssdk.services.ses.SesClient |
| com.amazonaws.services.simplesystemsmanagement.AWSSimpleSystemsManagementAsyncClient | software.amazon.awssdk.services.ssm.SsmAsyncClient |
| com.amazonaws.services.simplesystemsmanagement.AWSSimpleSystemsManagementClient | software.amazon.awssdk.services.ssm.SsmClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.simpleworkflow.AmazonSimpleWorkflowAsyncClient | software.amazon.awssdk.services.swf.SwfAsyncClient |
| com.amazonaws.services.simpleworkflow.AmazonSimpleWorkflowClient | software.amazon.awssdk.services.swf.SwfClient |
| com.amazonaws.services.snowball.AmazonSnowballAsyncClient | software.amazon.awssdk.services.snowball.SnowballAsyncClient |
| com.amazonaws.services.snowball.AmazonSnowballClient | software.amazon.awssdk.services.snowball.SnowballClient |
| com.amazonaws.services.sns.AmazonSNSAsyncClient | software.amazon.awssdk.services.sns.SnsAsyncClient |
| com.amazonaws.services.sns.AmazonSNSClient | software.amazon.awssdk.services.sns.SnsClient |
| com.amazonaws.services.sqs.AmazonSQSAsyncClient | software.amazon.awssdk.services.sqs.SqsAsyncClient |
| com.amazonaws.services.sqs.AmazonSQSClient | software.amazon.awssdk.services.sqs.SqsClient |
| com.amazonaws.services.stepfunctions.AWSStepFunctionsAsyncClient | software.amazon.awssdk.services.sfn.SfnAsyncClient |
| com.amazonaws.services.stepfunctions.AWSStepFunctionsClient | software.amazon.awssdk.services.sfn.SfnClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.storagegateway.AWSStorageGatewayAsyncClient | software.amazon.awssdk.services.storagegateway.StorageGatewayAsyncClient |
| com.amazonaws.services.storagegateway.AWSStorageGatewayClient | software.amazon.awssdk.services.storagegateway.StorageGatewayClient |
| com.amazonaws.services.support.AWSSupportAsyncClient | software.amazon.awssdk.services.support.SupportAsyncClient |
| com.amazonaws.services.support.AWSSupportClient | software.amazon.awssdk.services.support.SupportClient |
| com.amazonaws.services.transcribe.AmazonTranscribeAsyncClient | software.amazon.awssdk.services.transcribe.TranscribeAsyncClient |
| com.amazonaws.services.transcribe.AmazonTranscribeClient | software.amazon.awssdk.services.transcribe.TranscribeClient |
| com.amazonaws.services.translate.AmazonTranslateAsyncClient | software.amazon.awssdk.services.translate.TranslateAsyncClient |
| com.amazonaws.services.translate.AmazonTranslateClient | software.amazon.awssdk.services.translate.TranslateClient |
| com.amazonaws.services.waf.AWSWAFAsyncClient | software.amazon.awssdk.services.waf.WafAsyncClient |
| com.amazonaws.services.waf.AWSWAFClient | software.amazon.awssdk.services.waf.WafClient |

| 1.x Klien | 2.x Klien |
| --- | --- |
| com.amazonaws.services.waf.AWSWAFRegionalAsyncClient | software.amazon.awssdk.services.waf.regional.WafRegionalAsyncClient |
| com.amazonaws.services.waf.AWSWAFRegionalClient | software.amazon.awssdk.services.waf.regional.WafRegionalClient |
| com.amazonaws.services.workdocs.AmazonWorkDocsAsyncClient | software.amazon.awssdk.services.workdocs.WorkDocsAsyncClient |
| com.amazonaws.services.workdocs.AmazonWorkDocsClient | software.amazon.awssdk.services.workdocs.WorkDocsClient |
| com.amazonaws.services.workmail.AmazonWorkMailAsyncClient | software.amazon.awssdk.services.workmail.WorkMailAsyncClient |
| com.amazonaws.services.workmail.AmazonWorkMailClient | software.amazon.awssdk.services.workmail.WorkMailClient |
| com.amazonaws.services.workspaces.AmazonWorkspacesAsyncClient | software.amazon.awssdk.services.workspaces.WorkSpacesAsyncClient |
| com.amazonaws.services.workspaces.AmazonWorkspacesClient | software.amazon.awssdk.services.workspaces.WorkSpacesClient |
| com.amazonaws.services.xray.AWSXRayAsyncClient | software.amazon.awssdk.services.xray.XRayAsyncClient |
| com.amazonaws.services.xray.AWSXRayClient | software.amazon.awssdk.services.xray.XRayClient |

## Default pembuatan klien

Dalam versi 2.x, perubahan berikut telah dilakukan pada logika pembuatan klien default.

- Rantai penyedia kredensi default untuk S3 tidak lagi menyertakan kredenal anonim. Anda harus secara manual menentukan akses anonim ke S3 dengan menggunakan file. `AnonymousCredentialsProvider`
- Variabel lingkungan berikut yang terkait dengan pembuatan klien default berbeda.

| 1.x | 2.x |
| --- | --- |
| `AWS_CBOR_DISABLED` | `CBOR_ENABLED` |
| `AWS_ION_BINARY_DISABLE` | `BINARY_ION_ENABLED` |

- Properti sistem berikut yang terkait dengan pembuatan klien default berbeda.

| 1.x | 2.x |
| --- | --- |
| `com.amazonaws.sdk.disableEc2Metadata` | `aws.disableEc2Metadata` |
| `com.amazonaws.sdk.ec2MetadataServiceEndpointOverride` | `aws.ec2MetadataServiceEndpoint` |
| `com.amazonaws.sdk.disableCbor` | `aws.cborEnabled` |
| `com.amazonaws.sdk.disableIonBinary` | `aws.binaryIonEnabled` |

- Versi 2.x tidak mendukung properti sistem berikut.
-

| 1.x |
| --- |
| `com.amazonaws.sdk.disableCertChecking` |
| `com.amazonaws.sdk.enableDefaultMetrics` |
| `com.amazonaws.sdk.enableThrottledRetry` |

| 1.x |
| --- |
| `com.amazonaws.regions.RegionUtils.fileOverride` |
| `com.amazonaws.regions.RegionUtils.disableRemote` |
| `com.amazonaws.services.s3.disableImplicitGlobalClients` |
| `com.amazonaws.sdk.enableInRegionOptimizedMode` |

- Memuat konfigurasi Wilayah dari `endpoints.json` file kustom tidak lagi didukung.

## Konfigurasi klien

Di 1.x, konfigurasi klien SDK dimodifikasi dengan menyetel `ClientConfiguration` instance pada klien atau pembuat klien. Dalam versi 2.x, konfigurasi klien dibagi menjadi kelas konfigurasi terpisah. Dengan kelas konfigurasi terpisah, Anda dapat mengonfigurasi klien HTTP yang berbeda untuk klien async versus sinkron tetapi masih menggunakan kelas yang sama. `ClientOverrideConfiguration`

Example konfigurasi klien dalam versi 1.x

```
AmazonDynamoDBClientBuilder.standard()
.withClientConfiguration(clientConfiguration)
.build()
```

Example konfigurasi klien sinkron di versi 2.x

```
ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder();

ApacheHttpClient.Builder httpClientBuilder =
        ApacheHttpClient.builder()
                        .proxyConfiguration(proxyConfig.build());

ClientOverrideConfiguration.Builder overrideConfig =
        ClientOverrideConfiguration.builder();

DynamoDbClient client =
        DynamoDbClient.builder()
                      .httpClientBuilder(httpClientBuilder)
```

```
                        .overrideConfiguration(overrideConfig.build())
                        .build();
```

Example konfigurasi klien asinkron di versi 2.x

```
NettyNioAsyncHttpClient.Builder httpClientBuilder =
        NettyNioAsyncHttpClient.builder();

ClientOverrideConfiguration.Builder overrideConfig =
        ClientOverrideConfiguration.builder();

ClientAsyncConfiguration.Builder asyncConfig =
        ClientAsyncConfiguration.builder();

DynamoDbAsyncClient client =
        DynamoDbAsyncClient.builder()
                           .httpClientBuilder(httpClientBuilder)
                           .overrideConfiguration(overrideConfig.build())
                           .asyncConfiguration(asyncConfig.build())
                           .build();
```

Klien HTTP

Perubahan penting

- Di versi 2.x, Anda dapat mengubah klien HTTP mana yang akan digunakan saat runtime dengan menentukan implementasi yang digunakan. `clientBuilder.httpClientBuilder`
- Ketika Anda meneruskan klien HTTP dengan menggunakan `clientBuilder.httpClient` ke pembuat klien layanan, klien HTTP tidak ditutup secara default jika klien layanan ditutup. Ini memungkinkan Anda untuk berbagi klien HTTP antara klien layanan.
- Klien HTTP asinkron sekarang menggunakan IO non-pemblokiran.
- Beberapa operasi sekarang menggunakan HTTP/2 untuk meningkatkan kinerja.

Pengaturan berubah

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
|---|---|---|---|
| | `ClientConfiguration clientConfig = new ClientConfiguration()` | `ApacheHttpClient.Builder httpClientBuilder = ApacheHttpClient.builder()` | `NettyNioAsyncHttpClient.Builder httpClientBuilder = NettyNioAsyncHttpClient.builder()` |
| Koneksi maks | `clientConfig.setMaxConnections(...)` `clientConfig.withMaxConnections(...)` | `httpClientBuilder.maxConnections(...)` | `httpClientBuilder.maxConcurrency(...)` |
| Batas waktu koneksi | `clientConfig.setConnectionTimeout(...)` `clientConfig.withConnectionTimeout(...)` | `httpClientBuilder.connectionTimeout(...)` `httpClientBuilder.connectionAcquisitionTimeout(...)` | `httpClientBuilder.connectionTimeout(...)` |
| Batas waktu soket | `clientConfig.setSocketTimeout(...)` `clientConfig.withSo` | `httpClientBuilder.socketTimeout(...)` | `httpClientBuilder.writeTimeout(...)` `httpClientBuilder.` |

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
| --- | --- | --- | --- |
| | `cketTimeo ut(...)` | | `readTimeo ut(...)` |
| Koneksi TTL | `clientCon fig.setCo nnectionT TL(...) clientConf ig.withCo nnectionT TL(...)` | `httpClien tBuilder. connectio nTimeToLi ve(...)` | `httpClien tBuilder. connectio nTimeToLi ve(...)` |
| Koneksi maks idle | `clientCon fig.setCo nnectionM axIdleMil lis(...) clientCon fig.withC onnection MaxIdleMi llis(...)` | `httpClien tBuilder. connectio nMaxIdleT ime(...)` | `httpClien tBuilder. connectio nMaxIdleT ime(...)` |
| Validasi setelah tidak aktif | `clientCon fig.setVa lidateAft erInactiv ityMillis(...) clientConfig .withVali dateAfter Inactivit yMillis(...)` | Tidak didukung (Fitur Permintaan) | Tidak didukung (Fitur Permintaan) |

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
| --- | --- | --- | --- |
| Alamat lokal | `clientConfig.setLocalAddress(...)` `clientConfig.withLocalAddress(...)` | `httpClientBuilder.localAddress(...)` | Tidak didukung |
| Harapan-lanjutkan diaktifkan | `clientConfig.setUseExpectContinue(...)` `clientConfig.withUseExpectContinue(...)` | `httpClientBuilder.expectContinueEnabled(...)` | Tidak didukung (Fitur Permintaan) |
| Penuai koneksi | `clientConfig.setUseReaper(...)` `clientConfig.withReaper(...)` | `httpClientBuilder.useIdleConnectionReaper(...)` | `httpClientBuilder.useIdleConnectionReaper(...)` |
| | `AmazonDynamoDBClientBuilder.standard()`<br>`.withClientConfiguration(clientConfiguration)`<br>`.build()` | `DynamoDbClient.builder()`<br>`.httpClientBuilder(httpClientBuilder)`<br>`.build()` | `DynamoDbAsyncClient.builder()`<br>`.httpClientBuilder(httpClientBuilder)`<br>`.build()` |

## Proksi klien HTTP

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
|---|---|---|---|
| | `ClientConfiguration clientConfig = new ClientConfiguration()` | `ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder()` | `ProxyConfiguration.Builder proxyConfig = ProxyConfiguration.builder()` |
| Tuan rumah proxy | `clientConfig.setProxyHost(...) clientConfig.withProxyHost(...)` | `proxyConfig.endpoint(...)` | `proxyConfig.host(...)` |
| Port proxy | `clientConfig.setProxyPort(...) clientConfig.withProxyPort(...)` | `proxyConfig.endpoint(...)` Port proxy disematkan di `endpoint` | `proxyConfig.port(...)` |
| Nama pengguna proxy | `clientConfig.setProxyUsername(...) clientConfig.withProxyUsername(...)` | `proxyConfig.username(...)` | `proxyConfig.username(...)` |

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
| --- | --- | --- | --- |
| Kata sandi proxy | `clientConfig.setProxyPassword(...)` `clientConfig.withProxyPassword(...)` | `proxyConfig.password(...)` | `proxyConfig.password(...)` |
| Domain proxy | `clientConfig.setProxyDomain(...)` `clientConfig.withProxyDomain(...)` | `proxyConfig.ntlmDomain(...)` | Tidak Didukung (Fitur Permintaan) |
| Stasiun kerja proxy | `clientConfig.setProxyWorkspace(...)` `clientConfig.withProxyWorkstation(...)` | `proxyConfig.ntlmWorkstation(...)` | Tidak Didukung (Fitur Permintaan) |
| Metode otentikasi proxy | `clientConfig.setProxyAuthenticationMethods(...)` `clientConfig.withProxyAuthenticationMethods(...)` | Tidak Didukung | Tidak Didukung (Fitur Permintaan) |

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
| --- | --- | --- | --- |
| Autentikasi proxy dasar preemptive | `clientConfig.setPreemptiveBasicProxyAuth(...)` `clientConfig.withPreemptiveBasicProxyAuth(...)` | `proxyConfig.preemptiveBasicAuthenticationEnabled(...)` | Tidak Didukung (Fitur Permintaan) |
| Host non-proxy | `clientConfig.setNonProxyHosts(...)` `clientConfig.withNonProxyHosts(...)` | `proxyConfig.nonProxyHosts(...)` | `proxyConfig.nonProxyHosts(...)` |
| Nonaktifkan proxy soket | `clientConfig.setDisableSocketProxy(...)` `clientConfig.withDisableSocketProxy(...)` | Tidak Didukung (Fitur Permintaan) | Tidak Didukung (Fitur Permintaan) |

| Pengaturan | 1.x | 2.x Sinkronisasi, Apache | 2.x Asinkron, Netty |
| --- | --- | --- | --- |
| | `AmazonDynamoDBClientBuilder.standard()`<br>`.withClientConfiguration(clientConfiguration)`<br>`.build()` | `httpClientBuilder.proxyConfiguration(`<br>`proxyConfig.build())` | `httpClientBuilder.proxyConfiguration(`<br>`proxyConfig.build())` |

Pengesampingan klien

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| | `ClientConfiguration clientConfig =`<br>`new ClientConfiguration()` | `ClientOverrideConfiguration.Builder overrideConfig =`<br>`ClientOverrideConfiguration.builder()` |
| Awalan agen pengguna | `clientConfig.setUserAgentPrefix(...)`<br>`clientConfig.withUserAgentPrefix(...)` | `overrideConfig.advancedOption(`<br>`SdkAdvancedClientOption.USER_AGENT_PREFIX, ...)` |
| Akhiran agen pengguna | `clientConfig.setUserAgentSuffix(...)`<br>`clientConfig.withUserAgentSuffix(...)` | `overrideConfig.advancedOption(`<br>`SdkAdvancedClientOption.USER_AGENT_SUFFIX, ...)` |

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| Signer | `clientConfig.setSignerOverride(...)` `clientConfig.withSignerOverride(...)` | `overrideConfig.advancedOption( SdkAdvancedClientOption.SIGNER, ...)` |
| Header tambahan | `clientConfig.addHeader(...)` `clientConfig.withHeader(...)` | `overrideConfig.putHeader(...)` |
| Permintaan waktu habis | `clientConfig.setRequestTimeout(...)` `clientConfig.withRequestTimeout(...)` | `overrideConfig.apiCallAttemptTimeout(...)` |
| Batas waktu eksekusi klien | `clientConfig.setClientExecutionTimeout(...)` `clientConfig.withClientExecutionTimeout(...)` | `overrideConfig.apiCallTimeout(...)` |
| Gunakan Gzip | `clientConfig.setUseGzip(...)` `clientConfig.withGzip(...)` | Tidak Didukung (Fitur Permintaan) |
| Petunjuk ukuran penyangga soket | `clientConfig.setSocketBufferSizeHints(...)` `clientConfig.withSocketBufferSizeHints(...)` | Tidak Didukung (Fitur Permintaan) |

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| Metadata respons cache | `clientConfig.setCacheResponseMetadata(...)` `clientConfig.withCacheResponseMetadata(...)` | Tidak Didukung (Fitur Permintaan) |
| Ukuran cache metadata respons | `clientConfig.setResponseMetadataCacheSize(...)` `clientConfig.withResponseMetadataCacheSize(...)` | Tidak Didukung (Fitur Permintaan) |
| DNS resolver | `clientConfig.setDnsResolver(...)` `clientConfig.withDnsResolver(...)` | Tidak Didukung (Fitur Permintaan) |
| TCP keepalive | `clientConfig.setUseTcpKeepAlive(...)` `clientConfig.withTcpKeepAlive(...)` | Opsi ini sekarang dalam konfigurasi HTTP Client<br>`- ApacheHttpClient.builder().tcpKeepAlive(true)`<br>`- NettyNioAsyncHttpClient.builder().tcpKeepAlive(true)` |
| Amankan acak | `clientConfig.setSecureRandom(...)` `clientConfig.withSecureRandom(...)` | Tidak Didukung (Fitur Permintaan) |

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| | `AmazonDynamoDBClientBuilder.standard()`<br>`    .withClientConfiguration(clientConfiguration)`<br>`    .build()` | `DynamoDbClient.builder()`<br>`    .overrideConfiguration(overrideConfig.build())`<br>`    .build()` |

Klien mengganti percobaan ulang

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| | `ClientConfiguration clientConfig =`<br>`    new ClientConfiguration()` | `ClientOverrideConfiguration.Builder overrideConfigBuilder =`<br>`    ClientOverrideConfiguration.builder();` |
| Kesalahan maks coba lagi | `clientConfig.setMaxErrorRetry(...)`<br>`clientConfig.withMaxErrorRetry(...)` | `// Configure the default retry strategy.`<br>`overrideConfigBuilder.retryStrategy(b -> b.maxAttempts(...));` |
| Gunakan percobaan ulang yang dibatasi | `clientConfig.setUseThrottleRetries(...)`<br>`clientConfig.withUseThrottleRetries(...)` | Tidak didukung |
| Maks percobaan ulang berturut-turut sebelum throttling | `clientConfig.setMaxConsecutiveRetriesBeforeThrottling(...)` | Tidak didukung |

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| | `clientConfig.withMaxConsecutiveRetriesBeforeThrottling(...)` | |
| | `AmazonDynamoDBClientBuilder.standard()`<br>`.withClientConfiguration(clientConfiguration)`<br>`.build()` | `DynamoDbClient.builder()`<br>`.overrideConfiguration(overrideConfigBuilder.build())`<br>`.build();`<br><br>`// You also have the option to use a lambda expression to configure and`<br>`// build the 'ClientOverrideConfiguration.Builder'.`<br>`DynamoDbClient client = DynamoDbClient.builder()`<br>`.overrideConfiguration(o -> o.retryStrategy(b -> b.maxAttempts(5)))`<br>`.build();` |

## Klien asinkron

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| | | `ClientAsyncConfiguration.Builder asyncConfig = ClientAsyncConfiguration.builder()` |

| Pengaturan | 1.x | 2.x |
| --- | --- | --- |
| Pelaksana | `AmazonDynamoDBAsyncClientBuilder.standard()`<br>`.withExecutorFactory(...)`<br>`.build()` | `asyncConfig.advancedOption(`<br>`SdkAdvancedAsyncClientOption.FUTURE_COMPLETION_EXECUTOR, ...)`<br><br>`DynamoDbAsyncClient.builder()`<br>`.asyncConfiguration(asyncConfig)`<br>`.build()` |

Perubahan klien lainnya

`ClientConfiguration`Opsi berikut dari 1.x telah berubah di 2.x SDK dan tidak memiliki ekuivalen langsung.

| Pengaturan | 1.x | 2.x setara |
| --- | --- | --- |
| Protokol | `clientConfig.setProtocol(Protocol.HTTP)`<br>`clientConfig.withProtocol(Protocol.HTTP)` | Pengaturan protokol adalah HTTPS secara default. Untuk mengubah pengaturan, tentukan protokol yang mengatur titik akhir HTTP pada pembuat klien:<br><br>`clientBuilder.endpointOverride(`<br>`URI.create("http://..."))` |

# Perubahan penyedia kredensial

Bagian ini menyediakan pemetaan perubahan nama kelas penyedia kredensil dan metode antara versi 1.x dan 2.x dari. AWS SDK untuk Java

## Perbedaan penting

- Penyedia kredensial default memuat properti sistem sebelum variabel lingkungan di versi 2.x. Untuk informasi selengkapnya, lihat Menggunakan kredensil.
- Metode konstruktor diganti dengan `builder` metode `create` or.

  Example

```
DefaultCredentialsProvider.create();
```

- Penyegaran asinkron tidak lagi disetel secara default. Anda harus menentukannya dengan `builder` penyedia kredensi.

  Example

```
ContainerCredentialsProvider provider = ContainerCredentialsProvider.builder()
          .asyncCredentialUpdateEnabled(true)
          .build();
```

- Anda dapat menentukan jalur ke file profil khusus menggunakan file`ProfileCredentialsProvider.builder()`.

  Example

```
ProfileCredentialsProvider profile = ProfileCredentialsProvider.builder()

 .profileFile(ProfileFile.builder().content(Paths.get("myProfileFile.file")).build())
          .build();
```

- Format file profil telah berubah agar lebih cocok dengan file AWS CLI. Untuk detailnya, lihat Mengonfigurasi AWS CLI dalam Panduan AWS Command Line Interface Pengguna.

# Perubahan penyedia kredensil dipetakan antara versi 1.x dan 2.x

### `AWSCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.AWSCredentialsProvider` | `software.amazon.awssdk.auth.credentials.AwsCredentialsProvider` |
| Nama metode | `getCredentials` | `resolveCredentials` |
| Metode yang tidak didukung | `refresh` | Tidak didukung |

### `DefaultAWSCredentialsProviderChain`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.DefaultAWSCredentialsProviderChain` | `software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider` |
| Pembuatan | `new DefaultAWSCredentialsProviderChain` | `DefaultCredentialsProvider.create` |
| Metode yang tidak didukung | `getInstance` | Tidak didukung |
| Urutan prioritas pengaturan eksternal | Variabel lingkungan sebelum properti sistem | Properti sistem sebelum variabel lingkungan |

### `AWSStaticCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Nama paket/kelas | `com.amazonaws.auth.AWSStaticCredentialsProvider` | `software.amazon.awssdk.auth.credentials.StaticCredentialsProvider` |
| Pembuatan | `new AWSStaticCredentialsProvider` | `StaticCredentialsProvider.create` |

### `EnvironmentVariableCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Nama paket/kelas | `com.amazonaws.auth.EnvironmentVariableCredentialsProvider` | `software.amazon.awssdk.auth.credentials.EnvironmentVariableCredentialsProvider` |
| Pembuatan | `new EnvironmentVariableCredentialsProvider` | `EnvironmentVariableCredentialsProvider.create` |
| Nama variabel lingkungan | `AWS_ACCESS_KEY` | `AWS_ACCESS_KEY_ID` |
| | `AWS_SECRET_KEY` | `AWS_SECRET_ACCESS_KEY` |

### `SystemPropertiesCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.SystemPropertiesCredentialsProvider` | `software.amazon.awssdk.auth.credentials.SystemPropertyCredentialsProvider` |
| Pembuatan | `new SystemPropertiesCredentialsProvider` | `SystemPropertiesCredentialsProvider.create` |
| Nama properti sistem | `aws.secretKey` | `aws.secretAccessKey` |

### `ProfileCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.profile.ProfileCredentialsProvider` | `software.amazon.awssdk.auth.credentials.ProfileCredentialsProvider` |
| Pembuatan | `new ProfileCredentialsProvider` | `ProfileCredentialsProvider.create` |
| Lokasi profil kustom | • Variabel lingkungan `AWS_CREDENTIAL_PROFILES_FILE`<br>• `new ProfileCredentialsProvider` | • Variabel lingkungan `AWS_SHARED_CREDENTIALS_FILE`<br>• `ProfileCredentialsProvider.builder` |

### `ContainerCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.ContainerCredentialsProvider` | `software.amazon.awssdk.auth.credentials.ContainerCredentialsProvider` |
| Pembuatan | `new ContainerCredentialsProvider` | `ContainerCredentialsProvider.create` |
| Tentukan penyegaran asinkron | Tidak didukung | Perilaku default |

### `InstanceProfileCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
|---|---|---|
| Nama paket/kelas | `com.amazonaws.auth.InstanceProfileCredentialsProvider` | `software.amazon.awssdk.auth.credentials.InstanceProfileCredentialsProvider` |
| Pembuatan | `new InstanceProfileCredentialsProvider` | `InstanceProfileCredentialsProvider.create` |
| Tentukan penyegaran asinkron | `new InstanceProfileCredentialsProvider(true)` | `InstanceProfileCredentialProvider.builder().asyncCredentialUpdateEnabled(true).build()` |
| Nama properti sistem | `com.amazonaws.sdk.disableEc2Metadata` | `aws.disableEc2Metadata` |

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| | `com.amazonaws.sdk.ec2MetadataServiceEndpointOverride` | `aws.ec2MetadataServiceEndpoint` |

### `STSAssumeRoleSessionCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Nama paket/kelas | `com.amazonaws.auth.STSAssumeRoleSessionCredentialsProvider` | `software.amazon.awssdk.services.sts.auth.StsAssumeRoleCredentialsProvider` |
| Pembuatan | • `new STSAssumeRoleSessionCredentialsProvider`<br>• `new STSAssumeRoleSessionCredentialsProvider.Builder` | `StsAssumeRoleCredentialsProvider.builder` |
| Penyegaran asinkron | Perilaku default | Perilaku default |
| Konfigurasi | `new STSAssumeRoleSessionCredentialsProvider.Builder` | Konfigurasikan `AssumeRoleRequest` permintaan `StsClient` dan |

### `STSSessionCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Nama paket/kelas | `com.amazonaws.auth.STSSessionCredentialsProvider` | `software.amazon.awssdk.services.sts.auth.StsGetSessionTokenCredentialsProvider` |
| Pembuatan | `new STSSessionCredentialsProvider` | `StsGetSessionTokenCredentialsProvider.builder` |
| Penyegaran asinkron | Perilaku default | `StsGetSessionTokenCredentialsProvider.builder` |
| Konfigurasi | Parameter konstruktor | Konfigurasikan `GetSessionTokenRequest` permintaan `StsClient` dan di pembangun |

### `WebIdentityFederationSessionCredentialsProvider`

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Nama paket/kelas | `com.amazonaws.auth.WebIdentityFederationSessionCredentialsProvider` | `software.amazon.awssdk.services.sts.auth.StsAssumeRoleWithWebIdentityCredentialsProvider` |
| Pembuatan | `new WebIdentityFederationSessionCredentialsProvider` | `StsAssumeRoleWithWebIdentityCredentialsProvider.builder` |

| Ubah kategori | 1.x | 2.x |
| --- | --- | --- |
| Penyegaran asinkron | Perilaku default | `StsAssumeRoleWithWebIdentityCredentialsProvider.builder` |
| Konfigurasi | Parameter konstruktor | Konfigurasikan `AssumeRoleWithWebIdentityRequest` permintaan `StsClient` dan di pembangun |

Kelas diganti

| Kelas 1.x | 2.x kelas pengganti |
| --- | --- |
| `com.amazonaws.auth.EC2ContainerCredentialsProviderWrapper` | `software.amazon.awssdk.auth.credentials.ContainerCredentialsProvider` dan `software.amazon.awssdk.auth.credentials.InstanceProfileCredentialsProvider` |
| `com.amazonaws.services.s3.S3CredentialsProviderChain` | `software.amazon.awssdk.auth.credentials.DefaultCredentialsProvider` dan `software.amazon.awssdk.auth.credentials.AnonymousCredentialsProvider` |

Kelas dihapus

| Kelas 1.x |
| --- |
| `com.amazonaws.auth.ClasspathPropertiesFileCredentialsProvider` |

| Kelas 1.x |
| --- |
| `com.amazonaws.auth.PropertiesFileCredentialsProvider` |

# Perubahan wilayah

Bagian ini menjelaskan perubahan yang diterapkan di AWS SDK untuk Java 2.x untuk menggunakan `Region` dan `Regions` kelas.

## Konfigurasi wilayah

- Beberapa AWS layanan tidak memiliki titik akhir khusus Wilayah. Saat menggunakan layanan tersebut, Anda harus mengatur Wilayah sebagai `Region.AWS_GLOBAL` atau`Region.AWS_CN_GLOBAL`.

  Example

  ```
  Region region = Region.AWS_GLOBAL;
  ```

- `com.amazonaws.regions.Regions`dan `com.amazonaws.regions.Region` kelas sekarang digabungkan menjadi satu kelas,`software.amazon.awssdk.regions.Region`.

## Metode dan pemetaan nama kelas

Tabel berikut memetakan kelas terkait Wilayah antara versi 1.x dan 2.x dari. AWS SDK untuk Java Anda dapat membuat instance dari kelas-kelas ini menggunakan `of()` metode.

Example

```
RegionMetadata regionMetadata = RegionMetadata.of(Region.US_EAST_1);
```

1.x Perubahan metode kelas Wilayah

| 1.x | 2.x |
| --- | --- |
| `Regions.fromName` | `Region.of` |
| `Regions.getName` | `Region.id` |

| 1.x | 2.x |
| --- | --- |
| `Regions.getDescription` | `Region.metadata().description()` |
| `Regions.getCurrentRegion` | Tidak Didukung |
| `Regions.DEFAULT_REGION` | Tidak Didukung |
| `Regions.name` | `Region.id` |

1.x Perubahan metode kelas Wilayah

| 1.x | 2.x |
| --- | --- |
| `Region.getName` | `Region.id` |
| `Region.hasHttpsEndpoint` | Tidak Didukung |
| `Region.hasHttpEndpoint` | Tidak Didukung |
| `Region.getAvailableEndpoints` | Tidak Didukung |
| `Region.createClient` | Tidak Didukung |

RegionMetadata perubahan metode kelas

| 1.x | 2.x |
| --- | --- |
| `RegionMetadata.getName` | `RegionMetadata.name` |
| `RegionMetadata.getDomain` | `RegionMetadata.domain` |
| `RegionMetadata.getPartition` | `RegionMetadata.partition` |

ServiceMetadata perubahan metode kelas

| 1.x | 2.x |
| --- | --- |
| `Region.getServiceEndpoint` | `ServiceMetadata.endpointFor(Region)` |
| `Region.isServiceSupported` | `ServiceMetadata.regions().contains(Region)` |

## Operasi, permintaan, dan tanggapan berubah

Dalam versi 2 SDK for Java, permintaan diteruskan ke operasi klien. Misalnya `DynamoDbClient's PutItemRequest` diteruskan ke `DynamoDbClient.putItem` operasi. Operasi ini mengembalikan respons dari Layanan AWS, seperti a`PutItemResponse`.

Versi 2 SDK for Java memiliki perubahan berikut dari versi 1.

- Operasi dengan beberapa halaman respons sekarang memiliki `Paginator` metode untuk iterasi secara otomatis atas semua item dalam respons.
- Anda tidak dapat mengubah permintaan dan tanggapan.
- Anda harus membuat permintaan dan tanggapan dengan metode pembangun statis alih-alih konstruktor. Misalnya, versi 1 `new PutItemRequest().withTableName(...)` sekarang`PutItemRequest.builder().tableName(...).build()`.
- Operasi mendukung cara singkat untuk membuat permintaan:`dynamoDbClient.putItem(request -> request.tableName(...))`.

Bagian berikut menjelaskan perubahan spesifik antara versi 1 dan versi 2. Beberapa perubahan jenis parameter dapat dikonversi secara otomatis menggunakan alat migrasi, sementara perubahan lainnya memerlukan pembaruan manual untuk kode Anda.

### Perubahan parameter tanggal

Dalam versi 1, banyak operasi menerima `java.util.Date` objek untuk parameter berbasis waktu. Di versi 2, operasi ini menggunakan `java.time.Instant` objek sebagai gantinya.

Anda dapat mengonversi `Date` parameter secara otomatis menggunakan alat migrasi, atau Anda dapat mengonversinya secara manual dengan memanggil `toInstant()` metode pada `Date` objek Anda.

Example- Hasilkan URL presigned dengan tanggal kedaluwarsa di versi 1

```
// Generate a presigned URL that expires at a specific date
Date expiration = new Date(System.currentTimeMillis() + 3600000); // 1 hour from now
URL presignedUrl = s3Client.generatePresignedUrl(bucketName, keyName, expiration);
```

Example- Hasilkan URL yang telah ditetapkan sebelumnya dengan instan kedaluwarsa di versi 2

```
// Generate a presigned URL that expires at a specific instant
Date expiration = new Date(System.currentTimeMillis() + 3600000); // 1 hour from now
PresignedGetObjectRequest presignedRequest = presigner.presignGetObject(
    GetObjectPresignRequest.builder()
        .getObjectRequest(GetObjectRequest.builder()
            .bucket(bucketName)
            .key(keyName)
            .build())
        .signatureDuration(Duration.between(Instant.now(), expiration.toInstant()))
        .build());
```

## Perubahan penanganan data biner

Dalam versi 1, data biner ditangani menggunakan `ByteBuffer` objek secara langsung. Di versi 2, SDK menggunakan `SdkBytes` objek yang menyediakan cara yang lebih nyaman dan aman untuk bekerja dengan data biner.

Anda dapat `SdkBytes` mengonversinya `ByteBuffer` secara otomatis menggunakan alat migrasi, atau mengonversinya secara manual dengan memanggil `asByteBuffer()` `SdkBytes` objek yang dikembalikan.

Example- Dapatkan data biner dari atribut pesan di versi 1

```
// Get binary data from a message attribute
MessageAttributeValue messageAttributeValue = new MessageAttributeValue();
ByteBuffer binaryValue = messageAttributeValue.getBinaryValue();
String binaryString = new String(messageAttributeValue.getBinaryValue().array());
```

Example- Dapatkan data biner dari atribut pesan di versi 2

```
// Get binary data from a message attribute
MessageAttributeValue messageAttributeValue = MessageAttributeValue.builder().build();
ByteBuffer binaryValue = messageAttributeValue.binaryValue().asByteBuffer();
String binaryString = new
 String(messageAttributeValue.binaryValue().asByteBuffer().array());
```

## Perubahan parameter batas waktu

Di versi 1, nilai batas waktu ditentukan sebagai nilai integer yang mewakili milidetik. Dalam versi 2, parameter batas waktu menggunakan `java.time.Duration` objek untuk keamanan dan kejelasan tipe yang lebih baik.

Anda dapat mengonversi nilai batas waktu numerik secara otomatis menggunakan alat migrasi, atau Anda dapat mengonversinya secara manual dengan membungkus nilai numerik Anda dengan metode pabrik yang sesuai. `Duration`

Example- Tetapkan batas waktu permintaan di versi 1

```
// Set request timeout in milliseconds
ClientConfiguration clientConfiguration = new ClientConfiguration();
clientConfiguration.setRequestTimeout(5000); // 5 seconds
```

Example- Tetapkan batas waktu permintaan di versi 2

```
// Set request timeout using Duration
ClientConfiguration clientConfiguration = new ClientConfiguration();
clientConfiguration.setRequestTimeout(Duration.ofMillis(5000)); // 5 seconds

// Or more clearly:
clientConfiguration.setRequestTimeout(Duration.ofSeconds(5)); // 5 seconds
```

Anda dapat menggunakan metode `Duration` pabrik berikut untuk nilai batas waktu:

- `Duration.ofMillis(long millis)`- Untuk nilai milidetik.
- `Duration.ofSeconds(long seconds)`- Untuk nilai kedua.
- `Duration.ofMinutes(long minutes)`- Untuk nilai menit.

## Perbedaan operasi streaming antara 1.x dan 2.x dari AWS SDK untuk Java

Operasi streaming, seperti Amazon S3 `getObject` dan `putObject` metode, mendukung non-pemblokiran I/O di SDK versi 2.x. Akibatnya, objek model permintaan dan respons tidak lagi mengambil `InputStream` sebagai parameter. Sebagai gantinya, untuk permintaan sinkron objek permintaan menerima`RequestBody`, yang merupakan aliran byte. Setara asinkron menerima sebuah. `AsyncRequestBody`

Example **`putObject`**operasi Amazon S3 di 1.x

```
s3client.putObject(BUCKET, KEY, new File(file_path));
```

Example **`putObject`**operasi Amazon S3 di 2.x

```
s3client.putObject(PutObjectRequest.builder()
                                   .bucket(BUCKET)
                                   .key(KEY)
                                   .build(),
                   RequestBody.of(Paths.get("myfile.in")));
```

Objek respons streaming menerima a `ResponseTransformer` untuk klien sinkron dan untuk klien asinkron di V2. `AsyncResponseTransformer`

Example **`getObject`**operasi Amazon S3 di 1.x

```
S3Object o = s3.getObject(bucket, key);
S3ObjectInputStream s3is = o.getObjectContent();
FileOutputStream fos = new FileOutputStream(new File(key));
```

Example **`getObject`**operasi Amazon S3 di 2.x

```
s3client.getObject(GetObjectRequest.builder().bucket(bucket).key(key).build(),
  ResponseTransformer.toFile(Paths.get("key")));
```

Dalam SDK for Java 2.x, operasi respons streaming memiliki metode untuk memuat `AsBytes` respons ke dalam memori dan menyederhanakan konversi tipe umum dalam memori.

## Perbedaan serialisasi antara 1.x dan 2.x dari AWS SDK untuk Java

### Daftar objek untuk meminta perbedaan parameter

SDK for Java v1.x dan v2.x berbeda dalam cara mereka membuat serial objek List untuk meminta parameter.

SDK for Java 1.x tidak membuat serial daftar kosong, sedangkan SDK for Java 2.x membuat serial daftar kosong sebagai parameter kosong.

Misalnya, pertimbangkan layanan dengan `SampleOperation` yang membutuhkan a`SampleRequest`. `SampleRequest`Menerima dua parameter—tipe String `str1` dan tipe List `listParam` —seperti yang ditunjukkan pada contoh berikut.

Example dari **`SampleOperation`** dalam 1.x

```
SampleRequest v1Request = new SampleRequest()
    .withStr1("TestName");

sampleServiceV1Client.sampleOperation(v1Request);
```

Pencatatan tingkat kabel menunjukkan bahwa `listParam` parameter tidak diserialisasi.

```
Action=SampleOperation&Version=2011-01-01&str1=TestName
```

Example dari **`SampleOperation`** dalam 2.x

```
sampleServiceV2Client.sampleOperation(b -> b
    .str1("TestName"));
```

Pencatatan tingkat kabel menunjukkan bahwa `listParam` parameter diserialisasikan tanpa nilai.

```
Action=SampleOperation&Version=2011-01-01&str1=TestName&listParam=
```

### POJOs di V1 dibandingkan dengan pembangun di V2

Karena SDK for Java V1 menggunakan kelas POJO yang bisa berubah, pustaka serialisasi dan deserialisasi — seperti Jackson — dapat menggunakan objek model secara langsung.

V2 SDK for Java, sebaliknya, menggunakan objek model yang tidak dapat diubah. Anda harus menggunakan pembangun perantara untuk melakukan de/serialisasi.

Contoh berikut menunjukkan perbedaan antara panggilan `headBucket` API de/serializing dengan V1 dan V2 menggunakan Jackson`ObjectMapper`.

```
    public void sendRequest() throws IOException {
        final String bucketName = "amzn-s3-demo-bucket";
        final ObjectMapper mapper = new ObjectMapper();

        // V1 uses POJOs to serialize and deserialize.
        final AmazonS3 v1S3Client = AmazonS3ClientBuilder.defaultClient();
        HeadBucketResult resultV1 = v1S3Client.headBucket(
            new HeadBucketRequest(bucketName));

        String v1Serialized = mapper.writeValueAsString(resultV1);

        HeadBucketResult deserializedV1 = mapper.readValue(v1Serialized,
 HeadBucketResult.class);

        // V2 uses builders to serialize and deserialize.
        S3Client v2S3Client = S3Client.create();
        HeadBucketResponse v2Response = v2S3Client.headBucket(
            b -> b.bucket(bucketName));

        String v2Serialized = mapper.writeValueAsString(
            v2Response.toBuilder());

        HeadBucketResponse v2Deserialized = mapper.readValue(
            v2Serialized, HeadBucketResponse.serializableBuilderClass())
            .build();
    }
```

## Perbedaan deserialisasi antara 1.x dan 2.x dari AWS SDK untuk Java

### Koleksi kosong di V2 dibandingkan dengan **`null`**s di V1

SDK for Java v1.x dan v2.x berbeda dalam cara mereka mendeserialisasi respons JSON dengan daftar dan peta yang kosong.

Saat SDK menerima respons dengan properti yang hilang yang dimodelkan sebagai daftar atau peta, V1 mendeserialisasi properti yang hilang`null`, sedangkan V2 mendeserialisasi properti ke objek koleksi kosong yang tidak dapat diubah.

Misalnya, pertimbangkan respons yang dikembalikan untuk `describeTable` metode dari klien DynamoDB. Metode contoh berikut berisi klien DynamoDB V2 dan klien DynamoDB V1 yang

keduanya mengeksekusi metode pada tabel yang tidak memiliki indeks `describeTable` sekunder global

Example deserialisasi properti yang dimodelkan sebagai daftar yang hilang dalam respons

```
public void deserializationDiffs(){

    DescribeTableResponse v2Response = dynamoDbClientV2.describeTable(builder ->
 builder.tableName(TABLE_NAME));
    // V2 provides has* methods on model objects for list/map members. No null check
 needed.
    LOGGER.info( String.valueOf(v2Response.table().hasGlobalSecondaryIndexes()) );

 LOGGER.info( String.valueOf(v2Response.table().globalSecondaryIndexes().isEmpty()) );
    // V2 deserialize to an empty collection.
    LOGGER.info(v2Response.table().globalSecondaryIndexes().toString());

    // V1 deserialize to null.
    DescribeTableResult v1Result = dynamoDbClientV1.describeTable(new
 DescribeTableRequest(TABLE_NAME));
    if (v1Result.getTable().getGlobalSecondaryIndexes() != null){
        LOGGER.info(v1Result.getTable().getGlobalSecondaryIndexes().toString());
    } else {
        LOGGER.info("The list of global secondary indexes returned by the V1 call is
 <null>");
    }
}
```

Berikut ini menunjukkan output yang dicatat:

```
INFO  org.example.DeserializationDifferences:45 - false
INFO  org.example.DeserializationDifferences:46 - true
INFO  org.example.DeserializationDifferences:48 - []
INFO  org.example.DeserializationDifferences:55 - The list of global secondary indexes
 returned by the V1 call is <null>
```

Java SDK 2.x mengambil pendekatan idiomatik dengan deserialisasi daftar kosong dan peta ke koleksi kosong yang tidak dapat diubah alih-alih kembali`null`, mempromosikan kode yang lebih aman dan lebih ringkas. Dengan V2, Anda dapat memeriksa apakah layanan mengembalikan atribut yang dimodelkan sebagai daftar atau peta dengan `has*` metode, seperti yang `hasGlobalSecondaryIndexes` ditunjukkan pada contoh sebelumnya.

Pendekatan ini menghindari kebutuhan akan `null` pemeriksaan eksplisit dan penyelarasan dengan praktik terbaik Java modern untuk menangani struktur data yang tidak ada atau kosong.

Contoh lengkap

```
package org.example;

import com.amazonaws.regions.Regions;
import com.amazonaws.services.dynamodbv2.AmazonDynamoDB;
import com.amazonaws.services.dynamodbv2.AmazonDynamoDBClientBuilder;
import com.amazonaws.services.dynamodbv2.model.DescribeTableRequest;
import com.amazonaws.services.dynamodbv2.model.DescribeTableResult;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import software.amazon.awssdk.services.dynamodb.DynamoDbClient;
import software.amazon.awssdk.services.dynamodb.model.BillingMode;
import software.amazon.awssdk.services.dynamodb.model.DescribeTableResponse;
import software.amazon.awssdk.services.dynamodb.model.KeyType;
import software.amazon.awssdk.services.dynamodb.model.ScalarAttributeType;

import java.util.UUID;

public class DeserializationDifferences {
    private static final Logger LOGGER =
 LoggerFactory.getLogger(DeserializationDifferences.class);
    private static final String TABLE_NAME = "DeserializationTable-" +
 UUID.randomUUID();
    DynamoDbClient dynamoDbClientV2 = DynamoDbClient.create();
    AmazonDynamoDB dynamoDbClientV1 =
 AmazonDynamoDBClientBuilder.standard().withRegion(Regions.US_EAST_1).build();

    public static void main(String[] args) {

        DeserializationDifferences difference = new DeserializationDifferences();
        difference.createTable();
        difference.deserializationDiffs();
        difference.deleteTable();
    }

    public void createTable(){
        dynamoDbClientV2.createTable(b -> b
                .billingMode(BillingMode.PAY_PER_REQUEST)
                .tableName(TABLE_NAME)
                .keySchema(b1 -> b1.attributeName("Id").keyType(KeyType.HASH))
```

```
                .attributeDefinitions(b2 ->
 b2.attributeName("Id").attributeType(ScalarAttributeType.S)));
        dynamoDbClientV2.waiter().waitUntilTableExists(b -> b.tableName(TABLE_NAME));
    }

    public void deserializationDiffs(){

        DescribeTableResponse v2Response = dynamoDbClientV2.describeTable(builder ->
 builder.tableName(TABLE_NAME));
        // V2 provides has* methods on model objects for list/map members. No null
 check needed.
        LOGGER.info( String.valueOf(v2Response.table().hasGlobalSecondaryIndexes()) );

 LOGGER.info( String.valueOf(v2Response.table().globalSecondaryIndexes().isEmpty()) );
        // V2 deserialize to an empty collection.
        LOGGER.info(v2Response.table().globalSecondaryIndexes().toString());

        // V1 deserialize to null.
        DescribeTableResult v1Result = dynamoDbClientV1.describeTable(new
 DescribeTableRequest(TABLE_NAME));
        if (v1Result.getTable().getGlobalSecondaryIndexes() != null){
            LOGGER.info(v1Result.getTable().getGlobalSecondaryIndexes().toString());
        } else {
            LOGGER.info("The list of global secondary indexes returned by the V1 call
 is <null>");
        }
    }

    public void deleteTable(){
        dynamoDbClientV2.deleteTable(b -> b.tableName(TABLE_NAME));
        dynamoDbClientV2.waiter().waitUntilTableNotExists(b ->
 b.tableName(TABLE_NAME));
    }
}
```

Respons JSON untuk `describeTable` metode dari klien V1 dan V2 tidak `GlobalSecondaryIndexes` mengandung atribut:

```
{
  "Table": {
    "AttributeDefinitions": [
      {
        "AttributeName": "Id",
```

```
        "AttributeType": "S"
      }
    ],
    "BillingModeSummary": {
      "BillingMode": "PAY_PER_REQUEST",
      "LastUpdateToPayPerRequestDateTime": ...
    },
    "CreationDateTime": ...,
    "DeletionProtectionEnabled": false,
    "ItemCount": 0,
    "KeySchema": [
      {
        "AttributeName": "Id",
        "KeyType": "HASH"
      }
    ],
    "ProvisionedThroughput": {
      "NumberOfDecreasesToday": 0,
      "ReadCapacityUnits": 0,
      "WriteCapacityUnits": 0
    },
    "TableArn": "arn:aws:dynamodb:us-east-1:11111111111:table/
DeserializationTable-...",
    "TableId": "...",
    "TableName": "DeserializationTable-...",
    "TableSizeBytes": 0,
    "TableStatus": "ACTIVE",
    "TableThroughputModeSummary": {
      "LastUpdateToPayPerRequestDateTime": ...,
      "TableThroughputMode": "PAY_PER_REQUEST"
    },
    "WarmThroughput": {
      "ReadUnitsPerSecond": 12000,
      "Status": "ACTIVE",
      "WriteUnitsPerSecond": 4000
    }
  }
}
```

# Perubahan pengecualian

Nama kelas pengecualian, strukturnya, dan hubungannya telah berubah. `software.amazon.awssdk.core.exception.SdkException`adalah `Exception` kelas dasar baru yang diperluas oleh semua pengecualian lainnya.

Tabel ini memetakan perubahan nama kelas pengecualian.

| 1.x | 2.x |
| --- | --- |
| `com.amazonaws.SdkBaseException com.amazonaws.AmazonClientException` | `software.amazon.awssdk.core.exception.SdkException` |
| `com.amazonaws.SdkClientException` | `software.amazon.awssdk.core.exception.SdkClientException` |
| `com.amazonaws.AmazonServiceException` | `software.amazon.awssdk.awscore.exception.AwsServiceException` |

Tabel berikut memetakan metode pada kelas pengecualian antara versi 1.x dan 2.x.

| 1.x | 2.x |
| --- | --- |
| `AmazonServiceException.getRequestId` | `SdkServiceException.requestId` |
| `AmazonServiceException.getServiceName` | `AwsServiceException.awsErrorDetails().serviceName` |
| `AmazonServiceException.getErrorCode` | `AwsServiceException.awsErrorDetails().errorCode` |
| `AmazonServiceException.getErrorMessage` | `AwsServiceException.awsErrorDetails().errorMessage` |

| 1.x | 2.x |
| --- | --- |
| `AmazonServiceException.getStatusCode` | `AwsServiceException.awsErrorDetails().sdkHttpResponse().statusCode` |
| `AmazonServiceException.getHttpHeaders` | `AwsServiceException.awsErrorDetails().sdkHttpResponse().headers` |
| `AmazonServiceException.rawResponse` | `AwsServiceException.awsErrorDetails().rawResponse` |

# Perubahan khusus layanan

## Amazon S3 berubah

SDK for Java 2.x menonaktifkan akses anonim secara default. Akibatnya, Anda harus mengaktifkan akses anonim dengan menggunakan file`AnonymousCredentialsProvider`.

Perubahan nama operasi

Banyak nama operasi untuk Amazon S3 klien telah berubah di AWS SDK untuk Java 2.x. Dalam versi 1.x, Amazon S3 klien tidak dihasilkan langsung dari API layanan. Hal ini mengakibatkan ketidakkonsistenan antara operasi SDK dan API layanan. Di versi 2.x, kami sekarang menghasilkan Amazon S3 klien agar lebih konsisten dengan API layanan.

Tabel berikut menunjukkan nama operasi dalam dua versi.

Nama Operasi Amazon S3

| 1.x | 2.x |
| --- | --- |
| `abortMultipartUpload` | `abortMultipartUpload` |
| `changeObjectStorageClass` | `copyObject` |
| `completeMultipartUpload` | `completeMultipartUpload` |
| `copyObject` | `copyObject` |

| 1.x | 2.x |
| --- | --- |
| copyPart | uploadPartCopy |
| createBucket | createBucket |
| deleteBucket | deleteBucket |
| deleteBucketAnalyticsConfiguration | deleteBucketAnalyticsConfiguration |
| deleteBucketCrossOriginConfiguration | deleteBucketCors |
| deleteBucketEncryption | deleteBucketEncryption |
| deleteBucketInventoryConfiguration | deleteBucketInventoryConfiguration |
| deleteBucketLifecycleConfiguration | deleteBucketLifecycle |
| deleteBucketMetricsConfiguration | deleteBucketMetricsConfiguration |
| deleteBucketPolicy | deleteBucketPolicy |
| deleteBucketReplicationConfiguration | deleteBucketReplication |
| deleteBucketTaggingConfiguration | deleteBucketTagging |
| deleteBucketWebsiteConfiguration | deleteBucketWebsite |
| deleteObject | deleteObject |
| deleteObjectTagging | deleteObjectTagging |
| deleteObjects | deleteObjects |
| deleteVersion | deleteObject |

| 1.x | 2.x |
| --- | --- |
| disableRequesterPays | putBucketRequestPayment |
| doesBucketExist | headBucket |
| doesBucketExistV2 | headBucket |
| doesObjectExist | headObject |
| enableRequesterPays | putBucketRequestPayment |
| generatePresignedUrl | S3Presigner |
| getBucketAccelerateConfiguration | getBucketAccelerateConfiguration |
| getBucketAcl | getBucketAcl |
| getBucketAnalyticsConfiguration | getBucketAnalyticsConfiguration |
| getBucketCrossOriginConfiguration | getBucketCors |
| getBucketEncryption | getBucketEncryption |
| getBucketInventoryConfiguration | getBucketInventoryConfiguration |
| getBucketLifecycleConfiguration | getBucketLifecycle atau getBucketLifecycleConfiguration |
| getBucketLocation | getBucketLocation |
| getBucketLoggingConfiguration | getBucketLogging |
| getBucketMetricsConfiguration | getBucketMetricsConfiguration |
| getBucketNotificationConfiguration | getBucketNotification atau getBucketNotificationConfiguration |
| getBucketPolicy | getBucketPolicy |

| 1.x | 2.x |
| --- | --- |
| getBucketReplicationConfiguration | getBucketReplication |
| getBucketTaggingConfiguration | getBucketTagging |
| getBucketVersioningConfiguration | getBucketVersioning |
| getBucketWebsiteConfiguration | getBucketWebsite |
| getObject | getObject |
| getObjectAcl | getObjectAcl |
| getObjectAsString | getObjectAsBytes().asUtf8String |
| getObjectMetadata | headObject |
| getObjectTagging | getObjectTagging |
| getResourceUrl | S3Utilities#getUrl |
| getS3AccountOwner | listBuckets |
| getUrl | S3Utilities#getUrl |
| headBucket | headBucket |
| initiateMultipartUpload | createMultipartUpload |
| isRequesterPaysEnabled | getBucketRequestPayment |
| listBucketAnalyticsConfigurations | listBucketAnalyticsConfigurations |
| listBucketInventoryConfigurations | listBucketInventoryConfigurations |
| listBucketMetricsConfigurations | listBucketMetricsConfigurations |

| 1.x | 2.x |
| --- | --- |
| listBuckets | listBuckets |
| listMultipartUploads | listMultipartUploads |
| listNextBatchOfObjects | listObjectsV2Paginator |
| listNextBatchOfVersions | listObjectVersionsPaginator |
| listObjects | listObjects |
| listObjectsV2 | listObjectsV2 |
| listParts | listParts |
| listVersions | listObjectVersions |
| putObject | putObject |
| restoreObject | restoreObject |
| restoreObjectV2 | restoreObject |
| selectObjectContent | selectObjectContent |
| setBucketAccelerateConfiguration | putBucketAccelerateConfiguration |
| setBucketAcl | putBucketAcl |
| setBucketAnalyticsConfiguration | putBucketAnalyticsConfiguration |
| setBucketCrossOriginConfiguration | putBucketCors |
| setBucketEncryption | putBucketEncryption |
| setBucketInventoryConfiguration | putBucketInventoryConfiguration |
| setBucketLifecycleConfiguration | putBucketLifecycle atau putBucketLifecycleConfiguration |

| 1.x | 2.x |
| --- | --- |
| `setBucketLoggingConfiguration` | `putBucketLogging` |
| `setBucketMetricsConfiguration` | `putBucketMetricsConfiguration` |
| `setBucketNotificationConfiguration` | `putBucketNotification` atau `putBucketNotificationConfiguration` |
| `setBucketPolicy` | `putBucketPolicy` |
| `setBucketReplicationConfiguration` | `putBucketReplication` |
| `setBucketTaggingConfiguration` | `putBucketTagging` |
| `setBucketVersioningConfiguration` | `putBucketVersioning` |
| `setBucketWebsiteConfiguration` | `putBucketWebsite` |
| `setObjectAcl` | `putObjectAcl` |
| `setObjectRedirectLocation` | `copyObject` |
| `setObjectTagging` | `putObjectTagging` |
| `uploadPart` | `uploadPart` |

## Amazon SNS berubah

Klien SNS tidak dapat lagi mengakses topik SNS di Wilayah selain Wilayah yang dikonfigurasi untuk diakses.

## Amazon SQS berubah

Klien SQS tidak dapat lagi mengakses antrian SQS di Wilayah selain Wilayah yang dikonfigurasi untuk diakses.

### Amazon RDS berubah

SDK for Java 2.x `RdsUtilities#generateAuthenticationToken` digunakan sebagai pengganti `RdsIamAuthTokenGenerator` kelas di 1.x.

## Perubahan dalam bekerja dengan Amazon S3 dari versi 1 ke versi 2 AWS SDK untuk Java

AWS SDK for Java 2.x Memperkenalkan perubahan signifikan pada klien S3, termasuk struktur paket baru, nama kelas yang diperbarui, dan tanda tangan metode yang direvisi. Meskipun banyak metode dapat dimigrasi secara otomatis dari V1 ke V2 menggunakan alat migrasi, beberapa memerlukan migrasi manual, seperti `listNextBatchOfObjects` dan. `selectObjectContent` Selain itu, V2 menggantikan kelas V1 tertentu seperti `AccessControlList` dan `CannedAccessControlList` dengan implementasi baru.

Topik


- Perbedaan klien S3 antara versi 1 dan versi 2 AWS SDK untuk Java
- Migrasikan Manajer Transfer dari versi 1 ke versi 2 AWS SDK untuk Java
- Perubahan dalam mengurai Amazon URIs S3 dari versi 1 ke versi 2
- Perubahan pada API Pemberitahuan Acara S3 dari versi 1 ke versi 2


### Perbedaan klien S3 antara versi 1 dan versi 2 AWS SDK untuk Java

Dalam topik ini, perbedaan antara klien S3 di versi 1 dan versi 2 SDK for Java diatur oleh bagaimana alat migrasi dapat mengotomatiskan migrasi. Alat ini mendukung migrasi sebagian besar metode dari V1 ke V2, tetapi beberapa metode memerlukan migrasi manual. Selain metode klien S3, beberapa kelas S3 V1 tidak memiliki setara V2 langsung yang mengharuskan Anda untuk memigrasikannya secara manual.

Daftar Isi


- Contoh metode V1 yang didukung oleh alat migrasi
  - putObject
  - getObject
- Metode V1 yang membutuhkan migrasi manual
  - V1 getObject menggunakan V1 S3ObjectId ke V2 GetObjectRequest.builder()

- V1 getETag() menggunakan V1 ObjectMetadata ke V2 GetObjectResponse.eTag()
- V1 listNextBatchOfObjects ke V2 listObjectsV2Paginator
- V1 listNextBatchOfVersions ke V2 listObjectVersionsPaginator
- selectObjectContent
- aclMetode V1 setBucketAcl ke V2 pada PutBucketAclRequest.builder()
- aclMetode V1 setObjectAcl ke V2 pada PutObjectAclRequest.builder()
- V1 initiateMultipartUpload ke V2 createMultipartUpload
  - Contoh migrasi
  - Perbedaan implementasi
- regionMetode V1 setRegion ke V2 pada pembuat klien
- V1 setS3ClientOptions(S3ClientOptions clientOptions)
- V1 setBucketLoggingConfiguration ke V2 putBucketLogging
- V1 setBucketLifecycleConfiguration ke V2 putBucketLifecycleConfiguration
- V1 setBucketTaggingConfiguration ke V2 putBucketTagging
- Kelas V1 yang membutuhkan migrasi manual
  - V1 AccessControlList ke V2 AccessControlPolicy
  - Enum V1 ke V2 dan CannedAccessControlList enum BucketCannedACL ObjectCannedACL
  - V1 BucketNotificationConfiguration ke V2 NotificationConfiguration
  - mfaMetode V1 MultiFactorAuthentication ke V2 pada pembuat permintaan

Contoh metode V1 yang didukung oleh alat migrasi

Alat migrasi secara otomatis memigrasikan sebagian besar metode dari V1 ke V2. Metode `putObject` dan `getObject` metode adalah dua contoh.

**`putObject`**

```
// SDK V1
s3Client.putObject("amzn-s3-demo-bucket", "my-key", "Hello World!");


// SDK V2
s3Client.putObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"),
```

```
    RequestBody.fromString("Hello World!"));
```

### `getObject`

```
// SDK V1
S3Object object = s3Client.getObject("amzn-s3-demo-bucket", "my-key");
InputStream content = object.getObjectContent();


// SDK V2
ResponseInputStream<GetObjectResponse> response = s3Client.getObject(req -> req
    .bucket("amzn-s3-demo-bucket")
    .key("my-key"));
```

Metode V1 yang membutuhkan migrasi manual

Anda perlu memigrasikan metode klien V1 S3 berikut secara manual. Saat Anda menggunakan alat migrasi, Anda melihat komentar di file Java keluaran V2 yang mengarahkan Anda ke topik ini.

V1 **`getObject`** menggunakan V1 **`S3ObjectId`** ke V2 **`GetObjectRequest.builder()`**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
        .withRegion(Regions.US_WEST_2)
        .build();

S3ObjectId s3ObjectId = new S3ObjectId(
    "amzn-s3-demo-bucket",
    "object-key",
    "abc123version"
);

GetObjectRequest getRequest= new GetObjectRequest(s3ObjectId);
S3Object s3ObjectVersioned = s3Client.getObject(getRequest);


// SDK V2
// V2 does not include a 'S3ObjectId' class. V2 uses the request builder pattern
// to supply the bucket, key, and version parameters.
S3Client s3Client = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();
```

```
GetObjectRequest getRequest = GetObjectRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("object-key")
    .versionId("abc123version")
    .build();

ResponseInputStream<GetObjectResponse> response = s3Client.getObject(getRequest);
```

### V1 **getETag()** menggunakan V1 **ObjectMetadata** ke V2 **GetObjectResponse.eTag()**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

S3Object object = s3ClientV1.getObject("amzn-s3-demo-bucket", "my-key");

// Double quotes are removed by the S3 client.
System.out.println(object.getObjectMetadata().getETag());

// SDK V2
S3Client s3ClientV2 = S3Client.builder()
        .region(Region.US_WEST_2)
        .build();

ResponseInputStream<GetObjectResponse> response = s3ClientV2.getObject(
        req -> req.bucket("amzn-s3-demo-bucket").key("my-key"));

// Double quotes are *NOT* removed. This is the unchanged ETag value as S3 sent it.
System.out.println(response.response().eTag());
```

### V1 **listNextBatchOfObjects** ke V2 **listObjectsV2Paginator**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

ObjectListing objectListing = s3ClientV1.listObjects("bucket-name");
while (objectListing.isTruncated()) {
    objectListing = s3ClientV1.listNextBatchOfObjects(objectListing);
    for (S3ObjectSummary summary : objectListing.getObjectSummaries()) {
        System.out.println(summary.getKey());
```

```
    }
}


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

ListObjectsV2Request request = ListObjectsV2Request.builder()
    .bucket("bucket-name")
    .build();

// V2 returns a paginator.
ListObjectsV2Iterable responses = s3Client.listObjectsV2Paginator(request);

for (ListObjectsV2Response page : responses) {
    page.contents().forEach(content -> {
        System.out.println(content.key());
    });
}
```

### V1 **listNextBatchOfVersions** ke V2 **listObjectVersionsPaginator**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

VersionListing versionListing = s3ClientV1.listVersions("bucket-name", "prefix");
while (versionListing.isTruncated()) {
    versionListing = s3ClientV1.listNextBatchOfVersions(versionListing);
    for (S3VersionSummary version : versionListing.getVersionSummaries()) {
        System.out.println(version.getKey() + " " + version.getVersionId());
    }
}


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();
```

```
ListObjectVersionsRequest request = ListObjectVersionsRequest.builder()
    .bucket("bucket-name")
    .prefix("prefix")
    .build();

// V2 returns a paginator.
ListObjectVersionsIterable responses = s3ClientV2.listObjectVersionsPaginator(request);

for (ListObjectVersionsResponse page : responses) {
    page.versions().forEach(version -> {
        System.out.println(version.key() + " " + version.versionId());
    });
}
```

### selectObjectContent

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

SelectObjectContentRequest request = new SelectObjectContentRequest()
    .withBucket("bucket-name")
    .withKey("object-key")
    .withExpression("select * from S3Object")
    .withExpressionType(ExpressionType.SQL)


SelectObjectContentResult result = s3ClientV1.selectObjectContent(request);
InputStream resultInputStream = result.getPayload().getRecordsInputStream();


// SDK V2
// In V2, 'selectObjectContent()' is available only on the S3AsyncClient.
// V2 handles responses using an event-based 'SelectObjectContentEventStream'.
S3AsyncClient s3ClientV2 = S3AsyncClient.builder()
    .region(Region.US_WEST_2)
    .build();

SelectObjectContentRequest request = SelectObjectContentRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .expression("select * from S3Object")
```

```
    .expressionType(ExpressionType.SQL)
    .build();

SelectObjectContentResponseHandler handler = new SelectObjectContentResponseHandler() {
    // Implement the required abstract methods such as 'onEventStream()'.
};

CompletableFuture<Void> future = s3ClientV2.selectObjectContent(request, handler);
// The 'SelectObjectContentResponseHandler' implementation processes the results.
```

### **acl**Metode V1 **setBucketAcl** ke V2 pada **PutBucketAclRequest.builder()**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

AccessControlList acl = new AccessControlList();
acl.grantPermission(GroupGrantee.AllUsers, Permission.Read);
s3ClientV1.setBucketAcl("bucket-name", acl);


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutBucketAclRequest request = PutBucketAclRequest.builder()
    .bucket("bucket-name")
    .acl(BucketCannedACL.PRIVATE)
    .build();

s3ClientV2.putBucketAcl(request);
```

### **acl**Metode V1 **setObjectAcl** ke V2 pada **PutObjectAclRequest.builder()**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

AccessControlList acl = new AccessControlList();
acl.grantPermission(GroupGrantee.AllUsers, Permission.Read);
```

```
s3ClientV1.setObjectAcl("bucket-name", "object-key", acl);


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutObjectAclRequest request = PutObjectAclRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .acl(ObjectCannedACL.PRIVATE)
    .build();

s3ClientV2.putObjectAcl(request);
```

### V1 **initiateMultipartUpload** ke V2 **createMultipartUpload**

#### Contoh migrasi

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

ObjectMetadata metadata = new ObjectMetadata();
metadata.setContentType("application/zip");
metadata.addUserMetadata("mykey", "myvalue");

InitiateMultipartUploadRequest initRequest = new InitiateMultipartUploadRequest(
    "bucket-name",
    "object-key",
    metadata
);

InitiateMultipartUploadResult initResponse =
 s3ClientV1.initiateMultipartUpload(initRequest);
String uploadId = initResponse.getUploadId();


// SDK V2
// V1 uses ObjectMetadata methods, whereas V2 uses a simple Map.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
```

```
    .build();

CreateMultipartUploadRequest createMultipartRequest =
 CreateMultipartUploadRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .key("object-key")
    .contentType("application/zip")
    .metadata(Collections.singletonMap("mykey", "myvalue"))
    .build();

CreateMultipartUploadResponse response =
 s3ClientV2.createMultipartUpload(createMultipartRequest);
String uploadId = response.uploadId();
```

Perbedaan implementasi

Nilai `Content-Type` header default untuk metode berikut berbeda seperti yang ditunjukkan pada tabel berikut.

| Versi SDK | Metode | **`Content-Type`** Nilai default |
|---|---|---|
| versi 1 | initiateMultipartUpload | `application/octet-stream` |
| versi 2 | createMultipartUpload | `binary/octet-stream` |

**`region`**Metode V1 **`setRegion`** ke V2 pada pembuat klien

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard().build();
s3ClientV1.setRegion(Region.getRegion(Regions.US_WEST_2));


// SDK V2
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();
```

### V1 **setS3ClientOptions(S3ClientOptions clientOptions)**

Alih-alih menggunakan satu `S3ClientOptions` objek dengan `setS3ClientOptions` metode ini, V2 menyediakan metode pada pembuat klien untuk mengatur opsi.

### V1 **setBucketLoggingConfiguration** ke V2 **putBucketLogging**

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
    .build();

BucketLoggingConfiguration loggingConfig = new BucketLoggingConfiguration();
loggingConfig.setDestinationBucketName("log-bucket");

SetBucketLoggingConfigurationRequest request = new
 SetBucketLoggingConfigurationRequest(
    "amzn-s3-demo-source-bucket",
    loggingConfig
);

s3ClientV1.setBucketLoggingConfiguration(request);


// SDK V2
// In V2, V1's 'BucketLoggingConfiguration' is replaced by 'BucketLoggingStatus'
// and 'LoggingEnabled'.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

LoggingEnabled loggingEnabled = LoggingEnabled.builder()
    .targetBucket("log-bucket")
    .build();

BucketLoggingStatus loggingStatus = BucketLoggingStatus.builder()
    .loggingEnabled(loggingEnabled)
    .build();

PutBucketLoggingRequest request = PutBucketLoggingRequest.builder()
    .bucket("amzn-s3-demo-source-bucket")
    .bucketLoggingStatus(loggingStatus)
    .build();
```

```
s3ClientV2.putBucketLogging(request);
```

### V1 **setBucketLifecycleConfiguration** ke V2 **putBucketLifecycleConfiguration**

```
// SDK V1
BucketLifecycleConfiguration.Rule rule = new BucketLifecycleConfiguration.Rule()
    .withId("Archive and Delete Rule")
    .withPrefix("documents/")
    .withStatus(BucketLifecycleConfiguration.ENABLED)
    .withTransitions(Arrays.asList(
        new Transition()
            .withDays(30)
            .withStorageClass(StorageClass.StandardInfrequentAccess.toString()),
        new Transition()
            .withDays(90)
            .withStorageClass(StorageClass.Glacier.toString())
    ))
    .withExpirationInDays(365);

BucketLifecycleConfiguration configuration = new BucketLifecycleConfiguration()
    .withRules(Arrays.asList(rule));

s3ClientV1.setBucketLifecycleConfiguration("amzn-s3-demo-bucket", configuration);


// SDK V2
LifecycleRule rule = LifecycleRule.builder()
    .id("Archive and Delete Rule")
    .filter(LifecycleRuleFilter.builder()
        .prefix("documents/")
        .build())
    .status(ExpirationStatus.ENABLED)
    .transitions(Arrays.asList(
        Transition.builder()
            .days(30)
            .storageClass(TransitionStorageClass.STANDARD_IA)
            .build(),
        Transition.builder()
            .days(90)
            .storageClass(TransitionStorageClass.GLACIER)
            .build()
    ))
    .expiration(LifecycleExpiration.builder()
```

```
        .days(365)
        .build())
    .build();

PutBucketLifecycleConfigurationRequest request =
 PutBucketLifecycleConfigurationRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .lifecycleConfiguration(BucketLifecycleConfiguration.builder()
        .rules(rule)
        .build())
    .build();

s3ClientV2.putBucketLifecycleConfiguration(request);
```

### V1 **setBucketTaggingConfiguration** ke V2 **putBucketTagging**

```
// SDK V1
List<TagSet> tagsets = new ArrayList<>();
TagSet tagSet = new TagSet();
tagSet.setTag("key1", "value1");
tagSet.setTag("key2", "value2");
tagsets.add(tagSet);

BucketTaggingConfiguration bucketTaggingConfiguration = new
 BucketTaggingConfiguration();
bucketTaggingConfiguration.setTagSets(tagsets);

SetBucketTaggingConfigurationRequest request = new
 SetBucketTaggingConfigurationRequest(
    "amzn-s3-demo-bucket",
    bucketTaggingConfiguration
);

s3ClientV1.setBucketTaggingConfiguration(request);


// SDK V2
Tagging tagging = Tagging.builder()
    .tagSet(Arrays.asList(
        Tag.builder()
            .key("key1")
            .value("value1")
            .build(),
```

```
        Tag.builder()
            .key("key2")
            .value("value2")
            .build()
    ))
    .build();

PutBucketTaggingRequest request = PutBucketTaggingRequest.builder()
    .bucket("amzn-s3-demo-bucket")
    .tagging(tagging)
    .build();

s3ClientV2.putBucketTagging(request);
```

### Kelas V1 yang membutuhkan migrasi manual

#### V1 **`AccessControlList`** ke V2 **`AccessControlPolicy`**

```
// SDK V1
AccessControlList aclV1 = new AccessControlList();
aclV1.setOwner(new Owner("owner-id", "owner-name"));
aclV1.grantPermission(GroupGrantee.AllUsers, Permission.Read);

// SDK V2
// To migrate from V1 to V2, replace direct 'AccessControlList' modifications with an
// 'AccessControlPolicy.builder()' that contains both owner information and grants.
// Note that V2's approach requires building the complete permission set upfront rather
 than modifying permissions incrementally.
AccessControlPolicy acpV2 = AccessControlPolicy.builder()
    .owner(Owner.builder()
        .id("owner-id")
        .displayName("owner-name")
        .build())
    .grants(Arrays.asList(
         Grant.builder()
            .grantee(Grantee.builder()
                 .type(Type.GROUP)
                 .uri("http://acs.amazonaws.com/groups/global/AllUsers")
                 .build())
             .permission(Permission.READ)
             .build()
     ))
     .build();
```

### Enum V1 ke V2 dan **CannedAccessControlList** enum **BucketCannedACL ObjectCannedACL**

```
// SDK V1
// In V1, 'CannedAccessControlList' is an enumeration of predefined ACLs.
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard().build();

// Creating a bucket.
s3ClientV1.setBucketAcl("bucket-name", CannedAccessControlList.PublicRead);

// Creating an object.
PutObjectRequest putObjectRequest = new PutObjectRequest("bucket-name", "object-key",
 file)
    .withCannedAcl(CannedAccessControlList.PublicRead);
s3ClientV1.putObject(putObjectRequest);


// SDK V2
// V2 replaces V1's 'CannedAccessControlList' with 'BucketCannedACL' for buckets and
 'ObjectCannedACL' for objects.
S3Client s3ClientV2 = S3Client.builder().build();

// Creating a bucket.
PutBucketAclRequest bucketRequest = PutBucketAclRequest.builder()
    .bucket("bucket-name")
    .acl(BucketCannedACL.PRIVATE)
    .build();
s3ClientV2.putBucketAcl(bucketRequest);

// Creating an object.
PutObjectRequest objectRequest = PutObjectRequest.builder()
    .bucket("bucket-name")
    .key("object-key")
    .acl(ObjectCannedACL.PUBLIC_READ)
    .build();
s3ClientV2.putObject(objectRequest, RequestBody.fromFile(file));
```

### V1 **BucketNotificationConfiguration** ke V2 **NotificationConfiguration**

```
//SDK V1
BucketNotificationConfiguration notificationConfig = new
 BucketNotificationConfiguration();

// Adding configurations by name
```

```
notificationConfig.addConfiguration("lambdaConfig",
    new LambdaConfiguration("arn:aws:lambda:function", "s3:ObjectCreated:"));

notificationConfig.addConfiguration("topicConfig",
    new TopicConfiguration("arn:aws:sns:topic", "s3:ObjectRemoved:"));

notificationConfig.addConfiguration("queueConfig",
    new QueueConfiguration("arn:aws:sqs:queue", "s3:ObjectRestore:*"));

s3Client.setBucketNotificationConfiguration("bucket", notificationConfig);


// SDK V2
// In V2, V1's BucketNotificationConfiguration is renamed to
 NotificationConfiguration.
// V2 contains no common abstract class for LambdaFunction/Topic/Queue configurations.
NotificationConfiguration notificationConfig = NotificationConfiguration.builder()
    .lambdaFunctionConfigurations(
        LambdaFunctionConfiguration.builder()
            .lambdaFunctionArn("arn:aws:lambda:function")
            .events(Event.valueOf("s3:ObjectCreated:"))
            .build())
    .topicConfigurations(
        TopicConfiguration.builder()
            .topicArn("arn:aws:sns:topic")
            .events(Event.valueOf("s3:ObjectRemoved:"))
            .build())
    .queueConfigurations(
        QueueConfiguration.builder()
            .queueArn("arn:aws:sqs:queue")
            .events(Event.valueOf("s3:ObjectRestore:*"))
            .build())
    .build();

s3Client.putBucketNotificationConfiguration(req -> req
    .bucket("bucket")
    .notificationConfiguration(notificationConfig));
```

### **mfa**Metode V1 **MultiFactorAuthentication** ke V2 pada pembuat permintaan

```
// SDK V1
AmazonS3 s3ClientV1 = AmazonS3ClientBuilder.standard()
    .withRegion(Regions.US_WEST_2)
```

```
    .build();

BucketVersioningConfiguration versioningConfig = new BucketVersioningConfiguration()
    .withStatus(BucketVersioningConfiguration.ENABLED);

// Create an MFA configuration object.
MultiFactorAuthentication mfa = new MultiFactorAuthentication(
    "arn:aws:iam::1234567890:mfa/user",
    "123456"
);

// Create the request object.
SetBucketVersioningConfigurationRequest request = new
 SetBucketVersioningConfigurationRequest(
    "bucket-name",
    versioningConfig,
    mfa
);

// Send the request.
s3ClientV1.setBucketVersioningConfiguration(request);


// SDK V2
// V2 replaces V1's MultiFactorAuthentication POJO with parameters you set on the
 request builder.
S3Client s3ClientV2 = S3Client.builder()
    .region(Region.US_WEST_2)
    .build();

PutBucketVersioningRequest request = PutBucketVersioningRequest.builder()
    .bucket("bucket-name")
    .versioningConfiguration(VersioningConfiguration.builder()
        .status(BucketVersioningStatus.ENABLED)
        .build())
    .mfa("arn:aws:iam::1234567890:mfa/user 123456")  // Single method takes both MFA
 erial number and token.
    .build();

s3ClientV2.putBucketVersioning(request);
```

# Migrasikan Manajer Transfer dari versi 1 ke versi 2 AWS SDK untuk Java

Panduan migrasi ini mencakup perbedaan utama antara Transfer Manager v1 dan S3 Transfer Manager v2, termasuk perubahan konstruktor, pemetaan metode, dan contoh kode untuk operasi umum. Setelah meninjau perbedaan ini, Anda dapat berhasil memigrasikan kode Transfer Manager yang ada untuk memanfaatkan peningkatan kinerja dan operasi asinkron di v2.

⚠ Tentang alat migrasi AWS SDK

AWS SDK untuk Java Ini menyediakan alat migrasi otomatis yang dapat memigrasikan sebagian besar API Manajer Transfer v1 ke v2. Namun, alat migrasi tidak mendukung beberapa fitur Manajer Transfer v1. Untuk kasus ini, Anda perlu memigrasikan kode Transfer Manager secara manual menggunakan panduan dalam topik ini.
Sepanjang panduan ini, Status Migrasi menunjukkan apakah alat migrasi dapat secara otomatis memigrasikan konstruktor, metode, atau fitur:

- Didukung: Alat migrasi dapat secara otomatis mengubah kode ini
- Tidak Didukung: Anda perlu memigrasi kode secara manual

Bahkan untuk item yang ditandai sebagai “Didukung,” tinjau hasil migrasi dan uji secara menyeluruh. Migrasi Transfer Manager melibatkan perubahan arsitektur yang signifikan dari operasi sinkron ke asinkron.

## Ikhtisar

S3 Transfer Manager v2 memperkenalkan perubahan signifikan pada Transfer Manager API. S3 Transfer Manager v2 dibangun di atas operasi asinkron dan memberikan kinerja yang lebih baik, terutama ketika Anda menggunakan klien Amazon S3 berbasis CRT AWS .

## Perbedaan utama

- Package: `com.amazonaws.services.s3.transfer` → `software.amazon.awssdk.transfer.s3`
- Nama kelas: `TransferManager` → `S3TransferManager`
- Ketergantungan klien: Klien Amazon S3 sinkron → Klien Amazon S3 asinkron () `S3AsyncClient`
- Arsitektur: Operasi sinkron → Operasi asinkron dengan `CompletableFuture`
- Kinerja: Ditingkatkan dengan dukungan AWS klien berbasis CRT

## Perubahan tingkat tinggi

| Aspek | V1 | V2 |
| --- | --- | --- |
| Ketergantungan Maven | `aws-java-sdk-s3` | `s3-transfer-manager` |
| Package | `com.amazonaws.services.s3.transfer` | `software.amazon.awssdk.transfer.s3` |
| Kelas utama | `TransferManager` | `S3TransferManager` |
| Klien Amazon S3 | `AmazonS3`(sinkronisasi) | `S3AsyncClient` (asinkron) |
| Jenis pengembalian | Operasi pemblokiran | `CompletableFuture<T>` |

## Ketergantungan Maven

**V1**

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>com.amazonaws</
groupId>
            <artifactId>aws-java-sdk-
bom</artifactId>
            <version>> 1.12.787[1]</
version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>com.amazonaws</gro
upId>
        <artifactId>aws-java-sdk-s3
</artifactId>
    </dependency>
```

**V2**

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>software.
amazon.awssdk</groupId>
            <artifactId>bom</a
rtifactId>
            <version> 2.31.68[2]</version
>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<dependencies>
    <dependency>
        <groupId>software.amazon.aw
ssdk</groupId>
        <artifactId>s3-transfer-man
ager</artifactId>
    </dependency>
```

| V1 | V2 |
| --- | --- |
| `</dependencies>` | `<!-- Optional: For enhanced performance with AWS CRT --> <dependency> <groupId>software.amazon.awssdk.crt</groupId> <artifactId>aws-crt</artifactId> <version> 0.38.5[3]</version> </dependency> </dependencies>` |

[1] Versi terbaru. [2] Versi terbaru. [3] Versi terbaru.

Migrasi konstruktor klien

Konstruktor yang didukung (migrasi otomatis)

| V1 konstruktor | V2 setara | Status migrasi |
| --- | --- | --- |
| `new TransferManager()` | `S3TransferManager.create()` | Didukung |
| `TransferManagerBuilder.defaultTransferManager()` | `S3TransferManager.create()` | Didukung |
| `TransferManagerBuilder.standard().build()` | `S3TransferManager.builder().build()` | Didukung |
| `new TransferManager(AWSCredentials)` | `S3TransferManager.builder() .s3Client(S3AsyncClient.builder() .credentialsProvider(...).build()) .build()` | Didukung |
| `new TransferManager( AWSCredentialsProvider)` | `S3TransferManager.builder() .s3Clien` | Didukung |

| V1 konstruktor | V2 setara | Status migrasi |
| --- | --- | --- |
| | `t(S3AsyncClient.bu ilder() .credentia lsProvider(...).bu ild()) .build()` | |

Konstruktor yang tidak didukung (diperlukan migrasi manual)

| V1 konstruktor | V2 setara | Catatan migrasi |
| --- | --- | --- |
| `new TransferManager(Am azonS3)` | Migrasi manual diperlukan | Buat secara `S3AsyncClient` terpisah |
| `new TransferManager(Am azonS3, ExecutorService)` | Migrasi manual diperlukan | Buat `S3AsyncClient` dan konfigurasikan eksekutor |
| `new TransferManager(Am azonS3, ExecutorService, boolean)` | Migrasi manual diperlukan | `shutDownThreadPool s` parameter tidak didukung |

Contoh migrasi manual

Kode V1:

```
AmazonS3 s3Client = AmazonS3ClientBuilder.defaultClient();
TransferManager transferManager = new TransferManager(s3Client);
```

Kode V2:

```
// Create an `S3AsyncClient` with similar configuration
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
    .credentialsProvider(DefaultCredentialsProvider.create())
    .build();

// Provide the configured `S3AsyncClient` to the S3 transfer manager builder.
S3TransferManager transferManager = S3TransferManager.builder()
    .s3Client(s3AsyncClient)
```

```
    .build();
```

Migrasi metode klien

Saat ini, alat migrasi mendukung dasar `copy`download`,`upload`,`uploadDirectory`,`downloadDirectory`,`resumeDownload`, dan `resumeUpload` metode.

Metode transfer inti

| Metode V1 | Metode V2 | Kembalikan perubahan tipe | Status migrasi |
|---|---|---|---|
| `upload(String, String, File)` | `uploadFile(UploadFileRequest)` | `Upload` → `FileUpload` | Didukung |
| `upload(PutObjectRequest)` | `upload(UploadRequest)` | `Upload` → `Upload` | Didukung |
| `download(String, String, File)` | `downloadFile(DownloadFileRequest)` | `Download` → `FileDownload` | Didukung |
| `download(GetObjectRequest, File)` | `downloadFile(DownloadFileRequest)` | `Download` → `FileDownload` | Didukung |
| `copy(String, String, String, String)` | `copy(CopyRequest)` | `Copy` → `Copy` | Didukung |
| `copy(CopyObjectRequest)` | `copy(CopyRequest)` | `Copy` → `Copy` | Didukung |
| `uploadDirectory(String, String, File, boolean)` | `uploadDirectory( UploadDirectoryRequest)` | `MultipleFileUpload` → `DirectoryUpload` | Didukung |
| `downloadDirectory(String, String, File)` | `downloadDirectory( DownloadDirectoryRequest)` | `MultipleFileDownload` | Didukung |

| Metode V1 | Metode V2 | Kembalikan perubahan tipe | Status migrasi |
|---|---|---|---|
| | | → `Directory Download` | |

Metode transfer yang dapat dilanjutkan

| Metode V1 | Metode V2 | Status migrasi |
|---|---|---|
| `resumeUpload(PersistableUpload)` | `resumeUploadFile(ResumableFileUpload)` | Didukung |
| `resumeDownload(PersistableDownload)` | `resumeDownloadFile(ResumableFileDownload)` | Didukung |

Metode siklus hidup

| Metode V1 | Metode V2 | Status migrasi |
|---|---|---|
| `shutdownNow()` | `close()` | Didukung |
| `shutdownNow(boolean)` | Sesuaikan kode secara manual menggunakan `close()` metode | Tidak Didukung |

Metode klien V1 yang tidak didukung

| Metode V1 | V2 alternatif | Catatan |
|---|---|---|
| `abortMultipartUploads(String, Date)` | Gunakan klien Amazon S3 tingkat rendah | Tidak Didukung |
| `getAmazonS3Client()` | Simpan referensi secara terpisah | Tidak Didukung; tidak ada pengambil di v2 |

| Metode V1 | V2 alternatif | Catatan |
| --- | --- | --- |
| `getConfiguration()` | Simpan referensi secara terpisah | Tidak Didukung; tidak ada pengambil di v2 |
| `uploadFileList(...)` | Lakukan beberapa `uploadFile()` panggilan | Tidak Didukung |
| `copy`metode dengan `TransferStateChangeListener` parameter | Gunakan `TransferListener` | Lihat contoh migrasi manual |
| `download`metode dengan `S3ProgressListener` parameter | Gunakan `TransferListener` | Lihat contoh migrasi manual |
| `downloadDirectory` metode dengan 4 atau lebih parameter | | Lihat contoh migrasi manual |
| `upload`metode dengan `ObjectMetadataProvider` parameter | Tetapkan metadata dalam permintaan | Lihat contoh migrasi manual |
| `uploadDirectory` metode dengan `*Provider` parameter | Tetapkan tag dalam permintaan | Lihat contoh migrasi manual |

**`copy`**metode dengan **`TransferStateChangeListener`** parameter

- `copy(CopyObjectRequest copyObjectRequest, AmazonS3 srcS3, TransferStateChangeListener stateChangeListener)`
- `copy(CopyObjectRequest copyObjectRequest, TransferStateChangeListener stateChangeListener)`

```
// V1
 ---------------------------------------------------------------------------------------------
// Initialize source S3 client
```

```
AmazonS3 s3client = AmazonS3ClientBuilder.standard()
                .withRegion("us-west-2")
                .build();

// Initialize Transfer Manager
TransferManager tm = TransferManagerBuilder.standard()
                .withS3Client(srcS3)
                .build();

CopyObjectRequest copyObjectRequest = new CopyObjectRequest(
                "amzn-s3-demo-source-bucket",
                "source-key",
                "amzn-s3-demo-destination-bucket",
                "destination-key"
        );

TransferStateChangeListener stateChangeListener = new TransferStateChangeListener() {
            @Override
            public void transferStateChanged(Transfer transfer, TransferState state) {
              //Implementation of the TransferStateChangeListener
            }
        };

Copy copy = tm.copy(copyObjectRequest, srcS3, stateChangeListener);


// V2
 ---------------------------------------------------------------------------------------------
S3AsyncClient s3AsyncClient = S3AsyncClient.builder()
                .region(Region.US_WEST_2)
                .build();

S3TransferManager transferManager = S3TransferManager.builder()
                .s3Client(s3AsyncClient)
                .build();

// Create transfer listener (equivalent to TransferStateChangeListener in v1)

TransferListener transferListener = new TransferListener() {
            @Override
            public void transferInitiated(Context.TransferInitiated context) {
               //Implementation
               System.out.println("Transfer initiated");
            }
```

```
            @Override
            public void bytesTransferred(Context.BytesTransferred context) {
                //Implementation
                System.out.println("Bytes transferred");
            }

            @Override
            public void transferComplete(Context.TransferComplete context) {
                //Implementation
                System.out.println("Transfer completed!");
            }

            @Override
            public void transferFailed(Context.TransferFailed context) {
                //Implementation
                System.out.println("Transfer failed");
            }
        };

CopyRequest copyRequest = CopyRequest.builder()
                            .copyObjectRequest(req -> req
                                .sourceBucket("amzn-s3-demo-source-bucket")
                                .sourceKey("source-key")
                                .destinationBucket("amzn-s3-demo-destination-bucket")
                                .destinationKey("destination-key")
                             )
                              .addTransferListener(transferListener) // Configure the
 transferListener into the request
                              .build();

Copy copy = transferManager.copy(copyRequest);
```

**`download`**metode dengan **`S3ProgressListener`** parameter

- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener)`
- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener, long timeoutMillis)`
- `download(GetObjectRequest getObjectRequest, File file, S3ProgressListener progressListener, long timeoutMillis, boolean resumeOnRetry)`

```
// V1
 ----------------------------------------------------------------------------------------------------
S3ProgressListener progressListener = new S3ProgressListener() {
        @Override
        public void progressChanged(com.amazonaws.event.ProgressEvent progressEvent) {
            long bytes = progressEvent.getBytesTransferred();
            ProgressEventType eventType = progressEvent.getEventType();
            // Use bytes and eventType as needed
        }

        @Override
        public void onPersistableTransfer(PersistableTransfer persistableTransfer) {

        }
    };

Download download1 = tm.download(getObjectRequest, file, progressListener);
Download download2 = tm.download(getObjectRequest, file, progressListener,
 timeoutMillis)
Download download3 = tm.download(getObjectRequest, file, progressListener,
 timeoutMillis, true)

// V2
 ----------------------------------------------------------------------------------------------------
TransferListener transferListener = new TransferListener() {
    @Override
    public void transferInitiated(Context.InitializedContext context) {
        // Equivalent to ProgressEventType.TRANSFER_STARTED_EVENT
        System.out.println("Transfer initiated");
    }

    @Override
    public void bytesTransferred(Context.BytesTransferred context) {
        // Equivalent to ProgressEventType.REQUEST_BYTE_TRANSFER_EVENT
        long bytes = context.bytesTransferred();
        System.out.println("Bytes transferred: " + bytes);
    }

    @Override
    public void transferComplete(Context.TransferComplete context) {
        // Equivalent to ProgressEventType.TRANSFER_COMPLETED_EVENT
        System.out.println("Transfer completed");
    }
```

```
    @Override
    public void transferFailed(Context.TransferFailed context) {
        // Equivalent to ProgressEventType.TRANSFER_FAILED_EVENT
        System.out.println("Transfer failed: " + context.exception().getMessage());
    }
};
DownloadFileRequest downloadFileRequest =
                        DownloadFileRequest.builder()
                            .getObjectRequest(getObjectRequest)
                            .destination(file.toPath())
                            .addTransferListener(transferListener)
                            .build();

// For download1
FileDownload download = transferManager.downloadFile(downloadFileRequest);

// For download2
CompletedFileDownload completedFileDownload = download.completionFuture()
                                                      .get(timeoutMillis,
 TimeUnit.MILLISECONDS);

// For download3, the v2 SDK does not have a direct equiavalent to the `resumeOnRetry`
 method of v1.
// If a download is interrupted, you need to start a new download request.
```

**`downloadDirectory`**metode dengan 4 atau lebih parameter

- downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, boolean resumeOnRetry)
- downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, boolean resumeOnRetry, KeyFilter filter)
- downloadDirectory(String bucketName, String keyPrefix, File destinationDirectory, KeyFilter filter)

```
// V1
 ----------------------------------------------------------------------------------------
KeyFilter filter = new KeyFilter() {
            @Override
            public boolean shouldInclude(S3ObjectSummary objectSummary) {
                //Filter implementation
```

```
            }
        };
MultipleFileDownload multipleFileDownload = tm.downloadDirectory(bucketName, keyPrefix,
 destinationDirectory, filter);

// V2
 ----------------------------------------------------------------------------------------
// The v2 SDK does not have a direct equiavalent to the `resumeOnRetry` method of v1.
// If a download is interrupted, you need to start a new download request.
DownloadFilter filter = new DownloadFilter() {
            @Override
            public boolean test(S3Object s3Object) {
                // Filter implementation.
            }
        };

DownloadDirectoryRequest downloadDirectoryRequest =
                               DownloadDirectoryRequest.builder()
                                   .bucket(bucketName)
                                   .filter(filter)
                                   .listObjectsV2RequestTransformer(builder ->
 builder.prefix(keyPrefix))
                                   .destination(destinationDirectory.toPath())
                                   .build();

DirectoryDownload directoryDownload =
 transferManager.downloadDirectory(downloadDirectoryRequest);
```

### **upload**metode dengan **ObjectMetadata** parameter

- upload(String bucketName, String key, InputStream input, ObjectMetadata objectMetadata)

```
// V1
 ----------------------------------------------------------------------------------------
ObjectMetadata metadata = new ObjectMetadata();
ObjectMetadata metadata = new ObjectMetadata();

metadata.setContentType("text/plain");        // System-defined metadata
metadata.setContentLength(22L);               // System-defined metadata
metadata.addUserMetadata("myKey", "myValue"); // User-defined metadata
```

```
PutObjectRequest putObjectRequest = new PutObjectRequest(bucketName, key, inputStream,
 metadata);

Upload upload = transferManager.upload("amzn-s3-demo-bucket", "my-key", inputStream,
 metadata);

// V2
 ---------------------------------------------------------------------------------------
/* When you use an InputStream to upload in V2, you should specify the content length
   and use `RequestBody.fromInputStream()`.
   If you don't provide the content length, the entire stream will be buffered in
 memory.
   If you can't determine the content length, we recommend using the CRT-based S3
 client.
*/
Map<String, String> userMetadata = new HashMap<>();
userMetadata.put("x-amz-meta-myKey", "myValue");

PutObjectRequest putObjectRequest =
                        PutObjectRequest.builder()
                            .bucket("amzn-s3-demo-bucket1")
                            .key("k")
                            .contentType("text/plain") //System-defined metadata
 usually has separate methods in the builder.
                            .contentLength(22L)
                            .metadata(userMetadata) //metadata() is only for user-
defined metadata.
                            .build();

UploadRequest uploadRequest =
                        UploadRequest.builder()
                            .putObjectRequest(putObjectRequest)
                            .requestBody(AsyncRequestBody.fromInputStream(stream, 22L,
 executor))
                            .build();

transferManager.upload(uploadRequest).completionFuture().join();
```

### **uploadDirectory**dengan **ObjectMetadataProvider** parameter

- `uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider metadataProvider)`

- uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider metadataProvider, ObjectTaggingProvider taggingProvider)
- uploadDirectory(String bucketName, String virtualDirectoryKeyPrefix, File directory, boolean includeSubdirectories, ObjectMetadataProvider metadataProvider, ObjectTaggingProvider taggingProvider, ObjectCannedAclProvider cannedAclProvider)

```
// V1
 ----------------------------------------------------------------------------------------------------
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider)
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider, taggingProvider)
tm.uploadDirectory(bucketName, virtualDirectoryKeyPrefix, directory,
 includeSubdirectories, metadataProvider, taggingProvider, cannedAclProvider)

// V2
 ----------------------------------------------------------------------------------------------------
UploadDirectoryRequest request = UploadDirectoryRequest.builder()
                                    .bucket(bucketName)
                                    .s3Prefix(virtualDirectoryKeyPrefix)
                                    .source(directory.toPath())
                                    .maxDepth(includeSubdirectories ? Integer.MAX_VALUE :
 1)
                                    .uploadFileRequestTransformer(builder -> {
                                        // 1.Replace `ObjectMetadataProvider`,
 `ObjectTaggingProvider`, and `ObjectCannedAclProvider` with an
                                          // `UploadFileRequestTransformer` that can
 combine the functionality of all three *Provider implementations.
                                          // 2. Convert your v1 `ObjectMetadata` to v2
 `PutObjectRequest` parameters.
                                          // 3. Convert your v1 `ObjectTagging` to v2
 `Tagging`.
                                          // 4. Convert your v1 `CannedAccessControlList`
 to v2 `ObjectCannedACL`.
                                    })
                                    .build();

DirectoryUpload directoryUpload = transferManager.uploadDirectory(request);
```

Migrasi objek model

Pada tahun AWS SDK for Java 2.x, banyak objek `TransferManager` model telah didesain ulang, dan beberapa metode pengambil dan penyetel yang tersedia di objek model v1 tidak lagi didukung.

Di v2, Anda dapat menggunakan `CompletableFuture<T>` kelas untuk melakukan tindakan saat transfer selesai — baik berhasil atau dengan pengecualian. Anda dapat menggunakan `join()` metode ini untuk menunggu penyelesaian jika diperlukan.

Objek transfer inti

| Kelas V1 | Kelas V2 | Status migrasi |
|---|---|---|
| `TransferManager` | `S3TransferManager` | Didukung |
| `TransferManagerBuilder` | `S3TransferManager.Builder` | Didukung |
| `Transfer` | `Transfer` | Didukung |
| `AbortableTransfer` | `Transfer` | Didukung (tidak ada kelas terpisah) |
| `Copy` | `Copy` | Didukung |
| `Download` | `FileDownload` | Didukung |
| `Upload` | `Upload` / `FileUpload` | Didukung |
| `MultipleFileDownload` | `DirectoryDownload` | Didukung |
| `MultipleFileUpload` | `DirectoryUpload` | Didukung |

Objek ketekunan

| Kelas V1 | Kelas V2 | Status migrasi |
|---|---|---|
| `PersistableDownload` | `ResumableFileDownload` | Didukung |

| Kelas V1 | Kelas V2 | Status migrasi |
| --- | --- | --- |
| `PersistableUpload` | `ResumableFileUpload` | Didukung |
| `PersistableTransfer` | `ResumableTransfer` | Didukung |
| `PauseResult<T>` | Objek langsung yang dapat dilanjutkan | Tidak Didukung |

Objek hasil

| Kelas V1 | Kelas V2 | Status migrasi |
| --- | --- | --- |
| `CopyResult` | `CompletedCopy` | Didukung |
| `UploadResult` | `CompletedUpload` | Didukung |

Objek konfigurasi

| Kelas V1 | Kelas V2 | Status migrasi |
| --- | --- | --- |
| `TransferManagerConfiguration` | `MultipartConfiguration` (di klien Amazon S3) | Didukung |
| `TransferProgress` | `TransferProgress` + `TransferProgressSnapshot` | Didukung |
| `KeyFilter` | `DownloadFilter` | Didukung |

Objek yang tidak didukung

| Kelas V1 | V2 alternatif | Status migrasi |
| --- | --- | --- |
| `PauseStatus` | Tidak didukung | Tidak Didukung |

| Kelas V1 | V2 alternatif | Status migrasi |
| --- | --- | --- |
| `UploadContext` | Tidak didukung | Tidak Didukung |
| `ObjectCannedAclProvider` | `PutObjectRequest.builder().acl()` | Tidak Didukung |
| `ObjectMetadataProvider` | `PutObjectRequest.builder().metadata()` | Tidak Didukung |
| `ObjectTaggingProvider` | `PutObjectRequest.builder().tagging()` | Tidak Didukung |
| `PresignedUrlDownload` | Tidak didukung | Tidak Didukung |

TransferManagerBuilder migrasi konfigurasi

Perubahan konfigurasi

Perubahan konfigurasi yang perlu Anda atur untuk manajer transfer v2 bergantung pada klien S3 mana yang Anda gunakan. Anda memiliki pilihan klien S3 AWS berbasis CRT atau klien async S3 berbasis Java standar. Untuk informasi tentang perbedaan, lihat the section called “Klien S3 di SDK” topiknya.

Use the AWS CRT-based S3 client

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien AWS S3 berbasis CRT |
| --- | --- | --- |
| (dapatkan pembangun) | `TransferManagerBuilder tmBuilder = TransferManagerBuilder.standard();` | `S3TransferManager.Builder tmBuilder = S3TransferManager.builder();` |
| Klien S3 | `tmBuilder.withS3Client(...);` | `tmBuilder.s3Client(...);` |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien AWS S3 berbasis CRT |
| --- | --- | --- |
| | `tmBuilder.setS3Client(...);` | |
| Pelaksana | `tmBuilder.withExecutorFactory(...);`<br>`tmBuilder.setExecutorFactory(...);` | `tmBuilder.executor(...);` |
| Shutdown thread pool | `tmBuilder.withShutDownThreadPools(...);`<br>`tmBuilder.setShutdownThreadPools(...);` | Tidak didukung. Pelaksana yang disediakan tidak akan dimatikan saat `S3TransferManager` ditutup |
| Ukuran bagian unggahan minimum | `tmBuilder.withMinimumUploadPartSize(...);`<br>`tmBuilder.setMinimumUploadPartSize(...);` | `S3AsyncClient s3 = S3AsyncClient.crtBuilder().minimumPartSizeInBytes(...).build();`<br><br>`tmBuilder.s3Client(s3);` |
| Ambang batas unggahan multipart | `tmBuilder.withMultipartUploadThreshold(...);`<br>`tmBuilder.setMultipartUploadThreshold(...);` | `S3AsyncClient s3 = S3AsyncClient.crtBuilder().thresholdInBytes(...).build();`<br><br>`tmBuilder.s3Client(s3);` |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien AWS S3 berbasis CRT |
| --- | --- | --- |
| Ukuran bagian salinan minimum | `tmBuilder.withMultipartCopyPartSize(...);`<br>`tmBuilder.setMultipartCopyPartSize(...);` | `S3AsyncClient s3 = S3AsyncClient.crtBuilder().minimumPartSizeInBytes(...).build();`<br><br>`tmBuilder.s3Client(s3);` |
| Ambang batas salinan multipart | `tmBuilder.withMultipartCopyThreshold(...);`<br>`tmBuilder.setMultipartCopyThreshold(...);` | `S3AsyncClient s3 = S3AsyncClient.crtBuilder().thresholdInBytes(...).build();`<br><br>`tmBuilder.s3Client(s3);` |
| Nonaktifkan unduhan paralel | `tmBuilder.withDisableParallelDownloads(...);`<br>`tmBuilder.setDisableParallelDownloads(...);` | Nonaktifkan unduhan paralel dengan meneruskan klien S3 berbasis Java standar dengan multipart dinonaktifkan (default) ke manajer transfer.<br><br>`S3AsyncClient s3 = S3AsyncClient.builder().build();`<br><br>`tmBuilder.s3Client(s3);` |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien AWS S3 berbasis CRT |
| --- | --- | --- |
| Selalu hitung multipart md5 | `tmBuilder.withAlwaysCalculateMultipartMd5(...);`<br>`tmBuilder.setAlwaysCalculateMultipartMd5(...);` | Tidak didukung. |

Use Java-based S3 async client

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien async S3 berbasis Java |
| --- | --- | --- |
| (dapatkan pembangun) | `TransferManagerBuilder tmBuilder = TransferManagerBuilder.standard();` | `S3TransferManager.Builder tmBuilder = S3TransferManager.builder();` |
| Klien S3 | `tmBuilder.withS3Client(...);`<br>`tmBuilder.setS3Client(...);` | `tmBuilder.s3Client(...);` |
| Pelaksana | `tmBuilder.withExecutorFactory(...);`<br>`tmBuilder.setExecutorFactory(...);` | `tmBuilder.executor(...);` |
| Shutdown thread pool | `tmBuilder.withShutDownThreadPools(...);` | Tidak didukung. Pelaksana yang disediakan tidak akan dimatikan saat `S3TransferManager` ditutup |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien async S3 berbasis Java |
| --- | --- | --- |
| | `tmBuilder.setShutdownThreadPools(...);` | |
| Ukuran bagian unggahan minimum | `tmBuilder.withMinimumUploadPartSize(...);`<br>`tmBuilder.setMinimumUploadPartSize(...);` | `S3AsyncClient s3 = S3AsyncClient.builder()`<br>`.multipartConfiguration(cfg -> cfg.minimumPartSizeInBytes(...)).build();`<br><br>`tmBuilder.s3Client(s3);` |
| Ambang batas unggahan multipart | `tmBuilder.withMultipartUploadThreshold(...);`<br>`tmBuilder.setMultipartUploadThreshold(...);` | `S3AsyncClient s3 = S3AsyncClient.builder()`<br>`.multipartConfiguration(cfg -> cfg.thresholdInBytes(...)).build();`<br><br>`tmBuilder.s3Client(s3);` |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien async S3 berbasis Java |
| --- | --- | --- |
| Ukuran bagian salinan minimum | `tmBuilder.withMultipartCopyPartSize(...);`<br>`tmBuilder.setMultipartCopyPartSize(...);` | `S3AsyncClient s3 = S3AsyncClient.builder()`<br>`.multipartConfiguration(cfg ->`<br>`cfg.minimumPartSizeInBytes(...)).build();`<br><br>`tmBuilder.s3Client(s3);` |
| Ambang batas salinan multipart | `tmBuilder.withMultipartCopyThreshold(...);`<br>`tmBuilder.setMultipartCopyThreshold(..);` | `S3AsyncClient s3 = S3AsyncClient.builder()`<br>`.multipartConfiguration(cfg ->`<br>`cfg.thresholdInBytes(...)).build();`<br><br>`tmBuilder.s3Client(s3);` |

| Pengaturan | v1 | v2 - Transfer Manager menggunakan klien async S3 berbasis Java |
| --- | --- | --- |
| Nonaktifkan unduhan paralel | `tmBuilder.withDisableParallelDownloads(...);`<br>`tmBuilder.setDisableParallelDownloads(...);` | Nonaktifkan unduhan paralel dengan meneruskan klien S3 berbasis Java standar dengan multipart dinonaktifkan (default) ke manajer transfer.<br>`S3AsyncClient s3 = S3AsyncClient.builder().build();`<br>`tmBuilder.s3Client(s3);` |
| Selalu hitung multipart md5 | `tmBuilder.withAlwaysCalculateMultipartMd5(...);`<br>`tmBuilder.setAlwaysCalculateMultipartMd5(...);` | Tidak didukung. |

Perubahan perilaku

Operasi asinkron

V1 (pemblokiran):

```
Upload upload = transferManager.upload("amzn-s3-demo-bucket", "key", file);
upload.waitForCompletion(); // Blocks until complete
```

V2 (asinkron):

```
FileUpload upload = transferManager.uploadFile(UploadFileRequest.builder()
    .putObjectRequest(PutObjectRequest.builder()
```

```
        .bucket("amzn-s3-demo-bucket")
        .key("key")
        .build())
    .source(file)
    .build());

CompletedFileUpload result = upload.completionFuture().join(); // Blocks until complete
// Or handle asynchronously:
upload.completionFuture().thenAccept(result -> {
    System.out.println("Upload completed: " + result.response().eTag());
});
```

Penanganan kesalahan

V1: Transfer direktori gagal sepenuhnya jika ada sub-permintaan yang gagal.

V2: Transfer direktori berhasil diselesaikan bahkan jika beberapa sub-permintaan gagal. Periksa kesalahan secara eksplisit:

```
DirectoryUpload directoryUpload = transferManager.uploadDirectory(request);
CompletedDirectoryUpload result = directoryUpload.completionFuture().join();

// Check for failed transfers
if (!result.failedTransfers().isEmpty()) {
    System.out.println("Some uploads failed:");
    result.failedTransfers().forEach(failed ->
        System.out.println("Failed: " + failed.exception().getMessage()));
}
```

Unduhan paralel melalui pengambilan rentang byte

Ketika fitur transfer paralel otomatis diaktifkan di SDK v2, Manajer Transfer S3 menggunakan pengambilan rentang byte untuk mengambil bagian tertentu dari objek secara paralel (unduhan multibagian). Cara objek diunduh dengan v2 tidak tergantung pada bagaimana objek awalnya diunggah. Semua unduhan dapat memperoleh manfaat dari throughput dan konkurensi yang tinggi.

Sebaliknya, dengan Transfer Manager v1, penting bagaimana objek awalnya diunggah. Manajer Transfer v1 mengambil bagian-bagian objek dengan cara yang sama seperti bagian-bagian yang diunggah. Jika objek awalnya diunggah sebagai objek tunggal, Manajer Transfer v1 tidak dapat mempercepat proses pengunduhan dengan menggunakan sub-permintaan.

# Perubahan dalam mengurai Amazon URIs S3 dari versi 1 ke versi 2

Topik ini merinci perubahan dalam mengurai Amazon URIs S3 dari versi 1 (v1) ke versi 2 (v2.).

## Perubahan tingkat tinggi

Untuk mulai mengurai URI S3 di v1, Anda membuat instance `AmazonS3URI` dengan menggunakan konstruktor. Di v2 Anda memanggil `parseUri()` instance`S3Utilities`, untuk mengembalikan file`S3URI`.

| Ubah | v1 | v2 |
|---|---|---|
| Ketergantungan Maven | `<dependencyManagement>`<br>`  <dependencies>`<br>`  <dependency>`<br>`  <groupId>com.amazonaws</groupId>`<br>`  <artifactId>aws-java-sdk-bom</artifactId>`<br>`  <version>1.12.587[1]</version>`<br>`  <type>pom</type>`<br>`  <scope>import</scope>`<br>`  </dependency>`<br>`  </dependencies>`<br>`</dependencyManagement>`<br>`<dependencies>`<br>`  <dependency>`<br>`  <groupId>com.amazonaws</groupId>`<br>`  <artifactId>s3</artifactId>`<br>`  </dependency>`<br>`</dependencies>` | `<dependencyManagement>`<br>`  <dependencies>`<br>`  <dependency>`<br>`  <groupId>software.amazon.awssdk</groupId>`<br>`  <artifactId>bom</artifactId>`<br>`  <version>2.27.21[2]</version>`<br>`  <type>pom</type>`<br>`  <scope>import</scope>`<br>`  </dependency>`<br>`  </dependencies>`<br>`</dependencyManagement>`<br>`<dependencies>`<br>`  <dependency>`<br>`  <groupId>software.amazon.awssdk</groupId>`<br>`  <artifactId>s3</artifactId>`<br>`  </dependency>`<br>`</dependencies>` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Nama paket | `com.amazonaws.services.s3` | `software.amazon.awssdk.services.s3` |
| Nama kelas | `AmazonS3URI` | `S3URI` |

[1] Versi terbaru. [2] Versi terbaru.

Perubahan API

| Perilaku | v1 | v2 |
| --- | --- | --- |
| Mengurai URI S3. | `URI uri = URI.create( "https://s3.amazonaws.com");`<br><br>`AmazonS3Uri s3Uri = new AmazonS3URI(uri, false);` | `S3Client s3Client = S3Client.create();`<br>`S3Utilities s3Utilities = s3Client.utilities();`<br><br>`S3Uri s3Uri = s3Utilities.parseUri(uri);` |
| Ambil nama bucket dari URI S3. | `String bucket = s3Uri.getBucket();` | `Optional<String> bucket = s3Uri.bucket();` |
| Ambil kuncinya. | `String key = s3Uri.getKey();` | `Optional<String> key = s3Uri.key();` |
| Ambil kembali wilayah tersebut. | `String region = s3Uri.getRegion();` | `Optional<Region> region = s3Uri.region();`<br><br>`String region;`<br>`if (s3Uri.region().isPresent()) {`<br>`region = s3Uri.region().get().id();` |

| Perilaku | v1 | v2 |
| --- | --- | --- |
| | | `}` |
| Ambil kembali apakah URI S3 adalah gaya jalur. | `boolean isPathStyle = s3Uri.isPathStyle();` | `boolean isPathStyle = s3Uri.isPathStyle();` |
| Ambil ID versi. | `String versionId = s3Uri.getVersionId();` | `Optional<String> versionId = s3Uri.firstMatchingRawQueryParameter("versionId");` |
| Ambil parameter kueri. | N/A | `Map<String, List<String>> queryParams = s3Uri.rawQueryParameters();` |

Perubahan perilaku

Pengkodean URL

v1 menyediakan opsi untuk meneruskan bendera untuk menentukan apakah URI harus dikodekan URL. Nilai default-nya adalah `true`.

Di v2, pengkodean URL tidak didukung. Jika Anda bekerja dengan kunci objek atau parameter kueri yang memiliki karakter cadangan atau tidak aman, Anda harus menyandikannya dengan URL. Misalnya Anda perlu mengganti spasi putih `" "` dengan. `%20`

## Perubahan pada API Pemberitahuan Acara S3 dari versi 1 ke versi 2

Topik ini merinci perubahan dalam S3 Event Notifications API dari versi 1.x (v1) ke versi 2 .x (v2) dari. AWS SDK untuk Java

Perubahan tingkat tinggi

Perubahan struktural

V1 menggunakan kelas internal statis untuk `EventNotificationRecord` tipe dan atributnya, sedangkan v2 menggunakan kelas publik terpisah untuk `EventNotificationRecord` tipe.

Perubahan konvensi penamaan

Di v1, nama kelas atribut menyertakan akhiran Entity, sedangkan v2 menghilangkan akhiran ini untuk penamaan yang lebih sederhana: misalnya, EventData, bukan. eventDataEntity

Perubahan dependensi, paket, dan nama kelas

Di v1, kelas API Pemberitahuan Acara S3 diimpor secara transitif bersama dengan modul S3 (ArtifactID). `aws-java-sdk-s3` Namun, di v2, Anda perlu menambahkan ketergantungan pada `s3-event-notifications` artefak.

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ketergantungan Maven | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>com.amazonaws</gro<br>upId><br><artifact<br>Id>aws-java-sdk-bom</<br>artifactId><br><version><br>*1.X.X*</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><dependency> | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifact<br>Id>bom</artifactId><br><version><br>*2.X.X*[1]</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId> |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | <groupId>com.amazonaws</groupId><br><artifactId>aws-java-sdk-s3</artifactId><br></dependency><br></dependencies> | <artifactId>s3-event-notifications</artifactId><br></dependency><br></dependencies> |
| Nama paket | com.amazonaws.services.s3.event | software.amazon.awssdk.eventnotifications.s3.model |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Nama kelas | S3 EventNotification<br>S3 .S3 EventNotification EventNotificationRecord<br>S3EventNotification. GlacierEventDataEntity<br>S3EventNotification. IntelligentTieringEventDataEntity<br>S3EventNotification. LifecycleEventDataEntity<br>S3EventNotification. ReplicationEventDataEntity<br>S3EventNotification. RequestParametersEntity<br>S3EventNotification. ResponseElementsEntity<br>S3EventNotification. RestoreEventDataEntity<br>S3 .S3 EventNotification BucketEntity<br>S3 EventNotification .S3Entitas<br>S3 .S3 EventNotification ObjectEntity<br>S3EventNotification. TransitionEventDataEntity | S3 EventNotification<br>S3 EventNotificationRecord<br>GlacierEventData<br>IntelligentTieringEventData<br>LifecycleEventData<br>ReplicationEventData<br>RequestParameters<br>ResponseElements<br>RestoreEventData<br>S3Bucket<br>S3<br>S3Objek<br>TransitionEventData<br>UserIdentity |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | S3EventNotification. UserIdentityEntity | |

[1] Versi terbaru.

Perubahan API

JSON ke **`S3EventNotification`** dan mundur

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| Buat `S3EventNotification` dari JSON String | `S3EventNotification notification = S3EventNotification.parseJson(message.body());` | `S3EventNotification notification = S3EventNotification.fromJson(message.body());` |
| Konversi `S3EventNotification` ke JSON String | `String json = notification.toJson();` | `String json = notification.toJson();` |

Atribut akses **`S3EventNotification`**

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| Mengambil catatan dari notifikasi | `List<S3EventNotification.S3EventNotificationRecord> records = notifcation.getRecords();` | `List<S3EventNotificationRecord> records = notification.getRecords();` |

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| Mengambil catatan dari daftar catatan | `S3EventNotification.S3EventNotificationRecord record = records.stream().findAny().get();` | `S3EventNotificationRecord record = records.stream().findAny().get();` |
| Ambil data peristiwa Glacier | `S3EventNotification.GlacierEventDataEntity glacierEventData = record.getGlacierEventData();` | `GlacierEventData glacierEventData = record.getGlacierEventData();` |
| Mengambil data peristiwa pemulihan dari peristiwa Glacier | `S3EventNotification.RestoreEventDataEntity restoreEventData = glacierEventData.getRestoreEventDataEntity();` | `RestoreEventData restoreEventData = glacierEventData.getRestoreEventData();` |
| Ambil parameter permintaan | `S3EventNotification.RequestParametersEntity requestParameters = record.getRequestParameters();` | `RequestParameters requestParameters = record.getRequestParameters();` |
| Ambil data acara Intelligent Tiering | `S3EventNotification.IntelligentTieringEventDataEntity tieringEventData = record.getIntelligentTieringEventData();` | `IntelligentTieringEventData intelligentTieringEventData = record.getIntelligentTieringEventData();` |

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| Mengambil data peristiwa lifecyle | `S3EventNotification.LifecycleEventDataEntity lifecycleEventData = record.getLifecycleEventData();` | `LifecycleEventData lifecycleEventData = record.getLifecycleEventData();` |
| Ambil nama acara sebagai enum | `S3Event eventNameAsEnum = record.getEventNameAsEnum();` | `//getEventNameAsEnum does not exist; use 'getEventName()' String eventName = record.getEventName();` |
| Ambil data peristiwa replikasi | `S3EventNotification.ReplicationEventDataEntity replicationEntity = record.getReplicationEventDataEntity();` | `ReplicationEventData replicationEventData = record.getReplicationEventData();` |
| Ambil bucket S3 dan informasi objek | `S3EventNotification.S3Entity s3 = record.getS3();` | `S3 s3 = record.getS3();` |
| Mengambil informasi identitas pengguna | `S3EventNotification.UserIdentityEntity userIdentity = record.getUserIdentity();` | `UserIdentity userIdentity = record.getUserIdentity();` |
| Ambil elemen respons | `S3EventNotification.ResponseElementsEntity responseElements = record.getResponseElements();` | `ResponseElements responseElements = record.getResponseElements();` |

Migrasi versi **`aws-lambda-java-events`** pustaka

Jika Anda menggunakan aws-lambda-java-eventsuntuk bekerja dengan peristiwa pemberitahuan S3 dalam fungsi Lambda, kami sarankan Anda meningkatkan ke versi 3.xx terbaru. Versi terbaru menghilangkan semua dependensi pada AWS SDK untuk Java 1.x dari API pemberitahuan acara S3.

Untuk informasi selengkapnya tentang perbedaan dalam menangani notifikasi peristiwa S3 antara `aws-lambda-java-events` pustaka dan SDK for Java 2.x, lihat. the section called “Opsi penanganan pemberitahuan acara S3”

## Perubahan file profil

AWS SDK for Java 2.x Mem-parsing definisi profil `~/.aws/config` dan `~/.aws/credentials` untuk lebih dekat meniru cara AWS CLI mem-parsing file.

SDK for Java 2.x:

- Menyelesaikan ~/ atau ~ diikuti oleh pemisah jalur default sistem file di awal jalur dengan memeriksa, secara berurutan,, `$USERPROFILE` (hanya Windows)`$HOME`,`$HOMEDRIVE`, `$HOMEPATH` (hanya Windows), dan kemudian properti sistem. `user.home`
- Mencari variabel `AWS_SHARED_CREDENTIALS_FILE` lingkungan alih-alih`AWS_CREDENTIAL_PROFILES_FILE`.
- Diam-diam menjatuhkan definisi profil dalam file konfigurasi tanpa kata `profile` di awal nama profil.
- Secara diam-diam menjatuhkan definisi profil yang tidak terdiri dari karakter alfanumerik, garis bawah atau tanda hubung (setelah `profile` kata utama dihapus untuk file konfigurasi).
- Menggabungkan pengaturan definisi profil yang digandakan dalam file yang sama.
- Menggabungkan pengaturan definisi profil yang digandakan dalam file konfigurasi dan kredensyal.
- TIDAK menggabungkan pengaturan jika keduanya `[profile foo]` dan `[foo]` ditemukan dalam file yang sama.
- Menggunakan pengaturan di `[profile foo]` jika `[foo]` keduanya `[profile foo]` dan ditemukan di file konfigurasi.
- Menggunakan nilai pengaturan duplikat terakhir dalam file dan profil yang sama.
- Mengenali keduanya `;` dan # untuk mendefinisikan komentar.
- Mengenali `;` dan # dalam definisi profil untuk mendefinisikan komentar, bahkan jika karakter berdekatan dengan braket penutup.

- Mengenali `;` dan # mendefinisikan komentar hanya dalam menetapkan nilai hanya jika mereka didahului oleh spasi putih.
- Mengenali `;` dan # dan semua konten berikut dalam menetapkan nilai jika tidak didahului oleh spasi putih.
- Mempertimbangkan kredensyal berbasis peran sebagai kredensyal prioritas tertinggi. SDK 2.x selalu menggunakan kredensyal berbasis peran jika pengguna menentukan properti. `role_arn`
- Mempertimbangkan kredensyal berbasis sesi sebagai kredensyal. second-highest-priority SDK 2.x selalu menggunakan kredensyal berbasis sesi jika kredensyal berbasis peran tidak digunakan dan pengguna menentukan properti dan. `aws_access_key_id` `aws_session_token`
- Menggunakan kredensyal dasar jika kredensyal berbasis peran dan sesi tidak digunakan dan pengguna menentukan properti. `aws_access_key_id`

## Variabel lingkungan dan properti sistem berubah

| 1.x Variabel Lingkungan | 1.x Properti Sistem | 2.x Variabel Lingkungan | 2.x Properti Sistem |
|---|---|---|---|
| `AWS_ACCES S_KEY_ID AWS_ACCES S_KEY` | `aws.accessKeyId` | `AWS_ACCES S_KEY_ID` | `aws.accessKeyId` |
| `AWS_SECRE T_KEY AWS_SECRE T_ACCESS_KEY` | `aws.secretKey` | `AWS_SECRE T_ACCESS_KEY` | `aws.secre tAccessKey` |
| `AWS_SESSI ON_TOKEN` | `aws.sessi onToken` | `AWS_SESSI ON_TOKEN` | `aws.sessi onToken` |
| `AWS_REGION` | `aws.region` | `AWS_REGION` | `aws.region` |
| `AWS_CONFIG_FILE` | | `AWS_CONFIG_FILE` | `aws.configFile` |
| `AWS_CREDE NTIAL_PRO FILES_FILE` | | `AWS_SHARE D_CREDENT IALS_FILE` | `aws.share dCredenti alsFile` |

| 1.x Variabel Lingkungan | 1.x Properti Sistem | 2.x Variabel Lingkungan | 2.x Properti Sistem |
|---|---|---|---|
| AWS_PROFILE | aws.profile | AWS_PROFILE | aws.profile |
| AWS_EC2_METADATA_DISABLED | com.amazonaws.sdk.disableEc2Metadata | AWS_EC2_METADATA_DISABLED | aws.disableEc2Metadata |
| | com.amazonaws.sdk.ec2MetadataServiceEndpointOverride | AWS_EC2_METADATA_SERVICE_ENDPOINT | aws.ec2MetadataServiceEndpoint |
| AWS_CONTAINER_CREDENTIALS_RELATIVE_URI | | AWS_CONTAINER_CREDENTIALS_RELATIVE_URI | aws.containerCredentialsPath |
| AWS_CONTAINER_CREDENTIALS_FULL_URI | | AWS_CONTAINER_CREDENTIALS_FULL_URI | aws.containerCredentialsFullUri |
| AWS_CONTAINER_AUTHORIZATION_TOKEN | | AWS_CONTAINER_AUTHORIZATION_TOKEN | aws.containerAuthorizationToken |
| AWS_CBOR_DISABLED | com.amazonaws.sdk.disableCbor | CBOR_ENABLED | aws.cborEnabled |

| 1.x Variabel Lingkungan | 1.x Properti Sistem | 2.x Variabel Lingkungan | 2.x Properti Sistem |
|---|---|---|---|
| AWS_ION_BINARY_DISABLE | com.amazonaws.sdk.disableIonBinary | BINARY_ION_ENABLED | aws.binaryIonEnabled |
| AWS_EXECUTION_ENV | | AWS_EXECUTION_ENV | aws.executionEnvironment |
| | com.amazonaws.sdk.disableCertChecking | Tidak didukung (fitur Permintaan) | Tidak didukung (fitur Permintaan) |
| | com.amazonaws.sdk.enableDefaultMetrics | Tidak didukung | Tidak didukung |
| | com.amazonaws.sdk.enableThrottledRetry | Tidak didukung | Tidak didukung |
| | com.amazonaws.regions.RegionUtils.fileOverride | Tidak didukung (fitur Permintaan) | Tidak didukung (fitur Permintaan) |
| | com.amazonaws.regions.RegionUtils.disableRemote | Tidak didukung (fitur Permintaan) | Tidak didukung (fitur Permintaan) |

| 1.x Variabel Lingkungan | 1.x Properti Sistem | 2.x Variabel Lingkungan | 2.x Properti Sistem |
|---|---|---|---|
| | `com.amazonaws.services.s3.disableImplicitGlobalClients` | Tidak didukung (fitur Permintaan) | Tidak didukung (fitur Permintaan) |
| | `com.amazonaws.sdk.enableInRegionOptimizedMode` | Tidak didukung (fitur Permintaan) | Tidak didukung (fitur Permintaan) |

## Perubahan Pelayan dari versi 1 ke versi 2

Topik ini merinci perubahan fungsionalitas Pelayan dari versi 1 (v1) ke versi 2 (v2).

Tabel berikut menunjukkan perbedaan untuk pelayan DynamoDB secara khusus. Pelayan untuk layanan lain mengikuti pola yang sama.

### Perubahan tingkat tinggi

Kelas pelayan berada dalam artefak Maven yang sama dengan layanan.

| Perubahan | v1 | v2 |
|---|---|---|
| Ketergantungan Maven | `<dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId>` | `<dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>bom</artifactId>` |

| Perubahan | v1 | v2 |
| --- | --- | --- |
| | <version> 1.12.680[1]</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>dynamodb</artifactId> </dependency> </dependencies> | <version> 2.27.10[2]</version> <type>pom</type> <scope>import</scope> </dependency> </dependencies> </dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>dynamodb</artifactId> </dependency> </dependencies> |
| Nama paket | `com.amazonaws.services.dynamodbv2.waiters` | `software.amazon.awssdk.services.dynamodb.waiters` |
| Nama kelas | `AmazonDynamoDBWaiters` | • Sinkron: `DynamoDbWaiter`<br>• Asinkron: `DynamoDbAsyncWaiter` |

[1] Versi terbaru. [2] Versi terbaru.

# Perubahan API

| Perubahan | v1 | v2 |
| --- | --- | --- |
| Buat pelayan | `AmazonDynamoDB client = AmazonDynamoDBClientBuilder .standard().build(); AmazonDynamoDBWaiters waiter = client.waiters();` | Sinkron: `DynamoDbClient client = DynamoDbClient.create(); DynamoDbWaiter waiter = client.waiter();` Asinkron: `DynamoDbAsyncClient asyncClient = DynamoDbAsyncClient.create(); DynamoDbAsyncWaiter waiter = asyncClient.waiter();` |
| Tunggu sampai ada tabel | Sinkron: `waiter.tableExists() .run(new WaiterParameters<>( new DescribeTableRequest(tableName)));` Asinkron: `waiter.tableExists() .runAsync(new WaiterParameters() .withRequest(new DescribeTableRequest(tableName)),` | Sinkron: `WaiterResponse<DescribeTableResponse> waiterResponse = waiter.waitUntilTableExists( r -> r.tableName("myTable")); waiterResponse.matched().response() .ifPresent(System.out::println);` Asinkron: |

| Perubahan | v1 | v2 |
| --- | --- | --- |
| | `new WaiterHandler() { @Override public void onWaitSuccess( AmazonWebServiceRequest amazonWebServiceRequest) { System.out.println("Table creation succeeded"); } @Override public void onWaitFailure(Exception e) { e.printStackTrace(); } }).get();` | `waiter.waitUntilTableExists(r -> r.tableName(tableName)) .whenComplete((r, t) -> { if (t != null) { t.printStackTrace(); } else { System.out.println( "Table creation succeeded"); } }).join();` |

## Perubahan konfigurasi

| Perubahan | v1 | v2 |
| --- | --- | --- |
| Strategi Polling (upaya maksimal dan penundaan tetap) | `MaxAttemptsRetryStrategy maxAttemptsRetryStrategy = new MaxAttemptsRetryStrategy(10); FixedDelayStrategy fixedDelayStrategy = new FixedDelayStrategy(3);` | `FixedDelayBackoffStrategy fixedDelayBackoffStrategy = FixedDelayBackoffStrategy .create(Duration.ofSeconds(3));` |

| Perubahan | v1 | v2 |
| --- | --- | --- |
| | `PollingStrategy pollingStrategy = new PollingStrategy(maxAttempts RetryStrategy, fixedDelayStrategy); waiter.tableExists().run( new WaiterParameters<>( new DescribeTableRequest(tableName)), pollingStrategy);` | `waiter.waitUntilTableExists(r -> r.tableName(tableName), c -> c.maxAttempts(10) .backoffStrategy(fixedDelayBackoffStrategy));` |

## Perubahan utilitas metadata EC2 dari versi 1 ke versi 2

Topik ini merinci perubahan utilitas metadata SDK for Java Amazon Elastic Compute Cloud (EC2) dari versi 1 (v1) ke versi 2 (v2).

### Perubahan tingkat tinggi

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ketergantungan Maven | `<dependencyManagement> <dependencies> <dependency> <groupId>com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version>1.12.587[1]</version>` | `<dependencyManagement> <dependencies> <dependency> <groupId>software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version>2.27.21[2]</version> <type>pom</type>` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | <type>pom</type><br><scope>import</scope><br></dependency><br></dependencies><br></dependencyManagement><br><dependencies><br><dependency><br><groupId>com.amazonaws</groupId><br><artifactId>aws-java-sdk-core</artifactId><br></dependency><br></dependencies> | <scope>import</scope><br></dependency><br></dependencies><br></dependencyManagement><br><dependencies><br><dependency><br><groupId>software.amazon.awssdk</groupId><br><artifactId>imds</artifactId><br></dependency><br><dependency><br><groupId>software.amazon.awssdk</groupId><br><artifactId>apache-client [3]</artifactId><br></dependency><br></dependencies> |
| Nama paket | `com.amazonaws.util` | `software.amazon.awssdk.imds` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Pendekatan instantiasi | Gunakan metode utilitas statis; tidak ada instantiasi:<br>`String localHostName = EC2MetadataUtils.getLocalHostName();` | Gunakan metode pabrik statis:<br>`Ec2MetadataClient client = Ec2MetadataClient.create();`<br>Atau gunakan pendekatan pembangun:<br>`Ec2MetadataClient client = Ec2MetadataClient.builder() .endpointMode(EndpointMode.IPV6) .build();` |
| Jenis klien | Hanya metode utilitas sinkron: `EC2MetadataUtils` | Sinkron: `Ec2MetadataClient`<br>Asinkron: `Ec2MetadataAsyncClient` |

[1] Versi terbaru. [2] Versi terbaru.

[3] Perhatikan deklarasi `apache-client` modul untuk v2. V2 dari utilitas metadata EC2 memerlukan implementasi `SdkHttpClient` antarmuka untuk klien metadata sinkron, atau antarmuka untuk klien metadata `SdkAsyncHttpClient` asinkron. ???Bagian ini menunjukkan daftar klien HTTP yang dapat Anda gunakan.

Meminta metadata

Di v1, Anda menggunakan metode statis yang tidak menerima parameter untuk meminta metadata untuk sumber daya EC2. Sebaliknya, Anda perlu menentukan jalur ke sumber daya EC2 sebagai parameter di v2. Tabel berikut menunjukkan pendekatan yang berbeda.

| v1 | v2 |
| --- | --- |
| `String userMetaData = EC2Metadata.getUserData();` | `Ec2MetadataClient client = Ec2MetadataClient.create();`<br>`Ec2MetadataResponse response = client.get("/latest/user-data");`<br>`String userMetaData = response.asString();` |

Lihat kategori metadata instance untuk menemukan jalur yang perlu Anda berikan untuk meminta sepotong metadata.

> **Note**
>
> Ketika Anda menggunakan klien metadata instance di v2, Anda harus bertujuan untuk menggunakan klien yang sama untuk semua permintaan untuk mengambil metadata.

## Perubahan perilaku

### Data JSON

Pada EC2, Layanan Metadata Instance (IMDS) yang berjalan secara lokal mengembalikan beberapa metadata sebagai string berformat JSON. Salah satu contohnya adalah metadata dinamis dari dokumen identitas instance.

API v1 berisi metode terpisah untuk setiap bagian metadata identitas instance, sedangkan API v2 secara langsung mengembalikan string JSON. Untuk bekerja dengan string JSON, Anda dapat menggunakan Document API untuk mengurai respons dan menavigasi struktur JSON.

Tabel berikut membandingkan bagaimana Anda mengambil metadata dari dokumen identitas instance di v1 dan v2.

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| Ambil Wilayah | `InstanceInfo instanceInfo =` | `Ec2MetadataResponse response =` |

| Kasus penggunaan | v1 | v2 |
| --- | --- | --- |
| | `EC2MetadataUtils.getInstanceInfo(); String region = instanceInfo.getRegion();` | `client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String region = instanceInfo.asMap().get("region").asString();` |
| Ambil id instance | `InstanceInfo instanceInfo = EC2MetadataUtils.getInstanceInfo(); String instanceId = instanceInfo.instanceId;` | `Ec2MetadataResponse response = client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String instanceId = instanceInfo.asMap().get("instanceId").asString();` |
| Ambil jenis instance | `InstanceInfo instanceInfo = EC2MetadataUtils.getInstanceInfo(); String instanceType = instanceInfo.instanceType();` | `Ec2MetadataResponse response = client.get("/latest/dynamic/instance-identity/document"); Document instanceInfo = response.asDocument(); String instanceType = instanceInfo.asMap().get("instanceType").asString();` |

Perbedaan resolusi titik akhir

Tabel berikut menunjukkan lokasi yang diperiksa SDK untuk menyelesaikan titik akhir IMDS. Lokasi tercantum dalam prioritas menurun.

| v1 | v2 |
| --- | --- |
| Properti sistem: `com.amazonaws.sdk.ec2MetadataServiceEndpointOverride` | Metode konfigurasi pembangun klien: `endpoint(...)` |
| Variabel lingkungan: `AWS_EC2_METADATA_SERVICE_ENDPOINT` | Properti sistem: `aws.ec2MetadataServiceEndpoint` |
| Nilai Default: `http://169.254.169.254` | File konfigurasi: `~.aws/config` dengan pengaturan `ec2_metadata_service_endpoint` |
| | Nilai yang terkait dengan diselesaikan `endpoint-mode` |
| | Nilai default: `http://169.254.169.254` |

Resolusi titik akhir di v2

Saat Anda secara eksplisit menetapkan titik akhir dengan menggunakan pembuat, nilai titik akhir tersebut diprioritaskan di atas semua pengaturan lainnya. Ketika kode berikut dijalankan, properti `aws.ec2MetadataServiceEndpoint` sistem dan `ec2_metadata_service_endpoint` pengaturan file konfigurasi diabaikan jika ada.

```
Ec2MetadataClient client = Ec2MetadataClient
  .builder()
  .endpoint(URI.create("endpoint.to.use"))
  .build();
```

Modus titik akhir

Dengan v2, Anda dapat menentukan mode titik akhir untuk mengonfigurasi klien metadata agar menggunakan nilai titik akhir default untuk atau. IPv4 IPv6 Mode titik akhir tidak tersedia untuk

v1. Nilai default yang digunakan untuk IPv4 adalah `http://169.254.169.254` dan `http://[fd00:ec2::254]` untuk IPv6.

Tabel berikut menunjukkan berbagai cara yang dapat Anda atur mode endpoint dalam urutan prioritas menurun.

| | | Kemungkinan nilai |
|---|---|---|
| Metode konfigurasi pembangun klien: `endpointMode(...)` | `Ec2MetadataClient client = Ec2MetadataClient.builder().endpointMode(EndpointMode.IPV4).build();` | `EndpointMode.IPV4` , `EndpointMode.IPV6` |
| Properti sistem | `aws.ec2MetadataServiceEndpointMode` | `IPv4`, `IPv6` (kasus tidak masalah) |
| Berkas Config: `~.aws/config` | Setelan `ec2_metadata_service_endpoint` | `IPv4`, `IPv6` (kasus tidak masalah) |
| Tidak ditentukan dengan cara sebelumnya | IPv4 digunakan | |

Bagaimana SDK menyelesaikan **`endpoint`** atau di v2 **`endpoint-mode`**

1. SDK menggunakan nilai yang Anda tetapkan dalam kode pada pembuat klien dan mengabaikan pengaturan eksternal apa pun. Karena SDK melempar pengecualian jika keduanya `endpoint` dan `endpointMode` dipanggil pada pembuat klien, SDK menggunakan nilai titik akhir dari metode mana pun yang Anda gunakan.
2. Jika Anda tidak menetapkan nilai dalam kode, SDK melihat ke konfigurasi eksternal—pertama untuk properti sistem dan kemudian untuk pengaturan dalam file konfigurasi.
   a. SDK pertama-tama memeriksa nilai titik akhir. Jika nilai ditemukan, itu digunakan.
   b. Jika SDK masih belum menemukan nilai, SDK akan mencari pengaturan mode titik akhir.

3. Terakhir, jika SDK tidak menemukan pengaturan eksternal dan Anda belum mengonfigurasi klien metadata dalam kode, SDK menggunakan nilai. IPv4 `http://169.254.169.254`

IMDSv2

Amazon EC2 mendefinisikan dua pendekatan untuk mengakses metadata instans:

- Layanan Metadata Instance Versi 1 (IMDSv1) — Pendekatan permintaan/respons
- Layanan Metadata Instance Versi 2 (IMDSv2) — Pendekatan berorientasi sesi

Tabel berikut membandingkan bagaimana Java SDKs bekerja dengan IMDS.

| v1 | v2 |
| --- | --- |
| IMDSv2 digunakan secara default | Selalu menggunakan IMDSv2 |
| Mencoba mengambil token sesi untuk setiap permintaan dan kembali IMDSv1 jika gagal mengambil token sesi | Menyimpan token sesi dalam cache internal yang digunakan kembali untuk beberapa permintaan |

SDK for Java 2.x IMDSv2 hanya mendukung dan tidak kembali ke. IMDSv1

## Perbedaan konfigurasi

Tabel berikut mencantumkan opsi konfigurasi yang berbeda.

| Konfigurasi | v1 | v2 |
| --- | --- | --- |
| Percobaan ulang | Konfigurasi tidak tersedia | Dapat dikonfigurasi melalui metode pembangun `retryPolicy(...)` |
| HTTP | Batas waktu koneksi dapat dikonfigurasi melalui variabel `AWS_METADATA_SERVICE_TIMEOUT` lingkungan. Defaultnya adalah 1 detik. | Konfigurasi tersedia dengan meneruskan klien HTTP ke metode pembangun `httpClient(...)` . Batas |

| Konfigurasi | v1 | v2 |
| --- | --- | --- |
| | | waktu koneksi default untuk klien HTTP adalah 2 detik. |

Contoh konfigurasi HTTP v2

Contoh berikut menunjukkan bagaimana Anda dapat mengkonfigurasi klien metadata. Contoh ini mengkonfigurasi batas waktu koneksi dan menggunakan klien HTTP Apache.

```
SdkHttpClient httpClient = ApacheHttpClient.builder()
    .connectionTimeout(Duration.ofSeconds(1))
    .build();

Ec2MetadataClient imdsClient = Ec2MetadataClient.builder()
    .httpClient(httpClient)
    .build();
```

## Perubahan di Amazon CloudFront presigning dari versi 1 ke versi 2

Topik ini merinci perubahan di Amazon CloudFront dari versi 1 (v1) ke versi 2 (v2).

### Perubahan tingkat tinggi

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ketergantungan Maven | `<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId> <artifactId>aws-java-sdk-bom</artifactId> <version> 1.12.587[1]</version> <type>pom</type>` | `<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId> <artifactId>bom</artifactId> <version> 2.27.21[2]</version> <type>pom</type> <scope>import</scope>` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | <scope>import</scope><br></dependency><br></dependencies><br></dependencyManagement><br><dependencies><br><dependency><br><groupId>com.amazonaws</groupId><br><artifactId>cloudfront</artifactId><br></dependency><br></dependencies> | </dependency><br></dependencies><br></dependencyManagement><br><dependencies><br><dependency><br><groupId>software.amazon.awssdk</groupId><br><artifactId>cloudfront</artifactId><br></dependency><br></dependencies> |
| Nama paket | `com.amazonaws.services.cloudfront` | `software.amazon.awssdk.services.cloudfront` |
| Nama kelas | CloudFrontUrlSigner<br>CloudFrontCookieSigner | CloudFrontUtilities<br>SignedUrl<br>CannedSignerRequest<br>CustomSignerRequest |

[1] Versi terbaru. [2] Versi terbaru.

## Perubahan API

| Perilaku | v1 | v2 |
| --- | --- | --- |
| Bangun permintaan kalengan | Argumen diteruskan langsung ke API. | `CannedSignerRequest cannedRequest = CannedSignerRequest.builder()` |

| Perilaku | v1 | v2 |
| --- | --- | --- |
| | | `.resourceUrl(resourceUrl)`<br>`.privateKey(privateKey)`<br>`.keyPairId(keyPairId)`<br>`.expirationDate(expirationDate)`<br>`.build();` |
| Membangun permintaan kustom | Argumen diteruskan langsung ke API. | `CustomSignerRequest customRequest = CustomSignerRequest.builder()`<br>`.resourceUrl(resourceUrl)`<br>`.resourceUrlPattern(resourceUrlPattern)`<br>`.privateKey(keyFile)`<br>`.keyPairId(keyPairId)`<br>`.expirationDate(expirationDate)`<br>`.activeDate(activeDate)`<br>`.ipRange(ipRange)`<br>`.build();` |

| Perilaku | v1 | v2 |
| --- | --- | --- |
| Hasilkan URL yang ditandatangani (kalengan) | `String signedUrl = CloudFrontUrlSigner.getSignedURLWithCannedPolicy( resourceUrl, keyPairId, privateKey, expirationDate);` | `CloudFrontUtilities cloudFrontUtilities = CloudFrontUtilities.create();`<br><br>`SignedUrl signedUrl =`<br><br>`cloudFrontUtilities.getSignedUrlWithCannedPolicy(cannedRequest);`<br><br>`String url = signedUrl.url();` |
| Hasilkan cookie yang ditandatangani (kustom) | `CookiesForCustomPolicy cookies = CloudFrontCookieSigner.getCookiesForCustomPolicy( resourceUrl, privateKey, keyPairId, expirationDate, activeDate, ipRange);` | `CloudFrontUtilities cloudFrontUtilities = CloudFrontUtilities.create();`<br><br>`CookiesForCustomPolicy cookies = cloudFrontUtilities.getCookiesForCustomPolicy(customRequest);` |

Header cookie yang difaktorkan ulang di v2

Di Java v1, Java SDK memberikan header cookie sebagai file. `Map.Entry<String, String>`

```
Map.Entry<String, String> signatureMap = cookies.getSignature();
String signatureKey = signatureMap.getKey(); // "CloudFront-Signature"
String signatureValue = signatureMap.getValue(); // "[SIGNATURE_VALUE]"
```

Java v2 SDK memberikan seluruh header sebagai satu. `String`

```
String signatureHeaderValue = cookies.signatureHeaderValue(); // "CloudFront-
Signature=[SIGNATURE_VALUE]"
```

# Perubahan API Pembuat Kebijakan IAM dari versi 1 ke versi 2

Topik ini merinci perubahan API Pembuat Kebijakan IAM dari versi 1 (v1) ke versi 2 (v2).

## Perubahan tingkat tinggi

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ketergantungan Maven | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>com.amazonaws</gro<br>upId><br><artifact<br>Id>aws-java-sdk-bom</<br>artifactId><br><version><br>*1.12.587*[1]</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><dependency><br><groupId><br>com.amazonaws</gro<br>upId><br><artifact<br>Id>aws-java-sdk-co<br>re</artifactId><br></dependency><br></dependencies> | <dependencyManagement><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifact<br>Id>bom</artifactId><br><version><br>*2.27.21*[2]</version><br><type>pom</<br>type><br><scope>im<br>port</scope><br></dependency><br></dependencies><br></dependencyManageme<br>nt><br><dependencies><br><dependency><br><groupId><br>software.amazon.aw<br>ssdk</groupId><br><artifact<br>Id>iam-policy-buil<br>der</artifactId><br></dependency><br></dependencies> |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Nama paket | `com.amazonaws.auth.policy` | `software.amazon.awssdk.policybuilder.iam` |
| Nama kelas | Kebijakan<br><br>Pernyataan<br><br>• Pernyataan.Efek<br>• IdentiyManagementActions<br>• Sumber Daya<br>• Kepala Sekolah<br>• Kondisi | IamPolicy<br><br>IamStatement<br><br>• IamEffect<br>• IamAction<br>• IamResource<br>• IamPrincipal<br>• IamCondition<br>• IamConditionOperator<br>• IamConditionKey |

[1] Versi terbaru. [2] Versi terbaru.

## Perubahan API

| Pengaturan | v1 | v2 |
| --- | --- | --- |
| Membuat instantiasi kebijakan | `Policy policy = new Policy();` | `IamPolicy.Builder policyBuilder = IamPolicy.builder(); ... IamPolicy policy = policyBuilder.build();` |
| Tetapkan id | `policy.withtId(...); policy.setId(...);` | `policyBuilder.id(...);` |

| Pengaturan | v1 | v2 |
| --- | --- | --- |
| Tetapkan versi | N/A - menggunakan versi default 2012-10-17 | `policyBuilder.version(...);` |
| Buat pernyataan | `Statement statement = new Statement(Effect.Allow).withActions(...).withConditions(...).withId(...).withPrincipals(...).withResources(...);` | `IamStatement statement = IamStatement.builder().effect(IamEffect.ALLOW).actions(...).notActions(...).conditions(...).sid(...).principals(...).notPrincipals(...).resources(...).notResources(...).build()` |
| Tetapkan pernyataan | `policy.withStatements(statement); policy.setStatements(statement);` | `policyBuilder.addStatement(statement);` |

## Perbedaan dalam membangun pernyataan

### Tindakan

v1

SDK v1 memiliki enumtipe untuk tindakan layanan yang mewakili *Action* elemen dalam pernyataan kebijakan. enumJenis berikut adalah beberapa contoh.

- IdentityManagementActions
- DynamoDBv2Actions
- SQSActions

Contoh berikut menunjukkan SendMessage konstanta untukSQSActions.

```
Action action = SQSActions.SendMessage;
```

Anda tidak dapat menentukan *NotAction* elemen ke pernyataan di v1.

v2

Di v2, IamActionantarmuka mewakili semua tindakan. Untuk menentukan elemen tindakan khusus layanan, berikan string ke `create` metode seperti yang ditunjukkan pada kode berikut.

```
IamAction action = IamAction.create("sqs:SendMessage");
```

Anda dapat menentukan *NotAction* untuk pernyataan dengan v2 seperti yang ditunjukkan dalam kode berikut.

```
IamAction action = IamAction.create("sqs:SendMessage");
IamStatement.builder().addNotAction(action);
```

### Ketentuan

v1

Untuk merepresentasikan kondisi pernyataan, SDK v1 menggunakan subclass dari. Condition

- ArnCondition

- BooleanCondition
- DateCondition
- IpAddressCondition
- NumericCondition
- StringCondition

Setiap `Condition` subkelas mendefinisikan `enum` tipe perbandingan untuk membantu menentukan kondisi. Misalnya, berikut ini menunjukkan perbandingan string tidak suka untuk suatu kondisi.

```
Condition condition = new StringCondition(StringComparisonType.StringNotLike, "key",
 "value");
```

v2

Di v2, Anda membuat kondisi untuk pernyataan kebijakan dengan menggunakan `IamCondition` dan menyediakan`IamConditionOperator`, yang berisi `enums` untuk semua jenis.

```
IamCondition condition = IamCondition.create(IamConditionOperator.STRING_NOT_LIKE,
 "key", "value");
```

Sumber daya

v1

*`Resource`*Elemen pernyataan kebijakan diwakili oleh `Resource` kelas SDK. Anda menyediakan ARN sebagai string di konstruktor. Subkelas berikut menyediakan konstruktor kenyamanan.

- S3 BucketResource
- S3 ObjectResource
- SQSQueueSumber Daya

Di v1, Anda dapat menentukan *`NotResource`* elemen untuk a `Resource` dengan memanggil `withIsNotType` metode seperti yang ditunjukkan dalam pernyataan berikut.

```
Resource resource = new Resource("arn:aws:s3:::amzn-s3-demo-
bucket").withIsNotType(true);
```

v2

Di v2, Anda membuat *Resource* elemen dengan meneruskan ARN ke metode. `IamResource.create`

```
IamResource resource = IamResource.create("arn:aws:s3:::amzn-s3-demo-bucket");
```

Sebuah `IamResource` dapat diatur sebagai *NotResource*elemen seperti yang ditunjukkan dalam cuplikan berikut.

```
IamResource resource = IamResource.create("arn:aws:s3:::amzn-s3-demo-bucket");
IamStatement.builder().addNotResource(resource);
```

`IamResource.ALL`mewakili semua sumber daya.

Pengguna utama

v1

SDK v1 menawarkan `Principal` kelas-kelas berikut untuk mewakili jenis prinsipal yang mencakup semua anggota:

- `AllUsers`
- `AllServices`
- `AllWebProviders`
- `All`

Anda tidak dapat menambahkan *NotPrincipal* elemen ke pernyataan.

v2

Dalam v2, `IamPrincipal.ALL` mewakili semua prinsip:

Untuk mewakili semua anggota dalam jenis kepala sekolah lainnya, gunakan `IamPrincipalType` kelas saat Anda membuat file. `IamPrincipal`

- `IamPrincipal.create(IamPrincipalType.AWS,"*")`untuk semua pengguna.
- `IamPrincipal.create(IamPrincipalType.SERVICE,"*")`untuk semua layanan.

- `IamPrincipal.create(IamPrincipalType.FEDERATED,"*")`untuk semua penyedia web.
- `IamPrincipal.create(IamPrincipalType.CANONICAL_USER,"*")`untuk semua pengguna kanonik.

Anda dapat menggunakan `addNotPrincipal` metode untuk mewakili *`NotPrincipal`* elemen ketika Anda membuat pernyataan kebijakan seperti yang ditunjukkan dalam pernyataan berikut.

```
IamPrincipal principal = IamPrincipal.create(IamPrincipalType.AWS,
 "arn:aws:iam::444455556666:root");
IamStatement.builder().addNotPrincipal(principal);
```

# Perubahan dalam bekerja dengan DynamoDB dari versi 1 ke versi 2 AWS SDK untuk Java

Topik

- DynamoDB memetakan perbedaan API antara versi 1 dan versi 2 AWS SDK untuk Java
- Perbedaan API dokumen antara versi 1 dan versi 2 AWS SDK untuk Java
- Migrasi perpustakaan enkripsi

## DynamoDB memetakan perbedaan API antara versi 1 dan versi 2 AWS SDK untuk Java

APIs Pemetaan DynamoDB berubah secara signifikan antara versi 1 dan versi 2. AWS SDK untuk Java Di versi 1, Anda menggunakan `DynamoDBMapper` untuk bekerja dengan Java POJOs. Di versi 2, Anda menggunakan nama metode `DynamoDbEnhancedClient` yang diperbarui, opsi definisi skema yang disempurnakan, dan keamanan tipe yang ditingkatkan.

Perbedaan utama meliputi:

- Nama metode baru (seperti `getItem` bukan`load`)
- Pembuatan skema tabel eksplisit
- Dukungan bawaan untuk operasi sinkron dan asinkron
- Perubahan cara string dan konfigurasi kosong ditangani

Bagian ini mencakup perubahan API pemetaan, perbedaan anotasi, pembaruan konfigurasi, dan panduan migrasi untuk membantu Anda bertransisi dari v1 `DynamoDBMapper` ke v2. `DynamoDbEnhancedClient`

Daftar Isi


- Perubahan tingkat tinggi dalam pemetaan pustaka dari versi 1 ke versi 2 SDK for Java
  - Perbedaan ketergantungan impor
- Perubahan dalam APIs pemetaan DynamoDB antara versi 1 dan versi 2 dari SDK for Java
  - Buat klien
  - Menetapkan pemetaan ke tabel/indeks DynamoDB
  - Operasi tabel
  - Kelas peta dan properti
    - Anotasi kacang
    - V2 anotasi tambahan
  - Konfigurasi
    - Konfigurasi per operasi
  - Kondisional
  - Jenis konversi
    - Konverter default
    - Menetapkan konverter kustom untuk atribut
    - Tambahkan pabrik atau penyedia konverter tipe
- String menangani perbedaan antara versi 1 dan versi 2 dari SDK for Java
- Perbedaan penguncian optimis antara versi 1 dan versi 2 dari SDK for Java
- Perbedaan setter yang lancar antara versi 1 dan versi 2 dari SDK for Java


## Perubahan tingkat tinggi dalam pemetaan pustaka dari versi 1 ke versi 2 SDK for Java

Nama-nama klien pemetaan di setiap pustaka berbeda di V1 dan V2:

- V1 - Dinamo DBMapper
- V2 - Klien yang Ditingkatkan DynamoDB

Anda berinteraksi dengan dua pustaka dengan cara yang hampir sama: Anda membuat instance mapper/client dan kemudian memasok POJO Java untuk membaca dan menulis item ini ke APIs tabel DynamoDB. Kedua pustaka juga menawarkan anotasi untuk kelas POJO untuk mengarahkan bagaimana klien menangani POJO.

Perbedaan penting saat Anda pindah ke V2 meliputi:

- V2 dan V1 menggunakan nama metode yang berbeda untuk operasi DynamoDB tingkat rendah. Contoh:

| V1 | V2 |
| --- | --- |
| muat | getItem |
| save | putItem |
| batchLoad | batchGetItem |

- V2 menawarkan beberapa cara untuk menentukan skema tabel dan memetakan POJOs ke tabel. Anda dapat memilih dari penggunaan anotasi atau skema yang dihasilkan dari kode menggunakan pembangun. V2 juga menawarkan versi skema yang dapat berubah dan tidak dapat diubah.
- Dengan V2, Anda secara khusus membuat skema tabel sebagai salah satu langkah pertama, sedangkan di V1, skema tabel disimpulkan dari kelas beranotasi sesuai kebutuhan.
- V2 menyertakan klien Document API dalam API klien yang disempurnakan, sedangkan V1 menggunakan API terpisah.
- Semua APIs tersedia dalam versi sinkron dan asinkron di V2.

Lihat bagian pemetaan DynamoDB dalam panduan ini untuk informasi lebih rinci tentang klien yang disempurnakan V2.

Perbedaan ketergantungan impor

V1

```
<dependencyManagement>
  <dependencies>
    <dependency>
```

V2

```
<dependencyManagement>
  <dependencies>
    <dependency>
```

| V1 | V2 |
| --- | --- |
| <groupId>com.amazonaws</groupId><br><artifactId>aws-java-sdk-bom</artifactId><br><version> *1.X.X*</version><br><type>pom</type><br><scope>import</scope><br></dependency><br></dependencies><br></dependencyManagement><br><br><dependencies><br><dependency><br><groupId>com.amazonaws</groupId><br><artifactId>aws-java-sdk-dynamodb</artifactId><br></dependency><br></dependencies> | <groupId>software.amazon.awssdk</groupId><br><artifactId>bom</artifactId><br><version> *2.X.X**</version><br><type>pom</type><br><scope>import</scope><br></dependency><br></dependencies><br></dependencyManagement><br><br><dependencies><br><dependency><br><groupId>software.amazon.awssdk</groupId><br><artifactId>dynamodb-enhanced</artifactId><br></dependency><br></dependencies> |

* Versi terbaru.

Di V1, dependensi tunggal mencakup API DynamoDB tingkat rendah dan mapping/document API, sedangkan di V2, Anda menggunakan `dynamodb-enhanced` dependensi artefak untuk mengakses API. mapping/document `dynamodb-enhanced`Modul ini berisi ketergantungan transitif pada modul tingkat rendah`dynamodb`.

Perubahan dalam APIs pemetaan DynamoDB antara versi 1 dan versi 2 dari SDK for Java

Buat klien

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Instantiasi normal | `AmazonDynamoDB standardClient = AmazonDynamoDBClientBuilder.standard() .withCredentials(credentialsProvider)` | `DynamoDbClient standardClient = DynamoDbClient.builder() .credentialsProvider(ProfileCredentialsProvider.create())` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| | `.withRegion(Regions.US_EAST_1)`<br>`.build();`<br>`DynamoDBMapper mapper = new DynamoDBMapper(standardClient);` | `.region(Region.US_EAST_1)`<br>`.build();`<br>`DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()`<br>`.dynamoDbClient(standardClient)`<br>`.build();` |
| Instantiasi minimal | `AmazonDynamoDB standardClient = AmazonDynamoDBClientBuilder.standard();`<br>`DynamoDBMapper mapper = new DynamoDBMapper(standardClient);` | `DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.create();` |
| Dengan trafo atribut* | `DynamoDBMapper mapper = new DynamoDBMapper(standardClient,`<br>`attributeTransformerInstance);` | `DynamoDbEnhancedClient enhancedClient = DynamoDbEnhancedClient.builder()`<br>`.dynamoDbClient(standardClient)`<br>`.extensions(extensionAInstance, extensionBInstance)`<br>`.build();` |

* Ekstensi di V2 kira-kira sesuai dengan atribut transformer di V1. the section called “Sesuaikan operasi dengan ekstensi”Bagian ini berisi informasi lebih lanjut tentang ekstensi di V2.

Menetapkan pemetaan ke tabel/indeks DynamoDB

Di V1, Anda menentukan nama tabel DynamoDB melalui anotasi kacang. Dalam V2, metode pabrik,`table()`, menghasilkan instance `DynamoDbTable` yang mewakili tabel DynamoDB jarak jauh. Parameter pertama dari `table()` metode ini adalah nama tabel DynamoDB.

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Memetakan kelas Java POJO ke tabel DynamoDB | `@DynamoDBTable(tableName ="Customer")`<br>`public class Customer {`<br>`  ...`<br>`}` | `DynamoDbTable<Customer> customerTable = enhancedClient.table("Customer", TableSchema.fromBean(Customer.class));` |
| Peta ke indeks sekunder DynamoDB | 1. Tentukan kelas POJO yang mewakili indeks.<br>• Anotasi kelas dengan `@DynamoDBTable` menyediakan nama tabel yang memiliki indeks.<br>• Anotasi properti dengan `@DynamoDBIndexHashKey` dan opsional. `@DynamoDBIndexRangeKey`<br>2. Buat ekspresi kueri.<br>3. Query menggunakan referensi ke kelas POJO yang mewakili indeks. Sebagai contoh<br>`mapper.query(IdEmailIndex.class, queryExpression)`<br>`IdEmailIndex` dimana kelas pemetaan untuk indeks.<br>Bagian dalam DynamoDB Developer Guide yang | 1. Anotasi atribut kelas POJO dengan `@DynamoDbSecondaryPartitionKey` (untuk GSI) dan `@DynamoDbSecondarySortKey` (untuk dan GSI atau LSI). Misalnya,<br>`@DynamoDbSecondarySortKey(indexNames = "IdEmailIndex")`<br>`public String getEmail() { return this.email; }`<br>2. Ambil referensi ke indeks. Misalnya,<br>`DynamoDbIndex<Customer> customerIndex = customerTable.index("IdEmailIndex");`<br>3. Kueri indeks.<br>???Bagian dalam panduan ini memberikan informasi lebih lanjut. |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| | membahas metode `query` V1 menunjukkan contoh lengkap. | |

Operasi tabel

Bagian ini menjelaskan operasi APIs yang berbeda antara V1 dan V2 untuk sebagian besar kasus penggunaan standar.

Di V2, semua operasi yang melibatkan satu tabel dipanggil pada `DynamoDbTable` instance, bukan pada klien yang disempurnakan. Klien yang disempurnakan berisi metode yang dapat menargetkan beberapa tabel.

Dalam tabel bernama operasi Tabel di bawah ini, contoh POJO disebut sebagai `item` atau sebagai tipe tertentu seperti`customer1`. Untuk contoh V2 instance bernama, `table` adalah hasil dari pemanggilan sebelumnya `enhancedClient.table()` yang mengembalikan referensi ke `DynamoDbTable` instance.

Perhatikan bahwa sebagian besar operasi V2 dapat dipanggil dengan pola konsumen yang lancar bahkan ketika tidak ditampilkan. Misalnya,

```
Customer customer = table.getItem(r # r.key(key));
  or
Customer customer = table.getItem(r # r.key(k ->
 k.partitionValue("id").sortValue("email")))
```

Untuk operasi V1, operasi Tabel (di bawah) berisi beberapa formulir yang umum digunakan dan tidak semua formulir yang kelebihan beban. Misalnya, `load()` metode ini memiliki kelebihan beban berikut:

```
mapper.load(Customer.class, hashKey)
mapper.load(Customer.class, hashKey, rangeKey)
mapper.load(Customer.class, hashKey, config)
mapper.load(Customer.class, hashKey, rangeKey, config)
mapper.load(item)
mapper.load(item, config)
```

Operasi tabel (di bawah) menunjukkan bentuk yang umum digunakan:

```
mapper.load(item)
mapper.load(item, config)
```

Operasi tabel

| Kasus penggunaan | V1 | V2 |
|---|---|---|
| Tulis POJO Java ke tabel Dynam<br><br>Operas Dynam PutIte Update m | `mapper.save(item)`<br>`mapper.save(item, config)`<br>`mapper.save(item, saveExpression, config)`<br><br>Dalam V1, `DynamoDBMapperConfig.SaveBehavior` dan anotasi menentukan metode DynamoDB tingkat rendah mana yang akan dipanggil. Secara umum, `UpdateItem` disebut kecuali saat menggunakan `SaveBehavior.CLOBBER` dan`SaveBehavior.PUT`. Kunci yang dihasilkan secara otomatis adalah kasus penggunaan khusus, dan kadang-kadang keduanya `PutItem` dan `UpdateItem` digunakan. | `table.putItem(putItemRequest)`<br>`table.putItem(item)`<br>`table.putItemWithResponse(item) // Returns metadata.`<br><br>`updateItem(updateItemRequest)`<br>`table.updateItem(item)`<br>`table.updateItemWithResponse(item) // Returns metadata.` |
| Memba item dari tabel Dynam ke POJO Java | `mapper.load(item)`<br>`mapper.load(item, config)` | `table.getItem(getItemRequest)`<br>`table.getItem(item)`<br>`table.getItem(key)`<br>`table.getItemWithResponse(key) // Returns POJO with metadata.` |

| Kasus penggu n | V1 | V2 |
| --- | --- | --- |
| Operas Dynam GetIte | | |
| Mengha item dari tabel Dynam<br><br>Operas Dynam Delete m | `mapper.delete(item, deleteExpression, config)` | `table.deleteItem(deleteItemRequest)`<br>`table.deleteItem(item)`<br>`table.deleteItem(key)` |
| Kueri tabel Dynam atau indeks sekund dan kembal n daftar paginas<br><br>Operas Dynam Query | `mapper.query(Customer.class, queryExpression)`<br>`mapper.query(Custom er.class, queryExpression, mapperConfig)` | `table.query(queryRequest)`<br>`table.query(queryConditional)`<br><br>Gunakan yang dikembalikan `PageItera ble.stream()` (pemuatan lambat) untuk respons sinkronisasi dan `PagePubli sher.subscribe()` untuk respons asinkron |

| Kasus penggu n | V1 | V2 |
| --- | --- | --- |
| Kueri tabel Dynam atau indeks sekund dan kembal n daftar<br><br>Operas Dynam `Query` | `mapper.queryPage(Customer.c lass, queryExpression)`<br>`mapper.queryPage(Cu stomer.class, queryExpr ession,`<br><br>`mapperConfig)` | `table.query(queryRequest)`<br>`table.query(queryConditional)`<br><br>Gunakan yang dikembalikan `PageItera ble.items()` (pemuatan lambat) untuk respons sinkronisasi dan `PagePubli sher.items.subscribe()` untuk respons asinkron |
| Memind tabel Dynam atau indeks sekund dan menger ikan daftar paginas<br><br>Operas Dynam `Scan` | `mapper.scan(Customer.class, scanExpression)`<br>`mapper.scan(Customer .class, scanExpression,`<br><br>`mapperConfig)` | `table.scan()`<br>`table.scan(scanRequest)`<br><br>Gunakan yang dikembalikan `PageItera ble.stream()` (pemuatan lambat) untuk respons sinkronisasi dan `PagePubli sher.subscribe()` untuk respons asinkron |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Pindai tabel Dynam atau indeks sekund dan kembal n daftar<br><br>Operas Dynam `Scan` | `mapper.scanPage(Customer.class, scanExpression)`<br>`mapper.scanPage(Customer.class, scanExpression,`<br><br>`mapperConfig)` | `table.scan()`<br>`table.scan(scanRequest)`<br><br>Gunakan yang dikembalikan `PageIterable.items()` (pemuatan lambat) untuk respons sinkronisasi dan `PagePublisher.items.subscribe()` untuk respons asinkron |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Baca beberapa item dari beberapa tabel dalam satu batch<br><br>Operasi DynamoDB `BatchGetItem` | `mapper.batchLoad(Arrays.asList(customer1,`<br><br>`  customer2,`<br><br>`  book1))`<br>`mapper.batchLoad(itemsToGet)`<br>`// itemsToGet: Map<Class<?>, List<KeyPair>>` | `enhancedClient.batchGetItem(batchGetItemRequest)`<br><br>`enhancedClient.batchGetItem(r -> r.readBatches(`<br>`ReadBatch.builder(Record1.class)`<br>`.mappedTableResource(mappedTable1)`<br>`.addGetItem(i -> i.key(k -> k.partitionValue(0)))`<br>`.build(),`<br>`ReadBatch.builder(Record2.class)`<br>`.mappedTableResource(mappedTable2)`<br>`.addGetItem(i -> i.key(k -> k.partitionValue(0)))`<br>`.build()))`<br><br>`// Iterate over pages with lazy loading or over all items`<br>`from the same table.` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Tulis beberapa item ke beberapa tabel dalam satu batch<br><br>Operasi DynamoDB BatchWriteItem | `mapper.batchSave(Arrays.asList(customer1,`<br><br>`  customer2,`<br><br>`  book1))` | `enhancedClient.batchWriteItem(batchWriteItemRequest)`<br><br>`enhancedClient.batchWriteItem(r -> r.writeBatches(`<br>`  WriteBatch.builder(Record1.class)`<br>`  .mappedTableResource(mappedTable1)`<br>`  .addPutItem(item1)`<br>`  .build(),`<br>`  WriteBatch.builder(Record2.class)`<br>`  .mappedTableResource(mappedTable2)`<br>`  .addPutItem(item2)`<br>`  .build()))` |
| Hapus beberapa item dari beberapa tabel dalam satu batch<br><br>Operasi DynamoDB BatchWriteItem | `mapper.batchDelete(Arrays.asList(customer1,`<br><br>`  customer2,`<br><br>`  book1))` | `enhancedClient.batchWriteItem(r -> r.writeBatches(`<br>`  WriteBatch.builder(Record1.class)`<br>`  .mappedTableResource(mappedTable1)`<br>`  .addDeleteItem(item1key)`<br>`  .build(),`<br>`  WriteBatch.builder(Record2.class)`<br>`  .mappedTableResource(mappedTable2)`<br>`  .addDeleteItem(item2key)`<br>`  .build()))` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Tulis/hapus beberapa item dalam satu batch<br><br>Operasi DynamoDB `BatchWriteItem` | `mapper.batchWrite(Arrays.asList(customer1, book1), Arrays.asList(customer2))` | `enhancedClient.batchWriteItem(r -> r.writeBatches( WriteBatch.builder(Record1.class) .mappedTableResource(mappedTable1) .addPutItem(item1) .build(), WriteBatch.builder(Record2.class) .mappedTableResource(mappedTable2) .addDeleteItem(item2key) .build()))` |
| Lakukan penulisan transaksional<br><br>Operasi DynamoDB `TransactWriteItem` | `mapper.transactionWrite(transactionWriteRequest)` | `enhancedClient.transactWriteItems(transasctWriteItemsRequest)` |
| Lakukan pembacaan transaksional<br><br>Operasi DynamoDB `TransactGetItem` | `mapper.transactionLoad(transactionLoadRequest)` | `enhancedClient.transactGetItems(transactGetItemsRequest)` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Dapatkan hitungan item yang cocok dari kueri<br><br>Operasi DynamoDB dengan `QuerySelect.COUNT` | `mapper.count(Customer.class, queryExpression)` | `// Get the count from query results.`<br>`PageIterable<Customer> pageIterable =`<br>`customerTable.query(QueryEnhancedRequest.builder()`<br>`.queryConditional(queryConditional)`<br>`.select(Select.COUNT)`<br>`.build());`<br>`Iterator<Page<Customer>> iterator = pageIterable.iterator();`<br>`Page<Customer> page = iterator.next();`<br>`int count = page.count();`<br><br>`// For a more concise approach, you can chain the method calls:`<br>`int count = customerTable.query(QueryEnhancedRequest.builder()`<br>`.queryConditional(queryConditional)`<br>`.select(Select.COUNT)`<br>`.build())`<br>`.iterator().next().count();` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Dapatkan hitungan item yang cocok dari pemindaian<br><br>Operasi DynamoDB dengan `Scan` `Select` `COUNT` | `mapper.count(Customer.class, scanExpression)` | `// Get the count from scan results.`<br>`PageIterable<Customer> pageIterable =`<br>`customerTable.scan(ScanEnhancedRequest.builder()`<br>`.filterExpression(filterExpression)`<br>`.select(Select.COUNT)`<br>`.build());`<br>`Iterator<Page<Customer>> iterator = pageIterable.iterator();`<br>`Page<Customer> page = iterator.next();`<br>`int count = page.count();`<br><br>`// For a more concise approach, you can chain the method calls:`<br>`int count = customerTable.scan(ScanEnhancedRequest.builder()`<br>`.filterExpression(filterExpression)`<br>`.select(Select.COUNT)`<br>`.build())`<br>`.iterator().next().count();` |

| Kasus penggu n | V1 | V2 |
| --- | --- | --- |
| Buat tabel di Dynam sesuai dengan kelas POJO<br><br>Operas Dynam `Create le` | `mapper.generateCreateTableR equest(Customer.class)`<br><br>Pernyataan sebelumnya menghasil kan permintaan tabel buat tingkat rendah; pengguna harus memanggil klien `createTable` DynamoDB. | `table.createTable(createTableRequest)`<br><br>`table.createTable(r -> r.provisi onedThroughput(defaultThroughput()) .globalSecondaryIndices( EnhancedGlobalSecondaryInde x.builder() .indexName("gsi_1") .projection(p -> p.project ionType(ProjectionType.ALL)) .provisionedThroughput(defa ultThroughput()) .build()));` |
| Lakuka pemind n paralel di Dynam<br><br>Operas **`Scan`** Dynam dengan dan parame `Segmer` `TotalS ents` | `mapper.parallelScan(Custome r.class, scanExpre ssion, numTotalS egments)` | Pengguna diminta untuk menangani thread pekerja dan memanggil `scan` untuk setiap segmen:<br><br>`table.scan(r -> r.segment(0).total Segments(5))` |

| Kasus penggu n | V1 | V2 |
| --- | --- | --- |
| Integras kan Amazor S3 dengan Dynam untuk menyim tautan S3 cerdas | `mapper.createS3Link(bucket, key)`<br>`mapper.getS3ClientCache()` | Tidak didukung karena memasangkan Amazon S3 dan DynamoDB. |

Kelas peta dan properti

Di V1 dan V2, Anda memetakan kelas ke tabel menggunakan anotasi gaya kacang. V2 juga menawarkan cara lain untuk mendefinisikan skema untuk kasus penggunaan tertentu, seperti bekerja dengan kelas yang tidak dapat diubah.

Anotasi kacang

Tabel berikut menunjukkan anotasi kacang setara untuk kasus penggunaan tertentu yang digunakan dalam V1 dan V2. Skenario `Customer` kelas digunakan untuk mengilustrasikan parameter.

Anotasi — serta kelas dan pencacahan — di V2 ikuti konvensi kasus unta dan gunakan '', bukan 'DynamoDB'. DynamoDb

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Petakan kelas ke tabel | `@DynamoDBTable (tableName ="CustomerTable")` | `@DynamoDbBean`<br>`@DynamoDbBean(converterProviders = {...})` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| | | Nama tabel didefinisikan saat memanggil `DynamoDbEnhancedClient#table()` metode. |
| Menunjuk anggota kelas sebagai atribut tabel | `@DynamoDBAttribute (attributeName = "customerName")` | `@DynamoDbAttribute("customerName")` |
| Menunjuk anggota kelas adalah kunci hash/ partition | `@DynamoDBHashKey` | `@DynamoDbPartitionKey` |
| Menunjuk anggota kelas adalah kunci range/ sort | `@DynamoDBRangeKey` | `@DynamoDbSortKey` |
| Menunjuk anggota kelas adalah kunci hash/ partisi indeks sekunder | `@DynamoDBIndexHash Key` | `@DynamoDbSecondaryPartitionKey` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Menunjuk anggota kelas adalah kunci rentang/sortir indeks sekunder | `@DynamoDBIndexRangeKey` | `@DynamoDbSecondarySortKey` |
| Abaikan anggota kelas ini saat memetakan ke tabel | `@DynamoDBIgnore` | `@DynamoDbIgnore` |
| Tentukan anggota kelas sebagai atribut kunci UUID yang dibuat secara otomatis | `@DynamoDBAutoGeneratedKey` | `@DynamoDbAutoGeneratedUuid`<br><br>Ekstensi yang menyediakan ini tidak dimuat secara default; Anda harus menambahkan ekstensi ke pembuat klien. |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Tentukan anggota kelas sebagai atribut stempel waktu yang dibuat secara otomatis | `@DynamoDBAutoGeneratedTimestamp` | `@DynamoDbAutoGeneratedTimestampAttribute`<br><br>Ekstensi yang menyediakan ini tidak dimuat secara default; Anda harus menambahkan ekstensi ke pembuat klien. |
| Menunjuk anggota kelas sebagai atribut versi auto-incremented | `@DynamoDBVersionAttribute` | `@DynamoDbVersionAttribute`<br><br>Ekstensi yang menyediakan ini dimuat secara otomatis. |
| Menunjuk anggota kelas sebagai membutuhkan konversi kustom | `@DynamoDBTypeConverted` | `@DynamoDbConvertedBy` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Menunjuk anggota kelas untuk disimpan sebagai jenis atribut yang berbeda | `@DynamoDBTyped(<DynamoDBAttributeType>)` | Gunakan `AttributeConverter` implementasi. V2 menyediakan banyak konverter bawaan untuk tipe Java umum. Anda juga dapat menerapkan kebiasaan Anda sendiri `AttributeConverter` atau`AttributeConverterProvider` . Lihat the section called “Konversi atribut kontrol” di panduan ini. |
| Tentukan kelas yang dapat diserialisasikan ke dokumen DynamoDB (dokumen gaya JSON) atau sub-dokumen | `@DynamoDBDocument` | Gunakan API Dokumen yang Ditingkatkan. Lihat sumber daya berikut:<br>• the section called “Bekerja dengan dokumen JSON” dalam panduan ini<br>• Posting blog diterbitkan saat Enhanced Document API dirilis |

V2 anotasi tambahan

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Menunjuk anggota kelas untuk tidak disimpan sebagai atribut NULL jika nilai Java adalah null | N/A | `@DynamoDbIgnoreNulls` |
| Menunjuk anggota kelas untuk menjadi objek kosong jika semua atribut adalah null | N/A | `@DynamoDbPreserveEmptyObject` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Tentukan tindakan pembaruan khusus untuk anggota kelas | N/A | `@DynamoDbUpdateBehavior` |
| Tentukan kelas yang tidak dapat diubah | N/A | `@DynamoDbImmutable` |
| Menunjuk anggota kelas sebagai atribut counter auto-incremented | N/A | `@DynamoDbAtomicCounter`<br><br>Ekstensi yang menyediakan fungsi ini dimuat secara otomatis. |

Konfigurasi

Di V1, Anda biasanya mengontrol perilaku tertentu dengan menggunakan instance dari. `DynamoDBMapperConfig` Anda dapat menyediakan objek konfigurasi baik ketika Anda membuat mapper atau ketika Anda membuat permintaan. Dalam V2, konfigurasi khusus untuk objek permintaan untuk operasi.

| Kasus penggunaan | V1 | Default di V1 | V2 |
| --- | --- | --- | --- |
| | `DynamoDBMapperConfig.builder()` | | |
| Strategi load/write coba lagi Batch | `.withBatchLoadRetryStrategy(loadRetryStrategy)`<br><br>`.withBatchWriteRetryStrateg` | coba lagi item yang gagal | Konfigurasikan strategi coba lagi pada yang mendasarinya`DynamoDBClient` . Lihat the section called “Percobaan ulang” di panduan ini. |

| Kasus penggunaan | V1 | Default di V1 | V2 |
|---|---|---|---|
| | `y(writeRetryStrategy)` | | |
| Bacaan yang konsisten | `.withConsistentReads(CONSISTENT)` | `EVENTU` | Secara default, pembacaan konsisten salah untuk operasi baca. Ganti dengan `.consistentRead(true)` objek permintaan. |
| Skema konversi dengan set marshallers/ unmarshallers | `.withConversionSchema(conversionSchema)`<br>Implementasi statis memberikan kompatibilitas mundur dengan versi yang lebih lama. | `V2_COMPATIBLE` | Tidak berlaku. Ini adalah fitur lama yang mengacu pada bagaimana versi awal DynamoDB (V1) menyimpan tipe data, dan perilaku ini tidak akan dipertahankan di klien yang disempurnakan. Contoh perilaku di DynamoDB V1 adalah menyimpan boolean sebagai Number, bukan sebagai Boolean. |
| Nama tabel | `.withObjectTableNameResolver()`<br>`.withTableNameOverride()`<br>`.withTableNameResolver()`<br>Implementasi statis memberikan kompatibilitas mundur dengan versi yang lebih lama | gunakan anotasi atau tebakan dari kelas | Nama tabel didefinisikan saat memanggil `DynamoDbEnhancedClient#table()` metode. |

| Kasus penggunaan | V1 | Default di V1 | V2 |
|---|---|---|---|
| Strategi beban paginasi | `.withPaginationLoadingStrategy(strategy)`<br><br>Pilihannya adalah: `LAZY_LOADING`,, `EAGER_LOADING` atau `ITERATION_ONLY` | `LAZY_LOADING` | • Iterasi saja adalah default. Opsi V1 lainnya tidak didukung.<br>• Anda dapat mengimplementasikan yang setara dengan eager loading di V2 dengan yang berikut:<br>`List<Customer> allItems = customerTable.scan().items().stream().collect(Collectors.toList());`<br>• Untuk pemuatan lambat, Anda harus menerapkan logika caching Anda sendiri untuk item yang diakses. |
| Minta pengumpulan metrik | `.withRequestMetricCollector(collector)` | `null` | Gunakan `metricPublisher()` `ClientOverrideConfiguration` saat membangun klien DynamoDB standar. |

| Kasus penggunaan | V1 | Default di V1 | V2 |
|---|---|---|---|
| Simpan perilaku | `.withSaveBehavior(SaveBehavior.CLOBBER)`<br><br>Pilihannya adalah `UPDATE`, `CLOBBER`, `PUT`, `APPEND_SET`, atau `UPDATE_SKIP_NULL_ATTRIBUTES`. | `UPDATE` | Di V2, Anda menelepon `putItem()` atau `updateItem()` secara eksplisit.<br><br>`CLOBBER` or `PUT`: Tindakan yang sesuai di v2 memanggil `putItem()`. Tidak ada `CLOBBER` konfigurasi khusus.<br><br>`UPDATE`: Sesuai dengan `updateItem()`<br><br>`UPDATE_SKIP_NULL_ATTRIBUTES`: Sesuai dengan `updateItem()`. Kontrol perilaku pembaruan dengan setelan permintaan `ignoreNulls` dan anotasi/tag `DynamoDbUpdateBehavior`.<br><br>`APPEND_SET`: Tidak didukung |
| Jenis konverter pabrik | `.withTypeConverterFactory(typeConverterFactory)` | konverter tipe standar | Atur kacang dengan menggunakan<br><br>`@DynamoDbBean(converterProviders = {ConverterProvider.class, DefaultAttributeConverterProvider.class})` |

Konfigurasi per operasi

Di V1, beberapa operasi, seperti `query()`, sangat dapat dikonfigurasi melalui objek “ekspresi” yang dikirimkan ke operasi. Contoh:

```
DynamoDBQueryExpression<Customer> emailBwQueryExpr = new
 DynamoDBQueryExpression<Customer>()
    .withRangeKeyCondition("Email",
        new Condition()
            .withComparisonOperator(ComparisonOperator.BEGINS_WITH)
            .withAttributeValueList(
```

```
                new AttributeValue().withS("my")));

mapper.query(Customer.class, emailBwQueryExpr);
```

Di V2, alih-alih menggunakan objek konfigurasi, Anda menetapkan parameter pada objek permintaan dengan menggunakan pembuat. Contoh:

```
QueryEnhancedRequest emailBw = QueryEnhancedRequest.builder()
    .queryConditional(QueryConditional
        .sortBeginsWith(kb -> kb
            .sortValue("my"))).build();

customerTable.query(emailBw);
```

Kondisional

Dalam V2, ekspresi kondisional dan penyaringan diekspresikan menggunakan `Expression` objek, yang merangkum kondisi dan pemetaan nama dan filter.

| Kasus penggunan | Operasi | V1 | V2 |
|---|---|---|---|
| Kondisi atribut yang diharapkan | save (), delete (), query (), scan () | `new DynamoDBSaveExpression()  .withExpected(Collections.singletonMap(  "otherAttribute", new  ExpectedAttributeValue(false)))  .withConditionalOperator(ConditionalOperator.AND);` | Usang; gunakan sebagai gantinya. `ConditionExpression` |
| Ekspresi kondisi | hapus () | `deleteExpression.setConditionExpression("zipcode  = :zipcode")` | `Expression conditionExpression =  Expression.builder()  .expression("#key = :value  OR #key1 = :value1")` |

| Kasus penggunan | Operasi | V1 | V2 |
|---|---|---|---|
| | | deleteExpression<br>.setExpressionAttr<br>ibuteValues(...) | .putExpressionName("#key",<br>"attribute")<br>.putExpressionName<br>("#key1", "attribute3")<br>.putExpressionValu<br>e(":value", AttributeValues.st<br>ringValue("wrong"))<br>.putExpressionValu<br>e(":value1", AttributeValues.st<br>ringValue("three"))<br>.build();<br><br>DeleteItemEnhancedRequest request<br>= DeleteItemEnhancedRequest.b<br>uilder()<br>.conditionExpressi<br>on(conditionExpression).build(); |
| Ekspresi filter | query (), scan () | scanExpression<br>.withFilterExpress<br>ion("#statename<br>= :state")<br>.withExpressionAtt<br>ributeValues(attri<br>buteValueMapBuilde<br>r.build())<br>.withExpressionAtt<br>ributeNames(attrib<br>uteNameMapBuilder.<br>build()) | Map<String, AttributeValue> values<br>= singletonMap(":key", stringVal<br>ue("value"));<br>Expression filterExpression =<br>Expression.builder()<br>.expression("name = :key")<br>.expressionValues(values)<br>.build();<br>QueryEnhancedRequest request =<br>QueryEnhancedRequest.builder()<br>.filterExpression(filterExp<br>ression).build(); |

| Kasus penggunan | Operasi | V1 | V2 |
| --- | --- | --- | --- |
| Ekspresi kondisi untuk kueri | kueri () | `queryExpression.withKeyConditionExpression()` | `QueryConditional keyEqual = QueryConditional.keyEqualTo(b -> b .partitionValue("movie01"));`<br><br>`QueryEnhancedRequest tableQuery = QueryEnhancedRequest.builder() .queryConditional(keyEqual) .build();` |

Jenis konversi

Konverter default

Di V2, SDK menyediakan satu set konverter default untuk semua tipe umum. Anda dapat mengubah konverter tipe baik di tingkat penyedia keseluruhan maupun untuk satu atribut. Anda dapat menemukan daftar konverter yang tersedia di referensi AttributeConverterAPI.

Menetapkan konverter kustom untuk atribut

Di V1, Anda dapat membuat anotasi metode pengambil dengan `@DynamoDBTypeConverted` untuk menentukan kelas yang mengkonversi antara tipe atribut Java dan tipe atribut DynamoDB. Misalnya, `CurrencyFormatConverter` yang mengkonversi antara `Currency` tipe Java dan DynamoDB String dapat diterapkan seperti yang ditunjukkan pada cuplikan berikut.

```
@DynamoDBTypeConverted(converter = CurrencyFormatConverter.class)
public Currency getCurrency() { return currency; }
```

Setara V2 dari cuplikan sebelumnya ditunjukkan di bawah ini.

```
@DynamoDbConvertedBy(CurrencyFormatConverter.class)
public Currency getCurrency() { return currency; }
```

> **Note**
>
> Di V1, Anda dapat menerapkan anotasi ke atribut itu sendiri, tipe atau anotasi yang ditentukan pengguna, V2 mendukung penerapan anotasi hanya ke pengambil.

Tambahkan pabrik atau penyedia konverter tipe

Di V1, Anda dapat menyediakan set konverter tipe Anda sendiri, atau mengganti tipe yang Anda pedulikan dengan menambahkan pabrik konverter tipe ke konfigurasi. Pabrik konverter tipe meluas`DynamoDBTypeConverterFactory`, dan penggantian dilakukan dengan mendapatkan referensi ke set default dan memperluasnya. Cuplikan berikut menunjukkan cara melakukan ini.

```
DynamoDBTypeConverterFactory typeConverterFactory =
    DynamoDBTypeConverterFactory.standard().override()
        .with(String.class, CustomBoolean.class, new DynamoDBTypeConverter<String,
 CustomBoolean>() {
            @Override
            public String convert(CustomBoolean bool) {
                return String.valueOf(bool.getValue());
            }
            @Override
            public CustomBoolean unconvert(String string) {
                return new CustomBoolean(Boolean.valueOf(string));
            }}).build();
DynamoDBMapperConfig config =
    DynamoDBMapperConfig.builder()
        .withTypeConverterFactory(typeConverterFactory)
        .build();
DynamoDBMapper mapperWithTypeConverterFactory = new DynamoDBMapper(dynamo, config);
```

V2 menyediakan fungsionalitas serupa melalui `@DynamoDbBean` anotasi. Anda dapat memberikan satu `AttributeConverterProvider` atau satu rantai pesanan `AttributeConverterProvider` s. Perhatikan bahwa jika Anda menyediakan rantai penyedia konverter atribut Anda sendiri, Anda akan mengganti penyedia konverter default dan harus memasukkannya ke dalam rantai untuk menggunakan konverter atributnya.

```
@DynamoDbBean(converterProviders = {
   ConverterProvider1.class,
   ConverterProvider2.class,
   DefaultAttributeConverterProvider.class})
```

```
public class Customer {
  ...
}
```

Bagian tentang konversi atribut dalam panduan ini berisi contoh lengkap untuk V2.

String menangani perbedaan antara versi 1 dan versi 2 dari SDK for Java

V1 dan V2 menangani string kosong secara berbeda saat mengirim data ke DynamoDB:

- V1: Mengkonversi string kosong ke nilai null sebelum mengirim ke DynamoDB (menghasilkan tidak ada atribut)
- V2: Mengirim string kosong sebagai nilai string kosong aktual ke DynamoDB

> **Important**
>
> Setelah bermigrasi ke V2, jika Anda tidak ingin string kosong disimpan di DynamoDB, Anda harus menerapkan konverter khusus. Tanpa konverter khusus, V2 menyimpan string kosong sebagai atribut string kosong yang sebenarnya di item DynamoDB Anda, yang berbeda dari perilaku V1 menghilangkan atribut ini sepenuhnya.

Example konverter khusus untuk V2 yang mengubah atribut string kosong menjadi null

```
/**
 * Custom converter that maintains V1 behavior by converting empty strings to null
 values
 * when writing to DynamoDB, ensuring compatibility with existing data. No attribute
 will be saved to DynamoDB.
 */
public class NullifyEmptyStringConverter implements AttributeConverter<String> {
    @Override
    public AttributeValue transformFrom(String value) {
        if (value == null || value.isEmpty()) {
            return AttributeValue.builder().nul(true).build();
        }
        return AttributeValue.builder().s(value).build();
    }

    @Override
```

```
    public String transformTo(AttributeValue attributeValue) {
        if (attributeValue.nul()) {
            return null;
        }
        return attributeValue.s();
    }

    @Override
    public EnhancedType<String> type() {
        return EnhancedType.of(String.class);
    }

    @Override
    public AttributeValueType attributeValueType() {
        return AttributeValueType.S;
    }
}

// V2 usage:
@DynamoDbBean
public class Customer {
    private String name;

    @DynamoDbConvertedBy(NullifyEmptyStringConverter.class)
    public String getName() {
        return name;
    }
}
```

Perbedaan penguncian optimis antara versi 1 dan versi 2 dari SDK for Java

Baik V1 dan V2 menerapkan penguncian optimis dengan anotasi atribut yang menandai satu properti di kelas kacang Anda untuk menyimpan nomor versi.

Perbedaan perilaku penguncian yang optimis

| | V1 | V2 |
|---|---|---|
| Anotasi kelas kacang | `@DynamoDBVersionAttribute` | `@DynamoDbVersionAttribute` (perhatikan bahwa V2 menggunakan huruf kecil “b”) |

| | V1 | V2 |
|---|---|---|
| Simpan awal | Atribut nomor versi disetel ke 1. | Nilai awal untuk atribut versi ditetapkan dengan`@DynamoDb VersionAttribute(startAt = X)`. Nilai default-nya adalah 0. |
| Perbarui | Atribut nomor versi bertambah 1 jika pemeriksaan bersyarat memverifikasi bahwa nomor versi objek yang diperbarui cocok dengan nomor dalam database. | Atribut nomor versi bertambah jika pemeriksaan bersyarat memverifikasi bahwa nomor versi objek yang diperbarui cocok dengan nomor dalam database.<br><br>Atribut nomor versi ditambah dengan `incrementBy` opsi yang ditetapkan dengan`@DynamoDbVersionAttribute(incrementBy = X)`. Nilai default adalah 1. |

<table>
<tr><th></th><th>V1</th><th>V2</th></tr>
<tr><td>Delete</td><td><code>DynamoDBMapper</code> menambahkan pemeriksaan bersyarat bahwa nomor versi objek yang dihapus cocok dengan nomor versi dalam database.</td><td>V2 tidak tidak secara otomatis menambahkan kondisi untuk operasi penghapusan. Anda harus menambahkan ekspresi kondisi secara manual jika Anda ingin mengontrol perilaku hapus.<br><br>Dalam contoh berikut <code>recordVersion</code> adalah atribut versi kacang.<br><br><pre>// 1. Read the item and get its current version.
Customer item = customerTable.getItem(Key.builder().
partitionValue("someId").build());
AttributeValue currentVersion = item.getRecordVers
ion();

// 2. Create conditional delete with the `currentV
ersion` value.
DeleteItemEnhancedRequest deleteItemRequest =
    DeleteItemEnhancedRequest.builder()
       .key(KEY)
       .conditionExpression(Expression.builder()
           .expression("recordVersion = :current_
version_value")
           .putExpressionValue(":current_versio
n_value", currentVersion)
           .build()).build();

customerTable.deleteItem(deleteItemRequest);</pre></td></tr>
</table>

| | V1 | V2 |
|---|---|---|
| Tulis Transaksional dengan Pemeriksaan Kondisi | Anda tidak dapat menggunakan kelas kacang yang dianotasi dengan `@DynamoDBVersionAttribute` metode. `addConditionCheck` | Anda dapat menggunakan kelas kacang dengan `@DynamoDbVersionAttribute` anotasi dalam metode `addConditionCheck` pembangun untuk `transactWriteItems` permintaan. |
| Nonaktifkan | Nonaktifkan penguncian optimis dengan mengubah nilai `DynamoDBMapperConfig.SaveBehavior` enumerasi dari ke. `UPDATE` `CLOBBER` | Jangan gunakan `@DynamoDbVersionAttribute` anotasi. |

Perbedaan setter yang lancar antara versi 1 dan versi 2 dari SDK for Java

Anda dapat menggunakan POJOs dengan penyetel yang lancar di API pemetaan DynamoDB untuk V1 dan dengan V2 sejak versi 2.30.29.

Misalnya, POJO berikut mengembalikan `Customer` instance dari `setName` metode:

```
// V1

@DynamoDBTable(tableName ="Customer")
public class Customer{
```

```
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;
  }
}
```

Namun, jika Anda menggunakan versi V2 sebelum 2.30.29, `setName` mengembalikan `Customer` instance dengan `name` nilai. `null`

```
// V2 prior to version 2.30.29.

@DynamoDbBean
public class Customer{
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;  // Bug: returns this instance with a `name` value of `null`.
  }
}
```

```
// Available in V2 since version 2.30.29.

@DynamoDbBean
public class Customer{
  private String name;
  // Other attributes and methods not shown.
  public Customer setName(String name){
     this.name = name;
     return this;  // Returns this instance for method chaining with the `name` value
 set.
  }
}
```

## Perbedaan API dokumen antara versi 1 dan versi 2 AWS SDK untuk Java

Document API mendukung bekerja dengan dokumen bergaya JSON sebagai item tunggal dalam tabel DynamoDB. V1 Document API memiliki API yang sesuai di V2, tetapi alih-alih menggunakan klien terpisah untuk API dokumen seperti pada V1, V2 menggabungkan fitur API dokumen dalam klien yang disempurnakan DynamoDB.

Di V1, `Item`kelas mewakili catatan tidak terstruktur dari tabel DynamoDB. Dalam V2, catatan tidak terstruktur diwakili oleh instance `EnhancedDocument`kelas. Perhatikan bahwa kunci primer didefinisikan dalam skema tabel untuk V2, dan pada item itu sendiri di V1.

Tabel di bawah ini membandingkan perbedaan antara Dokumen APIs di V1 dan V2.

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Buat klien dokumen | `AmazonDynamoDB client = ... //Create a client. DynamoDB documentClient = new DynamoDB(client);` | `// The V2 Document API uses the same DynamoDbEnhancedClient // that is used for mapping POJOs. DynamoDbClient standardClient = ... //Create a standard client. DynamoDbEnhancedClient enhancedClient = ... // Create an enhanced client.` |
| Referensi tabel | `Table documentTable = docClient.documentClient("Person");` | `DynamoDbTable<EnhancedDocument> documentTable = enhancedClient.table("Person", TableSchema.documentSchemaBuilder() .addIndexPartitionKey(TableMetadata.primaryIndexName(),"id", AttributeValueType.S) .attributeConverterProviders(AttributeConverterProvider.defaultProvider())` |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| | | `.build())`<br>`;` |
| Work with semi-structured data | | |
| Put item | `Item item = new Item()`<br>`.withPrimaryKey("id", 50)`<br>`.withString("firstName", "Shirley");`<br>`PutItemOutcome outcome = documentTable.putItem(item);` | `EnhancedDocument personDocument = EnhancedDocument.builder()`<br>`.putNumber("id", 50)`<br>`.putString("firstName", "Shirley")`<br>`.build();`<br>`documentTable.putItem(personDocument);` |
| Get item | `GetItemOutcome outcome = documentTable.getItemOutcome( "id", 50);`<br>`Item personDocFromDb = outcome.getItem();`<br>`String firstName = personDocFromDb.getString("firstName");` | `EnhancedDocument personDocFromDb = documentTable`<br>`.getItem(`<br>`Key.builder()`<br>`.partitionValue(50)`<br>`.build());`<br>`String firstName = personDocFromDb.getString("firstName");` |
| Work with JSON items | | |

| Kasus penggunaan | V1 | V2 |
| --- | --- | --- |
| Mengkonversi struktur JSON untuk menggunakannya dengan Document API | `// The 'jsonPerson' identifier is a JSON string. Item item = new Item().fromJSON(jsonPerson);` | `// The 'jsonPerson' identifier is a JSON string. EnhancedDocument document = EnhancedDocument.builder() .json(jsonPerson).build());` |
| Masukan JSON | `documentTable.putItem(item)` | `documentTable.putItem(document);` |
| Baca JSON | `GetItemOutcome outcome = //Get item. String jsonPerson = outcome.getItem().toJSON();` | `String jsonPerson = documentTable.getItem(Key.builder() .partitionValue(50).build()) .fromJson();` |

Referensi API dan panduan untuk dokumen APIs

| | V1 | V2 |
| --- | --- | --- |
| Referensi API | Referensi API | Referensi API |
| Panduan dokumentasi | Panduan Pengembang Amazon DynamoDB | API Dokumen yang Ditingkatkan (panduan ini) |

### V1 Xpec API ke V2 Expressions API

Expression Specification (Xspec) API yang tersedia di V1 yang membantu membuat ekspresi untuk bekerja dengan data berorientasi dokumen tidak tersedia di V2. V2 menggunakan Expression API, yang bekerja dengan data berorientasi dokumen dan object-to-item data yang dipetakan.

| | V1 | V2 |
|---|---|---|
| Nama API | Spesifikasi Ekspresi (Xspec) API | Ekspresi API |
| Bekerja dengan | Metode kelas Tabel API Dokumen seperti UpdateItem dan scan | Kedua APIs DynamoDB Enhanced Client:<br>1. metode API object-to-item pemetaan<br>2. metode API Dokumen yang Ditingkatkan untuk bekerja dengan data berorientasi dokumen (JSON)<br><br>Untuk kedua jenis APIs, setelah Anda memperoleh `DynamoDbTable` instance:<br>• Dari `BeanTableSchema`, misalnya, untuk API object-to-item pemetaan<br>• Dari a `DocumentTableSchema` untuk API berorientasi dokumen<br><br>Anda menggunakan ekspresi dalam `DynamoDbTable` metode saat Anda membuat objek permintaan. Misalnya dalam `filterExpression` metode `QueryEnhancedRequest.Builder` |
| Sumber daya | • Posting blog rilis awal Xpec<br>• Referensi API | Informasi ekspresi dalam Panduan Pengembang Java ini |

### Migrasi perpustakaan enkripsi

Untuk informasi tentang memigrasi pustaka enkripsi agar DynamoDB berfungsi dengan V2 dari Java SDK, lihat Panduan Pengembang Klien Enkripsi Amazon DynamoDB.

## Perubahan dalam batch permintaan Amazon SQS otomatis dari versi 1 ke versi 2

Topik ini merinci perubahan dalam pengelompokan permintaan otomatis untuk Amazon SQS antara versi 1 dan versi 2. AWS SDK untuk Java

### Perubahan tingkat tinggi

AWS SDK untuk Java 1.x melakukan buffering sisi klien menggunakan `AmazonSQSBufferedAsyncClient` kelas terpisah yang memerlukan inisialisasi eksplisit untuk pengelompokan permintaan.

AWS SDK for Java 2.x Menyederhanakan dan meningkatkan fungsionalitas buffering dengan. `SqsAsyncBatchManager` Implementasi antarmuka ini menyediakan kemampuan batching permintaan otomatis yang terintegrasi langsung dengan standar`SqsAsyncClient`. Untuk mempelajari tentang v2`SqsAsyncBatchManager`, lihat the section called “Gunakan batching permintaan otomatis” topik di panduan ini.

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ketergantungan Maven | `<dependencyManagement> <dependencies> <dependency> <groupId> com.amazonaws</groupId> <artifact Id>aws-java-sdk-bom</artifactId> <version> 1.12.782[1]</version> <type>pom</type> <scope>import</scope>` | `<dependencyManagement> <dependencies> <dependency> <groupId> software.amazon.awssdk</groupId> <artifact Id>bom</artifactId> <version> 2.31.15[2]</version> <type>pom</type> <scope>import</scope> </dependency>` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | `</dependency>`<br>`</dependencies>`<br>`</dependencyManagement>`<br>`<dependencies>`<br>`<dependency>`<br>`<groupId>com.amazonaws</groupId>`<br>`<artifactId>aws-java-sdk-sqs</artifactId>`<br>`</dependency>`<br>`</dependencies>` | `</dependencies>`<br>`</dependencyManagement>`<br>`<dependencies>`<br>`<dependency>`<br>`<groupId>software.amazon.awssdk</groupId>`<br>`<artifactId>sqs</artifactId>`<br>`</dependency>`<br>`</dependencies>` |
| Nama Package | `com.amazonaws.services.sqs.buffered` | `software.amazon.awssdk.services.sqs.batchmanager` |
| Nama kelas | AmazonSQSBufferedAsyncClient | SqsAsyncBatchManager |

[1] Versi terbaru. [2] Versi terbaru.

## Menggunakan batching permintaan SQS otomatis

| Ubah | v1 | v2 |
| --- | --- | --- |
| Buat pengelola batch | `AmazonSQSAsync sqsAsync = new AmazonSQSAsyncClient();`<br>`AmazonSQSAsync bufferedSqs = new AmazonSQSBufferedAsyncClient(sqsAsync);` | `SqsAsyncClient asyncClient = SqsAsyncClient.create();`<br>`SqsAsyncBatchManager sqsAsyncBatchManager = asyncClient.batchManager();` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Buat pengelola batch dengan konfigurasi khusus | `AmazonSQSAsync sqsAsync = new AmazonSQSAsyncClient();`<br><br>`QueueBufferConfig queueBufferConfig = new QueueBufferConfig()`<br>`.withMaxBatchOpenMs(200)`<br>`.withMaxBatchSize(10)`<br>`.withMinReceiveWaitTimeMs(1000)`<br>`.withVisibilityTimeoutSeconds(20)`<br>`.withReceiveMessageAttributeNames(messageAttributeValues);`<br><br>`AmazonSQSAsync bufferedSqs = new AmazonSQSBufferedAsyncClient(sqsAsync, queueBufferConfig);` | `BatchOverrideConfiguration batchOverrideConfiguration = BatchOverrideConfiguration.builder()`<br>`.sendRequestFrequency(Duration.ofMillis(200))`<br>`.maxBatchSize(10)`<br>`.receiveMessageMinWaitDuration(Duration.ofMillis(1000))`<br>`.receiveMessageVisibilityTimeout(Duration.ofSeconds(20))`<br>`.receiveMessageSystemAttributeNames(messageSystemAttributeNames)`<br>`.receiveMessageAttributeNames(messageAttributeValues)`<br>`.build();`<br><br>`SqsAsyncBatchManager sqsAsyncBatchManager = SqsAsyncBatchManager.builder()`<br>`.overrideConfiguration(batchOverrideConfiguration)`<br>`.client(SqsAsyncClient.create())`<br>`.scheduledExecutor(Executor` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | | s.newScheduledThre<br>adPool(8))<br>.build(); |
| Kirim pesan | Future<SendMessage<br>Result> sendResul<br>tFuture =<br>bufferedS<br>qs.sendMessageAsyn<br>c(new SendMessa<br>geRequest()<br><br>.withQueueUrl(queu<br>eUrl)<br><br>.withMessageBody(b<br>ody)); | CompletableFuture<<br>SendMessageResponse><br>sendCompletableFuture<br>=<br>sqsAsyncB<br>atchManager.sendMe<br>ssage(<br><br>SendMessageRequest<br>.builder()<br><br>.queueUrl(queueUrl)<br><br>.messageBody(body)<br><br>.build()); |
| Hapus pesan | Future<DeleteMessa<br>geResult> deletResu<br>ltFuture =<br>bufferedS<br>qs.deleteMessageAs<br>ync(new DeleteMes<br>sageRequest()<br><br>.withQueueUrl(queu<br>eUrl)); | CompletableFuture<<br>DeleteMessageRespo<br>nse> deleteRes<br>ultCompletableFuture<br>= sqsAsyncB<br>atchManager.delete<br>Message(<br><br>DeleteMessageReque<br>st.builder()<br><br>.queueUrl(queueUrl)<br><br>.build()); |

| Ubah | v1 | v2 |
| --- | --- | --- |
| Ubah visibilitas pesan | `Future<ChangeMessageVisibilityResult> changeVisibilityResultFuture = bufferedSqs.changeMessageVisibilityAsync (new ChangeMessageVisibilityRequest() .withQueueUrl(queueUrl) .withVisibilityTimeout(20));` | `CompletableFuture<ChangeMessageVisibilityResponse> changeResponseCompletableFuture = sqsAsyncBatchManager.changeMessageVisibility( ChangeMessageVisibilityRequest.builder() .queueUrl(queueUrl) .visibilityTimeout(20) .build());` |
| Menerima pesan | `ReceiveMessageResult receiveResult = bufferedSqs.receiveMessage( new ReceiveMessageRequest() .withQueueUrl(queueUrl));` | `CompletableFuture<ReceiveMessageResponse> responseCompletableFuture = sqsAsyncBatchManager.receiveMessage( ReceiveMessageRequest.builder() .queueUrl(queueUrl) .build());` |

## Perbedaan tipe pengembalian asinkron

| Ubah | v1 | v2 |
| --- | --- | --- |
| Jenis pengembalian | `Future<ResultType>` | `CompletableFuture< ResponseType>` |
| Mekanisme panggilan balik | Membutuhkan `AsyncHand ler` dengan `onError` metode `onSuccess` dan terpisah | Penggunaan `Completab leFuture` APIs yang disediakan oleh JDK, sepertiwhenCompl ete() ,, thenCompose() thenApply() |
| Penanganan pengecualian | Menggunakan `AsyncHand ler#onError()` metode | Penggunaan `Completab leFuture` APIs yang disediakan oleh JDK, seperti,`exceptionally()` , `handle()` atau `whenCompl ete()` |
| Pembatalan | Dukungan dasar melalui `Future.cancel()` | Membatalkan induk `CompletableFuture` secara otomatis membatalk an semua futures dependen dalam rantai |

## Perbedaan penanganan penyelesaian asinkron

| Ubah | v1 | v2 |
| --- | --- | --- |
| Implementasi penangan respons | `Future<ReceiveMess ageResult> future = bufferedSqs.receiv eMessageAsync( receiveRequest,` | `CompletableFuture< ReceiveMessageResp onse> completab leFuture = sqsAsyncB atchManager` |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | new AsyncHandler<ReceiveMessageRequest, ReceiveMessageResult>() {<br>@Override<br>public void onSuccess(ReceiveMessageRequest request,<br>ReceiveMessageResult result) {<br>List<Message> messages = result.getMessages();<br>System.out.println("Received " + messages.size() + " messages");<br>for (Message message : messages) {<br>System.out.println("Message ID: " + message.getMessageId());<br>System.out.println("Body: " + message.getBody());<br>}<br>}<br>@Override<br>public void onError(Exception e) {<br>System.err.println("Error receiving | .receiveMessage(ReceiveMessageRequest.builder()<br>.queueUrl(queueUrl).build())<br>.whenComplete((receiveMessageResponse, throwable) -> {<br>if (throwable != null) {<br>System.err.println("Error receiving messages: " + throwable.getMessage());<br>throwable.printStackTrace();<br>} else {<br>List<Message> messages = receiveMessageResponse.messages();<br>System.out.println("Received " + messages.size() + " messages");<br>for (Message message : messages) {<br>System.out.println("Message ID: " + message.messageId());<br>System.out.println("Body: " + message.body());<br>}<br>} |

| Ubah | v1 | v2 |
| --- | --- | --- |
| | <pre>messages: " + e.getMessage());<br><br>e.printStackTrace();<br>}<br>}<br>);</pre> | <pre>});</pre> |

## Parameter konfigurasi kunci

| Parameter | v1 | v2 |
| --- | --- | --- |
| Ukuran batch maksimum | `maxBatchSize` (default 10 permintaan per batch) | `maxBatchSize` (default 10 permintaan per batch) |
| Waktu tunggu Batch | `maxBatchOpenMs` (default 200 ms) | `sendRequestFrequency` (default 200 ms) |
| Batas waktu visibilitas | `visibilityTimeoutSeconds` (-1 untuk antrian default) | `receiveMessageVisibilityTimeout` (antrian default) |
| Waktu tunggu minimum | `longPollWaitTimeoutSeconds` (20-an kapan `longPoll` itu benar) | `receiveMessageMinWaitDuration` (default 50 ms) |
| Atribut pesan | Atur menggunakan `ReceiveMessageRequest` | `receiveMessageAttributeNames` (tidak ada secara default) |
| Atribut sistem | Atur menggunakan `ReceiveMessageRequest` | `receiveMessageSystemAttributeNames` (tidak ada secara default) |
| Pemungutan suara panjang | `longPoll`(default benar) | Tidak didukung untuk menghindari koneksi terbuka |

| Parameter | v1 | v2 |
| --- | --- | --- |
| | | menunggu sampai server mengirim pesan |
| Waktu tunggu maksimal untuk polling panjang | `longPollWaitTimeoutSeconds` (default 20-an) | Tidak didukung untuk menghindari koneksi terbuka menunggu sampai server mengirim pesan |
| Jumlah maksimum batch penerimaan yang diambil sebelumnya yang disimpan di sisi klien | `maxDoneReceiveBatches` (10 batch) | Tidak didukung karena ditangani secara internal |
| Jumlah maksimum batch keluar aktif yang diproses secara bersamaan | `maxInflightOutboundBatches` (default 5 batch) | Tidak didukung karena ditangani secara internal |
| Jumlah maksimum batch penerima aktif yang diproses secara bersamaan | `maxInflightReceiveBatches` (default 10 batch) | Tidak didukung karena ditangani secara internal |

# Gunakan SDK for Java 1.x dan 2.x side-by-side

Anda dapat menggunakan kedua versi AWS SDK untuk Java dalam proyek Anda.

Berikut ini menunjukkan contoh `pom.xml` file untuk proyek yang menggunakan Amazon S3 dari versi 1.x dan DynamoDB dari versi 2.27.21.

Example Contoh POM

Contoh ini menunjukkan entri `pom.xml` file untuk proyek yang menggunakan versi 1.x dan 2.x SDK.

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>com.amazonaws</groupId>
            <artifactId>aws-java-sdk-bom</artifactId>
```

```
            <version>1.12.1</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
        <dependency>
          <groupId>software.amazon.awssdk</groupId>
          <artifactId>bom</artifactId>
          <version>2.27.21</version>
          <type>pom</type>
          <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
      <groupId>com.amazonaws</groupId>
      <artifactId>aws-java-sdk-s3</artifactId>
    </dependency>
    <dependency>
      <groupId>software.amazon.awssdk</groupId>
      <artifactId>dynamodb</artifactId>
    </dependency>
</dependencies>
```

# Temukan aplikasi menggunakan klien AWS SDK untuk Java 1.x

Sebelum bermigrasi ke AWS SDK for Java 2.x, Anda perlu mengidentifikasi aplikasi mana di lingkungan Anda yang menggunakan klien versi 1.x. Anda dapat menanyakan bidang “UserAgent” dalam AWS CloudTrail acara untuk menemukan aplikasi ini.

## Gunakan CloudTrail Lake untuk menemukan aplikasi dengan klien 1.x

AWS CloudTrail Lake memungkinkan Anda menanyakan peristiwa yang direkam oleh CloudTrail. Ikuti langkah-langkah berikut untuk membuat data lake yang mengidentifikasi versi SDK yang digunakan oleh aplikasi Anda:

1. Buat danau CloudTrail data. Lihat Panduan pengguna untuk membuat penyimpanan data acara.
2. Setelah Anda membuat penyimpanan data, periksa isi catatan. Badan rekaman berisi bidang yang menentukan tindakan, waktu, dan lokasi yang diminta. Untuk detailnya, lihat Panduan pengguna untuk konten CloudTrail rekaman.

3. Jalankan kueri terhadap data Anda. Ikuti Panduan Pengguna untuk menanyakan dan menyimpan hasil kueri.

Bidang UserAgent di setiap record berisi versi SDK yang membuat permintaan. Gunakan bidang ini untuk mengidentifikasi aplikasi menggunakan versi 1.x dari Java SDK.

Contoh kueri berikut menemukan semua permintaan yang dibuat dengan Java SDK 1.x mulai 17 Juni 2025, untuk ID: EventDatastore `sample-Data-Store-Id`

```
select userIdentity, eventSource, awsRegion,
    eventName, eventType, eventTime, userAgent,
    requestParameters, sourceIPAddress
 from sample-Data-Store-Id
where eventTime > '2025-06-17 00:00:00'
and userAgent like '%aws-sdk-java/1.%'
order by eventTime desc
```

Contoh konten acara dalam hasil kueri terlihat seperti ini:

```
{
    "userIdentity": "{
         "type": "IAMUser",
         "principalId": "AIDAJ45Q7YFFAREXAMPLE",
         "arn": "arn:aws:iam::123456789012:user/Alice",
         "accountId": "123456789012",
         "accessKeyId": "",
         "userName": "Alice"
    }",
    "eventSource": "dynamodb.amazonaws.com",
    "awsRegion": "us-west-2",
    "eventName": "ListTables",
    "eventType": "AwsApiCall",
    "eventTime": "2025-07-01 02:23:52.000",
    "userAgent": "aws-sdk-java/1.12.746 Linux/5.10.240 OpenJDK/11.0.25+9-LTS ...",
    "requestParameters": "",
    "sourceIPAddress": "12.345.6.78"
}
```

Anda dapat menggunakan informasi ini untuk membantu menentukan kapan dan di mana permintaan dibuat.

Dalam contoh, permintaan `ListTables` DynamoDB dibuat `2025-07-01 02:23:52 (UTC)` di dari `12.345.6.78` Alamat IP dengan kredensi pengguna IAM bernama Alice. Nilai bidang UserAgent menunjukkan bahwa permintaan dibuat menggunakan AWS SDK untuk Java versi `1.12.746` dari sistem Linux dengan JDK 11.

Untuk deskripsi bidang dalam catatan AWS CloudTrail peristiwa, lihat konten CloudTrail rekaman untuk peristiwa manajemen, data, dan aktivitas jaringan.

# Keamanan untuk AWS SDK untuk Java

Keamanan cloud di Amazon Web Services (AWS) merupakan prioritas tertinggi. Sebagai seorang pelanggan AWS , Anda mendapatkan manfaat dari pusat data dan arsitektur jaringan yang dibangun untuk memenuhi persyaratan dari organisasi yang paling sensitif terhadap keamanan. Keamanan adalah tanggung jawab bersama antara Anda AWS dan Anda. Model Tanggung Jawab Bersama menggambarkan ini sebagai Keamanan dari Cloud dan Keamanan dalam Cloud.

Security of the Cloud - AWS bertanggung jawab untuk melindungi infrastruktur yang menjalankan semua layanan yang ditawarkan di AWS Cloud dan memberi Anda layanan yang dapat Anda gunakan dengan aman. Tanggung jawab keamanan kami adalah prioritas tertinggi di AWS, dan efektivitas keamanan kami secara teratur diuji dan diverifikasi oleh auditor pihak ketiga sebagai bagian dari Program AWS Kepatuhan.

Keamanan di Cloud — Tanggung jawab Anda ditentukan oleh AWS layanan yang Anda gunakan, dan faktor-faktor lain termasuk sensitivitas data Anda, persyaratan organisasi Anda, serta undang-undang dan peraturan yang berlaku.

AWS Produk atau layanan ini mengikuti model tanggung jawab bersama melalui layanan Amazon Web Services (AWS) tertentu yang didukungnya. Untuk informasi keamanan AWS layanan, lihat halaman dokumentasi keamanan AWS layanan dan AWS layanan yang berada dalam lingkup upaya AWS kepatuhan oleh program kepatuhan.

Topik


- Perlindungan data dalam AWS SDK untuk Java 2.x
- Bekerja dengan TLS di SDK for Java
- Identity and Access Management
- Validasi Kepatuhan untuk AWS Produk atau Layanan ini
- Ketahanan untuk AWS Produk atau Layanan ini
- Keamanan Infrastruktur untuk AWS Produk atau Layanan ini


# Perlindungan data dalam AWS SDK untuk Java 2.x

Model tanggung jawab AWS bersama model berlaku untuk perlindungan data di AWS SDK untuk Java. Seperti yang dijelaskan dalam model AWS ini, bertanggung jawab untuk melindungi

infrastruktur global yang menjalankan semua AWS Cloud. Anda bertanggung jawab untuk mempertahankan kendali atas konten yang di-host pada infrastruktur ini. Anda juga bertanggung jawab atas tugas-tugas konfigurasi dan manajemen keamanan untuk Layanan AWS yang Anda gunakan. Lihat informasi yang lebih lengkap tentang privasi data dalam Pertanyaan Umum Privasi Data. Lihat informasi tentang perlindungan data di Eropa di pos blog Model Tanggung Jawab Bersama dan GDPR AWS di Blog Keamanan AWS .

Untuk tujuan perlindungan data, kami menyarankan Anda melindungi Akun AWS kredensyal dan mengatur pengguna individu dengan AWS IAM Identity Center atau AWS Identity and Access Management (IAM). Dengan cara itu, setiap pengguna hanya diberi izin yang diperlukan untuk memenuhi tanggung jawab tugasnya. Kami juga menyarankan supaya Anda mengamankan data dengan cara-cara berikut:

- Gunakan autentikasi multi-faktor (MFA) pada setiap akun.
- Gunakan SSL/TLS untuk berkomunikasi dengan AWS sumber daya. Kami mensyaratkan TLS 1.2 dan menganjurkan TLS 1.3.
- Siapkan API dan pencatatan aktivitas pengguna dengan AWS CloudTrail. Untuk informasi tentang penggunaan CloudTrail jejak untuk menangkap AWS aktivitas, lihat Bekerja dengan CloudTrail jejak di AWS CloudTrail Panduan Pengguna.
- Gunakan solusi AWS enkripsi, bersama dengan semua kontrol keamanan default di dalamnya Layanan AWS.
- Gunakan layanan keamanan terkelola tingkat lanjut seperti Amazon Macie, yang membantu menemukan dan mengamankan data sensitif yang disimpan di Amazon S3.
- Jika Anda memerlukan modul kriptografi tervalidasi FIPS 140-3 saat mengakses AWS melalui antarmuka baris perintah atau API, gunakan titik akhir FIPS. Lihat informasi selengkapnya tentang titik akhir FIPS yang tersedia di Standar Pemrosesan Informasi Federal (FIPS) 140-3.

Kami sangat merekomendasikan agar Anda tidak pernah memasukkan informasi identifikasi yang sensitif, seperti nomor rekening pelanggan Anda, ke dalam tanda atau bidang isian bebas seperti bidang Nama. Ini termasuk saat Anda bekerja dengan SDK for Java atau Layanan AWS lainnya menggunakan konsol, API AWS CLI, AWS SDKs atau. Data apa pun yang Anda masukkan ke dalam tanda atau bidang isian bebas yang digunakan untuk nama dapat digunakan untuk log penagihan atau log diagnostik. Saat Anda memberikan URL ke server eksternal, kami sangat menganjurkan supaya Anda tidak menyertakan informasi kredensial di dalam URL untuk memvalidasi permintaan Anda ke server itu.

# Bekerja dengan TLS di SDK for Java

AWS SDK untuk Java Menggunakan kemampuan TLS dari platform Java yang mendasarinya. Dalam topik ini, kami menunjukkan contoh menggunakan implementasi OpenJDK yang digunakan oleh Amazon Corretto 17.

Untuk bekerja dengan Layanan AWS, JDK yang mendasarinya harus mendukung versi minimum TLS 1.2, tetapi TLS 1.3 direkomendasikan.

Pengguna harus berkonsultasi dengan dokumentasi platform Java yang mereka gunakan dengan SDK untuk mengetahui versi TLS mana yang diaktifkan secara default serta cara mengaktifkan dan menonaktifkan versi TLS tertentu.

## Cara memeriksa informasi versi TLS

Menggunakan OpenJDK, kode berikut menunjukkan penggunaan untuk mencetak versi mana yang SSLContextdidukung. TLS/SSL

```
System.out.println(Arrays.toString(SSLContext.getDefault().getSupportedSSLParameters().getProto
```

Misalnya, Amazon Corretto 17 (OpenJDK) menghasilkan output berikut.

```
[TLSv1.3, TLSv1.2, TLSv1.1, TLSv1, SSLv3, SSLv2Hello]
```

Untuk melihat jabat tangan SSL beraksi dan versi TLS apa yang digunakan, Anda dapat menggunakan properti sistem javax.net.debug.

Misalnya, jalankan aplikasi Java yang menggunakan TLS.

```
java app.jar -Djavax.net.debug=ssl:handshake
```

Aplikasi mencatat jabat tangan SSL yang mirip dengan yang berikut ini.

```
...
javax.net.ssl|DEBUG|10|main|2022-12-23 13:53:12.221 EST|ClientHello.java:641|Produced
 ClientHello handshake message (
"ClientHello": {
  "client version"      : "TLSv1.2",
```

```
...
javax.net.ssl|DEBUG|10|main|2022-12-23 13:53:12.295 EST|ServerHello.java:888|Consuming
 ServerHello handshake message (
"ServerHello": {
  "server version"      : "TLSv1.2",
...
```

### Menerapkan versi TLS minimum

SDK for Java selalu lebih menyukai versi TLS terbaru yang didukung oleh platform dan layanan. Jika Anda ingin menerapkan versi TLS minimum tertentu, lihat dokumentasi platform Java Anda.

Untuk berbasis OpenJDK JVMs, Anda dapat menggunakan properti sistem. `jdk.tls.client.protocols`

Misalnya, jika Anda ingin klien layanan SDK dalam aplikasi Anda menggunakan TLS 1.2, meskipun TLS 1.3 tersedia, berikan properti sistem berikut.

```
java app.jar -Djdk.tls.client.protocols=TLSv1.2
```

### AWS Upgrade titik akhir API ke TLS 1.2

Lihat posting blog ini untuk informasi tentang titik akhir AWS API yang pindah ke TLS 1.2 untuk versi minimum.

## Identity and Access Management

AWS Identity and Access Management (IAM) adalah Layanan AWS yang membantu administrator mengontrol akses ke AWS sumber daya dengan aman. Administrator IAM mengontrol siapa yang dapat diautentikasi (masuk) dan diberi wewenang (memiliki izin) untuk menggunakan sumber daya. AWS IAM adalah Layanan AWS yang dapat Anda gunakan tanpa biaya tambahan.

Topik

- Audiens
- Mengautentikasi dengan identitas
- Mengelola akses menggunakan kebijakan
- Bagaimana Layanan AWS bekerja dengan IAM
- Memecahkan masalah AWS identitas dan akses

## Audiens

Cara Anda menggunakan AWS Identity and Access Management (IAM) berbeda, tergantung pada pekerjaan yang Anda lakukan. AWS

Pengguna layanan — Jika Anda menggunakan Layanan AWS untuk melakukan pekerjaan Anda, maka administrator Anda memberi Anda kredensyal dan izin yang Anda butuhkan. Saat Anda menggunakan lebih banyak AWS fitur untuk melakukan pekerjaan Anda, Anda mungkin memerlukan izin tambahan. Memahami cara akses dikelola dapat membantu Anda meminta izin yang tepat dari administrator Anda. Jika Anda tidak dapat mengakses fitur AWS, lihat Memecahkan masalah AWS identitas dan akses atau panduan pengguna yang Layanan AWS Anda gunakan.

Administrator layanan — Jika Anda bertanggung jawab atas AWS sumber daya di perusahaan Anda, Anda mungkin memiliki akses penuh ke AWS. Tugas Anda adalah menentukan AWS fitur dan sumber daya mana yang harus diakses pengguna layanan Anda. Kemudian, Anda harus mengirimkan permintaan kepada administrator IAM untuk mengubah izin pengguna layanan Anda. Tinjau informasi di halaman ini untuk memahami konsep dasar IAM. Untuk mempelajari lebih lanjut tentang bagaimana perusahaan Anda dapat menggunakan IAM AWS, lihat panduan pengguna yang Layanan AWS Anda gunakan.

Administrator IAM – Jika Anda adalah administrator IAM, Anda sebaiknya mempelajari detail tentang cara menulis kebijakan untuk mengelola akses ke AWS. Untuk melihat contoh kebijakan AWS berbasis identitas yang dapat Anda gunakan di IAM, lihat panduan pengguna yang Anda gunakan. Layanan AWS

## Mengautentikasi dengan identitas

Otentikasi adalah cara Anda masuk AWS menggunakan kredensyal identitas Anda. Anda harus diautentikasi sebagai Pengguna root akun AWS, pengguna IAM, atau dengan mengasumsikan peran IAM.

Anda dapat masuk sebagai identitas federasi menggunakan kredensyal dari sumber identitas seperti AWS IAM Identity Center (Pusat Identitas IAM), autentikasi masuk tunggal, atau kredensyal. Google/ Facebook Untuk informasi selengkapnya tentang cara masuk, lihat Cara masuk ke Akun AWS Anda dalam Panduan Pengguna AWS Sign-In .

Untuk akses terprogram, AWS sediakan SDK dan CLI untuk menandatangani permintaan secara kriptografis. Untuk informasi selengkapnya, lihat AWS Signature Version 4 untuk permintaan API dalam Panduan Pengguna IAM.

## Akun AWS pengguna root

Saat Anda membuat Akun AWS, Anda mulai dengan satu identitas masuk yang disebut pengguna Akun AWS root yang memiliki akses lengkap ke semua Layanan AWS dan sumber daya. Kami sangat menyarankan agar Anda tidak menggunakan pengguna root untuk tugas sehari-hari. Untuk tugas yang memerlukan kredensial pengguna root, lihat Tugas yang memerlukan kredensial pengguna root dalam Panduan Pengguna IAM.

## Identitas terfederasi

Sebagai praktik terbaik, mewajibkan pengguna manusia untuk menggunakan federasi dengan penyedia identitas untuk mengakses Layanan AWS menggunakan kredensyal sementara.

Identitas federasi adalah pengguna dari direktori perusahaan Anda, penyedia identitas web, atau Directory Service yang mengakses Layanan AWS menggunakan kredensyal dari sumber identitas. Identitas terfederasi mengambil peran yang memberikan kredensial sementara.

Untuk manajemen akses terpusat, kami menyarankan AWS IAM Identity Center. Untuk informasi selengkapnya, lihat Apa itu Pusat Identitas IAM? dalam Panduan Pengguna AWS IAM Identity Center .

## Pengguna dan grup IAM

Pengguna IAM adalah identitas dengan izin khusus untuk satu orang atau aplikasi. Sebaiknya gunakan kredensial sementara alih-alih pengguna IAM dengan kredensial jangka panjang. Untuk informasi selengkapnya, lihat Mewajibkan pengguna manusia untuk menggunakan federasi dengan penyedia identitas untuk mengakses AWS menggunakan kredensyal sementara di Panduan Pengguna IAM.

Grup IAM menentukan kumpulan pengguna IAM dan mempermudah pengelolaan izin untuk pengguna dalam jumlah besar. Untuk mempelajari selengkapnya, lihat Kasus penggunaan untuk pengguna IAM dalam Panduan Pengguna IAM.

## Peran IAM

Peran IAM adalah identitas dengan izin khusus yang menyediakan kredensial sementara. Anda dapat mengambil peran dengan beralih dari pengguna ke peran IAM (konsol) atau dengan memanggil operasi AWS CLI atau AWS API. Untuk informasi selengkapnya, lihat Metode untuk mengambil peran dalam Panduan Pengguna IAM.

Peran IAM berguna untuk akses pengguna terfederasi, izin pengguna IAM sementara, akses lintas akun, akses lintas layanan, dan aplikasi yang berjalan di Amazon EC2. Untuk informasi selengkapnya, lihat Akses sumber daya lintas akun di IAM dalam Panduan Pengguna IAM.

## Mengelola akses menggunakan kebijakan

Anda mengontrol akses AWS dengan membuat kebijakan dan melampirkannya ke AWS identitas atau sumber daya. Kebijakan menentukan izin saat dikaitkan dengan identitas atau sumber daya. AWS mengevaluasi kebijakan ini ketika kepala sekolah membuat permintaan. Sebagian besar kebijakan disimpan AWS sebagai dokumen JSON. Untuk informasi selengkapnya tentang dokumen kebijakan JSON, lihat Gambaran umum kebijakan JSON dalam Panduan Pengguna IAM.

Menggunakan kebijakan, administrator menentukan siapa yang memiliki akses ke apa dengan mendefinisikan principal mana yang dapat melakukan tindakan pada sumber daya apa, dan dalam kondisi apa.

Secara default, pengguna dan peran tidak memiliki izin. Administrator IAM membuat kebijakan IAM dan menambahkannya ke peran, yang kemudian dapat diambil oleh pengguna. Kebijakan IAM mendefinisikan izin terlepas dari metode yang Anda gunakan untuk melakukan operasinya.

### Kebijakan berbasis identitas

Kebijakan berbasis identitas adalah dokumen kebijakan izin JSON yang Anda lampirkan ke identitas (pengguna, grup, atau peran). Kebijakan ini mengontrol tindakan apa yang bisa dilakukan oleh identitas tersebut, terhadap sumber daya yang mana, dan dalam kondisi apa. Untuk mempelajari cara membuat kebijakan berbasis identitas, lihat Tentukan izin IAM kustom dengan kebijakan yang dikelola pelanggan dalam Panduan Pengguna IAM.

Kebijakan berbasis identitas dapat berupa kebijakan inline (disematkan langsung ke dalam satu identitas) atau kebijakan terkelola (kebijakan mandiri yang dilampirkan pada banyak identitas). Untuk mempelajari cara memilih antara kebijakan terkelola dan kebijakan inline, lihat Pilih antara kebijakan terkelola dan kebijakan inline dalam Panduan Pengguna IAM.

### Kebijakan berbasis sumber daya

Kebijakan berbasis sumber daya adalah dokumen kebijakan JSON yang Anda lampirkan ke sumber daya. Contohnya termasuk kebijakan kepercayaan peran IAM dan kebijakan bucket Amazon S3. Dalam layanan yang mendukung kebijakan berbasis sumber daya, administrator layanan dapat menggunakannya untuk mengontrol akses ke sumber daya tertentu. Anda harus menentukan principal dalam kebijakan berbasis sumber daya.

Kebijakan berbasis sumber daya merupakan kebijakan inline yang terletak di layanan tersebut. Anda tidak dapat menggunakan kebijakan AWS terkelola dari IAM dalam kebijakan berbasis sumber daya.

### Daftar kontrol akses (ACLs)

Access control lists (ACLs) mengontrol prinsipal mana (anggota akun, pengguna, atau peran) yang memiliki izin untuk mengakses sumber daya. ACLs mirip dengan kebijakan berbasis sumber daya, meskipun mereka tidak menggunakan format dokumen kebijakan JSON.

Amazon S3, AWS WAF, dan Amazon VPC adalah contoh layanan yang mendukung. ACLs Untuk mempelajari selengkapnya ACLs, lihat Ringkasan daftar kontrol akses (ACL) di Panduan Pengembang Layanan Penyimpanan Sederhana Amazon.

### Jenis-jenis kebijakan lain

AWS mendukung jenis kebijakan tambahan yang dapat menetapkan izin maksimum yang diberikan oleh jenis kebijakan yang lebih umum:

- Batasan izin – Menetapkan izin maksimum yang dapat diberikan oleh kebijakan berbasis identitas kepada entitas IAM. Untuk informasi selengkapnya, lihat Batasan izin untuk entitas IAM dalam Panduan Pengguna IAM.
- Kebijakan kontrol layanan (SCPs) — Tentukan izin maksimum untuk organisasi atau unit organisasi di AWS Organizations. Untuk informasi selengkapnya, lihat Kebijakan kontrol layanan dalam Panduan Pengguna AWS Organizations .
- Kebijakan kontrol sumber daya (RCPs) — Tetapkan izin maksimum yang tersedia untuk sumber daya di akun Anda. Untuk informasi selengkapnya, lihat Kebijakan kontrol sumber daya (RCPs) di Panduan AWS Organizations Pengguna.
- Kebijakan sesi – Kebijakan lanjutan yang diteruskan sebagai parameter saat membuat sesi sementara untuk peran atau pengguna terfederasi. Untuk informasi selengkapnya, lihat Kebijakan sesi dalam Panduan Pengguna IAM.

### Berbagai jenis kebijakan

Ketika beberapa jenis kebijakan berlaku pada suatu permintaan, izin yang dihasilkan lebih rumit untuk dipahami. Untuk mempelajari cara AWS menentukan apakah akan mengizinkan permintaan saat beberapa jenis kebijakan terlibat, lihat Logika evaluasi kebijakan di Panduan Pengguna IAM.

## Bagaimana Layanan AWS bekerja dengan IAM

Untuk mendapatkan tampilan tingkat tinggi tentang cara Layanan AWS bekerja dengan sebagian besar fitur IAM, lihat AWS layanan yang bekerja dengan IAM di Panduan Pengguna IAM.

Untuk mempelajari cara menggunakan spesifik Layanan AWS dengan IAM, lihat bagian keamanan dari Panduan Pengguna layanan yang relevan.

## Memecahkan masalah AWS identitas dan akses

Gunakan informasi berikut untuk membantu Anda mendiagnosis dan memperbaiki masalah umum yang mungkin Anda temui saat bekerja dengan AWS dan IAM.

Topik

- Saya tidak berwenang untuk melakukan tindakan di AWS
- Saya tidak berwenang untuk melakukan iam: PassRole
- Saya ingin mengizinkan orang di luar saya Akun AWS untuk mengakses AWS sumber daya saya

### Saya tidak berwenang untuk melakukan tindakan di AWS

Jika Anda menerima pesan kesalahan bahwa Anda tidak memiliki otorisasi untuk melakukan tindakan, kebijakan Anda harus diperbarui agar Anda dapat melakukan tindakan tersebut.

Contoh kesalahan berikut terjadi ketika pengguna IAM `mateojackson` mencoba menggunakan konsol untuk melihat detail tentang suatu sumber daya *`my-example-widget`* rekaan, tetapi tidak memiliki izin `awes:`*`GetWidget`* rekaan.

```
User: arn:aws:iam::123456789012:user/mateojackson is not authorized to perform:
 awes:GetWidget on resource: my-example-widget
```

Dalam hal ini, kebijakan untuk pengguna `mateojackson` harus diperbarui untuk mengizinkan akses ke sumber daya *`my-example-widget`* dengan menggunakan tindakan `awes:`*`GetWidget`*.

Jika Anda memerlukan bantuan, hubungi AWS administrator Anda. Administrator Anda adalah orang yang memberi Anda kredensial masuk.

## Saya tidak berwenang untuk melakukan iam: PassRole

Jika Anda menerima kesalahan yang tidak diizinkan untuk melakukan `iam:PassRole` tindakan, kebijakan Anda harus diperbarui agar Anda dapat meneruskan peran AWS.

Beberapa Layanan AWS memungkinkan Anda untuk meneruskan peran yang ada ke layanan tersebut alih-alih membuat peran layanan baru atau peran terkait layanan. Untuk melakukannya, Anda harus memiliki izin untuk meneruskan peran ke layanan.

Contoh kesalahan berikut terjadi ketika pengguna IAM bernama `marymajor` mencoba menggunakan konsol tersebut untuk melakukan tindakan di AWS. Namun, tindakan tersebut memerlukan layanan untuk mendapatkan izin yang diberikan oleh peran layanan. Mary tidak memiliki izin untuk meneruskan peran tersebut pada layanan.

```
User: arn:aws:iam::123456789012:user/marymajor is not authorized to perform:
 iam:PassRole
```

Dalam kasus ini, kebijakan Mary harus diperbarui agar dia mendapatkan izin untuk melakukan tindakan `iam:PassRole` tersebut.

Jika Anda memerlukan bantuan, hubungi AWS administrator Anda. Administrator Anda adalah orang yang memberi Anda kredensial masuk.

## Saya ingin mengizinkan orang di luar saya Akun AWS untuk mengakses AWS sumber daya saya

Anda dapat membuat peran yang dapat digunakan pengguna di akun lain atau orang-orang di luar organisasi Anda untuk mengakses sumber daya Anda. Anda dapat menentukan siapa saja yang dipercaya untuk mengambil peran tersebut. Untuk layanan yang mendukung kebijakan berbasis sumber daya atau daftar kontrol akses (ACLs), Anda dapat menggunakan kebijakan tersebut untuk memberi orang akses ke sumber daya Anda.

Untuk mempelajari selengkapnya, periksa referensi berikut:

- Untuk mempelajari apakah AWS mendukung fitur ini, lihatBagaimana Layanan AWS bekerja dengan IAM.
- Untuk mempelajari cara menyediakan akses ke sumber daya Anda di seluruh sumber daya Akun AWS yang Anda miliki, lihat Menyediakan akses ke pengguna IAM di pengguna lain Akun AWS yang Anda miliki di Panduan Pengguna IAM.

- Untuk mempelajari cara menyediakan akses ke sumber daya Anda kepada pihak ketiga Akun AWS, lihat Menyediakan akses yang Akun AWS dimiliki oleh pihak ketiga dalam Panduan Pengguna IAM.
- Untuk mempelajari cara memberikan akses melalui federasi identitas, lihat Menyediakan akses ke pengguna terautentikasi eksternal (federasi identitas) dalam Panduan Pengguna IAM.
- Untuk mempelajari perbedaan antara menggunakan peran dan kebijakan berbasis sumber daya untuk akses lintas akun, lihat Akses sumber daya lintas akun di IAM di Panduan Pengguna IAM.

## Validasi Kepatuhan untuk AWS Produk atau Layanan ini

Untuk mempelajari apakah an Layanan AWS berada dalam lingkup program kepatuhan tertentu, lihat Layanan AWS di Lingkup oleh Program Kepatuhan Layanan AWS dan pilih program kepatuhan yang Anda minati. Untuk informasi umum, lihat Program AWS Kepatuhan Program AWS .

Anda dapat mengunduh laporan audit pihak ketiga menggunakan AWS Artifact. Untuk informasi selengkapnya, lihat Mengunduh Laporan di AWS Artifact .

Tanggung jawab kepatuhan Anda saat menggunakan Layanan AWS ditentukan oleh sensitivitas data Anda, tujuan kepatuhan perusahaan Anda, dan hukum dan peraturan yang berlaku. Untuk informasi selengkapnya tentang tanggung jawab kepatuhan Anda saat menggunakan Layanan AWS, lihat Dokumentasi AWS Keamanan.

AWS Produk atau layanan ini mengikuti model tanggung jawab bersama melalui layanan Amazon Web Services (AWS) tertentu yang didukungnya. Untuk informasi keamanan AWS layanan, lihat halaman dokumentasi keamanan AWS layanan dan AWS layanan yang berada dalam lingkup upaya AWS kepatuhan oleh program kepatuhan.

## Ketahanan untuk AWS Produk atau Layanan ini

Infrastruktur AWS global dibangun di sekitar Wilayah AWS dan Availability Zones.

Wilayah AWS menyediakan beberapa Availability Zone yang terpisah secara fisik dan terisolasi, yang terhubung dengan latensi rendah, throughput tinggi, dan jaringan yang sangat redundan.

Dengan Zona Ketersediaan, Anda dapat merancang serta mengoperasikan aplikasi dan basis data yang secara otomatis melakukan fail over di antara zona tanpa gangguan. Zona Ketersediaan memiliki ketersediaan dan toleransi kesalahan yang lebih baik, dan dapat diskalakan dibandingkan infrastruktur pusat data tunggal atau multi tradisional.

Untuk informasi selengkapnya tentang AWS Wilayah dan Availability Zone, lihat Infrastruktur AWS Global.

AWS Produk atau layanan ini mengikuti model tanggung jawab bersama melalui layanan Amazon Web Services (AWS) tertentu yang didukungnya. Untuk informasi keamanan AWS layanan, lihat halaman dokumentasi keamanan AWS layanan dan AWS layanan yang berada dalam lingkup upaya AWS kepatuhan oleh program kepatuhan.

## Keamanan Infrastruktur untuk AWS Produk atau Layanan ini

AWS Produk atau layanan ini menggunakan layanan terkelola, dan karenanya dilindungi oleh keamanan jaringan AWS global. Untuk informasi tentang layanan AWS keamanan dan cara AWS melindungi infrastruktur, lihat Keamanan AWS Cloud. Untuk mendesain AWS lingkungan Anda menggunakan praktik terbaik untuk keamanan infrastruktur, lihat Perlindungan Infrastruktur dalam Kerangka Kerja yang AWS Diarsiteksikan dengan Baik Pilar Keamanan.

Anda menggunakan panggilan API yang AWS dipublikasikan untuk mengakses AWS Produk atau Layanan ini melalui jaringan. Klien harus mendukung hal-hal berikut:

- Keamanan Lapisan Pengangkutan (TLS). Kami mensyaratkan TLS 1.2 dan menganjurkan TLS 1.3.
- Sandi cocok dengan sistem kerahasiaan maju sempurna (perfect forward secrecy, PFS) seperti DHE (Ephemeral Diffie-Hellman) atau ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). Sebagian besar sistem modern seperti Java 7 dan versi lebih baru mendukung mode-mode ini.

Selain itu, permintaan harus ditandatangani menggunakan ID kunci akses dan kunci akses rahasia yang terkait dengan principal IAM. Atau Anda dapat menggunakan AWS Security Token Service (AWS STS) untuk menghasilkan kredensial keamanan sementara untuk menandatangani permintaan.

AWS Produk atau layanan ini mengikuti model tanggung jawab bersama melalui layanan Amazon Web Services (AWS) tertentu yang didukungnya. Untuk informasi keamanan AWS layanan, lihat halaman dokumentasi keamanan AWS layanan dan AWS layanan yang berada dalam lingkup upaya AWS kepatuhan oleh program kepatuhan.

# Kunci OpenPGP untuk AWS SDK untuk Java

Semua artefak Maven yang tersedia untuk umum ditandatangani menggunakan standar AWS SDK untuk Java OpenPGP. Kunci publik yang Anda perlukan untuk memverifikasi tanda tangan artefak tersedia di bagian berikut.

## Kunci saat ini

Tabel berikut menunjukkan informasi kunci OpenPGP untuk rilis SDK for Java 1x saat ini dan SDK for Java 2.x.

| | |
|---|---|
| ID Kunci | 0x AC1 07B386692DADD |
| Jenis | RSA |
| Size | 4096/4096 |
| Dibuat | 30/06/2016 |
| Kedaluwarsa | 2026-09-27 |
| ID Pengguna | AWS SDKs dan Alat < aws-dr-tools @amazon .com> |
| Sidik jari kunci | FEB9 209F 2F2F 3F46 6484 1E55 0 7B38 6692 DADD AC1 |

Untuk menyalin kunci publik OpenPGP berikut untuk SDK for Java ke clipboard, pilih ikon “Salin” di sudut kanan atas.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----
Comment: Hostname:
Version: Hockeypuck 2.2

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
```

```
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zSxBV1MgU0RLcyBhbmQgVG9vbHMgPGF3cy1kci10b29sc0BhbWF6b24uY29tPsLB
lAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMBAAIeAQIXgBYhBP65IJ8vLz9GZIQe
VawQezhmktrdBQJo12ZrBQkTQxnmAAoJEKwQezhmktrdi18P/A3De83MBx8bdcWJ
Fot71Vk1TyBQFErgrtcytSU0czEHx3tGbzgQLbMlyzjirOT03usxEkOeqTVK+RU+
5uFXNZYQLwMJlHJ6S8tnfLe/ExM5WQ2KPwIUPfZs1GDDRQB2dIKSc+qYrP1O1vf4
O4iPgfLHMW2bFh3zjjxcaHCJyqc7Cau33eZFBAsRni1jOUo7MeyX0hlXfW8pd48Q
wZllQVZ/6KmDiFWA0CZ+2svJ5cL0tgPoh1OQjoz0nHpNfuDILMrZ+e7tx2VTlkGH
UGeNSydnrK8v9ztFn34KtU/k7NEWoVSyEi+5ICZL18FBwPqTwdVWXwXrqZCKiIpr
8ZdJWDz2sJfgDFNCC6rKgCQ6FrmaD9G76dYWkQ4AbZqABlUzU3q36W1K0r3iOAb5
G4tdOt4yqXHTe1x+ZUNaeW7gaCmtXAxLw0OfeJrcq/44b/SQP+qJ8sSOv76Yg2oF
BsF5DWOVUFghbTyokHAoVROyhBR4dUUisY39AqLSL8+Lp9Pr3wNuGl9GLrMD5701
piUb88B3Gwe1EiKV1gaKrvZ3mECDUiSMVO0Z5iG8E4QDpNmVbJbV1uT821ubvtOv
2Ko10Fa0uwCYGssdRGqEXNy6jz/Er8LAC3+nmGINDJQzrF+loYoSSkI2Nu7lhMuL
7iWwUPF7OhDXoVSAn4X3x6q2rGK0wsGUBBMBCgA+AhsDBQsJCAcDBRUKCQgLBRYC
AwEAAh4BAheAFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmjXZTsFCRNDGLYACgkQ
rBB7OGaS2t0/Ow//YIv51vHtD+kwMmIvk3zpizDHY0zW2dOezAo+C/DsSyC7wDll
Dixw34EQ1yLXH5xLR8CH1zupl3JmmEp1ucdQggoefbidxDl8Fld7tJOD1y3GGnTD
0jAl2ZC+W65Oh+wS1mD1FlaKjMGGkvJf0dA7RtU2T8dv3vt8dsxg76FMFS3+fqlC
FNOAsNTn9zWR1SqBIfkMJK83aq6s/rcEV9VrAYgDgqex58fygB5EuTf842/IF7WZ
Q9gd6fupB0mMZP5YWd2uj/vsBTYakG+mgQwDxZuKPeEzAqnqqS7biSQOUO6Wozlq
Yy4fSczE9GkBAvg0pGmbko+zHvpnjvX/h1CUpC6odvFyOAhZp6zyhs0QWz9thfqV
lU8WlbgJ2atFDn5GUSxF/fe0Yzovlbbs6sbYXuvMG9RiEOuJ1mBbZR3aIdZ1U6Do
BHc/vjc5mWcV7JQSP7i4W/8W7X3UAuN9LdxB+IvF3Cwrgtlw2BWvA5Alco5Tnz8t
P/CIVmBjk+sLme8W4kfLK3IWEbwClOdNnErI/MHRm65A2Y5EMIhwjrOi07SU1Pxa
nPpg3OYJCdvjzdB8QE3/DBiMfOl4dISfKDVEWnfK8mZaYd/BeRm2gUAa9UrqSFCG
BlA7Lg+eLI3US0FvwWJ4j5bBJqgLu+y7crIkiUOPAQuLk3lO+5uYU/I3DuLCwZQE
EwEKAD4CGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AWIQT+uSCfLy8/RmSEHlWs
EHs4ZpLa3QUCZwAXCAUJEWvKgwAKCRCsEHs4ZpLa3ZdTEACMBLg2q9zk8ZH02nDz
Sg5zc8Wlqq8WdxU0Pj8qx4UOrrMca7wyiUvrgoxPW5lh1RVNUeMkDRfu9pSXcOVI
V9LvmYE/WnwKROubgGbsC4T7M/LqV0/AulXil4d7IXcO6l4toa8LTNWtD5bODgrN
gvay1AzCU8kq1Qw1cKZ2gAfvA3Ba7PWyLeUN4HTlGrXcw73G+0CofY1L8wqWxHCJ
29XqQzeTEc6MDEeIlNlVdUcy8Qr5uwkEsl34H9AxS5F1opJ4TqvXiDZsrSRRv57R
XYmRZDWeYT+9PZaMsHXza5qgej7BfATxhYfICsNaY6MK3x6b+nDSKkoZgO+i09zh
1YjpahhQe6G336v/3mRj0dKGCRQ6znQ9ghUaB5z9zfvgH5AOEkTe3l8MqM+j5A6P
VjSBBJAHKejxr7+wKJKIA6P+DqpsYAunzftwUzrLVqb+BZQ+DcTmVrE7OPcMYJD5
QglX/Le+WmWZHI154NXgpWWUOUgZUbUge4DKrT+zCJ9iecPLKTW7OcULyXO+rjb8
8BGrD5GPlHB3dOUXXTlMKCqg3qy1Bu2KnZTQiaEEdZgSIGQbrW0JTMmmXJkKjokd
JMA4vYeg5en51G9nRQjScPngx77IxvByNyFWTJdG1ENpJpsK9TtmENcpyUJtJZTJ
```

```
ZSOIRVPP5RzR5vInuXWq6VV0BMLBlAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMB
AAIeAQIXgBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJlJEoiBQkPj/2dAAoJEKwQ
ezhmktrdx1YP/0vvym3jgX/pwnR7K1rafZMb1iKQBr0ISG8cdbaf4pqX5vuUZnyj
w9Cl/oONn7jJjnQxOIIzuBoxne2WN28ftM2w0nVXm85mAmz2fwQz/fdKDyonXcOh
pfD2iMqn7gESjhEgRE7wMDYMDuLdqHI7OKWGVfgrh7xEmKapLh45h7cnumo2VjL9
uDYY1aOBHz993T7oE41y43rhk+6kKbGFd2uuo7h5j1ZF8Lj6sYfcEzXOU1OhRlD0
nyBjDy9MYWu0YNouc70WgMceGx6hjvCAM/5fxP7SZFecZ7ePeB0GpvVA24hSNENE
0r3tUekuOf1I0FunMnMnbh7ZO9rPYqWvWDNIpU3S4CjFhY82L+IeKnmLy8N6ASRk
HsPiNCOHSK8C/0ynrd9xLhX8Jsk/TGiQYaleoHhWkNLlZsL86QHL8SKEqkqZCQf5
AEqghDP6NEGS7lnOenA7JjIrA9KLlT7fnNWZOwFi5X+o/CymE2ytEMS0Yf3nmY4U
n9x56Wgn6J2zqB5nqOXf6NxGdAIgOBm098YEnKCIFzk+yhoDlprVpHcnd2b5f6Oq
uh8KYOEbKgpMJ3zZuWSL5kwGF1nNoYiAkonMaz9H3pOQnOMVYCUeUTDRsiO/prrd
UhNlry4TAsBMpeXnFhdLVM3vFQZVpByadGOJNmnaN/Wavw2a00UGBFa4wsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJhMqGaBQkLnlUVAAoJEKwQ
ezhmktrd2sQP/3YHM+U+BbOy1nSEAfykZ71+uCM2hkHMLdxQYWB/rBWkmg/pbu+d
r4t45RsTASrNjRcZOntlPMQRIq973ymHfpmeS+noFwvTGH7zDv1BRBR9wPrd1XUz
iSuEUHGi/fqxUVXQ5mbonzfThX8tuXeuiQmeToqoB00FYlZm6xsNnEHcjVl66mC4
IPoJLWnZJs4rOCeoRf5XvDTgX6xt5/kLYRZf79qaWGFvaZpsc1CH+rQJUdVa/D4T
7pI7hX6zy0S91z4iuC5HZUiOTF+y5auEZHGTdTWNS1kvOvfcCTi0XK/GkGL82SZu
7X2VGnpCeUnFyViRGlk+KaDG1sVyDY+lcBPg6ilr45M6MQV0iHS5OF04QNXSKt5+
UnzJH7lldgNsR6ibRMyNV3k5v3fyUcSBvIYyLORTTBiVEjQDSbk1QNqbrQlX9CWz
+EJWn16BFTmMFvxBSWPm640GncHP5J3/0MbMw3Cm90x7k8UfNANIemcrJrSxIDwm
g9cVAg3a+D+wxjrVe8jGg0ejvECpm+0yswigj5x6Lqj09A4UgdjEauN+/pn0nhBo
Gv7DzMXtM/LoDtgp6wn93qZVN2TsuHnkEk4UyntB6eWJbBdXHWUr47exiWh0dvQN
tpwCWPT6I7ZTPtA5K/zx+q9m6797BLgAkTYc6gloQL3vs1Z1S3m/hZNawsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJgmrz2BQkLBnBxAAoJEKwQ
ezhmktrd36oP/2rB2EkwSOCKC4m0heWSfDWi6OBKoEbbDtFtc6/HwqBW8SPsiKlq
zV0e3qBY/LVju04+ktJEK+EGXLnC3iC36MegrQ8zt391kEx/Zv9LIuVOCX90QIAX
dL8MVUkkjRLCFFH8pTgRy1cJYWk1X4dYdXWYc29fCwNVartNdNBhsb2ht3VJeKDE
kUivBHmkjuISDPEnI1coY7Lj0ZtY5cHdRF2eZpB0RkTBpsIt18rCYyHkERZrhmvb
j3rOyPyvOa+1/dQS8/hv5pEmbKx8cy8RdJkmbUHYatPBsjHkJSWr7O7G9VFW4GoN
9CRAI4KkbDSEDjCL5dv2pq0Sew1MkLuWJGULAMgiIUlWcOs5SZZGFSksNQrtSFV9
Z/wGocecMGkGQNXQ06JV/Fry/TvyphBlmylEqL+NLqEcEjnlz90IVu+ZA+M09J96
UlHO7V5GvBgM+QK/q/dJeMHPWrNlo1gA6Nwl/HBdM0DqzdZ2jEPvsQSABvZrPMty
+BAqEar4wqY1AH4X5ccEjO7nJQoBQSDRSki1fkBsc1nx44N/m0kHdIa0Z/Y+Mw4v
WiZhREkOospG1I4lBa3CNTVAhSs9msGsYfkqvFJGHL7sZY8XSv82GBBvA0nUNrsJ
bLBwo2FaQG9eoatRAGkqp4b/OtNtBuGeiQoNwFGbfUZTAaStj5/zZj0swsF9BBMB
CgAnAhsDBQsJCAcDBRUKCQgLBRYCAwEAAh4BAheABQJe+9bwBQkJZ4plAAoJEKwQ
ezhmktrd+ScP/RoaUKriVVAgLHOGs+/mnfKtnfTlClzi5dsdI9/6H0vLpmSWK/Cl
2cT6gary45VMgAeVK+H1lQXafYj+FY++I5kYoe2GrSvIXhpjaFAJyNf/dKleTsqR
Tm371i8b3FDYs5kvy2CnTbmHB8MsOGxck8/YHd1x+g8WpO2IgF89yYCSF3CAdxC3
6bHbs6Z3C3lcM/3SoWF+Yie2P8XeBMPCGp/BcjQzUcHF6G06TwDDYhixucUi6vEY
EH5JtOwVVQ7bubT8OFeOoJwVxlzYz4UoqxjKDWymarTzu03AUIT0PXPece94bJAK
mSh68ItQe3H8tSPMubERWz2tEV3lVkChDGXcC7BYQmxHseolxz/qzCtJ0iX9BvZR
```

```
dniZNeNJ/Cu8M2pDp47zdNFXzf/Q/sQ9pQlws22G2g119rWDneBku9n1vTP80/er
SB+VLTBjDiArlCY5y9+BG8wbscExJySoQxkB9j/nlMzPY5rgk0SyxsNj9GbqH+hr
EjS3/uacNwSLxGcOT2E9Teot5pfTEO6fQVq+35QhfAlP8c8jze01W/+u+wXu1Ui9
azRSzYtCHanGyyet6U1mlBpAkqkZzH6t3CA5czc9i6FbzjvFVZnbRUZIRzfISYew
lF5WqgTn2iYVdxagPRvLF5kjd696brGW9d5HwirCVGaK04VsXWlAblB9wsF9BBMB
CgAnBQJXdYAFAhsDBQkHhh+ABQsJCAcDBRUKCQgLBRYCAwEAAh4BAheAAAoJEKwQ
ezhmktrdWigP/3QWl7aO81BUWyby4HEhN4SdAoWGY/FLqO4mCtuplcnMgRUCSiL9
l2BSCTMCtUcdSWtYwOgSChN2mMsdi1U2FNR5HvNunYR/pFdqjfQurf1ZmKVeG5/4
uuKaOxMw9e8pK5uYAfs+O7gr8gu/f6/Drp7NZk3/yVKpf4WCY9oX9TA1q9O/11nN
cwS45U/d7YP+N1YM9cBXa1DnDcdfm0BlykzouAF0qd1Lwi/tmLENvybD3+2c2WsE
rlFZGSa5ZafO0tTIWXh5k6wh5FdRRycrnSyRK3B9N9+yaXfMQ0XpOypa8dqQEnCi
IsngDCJPxtTrhMWKhBFRUMzK/WZTDboTQSQDK+YVRrE4K8MtoZSKwZLV2r9O3TpX
kpbKsPVYmexerfdMeZfjZMF1bC7BmEs7jciH6JjbqAoAPnHzN0481aeNarINSViX
PQWr2mp9qShei2/RavLtx2ZNrvmGW72ZKpF8E3WWUDpBJqFVeGNRvOm3aZj8o/Hl
ewtNjcT4ouJfqlfKiULv+g7ANEMDLQTFDTg5twRdvmZlB7oTBsavf+LwxPIXhH32
IR7TX7VeicMMxmZnmZK2ANT/QBi3laf+ojVHvB+f6D74eLNq0Zqjfi/3UFNYsYjg
E+YgCqEUBpHbl61nOHwGOSsQwfap2uKKlzukD/KxH5SPBC3DYGBI+KCbzsFNBFd1
gAUBEAC8zNArPWb3dPMThL2xAY+fS60vXdB1SkOtYJpDWpFgvo0d+VQ+hV6XulGA
HAS6xG1WHysPT9KejIRSgLG+e9CaM5yhsxNa1WFGUM4Q9ESo3t+a75Go7xHIxgFj
C046/O6Vh3g9N/PREeuG8zkZ3H2v5fmD+ejyPgk4W9sFL00zjRiZD0FKVYR/j9ue
nEC/2NBcLuFy3q6cDfmCoDEOO62kXMnaGz3knzEK/X1SkcjsxRDq7zaQlQ1Kou+3
dICwy4x5SJQ8jl+eeeEvF2C2/dXmDohb57tqUwioohMUQkmCtvZgEHjypUwgp0MT
o25gWxkvJlSJKUOb6b1786WNySIzF2gxqlkkEmBl4RAssQkeXjrSmGwsMDyHNqyJ
eYFusl8sPaSpo+V2n0z+2B070Uq+wmf1S5A5FpegH0PZzzoNZo8I6QxaZje9YSZU
ijGmZIdEBleRVt3Svhi8MYlnasd4bW2RK1sr7plkBf8QRe6biiQRF3KDOSn5CbmX
pAcHJ1ZHzRRdkXZDNQC6vCJxsy13O0TrhJtAV1Yq347uyUbVi291ISVgroUVtprs
mHoEk5GoOTHbg9SCSt+xi/FiJQC+ubWmIGXoFKMR3UmhDnnzobKcbnbs/Hd981Fd
VghYYvq//gTAkJk0WxfGqO30wtXRndPOA0T+qhP3TE+LtGRJ+wARAQABwsF8BBgB
CgAmAhsMFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmjXZm4FCRNDGegACgkQrBB7
OGaS2t3y5g/7BFXp/fdanzuQPToJTPen7AVwhLloKaiYhG3GjdXfMPLvu6UtaaGm
qynLolUNNooobptFqc1G9BKoAghQrta7CsDHtsQF2xyc3Mfu0gmpL/7X5a7sFIeJ
j08UjfweHx4DSG4LEZgNaAoWFjZltp4+8cqijkAHXt+r+1ayQG4VVHOWyXXqmSH4
9HqtbPcPyRzxdoVLeshZC9jmhHhhKqw/LwGyipWSOUKQDjWarBwdyhNmWCaLvxH1
ndMp4tq8DPGC3G4T9tYAbANrn7nKfZgHebMSzMw9kSp0L6QvwwTDjJyIWz85WyeH
WHeBysDaBOit3XDlehUew27y7N6a9hQSYjnXuwvre5mjDIOqJon/31R6ui2Z1y9P
a+bC11hbLXXh9tLCXRuoOt6thh9Cq5X1a76PPpEv30o3bpsb6l2hbrut1OKezwvK
l7txito/jfMiWfsZHA9O4SoM+8GnmVingHtZ805n1T4RddJvT/vaqplfI6zf7jmf
a69lALP420riFOQcwntNUM5tVmFUZsnFp2YRd4Ls7MiXVjtABahlSbb94l5WSVc0
jrOLDf94edvzk4R8i2Ob8CfVZNqEsTR6bHz8dT7Q+xQzEdjUujyyZY1UUl157Qeb
OsHjhCtuZYCI04X9hZ37nKnZXSxRlRDCnt5BEiyFu2WD1RscUe6PcVDCwXwEGAEK
ACYCGwwWIQT+uSCfLy8/RmSEHlWsEHs4ZpLa3QUCaNdlPQUJE0MYuAAKCRCsEHs4
ZpLa3XCpD/42DrcveE+q2ulrAIYPDlUlHiwIMejqBDRm6zmr1KSAeb4E6/MFcP4s
rXSSscMlrqG6NVynjNCXjD2YzWii68EwoXLJkgoD3r2ifzkV62EX2MIEeNZAVwuy
KNxorzmy6bhuWltRYNK/hITs2AG5orOk9ADEJ8PixKymrWlhesPaWX6Yhp9/tWaC
```

```
RHOSRiLbRVaJ+7sqT88urLmkV9Hqx949Zxv4+cgBVUGL6WXKsfWhHjbDMNJnozWB
SZaIJznLApOM8z+1DNrqUYyfR8SkF4IOVmg6HDzoyuseJJ8JvMAlkvT6F9VBq/iE
yeDYdEEQxwHwozKrEx5Ybxl5mntbqwCXy6kHSx2+/3RZWpZQ8K29YP9QEk0KeGF8
9Vap3jjNrX4u3cuRNQpeblQc4uFn3Nzaj+cVV4YzcRw94NifecXpujSvk8XU2ytJ
/JgMBxPIBKglN4eEMet9b4FRB5XeBdPAm19/LXyb4IlIipGNXlgNz/HCuBzidzHT
QQdqfA9rZVx1hwFr7AJCVqWaXVsx1oEAhKqpTtsLMyj594DvnRuwKw5Vse+1eydW
MIHYdbxmJccsTGIt/hsOpc8zfm+QYk5752jshhOKEBy+Ey3QZI1WbO547NOb2Hwr
Pgt7fw2NCKMPElSu98zmneFPhqNHf7L5urBe5gADj81E8lm6t/oVxcLBfAQYAQoA
JgIbDBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJnABcLBQkRa8qFAAoJEKwQezhm
ktrde3MP/13CLWp99XvRROrzD/bWOfWjAenT2PE/tYdOY9YcTQFbnIUhaVUDWAo3
pibR3D4u9LlY4olpGfJ7BTIHFa9myfpaVvmrNjueYI4omli24JQ/CKqNdY8Qzxz+
/QyiNK7Aw5cEBWIu84WGB1SsefWWT3rZe9YBb77gNcWHZ15pXTXrcgUxGY4808MC
I9YFWq8EA0iHawtFnmB3UFfClWt37Hy3PKvr1is3uG60+ULI8RQz3/+ZwSG8U+xt
b+I7H9+gITc1eFCb+tIwp5xWflyxcFXYk6UzOL7y3Fg2tIEuSNtIHUC9NDVobf6c
I0KAzZcMvKiPQiuBnVOjgDLmCZM5H6axj9x+gi4oVh6ea3HLqMzyjm5JkeCGgKWv
H0gD3yGEZDvcbavkQOle5T+4JefndKzCPrluX0iyx+oQiiOL8WieSSkSB6BsZcUN
SeuGJwM79Y7Oqld/YVrQNBZj5Vz+m3nZ+0EWDDMI0hRgMpSEIc+dnTC0u103Z+Rc
c2IJq8INmU653sUcfCZE12ParW4rF7ib6kViYrABT8f4e2TP0aOyP5kp51ied9qL
azaBA6tt/C9X1V2EJZK4srXtmcZO2Im45RAiVXyfpBAmmiF3eZWCbKe7qBC4rDRh
LZG4RQW/S86Da0BID7gQz9IFSkaG504MsDhvnA7iAqaHUHUepCsiwsF8BBgBCgAm
AhsMFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmUkSiQFCQ+P/Z8ACgkQrBB7OGaS
2t3AwA/9GkXKUgvjKGCxwE4SdDt7c2jw6to2TTP9iFJ3Xbk3+5BURT3gkZCuu9D7
gt+97aVo/B4EM7Xz8DQKyY7Ic9VAwDRra/Hwi1V0hw1zyIWQ/gAnX3baU6qLRWHR
vVR5meV8r35C+rg9DaWFYmvS7PIv9LfxESwBPUjbmx8k4/5EJpHUwf12bzkTnot5
7q5lHxKQa6IvqQak+Hp9ZM2KPdsgKO2HWJJIIvYcI5byW9zBKV0O7YR8gtRAJKp9
IbtsXx0WT6cqHOFVc5SSzdcaMt0gLFl7BTnJyvKK2l9GABGBmzYDjeCyF2J+Ippf
oqxqfTe6EoOsuEMc2PbLTs9SsWjyCC2VGlX8+uUH9SoKwL0VQ6LFsP6fhkVKqi/a
rB6UuPR/iZnrKIuxMNQ4U+t2Q6UdMlmXsAXTNdkwzoK9oJRokIrH0ZV1KtH4sjjA
tCic+tOddq+GQLiKe2WpJfxlA0uESCB0TxjAwQmfn1H+dUhPeLlbNimHlH0/hXPd
ifuNGozzADIRseQDyzjl8xGL1qRZLD3cfmda6RyZ+S3dQRuaRrcFCDccpY/pO+F8
jbx64zyqqNs+KV+SkQGOcKFhWTZGCfQ/zMDtDmQKjb3eTAkv1zdEOMw9zEjjmS0q
8FNl+2wO3VnvXwvBbtDdVCIaIq+jVcsy5XtnnV+bJ19Q9yue/XvCwWUEGAEKAA8C
GwwFAmEyoZoFCQueVRUACgkQrBB7OGaS2t1uHBAAhOYVvrtchRmzCvdNER1DtkIs
bgQPJ9OxbyfvmvoD06qxH7PrycLZKbt7yYpAUU/CMc86GwaEe0I5Nm1CTs6NvDIv
g3e7EPIS859tyQflbM56NlwbsopCuoCJYknuroIf/M6dW6vJKNXLMmnL/AtalUBw
X+5pblmGUUJep49oTOxQEnvnuqyvaGjXgFXix5PVFJD2ed5NnQeFpvfCpc/ioNOj
z7ORO82j1ht5nWqPraXX5AYhQFM/kwR1cK4LV7gVDd/q+dfGYHzpxQ/HtyX/Lasi
N6I52QqA95SM1ZZLPFLaNh6EvnB7uC9pLCYS8nvilX7/cez5PFff1e1gXCOT0jv3
mJ2exLmXV0BbfKgjccFCxhrdRLtukfiDfJkySy1zdscnpfng8wJ3xKRv43cUTz7M
Z24OYNMqK26aJZVXEQUYjCwsBylY/F5wjYAwgwZ8yF5RFix28P/K8JsIHb3QrAJK
sNWQAb03ZWis3N3spR5M9Mw3VuDZ3WUXq7mxB5M3kpVoZ3vETU5cwTbADYNPf4Sw
BDK2uIVtxabezxSBtz0FcyYoF+OW8q7r4WvoyC9/+3GfnozZLJcEIVDk4W2pMW4A
UhG/6drKTm3HkSDWIDu7d1sHWMffLEYfUHtN5DKkDkGoPfHvZvu9teR5yLfUrPTf
ktihPn/JMrmwa9pwi8LCwWUEGAEKAA8CGwwFAmCavPcFCQsGcHIACgkQrBB7OGaS
```

```
2t0uaA//UWRaRiHEAKeRqBG/T2ak+XZJNu7QHfNgoUEAub9Zru8oPPXx2AJLcHEN
KWmeFlLxADdWOZs4Bm9oOew3VQnR/dBqjnXfob9Rc+eYUjA3rXazM/QrqcU8Syi3
MjNGUmjdL5aQF+IppAMgOBLG1TEnM7C5/PvrGJuYpGEnkKEwMK/GYhqg2V60pHEV
Pvs66mefJpCzbZSy56qtknSt6yBNWc14XgDX6VTn2kW4CV/3vVJUuvjvYs9SPyY8
mKEXa6QvUd3PcXv6RiWk4lGYuT1+jh2VkcFQ+JnUwv9TbKFB9b5jq1bvW9+LMDEl
YXux7pBP5RPk+OLpyiExIRFWhi3x7aMWOzQ+I9yuNTeYkTHiEAQRUhs/1Fh4oLgI
v9QZgC0mRSN3zm8plQdivs1ZlAosAqqkA9BQwqsgosQe7P92irYIJqay0si9wGCD
wSMsmeXdIF6wW3/UMJZl66aarPeiZApGX0QdTZwjMh/QK/8gTKyeZulKmNkNfwWq
O17OirWqLKssVHtg3VUM8EIdh+oNqDDXSeWtYUmpPpWp+yWZ0x1MFFZhUQHQZTGu
TIj4A92LQzbrfj/jXRvWm2SrJMivUoiDUn+qxKIpVwFlI5gVb+uyTFhw89PCkphr
JwRi052RLoU9yd6Ek46UH4XfZZWrZuzY+zzB7oqGONphLgi/h3DCwWUEGAEKAA8C
GwwFAl771b8FCQlniTUACgkQrBB7OGaS2t2/MxAAjoEGPdzavhsOlXdPCRd1D5QJ
r8T/NSEV2z1cp8ZvdrkjNF09TBP4qsBnKJiuvY1Iw7OGX9W2okvXxgJizE45v9MH
WEMz4hmIjmAfRwcqENgpOc1IY/T0/+kkCW8dB6d30J1kT0n2PCRzN9L5vPqZXGTG
mLvd9MOjH1256w4uxLb+e1HMDTCqEN1ppq9G+EAR/29q8JZWs1marbZZWxSWcg/E
1YYbNafzklgjq4CLh/j8AEWSvLr39zRy9uvQ/yqAKZ4K4aZfh/SPupGDvsD6ZK54
EPHxErQ7aiXTbUHtvwhxWLOP6WmxFA3Shr6L6YUb6jq+0PVliFC517g3mxFHJtwt
yXGNIKhmzmr0l9OlsHafulJ/9QPfK3Ce32SkPhW/11MYA8HzduMv5Arp7cBczXSP
EUTmNIVKv3gTjSQrzRhwhHmMuqyDZ/rXQQ1jl2sxIDjO4MUMvVjYKF+OCNm42gVs
8ca3/wN9ZNU6hyFWeKQDuCAqPPbT5GO/DKseFEwB+07wwyH1RXbyl0v4fneg605X
S7lqhNtw2p1hDL0HYHDiV+aPZ+LoOmX6+dmnqE6bQJaIlVb922KWmliO7F3DkqP7
0jFlhoE1gfiXWkxP4Gy8wOobNfEMgvz02djkGQy+oQqeNdIcZFZgzPTGKB/nVgpt
9CcRDWjPltFCd2e1FBbCwWUEGAEKAA8FAld1gAUCGwwFCQeGH4AACgkQrBB7OGaS
2t1PIQ//Qc5VYfBCxpaMysaPQ44wXPEZSjxIGZhhMGzb1UzzAEYOw+RgKN5nNTXq
L2KoOkOrGnKqZOKByMdXwIPH/rGwwEsbbIpopnibf5ic5B/+xCTIK+qLIwX2ZLuk
NhbL6Y+E+7DxMMh+KqBWHONKkgwVY+rFWOfoops839ABKvc9/Ry4/qqkcb40AzpD
l1iQJ5vK/DMuaDWxWeKXqJLIl3WMGPcPfheuBZL1u7LEEHYKMgzvpbF81WIn3MBo
8jvxf2/o+kMafSSDqgvOu6yu8GOhmScpCbRJn7jV/HrG+tM+zy48TN6/MkGWSR7q
TD34pqBjyatVfVl6dGD6xj/i/Emt5hZB6qXruCDH7AWMoNx+FkDubs4sc4PKysZU
Itya6KdQFo2UeYsNwZhdn6QwKhd85um4JUHJCY0mARvjsQgWXH/5MR40cow77bbE
vVq0XNd+QRVlyT42CEtnIUOFLeDVuZrum5Tuvvna6ImMDoi/z6QcNeL79XsY2m6I
QVRiHr1BDb/8JLkfnWiwL8GRv169Kf8unx0y5u1YBpcMYkyDD2+pnnk3TY0rR+8X
8goecaS8fbyu/Q48K85ZMD8wKW/bzLQ+tK9y8xed24u2QERftMhIw9b6f45Nrrf/
PhgV8RnuwUusSbdDe8kw3eYTmLdzD4kZc9K7SdO2CqT+hm//9JI=
=uGHC
-----END PGP PUBLIC KEY BLOCK-----
```

# Kunci sebelumnya

> **Important**
>
> Kunci baru dibuat sebelum yang sebelumnya kedaluwarsa. Akibatnya, pada saat tertentu, lebih dari satu kunci mungkin valid. Kunci digunakan untuk menandatangani artefak mulai hari pembuatannya, jadi gunakan kunci yang baru dikeluarkan saat validitas kunci tumpang tindih.

## Tanggal kedaluwarsa: 2025-10-04

| | |
|---|---|
| ID Kunci | 0x AC1 07B386692DADD |
| Jenis | RSA |
| Size | 4096/4096 |
| Dibuat | 30/06/2016 |
| Tanggal kedaluwarsa | 2025-10-04 |
| ID Pengguna | AWS SDKs dan Alat < aws-dr-tools @amazon .com> |
| Sidik jari kunci | FEB9 209F 2F2F 3F46 6484 1E55 0 7B38 6692 DADD AC1 |

Untuk menyalin kunci publik OpenPGP berikut untuk SDK for Java ke clipboard, pilih ikon “Salin” di sudut kanan atas.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----
Comment: Hostname:
Version: Hockeypuck 2.2

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
```

```
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zSxBV1MgU0RLcyBhbmQgVG9vbHMgPGF3cy1kci10b29sc0BhbWF6b24uY29tPsLB
lAQTAQoAPgIbAwULCQgHAwUVCgkICwUWAgMBAAIeAQIXgBYhBP65IJ8vLz9GZIQe
VawQezhmktrdBQJnABcIBQkRa8qDAAoJEKwQezhmktrdl1MQAIwEuDar3OTxkfTa
cPNKDnNzxaWqrxZ3FTQ+PyrHhQ6usxxrvDKJS+uCjE9bmWHVFU1R4yQNF+72lJdw
5UhX0u+ZgT9afApE65uAZuwLhPsz8upXT8C6VeKXh3shdw7qXi2hrwtM1a0Pls4O
Cs2C9rLUDMJTySrVDDVwpnaAB+8DcFrs9bIt5Q3gdOUatdzDvcb7QKh9jUvzCpbE
cInb1epDN5MRzowMR4iU2VV1RzLxCvm7CQSyXfgf0DFLkXWiknhOq9eINmytJFG/
ntFdiZFkNZ5hP709loywdfNrmqB6PsF8BPGFh8gKw1pjowrfHpv6cNIqShmA76LT
3OHViOlqGFB7obffq//eZGPR0oYJFDrOdD2CFRoHnP3N++AfkA4SRN7eXwyoz6Pk
Do9WNIEEkAcp6PGvv7AokogDo/4OqmxgC6fN+3BTOstWpv4FlD4NxOZWsTs49wxg
kPlCCVf8t75aZZkcjXng1eClZZQ5SBlRtSB7gMqtP7MIn2J5w8spNbs5xQvJc76u
NvzwEasPkY+UcHd05RddOUwoKqDerLUG7YqdlNCJoQR1mBIgZButbQlMyaZcmQqO
iR0kwDi9h6Dl6fnUb2dFCNJw+eDHvsjG8HI3IVZMl0bUQ2kmmwr1O2YQ1ynJQm0l
lMllI4hFU8/lHNHm8ie5darpVXQEwsGUBBMBCgA+AhsDBQsJCAcDBRUKCQgLBRYC
AwEAAh4BAheAFiEE/rkgny8vP0ZkhB5VrBB7OGaS2t0FAmUkSiIFCQ+P/Z0ACgkQ
rBB7OGaS2t3HVg//S+/KbeOBf+nCdHsrWtp9kxvWIpAGvQhIbxx1tp/impfm+5Rm
fKPD0KX+g42fuMmOdDE4gjO4GjGd7ZY3bx+0zbDSdVebzmYCbPZ/BDP990oPKidd
w6Gl8PaIyqfuARKOESBETvAwNgwO4t2ocjs4pYZV+CuHvESYpqkuHjmHtye6ajZW
Mv24NhjVo4EfP33dPugTjXLjeuGT7qQpsYV3a66juHmPVkXwuPqxh9wTNc5TU6FG
UPSfIGMPL0xha7Rg2i5zvRaAxx4bHqGO8IAz/l/E/tJkV5xnt494HQam9UDbiFI0
Q0TSve1R6S45/UjQW6cycyduHtk72s9ipa9YM0ilTdLgKMWFjzYv4h4qeYvLw3oB
JGQew+I0I4dIrwL/TKet33EuFfwmyT9MaJBhqV6geFaQ0uVmwvzpAcvxIoSqSpkJ
B/kASqCEM/o0QZLuWc56cDsmMisD0ouVPt+c1Zk7AWLlf6j8LKYTbK0QxLRh/eeZ
jhSf3HnpaCfonbOoHmeo5d/o3EZ0AiA4GbT3xgScoIgXOT7KGgOWmtWkdyd3Zvl/
o6q6Hwpg4RsqCkwnfNm5ZIvmTAYXWc2hiICSicxrP0fek5Cc4xVgJR5RMNGyI7+m
ut1SE2WvLhMCwEyl5ecWF0tUze8VBlWkHJp0Y4k2ado39Zq/DZrTRQYEVrjCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAmEyoZoFCQueVRUACgkQ
rBB7OGaS2t3axA//dgcz5T4Fs7LWdIQB/KRnvX64IzaGQcwt3FBhYH+sFaSaD+lu
752vi3jlGxMBKs2NFxk6e2U8xBEir3vfKYd+mZ5L6egXC9MYfvMO/UFEFH3A+t3V
dTOJK4RQcaL9+rFRVdDmZuifN9OFfy25d66JCZ5OiqgHTQViVmbrGw2cQdyNWXrq
YLgg+gktadkmzis4J6hF/le8NOBfrG3n+QthFl/v2ppYYW9pmmxzUIf6tAlR1Vr8
PhPukjuFfrPLRL3XPiK4LkdlSI5MX7Llq4RkcZN1NY1LWS8699wJOLRcr8aQYvzZ
Jm7tfZUaekJ5ScXJWJEaWT4poMbWxXINj6VwE+DqKWvjkzoxBXSIdLk4XThA1dIq
3n5SfMkfuWV2A2xHqJtEzI1XeTm/d/JRxIG8hjIs5FNMGJUSNANJuTVA2putCVf0
JbP4QlafXoEVOYwW/EFJY+brjQadwc/knf/QxszDcKb3THuTxR80A0h6ZysmtLEg
PCaD1xUCDdr4P7DGOtV7yMaDR6O8QKmb7TKzCKCPnHouqPT0DhSB2MRq437+mfSe
EGga/sPMxe0z8ugO2CnrCf3eplU3ZOy4eeQSThTKe0Hp5YlsF1cdZSvjt7GJaHR2
```

```
9A22nAJY9PojtlM+0Dkr/PH6r2brv3sEuACRNhzqCWhAve+zVnVLeb+Fk1rCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAmCavPYFCQsGcHEACgkQ
rBB7OGaS2t3fqg//asHYSTBI4IoLibSF5ZJ8NaLo4EqgRtsO0W1zr8fCoFbxI+yI
qWrNXR7eoFj8tWO7Tj6S0kQr4QZcucLeILfox6CtDzO3f3WQTH9m/0si5U4Jf3RA
gBd0vwxVSSSNEsIUUfylOBHLVwlhaTVfh1h1dZhzb18LA1Vqu0100GGxvaG3dUl4
oMSRSK8EeaSO4hIM8ScjVyhjsuPRm1jlwd1EXZ5mkHRGRMGmwi3XysJjIeQRFmuG
a9uPes7I/K85r7X91BLz+G/mkSZsrHxzLxF0mSZtQdhq08GyMeQlJavs7sb1UVbg
ag30JEAjgqRsNIQOMIvl2/amrRJ7DUyQu5YkZQsAyCIhSVZw6zlJlkYVKSw1Cu1I
VX1n/Aahx5wwaQZA1dDTolX8WvL9O/KmEGWbKUSov40uoRwSOeXP3QhW75kD4zT0
n3pSUc7tXka8GAz5Ar+r90l4wc9as2WjWADo3CX8cF0zQOrN1naMQ++xBIAG9ms8
y3L4ECoRqvjCpjUAfhflxwSM7uclCgFBINFKSLV+QGxzWfHjg3+bSQd0hrRn9j4z
Di9aJmFESQ6iykbUjiUFrcI1NUCFKz2awaxh+Sq8UkYcvuxljxdK/zYYEG8DSdQ2
uwlssHCjYVpAb16hq1EAaSqnhv86020G4Z6JCg3AUZt9RlMBpK2Pn/NmPSzCwX0E
EwEKACcCGwMFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AFAl771vAFCQlnimUACgkQ
rBB7OGaS2t35Jw/9GhpQquJVUCAsc4az7+ad8q2d9OUKXOLl2x0j3/ofS8umZJYr
8KXZxPqBqvLjlUyAB5Ur4fWVBdp9iP4Vj74jmRih7YatK8heGmNoUAnI1/90qV5O
ypFObfvWLxvcUNizmS/LYKdNuYcHwyw4bFyTz9gd3XH6Dxak7YiAXz3JgJIXcIB3
ELfpsduzpncLeVwz/dKhYX5iJ7Y/xd4Ew8Ian8FyNDNRwcXobTpPAMNiGLG5xSLq
8RgQfkm07BVVDtu5tPw4V46gnBXGXNjPhSirGMoNbKZqtPO7TcBQhPQ9c95x73hs
kAqZKHrwi1B7cfy1I8y5sRFbPa0RXeVWQKEMZdwLsFhCbEex6iXHP+rMK0nSJf0G
9lF2eJk140n8K7wzakOnjvN00VfN/9D+xD2lCXCzbYbaDXX2tYOd4GS72fW9M/zT
96tIH5UtMGMOICuUJjnL34EbzBuxwTEnJKhDGQH2P+eUzM9jmuCTRLLGw2P0Zuof
6GsSNLf+5pw3BIvEZw5PYT1N6i3ml9MQ7p9BWr7flCF8CU/xzyPN7TVb/677Be7V
SL1rNFLNi0IdqcbLJ63pTWaUGkCSqRnMfq3cIDlzNz2LoVvOO8VVmdtFRkhHN8hJ
h7CUXlaqBOfaJhV3FqA9G8sXmSN3r3pusZb13kfCKsJUZorThWxdaUBuUH3CwX0E
EwEKACcFAld1gAUCGwMFCQeGH4AFCwkIBwMFFQoJCAsFFgIDAQACHgECF4AACgkQ
rBB7OGaS2t1aKA//dBaXto7zUFRbJvLgcSE3hJ0ChYZj8Uuo7iYK26mVycyBFQJK
Iv2XYFIJMwK1Rx1Ja1jA6BIKE3aYyx2LVTYU1Hke826dhH+kV2qN9C6t/VmYpV4b
n/i64po7EzD17ykrm5gB+z47uCvyC79/r8Ouns1mTf/JUql/hYJj2hf1MDWr07/X
Wc1zBLjlT93tg/43Vgz1wFdrUOcNx1+bQGXKTOi4AXSp3UvCL+2YsQ2/JsPf7ZzZ
awSuUVkZJrllp87S1MhZeHmTrCHkV1FHJyudLJErcH0337Jpd8xDRek7Klrx2pAS
cKIiyeAMIk/G1OuExYqEEVFQzMr9ZlMNuhNBJAMr5hVGsTgrwy2hlIrBktXav07d
OleSlsqw9ViZ7F6t90x5l+NkwXVsLsGYSzuNyIfomNuoCgA+cfM3TjzVp41qsg1J
WJc9Bavaan2pKF6Lb9Fq8u3HZk2u+YZbvZkqkXwTdZZQOkEmoVV4Y1G86bdpmPyj
8eV7C02NxPii4l+qV8qJQu/6DsA0QwMtBMUNODm3BF2+ZmUHuhMGxq9/4vDE8heE
ffYhHtNftV6JwwzGZmeZkrYA1P9AGLeVp/6iNUe8H5/oPvh4s2rRmqN+L/dQU1ix
iOAT5iAKoRQGkduXrWc4fAY5KxDB9qna4oqXO6QP8rEflI8ELcNgYEj4oJvOwU0E
V3WABQEQALzM0Cs9Zvd08xOEvbEBj59LrS9d0HVKQ61gmkNakWC+jR35VD6FXpe6
UYAcBLrEbVYfKw9P0p6MhFKAsb570JoznKGzE1rVYUZQzhD0RKje35rvkajvEcjG
AWMLTjr87pWHeD0389ER64bzORncfa/l+YP56PI+CThb2wUvTTONGJkPQUpVhH+P
256cQL/Y0Fwu4XLerpwN+YKgMQ47raRcydobPeSfMQr9fVKRyOzFEOrvNpCVDUqi
77d0gLDLjHlIlDyOX5554S8XYLb91eYOiFvnu2pTCKiiExRCSYK29mAQePKlTCCn
QxOjbmBbGS8mVIkpQ5vpvXvzpY3JIjMXaDGqWSQSYGXhECyxCR5eOtKYbCwwPIc2
rIl5gW6yXyw9pKmj5XafTP7YHTvRSr7CZ/VLkDkWl6AfQ9nPOg1mjwjpDFpmN71h
```

```
JlSKMaZkh0QGV5FW3dK+GLwxiWdqx3htbZErWyvumWQF/xBF7puKJBEXcoM5KfkJ
uZekBwcnVkfNFF2RdkM1ALq8InGzLXc7ROuEm0BXVirfju7JRtWLb3UhJWCuhRW2
muyYegSTkag5MduD1IJK37GL8WIlAL65taYgZegUoxHdSaEOefOhspxuduz8d33z
UV1WCFhi+r/+BMCQmTRbF8ao7fTC1dGd084DRP6qE/dMT4u0ZEn7ABEBAAHCwXwE
GAEKACYCGwwWIQT+uSCfLy8/RmSEHlWsEHs4ZpLa3QUCZwAXCwUJEWvKhQAKCRCs
EHs4ZpLa3XtzD/9dwi1qffV70UTq8w/21jn1owHp09jxP7WHTmPWHE0BW5yFIWlV
A1gKN6Ym0dw+LvS5WOKJaRnyewUyBxWvZsn6Wlb5qzY7nmCOKJpYtuCUPwiqjXWP
EM8c/v0MojSuwMOXBAViLvOFhgdUrHn1lk962XvWAW++4DXFh2deaV0163IFMRmO
PNPDAiPWBVqvBANIh2sLRZ5gd1BXwpVrd+x8tzyr69YrN7hutPlCyPEUM9//mcEh
vFPsbW/iOx/foCE3NXhQm/rSMKecVn5csXBV2JOlMzi+8txYNrSBLkjbSB1AvTQ1
aG3+nCNCgM2XDLyoj0IrgZ1To4Ay5gmTOR+msY/cfoIuKFYenmtxy6jM8o5uSZHg
hoClrx9IA98hhGQ73G2r5EDpXuU/uCXn53Sswj65bl9IssfqEIoji/FonkkpEgeg
bGXFDUnrhicDO/WOzqpXf2Fa0DQWY+Vc/pt52ftBFgwzCNIUYDKUhCHPnZ0wtLtd
N2fkXHNiCavCDZlOud7FHHwmRNdj2q1uKxe4m+pFYmKwAU/H+Htkz9Gjsj+ZKedY
nnfai2s2gQOrbfwvV9VdhCWSuLK17ZnGTtiJuOUQIlV8n6QQJpohd3mVgmynu6gQ
uKw0YS2RuEUFv0vOg2tASA+4EM/SBUpGhudODLA4b5wO4gKmh1B1HqQrIsLBfAQY
AQoAJgIbDBYhBP65IJ8vLz9GZIQeVawQezhmktrdBQJlJEokBQkPj/2fAAoJEKwQ
ezhmktrdwMAP/RpFylIL4yhgscBOEnQ7e3No8OraNk0z/YhSd125N/uQVEU94JGQ
rrvQ+4Lfve2laPweBDO18/A0CsmOyHPVQMA0a2vx8ItVdIcNc8iFkP4AJ1922lOq
i0Vh0b1UeZnlfK9+Qvq4PQ2lhWJr0uzyL/S38REsAT1I25sfJOP+RCaR1MH9dm85
E56Lee6uZR8SkGuiL6kGpPh6fWTNij3bICjth1iSSCL2HCOW8lvcwSldDu2EfILU
QCSqfSG7bF8dFk+nKhzhVXOUks3XGjLdICxZewU5ycryitpfRgARgZs2A43gshdi
fiKaX6Ksan03uhKDrLhDHNj2y07PUrFo8ggtlRpV/PrlB/UqCsC9FUOixbD+n4ZF
Sqov2qwelLj0f4mZ6yiLsTDUOFPrdkOlHTJZl7AF0zXZMM6CvaCUaJCKx9GVdSrR
+LI4wLQonPrTnXavhkC4intlqSX8ZQNLhEggdE8YwMEJn59R/nVIT3i5WzYph5R9
P4Vz3Yn7jRqM8wAyEbHkA8s45fMRi9akWSw93H5nWukcmfkt3UEbmka3BQg3HKWP
6TvhfI28euM8qqjbPilfkpEBjnChYVk2Rgn0P8zA7Q5kCo293kwJL9c3RDjMPcxI
45ktKvBTZftsDt1Z718LwW7Q3VQiGiKvo1XLMuV7Z51fmydfUPcrnv17wsFlBBgB
CgAPAhsMBQJhMqGaBQkLnlUVAAoJEKwQezhmktrdbhwQAITmFb67XIUZswr3TREd
Q7ZCLG4EDyfTsW8n75r6A9OqsR+z68nC2Sm7e8mKQFFPwjHPOhsGhHtCOTZtQk7O
jbwyL4N3uxDyEvOfbckH5WzOejZcG7KKQrqAiWJJ7q6CH/zOnVurySjVyzJpy/wL
WpVAcF/uaW5ZhlFCXqePaEzsUBJ757qsr2ho14BV4seT1RSQ9nneTZ0Hhab3wqXP
4qDTo8+zkTvNo9YbeZ1qj62l1+QGIUBTP5MEdXCuC1e4FQ3f6vnXxmB86cUPx7cl
/y2rIjeiOdkKgPeUjNWWSzxS2jYehL5we7gvaSwmEvJ74pV+/3Hs+TxX39XtYFwj
k9I795idnsS5l1dAW3yoI3HBQsYa3US7bpH4g3yZMkstc3bHJ6X54PMCd8Skb+N3
FE8+zGduDmDTKitumiWVVxEFGIwsLAcpWPxecI2AMIMGfMheURYsdvD/yvCbCB29
0KwCSrDVkAG9N2VorNzd7KUeTPTMN1bg2d1lF6u5sQeTN5KVaGd7xE1OXME2wA2D
T3+EsAQytriFbcWm3s8Ugbc9BXMmKBfjlvKu6+Fr6Mgvf/txn56M2SyXBCFQ5OFt
qTFuAFIRv+nayk5tx5Eg1iA7u3dbB1jH3yxGH1B7TeQypA5BqD3x72b7vbXkeci3
1Kz035LYoT5/yTK5sGvacIvCwsFlBBgBCgAPAhsMBQJgmrz3BQkLBnByAAoJEKwQ
ezhmktrdLmgP/1FkWkYhxACnkagRv09mpPl2STbu0B3zYKFBALm/Wa7vKDz18dgC
S3BxDSlpnhZS8QA3VjmbOAZvaDnsN1UJ0f3Qao5136G/UXPnmFIwN612szP0K6nF
PEsotzIzRlJo3S+WkBfiKaQDIDgSxtUxJzOwufz76xibmKRhJ5ChMDCvxmIaoNle
tKRxFT77OupnnyaQs22UsueqrZJ0resgTVnNeF4A1+lU59pFuAlf971SVLr472LP
```

```
Uj8mPJihF2ukL1Hdz3F7+kYlpOJRmLk9fo4dlZHBUPiZ1ML/U2yhQfW+Y6tW71vf
izAxJWF7se6QT+UT5Pji6cohMSERVoYt8e2jFjs0PiPcrjU3mJEx4hAEEVIbP9RY
eKC4CL/UGYAtJkUjd85vKZUHYr7NWZQKLAKqpAPQUMKrIKLEHuz/doq2CCamstLI
vcBgg8EjLJnl3SBesFt/1DCWZeummqz3omQKRl9EHU2cIzIf0Cv/IEysnmbpSpjZ
DX8Fqjtezoq1qiyrLFR7YN1VDPBCHYfqDagw10nlrWFJqT6VqfslmdMdTBRWYVEB
0GUxrkyI+APdi0M2634/410b1ptkqyTIr1KIg1J/qsSiKVcBZSOYFW/rskxYcPPT
wpKYaycEYtOdkS6FPcnehJOOlB+F32WVq2bs2Ps8we6KhjjaYS4Iv4dwwsFlBBgB
CgAPAhsMBQJe+9W/BQkJZ4k1AAoJEKwQezhmktrdvzMQAI6BBj3c2r4bDpV3TwkX
dQ+UCa/E/zUhFds9XKfGb3a5IzRdPUwT+KrAZyiYrr2NSMOzhl/VtqJL18YCYsxO
Ob/TB1hDM+IZiI5gH0cHKhDYKTnNSGP09P/pJAlvHQend9CdZE9J9jwkczfS+bz6
mVxkxpi73fTDox9duesOLsS2/ntRzA0wqhDdaaavRvhAEf9vavCWVrNZmq22WVsU
lnIPxNWGGzWn85JYI6uAi4f4/ABFkry69/c0cvbr0P8qgCmeCuGmX4f0j7qRg77A
+mSueBDx8RK0O2ol021B7b8IcVizj+lpsRQN0oa+i+mFG+o6vtD1ZYhQude4N5sR
RybcLclxjSCoZs5q9JfTpbB2n7pSf/UD3ytwnt9kpD4Vv9dTGAPB83bjL+QK6e3A
XM10jxFE5jSFSr94E40kK80YcIR5jLqsg2f610ENY5drMSA4zuDFDL1Y2ChfjgjZ
uNoFbPHGt/8DfWTVOochVnikA7ggKjz20+RjvwyrHhRMAftO8MMh9UV28pdL+H53
oOtOV0u5aoTbcNqdYQy9B2Bw4lfmj2fi6Dpl+vnZp6hOm0CWiJVW/dtilppYjuxd
w5Kj+9IxZYaBNYH4l1pMT+BsvMDqGzXxDIL89NnY5BkMvqEKnjXSHGRWYMz0xigf
51YKbfQnEQ1oz5bRQndntRQWwsFlBBgBCgAPBQJXdYAFAhsMBQkHhh+AAAoJEKwQ
ezhmktrdTyEP/0HOVWHwQsaWjMrGj0OOMFzxGUo8SBmYYTBs29VM8wBGDsPkYCje
ZzU16i9iqDpDqxpyqmTigcjHV8CDx/6xsMBLG2yKaKZ4m3+YnOQf/sQkyCvqiyMF
9mS7pDYWy+mPhPuw8TDIfiqgVhzjSpIMFWPqxVjn6KKbPN/QASr3Pf0cuP6qpHG+
NAM6Q5dYkCebyvwzLmg1sVnil6iSyJd1jBj3D34XrgWS9buyxBB2CjIM76WxfNVi
J9zAaPI78X9v6PpDGn0kg6oLzrusrvBjoZknKQm0SZ+41fx6xvrTPs8uPEzevzJB
lkke6kw9+KagY8mrVX1ZenRg+sY/4vxJreYWQeql67ggx+wFjKDcfhZA7m7OLHOD
ysrGVCLcmuinUBaNlHmLDcGYXZ+kMCoXfObpuCVByQmNJgEb47EIFlx/+TEeNHKM
O+22xL1atFzXfkEVZck+NghLZyFDhS3g1bma7puU7r752uiJjA6Iv8+kHDXi+/V7
GNpuiEFUYh69QQ2//CS5H51osC/Bkb9evSn/Lp8dMubtWAaXDGJMgw9vqZ55N02N
K0fvF/IKHnGkvH28rv0OPCvOWTA/MClv28y0PrSvcvMXnduLtkBEX7TISMPW+n+O
Ta63/z4YFfEZ7sFLrEm3Q3vJMN3mE5i3cw+JGXPSu0nTtgqk/oZv//SS
=bboB
-----END PGP PUBLIC KEY BLOCK-----
```

## Tanggal kedaluwarsa: 2024-10-08

| | |
|---|---|
| ID Kunci | 0x AC1 07B386692DADD |
| Jenis | RSA |
| Size | 4096/4096 |
| Dibuat | 30/06/2016 |

| | |
|---|---|
| Tanggal kedaluwarsa | 2024-10-08 |
| ID Pengguna | AWS SDKs dan Alat < aws-dr-tools @amazon .com> |
| Sidik jari kunci | FEB9 209F 2F2F 3F46 6484 1E55 0 7B38 6692 DADD AC1 |

Untuk menyalin kunci publik OpenPGP berikut untuk SDK for Java ke clipboard, pilih ikon “Salin” di sudut kanan atas.

```
-----BEGIN PGP PUBLIC KEY BLOCK-----

xsFNBFd1gAUBEACqbmmFbxdJgz1lD7wrlskQA1LLuSAC4p8ny9u/D2zLR8Ynk3Yz
mzJuQ+Kfjne2t+xTDex6MPJlMYpOviSWsX2psgvdmeyUpW9ap0lrThNYkc+W5fRc
buFehfbi9LSATZGJi8RG0sCCr5FsYVz0gEk85M2+PeM24cXhQIOZtQUjswX/pdk/
KduGtZASqNAYLKROmRODzUuaokLPo24pfm9bnr1RnRtwt5ktPAA5bM9ZZaGKriej
kT2lPffbBjp8F5AZvmGLtNm2Cmg4FKBvI04SQjy2jjrQ3wBzi5Lc9HTxDuHK/rtV
u6PewUe2WPlnxlXenhMZU1UK4YoSB9E9StQ2VxQiySLHSdxR7Ma4WgYdVLn9bOie
nj3QxLuQ1ZUKF79ES6JaM4tOz1gGcQeU1+UklgjFLuKwmzWRdEIFfxMyvH6qgKnd
U+DioH5mcUwhwffAAsuIJyAdMIEUYh7IfzJJXQf+fF+XfOCl6byOJFWrIGQkAzMu
CEvaCfwtHC2Lpzo33/WRFeMAuzzd0QJ4uz4xFFvaSOSZHMLHWI9YV/+Pea3X99Ms
0Nlek/LolAJh67MynHeVBOHKrq+fluorWepQivctzN6Y1NOkx5naTPGGaKWK7G2q
TbcY5SMnkIWfLFSougj0Fvmjczq8iZRwYxWA+i+LQvsR9WEXEiQffIWRoQARAQAB
zsFNBFd1gAUBEAC8zNArPWb3dPMThL2xAY+fS60vXdB1SkOtYJpDWpFgvo0d+VQ+
hV6XulGAHAS6xG1WHysPT9KejIRSgLG+e9CaM5yhsxNa1WFGUM4Q9ESo3t+a75Go
7xHIxgFjC046/O6Vh3g9N/PREeuG8zkZ3H2v5fmD+ejyPgk4W9sFL00zjRiZD0FK
VYR/j9uenEC/2NBcLuFy3q6cDfmCoDEOO62kXMnaGz3knzEK/X1SkcjsxRDq7zaQ
lQ1Kou+3dICwy4x5SJQ8jl+eeeEvF2C2/dXmDohb57tqUwioohMUQkmCtvZgEHjy
pUwgp0MTo25gWxkvJlSJKUOb6b1786WNySIzF2gxqlkkEmBl4RAssQkeXjrSmGws
MDyHNqyJeYFusl8sPaSpo+V2n0z+2B070Uq+wmf1S5A5FpegH0PZzzoNZo8I6Qxa
Zje9YSZUijGmZIdEBleRVt3Svhi8MYlnasd4bW2RK1sr7plkBf8QRe6biiQRF3KD
OSn5CbmXpAcHJ1ZHzRRdkXZDNQC6vCJxsy13O0TrhJtAV1Yq347uyUbVi291ISVg
roUVtprsmHoEk5GoOTHbg9SCSt+xi/FiJQC+ubWmIGXoFKMR3UmhDnnzobKcbnbs
/Hd981FdVghYYvq//gTAkJk0WxfGqO30wtXRndPOA0T+qhP3TE+LtGRJ+wARAQAB
wsFlBBgBCgAPBQJXdYAFAhsMBQkHhh+AAAoJEKwQezhmktrdTyEP/0HOVWHwQsaW
jMrGj0OOMFzxGUo8SBmYYTBs29VM8wBGDsPkYCjeZzU16i9iqDpDqxpyqmTigcjH
V8CDx/6xsMBLG2yKaKZ4m3+YnOQf/sQkyCvqiyMF9mS7pDYWy+mPhPuw8TDIfiqg
VhzjSpIMFWPqxVjn6KKbPN/QASr3Pf0cuP6qpHG+NAM6Q5dYkCebyvwzLmg1sVni
l6iSyJd1jBj3D34XrgWS9buyxBB2CjIM76WxfNViJ9zAaPI78X9v6PpDGn0kg6oL
zrusrvBjoZknKQm0SZ+41fx6xvrTPs8uPEzevzJBlkke6kw9+KagY8mrVX1ZenRg
```

```
+sY/4vxJreYWQeql67ggx+wFjKDcfhZA7m7OLHODysrGVCLcmuinUBaNlHmLDcGY
XZ+kMCoXfObpuCVByQmNJgEb47EIFlx/+TEeNHKMO+22xL1atFzXfkEVZck+NghL
ZyFDhS3g1bma7puU7r752uiJjA6Iv8+kHDXi+/V7GNpuiEFUYh69QQ2//CS5H51o
sC/Bkb9evSn/Lp8dMubtWAaXDGJMgw9vqZ55N02NK0fvF/IKHnGkvH28rv0OPCvO
WTA/MClv28y0PrSvcvMXnduLtkBEX7TISMPW+n+OTa63/z4YFfEZ7sFLrEm3Q3vJ
MN3mE5i3cw+JGXPSu0nTtgqk/oZv//SS
=Z9u3
-----END PGP PUBLIC KEY BLOCK-----
```

# Riwayat dokumen

Topik ini menjelaskan perubahan penting pada Panduan AWS SDK untuk Java Pengembang selama sejarahnya.

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Kunci saat ini” | Tambahkan kunci PGP baru yang kedaluwarsa pada 2026-09-27. | Oktober 1, 2025 |
| Pola kode yang tidak didukung | Dokumentasikan pola kode yang tidak didukung dari alat migrasi. | September 23, 2025 |
| Alat migrasi | Pembaruan untuk rilis GA. | September 19, 2025 |
| Referensi metrik | Tambahkan detail selengkap nya tentang metrik yang dikumpulkan oleh SDK. | September 3, 2025 |
| the section called “Terapkan penguncian optimis dengan `VersionedRecordExtension`” | Tambahkan detail tentang DynamoDB Enhanced Client. `VersionRecordExtension` | September 2, 2025 |
| Temukan aplikasi menggunakan klien 1.x | Tambahkan instruksi untuk membantu mengidentifikasi aplikasi yang menggunakan klien AWS SDK untuk Java 1.x dengan menanyakan AWS CloudTrail peristiwa sebelum bermigrasi ke versi 2. | Agustus 20, 2025 |
| Manajer Transfer | Tambahkan tabel migrasi komprehensif untuk konstruktor klien, metode, objek model, dan perubahan perilaku. | Juli 1, 2025 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| | Termasuk contoh kode terperinci untuk metode yang tidak didukung yang memerlukan migrasi manual. | |
| Metrik-metrik | Tambahkan dokumentasi komprehensif untuk `LoggingMetricPublisher`. Merestrukturisasi topik metrik dengan panduan memulai yang lebih baik. | Juni 20, 2025 |
| the section called “Perubahan tingkat tinggi” | Tambahkan informasi tentang perbedaan penanganan string kosong antara `DynamoDBMapper` (v1) dan DynamoDB Enhanced Client (v2) dalam panduan migrasi. | Juni 18, 2025 |
| Daftar isi reorganisasi | Tambahkan ??? chapter yang dirakit dari bagian lain dari panduan ini. | Juni 16, 2025 |
| ??? | Tambahkan informasi tentang penggunaan kompatibilitas mundur `LegacyMd5Plugin` untuk sistem yang memerlukan MD5 checksum. | 19 Mei 2025 |
| the section called “Perbedaan klien S3” | Tambahkan perbedaan klien S3 antara v1 dan v2 AWS SDK untuk Java dan berikan contoh migrasi jika alat migrasi tidak dapat secara otomatis memigrasikan kode V1. | April 24, 2025 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| Perbedaan deserialisasi | Tambahkan perbedaan deserialisasi antara v1 dan v2 dari SDK for Java. | April 10, 2025 |
| the section called “SQS permintaan batching otomatis” | Tambahkan konten migrasi untuk batch permintaan otomatis SQS dari v1 ke v2 SDK for Java. | April 8, 2025 |
| ??? | Perbarui informasi tentang perhitungan checksum otomatis | April 3, 2025 |
| the section called “Konfigurasikan ALPN” | Tampilkan konfigurasi negosiasi protokol ALPN dengan klien HTTP berbasis Netty. | Februari 21, 2025 |
| the section called “Fungsi Lambda” | Tambahkan informasi tentang penggunaan penerbit metrik logging EMF AWS Lambda untuk menangkap metrik SDK. | Februari 6, 2025 |
| Melaksanakan `ContentStreamProvider` | Tambahkan topik tentang cara menerapkan`ContentStreamProvider` . | Januari 29, 2025 |
| the section called “Perlindungan integritas data dengan checksum” | Konten diperbarui dengan rincian tentang perhitungan checksum otomatis. | Januari 16, 2025 |
| the section called “Bekerja dengan Amazon S3” | Tambahkan konten migrasi untuk bekerja dengan Amazon S3. | Januari 8, 2025 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Akses klien HTTP AWS berbasis CRT” | Tambahkan informasi tentang cara menggunakan toples khusus platform dengan AWS komponen berbasis CRT. | November 14, 2024 |
| the section called “Gunakan Peran IAM Di Mana Saja untuk otentikasi” | Tambahkan informasi tentang cara menggunakan IAM Roles Anywhere untuk otentikasi. | 6 November 2024 |
| the section called “Contoh konfigurasi kredensial caching” | Tambahkan contoh yang mengonfigurasi penyedia kredensi dengan menggunak an properti. `asyncCred entialUpdateEnabled` | November 4, 2024 |
| the section called “Gunakan batching permintaan otomatis” | Tambahkan topik baru yang mendokumentasikan API Batching Permintaan Otomatis untuk Amazon SQS. | Oktober 23, 2024 |
| Kunci OpenPGP | Perbarui informasi kunci OpenPGP saat ini. | Oktober 10, 2024 |
| the section called “Gunakan tipe kompleks dalam ekspresi” dan the section called “Perbarui item yang berisi tipe kompleks” | Tambahkan konten untuk cara bekerja dengan tipe kompleks dalam ekspresi dan pembaruan. | Oktober 10, 2024 |
| Perbarui nama bucket Amazon S3 | Perbarui nama bucket Amazon S3. | September 30, 2024 |
| the section called “Optimalk an kinerja dengan titik akhir berbasis akun” | Tambahkan informasi tentang endpoint AWS berbasis akun untuk DynamoDB. | September 24, 2024 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Bekerja dengan atribut yang kacang, peta, daftar, dan set” | Update bagian untuk DynamoDB Enhance Client yang membahas bekerja dengan atribut yang tipe kompleks. | September 6, 2024 |
| the section called “Konfigurasikan klien layanan untuk memintas pencarian” | Memperjelas penggunaan `EnvironmentVariableCredentialsProvider` ketika Lambda SnapStart untuk Java digunakan. | Agustus 19, 2024 |
| the section called “Konfigurasikan dukungan transfer paralel” | Tambahkan halaman dengan informasi tentang cara mengaktifkan dukungan transfer paralel | Agustus 15, 2024 |
| the section called “Hasilkan UUID dengan AutoGeneratedUuidExtension” | Tambahkan informasi tentang DynamoDB Enhanced Client `AutoGeneratedUuidExtension` | Agustus 14, 2024 |
| ??? | Tambahkan bagian tentang alat migrasi (rilis pratinjau) | Agustus 9, 2024 |
| the section called “Notifikasi Peristiwa S3” | Tambahkan bagian yang membahas cara bekerja dengan S3 Event Notifications API | Juli 21, 2024 |
| the section called “Bekerja dengan DynamoDB” | Tambahkan informasi migrasi v1 ke v2 untuk pemetaan/dokumen DynamoDB APIs | Juli 21, 2024 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Notifikasi Peristiwa S3” | Tambahkan informasi migrasi v1 ke b2 untuk API Pemberita huan Acara S3 | Juli 21, 2024 |
| the section called “Percobaan ulang” | Tambahkan topik strategi coba lagi | Juni 18, 2024 |
| Cara mengatur JVM TTL | Hapus instruksi untuk mengatur properti `networkaddress.cache.ttl` keamanan dengan menggunakan properti sistem baris perintah java. | 21 Mei 2024 |
| the section called “Kurangi waktu startup SDK untuk AWS Lambda” | Perbarui rekomendasi klien HTTP untuk mengurangi waktu startup AWS Lambda | 14 Mei 2024 |
| the section called “Referensi metrik” | Atur ulang item tabel metrik | 1 Mei 2024 |
| the section called “Pemecahan masalah” | Tambahkan topik pemecahan masalah. | April 26, 2024 |
| the section called “Metrik dikumpulkan dengan setiap permintaan” | Tambahkan metrik baru yang dilaporkan oleh SDK. | April 26, 2024 |
| the section called “Mengatur JVM TTL untuk pencarian nama DNS” | Ubah TTL pencarian DNS yang disarankan menjadi 5 detik. | April 23, 2024 |
| the section called “Nama Package ke pemetaan ArtifactID” | Tambahkan nama paket ke topik pemetaan ArtifactID Maven. | April 17, 2024 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Metrik-metrik” | Tambahkan detail konfigurasi ke bagian metrik. | April 12, 2024 |
| the section called “API Pembuat Kebijakan IAM” | Tambahkan informasi migrasi API Pembuat Kebijakan IAM. | April 11, 2024 |
| ??? | Perbarui informasi proxy HTTP. | April 3, 2024 |
| the section called “Aman” | Tambahkan instruksi untuk menonaktifkan IMDSv1. | Maret 14, 2024 |
| the section called “Step-by-step instruksi” | Tambahkan instruksi step-by-step migrasi. | 8 Maret 2024 |
| Migrasi ke versi 2 | Perbarui topik migrasi. | Februari, 14, 2024 |
| the section called “Konfigurasikan AWS klien HTTP berbasis CRT” | Tambahkan informasi tentang klien HTTP AWS berbasis CRT sinkron. | Januari 5, 2024 |
| the section called “Identitas Amazon Cognito” dan the section called “Penyedia Identitas Amazon Cognito” | Contoh Amazon Cognito dipindahkan ke bagian Contoh Kode. | 28 Desember 2023 |
| Kunci OpenPGP | Berikan kunci OpenPGP saat ini. | 6 Desember 2023 |
| the section called “Perbedaan serialisasi” | Jelaskan perbedaan serialisasi antara v1 dan v2 SDK for Java. | 5 Desember 2023 |
| the section called “Manajer Transfer” | Tambahkan bagian yang merinci perubahan di S3 Transfer Manager dari versi 1 ke versi 2. | 13 November 2023 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Referensi anotasi” | Tambahkan daftar anotasi kelas data yang dapat digunakan dengan DynamoDB Enhanced Client. | 30 Oktober 2023 |
| ??? | Tambahkan informasi tentang status migrasi pustaka dan utilitas dari SDK for Java v1.x ke v2.x | 17 Oktober 2023 |
| ??? | Memperbarui topik penyiapan Gradle | 17 Oktober 2023 |
| the section called “Abaikan atribut null dari objek bersarang” | Tambahkan informasi tentang anotasi DynamoDB Enhanced Client. `@DynamoDbIgnoreNulls` | September 22, 2023 |
| the section called “Akses Lintas Wilayah” | Tambahkan informasi tentang akses lintas wilayah ke bucket Amazon S3. | 31 Agustus 2023 |
| the section called “Pertahankan benda kosong” | Tambahkan bagian yang membahas `@DynamoDbPreserveEmptyObject` anotasi. | Agustus 25, 2023 |
| ??? | Perbarui bagian klien layanan. | 15 Agustus 2023 |
| the section called “Rekomendasi klien” | Sejak versi 0.23, AWS CRT mendukung OS berbasis musl seperti Alpine Linux. Rekomendasi klien HTTP sekarang mencerminkan dukungan musl. | 11 Agustus 2023 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Buat kebijakan IAM” | Tambahkan bagian API Pembuat Kebijakan IAM | 31 Juli 2023 |
| the section called “Memulai” | Perbaiki beberapa cuplikan di bagian Memulai topik DynamoDB Enhanced Client. | Juli 24, 2023 |
| the section called “Konfigurasikan proxy HTTP” | Tambahkan informasi dukungan proxy HTTP dan contoh untuk setiap klien HTTP. | Juni 2, 2023 |
| Atur ulang daftar isi | Promosikan Contoh kode bagian dan Memanggil Layanan AWS ke entri TOC tingkat atas. | 24 Mei 2023 |
| the section called “Tambahkan ketergantungan logging” | Tampilkan dependensi Gradle di bagian logging. | 23 Mei 2023 |
| the section called “Paginasi” | Perbarui topik pagination. | 18 Mei 2023 |
| the section called “Siapkan proyek Gradle” | Perbarui penyiapan proyek Gradle. | 3 Mei 2023 |
| DynamoDB API Klien yang Ditingkatkan | Topik DynamoDB Enhanced Client API yang ditulis ulang dirilis. | 28 April 2023 |
| Perbarui instruksi tutorial mulai | Pola dasar Maven dimodifikasi untuk menyertakan opsi untuk CredentialsProvider; instruksi dimodifikasi sesuai. | 11 April 2023 |
| the section called “Rekomendasi klien” | Tambahkan panduan keputusan klien HTTP | 30 Maret 2023 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| Pembaruan praktik terbaik IAM | Memperbarui panduan untuk menyelaraskan dengan praktik terbaik IAM. Untuk informasi lebih lanjut, lihat Praktik terbaik keamanan di IAM. | 14 Maret 2023 |
| the section called “Muat ulang kredensi profil” | Tambahkan bagian tentang memuat ulang kredensyal profil. | 9 Februari 2023 |
| the section called “Konfigur asikan AWS klien HTTP berbasis CRT” | Perbarui topik untuk rilis GA. | Februari 8, 2023 |
| the section called “Bekerja dengan metadata instans Amazon EC2” | Tambahkan contoh terpandu untuk klien Java SDK untuk layanan metadata instans Amazon S3. | 1 Februari 2023 |
| the section called “Gunakan klien S3 yang berkinerja” | Tambahkan bagian untuk Klien AWS S3 berbasis CRT. | 19 Desember 2022 |
| the section called “Transfer file dan direktori” | Perbarui contoh Manajer Transfer Amazon S3 untuk rilis GA. | 19 Desember 2022 |
| the section called “Praktik terbaik” | Ditambahkan bagian praktik terbaik. | 18 November 2022 |
| the section called “Gunakan proses eksternal” | Menambahkan bagian tentang pemuatan kredensil dari proses eksternal. | 15 November 2022 |
| the section called “Referensi metrik” | Daftar metrik yang diperbaru i dengan persyaratan penggunaan klien HTTP. | 9 November 2022 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Transfer file dan direktori” | Contoh kode dikoreksi. | 2 November 2022 |
| the section called “Kurangi waktu startup SDK untuk AWS Lambda” | Bagian yang diperbarui dengan opsi tambahan untuk mengurangi waktu startup Lambda. | 1 November 2022 |
| the section called “Konfigur asikan klien HTTP” | Menambahkan informasi konfigurasi untuk mencakup semua klien HTTP di SDK. | 26 Oktober 2022 |
| the section called “Pencatatan log” | Topik logging diperbarui untuk menyertakan rincian wire logging untuk semua klien HTTP. | 4 Oktober 2022 |
| the section called “AWS layanan basis data” | Ditambahkan bagian ikhtisar layanan AWS database dan SDK for Java 2.x. | 13 September 2022 |
| EC2-Jaringan Klasik Pensiun | EC2-Classic akan pensiun pada 15 Agustus 2022. | 28 Juli 2022 |
| the section called “Opsi otentikasi tambahan” | Pembaruan ke ketergant ungan yang diperlukan untuk otentikasi masuk tunggal. | 18 Juli 2022 |
| the section called “Keamanan Lapisan Pengangkutan (TLS)” | Perbarui informasi keamanan TLS. | 8 April 2022 |
| the section called “Opsi otentikasi tambahan” | Menambahkan informasi lebih lanjut tentang pengaturan dan penggunaan kredensil. | 22 Februari 2021 |
| the section called “Siapkan proyek Gambar Asli GraalVM” | Topik baru untuk menyiapkan proyek Gambar Asli GraalVM. | 18 Februari 2021 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Pelayan” | Pelayan dirilis; menambahkan topik untuk fitur baru. | 30 September 2020 |
| the section called “Metrik-metrik” | Metrik dirilis; menambahkan topik untuk fitur baru. | 17 Agustus 2020 |
| the section called “Amazon SNS” | Ditambahkan contoh topik untuk Amazon SNS. | Mei 30, 2020 |
| the section called “Kurangi waktu startup SDK untuk AWS Lambda” | Ditambahkan topik kinerja AWS Lambda fungsi. | 29 Mei 2020 |
| the section called “Mengatur JVM TTL untuk pencarian nama DNS” | Menambahkan topik caching DNS JVM TTL. | 27 April 2020 |
| the section called “Siapkan proyek Apache Maven”, the section called “Siapkan proyek Gradle” | Maven dan Gradle baru menyiapkan topik. | 21 April 2020 |
| the section called “Keamanan Lapisan Pengangkutan (TLS)” | Menambahkan TLS 1.2 ke bagian keamanan. | 19 Maret 2020 |
| the section called “Berlangganan Amazon Kinesis Data Streams” | Menambahkan contoh Kinesis aliran. | 2 Agustus 2018 |
| the section called “Paginasi” | Ditambahkan auto pagination topik. | 5 April 2018 |
| ??? | Ditambahkan contoh topik untuk IAM, Amazon EC2, CloudWatch dan DynamoDB. | 29 Desember 2017 |

| Ubah | Deskripsi | Tanggal |
| --- | --- | --- |
| the section called “Amazon S3” | Ditambahkan getobjects contoh untuk Amazon S3. | Agustus 7, 2017 |
| the section called “Pemrograman asinkron” | Ditambahkan topik async. | Parquet |
| Rilis GA dari AWS SDK untuk Java 2.x | AWS SDK untuk Java versi 2 (v2) dirilis. | 28 Juni 2017 |

Terjemahan disediakan oleh mesin penerjemah. Jika konten terjemahan yang diberikan bertentangan dengan versi bahasa Inggris aslinya, utamakan versi bahasa Inggris.